



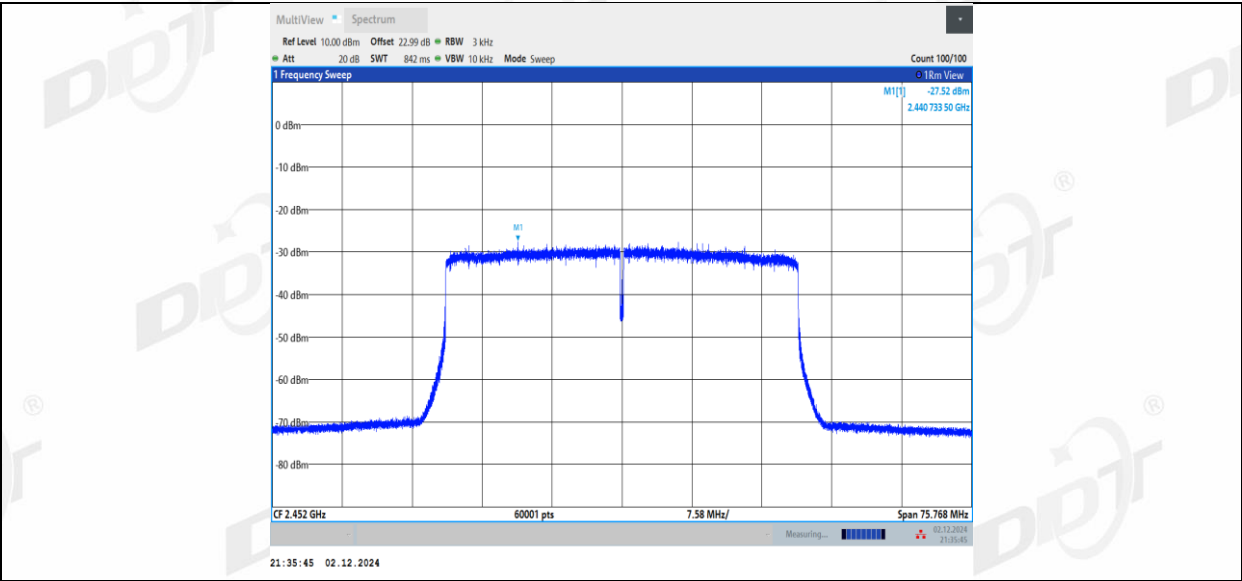

8. Band Edge Compliance (Conducted Method)

8.1. Block diagram of test setup

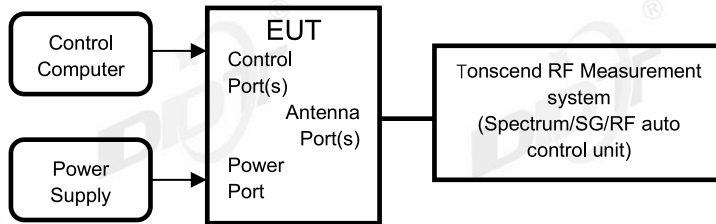

8.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

8.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.


Then mark the maximum amplitude of all unwanted emissions outside of the authorized frequency band.


8.4. Test result

Test Engineer:	Zoe	Test Site:	RF Measurement System 4#
Ambient Condition:	26.2℃,45.8%RH	Test Date:	2024.12.03-2024.12.03
Test Power Supply:	DC 5V	Sample Number:	S24101811-002


EUT Set Mode	CH or Frequency	Result(dBm)	EUT Set Mode	CH or Frequency	Result (dBm)
11b	CH1	Pass	11g	CH1	Pass
	CH11	Pass		CH11	Pass
11n HT 20	CH1	Pass	11n HT 40	CH3	Pass
	CH11	Pass		CH9	Pass
11ax HE 20	CH1	Pass	11ax HE 40	CH3	Pass
	CH11	Pass		CH9	Pass
11ax HE 20	CH1	Pass	11ax HE 40	CH3	Pass
	CH11	Pass		CH9	Pass

8.5. Test graphs

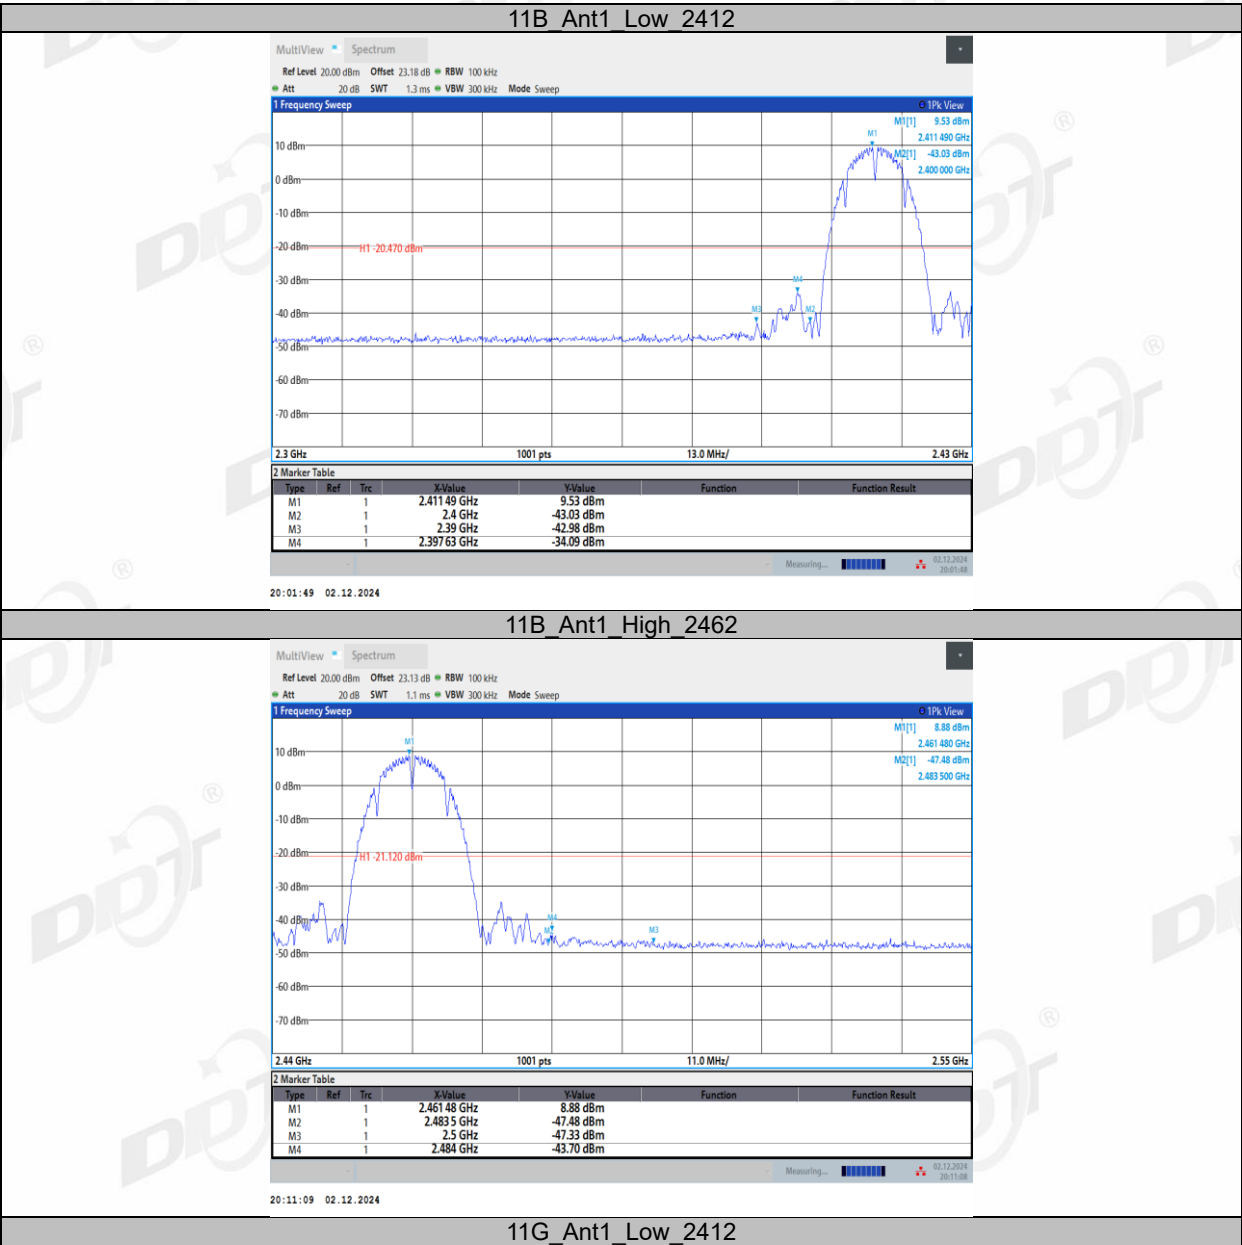

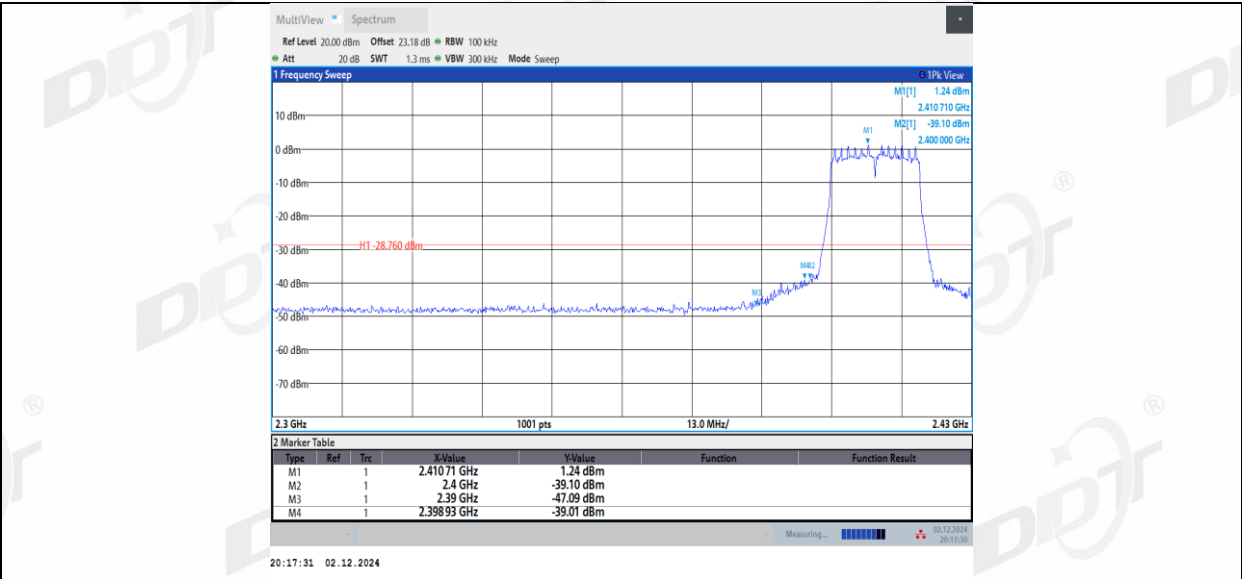


11G Ant1 High 2462

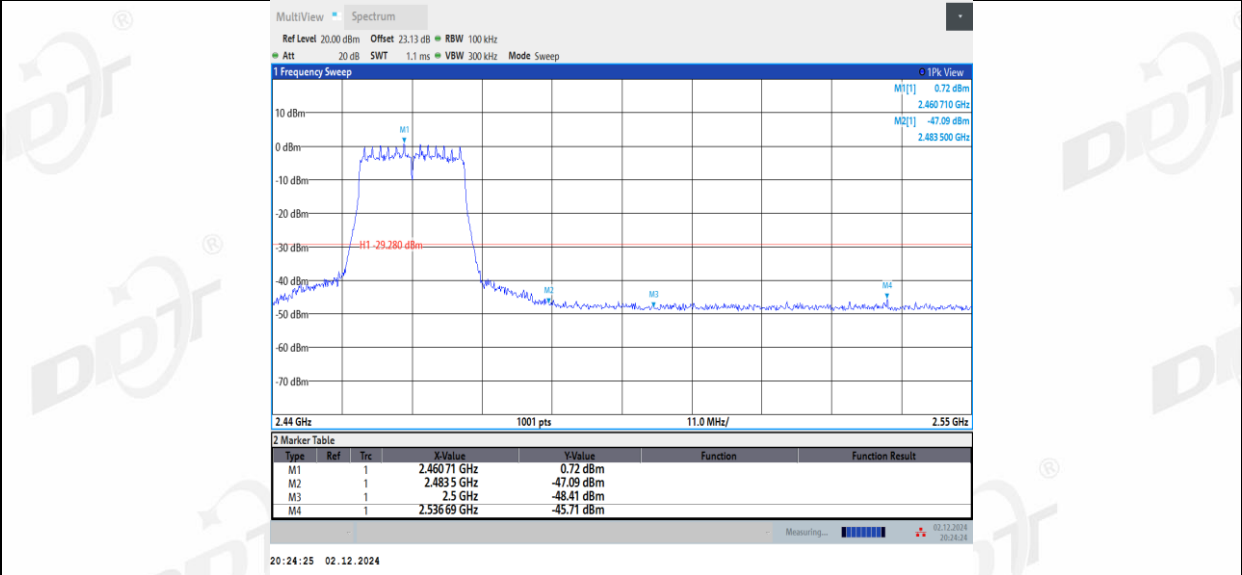

11N20SISO_Ant1_Low 2412




11N20SISO_Ant1_High 2462

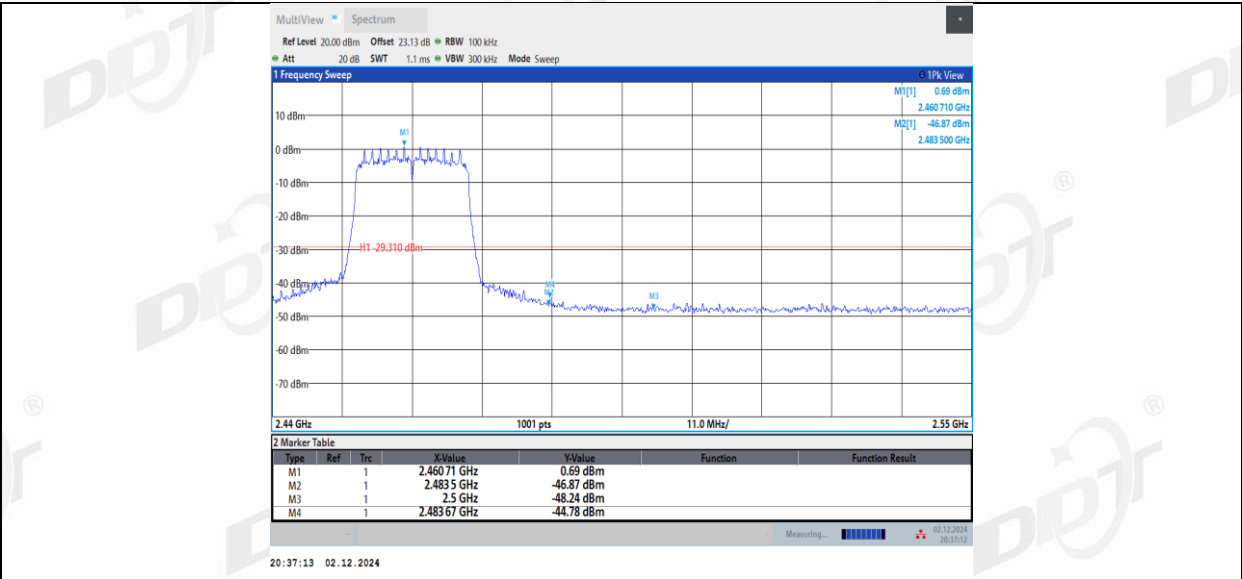


11N40SISO Ant1 Low 2422



11N40SISO Ant1 High 2452

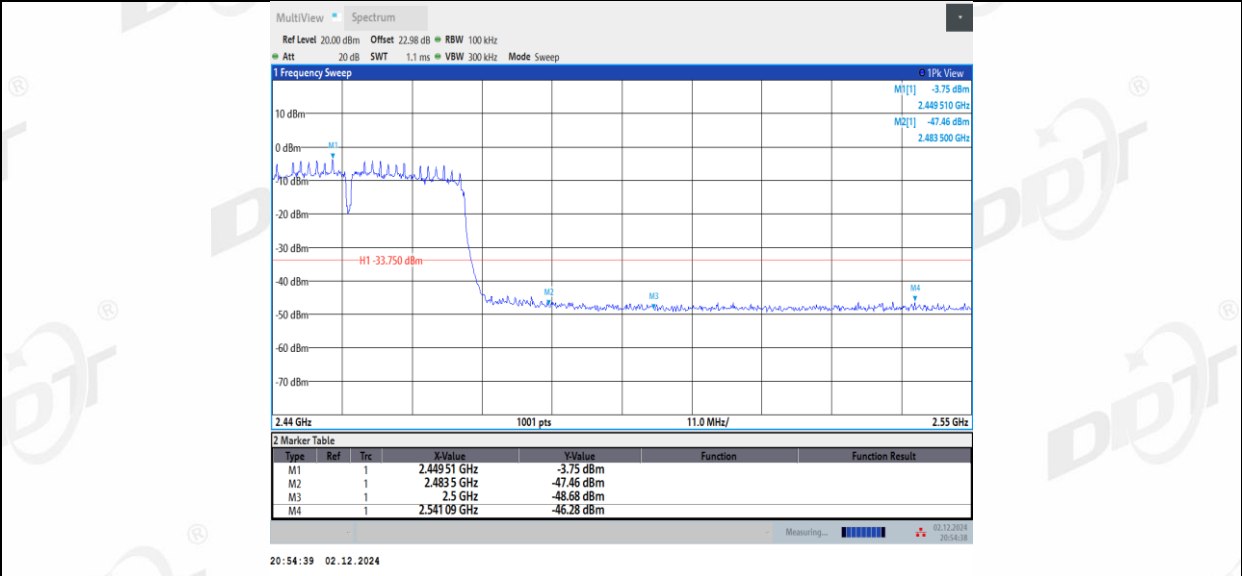


11AX20SISO Ant1 Low 2412

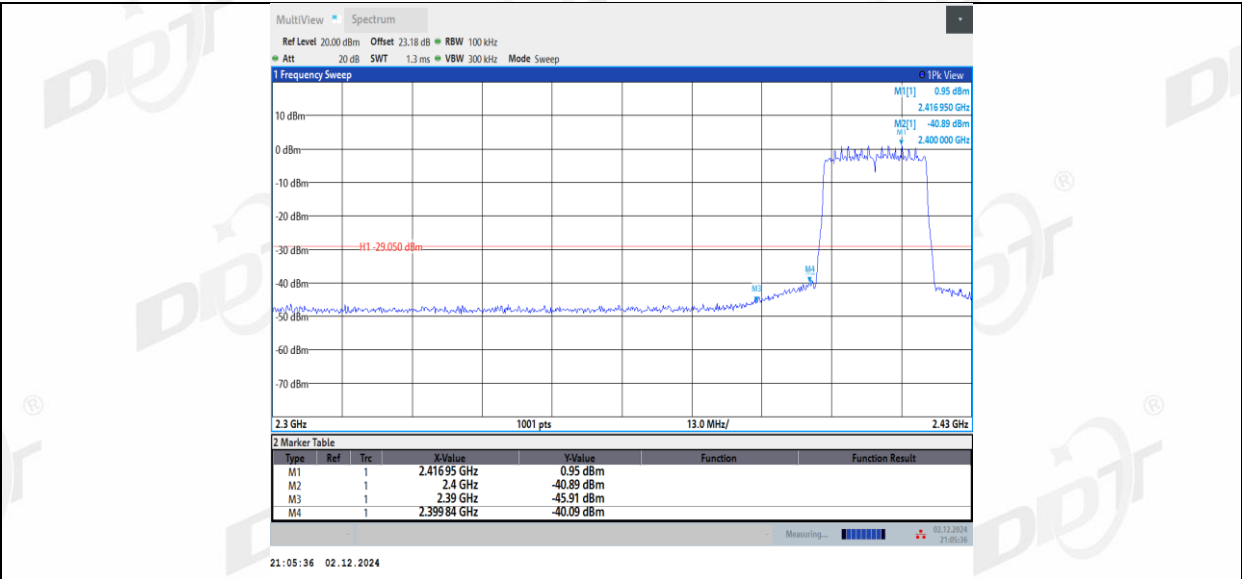


11AX20SISO Ant1 High 2462



11AX40SISO Ant1 Low 2422

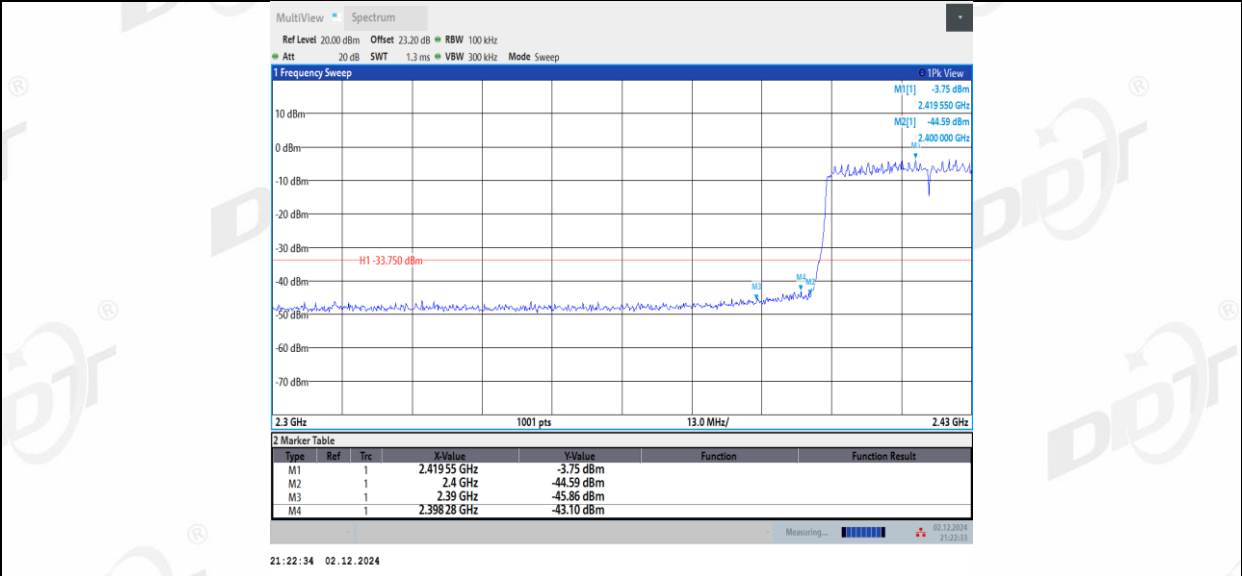


11AX40SISO Ant1 High 2452

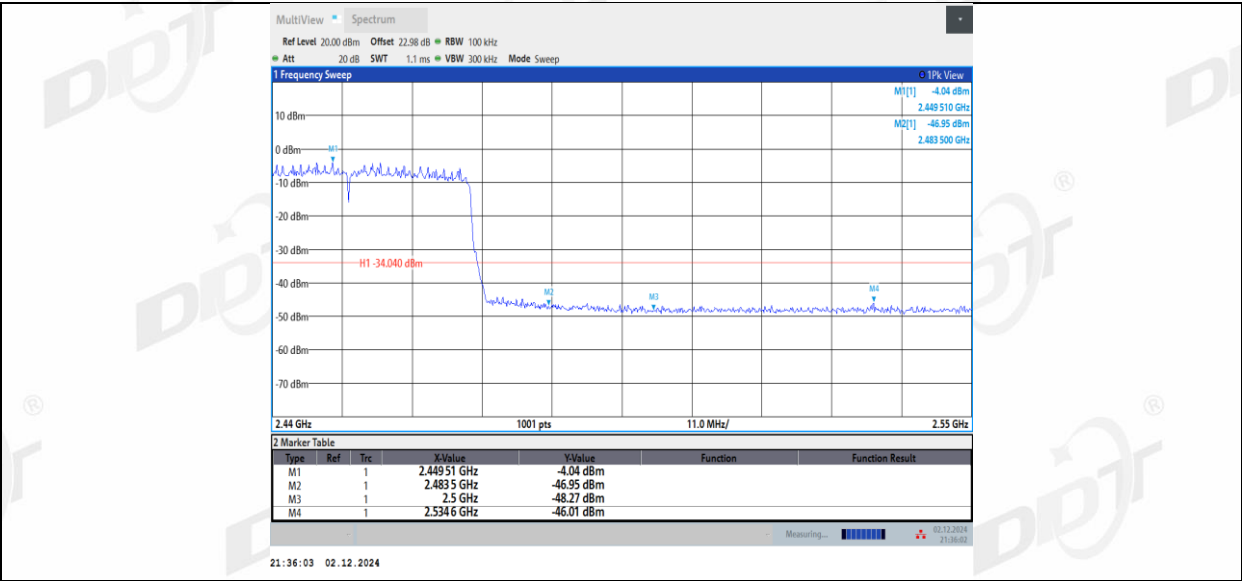

9. RF Conducted Spurious Emissions

9.1. Block diagram of test setup

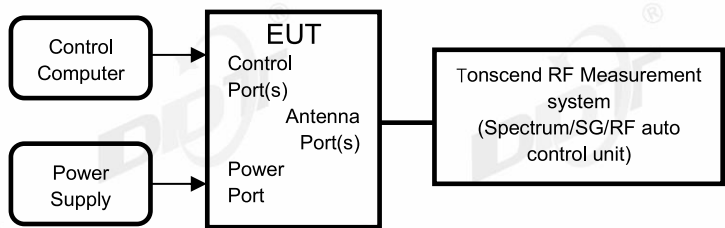

9.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

9.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Establish a reference level by using the following procedure:

Center frequency	Test frequency
RBW:	100 kHz
VBW:	300 kHz
Span	Wide enough to capture the peak level of the in-band emission
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold
- (3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.
- (4) Set the spectrum analyzer as follows:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Number of measurement points	$\geq \text{Span/RBW}$
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold


(5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band


9.4. Test result

Test Engineer:	Zoe	Test Site:	RF Measurement System 4#		
Ambient Condition:	26.2℃,45.8%RH	Test Date:	2024.12.03-2024.12.03		
Test Power Supply:	DC 5V	Sample Number:	S24101811-002		


EUT Set Mode	CH or Frequency	Result(dBm)	EUT Set Mode	CH or Frequency	Result (dBm)
11b	CH1	Pass	11g	CH1	Pass
	CH11	Pass		CH11	Pass
11n HT 20	CH1	Pass	11n HT 40	CH3	Pass
	CH11	Pass		CH9	Pass
11ax HE 20	CH1	Pass	11ax HE 40	CH3	Pass
	CH11	Pass		CH9	Pass
11ax HE 20	CH1	Pass	11ax HE 40	CH3	Pass
	CH11	Pass		CH9	Pass

9.5. Test graphs

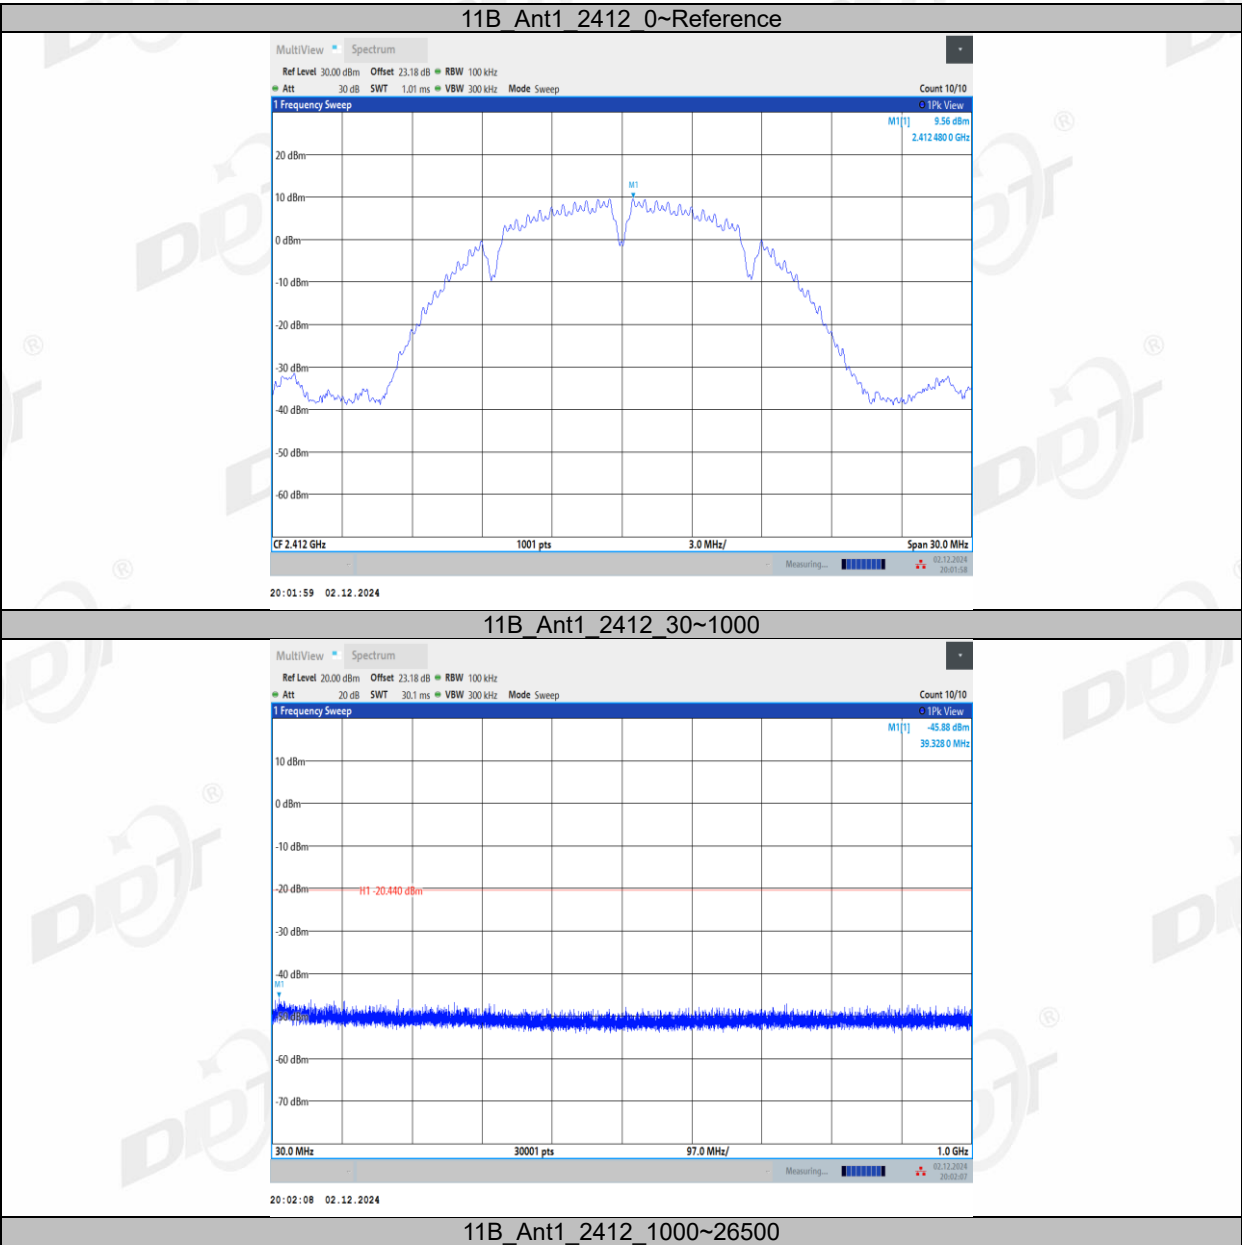


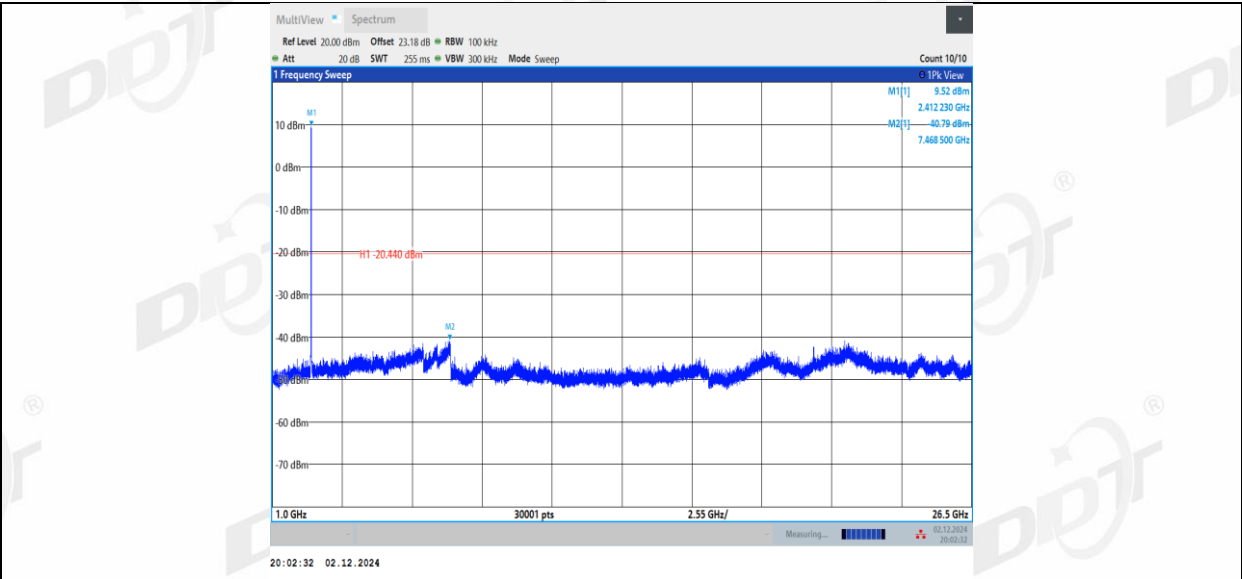


11B_Ant1_2437_0~Reference

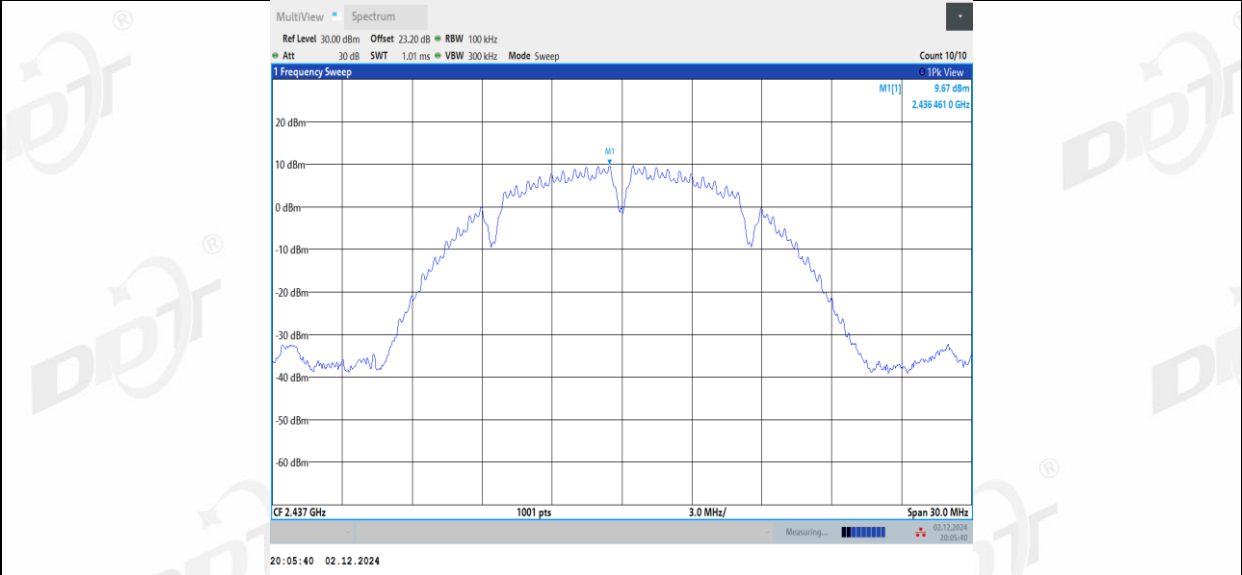


11B_Ant1_2437_30~1000

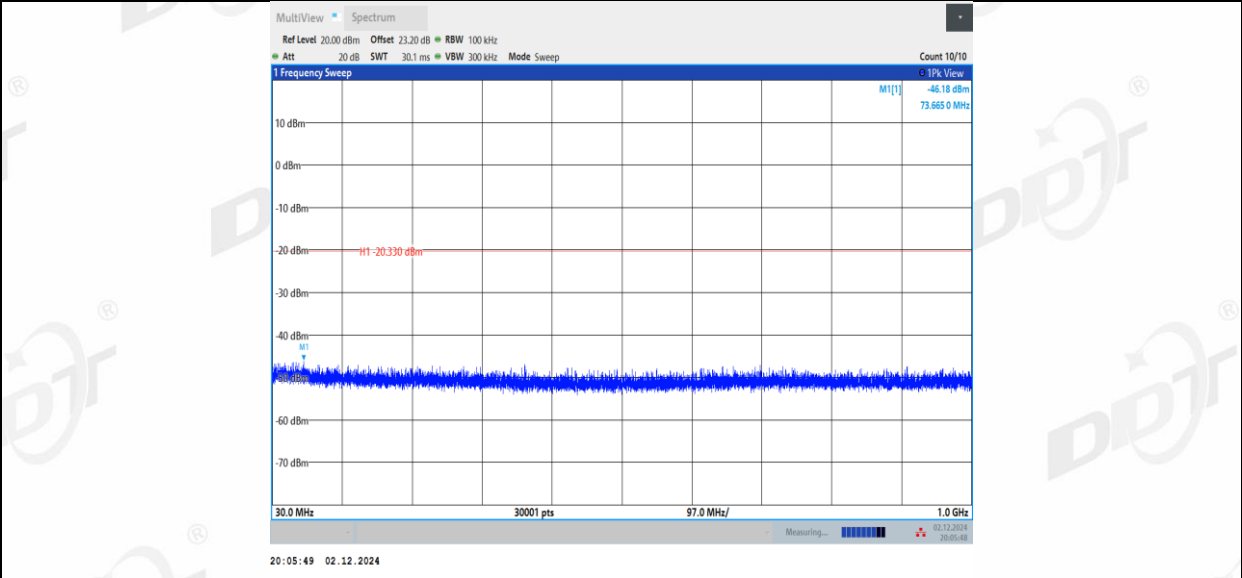


11B_Ant1_2437_1000~26500

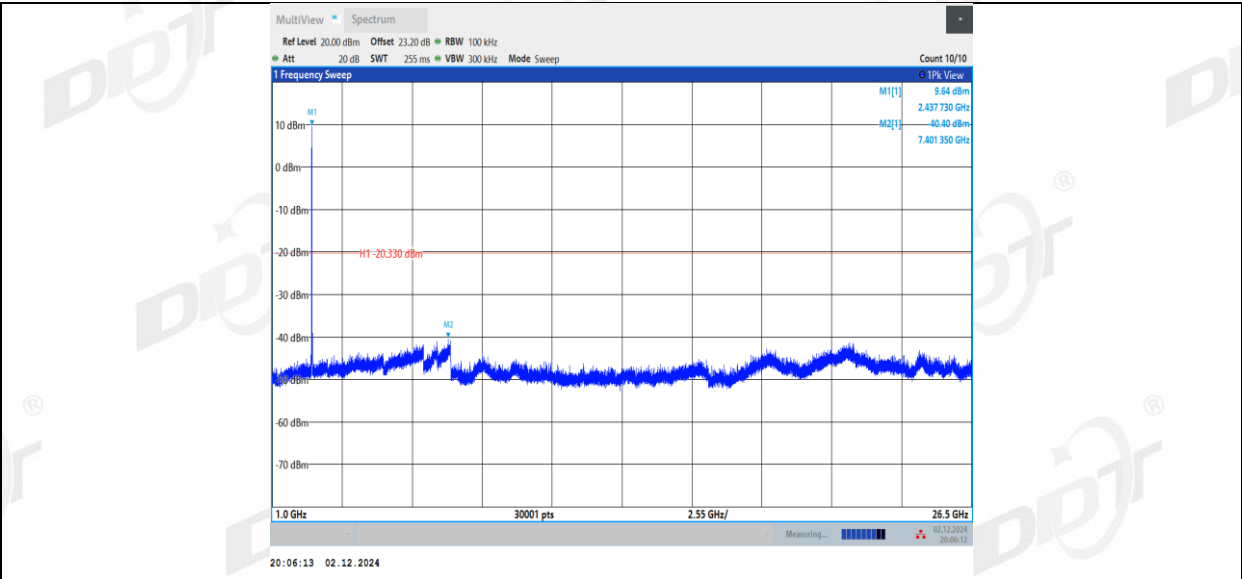


11B_Ant1_2462_0~Reference

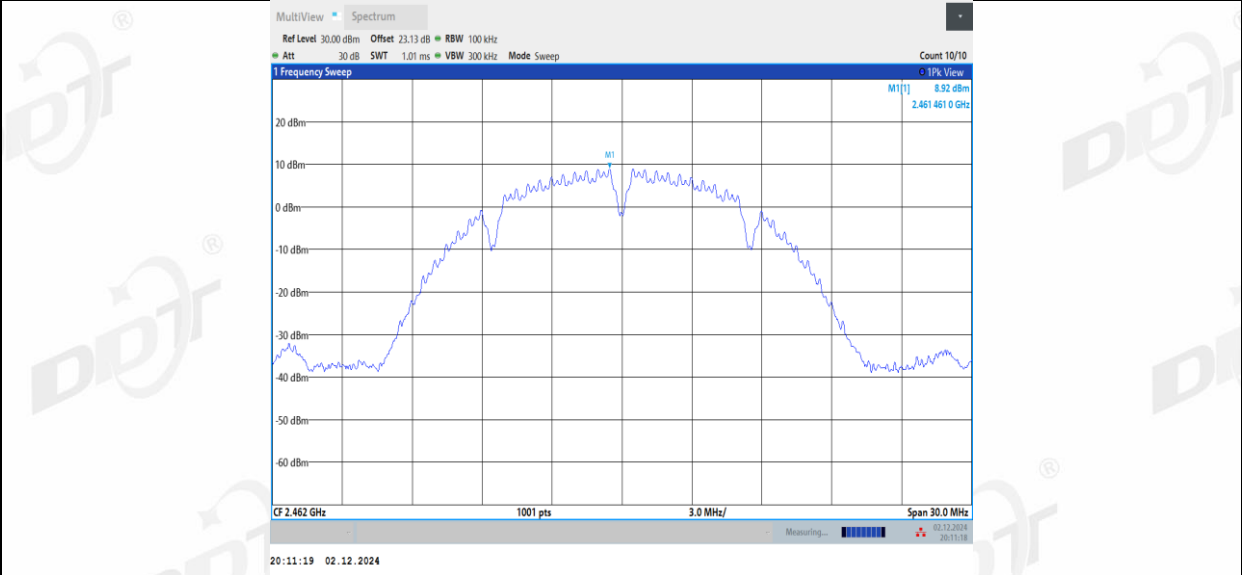


11B_Ant1_2462_30~1000

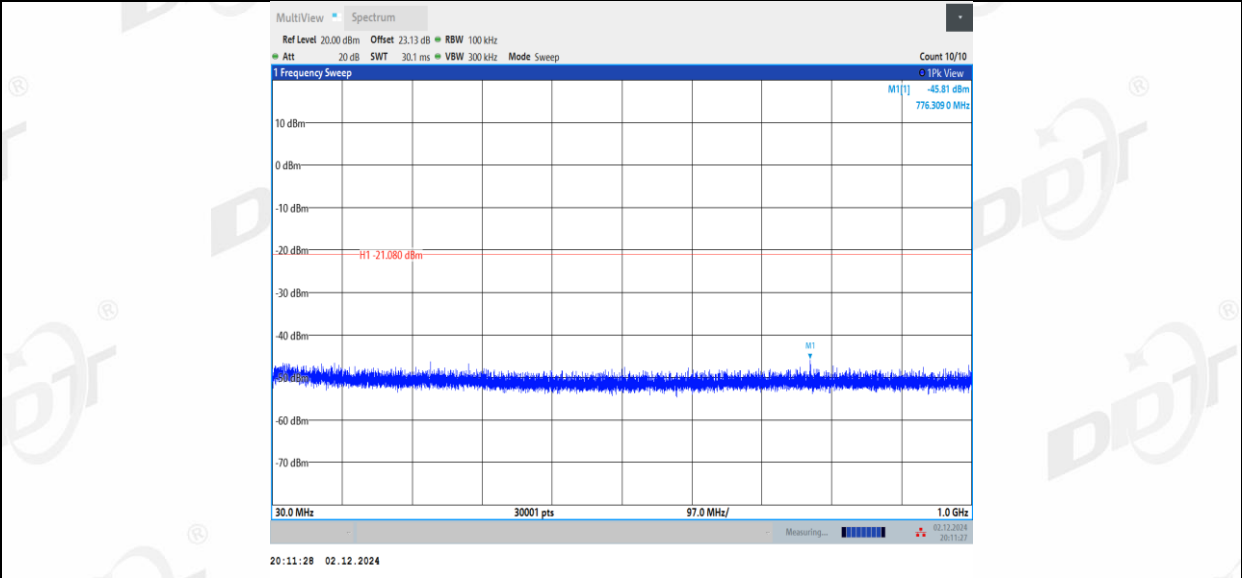


11B_Ant1_2462_1000~26500

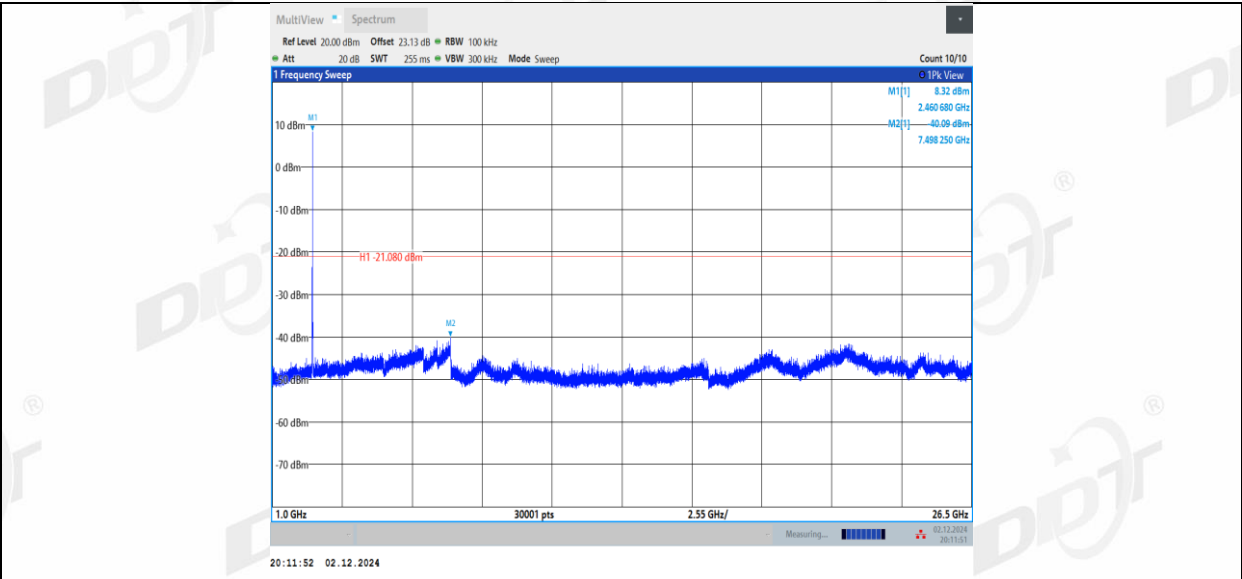


11G_Ant1_2412_0~Reference

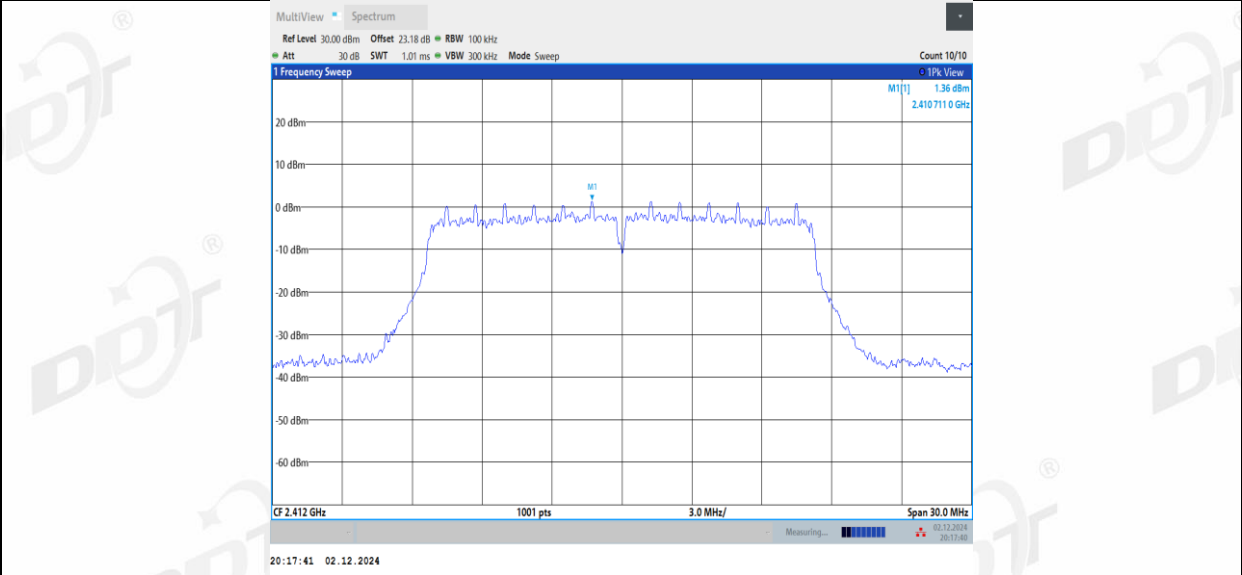


11G_Ant1_2412_30~1000

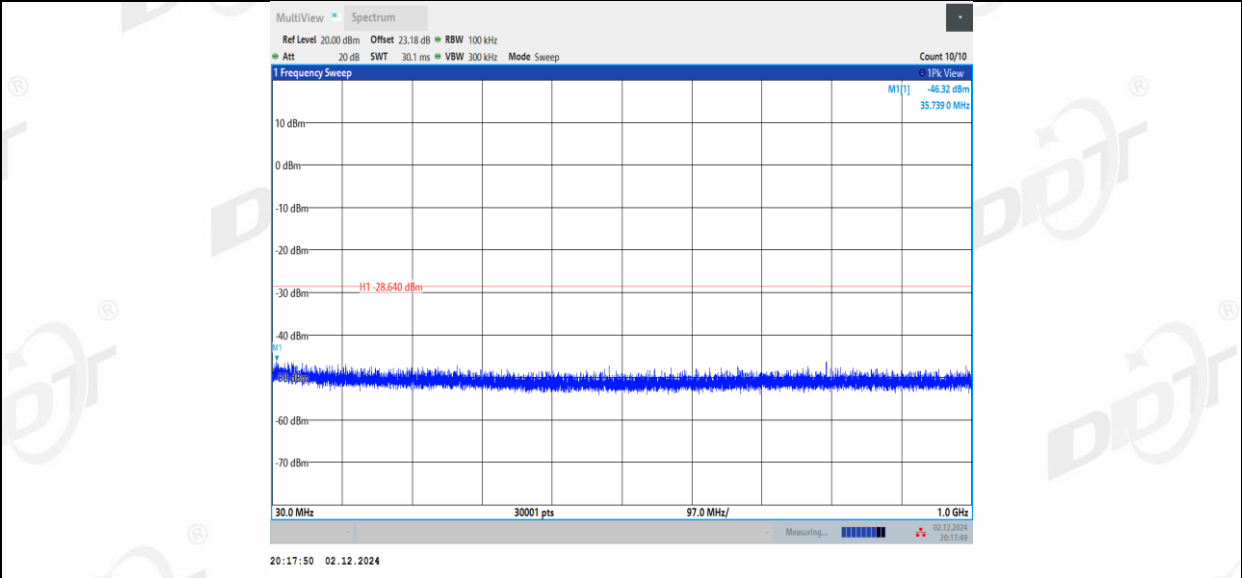


11G_Ant1_2412_1000~26500

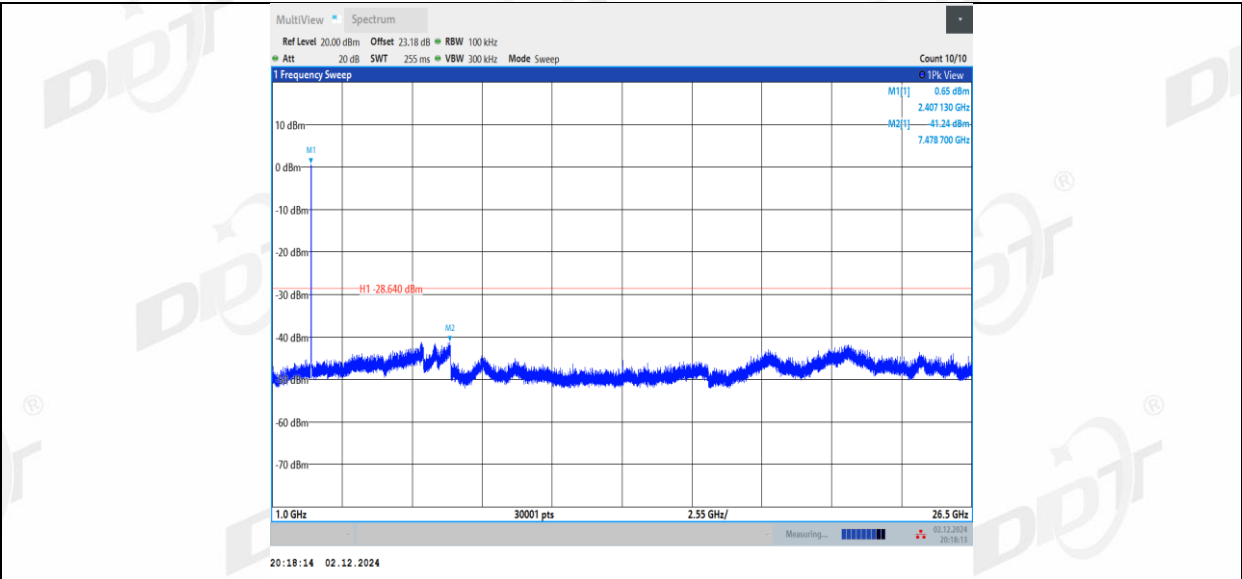


11G Ant1 2437 0~Reference

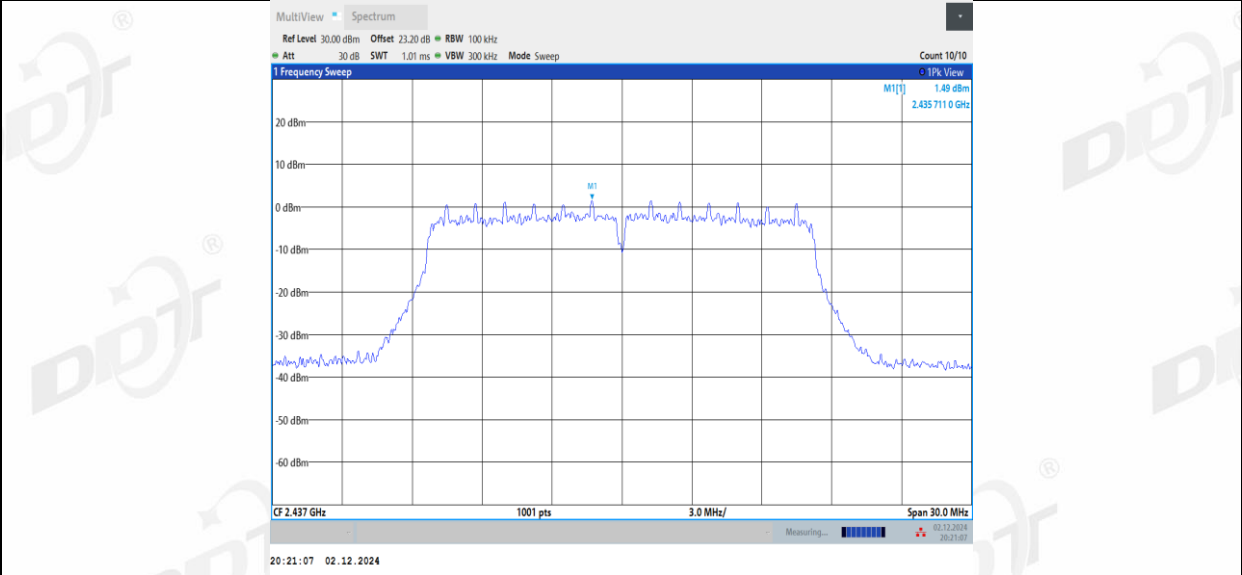


11G Ant1 2437 30~1000

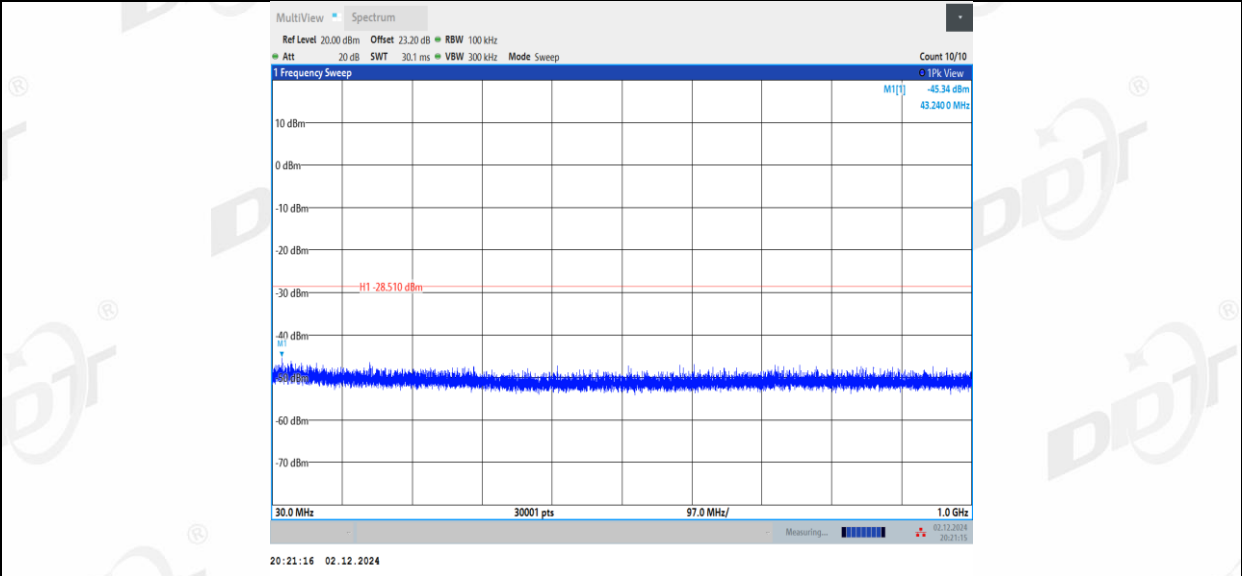


11G Ant1 2437 1000~26500

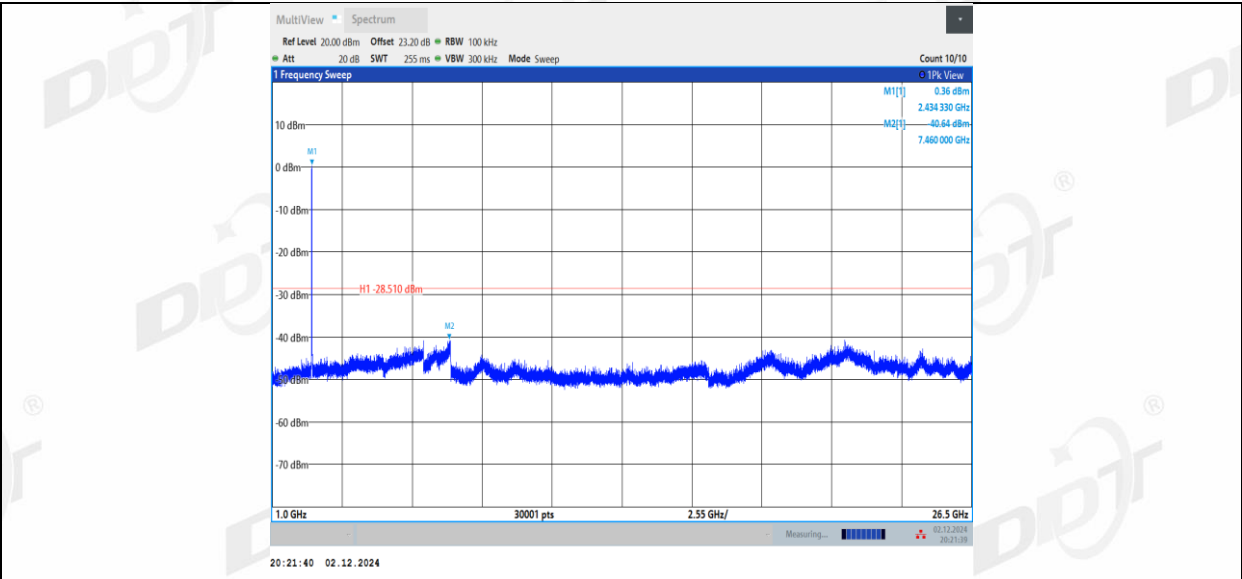


11G Ant1_2462_0~Reference

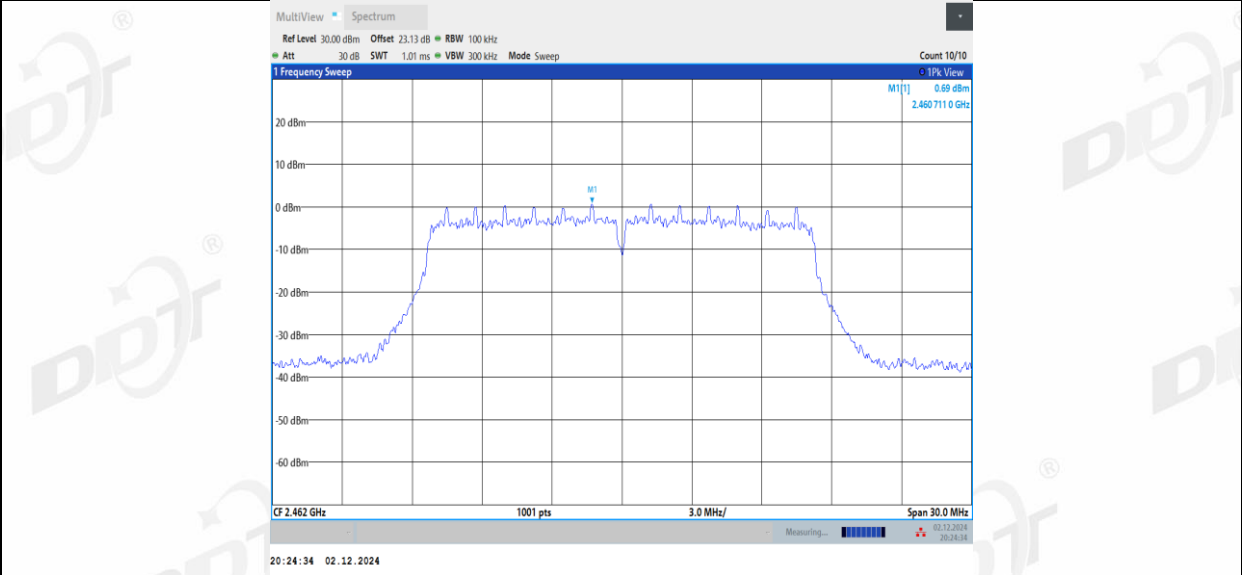


11G Ant1_2462_30~1000

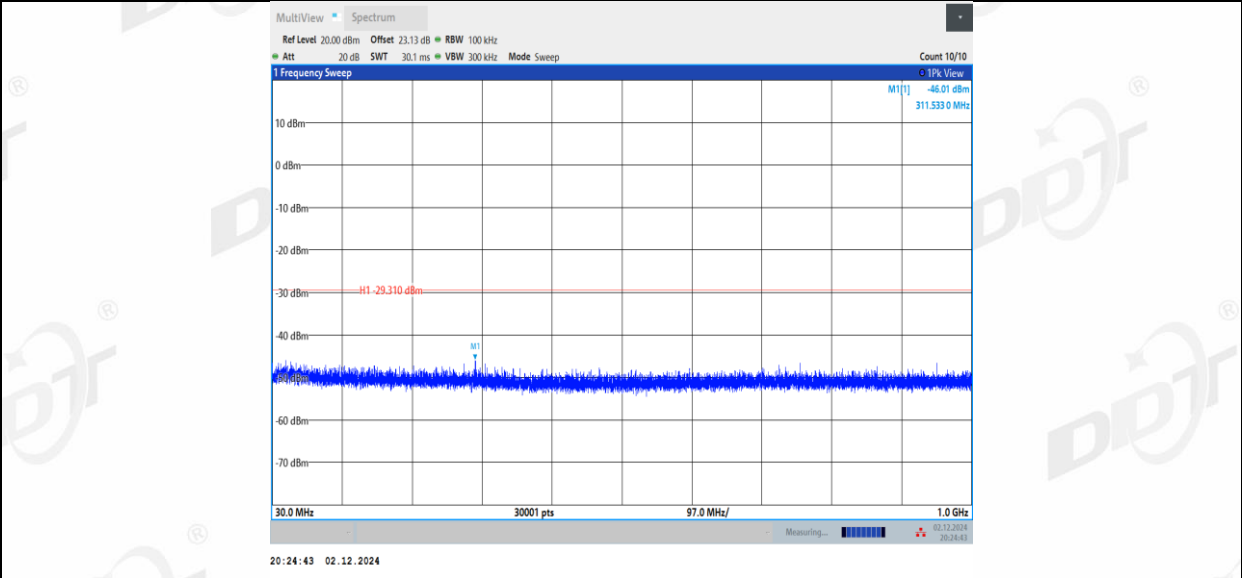


11G Ant1_2462_1000~26500

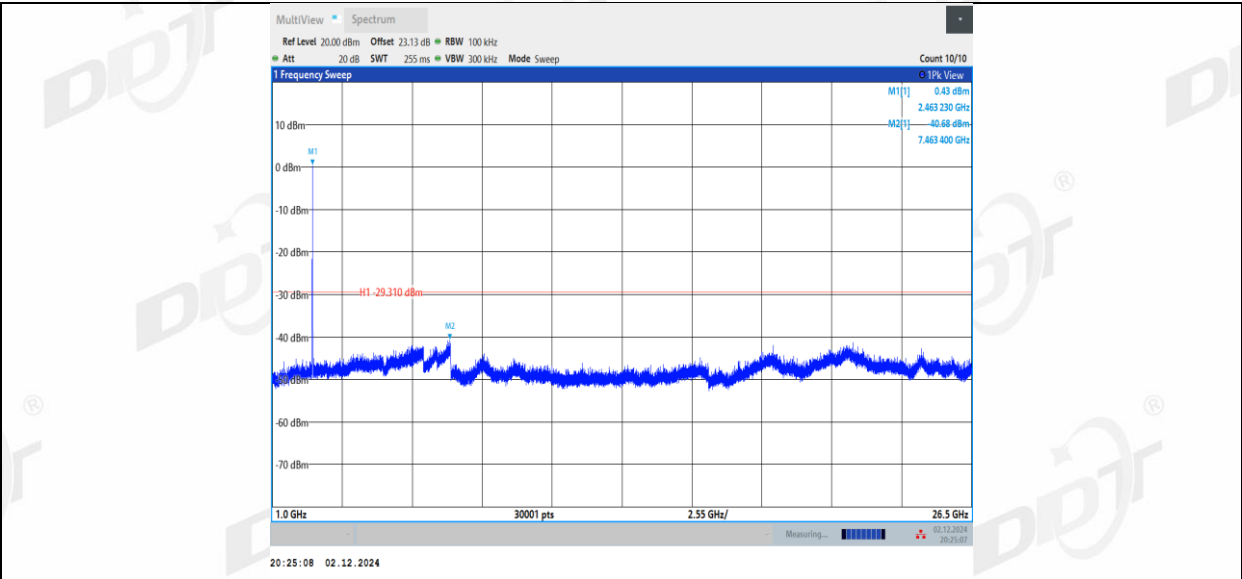


11N20SISO Ant1_2412_0~Reference

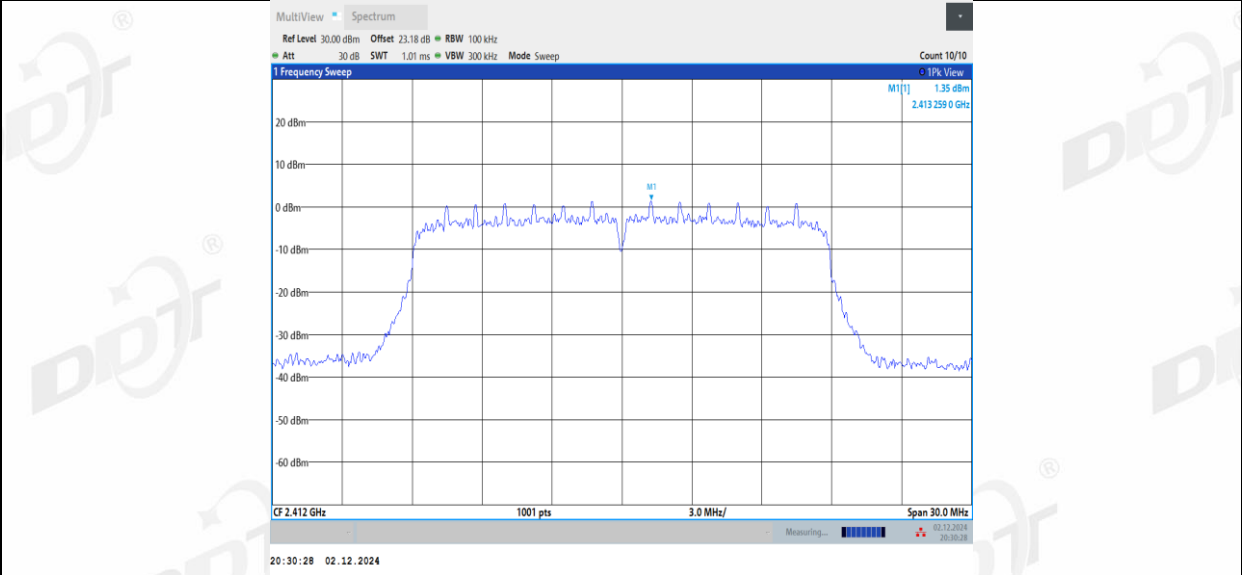


11N20SISO Ant1_2412_30~1000

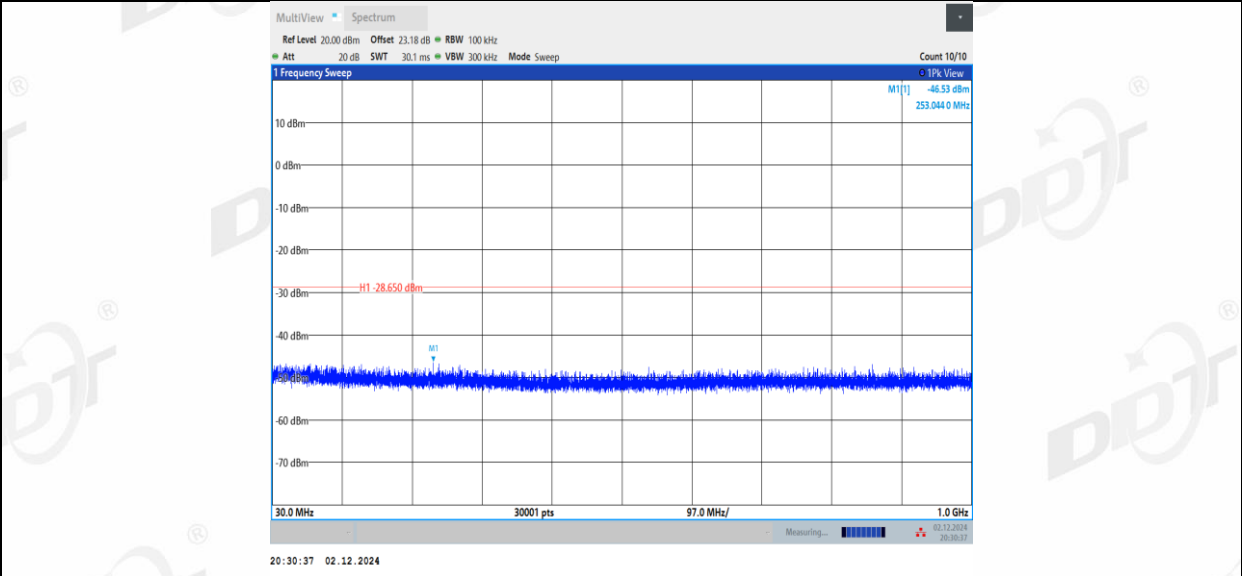


11N20SISO Ant1_2412_1000~26500

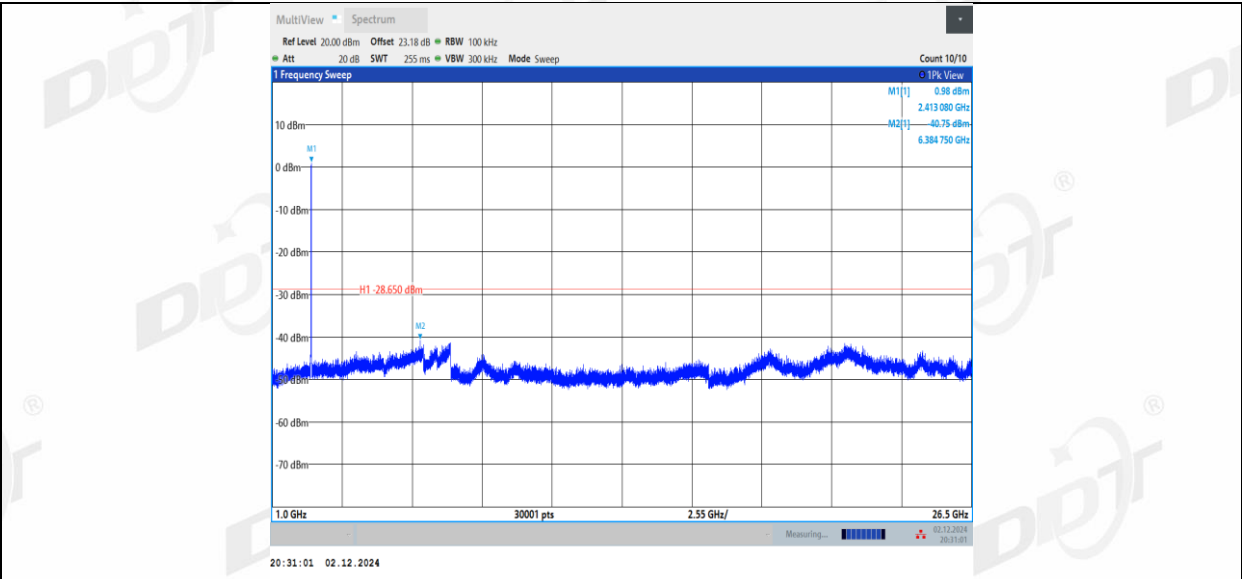


11N20SISO Ant1 2437 0~Reference

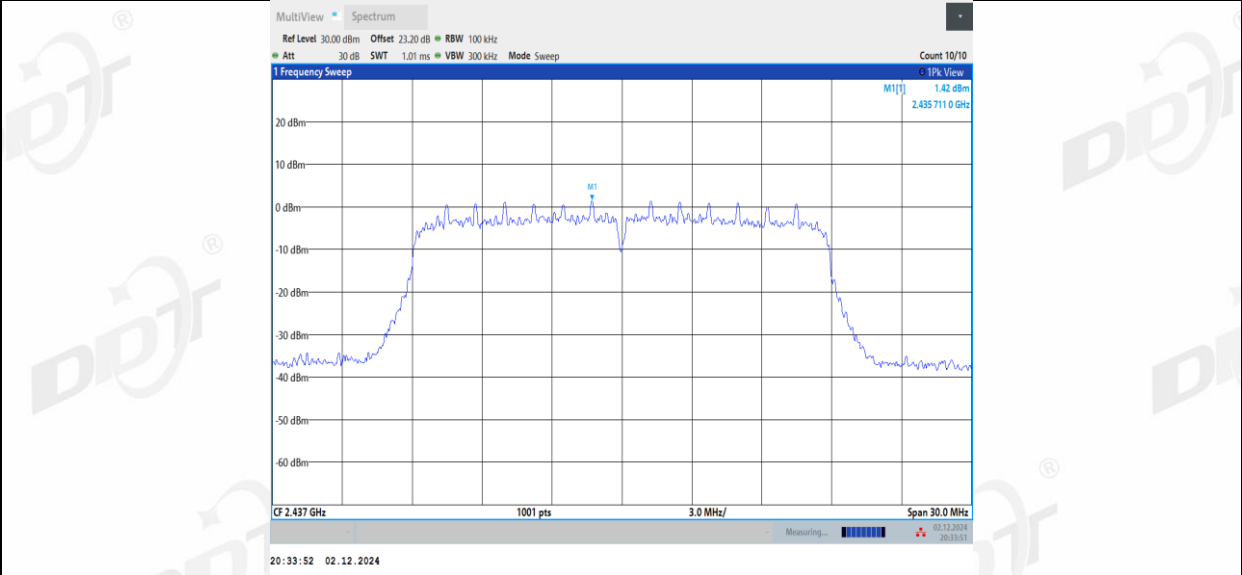


11N20SISO Ant1 2437 30~1000

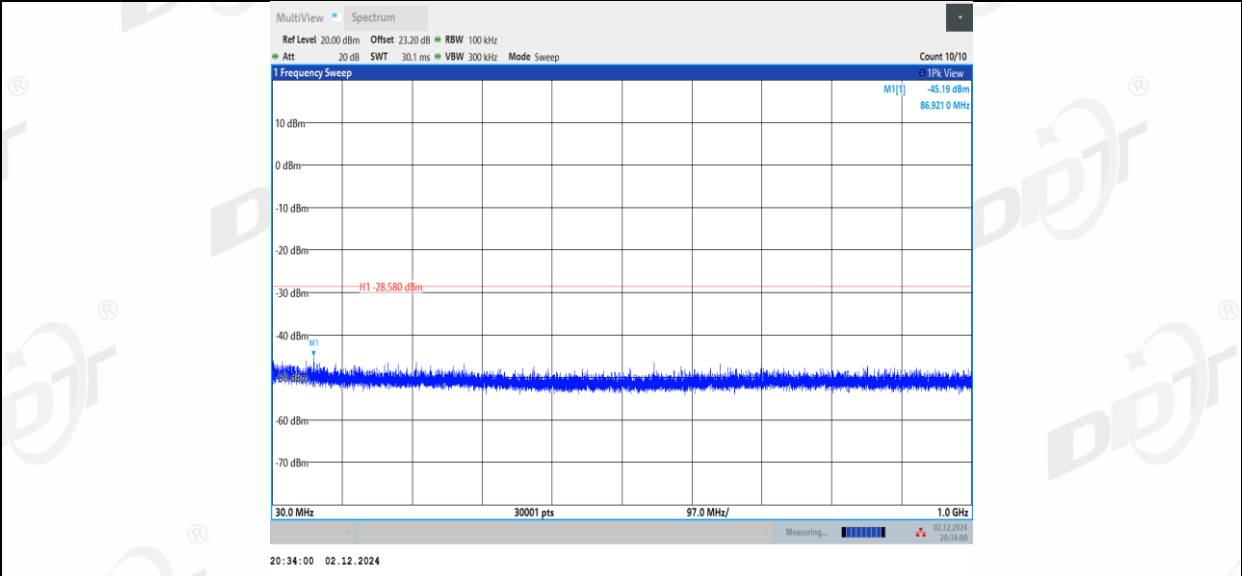


11N20SISO Ant1 2437 1000~26500

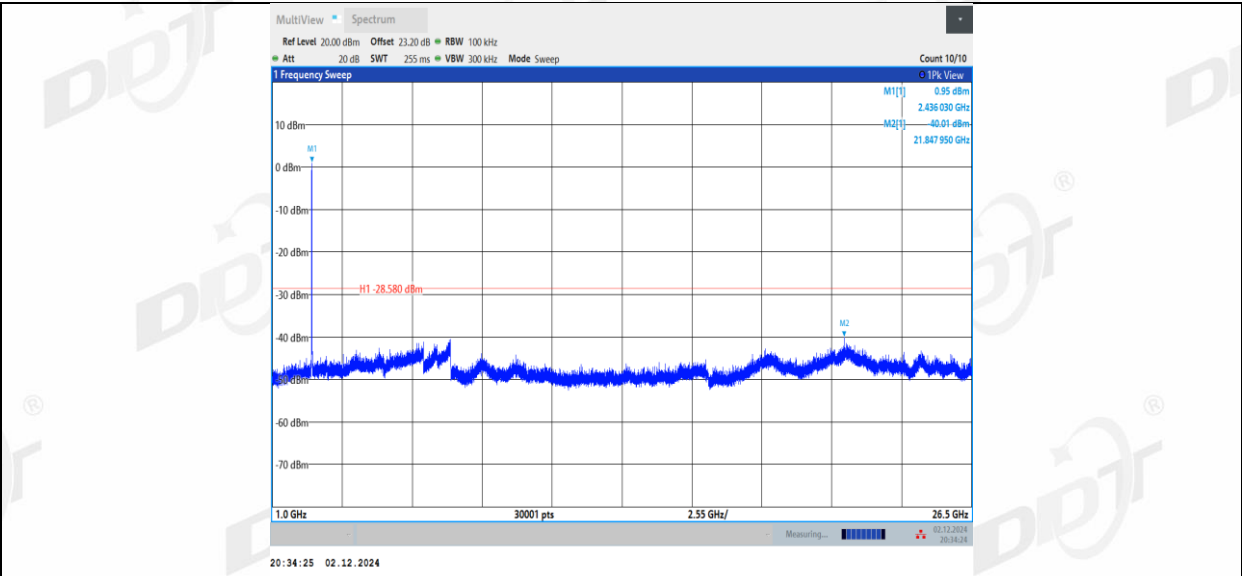


11N20SISO Ant1_2462_0~Reference

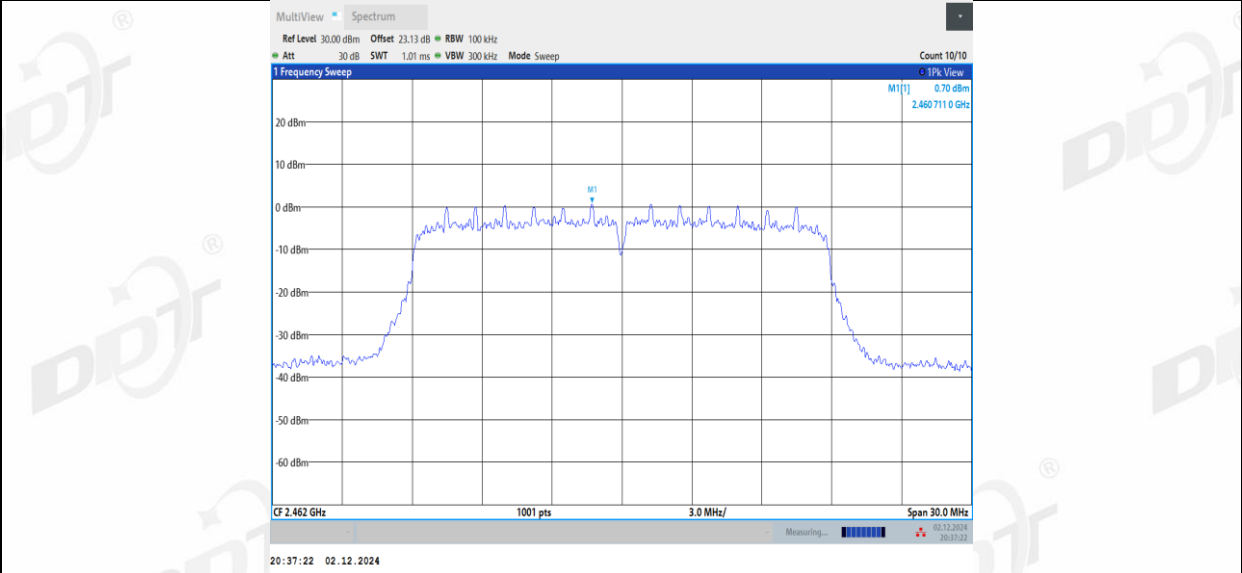


11N20SISO Ant1_2462_30~1000

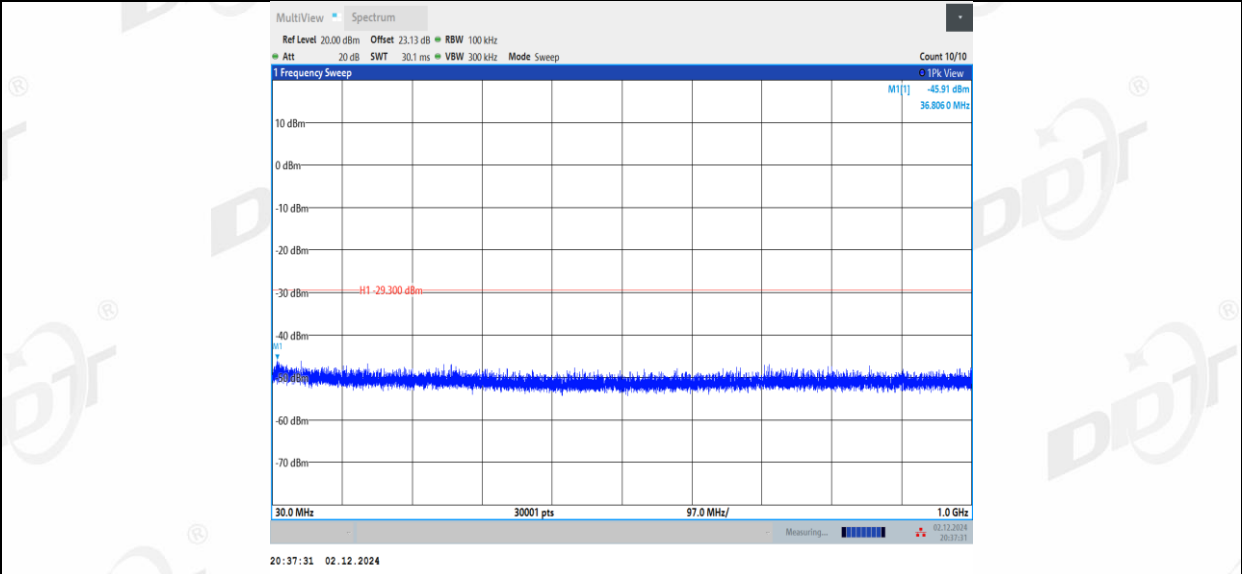


11N20SISO Ant1_2462_1000~26500

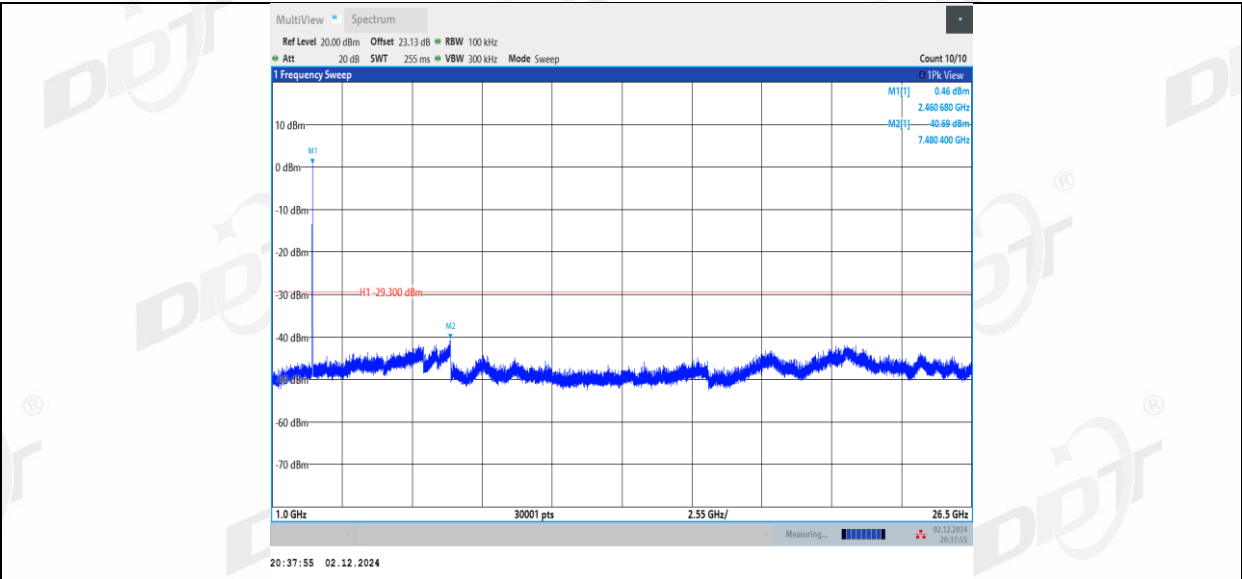


11N40SISO Ant1_2422 0~Reference

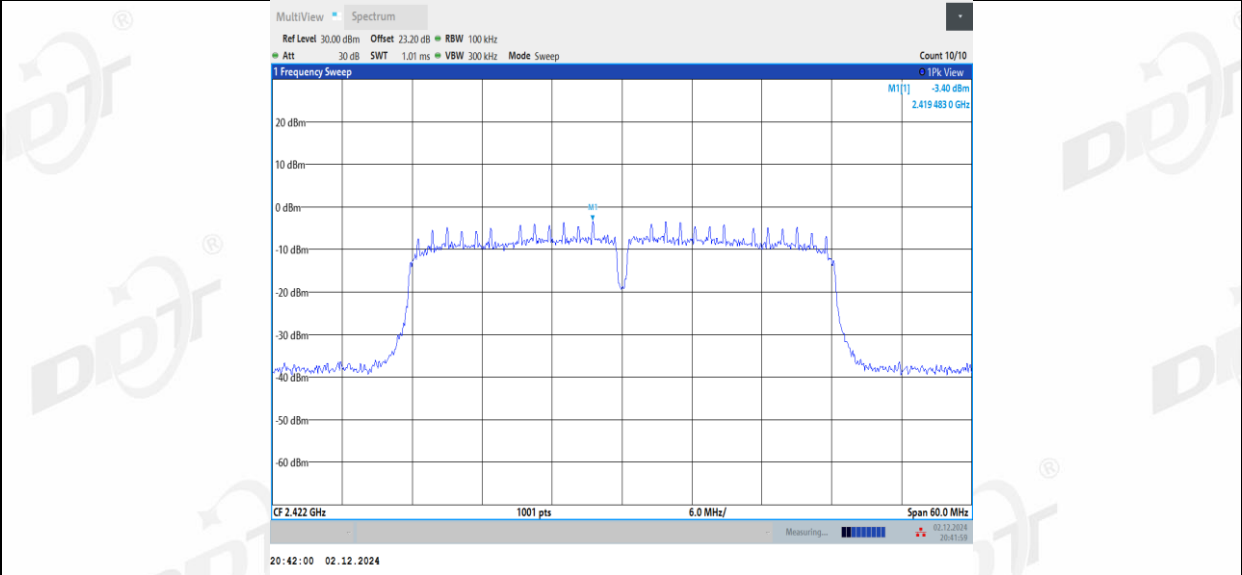


11N40SISO Ant1_2422_30~1000

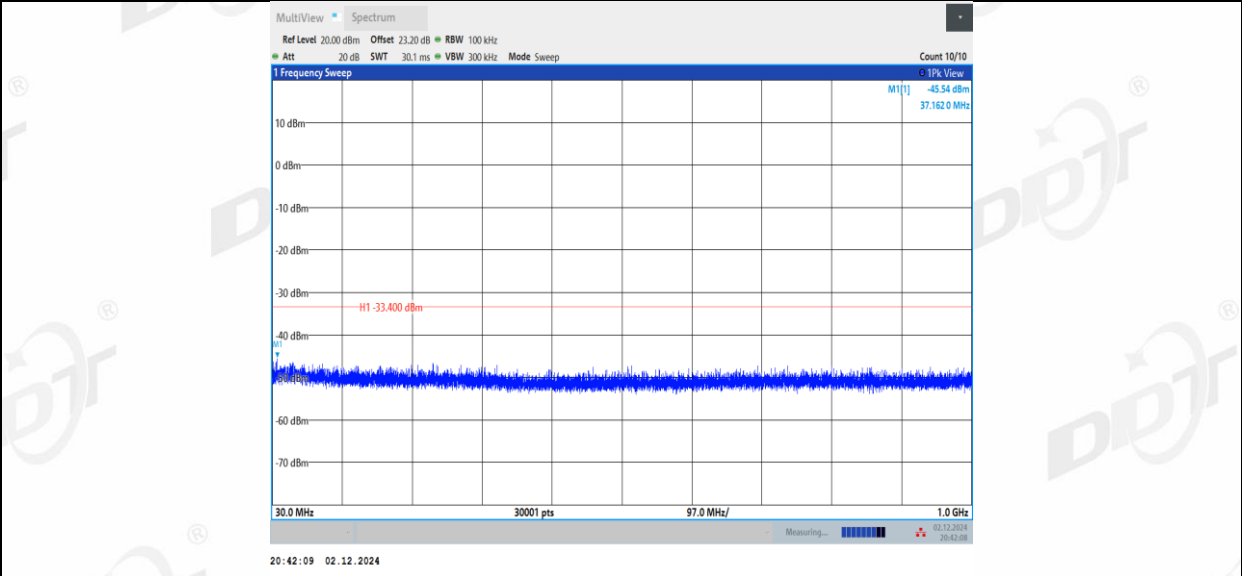


11N40SISO Ant1_2422_1000~26500

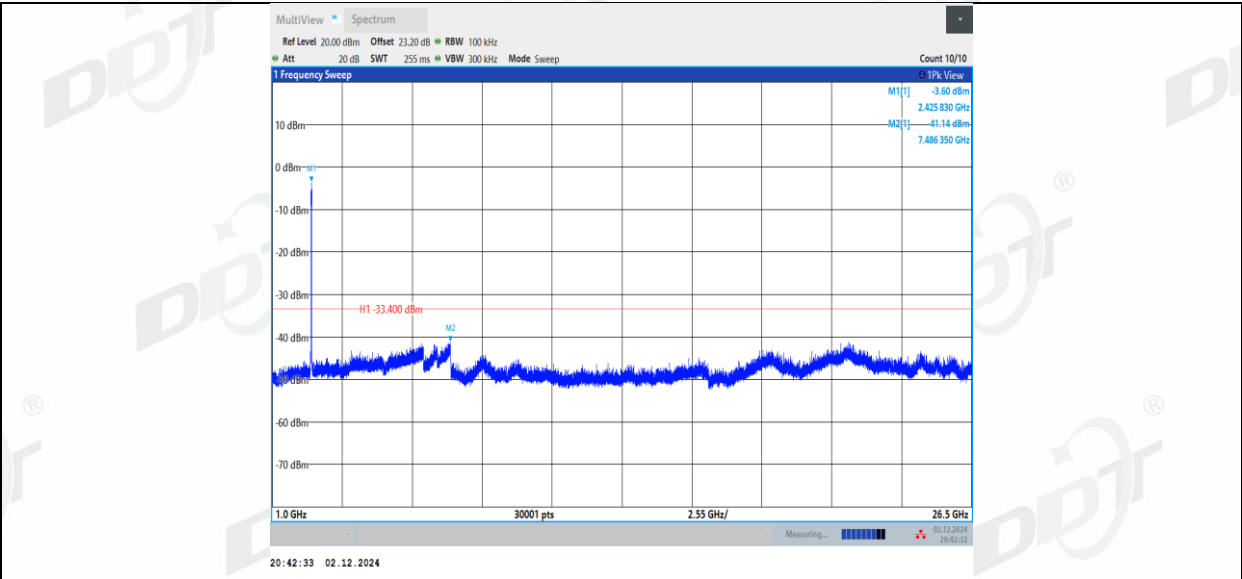


11N40SISO Ant1 2437 0~Reference

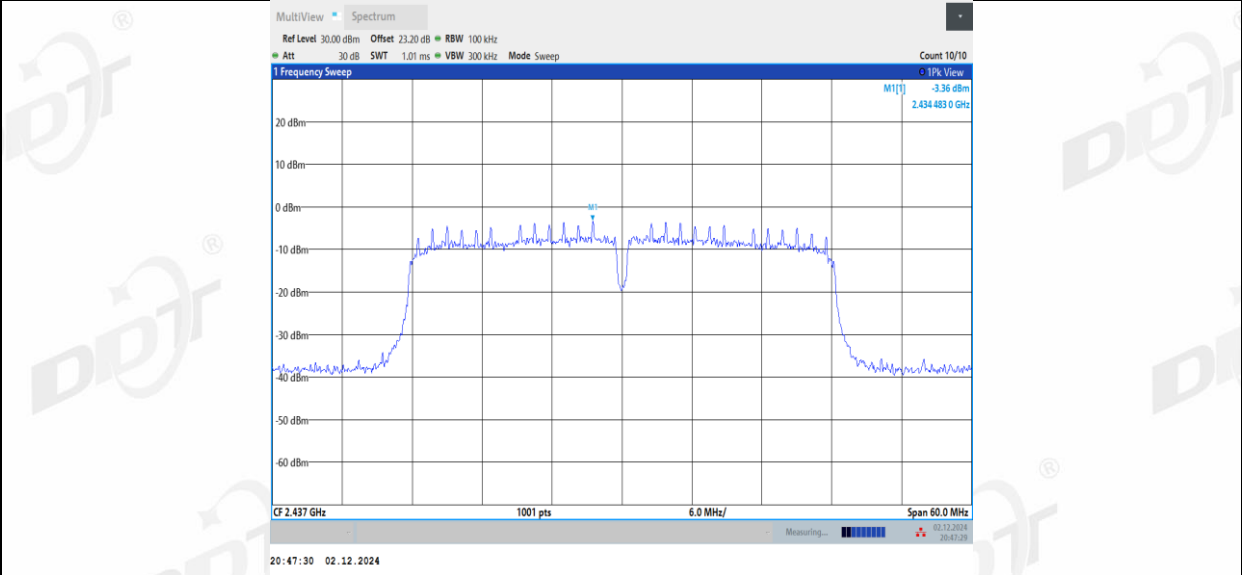


11N40SISO Ant1 2437 30~1000

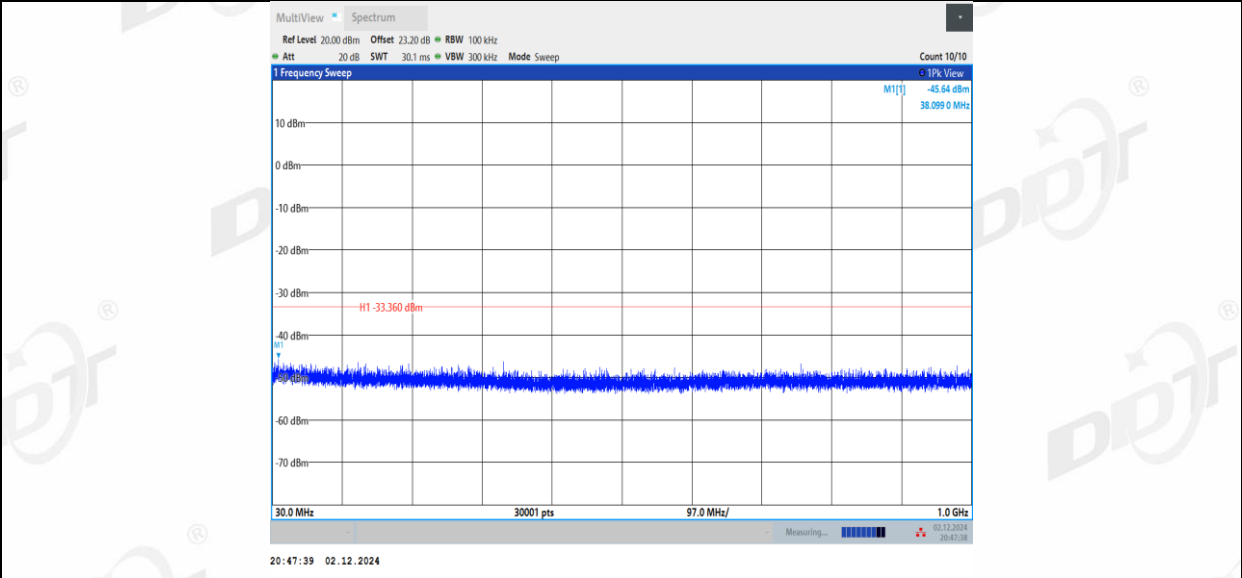


11N40SISO Ant1 2437 1000~26500

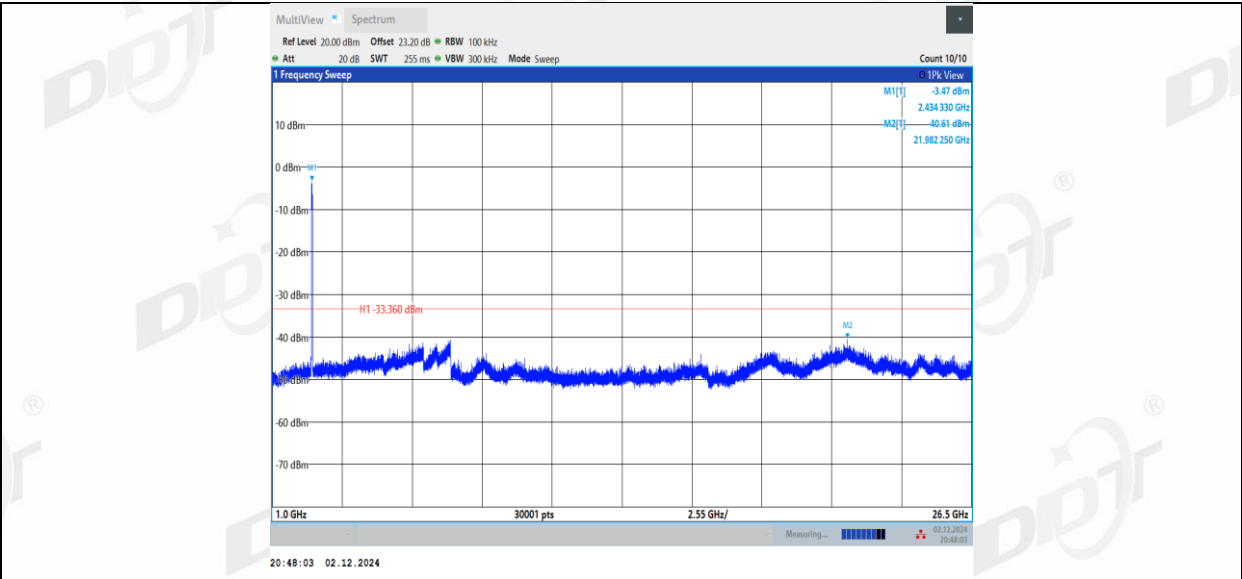


11N40SISO Ant1_2452_0~Reference

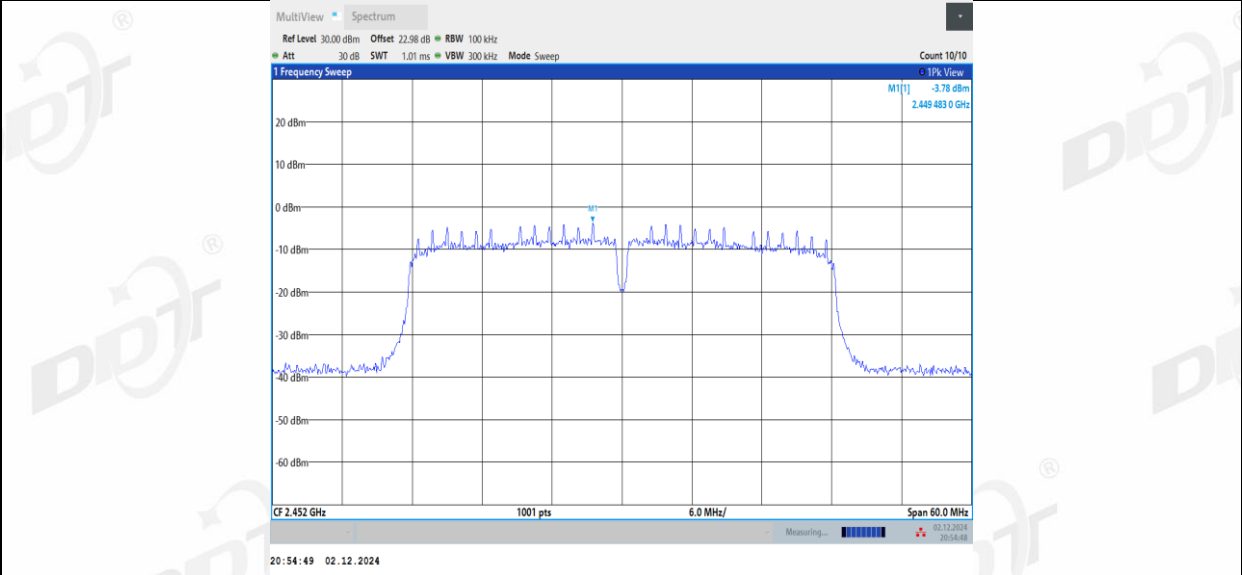


11N40SISO Ant1_2452_30~1000

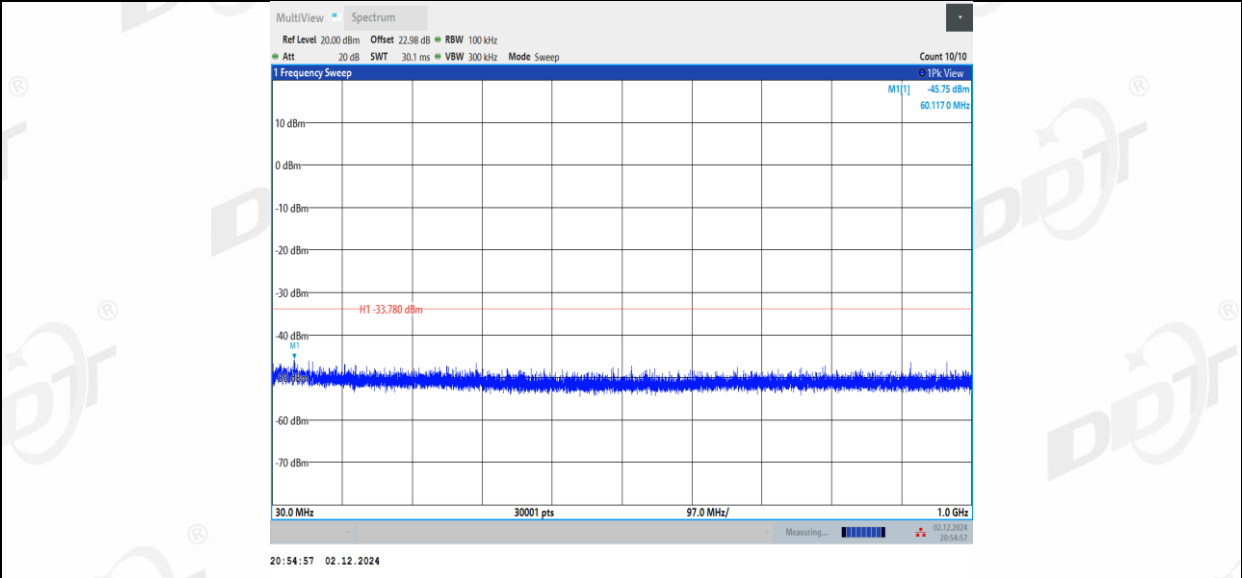


11N40SISO Ant1_2452_1000~26500

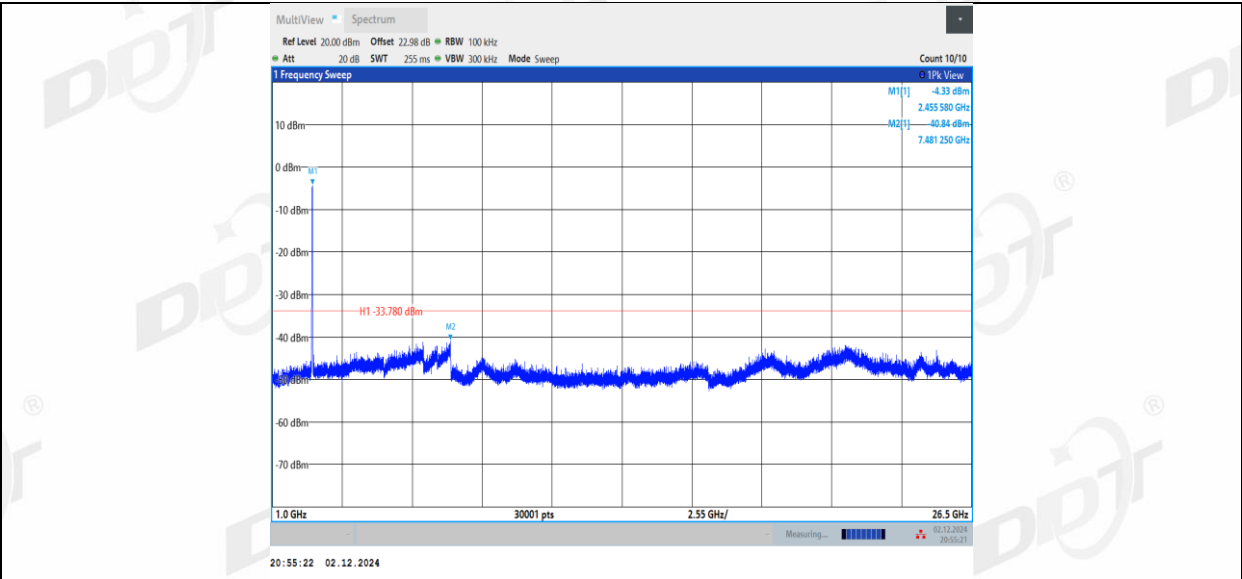


11AX20SISO Ant1 2412 0~Reference

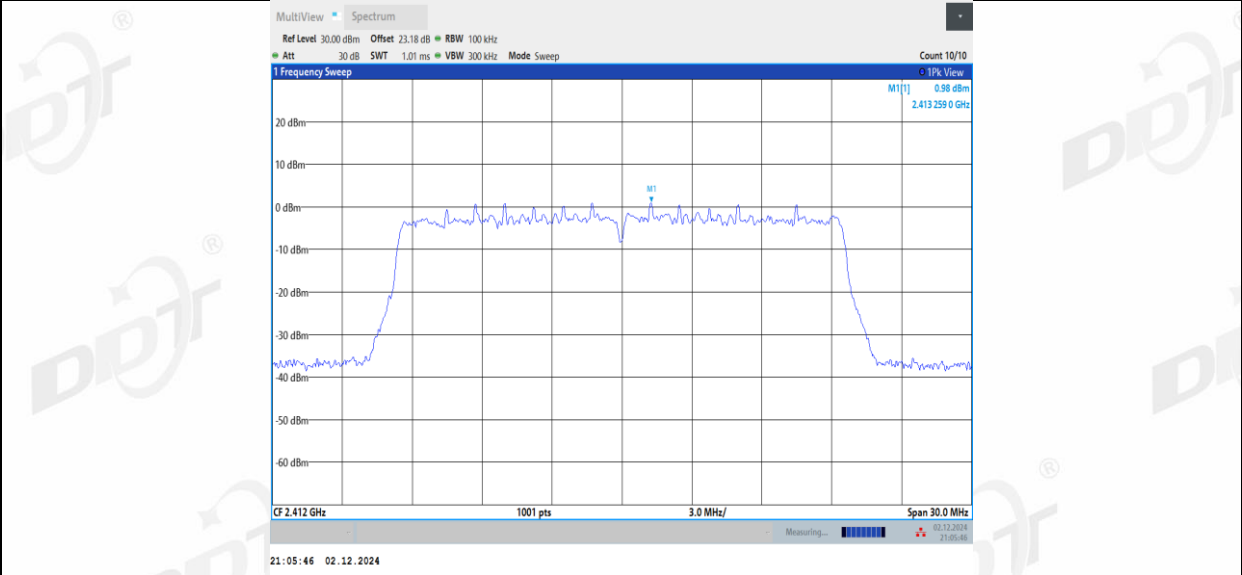


11AX20SISO Ant1 2412 30~1000

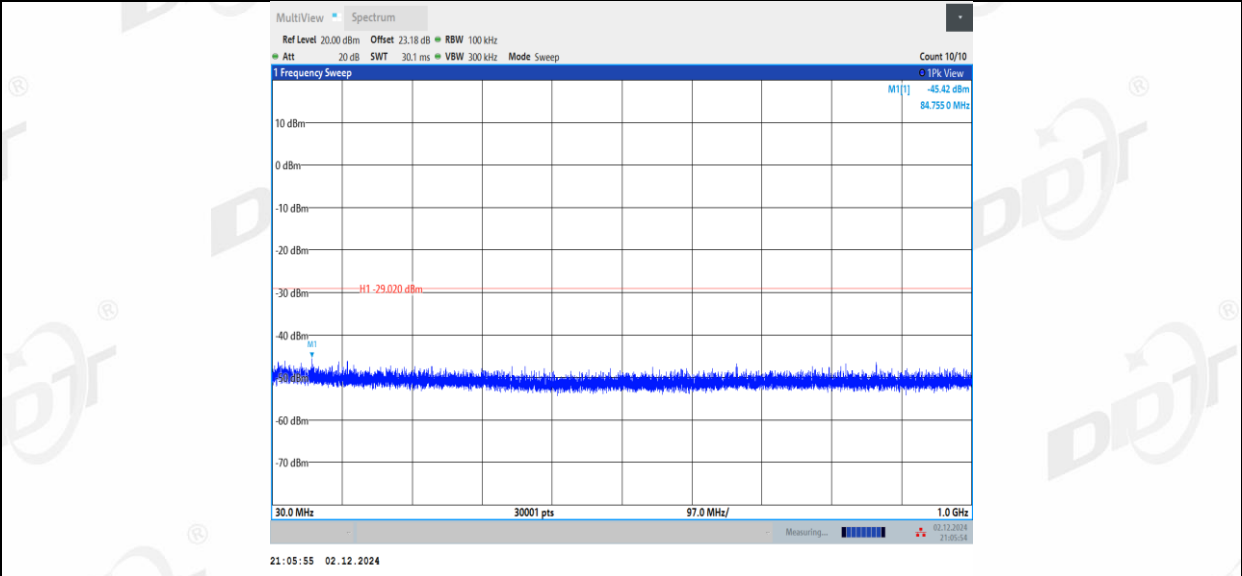


11AX20SISO Ant1 2412 1000~26500

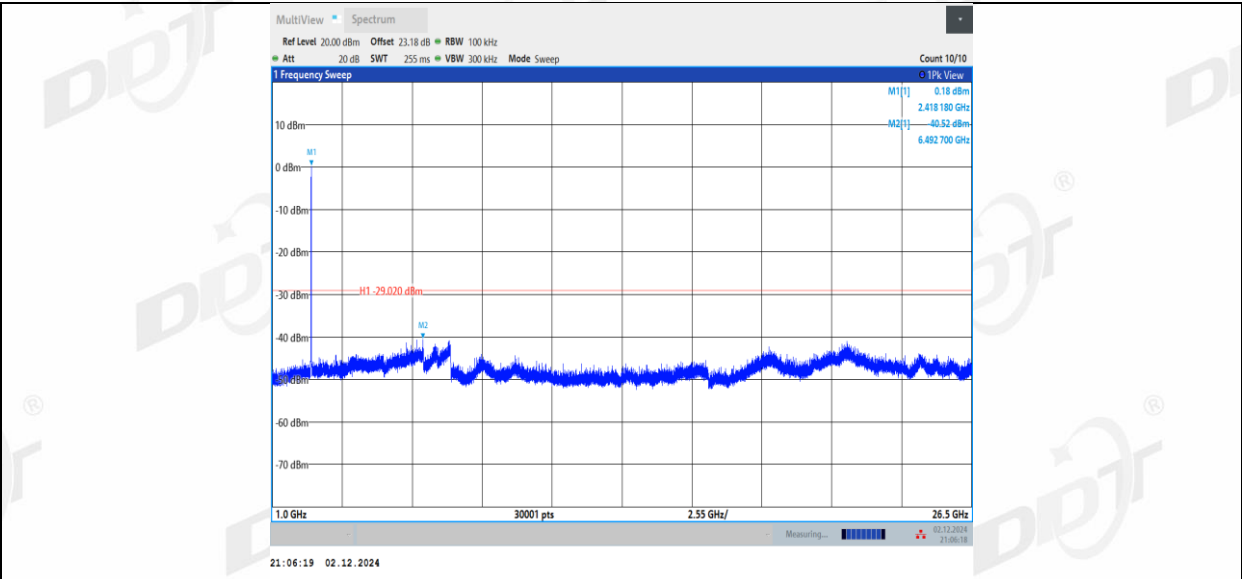


11AX20SISO_Ant1_2437_0~Reference

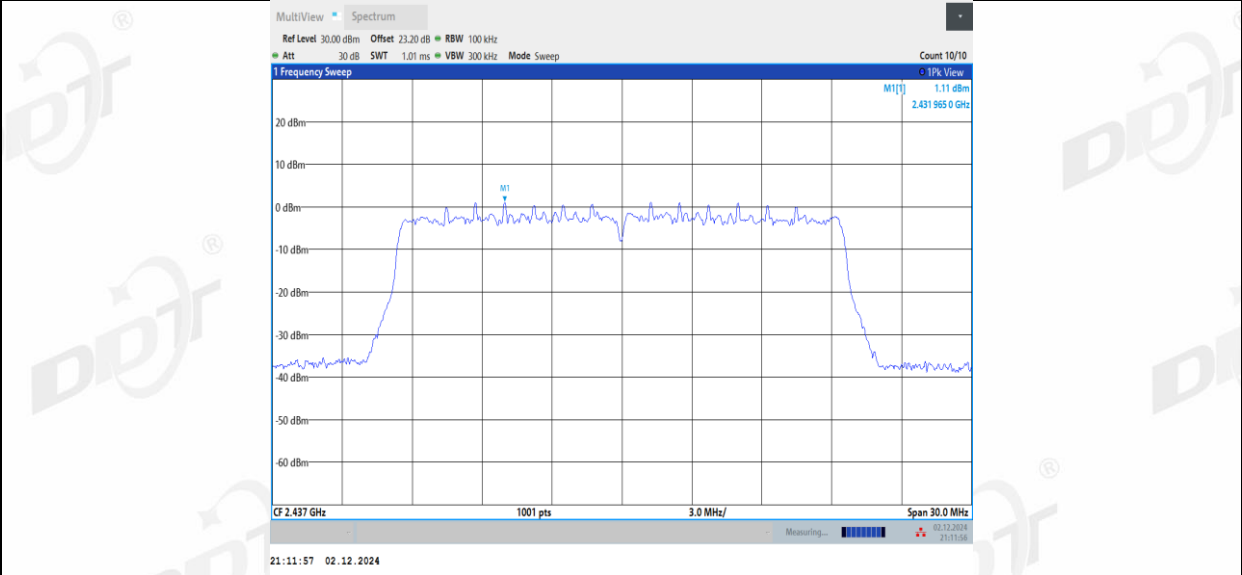


11AX20SISO_Ant1_2437_30~1000

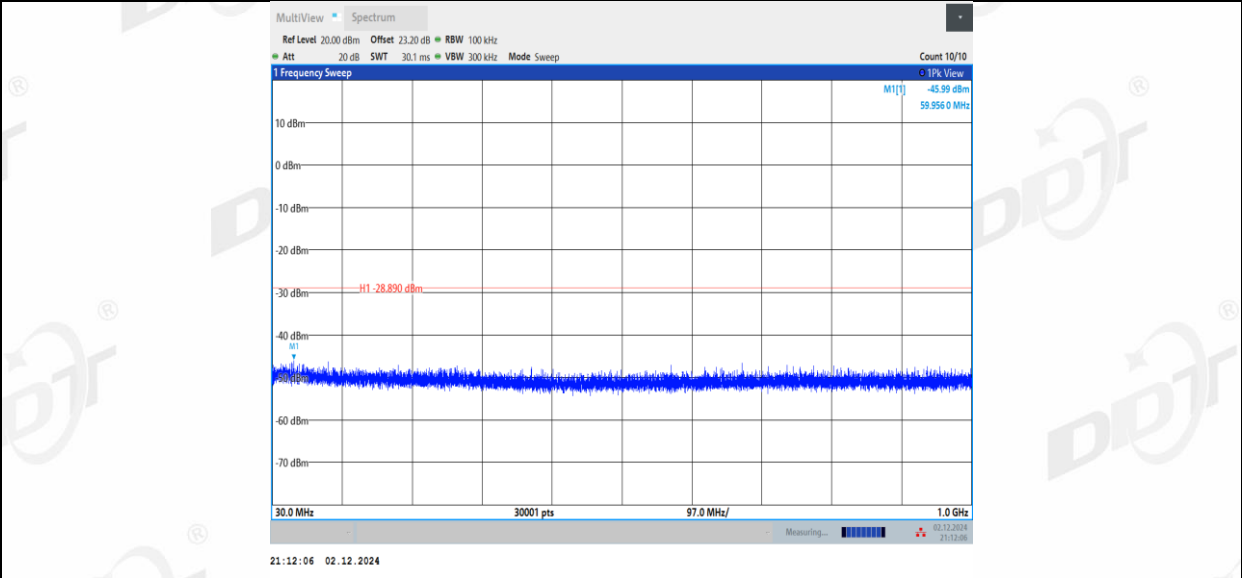


11AX20SISO_Ant1_2437_1000~26500

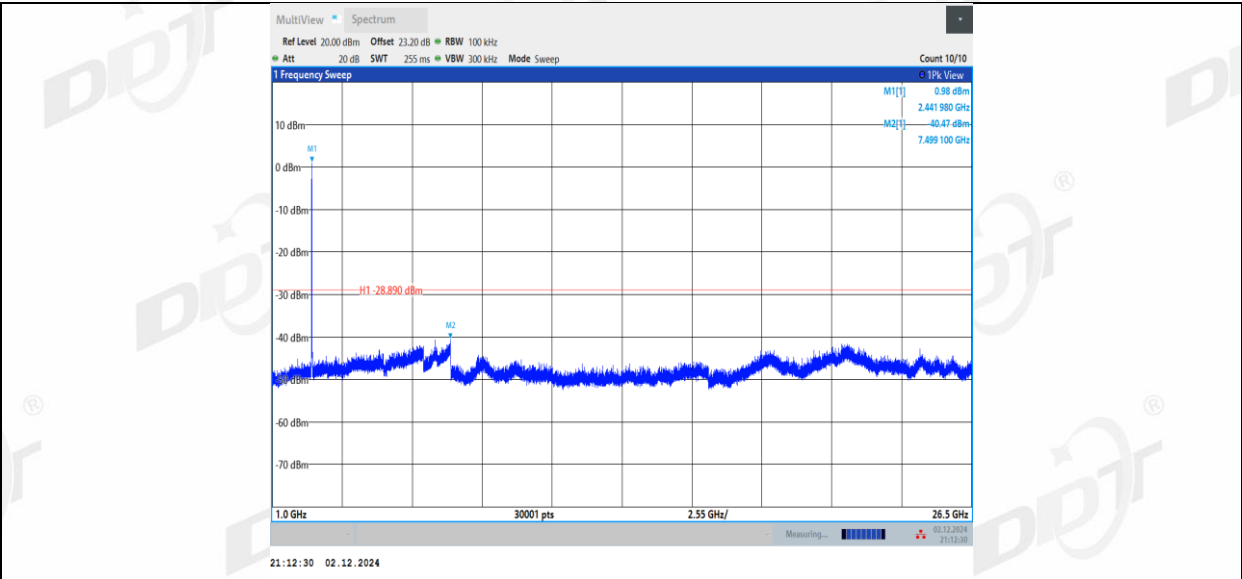


11AX20SISO_Ant1_2462_0~Reference

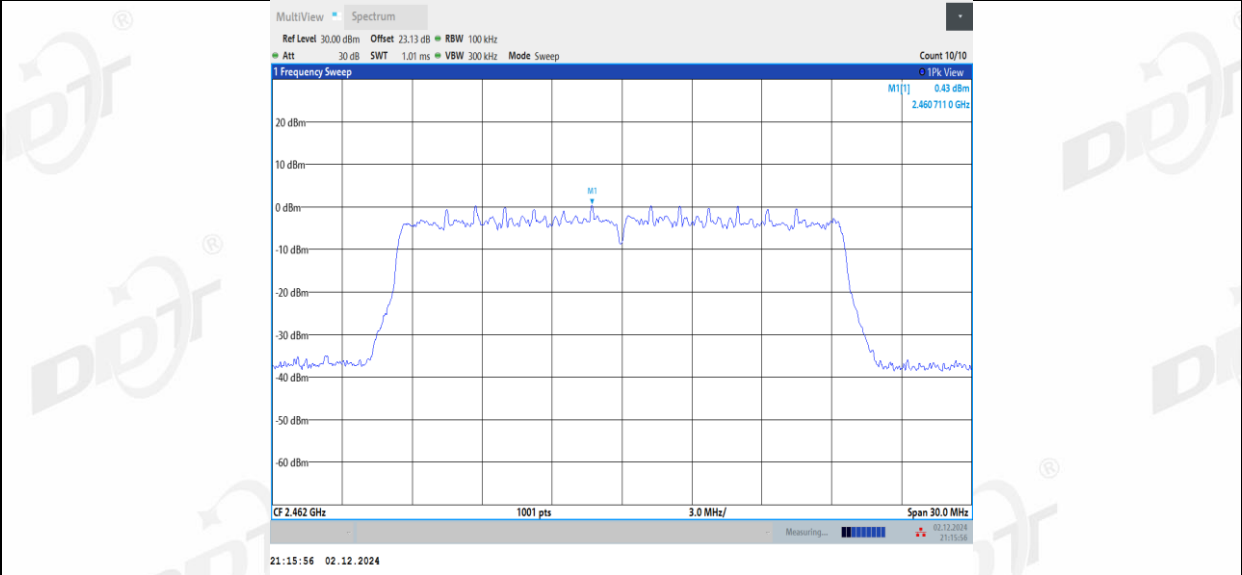


11AX20SISO_Ant1_2462_30~1000

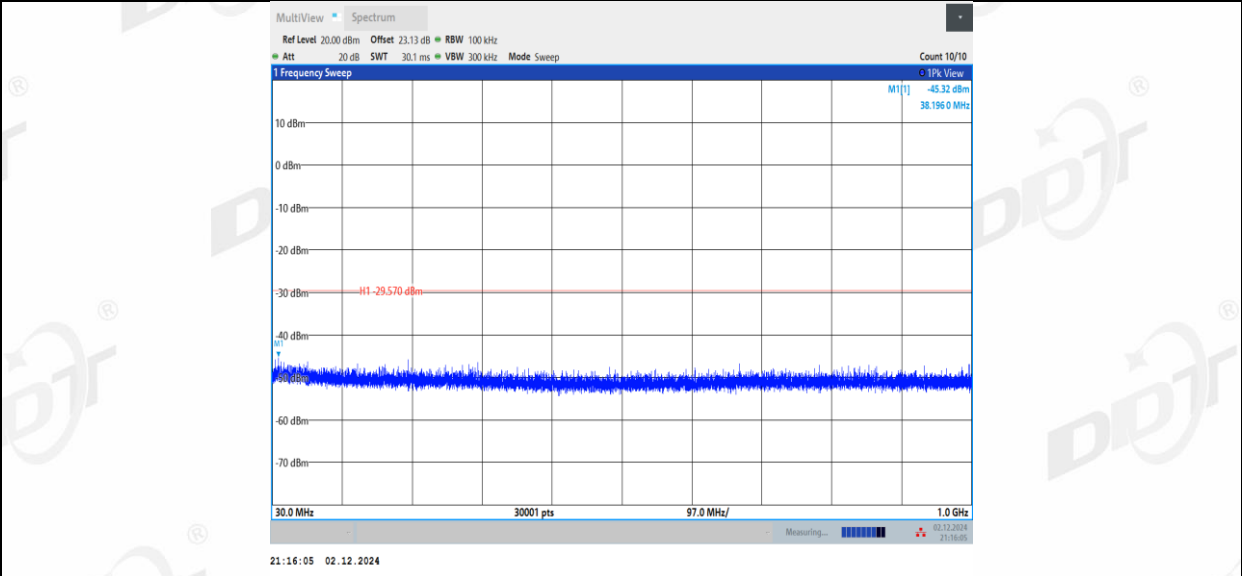


11AX20SISO_Ant1_2462_1000~26500

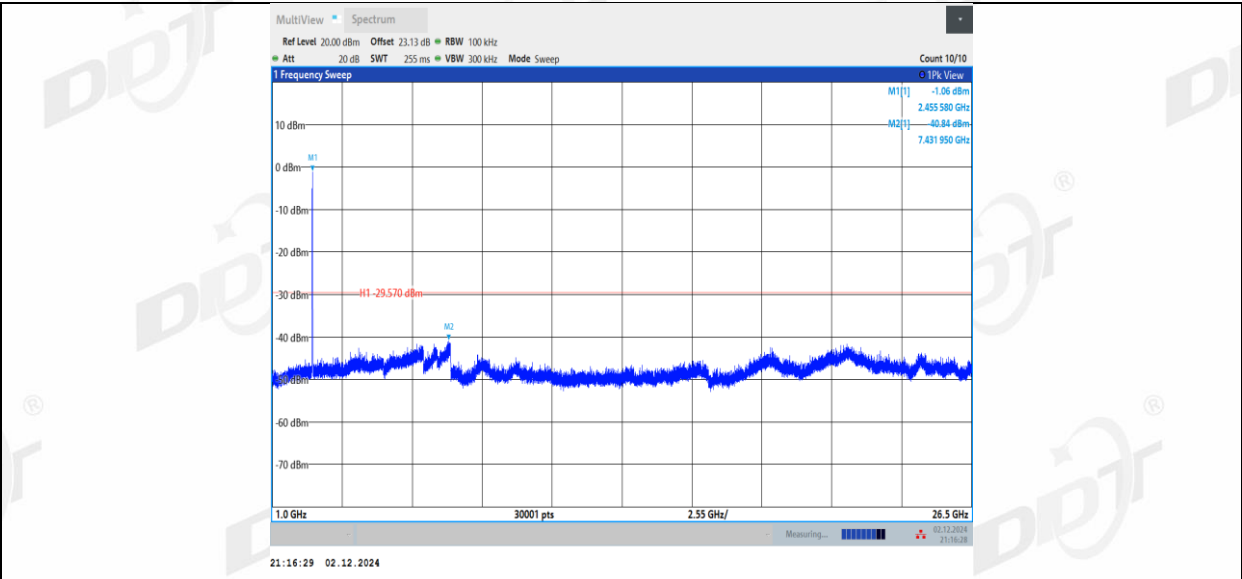


11AX40SISO Ant1 2422 0~Reference

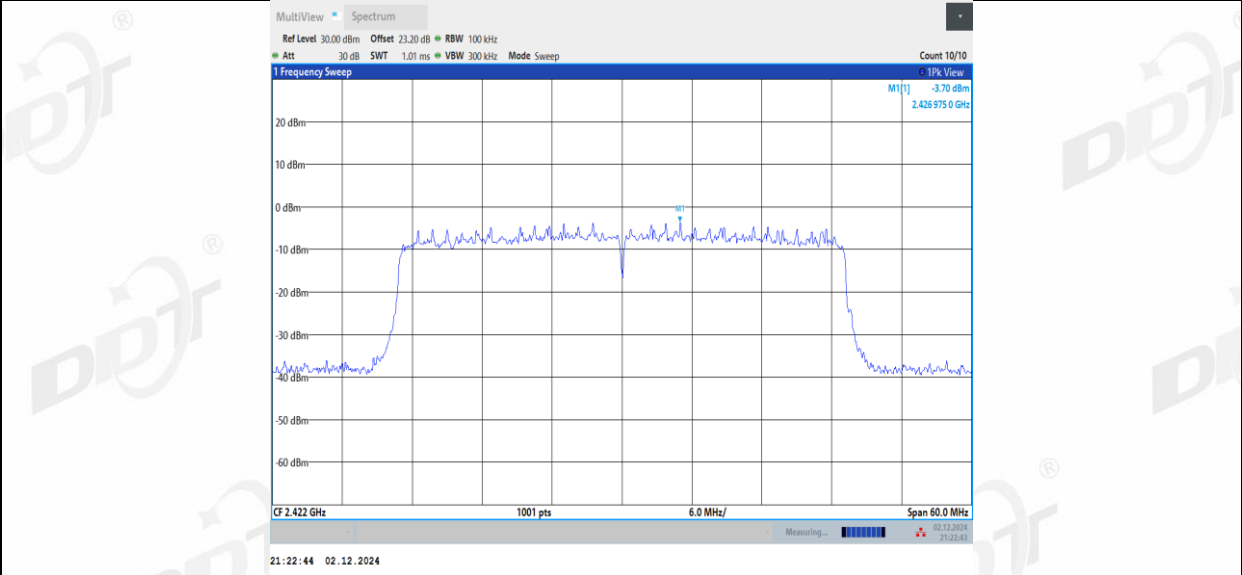


11AX40SISO Ant1 2422 30~1000

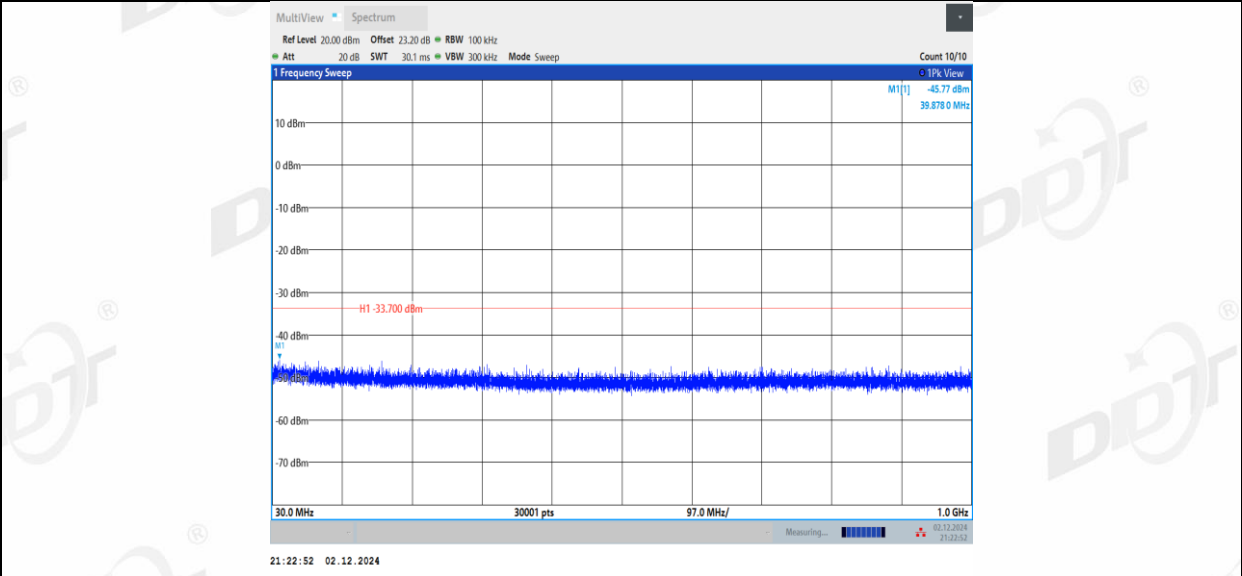


11AX40SISO Ant1 2422 1000~26500

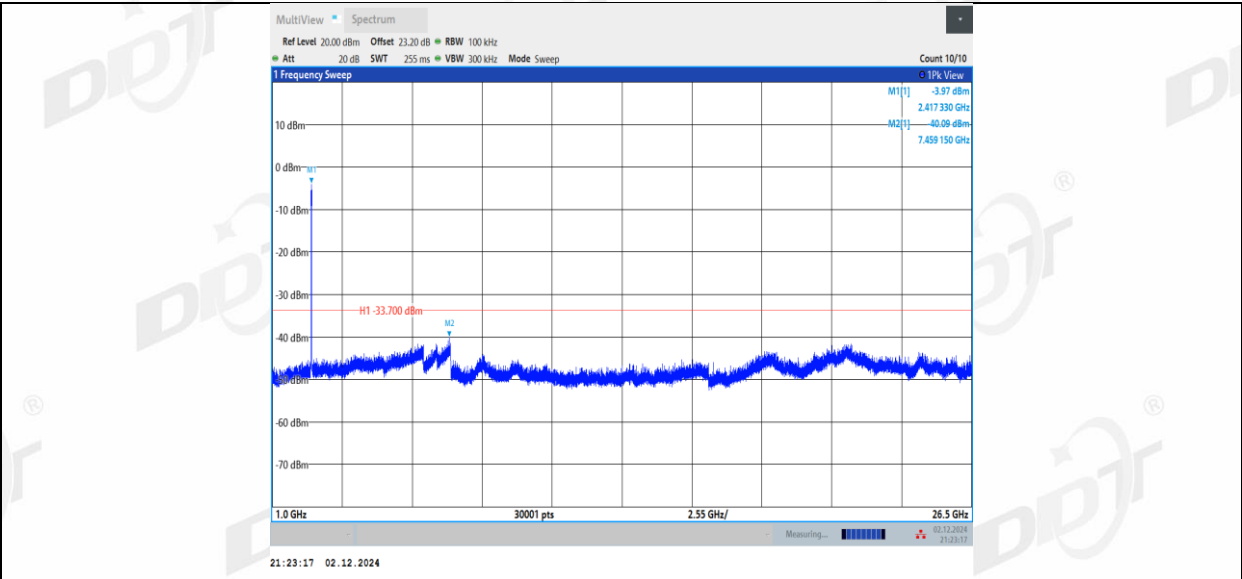


11AX40SISO Ant1 2437 0~Reference

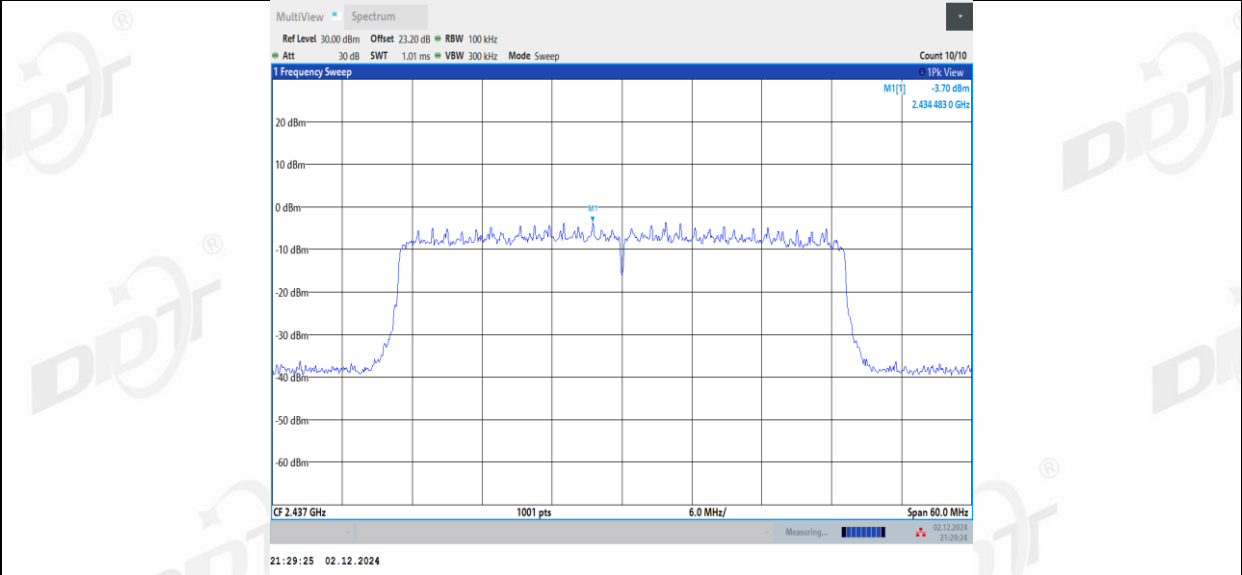


11AX40SISO Ant1 2437 30~1000

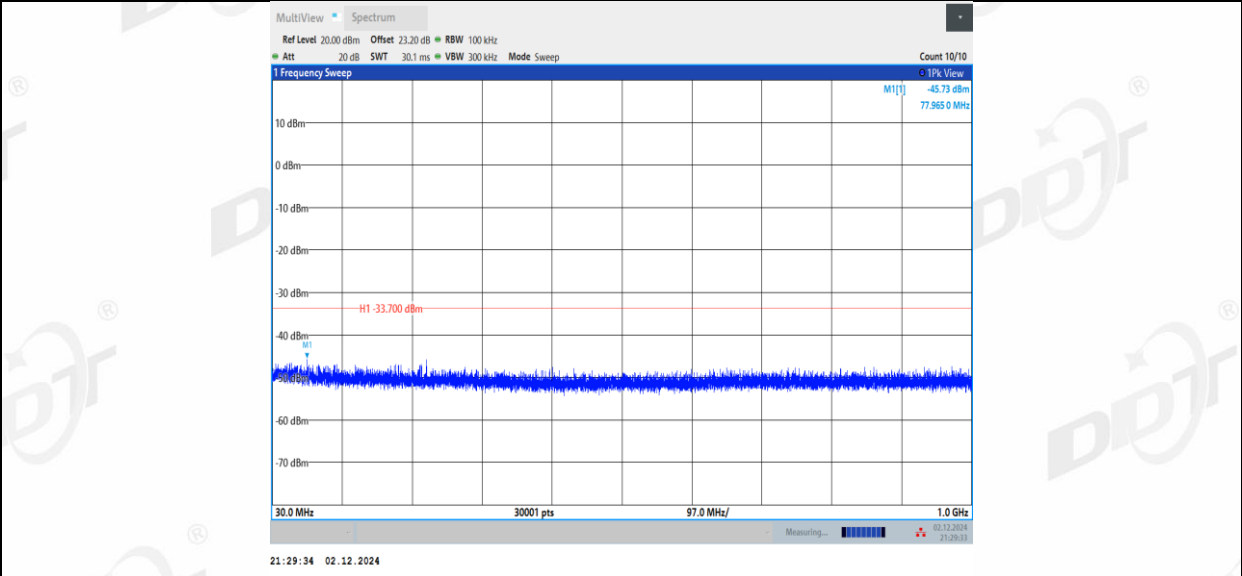


11AX40SISO Ant1 2437 1000~26500

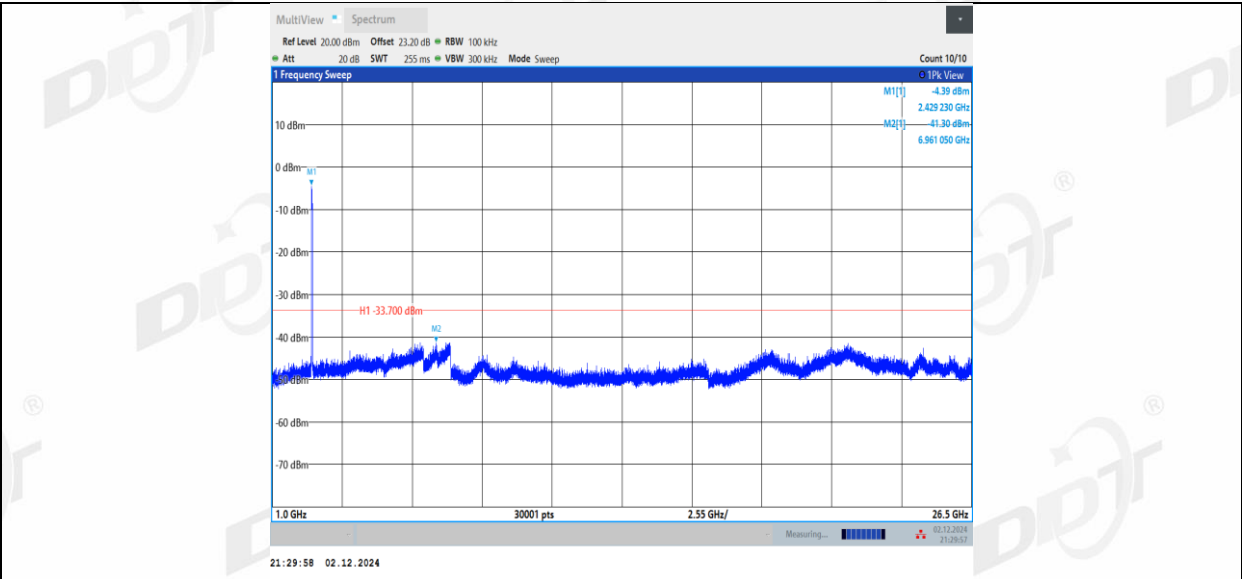


11AX40SISO Ant1 2452 0~Reference

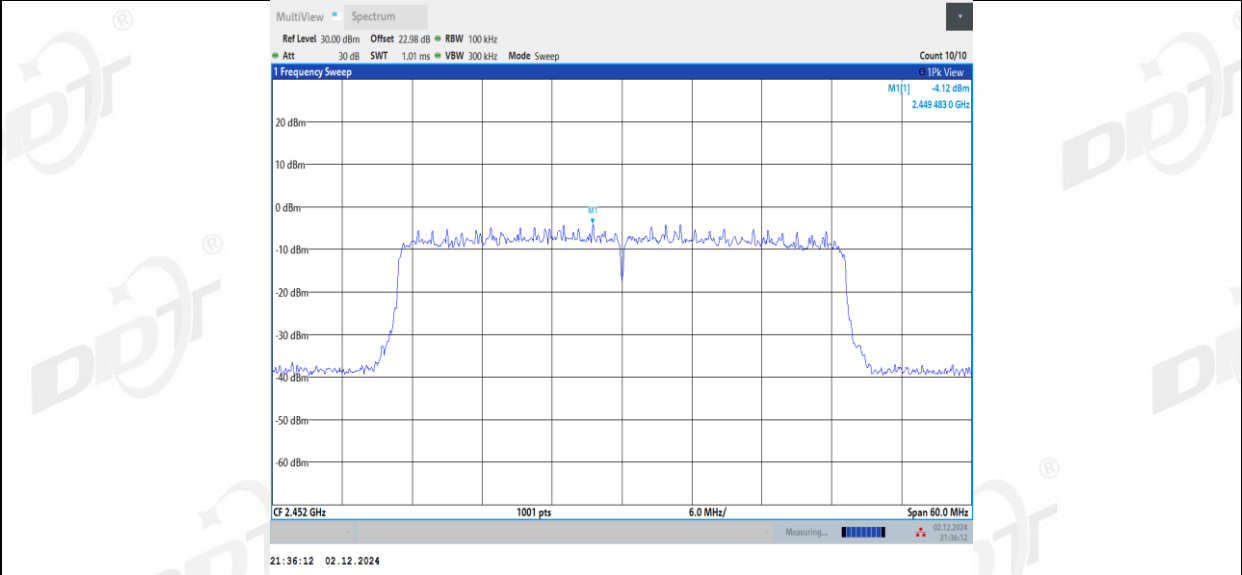

11AX40SISO Ant1 2452 30~1000

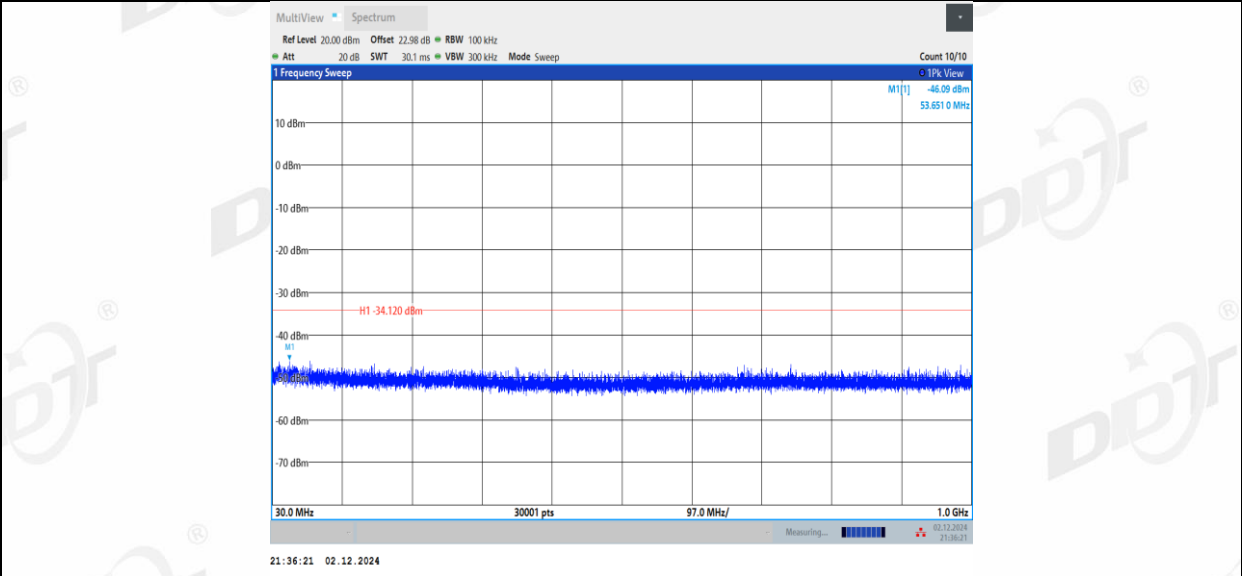


11AX40SISO Ant1 2452 1000~26500

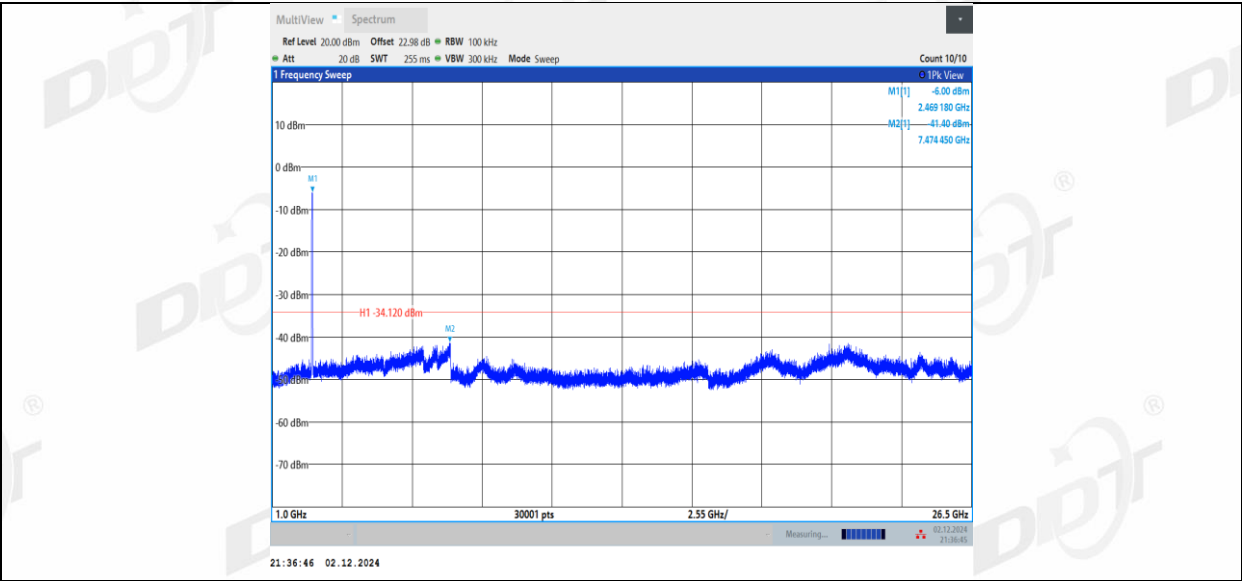

10. Duty Cycle

10.1. Block diagram of test setup

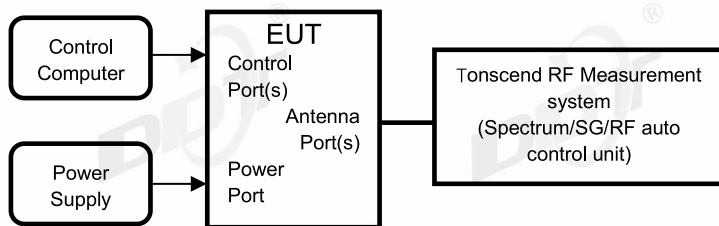

10.2. Limit

Just for Report.

10.3. Test procedure


- (1) Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, The cable loss and attenuator loss have been put into spectrum analyzer as amplitude offset.
set the Spectrum Analyzer as below:
 - Centre Frequency: The centre frequency of the middle hopping channel.
 - Resolution BW: 10 MHz.
 - Video BW: 10 MHz.
 - Span: Zero span.
 - Detector: Peak.
 - Trace Mode: Clear Write.
 - Sweep: Video Trigger
- (2) When the trace is complete, measure the sending time of 1 burst and the duty cycle of 1 burst cycle.
- (3) Calculate dwell time follow below formula:
Duty cycle= Pulse's on time / Burst cycle


10.4. Test result

Test Engineer:	Zoe	Test Site:	RF Measurement System 4#
Ambient Condition:	26.2℃,45.8%RH	Test Date:	2024.12.03-2024.12.03
Test Power Supply:	DC 5V	Sample Number:	S24101811-002


Test Mode	Antenna	Frequency [MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
11B	Ant1	2412	1.00	1.01	99.01
		2437	1.00	1.01	99.01
		2462	1.00	1.01	99.01
11G	Ant1	2412	0.51	0.52	98.08
		2437	0.50	0.51	98.04
		2462	0.50	0.51	98.04
11N20SISO	Ant1	2412	0.51	0.52	98.08
		2437	0.51	0.52	98.08
		2462	0.51	0.52	98.08
11N40SISO	Ant1	2422	0.26	0.27	96.30
		2437	0.26	0.27	96.30
		2452	0.26	0.27	96.30
11AX20SISO	Ant1	2412	3.86	3.87	99.74
		2437	3.87	3.88	99.74
		2462	18.00	18.00	100.00
11AX40SISO	Ant1	2422	3.86	3.87	99.74
		2437	3.93	3.94	99.75
		2452	3.93	3.94	99.75

10.5. Test graphs

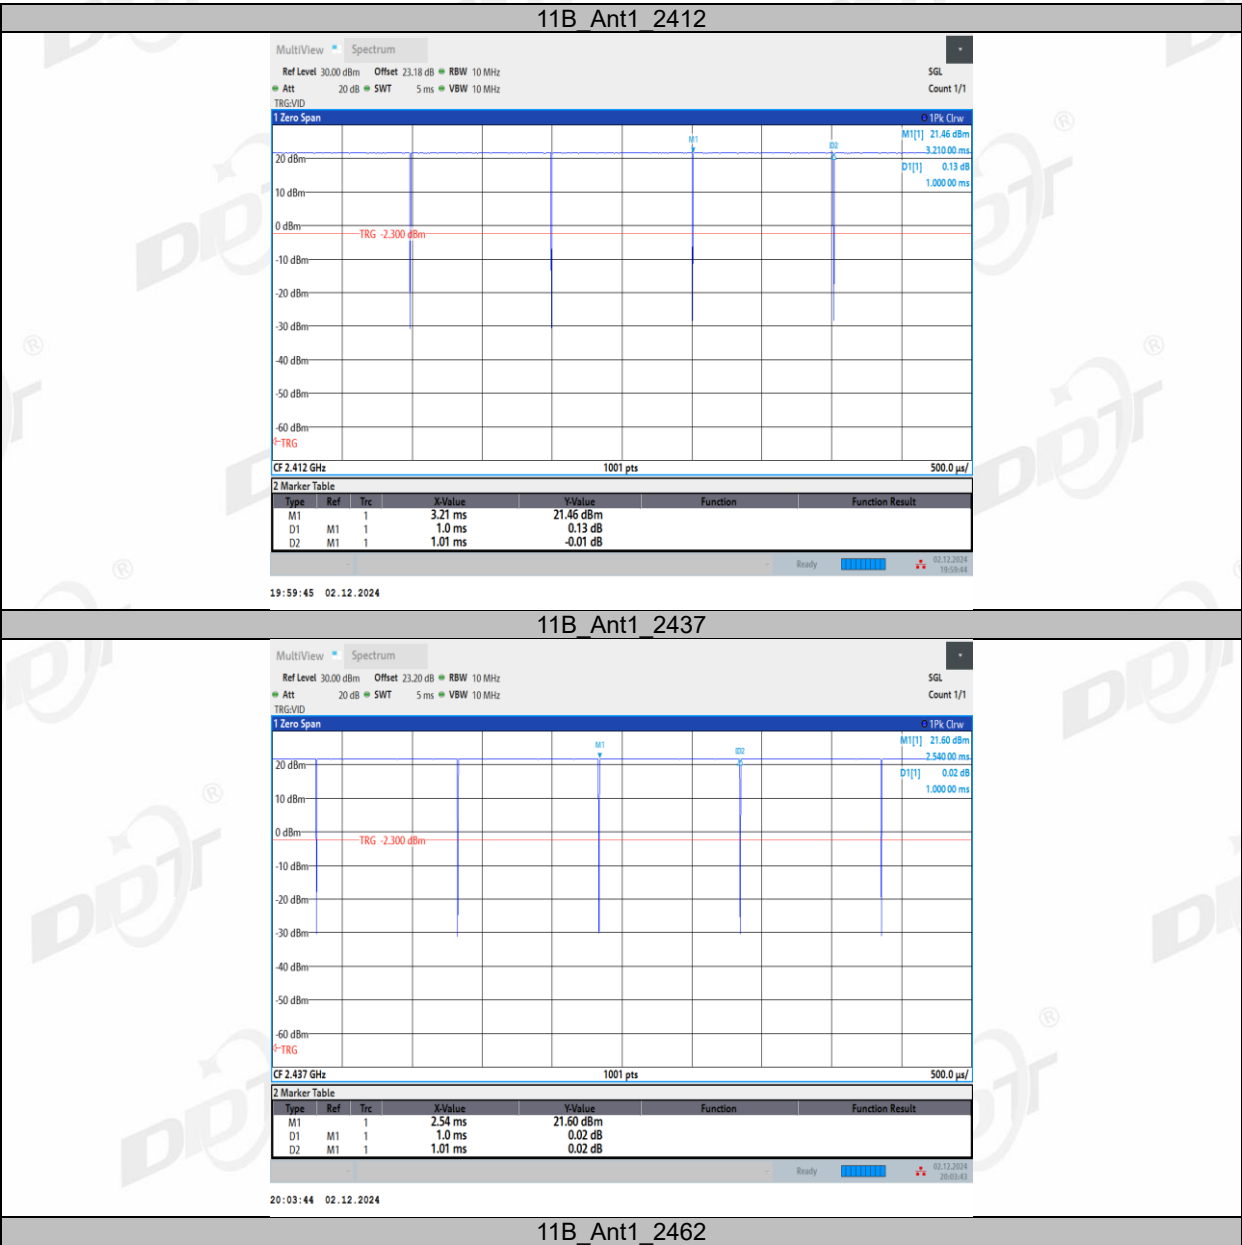


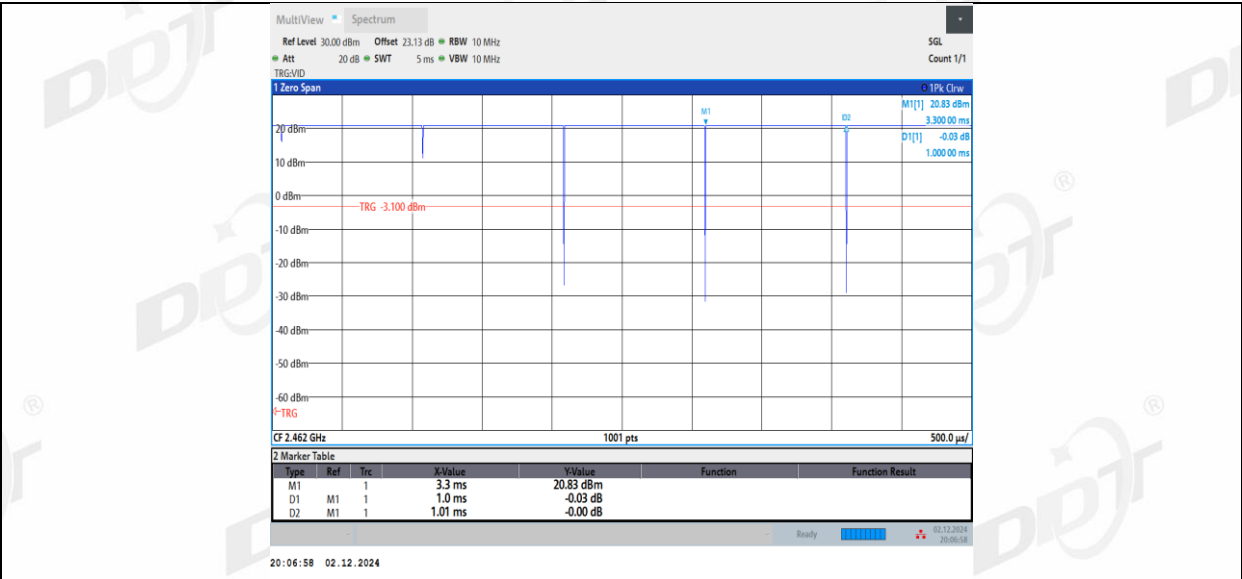


11G_Ant1_2412

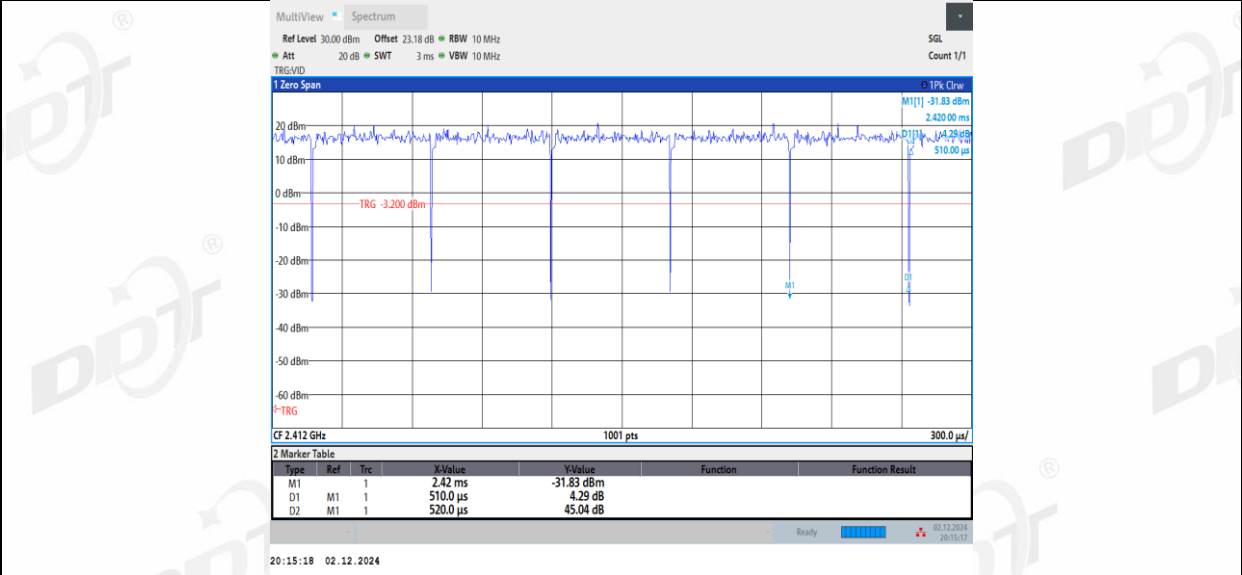


11G_Ant1_2437

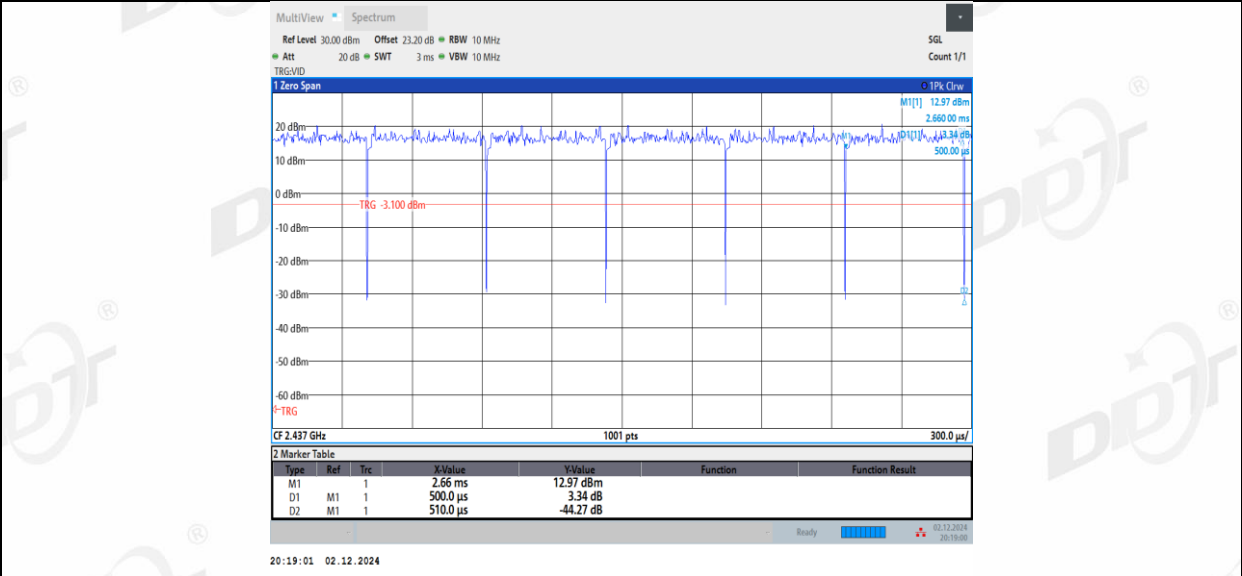


11G_Ant1_2462

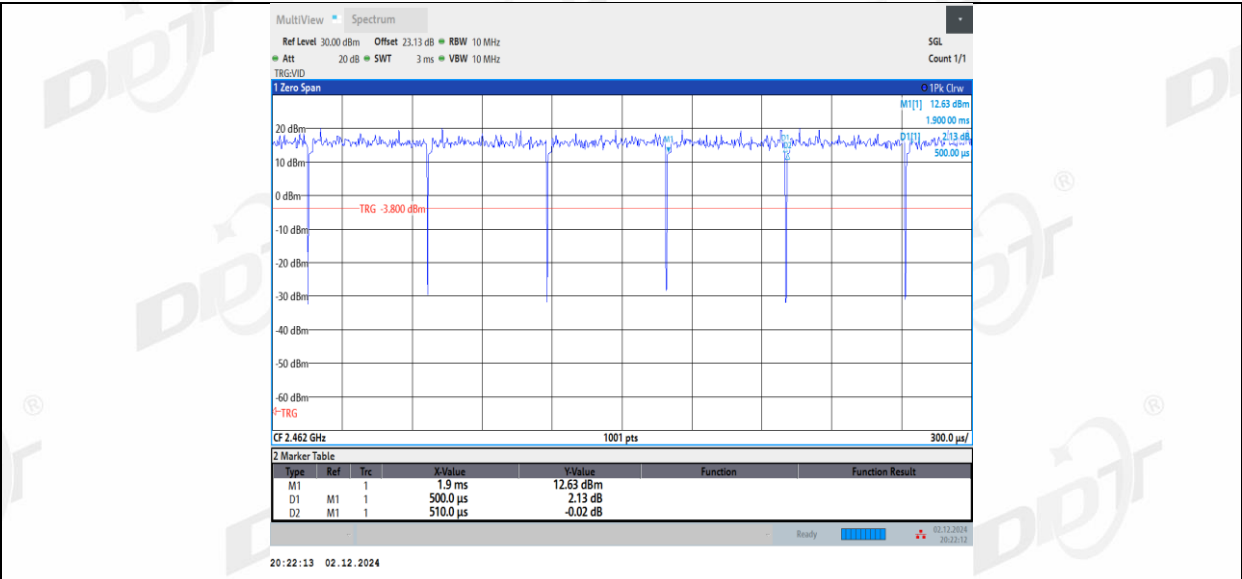


11N20SISO_Ant1_2412

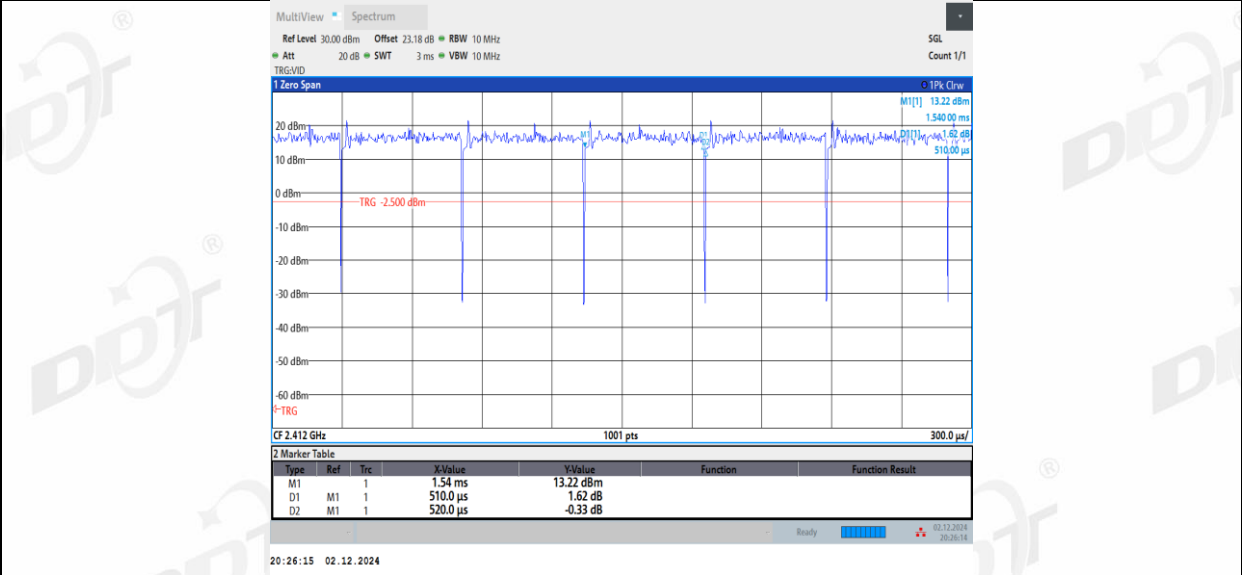


11N20SISO_Ant1_2437

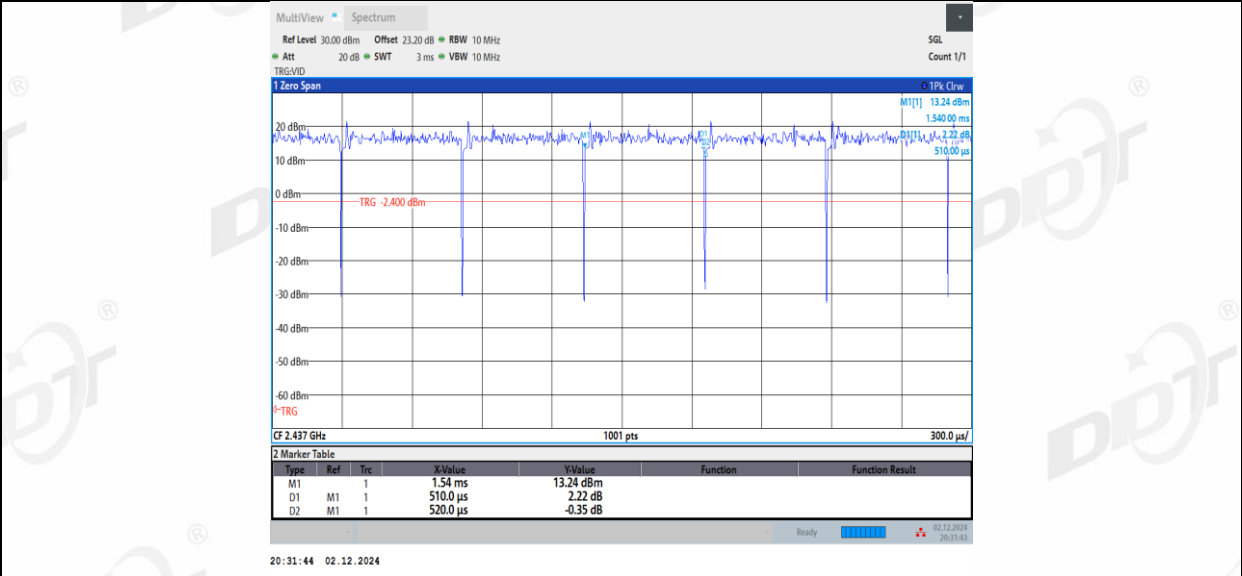


11N20SISO_Ant1_2462

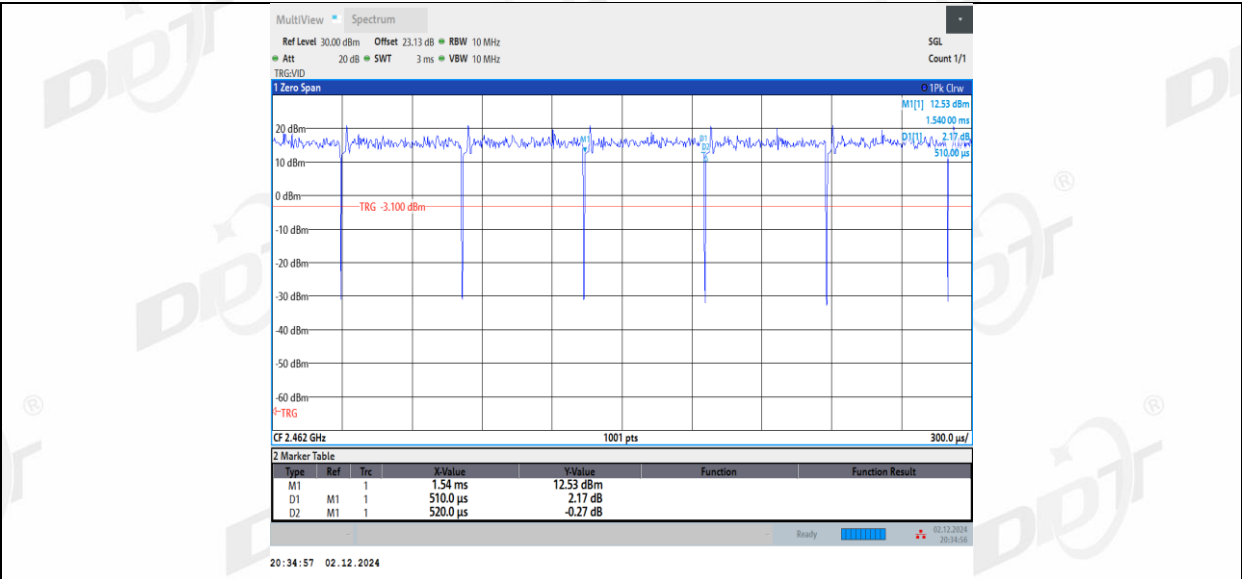


11N40SISO_Ant1_2422

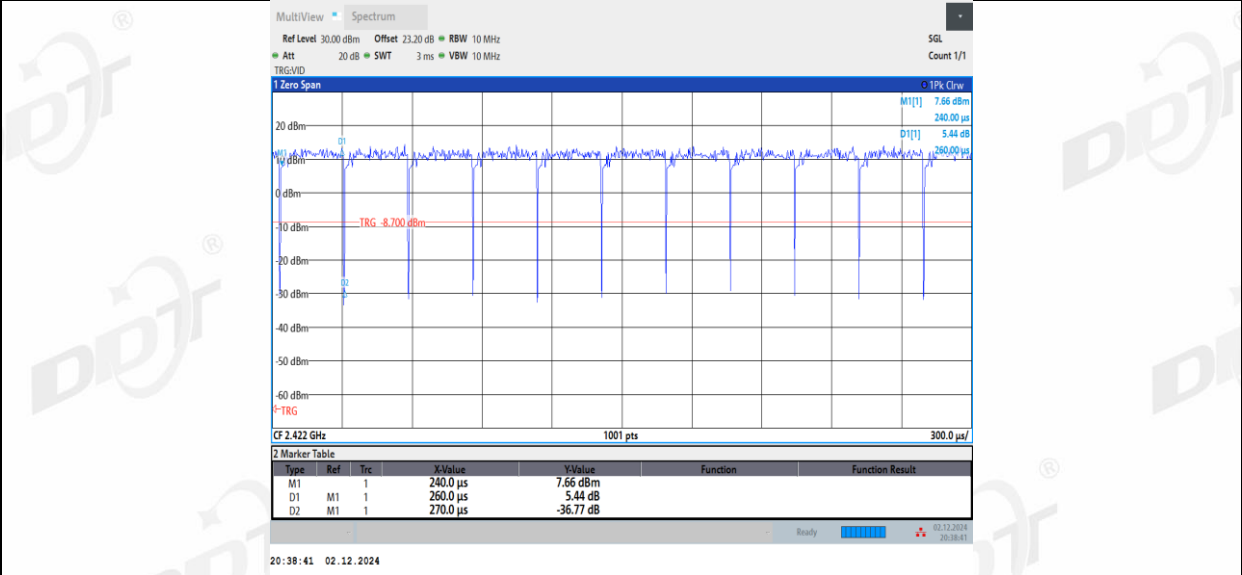


11N40SISO_Ant1_2437

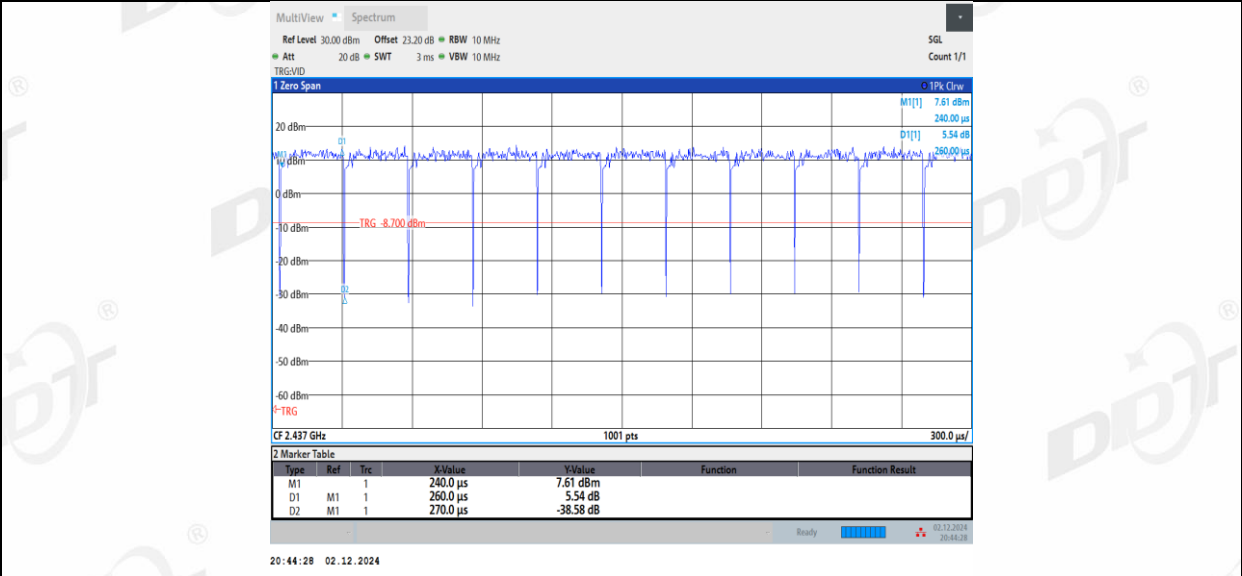


11N40SISO_Ant1_2452

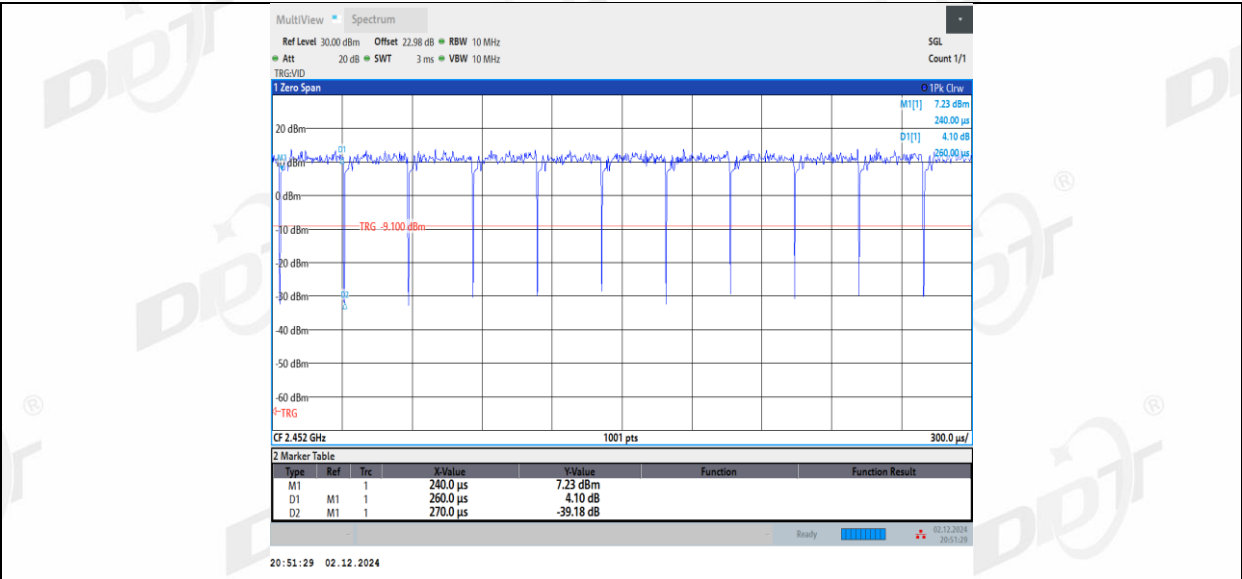


11AX20SISO_Ant1_2412

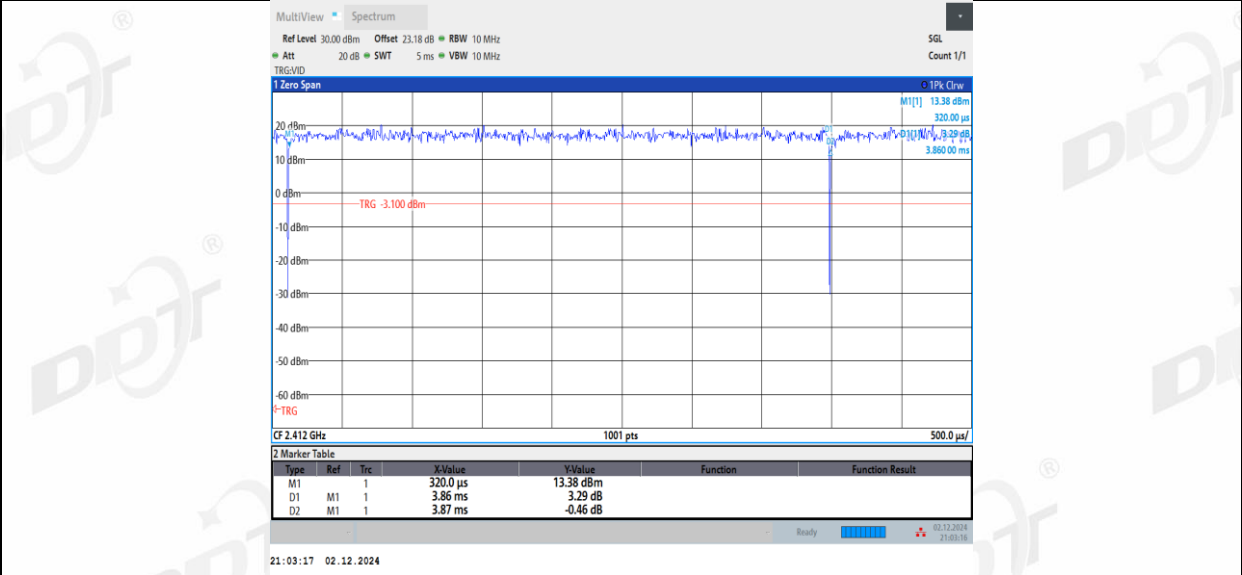


11AX20SISO_Ant1_2437

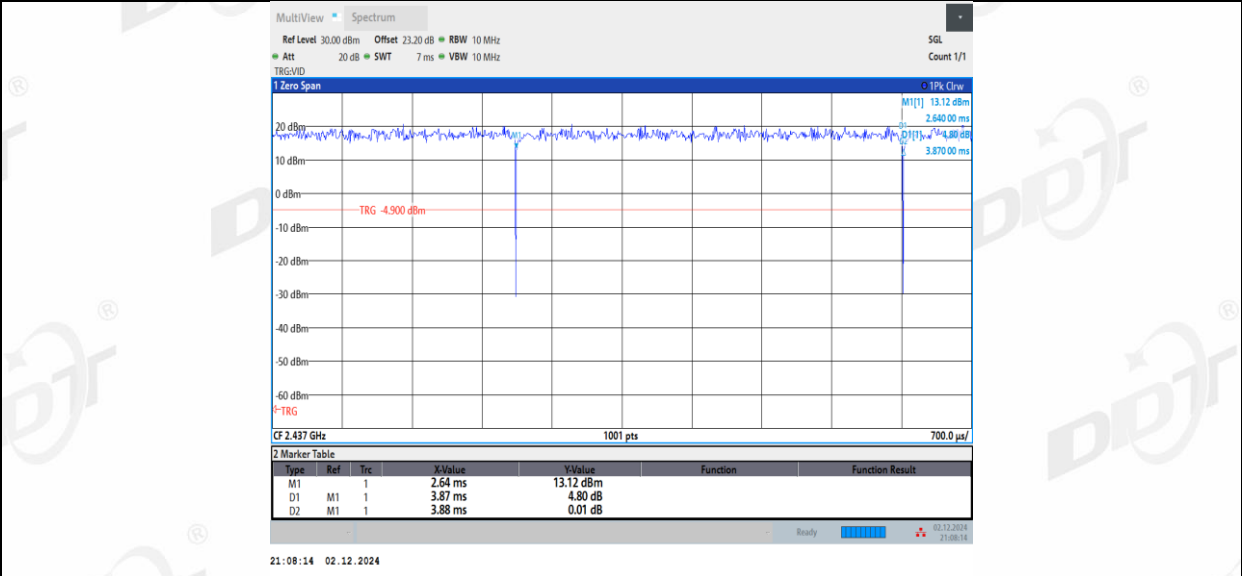


11AX20SISO_Ant1_2462

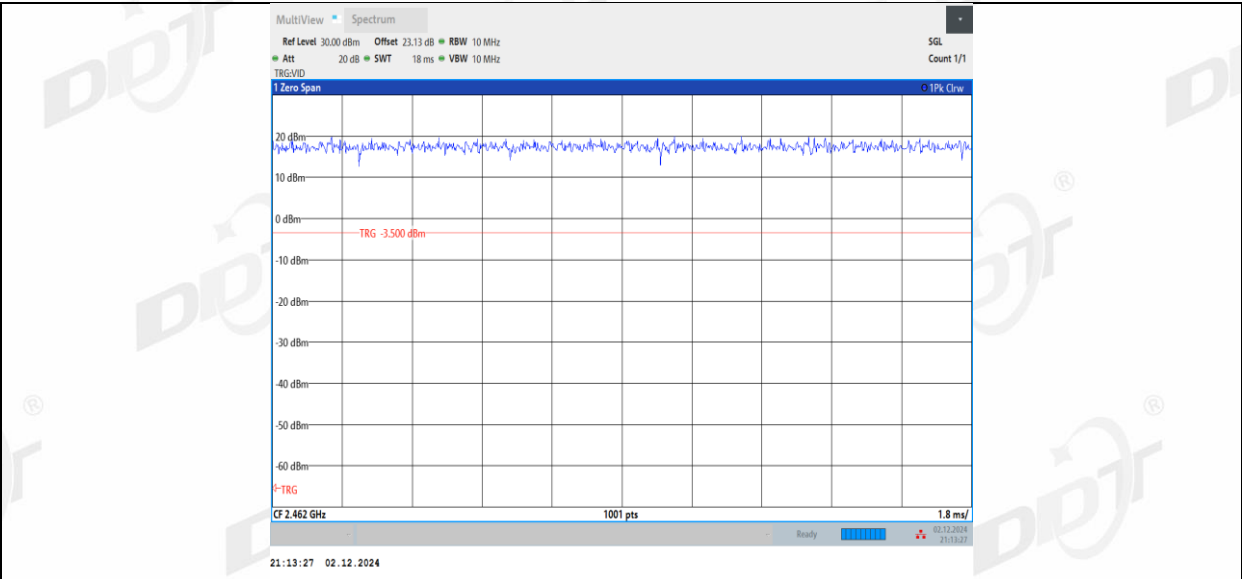


11AX40SISO_Ant1_2422

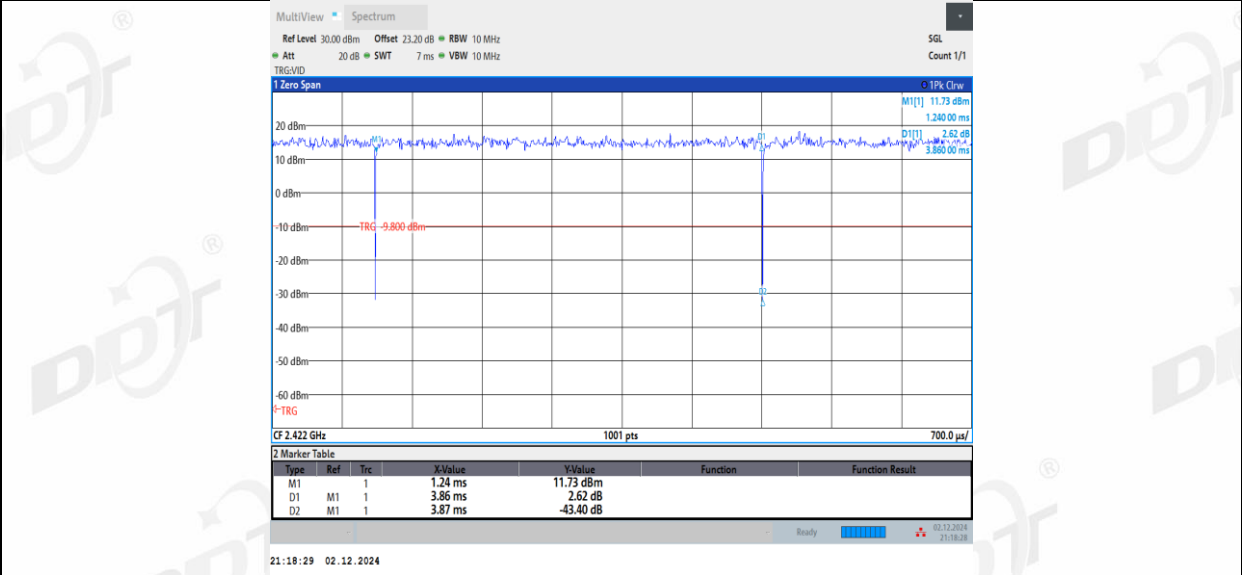

11AX40SISO_Ant1_2437

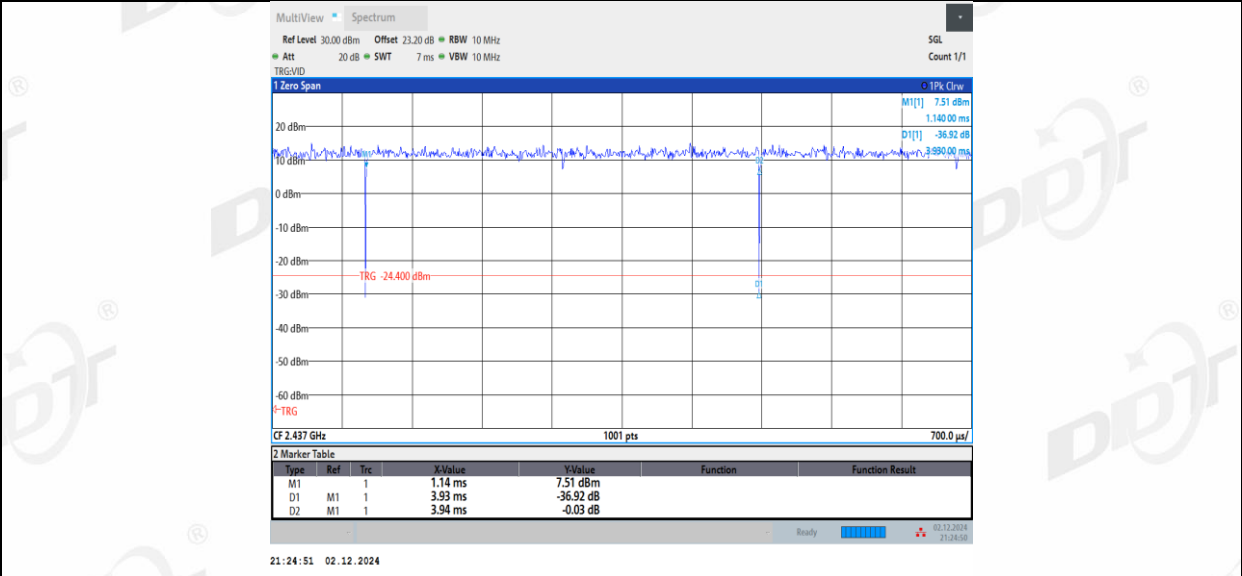

11AX40SISO_Ant1_2452

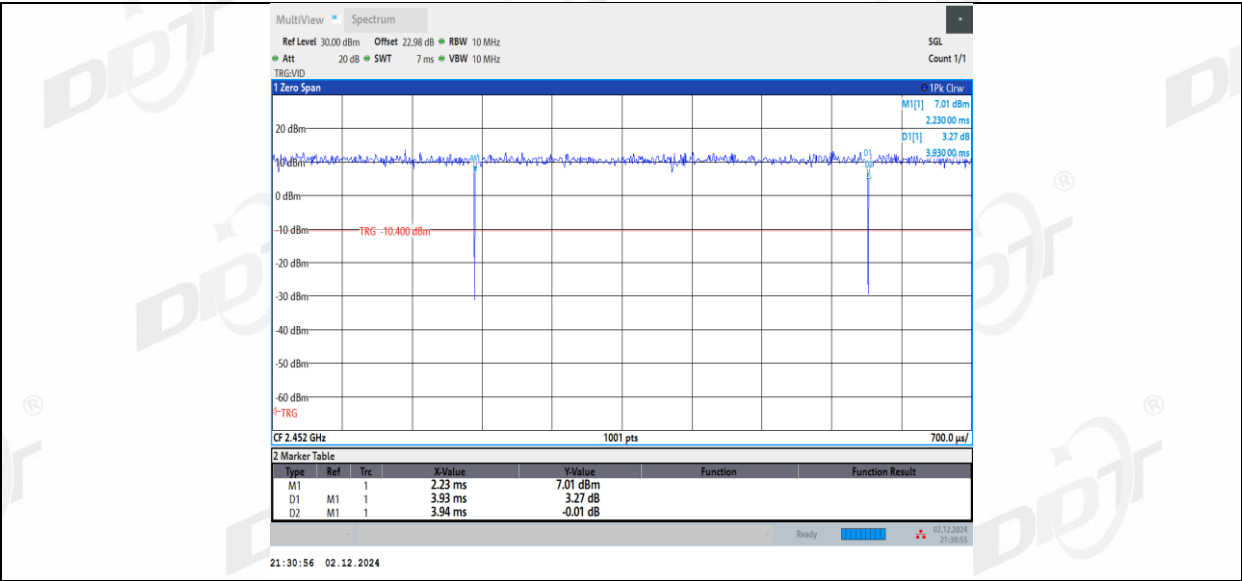

11. Antenna Requirements

11.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

11.2. Result

The antenna used for this product as Antenna information described in section 2.1 of the report, and there is no other antenna than that furnished by the responsible party shall be used with the device.

12. Radiated Emission

12.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
High Pass filter	Xi'an Xingbo	XBLBQ-GTA67	DDT-ZC02179	2026/03/28
Hochgewinn-Hornantenne	SCHWARZBEC K	BBHA 9120 D	DDT-ZC02129	2025/09/18
RF cable	Yuhu Technology	JCTB810-NJ-NJ- 9M	DDT-ZC02538	2026/03/28
Active Loop Antenna	Schwarzbeck	FMZB1519	DDT-ZC00524	2025/09/11
High pass filter	Micro-Tronics	HPM50108	DDT-ZC00560	2026/03/28
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	DDT-ZC02050	2025/07/11
RF cable	Zhongke Junchuang	JCT26S-NJ-NJ- 1.5M	DDT-ZC02762	2026/03/28
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2027/04/01
RF Cable	N/A	W24.02 HL-562	DDT-ZC04022	2026/03/28
EMI TEST RECEIVER	R&S	ESU26	DDT-ZC01909	2026/03/28
Micro-Tronics filters	REBES	BRM50716	DDT-ZC03240	/
RF cable	Yuhu Technology	ZT26S-SMAJ- SMAJ-1M	DDT-ZC02037	2026/03/28
PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2026/03/28
RF Cable	N/A	W13.02 AP1-X2	DDT-ZC04023	2026/03/28
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2026/03/28
Micro-Tronics filters	REBES	BRM50702	DDT-ZC03242	/
High pass filter	Micro-Tronics	HPM50102	DDT-ZC00561	2026/03/28
Pre-amplifier	COM-POWER	PAM-118A	DDT-ZC01293	2025/08/25