



FCC Radio Test Report

FCC ID: W59RT20

Report No. : BTL-FCCP-1-2204H010

Equipment: High Performance Gigabit Router

Model Name : RT-20 Brand Name : LUXUL

Applicant: Legrand AV Inc.

Address : 6436 City West Pkwy, Eden Prairie, MN 55344 USA

Radio Function : Bluetooth EDR

FCC Rule Part(s) : FCC CFR Title 47, Part 15, Subpart C (15.247)

Measurement : ANSI C63.10-2013

Procedure(s)

Date of Receipt : 2022/4/24

Date of Test : 2022/4/24 ~ 2022/11/8

Issued Date : 2022/12/13

The above equipment has been tested and found in compliance with the requirement of the above standards by BTL Inc.

Prepared by :

Eric Lee, Engineer

Approved by : Jerry Chuang Supervisor

TAF
Testing Laboratory
0659

BTL Inc.

No.18, Ln. 171, Sec. 2, Jiuzong Rd., Neihu Dist., Taipei City 114, Taiwan

Tel: +886-2-2657-3299 Fax: +886-2-2657-3331 Web: www.newbtl.com Service mail: btl_qa@newbtl.com



Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Project No.: 2204H010 Page 2 of 72 Report Version: R04





CONTENTS 1 SUMMARY OF TEST RESULTS 6 1.1 TEST FACILITY 7 1.2 MEASUREMENT UNCERTAINTY 7 TEST ENVIRONMENT CONDITIONS 1.3 8 1.4 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING 8 1.5 **DUTY CYCLE** 9 2 **GENERAL INFORMATION** 10 2.1 **DESCRIPTION OF EUT** 10 **TEST MODES** 2.2 12 2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED 13 2.4 SUPPORT UNITS 14 3 AC POWER LINE CONDUCTED EMISSIONS TEST 15 3.1 LIMIT 15 3.2 **TEST PROCEDURE** 15 **DEVIATION FROM TEST STANDARD** 3.3 15 **TEST SETUP** 3.4 16 3.5 **TEST RESULT** 16 RADIATED EMISSIONS TEST 17 4 4.1 LIMIT 17 4.2 **TEST PROCEDURE** 18 4.3 **DEVIATION FROM TEST STANDARD** 18 4.4 **TEST SETUP** 18 4.5 **EUT OPERATING CONDITIONS** 19 TEST RESULT - BELOW 30 MHZ 4.6 20 4.7 TEST RESULT - 30 MHZ TO 1 GHZ 20 4.8 TEST RESULT - ABOVE 1 GHZ 20 5 NUMBER OF HOPPING CHANNEL 21 5.1 **APPLIED PROCEDURES** 21 **TEST PROCEDURE** 5.2 21 5.3 **DEVIATION FROM STANDARD** 21 5.4 **TEST SETUP** 21 **EUT OPERATION CONDITIONS** 5.5 21 5.6 **TEST RESULTS** 21 6 AVERAGE TIME OF OCCUPANCY 22 6.1 APPLIED PROCEDURES / LIMIT 22 **TEST PROCEDURE** 22 6.2 **DEVIATION FROM STANDARD** 6.3 22 6.4 **TEST SETUP** 22 6.5 **EUT OPERATION CONDITIONS** 22 **TEST RESULTS** 22 6.6 7 HOPPING CHANNEL SEPARATION MEASUREMENT 23 7.1 APPLIED PROCEDURES / LIMIT 23 **TEST PROCEDURE** 7.2 23 7.3 **DEVIATION FROM STANDARD** 23 **TEST SETUP** 7.4 23 7.5 **TEST RESULTS** 23 **BANDWIDTH TEST** 8 24



8.1	APPL	IED PROCEDURES	24
8.2	TEST	PROCEDURE	24
8.3	DEVIA	ATION FROM STANDARD	24
8.4	TEST	SETUP	24
8.5	EUT (DPERATION CONDITIONS	24
8.6	TEST	RESULTS	24
9	OUTPUT	POWER TEST	25
9.1	APPL	IED PROCEDURES / LIMIT	25
9.2	TEST	PROCEDURE	25
9.3	DEVIA	ATION FROM STANDARD	25
9.4	TEST	SETUP	25
9.5	EUT (OPERATION CONDITIONS	25
9.6	TEST	RESULTS	25
10	ANTENN	IA CONDUCTED SPURIOUS EMISSION	26
10.1	APPL	IED PROCEDURES / LIMIT	26
10.2	TEST	PROCEDURE	26
10.3	DEVIA	ATION FROM STANDARD	26
10.4	TEST	SETUP	26
10.5	EUT (DPERATION CONDITIONS	26
10.6	TEST	RESULTS	26
11	LIST OF	MEASURING EQUIPMENTS	27
12	EUT TES	ST PHOTO	29
13	EUT PHO	OTOS	29
APPEND	IX A	AC POWER LINE CONDUCTED EMISSIONS	30
APPEND	IX B	RADIATED EMISSIONS - 30 MHZ TO 1 GHZ	35
APPEND	IX C	RADIATED EMISSIONS - ABOVE 1 GHZ	38
APPEND	IX D	NUMBER OF HOPPING CHANNEL	55
APPEND	IX E	AVERAGE TIME OF OCCUPANCY	57
APPEND	IX F	HOPPING CHANNEL SEPARATION MEASUREMENT	60
APPEND	IX G	BANDWIDTH	63
APPEND	IX H	OUTPUT POWER	66
APPEND	IX I	ANTENNA CONDUCTED SPURIOUS EMISSION	68



REVISION HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-1-2204H010	R00	Original Report.	2022/11/29	Invalid
BTL-FCCP-1-2204H010	R01	Revised Typo.	2022/12/1	Invalid
BTL-FCCP-1-2204H010	R02	Revised report to address TCB's comments.	2022/12/7	Invalid
BTL-FCCP-1-2204H010	R03	Revised report to address TCB's comments.	2022/12/12	Invalid
BTL-FCCP-1-2204H010	R04	Revised report to address TCB's comments.	2022/12/13	Valid

Project No.: 2204H010 Page 5 of 72 Report Version: R04

SUMMARY OF TEST RESULTS

Test procedures according to the technical standards.

Standard(s) Section	Description	Test Result	Judgement	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	Pass	
15.205 15.209 15.247(d)	Radiated Emissions	APPENDIX B APPENDIX C	Pass	
15.247 (a)(1)(iii)	Number of Hopping Frequency	APPENDIX D	Pass	
15.247 (a)(1)(iii)	Average Time of Occupancy	APPENDIX E	Pass	
15.247 (a)(1)	Hopping Channel Separation	APPENDIX F	Pass	
15.247 (a)(1)	Bandwidth	APPENDIX G	Pass	
15.247 (b)(1)	Output Power	APPENDIX H	Pass	
15.247(d)	Antenna conducted Spurious Emission	APPENDIX I	Pass	
15.203	Antenna Requirement		Pass	

(1) "N/A" denotes test is not applicable in this Test Report.(2) The report format version is TP.1.1.1.

Project No.: 2204H010 Page 6 of 72 Report Version: R04

1.1 TEST FACILITY

The test locations stated below are under the TAF Accreditation Number 0659. The satellite facilities under the test firm used to collect the test data in this report are: No. 68-1, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan (FCC DN: TW0659)

 \boxtimes C05 \boxtimes SR10 \square SR11

No. 72, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

(FCC DN: TW0659)

□ C06 ⊠ CB21 □ CB22

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $\mathbf{y} \pm \mathbf{U}$, where expanded uncertainty \mathbf{U} is based on a standard uncertainty multiplied by a coverage factor of $\mathbf{k} = \mathbf{2}$, providing a level of confidence of approximately $\mathbf{95}$ %. The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 \mathbf{U}_{cispr} requirement.

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U (dB)
C05	CISPR	150 kHz ~ 30 MHz	3.44

B. Radiated emissions test:

Test Site	Measurement Frequency Range	U,(dB)
	0.03 GHz ~ 0.2 GHz	4.17
	0.2 GHz ~ 1 GHz	4.72
CB21	1 GHz ~ 6 GHz	5.21
CB21	6 GHz ~ 18 GHz	5.51
	18 GHz ~ 26 GHz	3.69
	26 GHz ~ 40 GHz	4.23

C. Conducted test:

u test.		
Test Site	Test Item	U,(dB)
	Occupied Bandwidth	0.5338
	Output power	0.3659
	Conducted Spurious emissions	0.5416
SR10	Conducted Band edges	0.5348
	Dwell time	0.6606
	Channel separation	0.6606
	Channel numbers	0.6606

NOTE:

Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

Project No.: 2204H010 Page 7 of 72 Report Version: R04



1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Environment Condition	Test Voltage	Tested by
AC Power Line Conducted Emissions	22 °C, 61 %	AC 120V	Jay Tien
Radiated emissions below 1 GHz	23 °C, 59 %	AC 120V	Mark Wang
Radiated emissions above 1 GHz	23 °C, 59 %	AC 120V	Mark Wang
Number of Hopping Frequency	23.1°C, 49 %	AC 120V	Tim Lee
Average Time of Occupancy	23.1°C, 49 %	AC 120V	Tim Lee
Hopping Channel Separation	23.1°C, 49 %	AC 120V	Tim Lee
Bandwidth	23.1°C, 49 %	AC 120V	Tim Lee
Output Power	23.1°C, 49 %	AC 120V	Tim Lee
Antenna conducted Spurious Emission	23.1°C, 49 %	AC 120V	Tim Lee

1.4 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

Test Software	TTProxy V11.00.26					
Modulation Mode	2402 MHz	2441 MHz	2480 MHz	Data Rate		
GFSK	08	08	08	1 Mbps		
π/4-DQPSK	08	08	08	2 Mbps		
8DPSK	08	08	08	3 Mbps		


Project No.: 2204H010 Page 8 of 72 Report Version: R04



1.5 DUTY CYCLE

If duty cycle is \geq 98 %, duty factor is not required. If duty cycle is < 98 %, duty factor shall be considered.

Remark	Delta 1			Delta 2	On Time/Period	10 log(1/Duty Cycle)
Mode	ON	Numbers	On Time (B)	Period (ON+OFF)	Duty Cycle	Duty Factor
Wode	(ms)	(ON)	(ms)	(ms)	(%)	(dB)
BT (1 Mbps)	2.880	1	2.880	3.760	76.60%	1.16
BT (2 Mbps)	2.900	1	2.900	3.760	77.13%	1.13
BT (3 Mbps)	2.920	1	2.920	3.780	77.25%	1.12

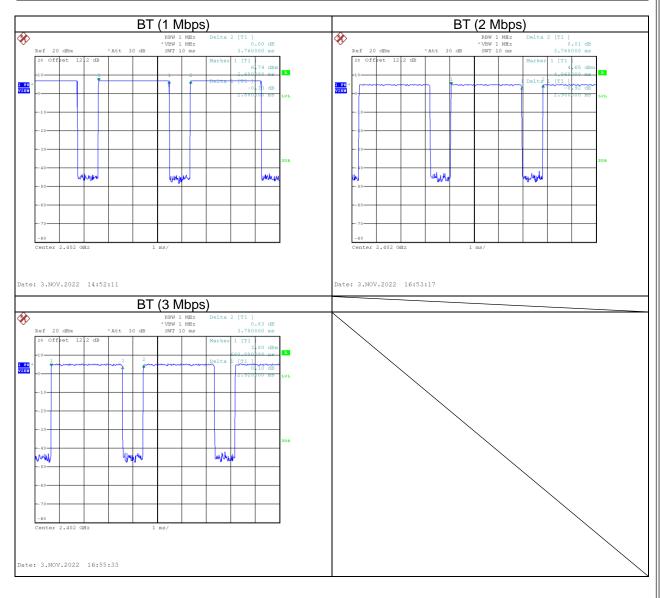

GENERAL INFORMATION

2.1 DESCRIPTION OF EUT

Equipment	High Performance Gigabit Router		
Model Name	RT-20		
Brand Name	LUXUL		
Model Difference	N/A		
Power Source	AC Mains.		
Power Rating	100-240 Vac, 50-60Hz, 0.7A		
Products Covered	N/A		
Operation Band	2400 MHz ~ 2483.5 MHz		
Operation Frequency	2402 MHz ~ 2480 MHz		
Modulation Type	GFSK, π/4-DQPSK, 8DPSK		
Modulation Technology	FHSS		
Transfer Rate	1 Mbps, 2 Mbps, 3Mbps		
	1 Mbps: 7.56 dBm (0.0057 W)		
Output Power Max.	2 Mbps: 6.66 dBm (0.0046 W)		
	3 Mbps: 6.89 dBm (0.0049 W)		
Test Model	RT-20		
Sample Status	Engineering Sample		
EUT Modification(s)	N/A		

(1) The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.(2) Channel List:

Channel List:	Channel List:							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)			
00	2402	27	2429	54	2456			
01	2403	28	2430	55	2457			
02	2404	29	2431	56	2458			
03	2405	30	2432	57	2459			
04	2406	31	2433	58	2460			
05	2407	32	2434	59	2461			
06	2408	33	2435	60	2462			
07	2409	34	2436	61	2463			
08	2410	35	2437	62	2464			
09	2411	36	2438	63	2465			
10	2412	37	2439	64	2466			
11	2413	38	2440	65	2467			
12	2414	39	2441	66	2468			
13	2415	40	2442	67	2469			
14	2416	41	2443	68	2470			
15	2417	42	2444	69	2471			
16	2418	43	2445	70	2472			
17	2419	44	2446	71	2473			
18	2420	45	2447	72	2474			
19	2421	46	2448	73	2475			
20	2422	47	2449	74	2476			
21	2423	48	2450	75	2477			
22	2424	49	2451	76	2478			
23	2425	50	2452	77	2479			
24	2426	51	2453	78	2480			
25	2427	52	2454					
26	2428	53	2455					

Project No.: 2204H010 Page 10 of 72 Report Version: R04



(3) Table for Filed Antenna:

Ant.	Brand Name	Model Name	Туре	Connector	Frequency (MHz)	Gain (dBi)
-	PSA	RG-18	РСВ	I-PEX	2400-2500	2.37

(4) The above Antenna information are derived from the antenna data sheet provided by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

Project No.: 2204H010 Page 11 of 72 Report Version: R04



2.2 TEST MODES

Test Items	Test mode	Channel	Note
AC power line conducted emissions	Normal/Idle	-	-
Transmitter Radiated Emissions (below 1GHz)	1 Mbps	78	-
Transmitter Radiated Emissions	1/3 Mbps	00/78	Bandedge
(above 1GHz)	1/3 Mbps	00/39/78	Harmonic
Number of Hopping Frequency	1/3 Mbps	00~78	-
Average Time of Occupancy	1/3 Mbps	00/39/78	-
Hopping Channel Separation	1/3 Mbps	00/39/78	-
Bandwidth	1/3 Mbps	00/39/78	-
Peak Output Power	1/2/3 Mbps	00/39/78	-
Antenna conducted Spurious Emission	1/3 Mbps	00/39/78	-

NOTE:

(1)	For radiated emiss	ion band edge test	t, both Vertica	al and Horizontal	are evaluated,	but only the v	vorst case
	(Vertical) is recorde	ed.					


Project No.: 2204H010 Page 12 of 72 Report Version: R04




2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Equipment letters and Cable numbers refer to item numbers described in the tables of clause 2.4.

AC power line conducted emissions

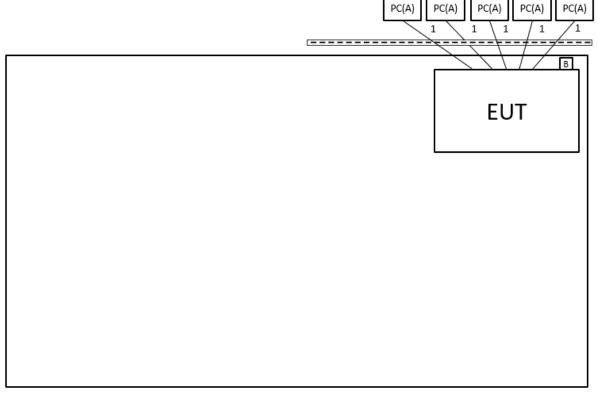

Radiated Emissions

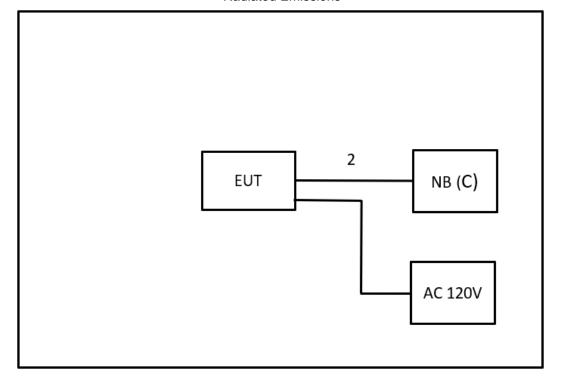



2.4 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.	Remarks
Α	PC	DELL	OptiPlex 7080	611WJA00	Furnished by test lab.
В	USB Dongle	Transcend	JetFlash 790	N/A	Furnished by test lab.
С	NB	acer	TMP446-M-50L4	N/A	Furnished by test lab.

Item	Shielded	Ferrite Core	Length	Cable Type	Remarks
1	NO	NO	2m	RJ-45 Cable	Furnished by test lab.
2	NO	NO	1m	RJ-45 Cable	Furnished by test lab.

Project No.: 2204H010 Page 14 of 72 Report Version: R04



3 AC POWER LINE CONDUCTED EMISSIONS TEST

3.1 LIMIT

Frequency	Limit (dBµV)			
(MHz)	Quasi-peak	Average		
0.15 - 0.5	66 - 56 *	56 - 46 *		
0.50 - 5.0	56	46		
5.0 - 30.0	60	50		

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)

Margin Level = Measurement Value - Limit Value

Calculation example:

Reading Level		Correct Factor		Measurement Value
38.22	+	3.45	=	41.67

Measurement Value		Limit Value		Margin Level
41.67	-	60	II	-18.33

The following table is the setting of the receiver.

Receiver Parameter	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 m above the horizontal ground plane with the EUT being connected to the power mains through a line impedance stabilization network (LISN).
 - All other support equipment were powered from an additional LISN(s).
 - The LISN provides 50 Ohm/50uH of impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle to keep the cable above 40 cm.
- c. Excess I/O cables that are not connected to a peripheral shall be bundled in the center.
 - The end of the cable will be terminated, using the correct terminating impedance.
 - The overall length shall not exceed 1 m.
- d. The LISN is spaced at least 80 cm from the nearest part of the EUT chassis.
- e. For the actual test configuration, please refer to the related Item EUT TEST PHOTO.

NOTE:

- (1) In the results, each reading is marked as Peak, QP or AVG per the detector used. BW=9 kHz (6 dB Bandwidth)
- (2) All readings are Peak unless otherwise stated QP or AVG in column of Note. Both the QP and the AVG readings must be less than the limit for compliance.


3.3 DEVIATION FROM TEST STANDARD

No deviation.

Project No.: 2204H010 Page 15 of 72 Report Version: R04



3.4 TEST SETUP

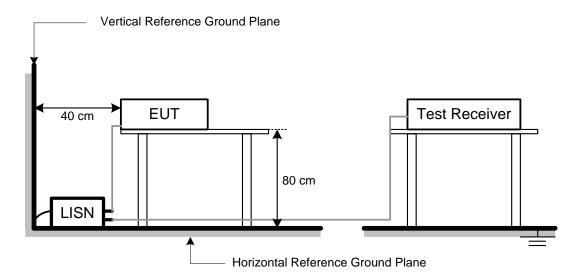

3.5 TEST RESULT

Please refer to the APPENDIX A.



4 RADIATED EMISSIONS TEST

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205, then the 15.209 limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency	Field Strength	Measurement Distance
(MHz)	(microvolts/meter)	(meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSIONS MEASUREMENT (Above 1000 MHz)

Frequency	Radiated (dBu	Measurement Distance	
(MHz)	Peak	Average	(meters)
Above 1000	74	54	3

NOTE:

- (1) The limit for radiated test was performed according to FCC CFR Title 47, Part 15, Subpart C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

Calculation example:

Reading Level		Correct Factor		Measurement Value
35.45	+	-11.37	=	24.08

Measurement Value		Limit Value		Margin Level
24.08	-	40	=	-15.92

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW	1MHz / 3MHz for Peak,
(Emission in restricted band)	1MHz / 1/T for Average

Spectrum Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

Project No.: 2204H010 Page 17 of 72 Report Version: R04




4.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m or 1.5 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item EUT TEST PHOTO.

4.3 DEVIATION FROM TEST STANDARD


No deviation.

4.4 TEST SETUP

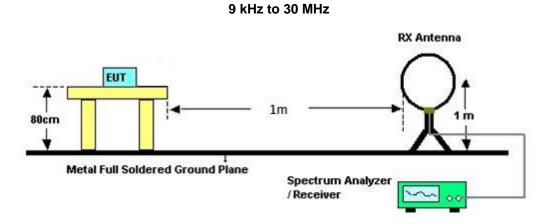




30 MHz to 1 GHz

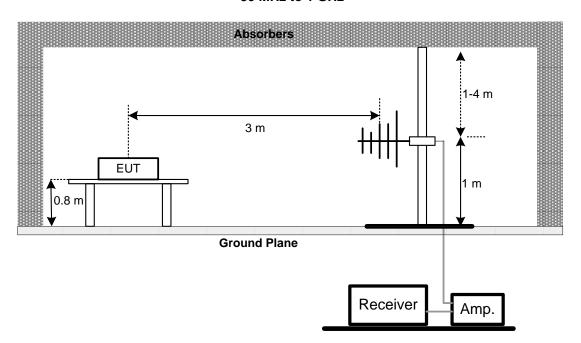

Above 1 GHz

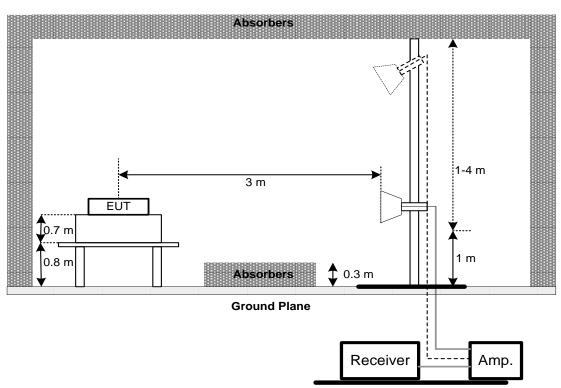

4.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.



4.6 TEST RESULT - BELOW 30 MHZ

There were no emissions found below 30 MHz within 20 dB of the limit.

4.7 TEST RESULT - 30 MHZ TO 1 GHZ

Please refer to the APPENDIX B.

4.8 TEST RESULT - ABOVE 1 GHZ

Please refer to the APPENDIX C.

NOTE:

(1) No limit: This is fundamental signal, the judgment is not applicable. For fundamental signal judgment was referred to Peak output test.

Project No.: 2204H010 Page 20 of 72 Report Version: R04



5 NUMBER OF HOPPING CHANNEL

5.1 APPLIED PROCEDURES

FCC Part15 (15.247) , Subpart C			
Section	Test Item	Frequency Range (MHz)	Result
15.247(a)(1)(iii)	Number of Hopping Channel	2400-2483.5	PASS

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RBW	100 KHz
VBW	100 KHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW=100KHz, VBW=100KHz, Sweep time = Auto.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP

EUT	SPECTRUM	
	ANALYZER	

5.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULTS

Please refer to the APPENDIX D.

Project No.: 2204H010 Page 21 of 72 Report Version: R04



AVERAGE TIME OF OCCUPANCY

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247), Subpart C				
Section Test Item Limit Frequency Range (MHz) Result				Result
15.247(a)(1)(iii)	Average Time of Occupancy	0.4sec	2400-2483.5	PASS

6.2 TEST PROCEDURE

- a. The transmitter output (antenna port) was connected to the spectrum analyzer
- b. Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz.
- c. Use a video trigger with the trigger level set to enable triggering only on full pulses.
- d. Sweep Time is more than once pulse time.
- e. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- f. Measure the maximum time duration of one single pulse.
- g. Set the EUT for DH5, DH3 and DH1 packet transmitting.
- h. Measure the maximum time duration of one single pulse.
- i. Measure the maximum time duration of one single pulse.

A Period Time = (channel number) * 0.4

For Non-AFH Mode (79 Channel):

DH1 Time Solt: Reading * (1600/2)/79 * (0.4 * 79)

DH3 Time Solt: Reading * (1600/4)/79 * (0.4 * 79)

DH5 Time Solt: Reading * (1600/6)/79 * (0.4 * 79)

For AFH Mode (20 Channel):

DH1 Time Solt: Reading * (800/2)/20 * (0.4 * 20)

DH3 Time Solt: Reading * (800/4)/20 * (0.4 * 20) DH5 Time Solt: Reading * (800/6)/20 * (0.4 * 20)

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

EUT	SPECTRUM
	ANALYZER

6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX E.

Project No.: 2204H010 Page 22 of 72 Report Version: R04

7 HOPPING CHANNEL SEPARATION MEASUREMENT

7.1 APPLIED PROCEDURES / LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 KHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RBW	30 KHz
VBW	100 KHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


7.2 TEST PROCEDURE

- a. The EUT must have its hopping function enabled
- b. Span = wide enough to capture the peaks of two adjacent channels Resolution (or IF) Bandwidth (RBW) ≥ 1% of the span Video (or Average) Bandwidth (VBW) ≥ RBW Sweep = Auto Detector function = Peak Trace = Max Hold

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 TEST RESULTS

Please refer to the APPENDIX F.

Project No.: 2204H010 Page 23 of 72 Report Version: R04



8 BANDWIDTH TEST

8.1 APPLIED PROCEDURES

FCC Part15 (15.247) , Subpart C		
Section	Test Item	Frequency Range (MHz)
15.247(a)(1)	Bandwidth	2400-2483.5

Spectrum Parameter	Setting	
Attenuation	Auto	
Span Frequency	> Measurement Bandwidth or Channel Separation	
RBW	30 KHz (20dB Bandwidth) / 30 KHz (Channel Separation)	
VBW	100 KHz (20dB Bandwidth) / 100 KHz (Channel Separation)	
Detector	Peak	
Trace	Max Hold	
Sweep Time	Auto	

8.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 30KHz, VBW=100KHz, Sweep Time = Auto.

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP

EUT	SPECTRUM
	ANALYZER

8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS

Please refer to the APPENDIX G.

Project No.: 2204H010 Page 24 of 72 Report Version: R04

9 OUTPUT POWER TEST

9.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247), Subpart C				
Section Test Item Limit Frequency Range (MHz) Result				
15.247(b)(1)	Peak Output Power	0.125Watt or 21dBm	2400-2483.5	PASS


9.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 3MHz, VBW= 3MHz, Sweep time = Auto.

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP



9.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

9.6 TEST RESULTS

Please refer to the APPENDIX H.



10 ANTENNA CONDUCTED SPURIOUS EMISSION

10.1 APPLIED PROCEDURES / LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.

10.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=100KHz, Sweep time = Auto.
- c. Offset=antenna gain+cable loss

10.3 DEVIATION FROM STANDARD

No deviation.

10.4 TEST SETUP

EUT SPECTRUM ANALYZER

10.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

10.6 TEST RESULTS

Please refer to the APPENDIX I.

Project No.: 2204H010 Page 26 of 72 Report Version: R04



11 LIST OF MEASURING EQUIPMENTS

	LIGITOT MEXICONING EQUI MENTO										
	AC Power Line Conducted Emissions										
Item	Kind of Equipment	I Manufacturer I Type No I Serial No		Serial No.	Calibrated Date	Calibrated Until					
1	TWO-LINE V-NETWORK	R&S	ENV216	101521	2022/9/28	2023/9/27					
2	Test Cable	EMCI	EMCCFD300-BM -BMR-5000	220331	2022/3/31	2023/3/30					
3	EMI Test Receiver	EMI Test R&S FSR 7		101433	2021/11/24	2022/11/23					
4	Measurement Software	EZ	EZ_EMC (Version NB-03A1-01)	N/A	N/A	N/A					

			Radiated Emission	ons		
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Preamplifier	EMCI	EMC330N	980850	2022/9/19	2023/9/18
2	Preamplifier	EMCI	EMC118A45SE	980819	2022/3/8	2023/3/7
3	Preamplifier	EMCI	EMC184045SE	980882	2022/2/9	2023/2/8
4	Preamplifier	EMCI	EMC001340	980555	2022/4/6	2023/4/5
5	Test Cable	EMCI	EMC104-SM-SM- 1000	220319	2022/3/15	2023/3/14
6	Test Cable	EMCI	EMC104-SM-SM- 3000	220322	2022/3/15	2023/3/14
7	Test Cable	EMCI	EMC104-SM-SM- 7000	220324	2022/3/15	2023/3/14
8	EXA Signal Analyzer	keysight	N9020B	MY57120120	2022/3/7	2023/3/6
9	Loop Ant	Electro-Metrics	EMCI-LPA600	274	2022/6/16	2023/6/15
10	Horn Antenna	RFSPIN	DRH18-E	211202A18EN	2022/5/18	2023/5/17
11	Horn Ant	Schwarzbeck	BBHA 9170D	1136	2022/5/18	2023/5/17
12	Log-bicon Antenna	Schwarzbeck	VULB9168	1369	2022/5/20	2023/5/19
13	6dB Attenuator	EMCI	EMCI-N-6-06	AT-N0625	2022/5/20	2023/5/19
14	Measurement		EZ_EMC (Version NB-03A1-01)	N/A	N/A	N/A

Number of Hopping Frequency									
Item	Kind of Equipment	Calibrated Date	Calibrated Until						
1	Spectrum Analyzer	R&S	FSP38	101139	2022/3/2	2023/3/1			

	Average Time of Occupancy									
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until				
1	Spectrum Analyzer	R&S	FSP38	101139	2022/3/2	2023/3/1				

	Hopping Channel Separation									
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until				
1	Spectrum Analyzer	R&S	FSP38	101139	2022/3/2	2023/3/1				



	Bandwidth									
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until				
1	Spectrum Analyzer	R&S	FSP38	101139	2022/3/2	2023/3/1				

	Output Power									
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until				
1	Power Meter	Keysight	8990B	MY51000517	2022/3/18	2023/3/17				
2	Power Sensor	Keysight	N1923A	MY58310005	2022/3/18	2023/3/17				

	Antenna conducted Spurious Emission										
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until					
1	Spectrum Analyzer	R&S	FSP38	101139	2022/3/2	2023/3/1					

Remark: "N/A" denotes no model name, no serial no. or no calibration specified. All calibration period of equipment list is one year.

Project No.: 2204H010 Page 28 of 72 Report Version: R04



40 FUT TEST BUSTO
12 EUT TEST PHOTO
Please refer to document Appendix No.: TP-2204H010-FCCP-1 (APPENDIX-TEST PHOTOS).
13 EUT PHOTOS
Please refer to document Appendix No.: EP-2204H010-1 (APPENDIX-EUT PHOTOS).

Project No.: 2204H010 Page 29 of 72 Report Version: R04




APPENDIX A	AC POWER LINE CONDUCTED EMISSIONS

Project No.: 2204H010 Page 30 of 72 Report Version: R04



Test Mode	Normal	Tested Date	2022/11/4
Test Frequency	-	Phase	Line

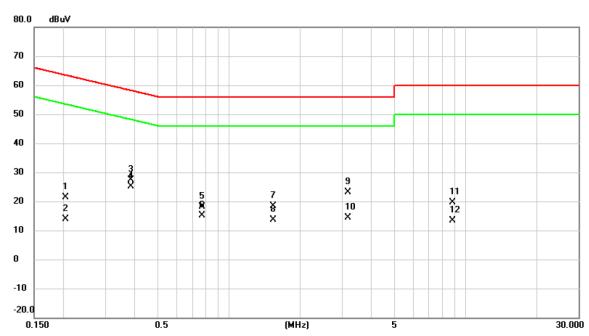


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.2040	21.37	0.02	21.39	63.45	-42.06	QP	
2		0.2040	13.90	0.02	13.92	53.45	-39.53	AVG	
3		0.3840	27.29	0.02	27.31	58.19	-30.88	QP	
4	*	0.3840	25.02	0.02	25.04	48.19	-23.15	AVG	
5		0.7687	18.04	0.04	18.08	56.00	-37.92	QP	
6		0.7687	15.08	0.04	15.12	46.00	-30.88	AVG	
7		1.5382	18.37	0.06	18.43	56.00	-37.57	QP	
8		1.5382	13.53	0.06	13.59	46.00	-32.41	AVG	
9		3.1875	23.05	0.10	23.15	56.00	-32.85	QP	
10		3.1875	14.29	0.10	14.39	46.00	-31.61	AVG	
11		8.8080	19.35	0.17	19.52	60.00	-40.48	QP	
12		8.8080	13.17	0.17	13.34	50.00	-36.66	AVG	

- (1) Measurement Value = Reading Level + Correct Factor.(2) Margin Level = Measurement Value Limit Value.



	Test Mode	Normal	Tested Date	2022/11/4
ĺ	Test Frequency	-	Phase	Neutral

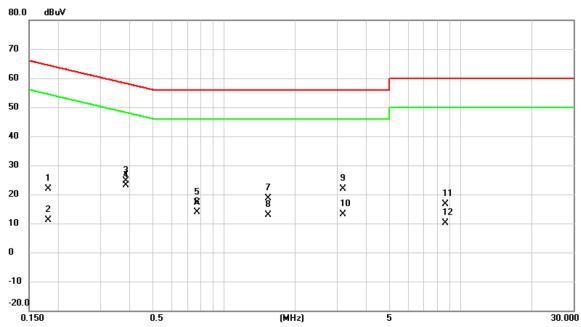


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1815	21.86	0.02	21.88	64.42	-42.54	QP	
2		0.1815	11.05	0.02	11.07	54.42	-43.35	AVG	
3		0.3840	24.69	0.02	24.71	58.19	-33.48	QP	
4	*	0.3840	23.00	0.02	23.02	48.19	-25.17	AVG	
5		0.7687	16.99	0.04	17.03	56.00	-38.97	QP	
6		0.7687	13.92	0.04	13.96	46.00	-32.04	AVG	
7		1.5382	18.47	0.06	18.53	56.00	-37.47	QP	
8		1.5382	12.82	0.06	12.88	46.00	-33.12	AVG	
9		3.1898	21.89	0.10	21.99	56.00	-34.01	QP	
10		3.1898	12.92	0.10	13.02	46.00	-32.98	AVG	
11		8.6325	16.48	0.17	16.65	60.00	-43.35	QP	
12		8.6325	9.97	0.17	10.14	50.00	-39.86	AVG	

- (1) Measurement Value = Reading Level + Correct Factor.(2) Margin Level = Measurement Value Limit Value.



Test Mode	Idle	Tested Date	2022/11/4
Test Frequency	-	Phase	Line

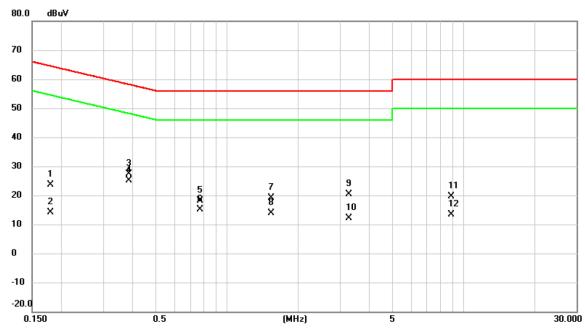


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1796	23.68	0.02	23.70	64.50	-40.80	QP	
2		0.1796	14.21	0.02	14.23	54.50	-40.27	AVG	
3		0.3840	27.32	0.02	27.34	58.19	-30.85	QP	
4	*	0.3840	25.20	0.02	25.22	48.19	-22.97	AVG	
5		0.7687	18.11	0.04	18.15	56.00	-37.85	QP	
6		0.7687	15.04	0.04	15.08	46.00	-30.92	AVG	
7		1.5382	18.97	0.06	19.03	56.00	-36.97	QP	
8		1.5382	13.74	0.06	13.80	46.00	-32.20	AVG	
9		3.2685	20.23	0.10	20.33	56.00	-35.67	QP	
10		3.2685	12.03	0.10	12.13	46.00	-33.87	AVG	
11		8.8688	19.38	0.17	19.55	60.00	-40.45	QP	
12		8.8688	13.16	0.17	13.33	50.00	-36.67	AVG	

- (1) Measurement Value = Reading Level + Correct Factor.(2) Margin Level = Measurement Value Limit Value.



Test Mode	Idle	Tested Date	2022/11/4
Test Frequency	-	Phase	Neutral

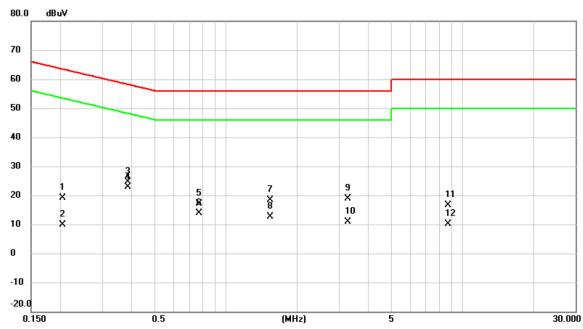

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.2040	19.09	0.02	19.11	63.45	-44.34	QP	
2		0.2040	9.79	0.02	9.81	53.45	-43.64	AVG	
3		0.3840	24.72	0.02	24.74	58.19	-33.45	QP	
4	*	0.3840	22.87	0.02	22.89	48.19	-25.30	AVG	
5		0.7687	17.07	0.04	17.11	56.00	-38.89	QP	
6		0.7687	13.89	0.04	13.93	46.00	-32.07	AVG	
7		1.5382	18.21	0.06	18.27	56.00	-37.73	QP	
8		1.5382	12.66	0.06	12.72	46.00	-33.28	AVG	
9		3.2708	18.68	0.10	18.78	56.00	-37.22	QP	
10		3.2708	10.85	0.10	10.95	46.00	-35.05	AVG	
11		8.7000	16.51	0.17	16.68	60.00	-43.32	QP	
12		8.7000	9.86	0.17	10.03	50.00	-39.97	AVG	

- (1) Measurement Value = Reading Level + Correct Factor.(2) Margin Level = Measurement Value Limit Value.




APPENDIX B	RADIATED EMISSIONS - 30 MHZ TO 1 GHZ

Project No.: 2204H010 Page 35 of 72 Report Version: R04



Test Mode	BT(1Mbps)	Test Date	2022/11/1		
Test Frequency	2480MHz	Polarization	Vertical		
Temp	23°C	Hum.	59%		

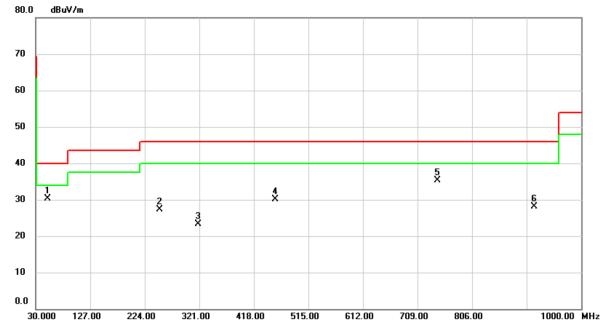


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	50.9197	48.25	-17.90	30.35	40.00	-9.65	peak	
2		249.9960	47.38	-20.09	27.29	46.00	-18.71	peak	
3		318.4457	41.23	-17.83	23.40	46.00	-22.60	peak	
4		456.4443	44.31	-14.18	30.13	46.00	-15.87	peak	
5		744.7283	43.33	-7.99	35.34	46.00	-10.66	peak	
6		916.9033	33.65	-5.62	28.03	46.00	-17.97	peak	

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value Limit Value.



Test Mode	BT(1Mbps)	Test Date	2022/11/1
Test Frequency	2480MHz	Polarization	Horizontal
Temp	23°C	Hum.	59%

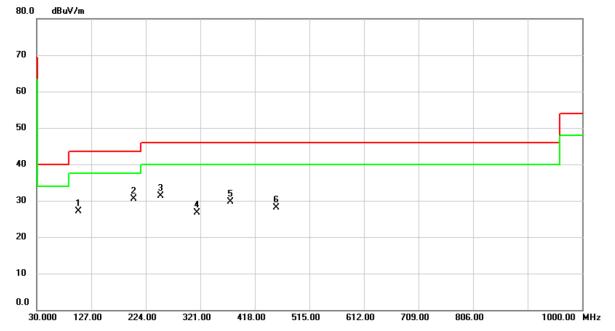

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		104.0110	48.64	-21.53	27.11	43.50	-16.39	peak	
2	*	202.7893	52.35	-21.76	30.59	43.50	-12.91	peak	
3		249.9960	51.40	-20.09	31.31	46.00	-14.69	peak	
4		315.4063	44.53	-17.90	26.63	46.00	-19.37	peak	
5		374.9967	45.99	-16.38	29.61	46.00	-16.39	peak	
6		456.4443	42.27	-14.18	28.09	46.00	-17.91	peak	


- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value Limit Value.



APPENDIX C RADIATED EMISSIONS - ABOVE 1 GHZ

Project No.: 2204H010 Page 38 of 72 Report Version: R04

Test Mode	BT(1Mbps)	Test Date	2022/11/1
Test Frequency	2402MHz	Polarization	Vertical
Temp	23°C	Hum.	59%

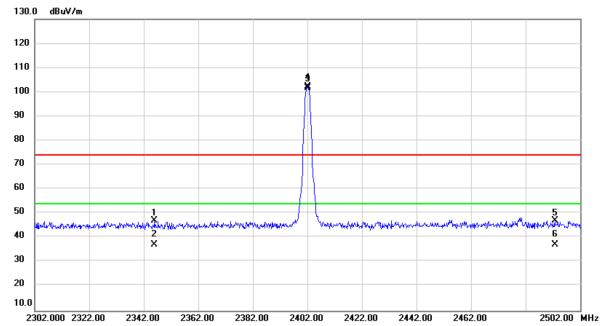


No.	Mk.	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2345.933	52.95	-5.82	47.13	74.00	-26.87	peak	
2		2345.933	42.95	-5.82	37.13	54.00	-16.87	AVG	
3	Χ	2402.000	107.86	-5.75	102.11	74.00	28.11	peak	No Limit
4	*	2402.000	107.47	-5.75	101.72	54.00	47.72	AVG	No Limit
5		2492.767	52.71	-5.64	47.07	74.00	-26.93	peak	
6		2492.767	42.93	-5.64	37.29	54.00	-16.71	AVG	

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value Limit Value.



Test Mode	BT(1Mbps)	Test Date	2022/11/1
Test Frequency	2480MHz	Polarization	Vertical
Temp	23°C	Hum.	59%

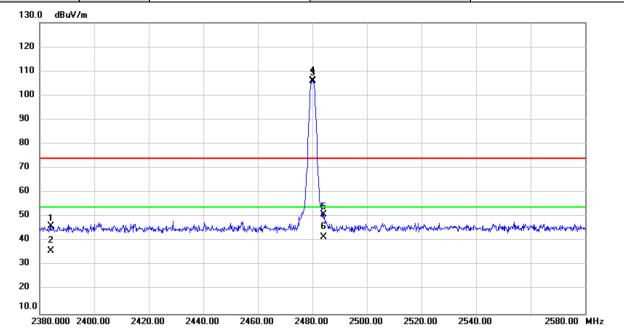


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2384.067	51.98	-5.78	46.20	74.00	-27.80	peak	
2		2384.067	41.74	-5.78	35.96	54.00	-18.04	AVG	
3	Χ	2480.000	111.67	-5.65	106.02	74.00	32.02	peak	No Limit
4	*	2480.000	111.43	-5.65	105.78	54.00	51.78	AVG	No Limit
5		2484.260	56.64	-5.65	50.99	74.00	-23.01	peak	
6		2484.260	47.44	-5.65	41.79	54.00	-12.21	AVG	

- (1) Measurement Value = Reading Level + Correct Factor.(2) Margin Level = Measurement Value Limit Value.



Test Mode	BT(3Mbps)	Test Date	2022/11/1
Test Frequency	2402MHz	Polarization	Vertical
Temp	23°C	Hum.	59%

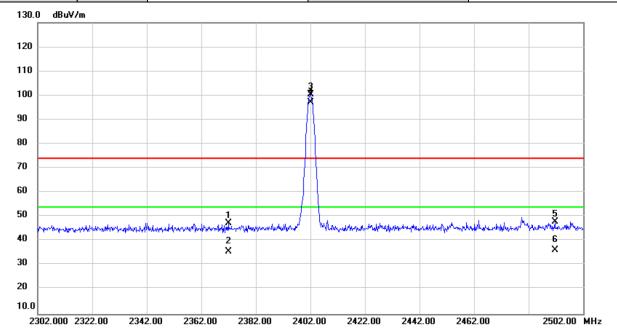


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2371.960	53.29	-5.79	47.50	74.00	-26.50	peak	
2		2371.960	41.47	-5.79	35.68	54.00	-18.32	AVG	
3	Χ	2402.000	106.14	-5.75	100.39	74.00	26.39	peak	No Limit
4	*	2402.000	102.84	-5.75	97.09	54.00	43.09	AVG	No Limit
5		2491.760	53.52	-5.63	47.89	74.00	-26.11	peak	
6		2491.760	41.78	-5.63	36.15	54.00	-17.85	AVG	

- (1) Measurement Value = Reading Level + Correct Factor.(2) Margin Level = Measurement Value Limit Value.




Test Mode	BT(3Mbps)	Test Date	2022/11/1
Test Frequency	2480MHz	Polarization	Vertical
Temp	23°C	Hum.	59%

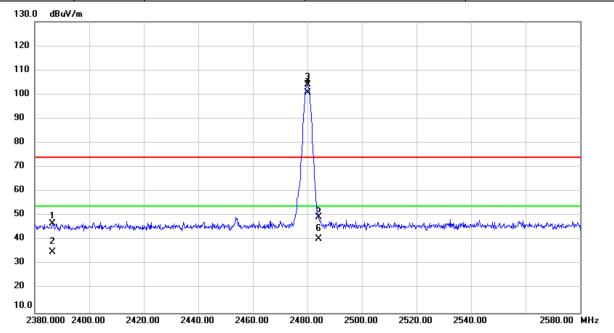

No	. Mi	k. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2386.580	52.59	-5.77	46.82	74.00	-27.18	peak	
2		2386.580	40.74	-5.77	34.97	54.00	-19.03	AVG	
3	Χ	2480.000	109.61	-5.65	103.96	74.00	29.96	peak	No Limit
4	*	2480.000	106.54	-5.65	100.89	54.00	46.89	AVG	No Limit
5		2484.240	55.19	-5.65	49.54	74.00	-24.46	peak	
6		2484.240	45.97	-5.65	40.32	54.00	-13.68	AVG	

- (1) Measurement Value = Reading Level + Correct Factor.(2) Margin Level = Measurement Value Limit Value.


Test Mode	BT(1Mbps)	Test Date	2022/11/1
Test Frequency	2402MHz	Polarization	Vertical
Temp	23°C	Hum.	59%

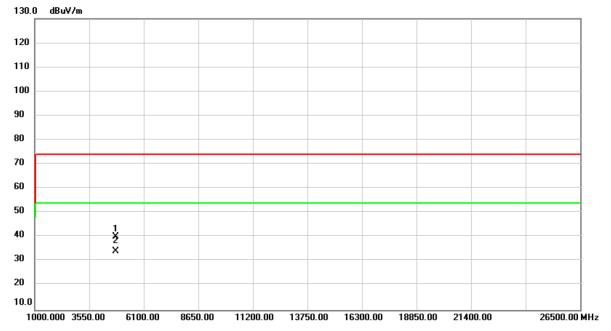

No.	Mŀ	k. Fre	q.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	Z	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4804.00	00	39.50	0.65	40.15	74.00	-33.85	peak	
2	*	4804.00	00	33.54	0.65	34.19	54.00	-19.81	AVG	

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value Limit Value.


Test Mode	BT(1Mbps)	Test Date	2022/11/1
Test Frequency	2402MHz	Polarization	Horizontal
Temp	23°C	Hum.	59%

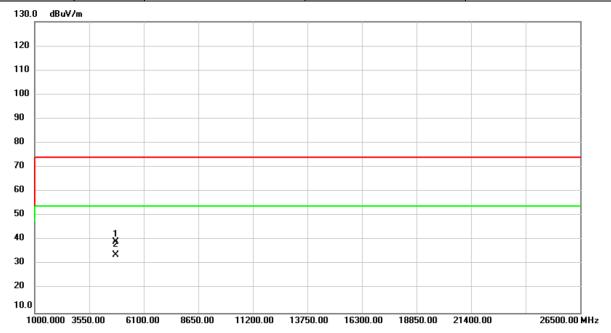

No.	Mk	. Freq.		Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4804.000	38.60	0.65	39.25	74.00	-34.75	peak	
2	*	4804.000	33.13	0.65	33.78	54.00	-20.22	AVG	

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value Limit Value.


Test Mode	BT(1Mbps)	Test Date	2022/11/1
Test Frequency	2441MHz	Polarization	Vertical
Temp	23°C	Hum.	59%

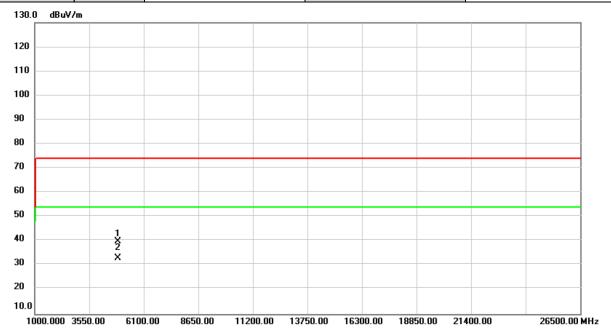

No.	Mk	. Freq.		Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4882.000	38.95	0.92	39.87	74.00	-34.13	peak	
2	*	4882.000	32.12	0.92	33.04	54.00	-20.96	AVG	

- (1) Measurement Value = Reading Level + Correct Factor.(2) Margin Level = Measurement Value Limit Value.


Test Mode	BT(1Mbps)	Test Date	2022/11/1
Test Frequency	2441MHz	Polarization	Horizontal
Temp	23°C	Hum.	59%

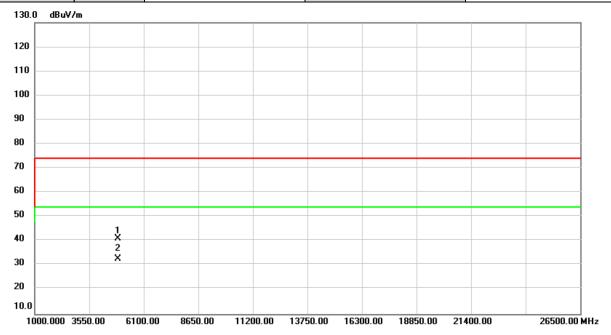

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4882.000	40.18	0.92	41.10	74.00	-32.90	peak	
2	*	4882.000	31.79	0.92	32.71	54.00	-21.29	AVG	

- (1) Measurement Value = Reading Level + Correct Factor.(2) Margin Level = Measurement Value Limit Value.


Test Mode	BT(1Mbps)	Test Date	2022/11/1
Test Frequency	2480MHz	Polarization	Vertical
Temp	23°C	Hum.	59%

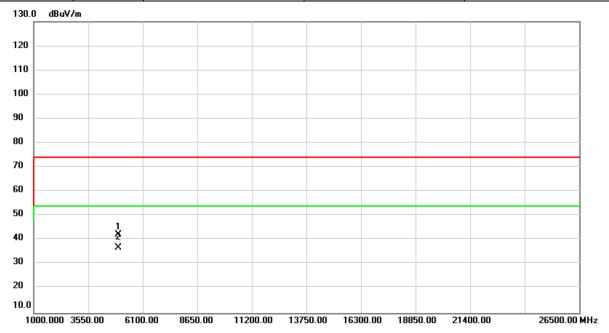

No.	Mk	k. Fred			Correct Factor	Measure- ment	Limit	Over		
		MHz	dBu\	//m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4960.00	0 41.	19	1.18	42.37	74.00	-31.63	peak	
2	*	4960.00	0 35.	56	1.18	36.74	54.00	-17.26	AVG	

- (1) Measurement Value = Reading Level + Correct Factor.(2) Margin Level = Measurement Value Limit Value.

Test Mode	BT(1Mbps)	Test Date	2022/11/1
Test Frequency	2480MHz	Polarization	Horizontal
Temp	23°C	Hum.	59%

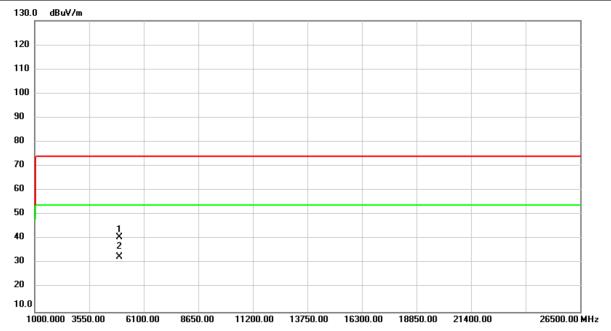


No.	Mk	. Freq.		Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4960.000	39.67	1.18	40.85	74.00	-33.15	peak	
2	*	4960.000	31.46	1.18	32.64	54.00	-21.36	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value Limit Value.

Project No.: 2204H010 Page 48 of 72 Report Version: R04

Test Mode	BT(3Mbps)	Test Date	2022/11/1
Test Frequency	2402MHz	Polarization	Vertical
Temp	23°C	Hum.	59%

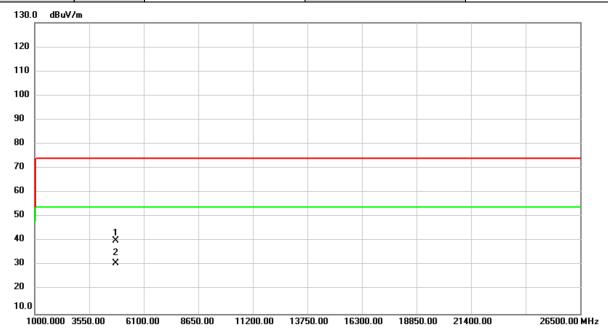


No.	MŁ	k. Freq.	Reading Level		Measure- ment	Limit	Over		
		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4804.000	39.57	0.65	40.22	74.00	-33.78	peak	
2	*	4804.000	30.07	0.65	30.72	54.00	-23.28	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.(2) Margin Level = Measurement Value Limit Value.

Project No.: 2204H010 Page 49 of 72 Report Version: R04

Test Mode	BT(3Mbps)	Test Date	2022/11/1
Test Frequency	2402MHz	Polarization	Horizontal
Temp	23°C	Hum.	59%

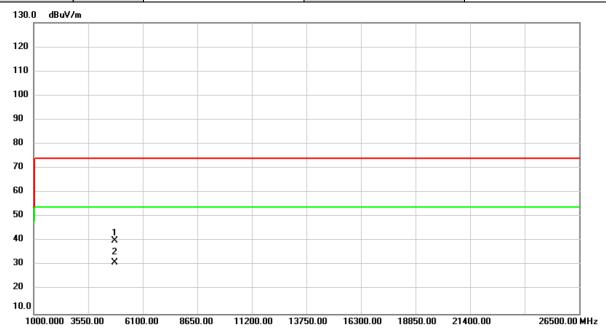


No.	Mk	. Freq.	Reading Level		Measure- ment	Limit	Over		
		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4804.000	39.52	0.65	40.17	74.00	-33.83	peak	
2	*	4804.000	30.62	0.65	31.27	54.00	-22.73	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.(2) Margin Level = Measurement Value Limit Value.

Project No.: 2204H010 Page 50 of 72 Report Version: R04

Test Mode	BT(3Mbps)	Test Date	2022/11/1
Test Frequency	2441MHz	Polarization	Vertical
Temp	23°C	Hum.	59%

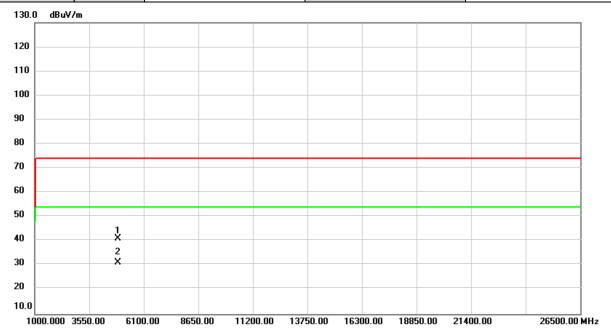


No.	Mk	. Freq.	Reading Level		Measure- ment	Limit	Over		
		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4882.000	40.15	0.92	41.07	74.00	-32.93	peak	
2	*	4882.000	30.16	0.92	31.08	54.00	-22.92	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value Limit Value.

Project No.: 2204H010 Page 51 of 72 Report Version: R04

Test Mode	BT(3Mbps)	Test Date	2022/11/1
Test Frequency	2441MHz	Polarization	Horizontal
Temp	23°C	Hum.	59%

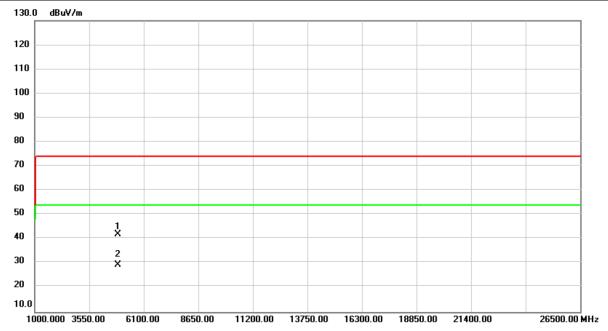


No.	Mk	. Freq.		Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4882.000	40.89	0.92	41.81	74.00	-32.19	peak	
2	*	4882.000	28.56	0.92	29.48	54.00	-24.52	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value Limit Value.

Project No.: 2204H010 Page 52 of 72 Report Version: R04

Test Mode	BT(3Mbps)	Test Date	2022/11/1
Test Frequency	2480MHz	Polarization	Vertical
Temp	23°C	Hum.	59%

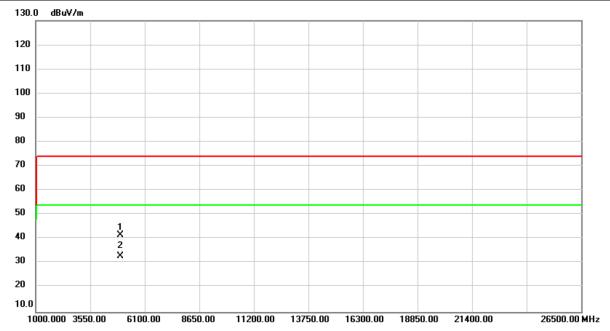


No.	Mk	. Freq.		Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4960.000	40.52	1.18	41.70	74.00	-32.30	peak	
2	*	4960.000	31.69	1.18	32.87	54.00	-21.13	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.(2) Margin Level = Measurement Value Limit Value.

Project No.: 2204H010 Page 53 of 72 Report Version: R04

Test Mode	BT(3Mbps)	Test Date	2022/11/1
Test Frequency	2480MHz	Polarization	Horizontal
Temp	23°C	Hum.	59%

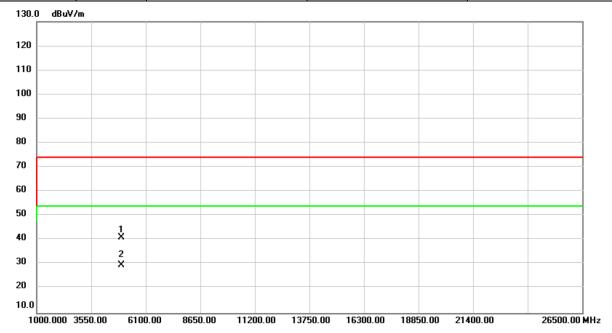

No.	Mk	. Freq.		Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4960.000	39.85	1.18	41.03	74.00	-32.97	peak	
2	*	4960.000	28.62	1.18	29.80	54.00	-24.20	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.(2) Margin Level = Measurement Value Limit Value.

Project No.: 2204H010 Page 54 of 72 Report Version: R04





APPENDIX D	NUMBER OF HOPPING CHANNEL

Project No.: 2204H010 Page 55 of 72 Report Version: R04

Test Mode	1/3Mbps
100t Wiodo	I I / OI VIDPO

Test Mode	Number of Hopping Channel	≥ Limit	Test Result
1 Mbps	79	15	Pass
3 Mbps	79	15	Pass





Date: 3.NOV.2022 15:17:56 Date: 3.NOV.2022 16:07:32




APPENDIX E AVERAGE TIME OF OCCUPANCY

Project No.: 2204H010 Page 57 of 72 Report Version: R04



Test Mode :	1Mbps

Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (s)	Limits (s)	Test Result
DH5	2402	2.9200	0.3115	0.4000	Pass
DH3	2402	1.6600	0.2656	0.4000	Pass
DH1	2402	0.3850	0.1232	0.4000	Pass
DH5	2441	2.9200	0.3115	0.4000	Pass
DH3	2441	1.6600	0.2656	0.4000	Pass
DH1	2441	0.3900	0.1248	0.4000	Pass
DH5	2480	2.9200	0.3115	0.4000	Pass
DH3	2480	1.6400	0.2624	0.4000	Pass
DH1	2480	0.3850	0.1232	0.4000	Pass

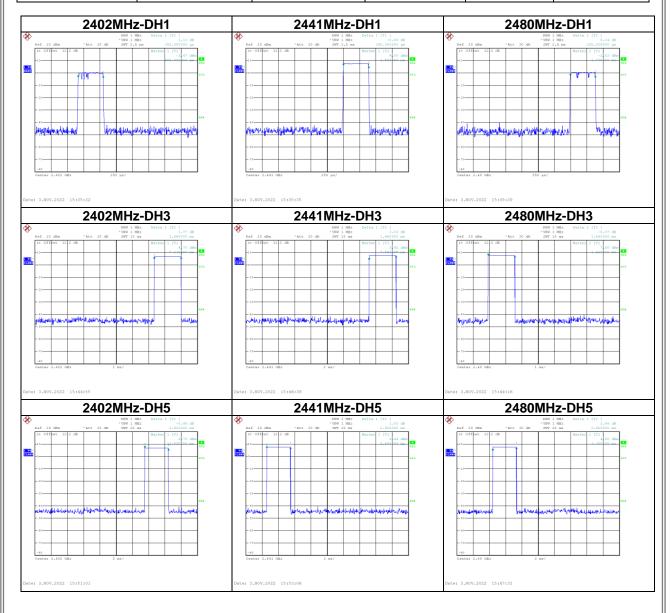







Test Mode: 3Mbps

Data Packet	Frequency (MHz)	Pulse Duration(ms)	Dwell Time(s)	Limits(s)	Test Result
3DH5	2402	2.9200	0.3115	0.4000	Pass
3DH3	2402	1.6600	0.2656	0.4000	Pass
3DH1	2402	0.3850	0.1232	0.4000	Pass
3DH5	2441	2.8800	0.3072	0.4000	Pass
3DH3	2441	1.6600	0.2656	0.4000	Pass
3DH1	2441	0.3850	0.1232	0.4000	Pass
3DH5	2480	2.9200	0.3115	0.4000	Pass
3DH3	2480	1.6400	0.2624	0.4000	Pass
3DH1	2480	0.4000	0.1280	0.4000	Pass

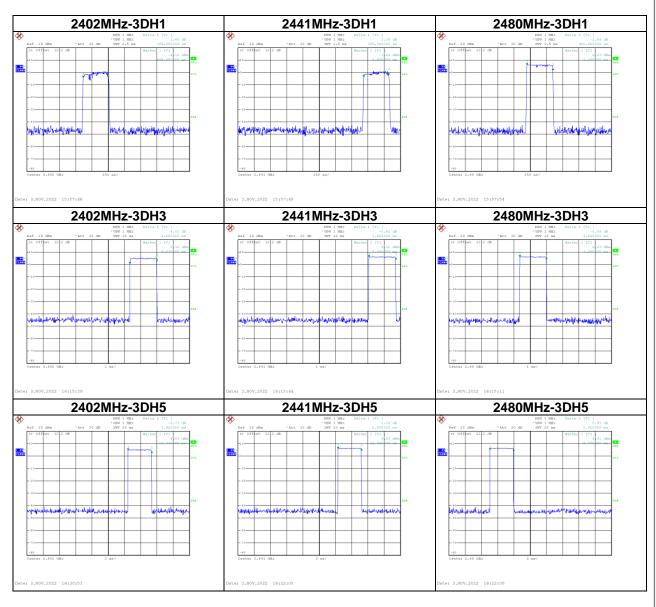



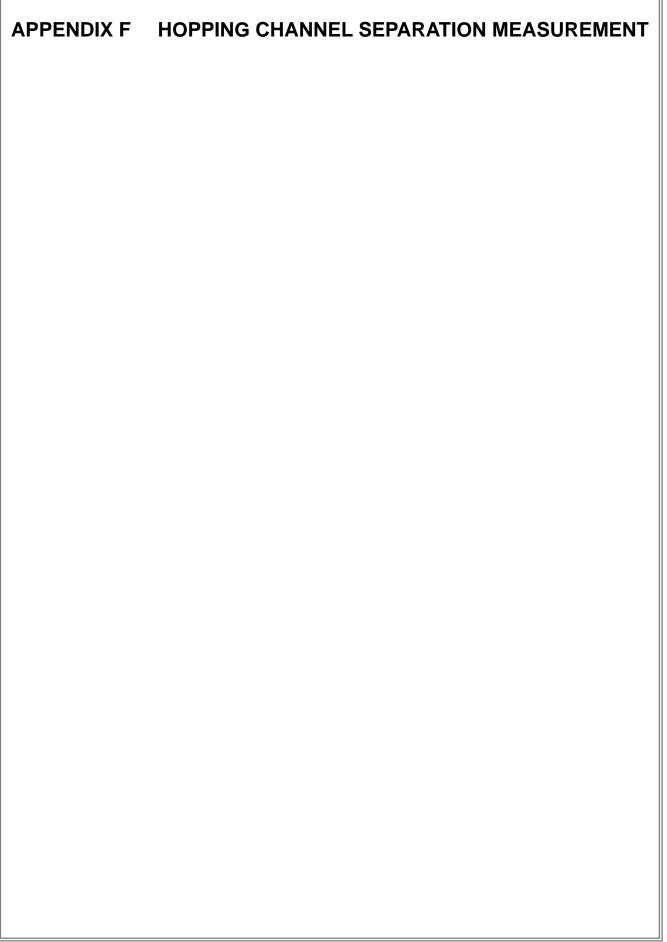


Project No.: 2204H010 Page 60 of 72 Report Version: R04



Test Mode : Hopping on _1Mbps


Frequency (MHz)	Channel Separation (MHz)	2/3 of 20dB Bandwidth (MHz)	Test Result
2402	1.000	0.639	Pass
2441	1.000	0.632	Pass
2480	1.000	0.641	Pass

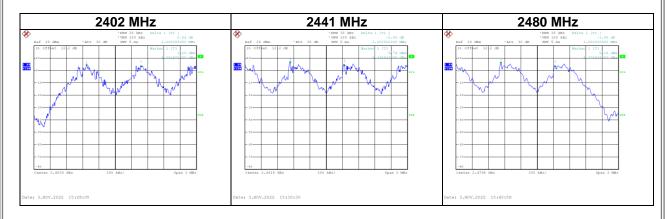



Test Mode : Hopping on _3Mbps

Frequency (MHz)	Channel Separation (MHz)	2/3 of 20dB Bandwidth (MHz)	Test Result
2402	0.994	0.865	Pass
2441	0.992	0.867	Pass
2480	1.002	0.876	Pass

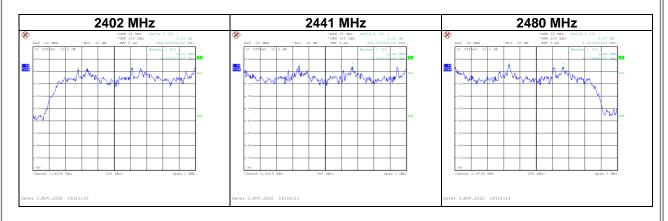


Report No.: BTL-FCCP-1-2204H010 APPENDIX G BANDWIDTH

Project No.: 2204H010 Page 63 of 72 Report Version: R04



Test Mode: 1Mbps

Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied BW (MHz)	Test Result
2402	0.958	0.880	Pass
2441	0.948	0.868	Pass
2480	0.962	0.872	Pass

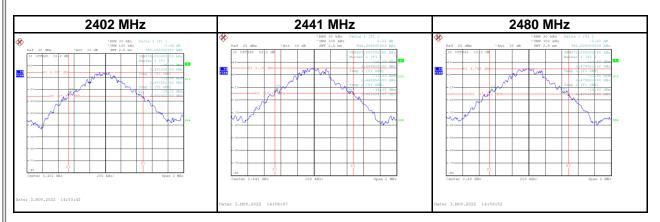




Test Mode: 3Mbps

Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied BW (MHz)	Test Result
2402	1.298	1.212	Pass
2441	1.300	1.200	Pass
2480	1.314	1.212	Pass







APPENDIX H	OUTPUT POWER

Project No.: 2204H010 Page 66 of 72 Report Version: R04



2480

7.46

Report No.: BTL-FCCP-1-2204H010

0.1259

Pass

Test Mode :	1Mbps	Tested	d Date 2	2022/11/3	
Frequency (MHz)	Conducted Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Test Result	
2402	6.95	0.0050	21.00	0.1259	Pass
2441	7.56	0.0057	21.00	0.1259	Pass

Test Mode:	2Mbps	Tested Date	2022/11/3

21.00

0.0056

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	5.71	0.0037	21.00	0.1259	Pass
2441	6.63	0.0046	21.00	0.1259	Pass
2480	6.66	0.0046	21.00	0.1259	Pass

Test Mode :	3Mbps	Tested Date	2022/11/3
-------------	-------	-------------	-----------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	6.03	0.0040	21.00	0.1259	Pass
2441	6.85	0.0048	21.00	0.1259	Pass
2480	6.89	0.0049	21.00	0.1259	Pass

Project No.: 2204H010 Page 67 of 72 Report Version: R04




APPENDIX I	ANTENNA CONDUCTED SPURIOUS EMISSION

Project No.: 2204H010 Page 68 of 72 Report Version: R04






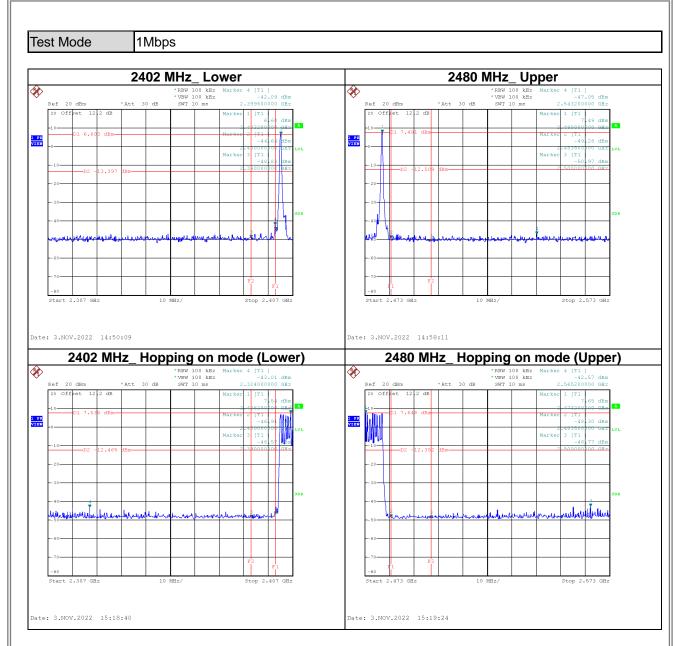






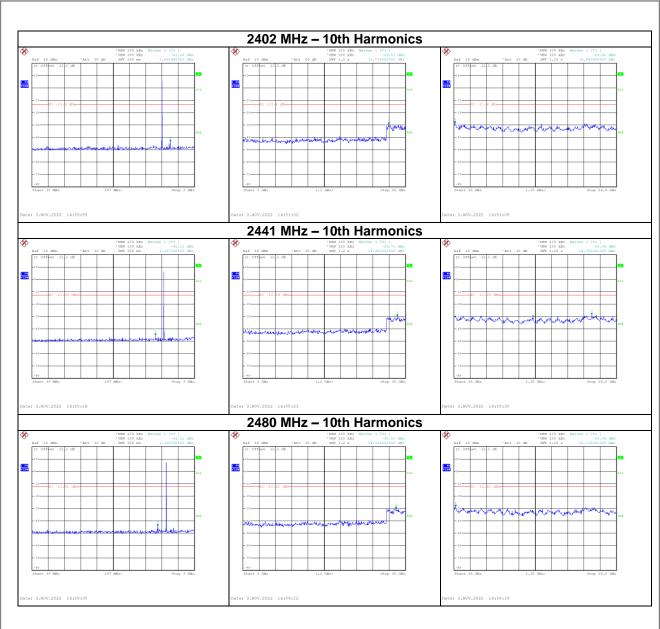






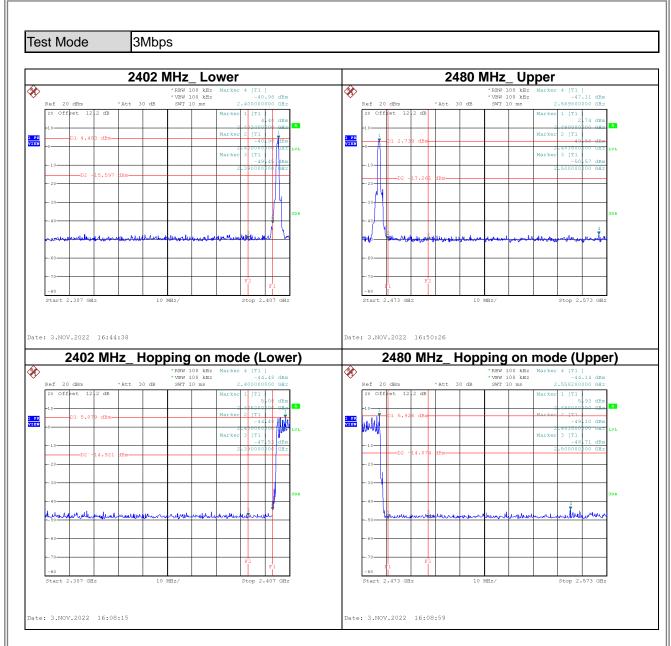





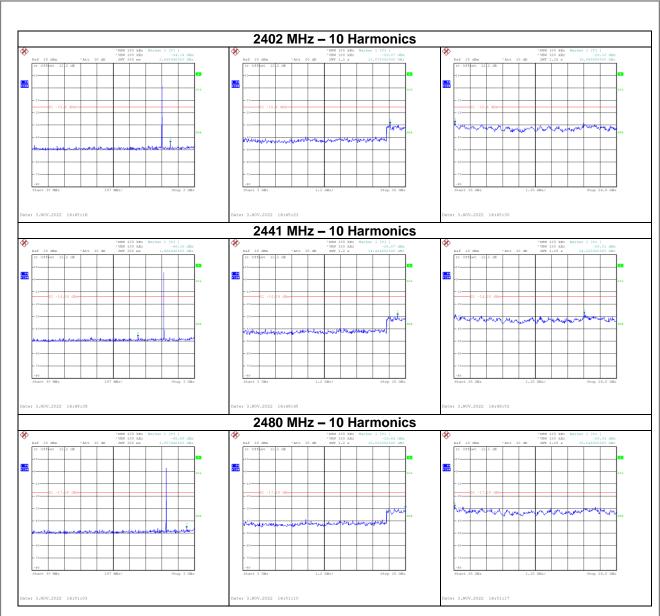

End of Test Report