


Giant Electronics Ltd.

MODEL: T8220		TITLE:		P/N:	
REV.	PRE.BY	DATE	CHK.BY	DATE	APP.BY DATE
A	KELLY ZHU	Sep 2,04	BIRD CHENG	Sep 2,04	JAMES HD Sep 2,04

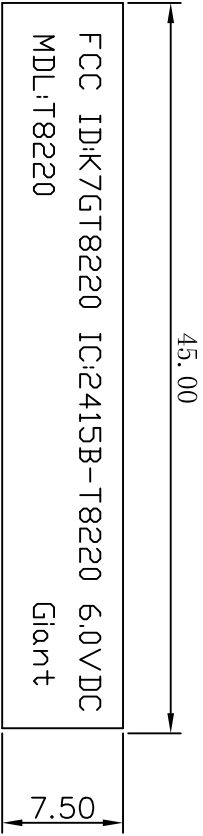

NOTE:

- 1. MATERIAL :BLANK LABEL :KEM-PK7183
- 2. THE MATERIAL AND PRINTING MUST PASS TEST AS MOTOROLA'S QA SPECIFICATION REQUEST AFTER PRINTING.THE DETAIL AS THE FOLLOWING.
 - a> THE RUBBING TEST:INCLUDE USE THE WATER AND PETROLEUM.
 - b> THE HIGH AND LOW TEMP.TEST.
 - c> THE HUMIDITY TEST.

REV	DESCRIPTION	APPROVED BY	PREPARED BY	DATE						
A										
30 6 Model:2111862 FCC ID:K7GT8220 S/N:GMMYY99999 Nexxtech ic:2415B-T8220 03. SEP. 04										
THE FORMAT OF THE SERIAL NUMBER:										
Serien-Nr. GMMYY99999										
<table><tr><td>MONTH OF MANUFACTUE (MM)</td><td>YEAR OF MANUFACTUE (YY)</td></tr><tr><td>IDENTIFIED BY TWO DIGITS</td><td>IDENTIFIED BY ONE ALPHA CHAR.</td></tr><tr><td>JANUARY 01 FEBRUARY 02 TO DECEMBER 12</td><td>2001 01 2002 02 2003 03 2004 04 : AND SO ON</td></tr></table>					MONTH OF MANUFACTUE (MM)	YEAR OF MANUFACTUE (YY)	IDENTIFIED BY TWO DIGITS	IDENTIFIED BY ONE ALPHA CHAR.	JANUARY 01 FEBRUARY 02 TO DECEMBER 12	2001 01 2002 02 2003 03 2004 04 : AND SO ON
MONTH OF MANUFACTUE (MM)	YEAR OF MANUFACTUE (YY)									
IDENTIFIED BY TWO DIGITS	IDENTIFIED BY ONE ALPHA CHAR.									
JANUARY 01 FEBRUARY 02 TO DECEMBER 12	2001 01 2002 02 2003 03 2004 04 : AND SO ON									
GMMYY99999 MM=TWO-DIGIT NUMBER FOR MONTH OF MANUFACTURE YY=ALPHA CHARACTER FOR YEAR OF MANUFACTURE 99999=FIVE DIGIT SEQUENTIAL SERIAL NUMBER STARTING FROM '00001' AND REFER TO UNIT NUMBER										
NOTES: 1.MATERIAL: FACESTOCK: 2.0MIL GLOSS WHITE CAST VINYL NONTOPCOATED ADHESIVE: 0.8MIL #350 HIGH-HODOING ACRYLIC ADHESIVE LINER: 3.2MIL 55# WHITE CENSIFIED KRAFT PAPER, SILICONE COATED 2.PLEASE PROVIDE THE BLANK LABE IN ROLL FORM. 3.THE MATERIALMUST PASS TEST AS THE QA'S SPECIFICATION REQUEST. THE DETAIL AS FOLLOWS: A)THE RUBBING TEST: INCLUDE USE THE WATER AND PETROLEUM. B)THE HIGH AND LOW TEMPERATURE TEST. C)THE HUMIDITY TEST. 4.PRINTING COLOR: BLACK.										
GIANT ELECTRONICS LTD.										
TITLE SERIAL NUMBER LABEL			MODEL T8280							
MATERIAL		DRAWING NO.								
TOLERANCE TABLE FOR UNTOLERANCED DIMENSIONS		PROJECTION 	UNIT MM	SCALE FREE	DRAWN BY SICA HUANG DATE 03. 9. 04					
DIMENSIONS		TOLERANCE		GENERAL DRAFT ANGLE (MAX)		CHECKED BY QL SUN DATE 03. 9. 04				
0.00 TO 25.00		±0.10		GENERAL WALL THICKNESS		APPROVED BY JAMES HO DATE 03. 9. 04				
25.01 TO 50.00		±0.15		DO NOT SCALE DRAWING						
50.01 TO 100.00		±0.20		SIZE A4						
100.00 AND ABOVE		±0.30		SHEET 1 OF 1						
ANGLES		±1.00°								
THE CONTENT OF THIS DOCUMENT IS GIANT INTELLECTUAL PROPERTY AND IS THE PROPERTY OF GIANT. IT IS TO BE TREATED AS STRICTLY CONFIDENTIAL AND IS NOT TO BE DISCLOSED, REPRODUCED, OR USED EXCEPT AS AUTHORIZED IN WRITING BY GIANT ELECTRONCIS LTD. IN CONNECTION WITH THE MANUFACTURE, MAINTENANCE AND USE OF TH E GIANT EQUIPMENT TO WHICH IT PERTAINS. COPYRIGHT @ GIANT ELECTRONICS LTD. ALL RIGHTS RESERVED										

Label Location

The size and content of the label follow the specification in page 1 and 2 of this file.

