



Test Report - FCC PART 90 Booster Class A (B9A) DownLink Prepared For: Fiplex Communications Inc.

Approved for Release By:

Signature: Bruno Clavier

Name & Title: Bruno Clavier, General Manager

Date of Signature

(YYYY-MM-DD): 2021-06-03

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA). This test report relates only to the items tested as identified and is not valid for any subsequent changes or modifications made to the equipment under test.



Table of Contents

1.	CUSTOMER INFORMATION.....	4
1.1	TEST RESULT SUMMARY	4
2.	LOCATION OF TESTING	7
2.1	TEST LABORATORY.....	7
2.2	TESTING WAS PERFORMED, REVIEWED BY	7
3.	TEST SAMPLE(S) (EUT/DUT)	8
3.1	DEFINITIONS	8
3.2	DESCRIPTION OF THE EUT	9
3.3	CONFIGURATION OF EUT	10
3.4	TEST SETUP OF EUT	10
4.	TEST METHODS & APPLICABLE REGULATORY LIMITS.....	11
4.1	TEST METHODS/STANDARDS/GUIDANCE:.....	11
4.2	APPLIED LIMITS AND REGULATORY LIMITS:.....	11
5.	MEASUREMENT UNCERTAINTY.....	11
6.	ENVIRONMENTAL CONDITIONS	11
6.1	TEMPERATURE & HUMIDITY	11
7.	LIST OF TEST EQUIPMENT AND TEST FACILITY.....	12
7.1	LIST OF TEST EQUIPMENT	12
8.	TEST RESULTS	13
8.1	POWER AT THE FINAL AMPLIFIER.....	14
8.2	RF OUTPUT POWER & GAIN.....	15
8.3	OUT-OF-BAND REJECTION.....	18
8.3.1	700 Band, Downlink	19
8.3.2	800 Band, Downlink	20
8.4	BANDWIDTH & EMISSION	21
8.5	INPUT VS OUTPUT SIGNAL COMPARISON	22
8.5.1	12.5 kHz FM.....	23
8.5.2	C4FM	24
8.5.3	H-CPM.....	25
8.5.4	H-DQPSK	26
8.5.5	700 Band 12.5 kHz FM, Downlink, AGC.....	27
8.5.6	700 Band 12.5 kHz FM, Downlink, AGC +3dB.....	28
8.5.7	700 Band 25 kHz FM, Downlink, AGC	29
8.5.8	700 Band 25 kHz FM, Downlink, AGC +3dB.....	30
8.5.9	700 Band C4FM, Downlink, AGC.....	31
8.5.10	700 Band C4FM, Downlink, AGC +3dB	32
8.5.11	700 Band H-CPM, Downlink, AGC	33
8.5.12	700 Band H-CPM, Downlink, AGC +3dB	34



8.5.13	700 Band H-DQPSK, Downlink, AGC.....	35
8.5.14	700 Band H-DQPSK, Downlink, AGC +3dB.....	36
8.5.15	800 Band 12.5 kHz FM, Downlink, AGC.....	37
8.5.16	800 Band 12.5 kHz FM, Downlink, AGC +3dB.....	38
8.5.17	800 Band 25 kHz FM, Downlink, AGC.....	39
8.5.18	800 Band 25 kHz FM, Downlink, AGC +3dB.....	40
8.5.19	800 Band C4FM, Downlink, AGC.....	41
8.5.20	800 Band C4FM, Downlink, AGC +3dB.....	42
8.5.21	800 Band H-CPM, Downlink, AGC.....	43
8.5.22	800 Band H-CPM, Downlink, AGC +3dB.....	44
8.5.23	800 Band H-DQPSK, Downlink, AGC.....	45
8.5.1	800 Band H-DQPSK, Downlink, AGC +3dB.....	46
8.5.2	851.0125 MHz FM, Downlink, AGC.....	47
8.5.3	851.0125 MHz FM, Downlink, AGC+3.....	48
8.5.4	851.0125 MHz C4FM, Downlink, AGC.....	49
8.5.5	851.0125 MHz C4FM, Downlink, AGC+3.....	50
8.5.6	851.0125 MHz H-CPM, Downlink, AGC.....	51
8.5.7	851.0125 MHz H-CPM, Downlink, AGC+3.....	52
8.5.8	851.0125 MHz H-DQPSK, Downlink, AGC.....	53
8.5.9	851.0125 MHz H-DQPSK, Downlink, AGC+3.....	54
8.6	NOISE FIGURE.....	55
8.7	OUT-OF-BAND/OUT-OF-BLOCK EMISSIONS (INTERMODULATION PRODUCTS).....	56
8.7.1	12.5 kHz 700 Band Signal, Downlink, AGC.....	57
8.7.2	12.5 kHz 700 Band Signal, Downlink, AGC +3dB.....	58
8.7.1	25 kHz 700 Band Signal, Downlink, AGC.....	59
8.7.1	25 kHz 700 Band Signal, Downlink, AGC +3dB.....	60
8.7.2	12.5 kHz 800 Band Signal, Downlink, AGC.....	61
8.7.3	12.5 kHz 800 Band Signal, Downlink, AGC +3dB.....	62
8.7.4	25 kHz 800 Band Signal, Downlink, AGC.....	63
8.7.5	25 kHz 800 Band Signal, Downlink, AGC +3dB.....	64
8.8	EMISSION MASK, OUT-OF-BAND.....	65
8.8.1	30 MHz to 1 GHz, 700 Band Downlink.....	66
8.8.2	1 GHz to 10 th Harmonic, 700 Band Downlink.....	67
8.8.3	30 MHz to 1 GHz, 800 Band Downlink.....	68
8.8.4	1 GHz to 10 th Harmonic, 800 Band Downlink.....	69
8.9	SPURIOUS RADIATED EMISSIONS.....	70
8.9.1	700 Downlink, Class A.....	71
8.9.2	800 Downlink, Class A.....	72
8.10	MODULATION CHARACTERISTICS.....	73
8.11	FREQUENCY STABILITY.....	74
8.12	TRANSIENT FREQUENCY BEHAVIOR.....	75
8.13	ADJACENT CHANNEL POWER LIMITS.....	76
9.	PHOTOGRAPHS OF THE EUT.....	77
10.	TEST SETUP PHOTOGRAPHS.....	77
11.	HISTORY OF TEST REPORT CHANGES.....	77



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

1. Customer Information

Applicant: Fiplex Communications Inc.
Address: 2101 NW 79th Ave.
Miami FL 33122

1.1 Test Result Summary

The following test procedure and guidance were used for measuring FCC PART 90 (PRIVATE LAND MOBILE RADIO SERVICES) known as Licensed Land Mobile; ANSI C63.26-2015 and FCC KDB 935210 D05 v01r04 Industrial Signal Boosters. Full test results are available in this report.

No additions to the test methods were needed. There were no deviations, or exclusions from the test methods. No test results are from external providers or from the customer. The test results relate only to the items tested. Timco does not offer opinions and interpretations, only a pass/fail statement.

The Following is for Test item FCC ID: P3TDH7S-7A

Applicable Clauses from Part 2		
FCC Part 2 Clauses	Description of the requirements	Result: (Pass, Fail, N/A)
2.202	Bandwidth & Emission	Pass
2.1033 (c)(8)	Power at the Final Amplifier	Pass
2.1046 (a)	RF Output Power	Pass
2.1047	Modulation characteristics	n/a
2.1049	Occupied Bandwidth	Pass
2.1051	Spurious emissions at antenna terminals	Pass
2.1053	Field strength of spurious radiation	Pass
2.1055	Frequency stability	n/a



Applicable Clauses from Part 90 Subpart I		
FCC Part 90 Clauses	Description of the requirements	Result: (Pass, Fail, N/A)
90.205	Transmitter Power	Pass
90.207	Types of Emissions	Pass
90.209	Bandwidth limitations	Pass
90.210	Emission masks, In-band	Pass
90.210	Emission masks, Out-of-band	Pass
90.213	Frequency stability	n/a
90.214	Transient Frequency Behavior	n/a
90.219 (d)(6)(i)	ERP of intermodulation products	n/a ¹
90.219 (d)(6)(ii)	ERP of noise within the passband	n/a ¹
90.219 (d)(6)(iii)	ERP of noise on spectrum < 1 MHz outside of the passband	n/a ¹
90.219 (d)(3)(i), (e)(1)	ERP of Radiated Power	n/a ¹
90.219 (e)(2)	Noise figure	Pass
90.219 (e)(3)	Spurious emissions	Pass
90.219 (e)(4)(i)(ii)(iii)	Retransmitted Signals	Pass
90.221	Adjacent channel power limits	Pass

Note 1: Requirements in Part 90.219 (d) apply at deployment of this EUT, therefore are not applicable at certification.

KDB 935210 D05 v01r04		
FCC KDB 935210 D05 Clauses	Description of the requirements	Result: (Pass, Fail, N/A)
4.1	Test Signals for PLMRS (Input Signals)	Pass
4.2	AGC Threshold	Reported
4.3	Out-of-Band Rejection	Reported
4.4	Input-versus-Output Signal Comparison	Pass
4.5	Output Power	Pass
4.5	Amplifier/Booster Gain (optional)	Reported
4.6	Noise Figure	Pass
4.7.2	Out-of-band/Out-of-block Conducted Emissions (Intermodulation Products)	Pass
4.7.3	EUT Spurious Conducted Emissions	Pass
4.8	Frequency Stability	n/a
4.9	Spurious Radiated Emissions	Pass



KDB 484596 D01 v01		
FCC KDB 935210 D05 Clauses	Description of the requirements	Result: (Pass, Fail, N/A)
3 a	Introduction	Reported
3 b	Explain the Differences	Reported
3 c	Spot-check Verification Data	Pass
3 d	Reference Section	Reported

Introduction

Equipment classes B9A and B9B are not allowed to be filed under the same FCC ID. However, FCC ID P3TDH7S-7A is electrically identical to FCC ID P3TDH7S-7B. The EUT uses software to limit the passband, converting the EUT from a Class B Industrial Signal Booster into a Class A Industrial Signal Booster. The test data is valid to be re-used due to the Class B operation of the EUT being worst-case in all aspects. The Class A operation represented in this filing was equal or more compliant with FCC Part 90 in all respects. Therefore all testing is to be considered identical, and has been re-used following the guidelines of KDB 484596.

Explain the Differences

FCC ID P3TDH7S-7A is electrically identical to FCC ID P3TDH7S-7B and has no difference in hardware. The EUT uses software to limit the passband from widths equal to or greater than 75 kHz to widths less than 75 kHz.

Spot-Check Verification Data

Please see sections Out-of-Band Rejection and Spurious Radiated Emissions in this report for Spot-Check data.

Reference Section

All original test data is from FCC ID P3TDH7S-7B, test report "TR_2046-21_FCC_PT90_Booster Class B_DL_1"



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

2. Location of Testing

2.1 Test Laboratory

Timco Engineering Inc. is a subsidiary of Industrial Inspection & Analysis, Inc. ("IIA").

Testing was performed at Timco's permanent laboratory located at 849 NW State Road 45, Newberry, Florida 32669

FCC test firm # 578780

FCC Designation # US1070

FCC site registration is under A2LA certificate # 0955.01

ISED Canada test site registration # 2056A

EU Notified Body # 1177

For all designations see A2LA scope # 0955.01

2.2 Testing was performed, reviewed by

Dates of Testing: April 28, 2021 – May 19, 2021

Signature:

Sr. EMC Engineer
EMC-003838-NE



Name & Title: Tim Royer, EMC Engineer

Date of Signature

(YYYY-MM-DD): 2021-06-03



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

3. Test Sample(s) (EUT/DUT)

The test sample was received: April 28, 2021

3.1 Definitions

Signal booster: A device or system that automatically receives, amplifies, and retransmits signals from wireless stations into and out of building interiors, tunnels, shielded outdoor areas and other locations where these signals would otherwise be too weak for reliable communications. Signal booster systems may contain both Class A and Class B signal boosters as components.

Class A signal booster: A signal booster designed to retransmit signals on one or more specific channels. A signal booster is deemed to be a Class A signal booster if none of its passbands exceed 75 kHz.

Class B signal booster: A signal booster designed to retransmit any signals within a wide frequency band. A signal booster is deemed to be a Class B signal booster if it has a passband that exceeds 75 kHz.



3.2 Description of the EUT

A description as well as unambiguous identification of the EUT(s) tested. Where more than one sample is required for technical reasons (such as the use of connected units for the purpose of conducted output power testing where the product units will have integral antennas), each specific test shall identify which unit was tested.

Identification	
FCC ID:	P3TDH7S-7A
Brief Description	PSC DAS Enterprise HP - Master Unit - Class A (Downlink)
Type of Modular	n/a
Model(s) #	DH7S
Firmware Version #	1.4
Software Version #	1.0.92.1
Serial Number	20213149FU

Technical Characteristics	
Technology	Bi-Directional Industrial Signal Booster
Frequency Range	758 - 805 MHz; and 806 - 869 MHz
RF O/P Power (Max.)	DL: 37 dBm (5 W); UL: 24 dBm (0.25 W)
Modulation	n/a
Bandwidth & Emission Class	11K3F3E, 8K10F1D, 8K10F1E, 8K10F1W, 9K80F1D, 9K80F1E, 9K80D7W, 5M00G7D, 10M0G7D, 5M00D7W, 10M0D7W, 5M00W7D, 10M0W7D, 5M00F9W, 10M0F9W
Number of Channels	Variable.
Duty Cycle	100%
Antenna Connector	N
Voltage Rating (AC or Batt.)	120 V AC or 28 V DC (internally)

Antenna Characteristics				
Antenna Name	Frequency Range	Antenna Type	Dimensions	Antenna Gain
n/a	n/a	n/a	n/a	n/a

Note: This EUT does not include antenna(s).



3.3 Configuration of EUT

Test Modes		
Band	Link Direction	Test Frequencies
758 – 775 MHz	Downlink	758.0125 MHz
		766.0000 MHz
		774.9875 MHz
851 – 869 MHz	Downlink	851.0125 MHz
		857 MHz
		868.9875 MHz

Operating conditions during Testing:

No other modifications of the device under test (including firmware, specific software settings, and input/output signal levels to the EUT) were made.

Peripherals used during Testing:

A laptop was used to control the EUT.

3.4 Test Setup of EUT

Equipment, antenna, and cable arrangement. The setup of the equipment and cable or wire placement on the test site that produces the highest radiated and the highest ac power line conducted emissions shall be shown clearly and described. Information on the orientation of portable equipment during testing shall be included. Drawings or photographs may be used for this purpose.

Test Setups are included in the test report.



4. Test methods & Applicable Regulatory Limits

4.1 Test methods/Standards/Guidance:

Test procedures and guidance for measuring Licensed Part 90 Licensed device:

- 1) ANSI C63.26-2015
- 2) FCC KDB 935210 D05 v01r04 Industrial Signal Boosters

4.2 Applied Limits and Regulatory Limits:

- 1) FCC CFR 47 Part 90 Subpart I, 90.219

5. Measurement Uncertainty

Parameter	Uncertainty (dB)
Conducted Emissions	± 3.14 dB
Radiated Emissions (9kHz – 30 MHz)	± 3.08 dB
Radiated Emissions (30 – 200 MHz)	± 2.16 dB
Radiated Emissions (200 – 1000 MHz)	± 2.15 dB
Radiated Emissions (1 GHz – 18 GHz)	± 2.14 dB
Radiated Emissions (18 GHz – 40 GHz)	± 2.31 dB
Note: The uncertainties provided in this table represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of K=2.	

6. Environmental Conditions

6.1 Temperature & Humidity

Measurements performed at the test site did not exceed the following:

Temperature	23 C +/- 5%
Humidity	55% +/- 5%
Note: Specific environmental conditions that are applicable to a specific test are available in the test result section.	



7. List of Test Equipment and Test Facility

The test equipment used identified by type, manufacturer, serial number, or other identification and the date on which the next calibration or service check is due.

Description of the firmware or software used to operate EUT for testing purposes.

A complete list of all test equipment used shall be included with the test report. The manufacturer's model and serial numbers, and date of last calibration, and calibration interval shall be included. Measurement cable loss, measuring instrument bandwidth and detector function, video bandwidth, if appropriate, and antenna factors shall also be included where applicable.

7.1 List of Test Equipment

Device	Manufacturer	Model	SN #	Current Cal	Cal Due
Signal Generator R&S SMU-200A	Rohde & Schwarz	SMU200A	103195	4/23/19	4/22/2022
Sweep/Signal Generator	Anritsu	68369B	985112	1/19/21	1/19/2024
Digital Multimeter	Fluke	77	35053830	9/9/20	9/9/2023
R&S 18 GHz USB Peak Power Sensor	Rohde & Schwarz	NRP-Z85	1411.7501.02-102085-VV	2/4/19	2/3/2022
Active Loop	ETS-Lindgren	6502	00062529	10/20/20	10/20/2023
Biconical 1057	Eaton	94455-1	1057	10/16/20	10/16/2023
Log-Periodic 1243	Eaton	96005	1243	5/4/21	5/3/2024
Double-Ridged Horn/ETS Horn 1	ETS-Lindgren	3117	00035923	2/25/20	2/24/2023
CHAMBER	Panashield	3M	N/A	3/12/19	3/11/2022
Frequency Counter Small	HP	5385A	3242A07460	9/9/20	9/9/2023
Type K J Thermometer	Martel	303	080504494	1/18/20	1/17/2023
EMI Test Receiver R&S ESU 40	Rohde & Schwarz	ESU 40	100320	8/28/18	8/27/2021

Device	Manufacturer	Model	SN #	Verified On
Splitter/Combiner 1-1000MHz	Mini-Circuits	ZFSC-4-1-BNC+	U115700825	10/21/20
Splitter/Combiner 1-1000MHz	Mini-Circuits	ZFSC-4-1-BNC+	U115700826	10/21/20

Software	Author	Version
ESU Firmware	Rohde & Schwarz	4.43 SP3; BIOS v5.1-24-3
RSCommander	Rohde & Schwarz	1.6.4
Field Strength	Timco	v4.10.7.0

**The EMI Test Receiver R&S ESU 40 used to take plots for this report the date was not setup within the equipment. All plots below were taken in April and May of 2021. **



8. Test Results

The results of the test are usually indicated in the form of tables, spectrum analyzer plots, charts, sample calculations, as appropriate for each test procedure.

A description and/or a block diagram of the test setup is usually provided.

The measurement results, along with the appropriate limits for comparison, may be presented in tabular or graphical form. In addition, any variation in the measurement environment may be reported if applicable (e.g., a significant change of temperature that could affect the cable loss and amplifier response).

Unless noted otherwise in the referenced standard, the measurements of **ac power-line conducted emissions and conducted power output** will be reported in units of dB μ V. Unless noted otherwise in the referenced standard, the measurements of **radiated emissions** will be reported in units of decibels, referenced to one microvolt per meter (dB μ V/m) for electric fields, or to one ampere per meter (dBA/m) for magnetic fields, at the distance specified in the appropriate standards or requirements. The measurements of antenna-conducted power for receivers may be reported in units of dB μ V if the impedance of the measuring instrument is also reported. Otherwise, antenna-conducted power will be reported in units of decibels referenced to one milliwatt (dBm). All formulas for data conversions and conversion factors, if used, will be included in this measurement report.



8.1 Power at the Final Amplifier

Limits from FCC Part 2.1033 (c)(8).

Referenced from test report "TR_2046-21_FCC_PT90_Booster Class B_DL_1".

No method of measurement is specified. The result has been calculated based on all available information.


Test Results		
EUT Operating Voltage (V)	EUT Current (A)	Power at the Final Amplifier
28 V DC	3.33	93 W



8.2 RF Output Power & Gain

Referenced from test report "TR_2046-21_FCC_PT90_Booster Class B_DL_1".

Limits from FCC Parts 2.1046(a), and 90.205 and test procedure from ANSI C63.26-2015 and FCC KDB 935210 D05 v01r04 Industrial Signal Boosters.

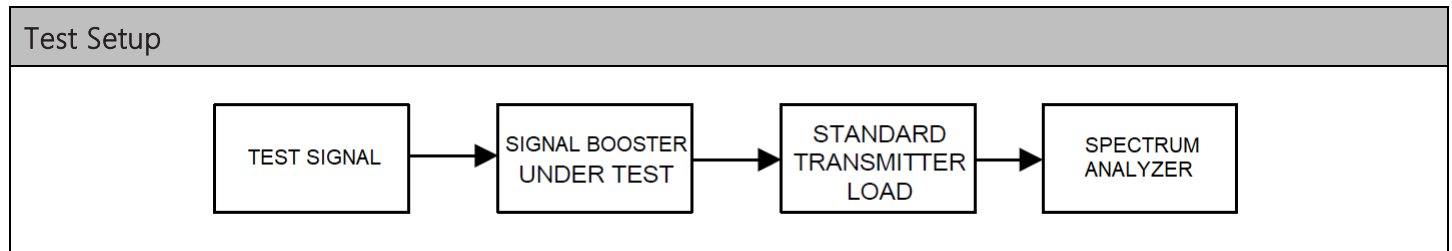

Test Results, Power Output		
Link Direction	Max Power Output (dBm)	Max Power Output (W)
Downlink	36.66	4.63



700 Band Gain

Test Results, Gain					
Link Direction	Tuned Frequency (MHz)	Input Level	Power Input (dBm)	Power Output (dBm)	Gain (dB)
Downlink	758.0125	AGC	-44.6	32.79	77.39
		AGC+3	-41.6	32.79	74.39
		Maximum	0	32.42	32.42
	766.0	AGC	-46.7	32.27	78.97
		AGC+3	-43.7	32.27	75.97
		Maximum	0	32.22	32.22
	774.9875	AGC	-43.1	33.69	76.79
		AGC+3	-40.1	33.69	73.79
		Maximum	0	33.66	33.66



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com


800 Band Gain

Test Results, Gain					
Link Direction	Tuned Frequency (MHz)	Input Level	Power Input (dBm)	Power Output (dBm)	Gain (dB)
Downlink	851.0125	AGC	-44	32.67	76.67
		AGC+3	-41.61	32.67	73.67
		Maximum	0	32.18	32.18
	857	AGC	-43	32.68	75.68
		AGC+3	-43	32.68	72.68
		Maximum	0	32.62	32.62
	868.9875	AGC	-42.6	33.54	76.14
		AGC+3	-42.6	33.54	73.14
		Maximum	0	33.5	33.5



8.3 Out-of-band Rejection

Limits and test method from FCC KDB 935210 D05 v01r04 Industrial Signal Boosters.

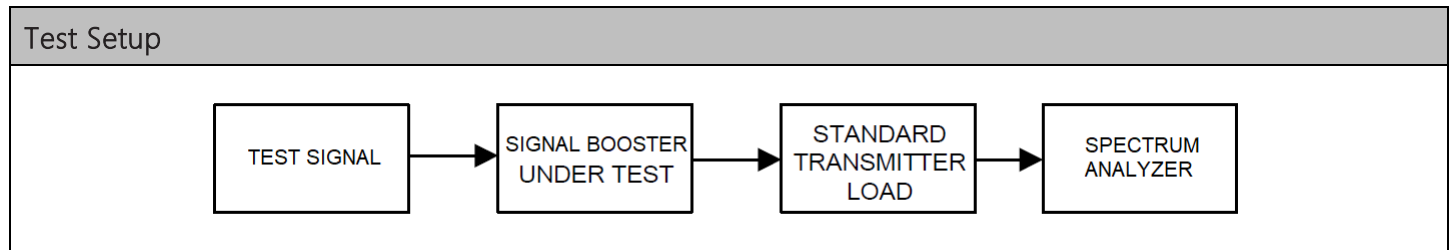


Test Results, Out-of-band Rejection and Class of Operation			
Operating Band	Link Direction	Passband (kHz)	Class of Operation
758 – 775 MHz	Downlink	< 75 kHz	Class A
851 – 869 MHz	Downlink	< 75 kHz	Class A



Out-of-band Rejection, Spectrum Plots


8.3.1 700 Band, Downlink

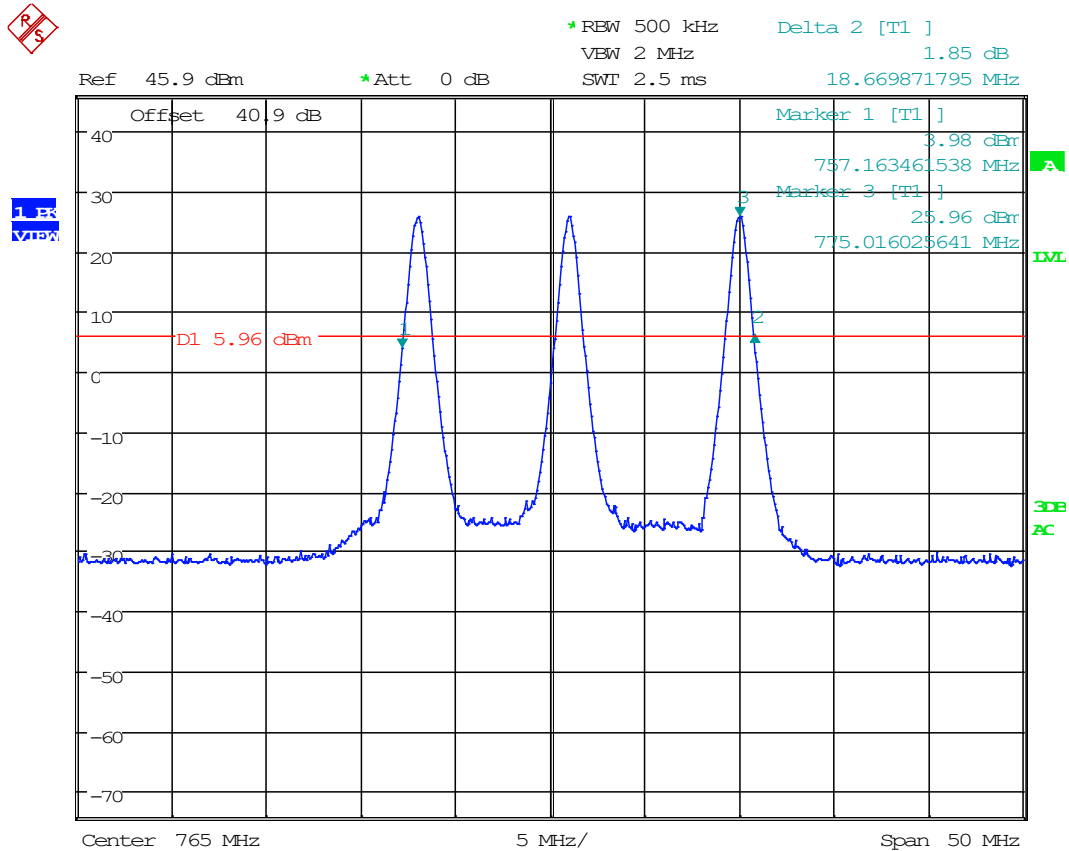

Date: 2.JAN.2003 03:17:55



8.3.2 800 Band, Downlink

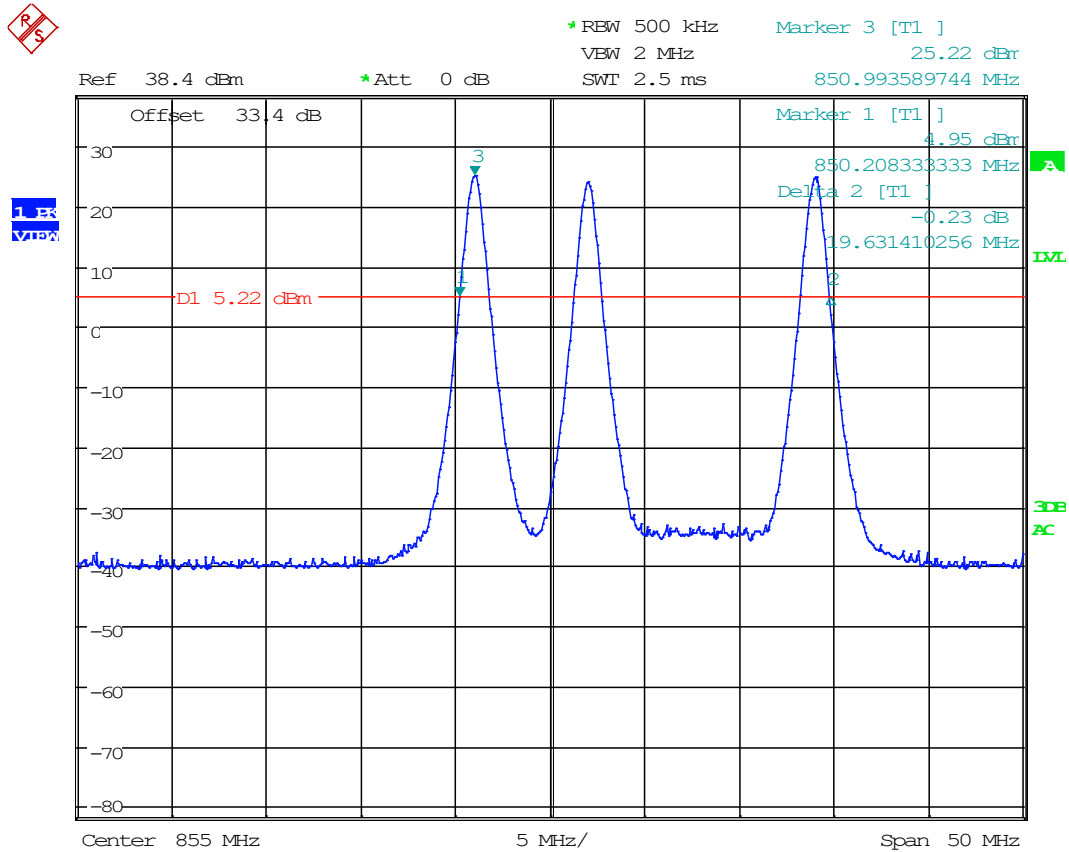

Date: 1.JAN.2003 01:10:16



8.4 Bandwidth & Emission

Referenced from test report "TR_2046-21_FCC_PT90_Booster Class B_DL_1".

Limits from FCC Parts 90.209 and FCC KDB 935210 D05 v01r04 Industrial Signal Boosters.

Authorized Bandwidth		
Rule Part	Operating Range	Authorized Bandwidth
Part 90	758 – 775 MHz	Unspecified.
Part 90	806 – 809 MHz, 851 – 854 MHz	20 kHz
Part 90	809 – 817 MHz, 854 – 862 MHz	20 kHz, 11.25 kHz
Part 90	817 – 824 MHz, 862 – 869 MHz	20 kHz


Applicable Input Signals		
Signal	Occupied Bandwidth (kHz)	Representative Emission Designator(s)
CW	n/a	n/a
12.5 kHz FM	11.3	11K3F3E
C4FM (P25 Phase I)	8.1	8K10F1D, 8K10F1E
HCPM (P25 Phase II SU)	8.1	8K10F1W
HDQPSK (P25 Phase II BS)	9.8	9K80F1D, 9K80F1E, 9K80D7W
AWGN	4230.77	5M00G7D, 10M0G7D, 5M00D7W, 10M0D7W, 5M00W7D, 10M0W7D, 5M00F9W, 10M0F9W



8.5 Input VS Output Signal Comparison

Referenced from test report "TR_2046-21_FCC_PT90_Booster Class B_DL_1".


Limits from FCC Parts 90.210 and test procedure from ANSI C63.26-2015 and FCC KDB 935210 D05 v01r04 Industrial Signal Boosters.

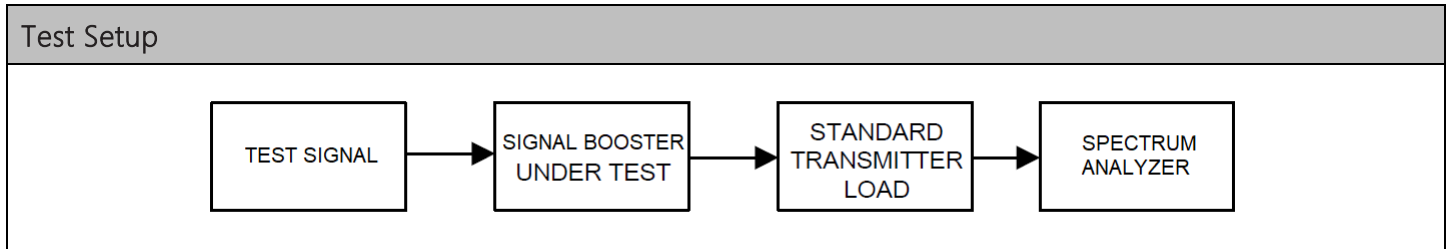




Input VS Output, Input Spectrum Plots

8.5.1 12.5 kHz FM

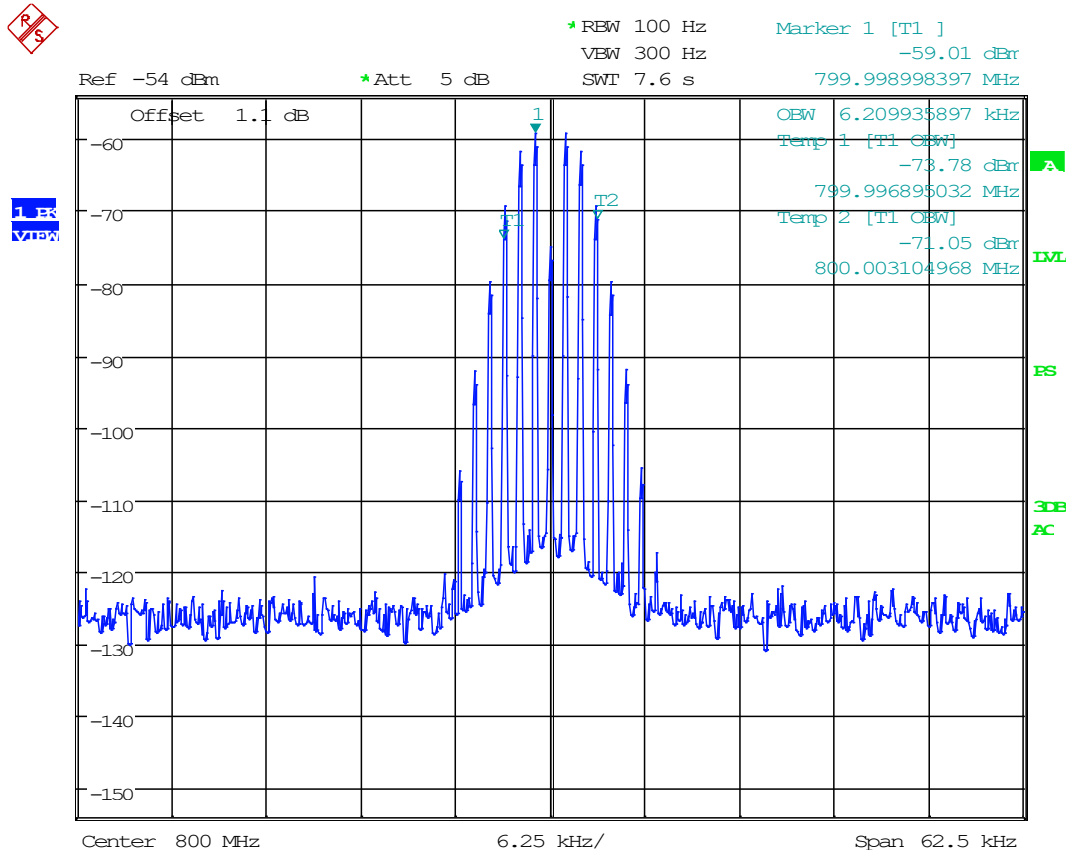


Date: 30.JAN.2019 14:19:45

8.5.2 C4FM

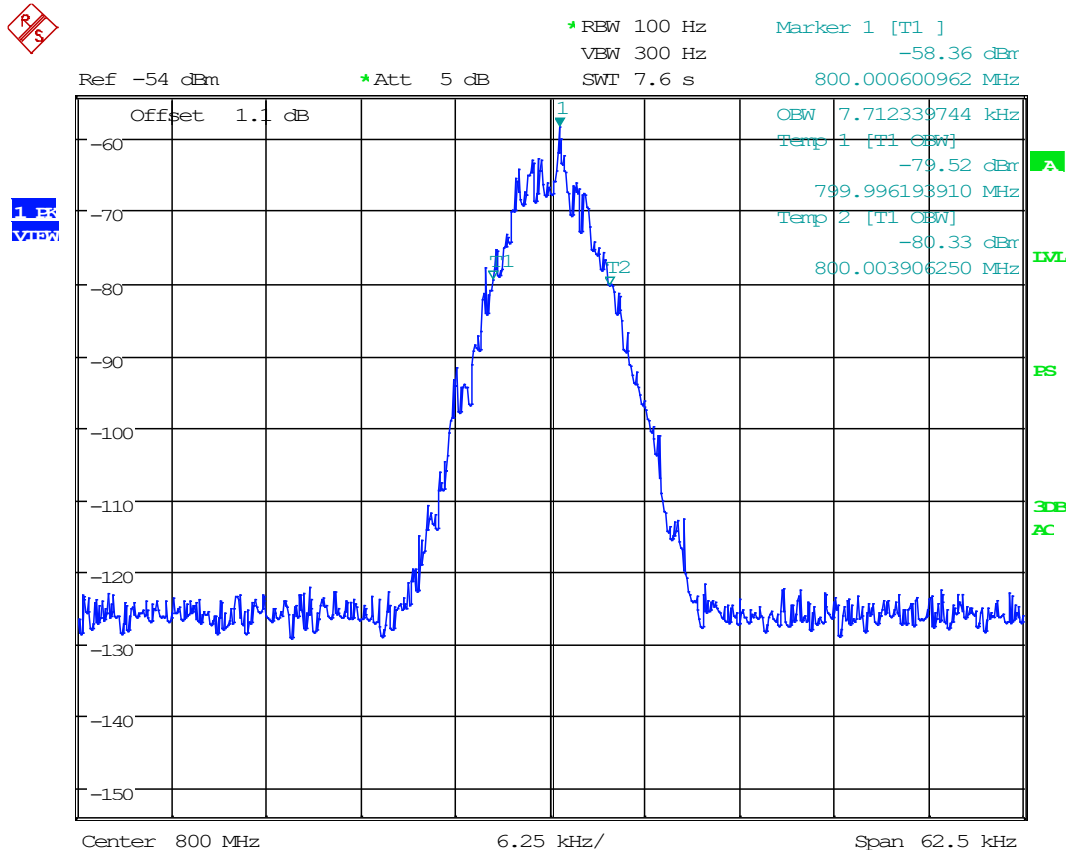


Date: 30.JAN.2019 14:28:58


8.5.3 H-CPM

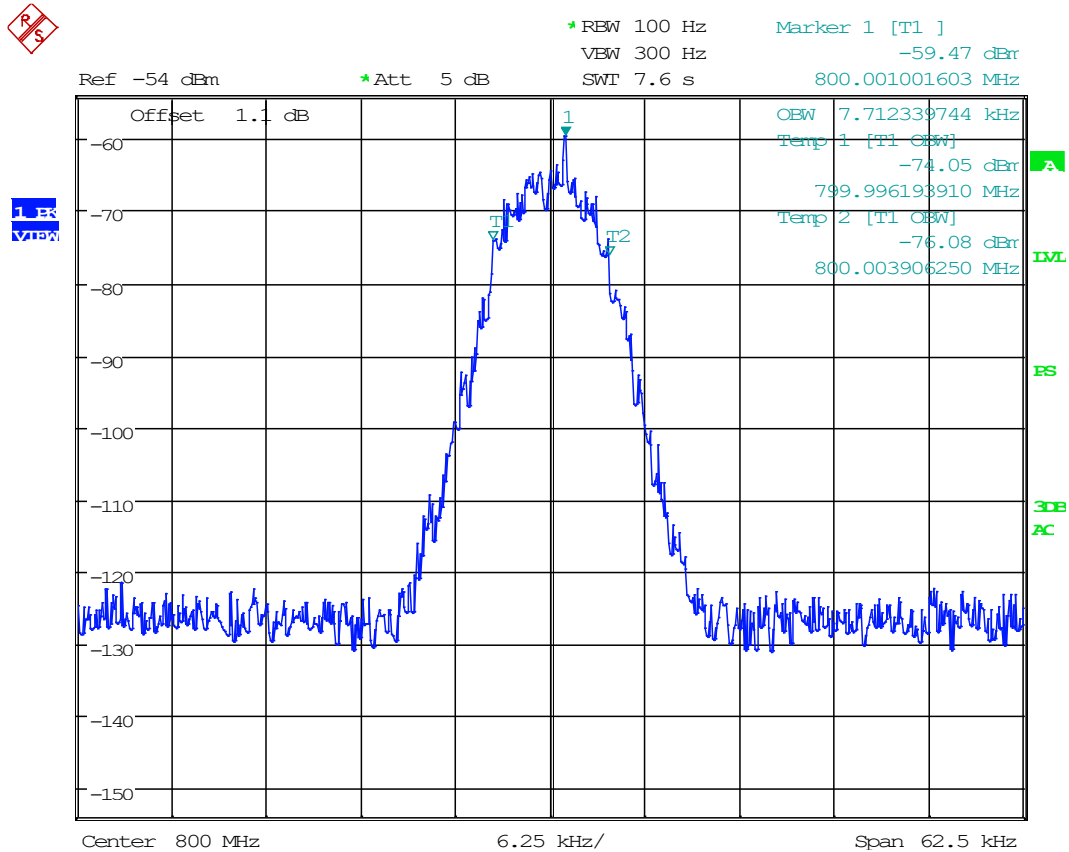

Date: 30.JAN.2019 14:30:47

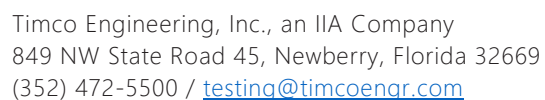


8.5.5 700 Band 12.5 kHz FM, Downlink, AGC

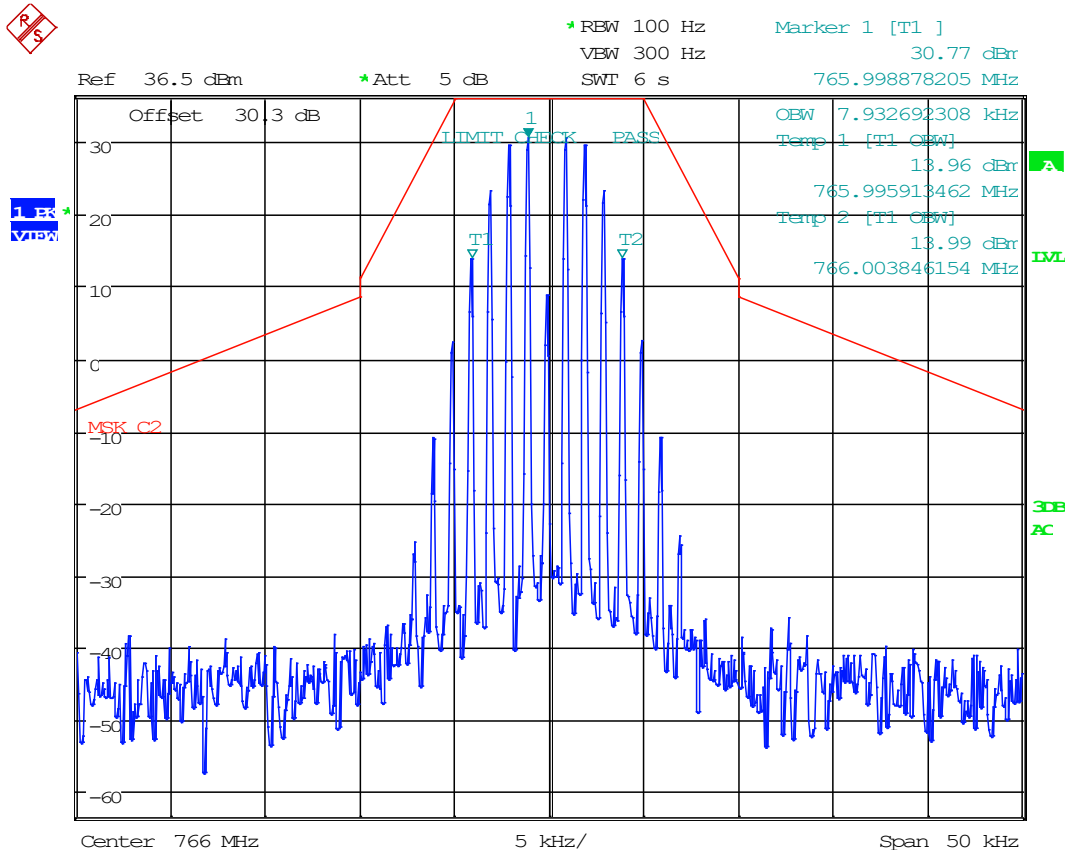

Date: 28.JAN.2003 07:14:49


8.5.6 700 Band 12.5 kHz FM, Downlink, AGC +3dB

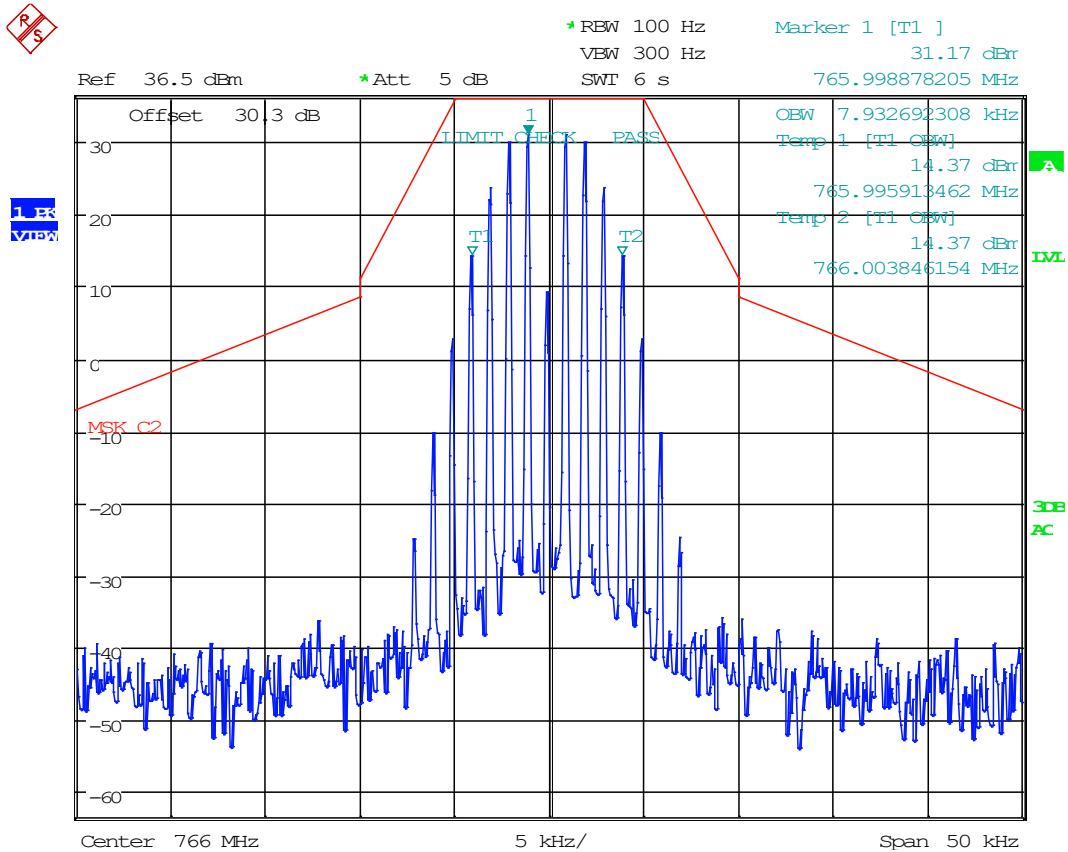

Date: 28.JAN.2003 07:15:39




8.5.7 700 Band 25 kHz FM, Downlink, AGC

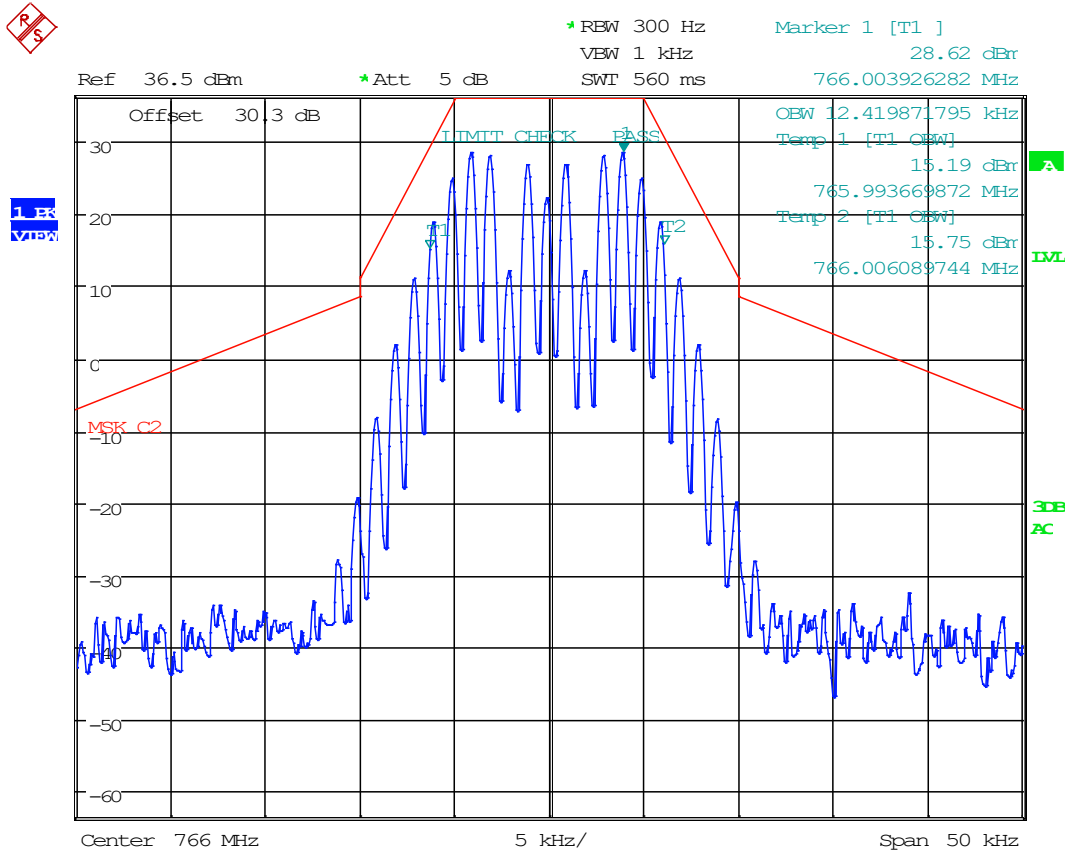

Date: 28.JAN.2003 07:19:06


8.5.8 700 Band 25 kHz FM, Downlink, AGC +3dB

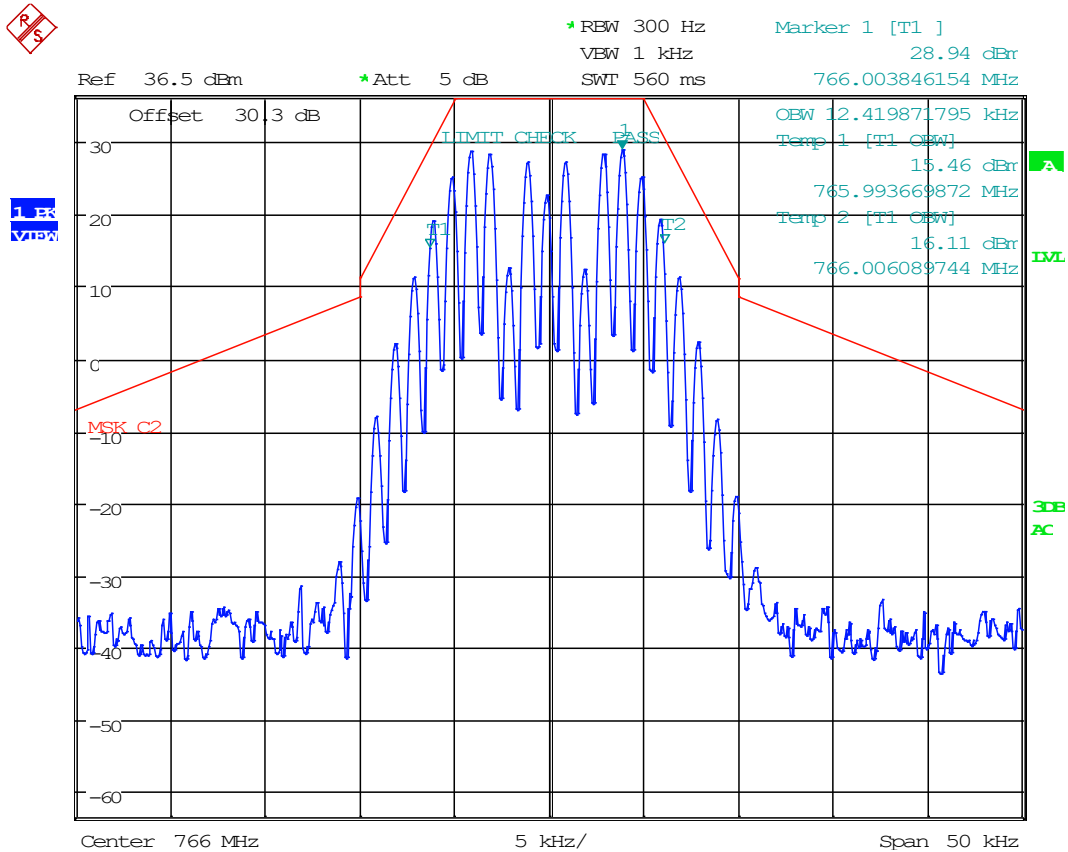

Date: 28.JAN.2003 07:18:26




8.5.9 700 Band C4FM, Downlink, AGC

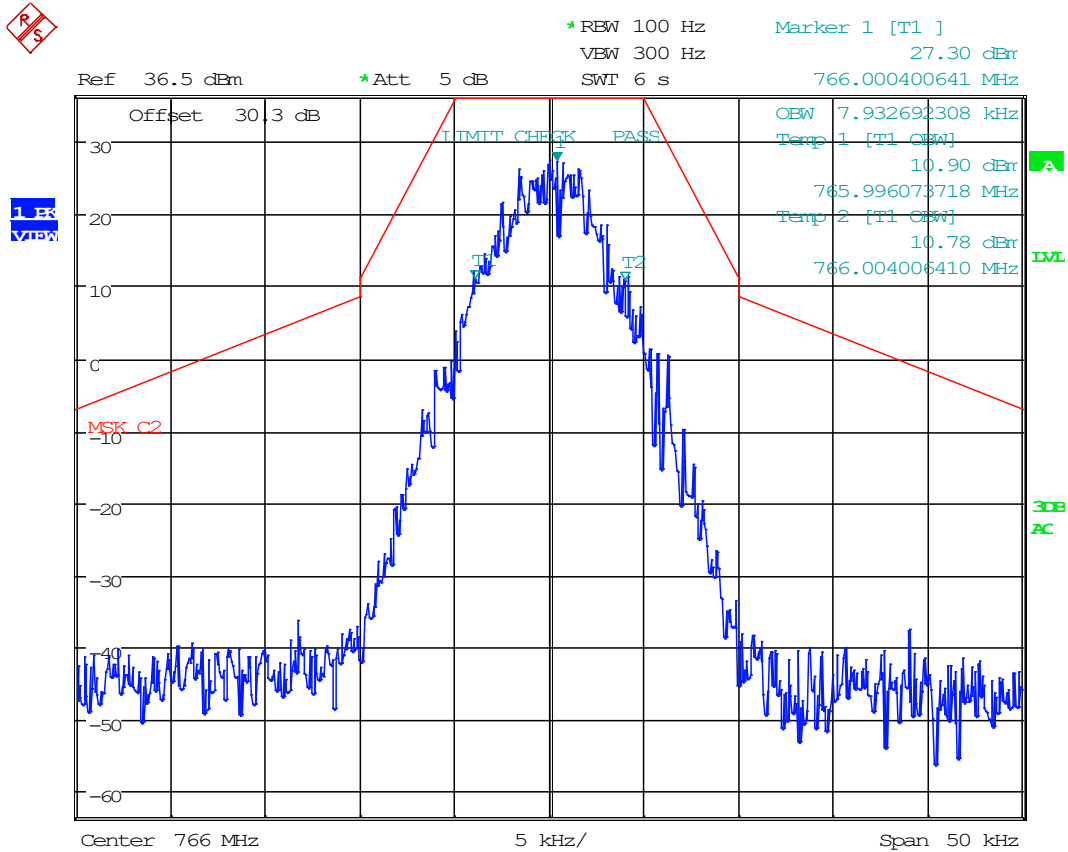


Date: 28.JAN.2003 07:16:15

8.5.10 700 Band C4FM, Downlink, AGC +3dB

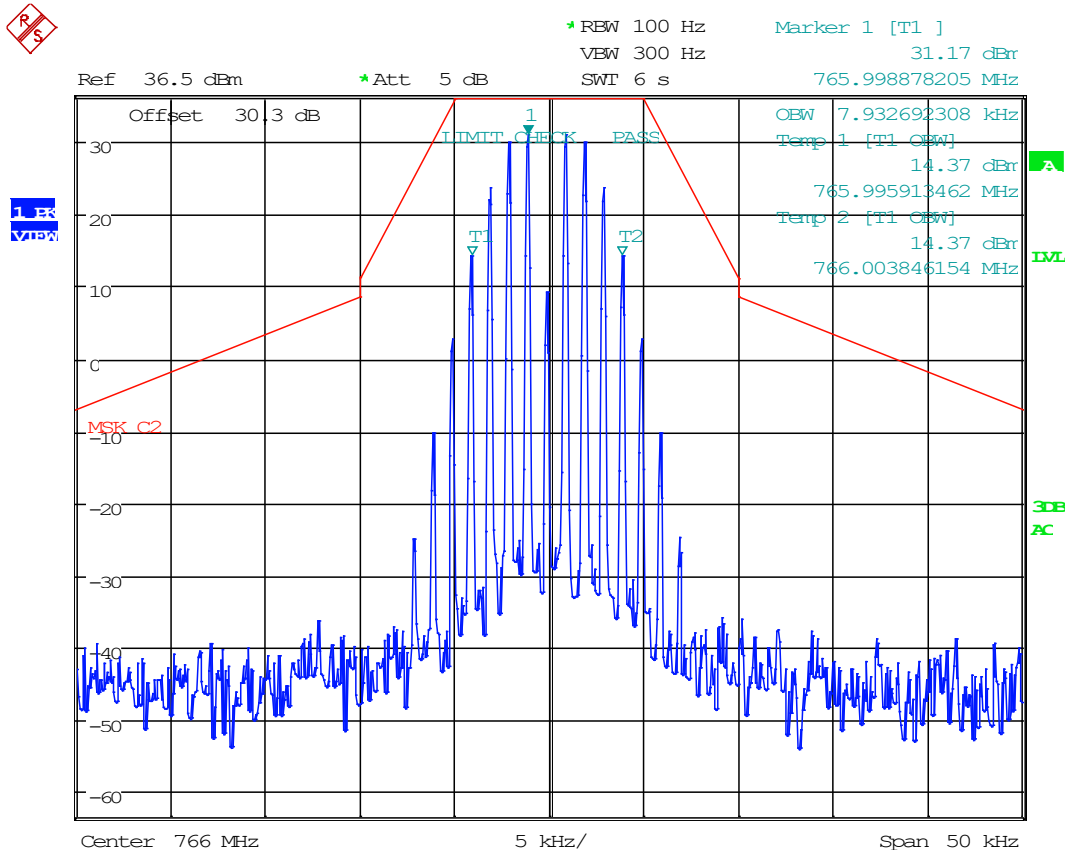


Date: 28.JAN.2003 07:15:39

8.5.11 700 Band H-CPM, Downlink, AGC

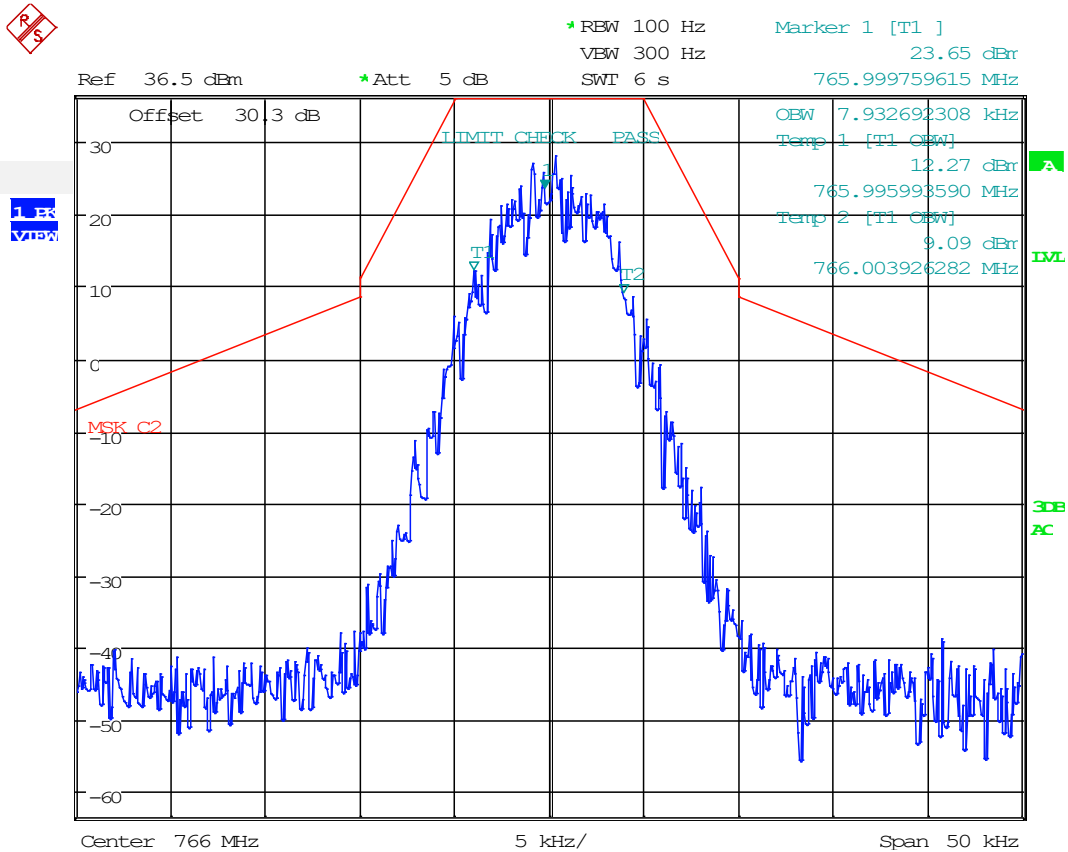


Date: 28.JAN.2003 07:17:10

8.5.12 700 Band H-CPM, Downlink, AGC +3dB

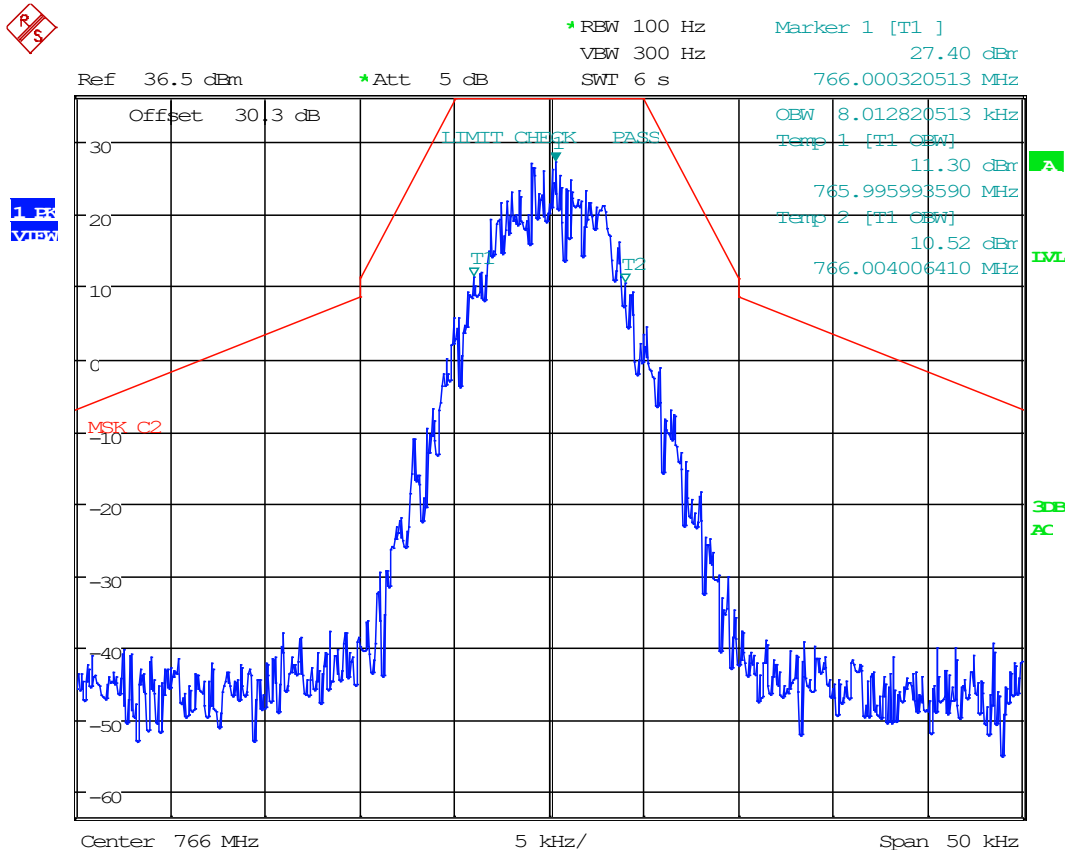


Date: 28.JAN.2003 07:16:54

8.5.13 700 Band H-DQPSK, Downlink, AGC

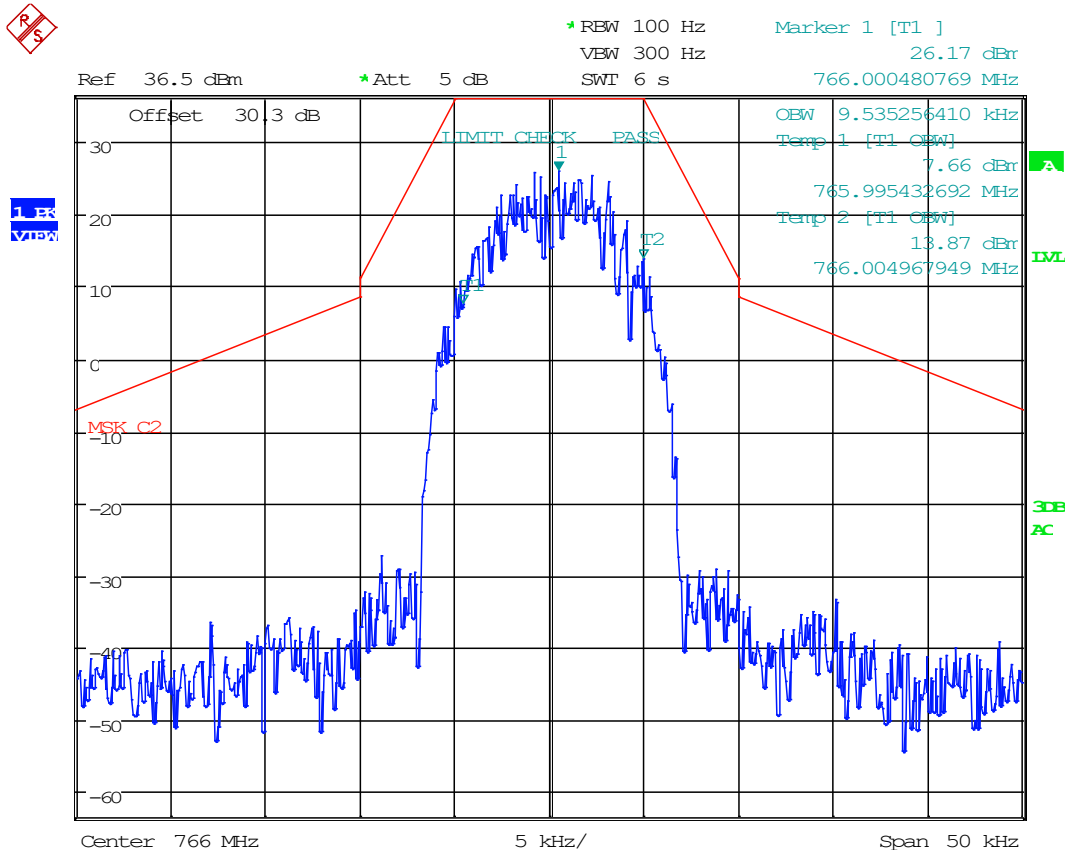


Date: 28.JAN.2003 07:17:26

8.5.14 700 Band H-DQPSK, Downlink, AGC +3dB

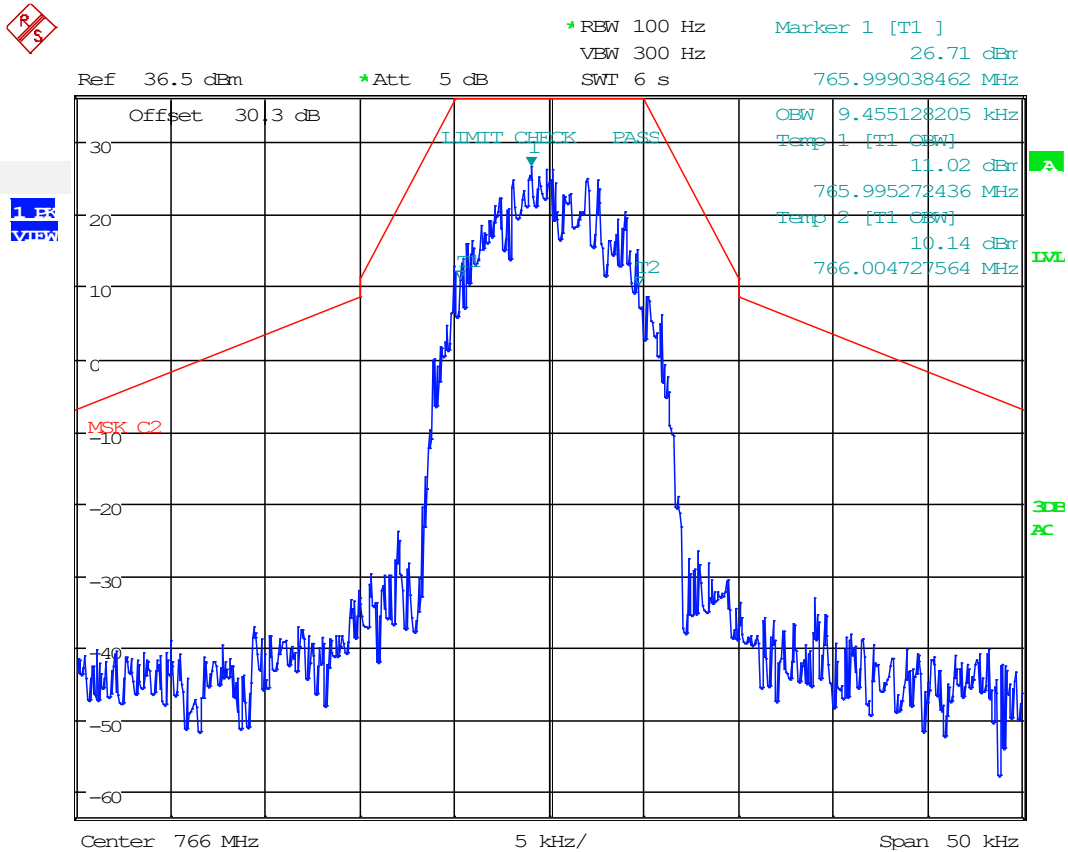


Date: 28.JAN.2003 07:17:41

8.5.15 800 Band 12.5 kHz FM, Downlink, AGC

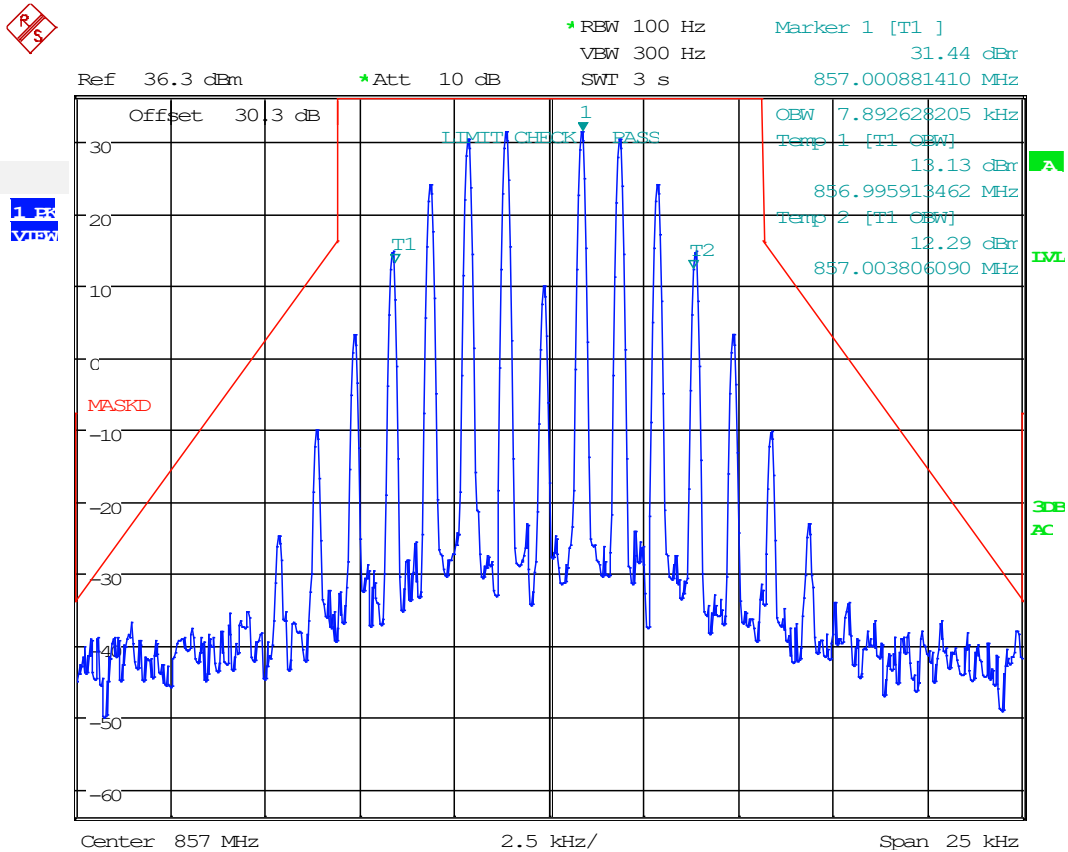

Date: 28.JAN.2003 07:24:16


8.5.16 800 Band 12.5 kHz FM, Downlink, AGC +3dB

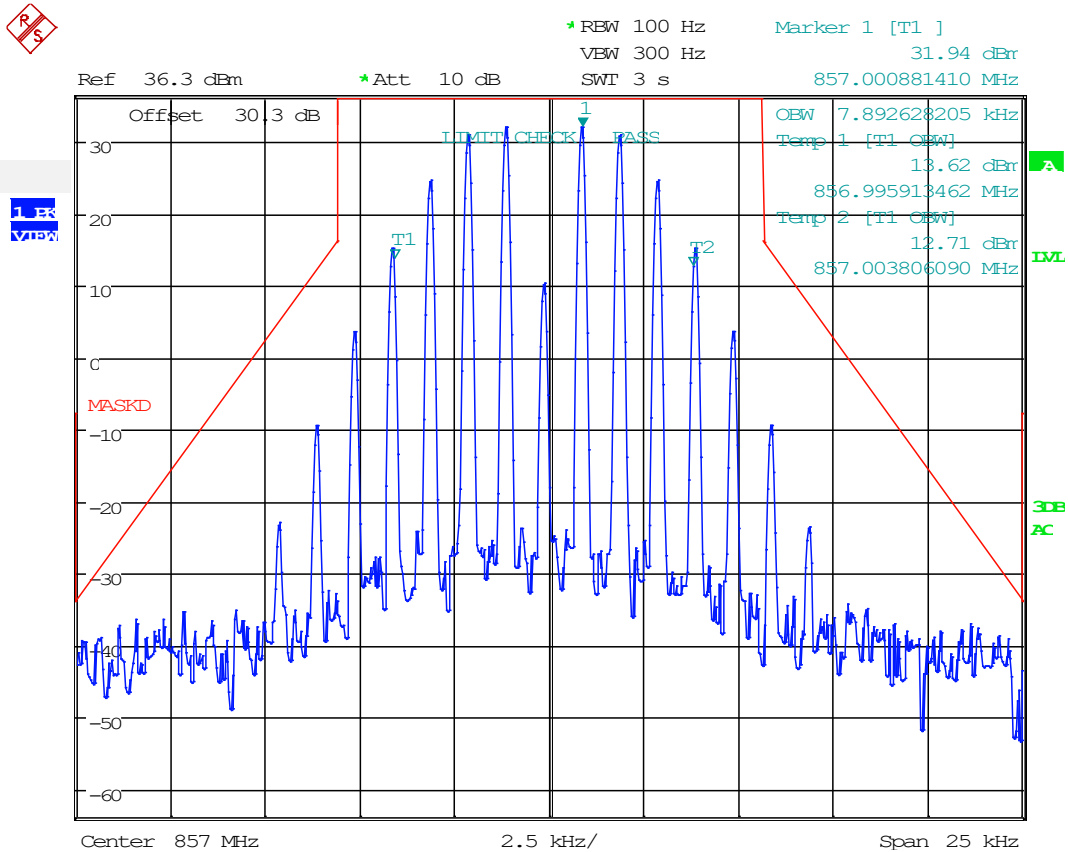

Date: 28.JAN.2003 07:23:17




8.5.17 800 Band 25 kHz FM, Downlink, AGC

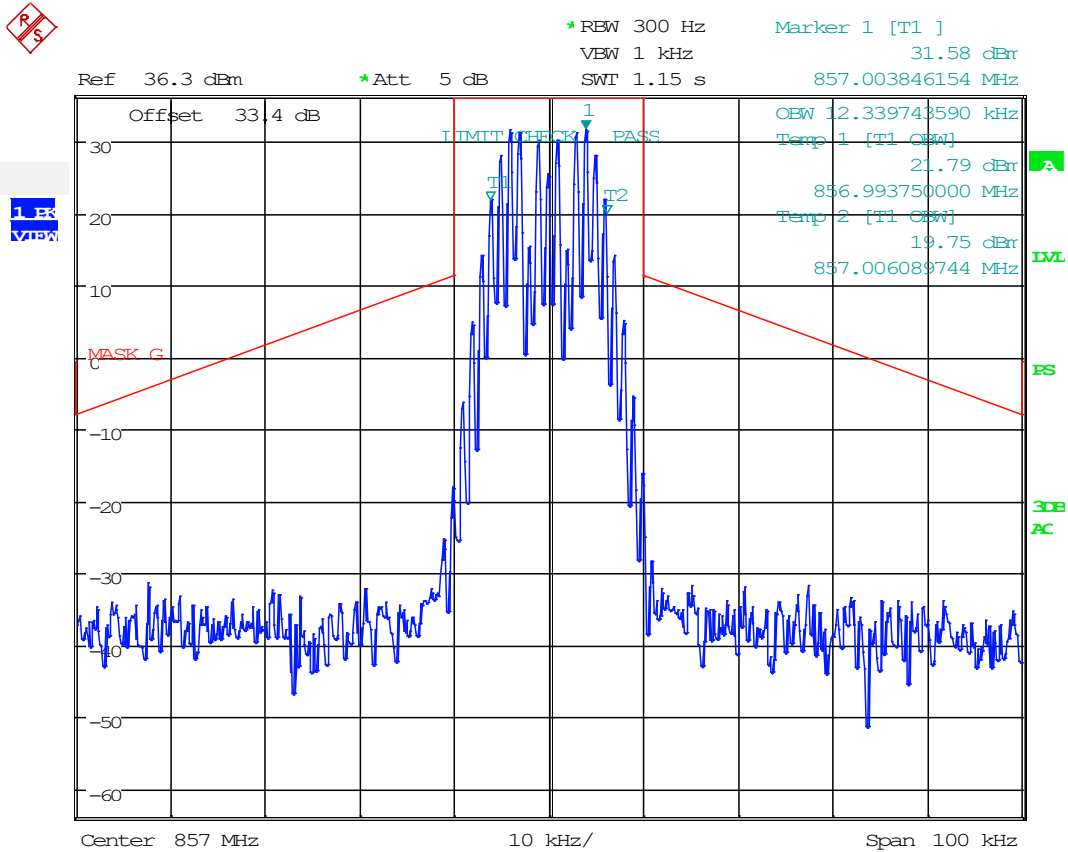

Date: 28.JAN.2003 07:20:38




8.5.18 800 Band 25 kHz FM, Downlink, AGC +3dB

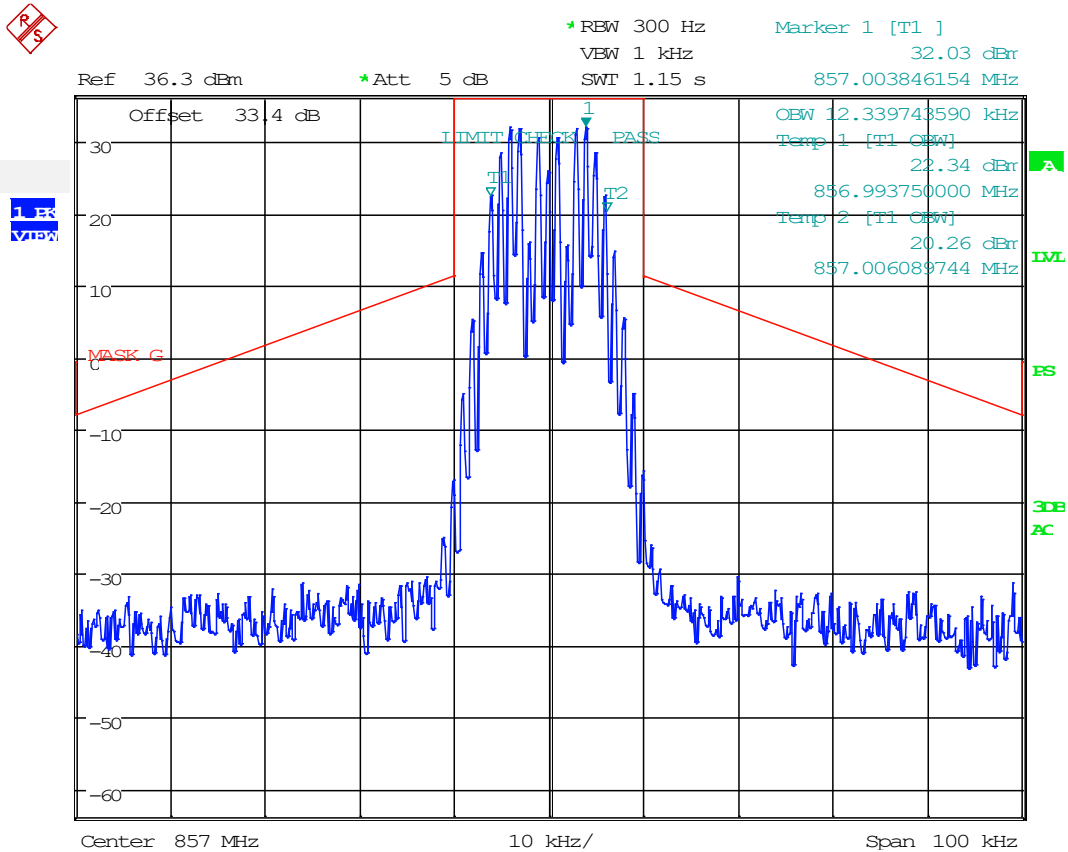

Date: 28.JAN.2003 07:21:13




8.5.19 800 Band C4FM, Downlink, AGC

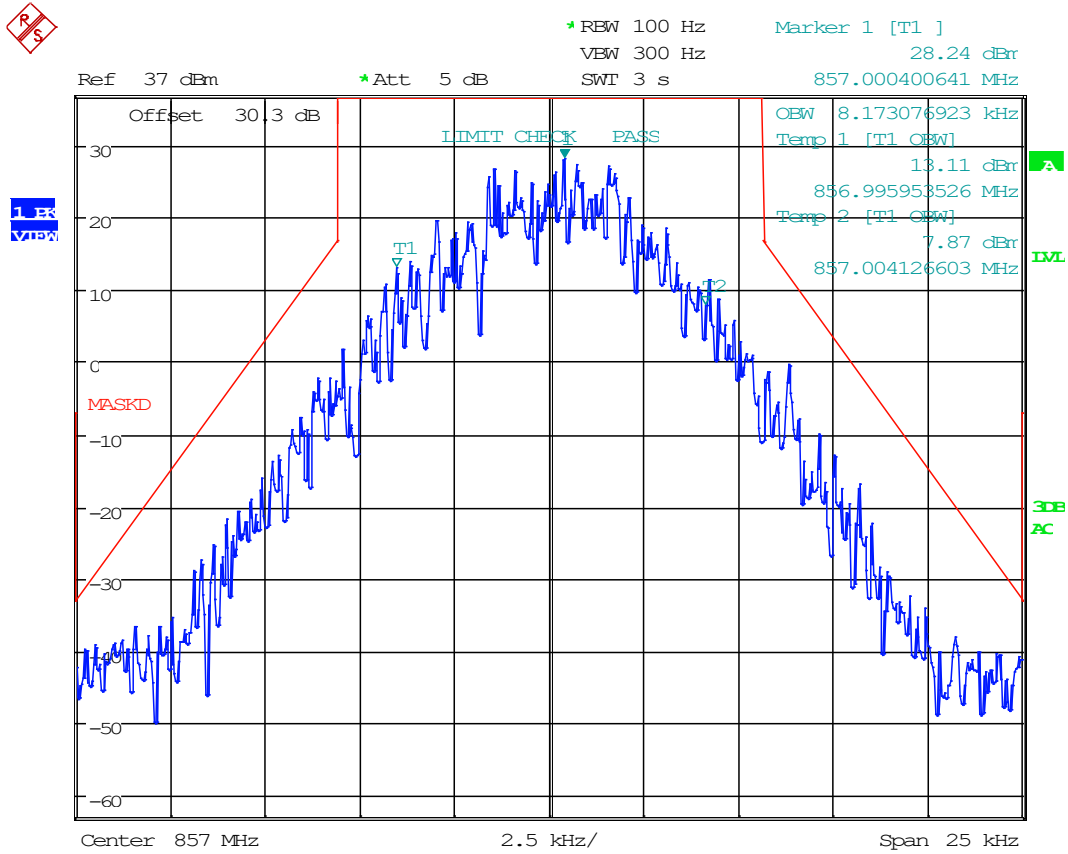


Date: 28.JAN.2003 07:27:35


8.5.20 800 Band C4FM, Downlink, AGC +3dB

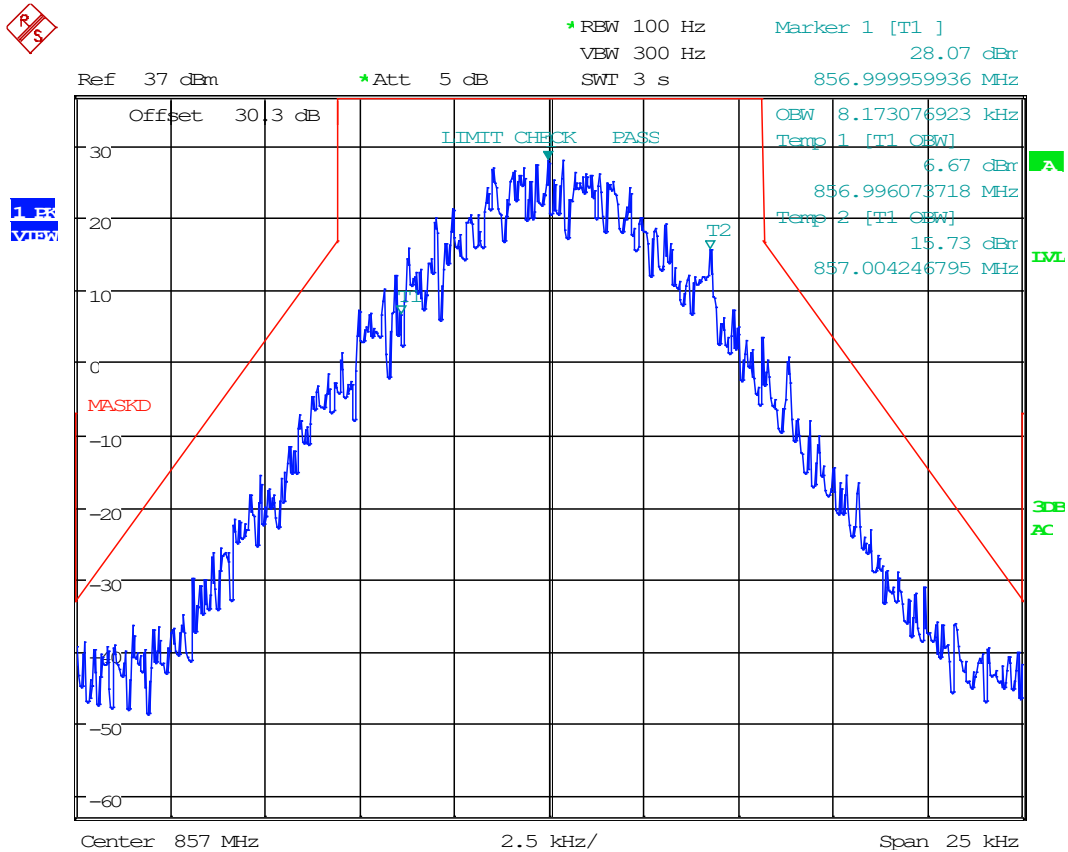

Date: 28.JAN.2003 07:27:54




8.5.22 800 Band H-CPM, Downlink, AGC +3dB

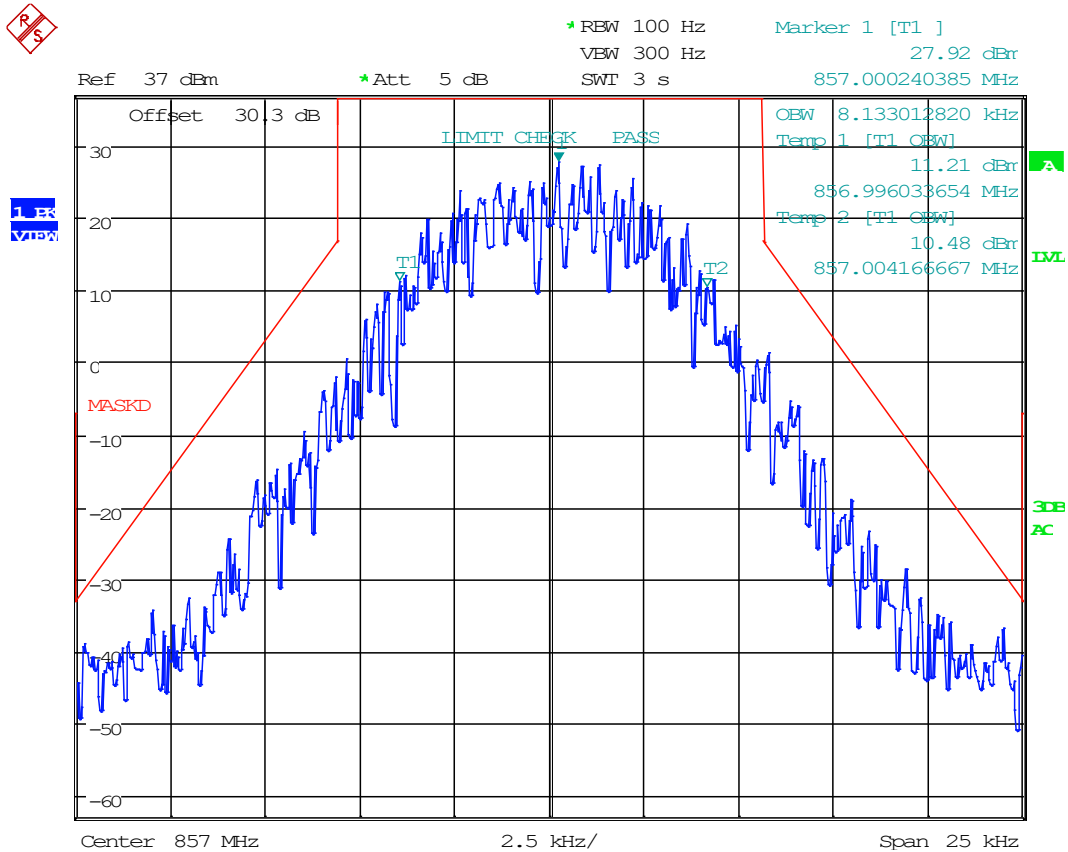

Date: 28.JAN.2003 07:27:06


8.5.23 800 Band H-DQPSK, Downlink, AGC

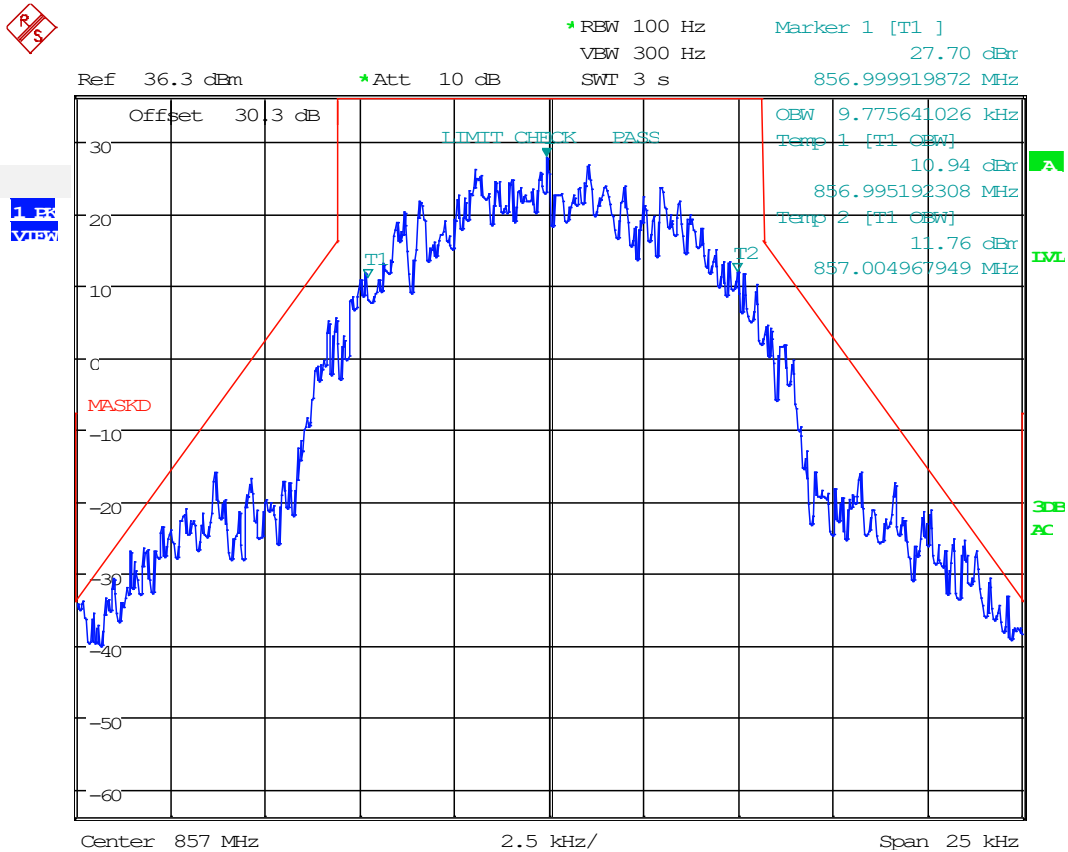

Date: 28.JAN.2003 07:24:47




8.5.1 800 Band H-DQPSK, Downlink, AGC +3dB

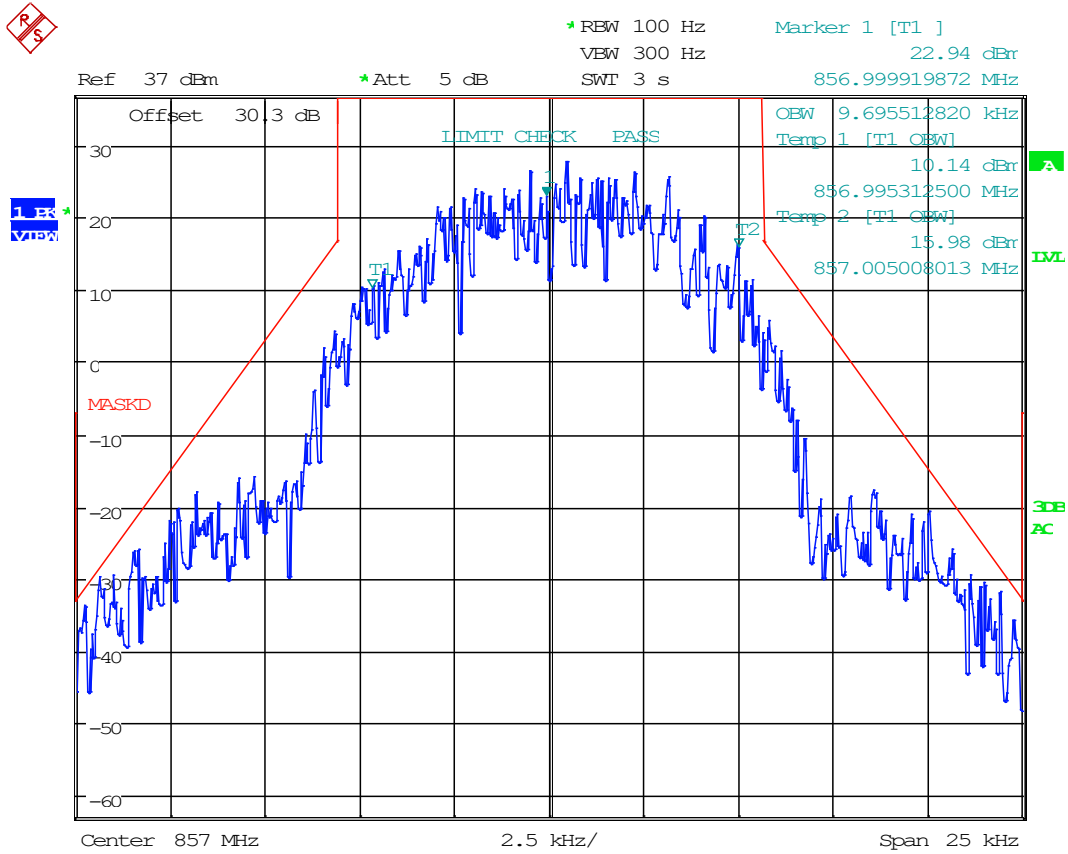

Date: 28.JAN.2003 07:26:49




8.5.2 851.0125 MHz FM, Downlink, AGC

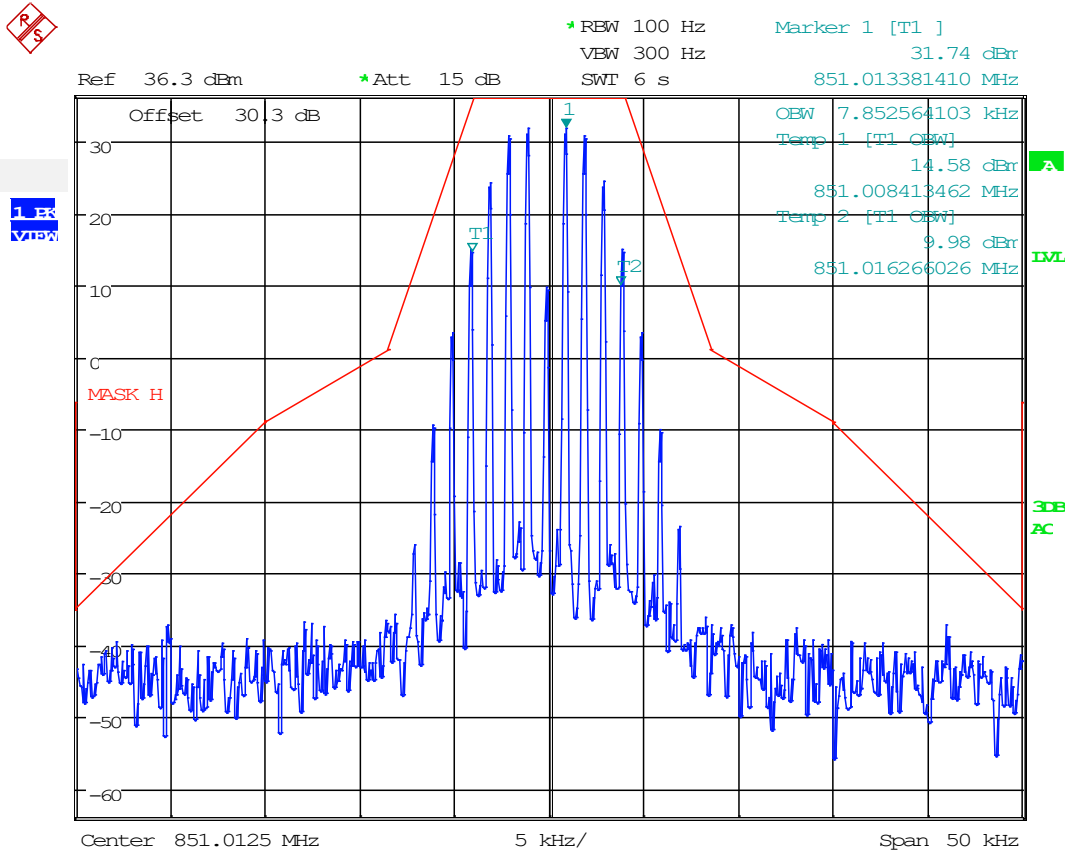

Date: 28.JAN.2003 07:01:06




8.5.3 851.0125 MHz FM, Downlink, AGC+3

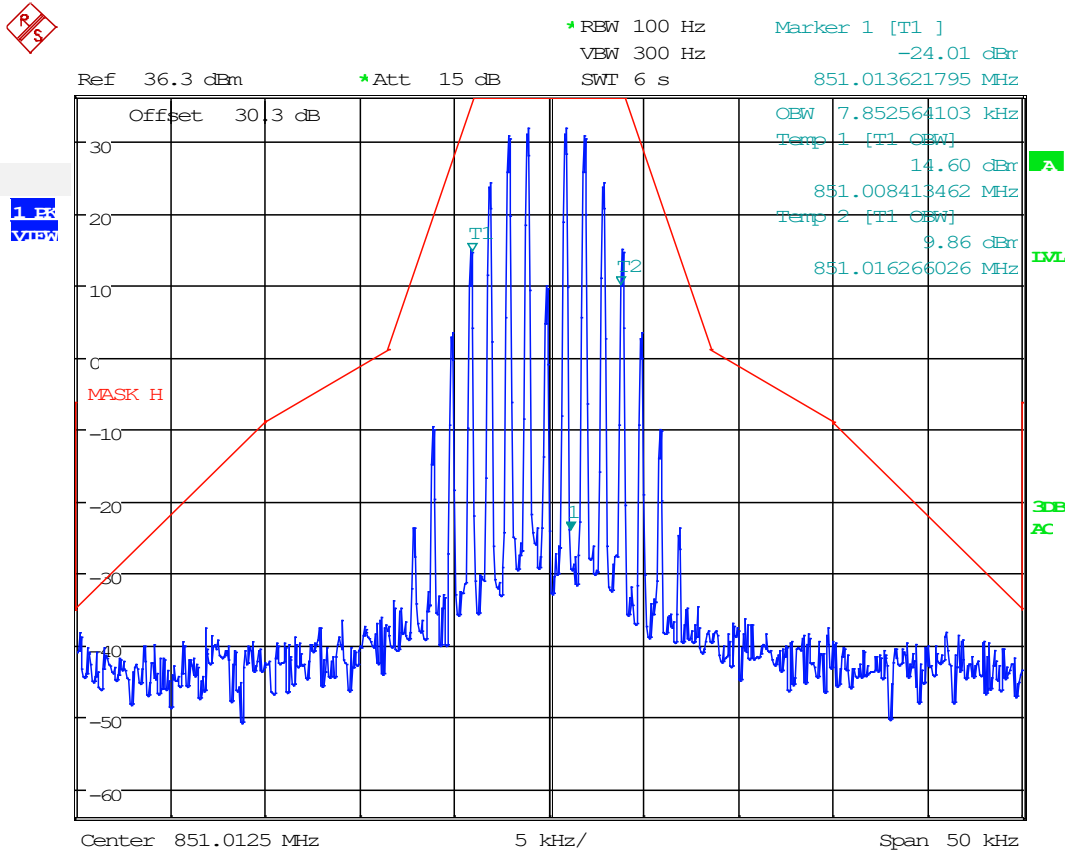

Date: 28.JAN.2003 07:00:49


8.5.4 851.0125 MHz C4FM, Downlink, AGC

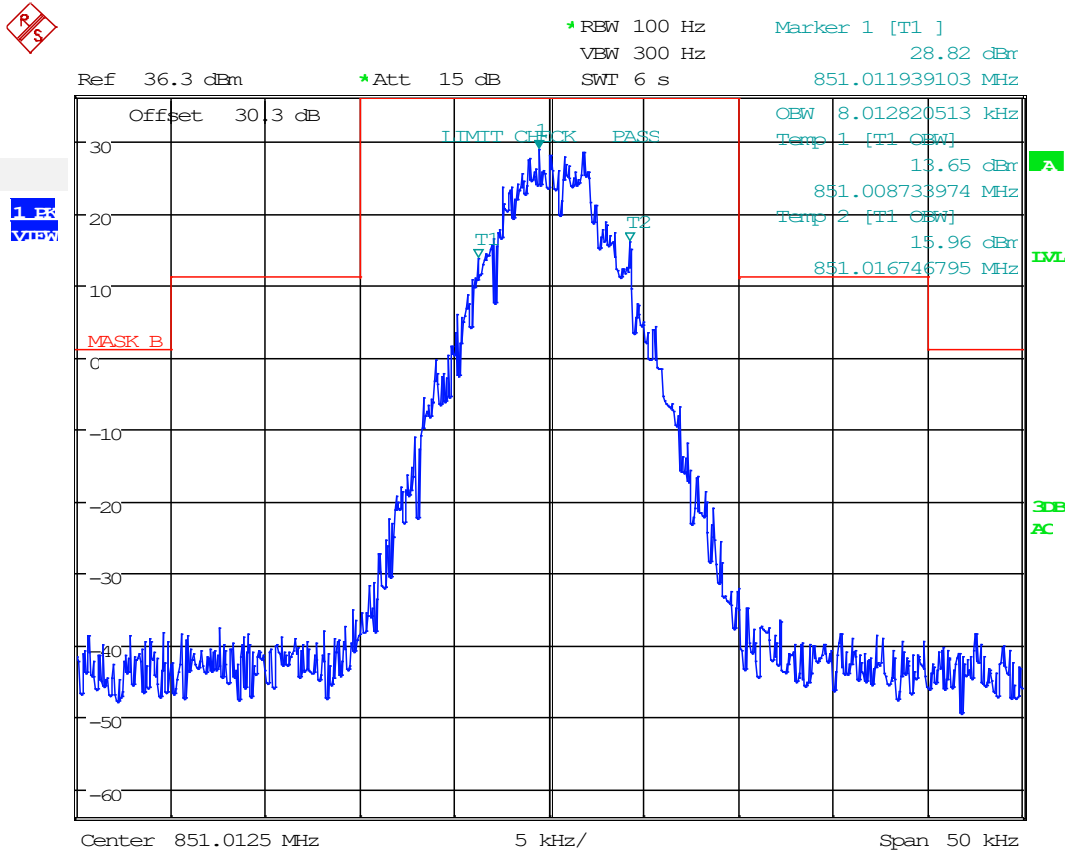

Date: 28.JAN.2003 06:39:23




8.5.5 851.0125 MHz C4FM, Downlink, AGC+3

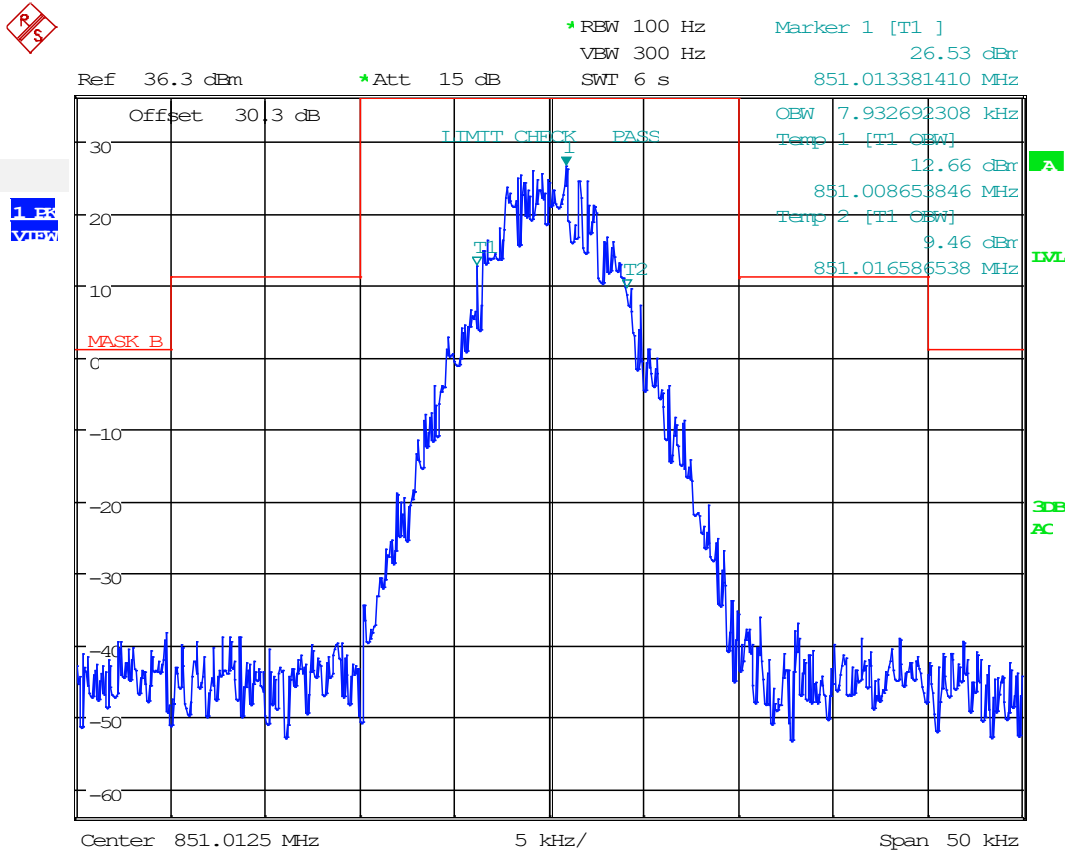

Date: 28.JAN.2003 06:33:41




8.5.6 851.0125 MHz H-CPM, Downlink, AGC

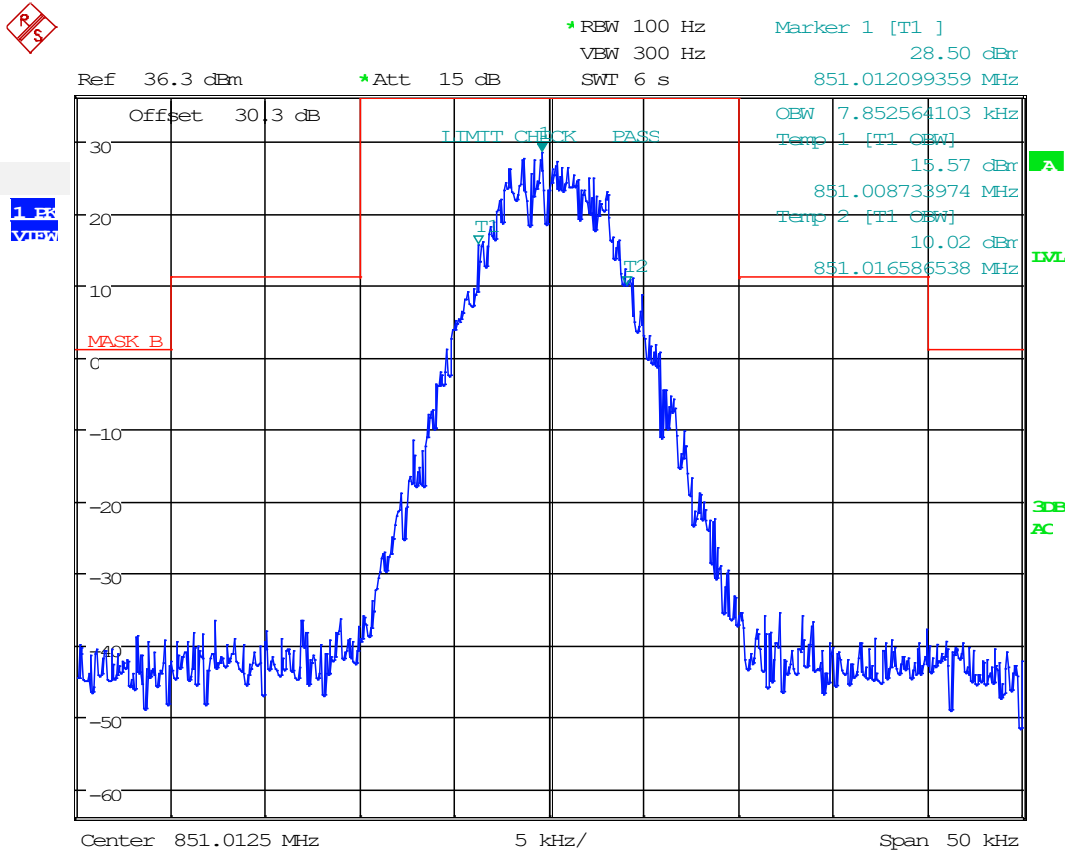

Date: 28.JAN.2003 06:39:49




8.5.7 851.0125 MHz H-CPM, Downlink, AGC+3

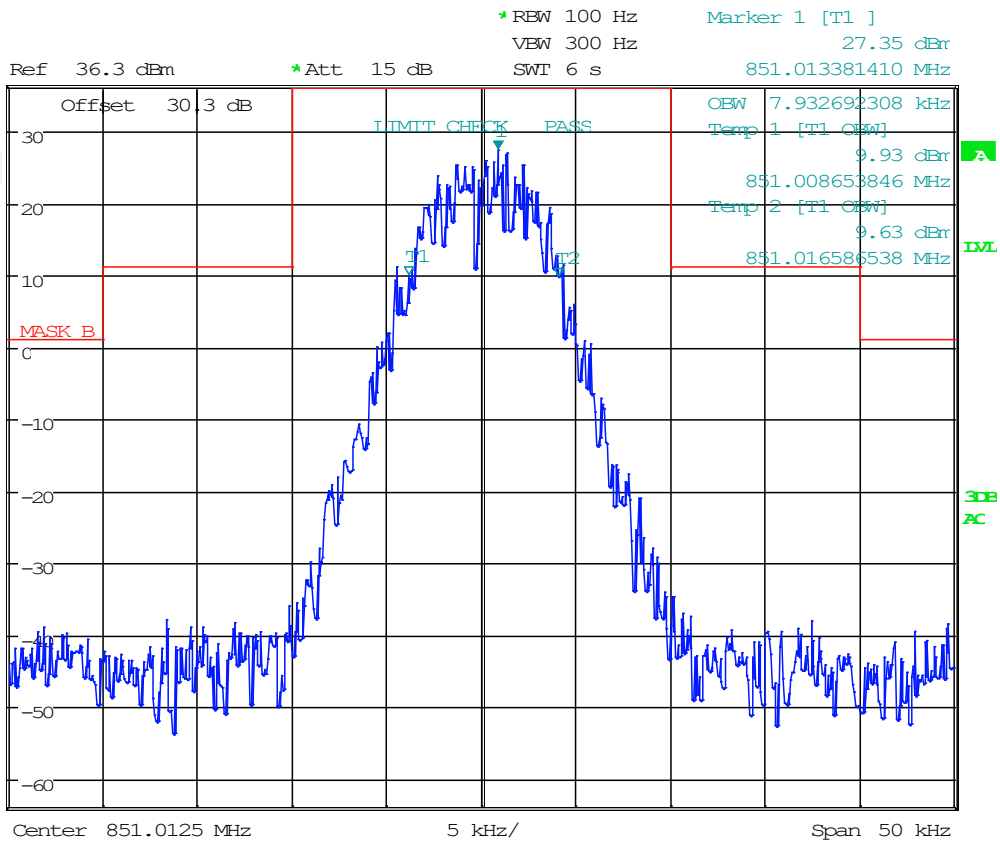

Date: 28.JAN.2003 06:40:12




8.5.8 851.0125 MHz H-DQPSK, Downlink, AGC

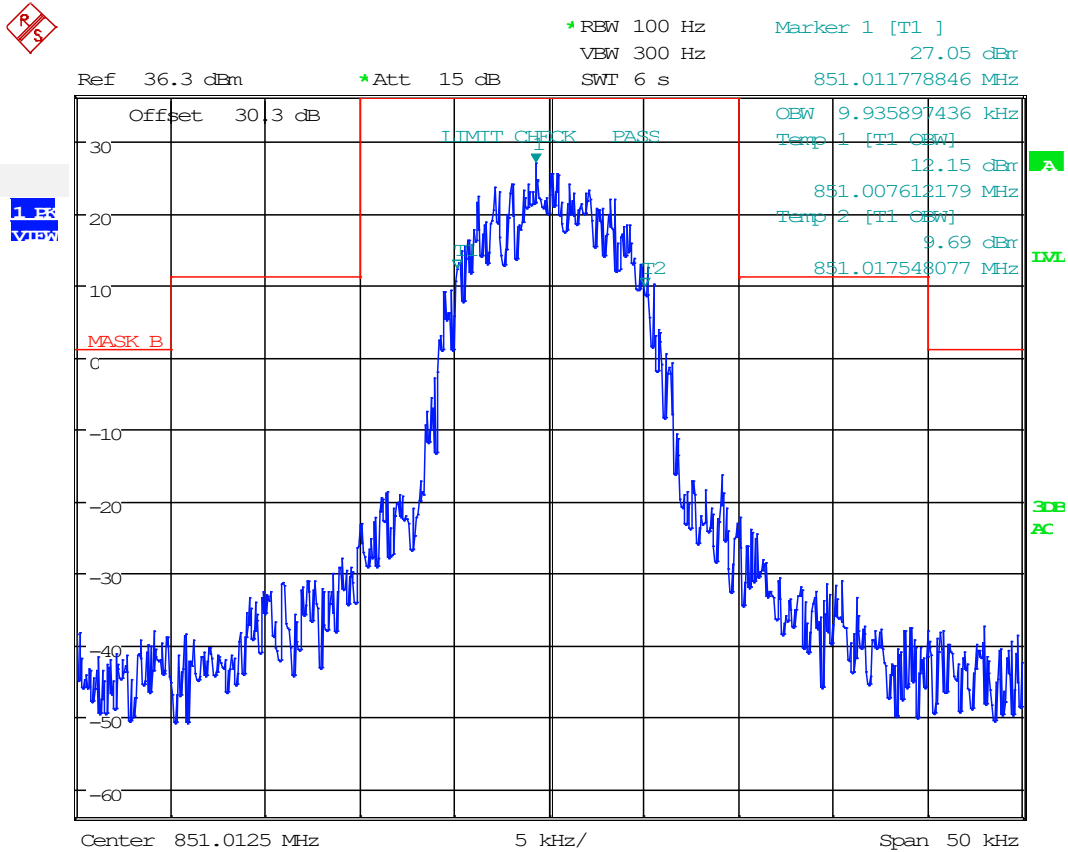

Date: 28.JAN.2003 06:40:55



8.5.9 851.0125 MHz H-DQPSK, Downlink, AGC+3

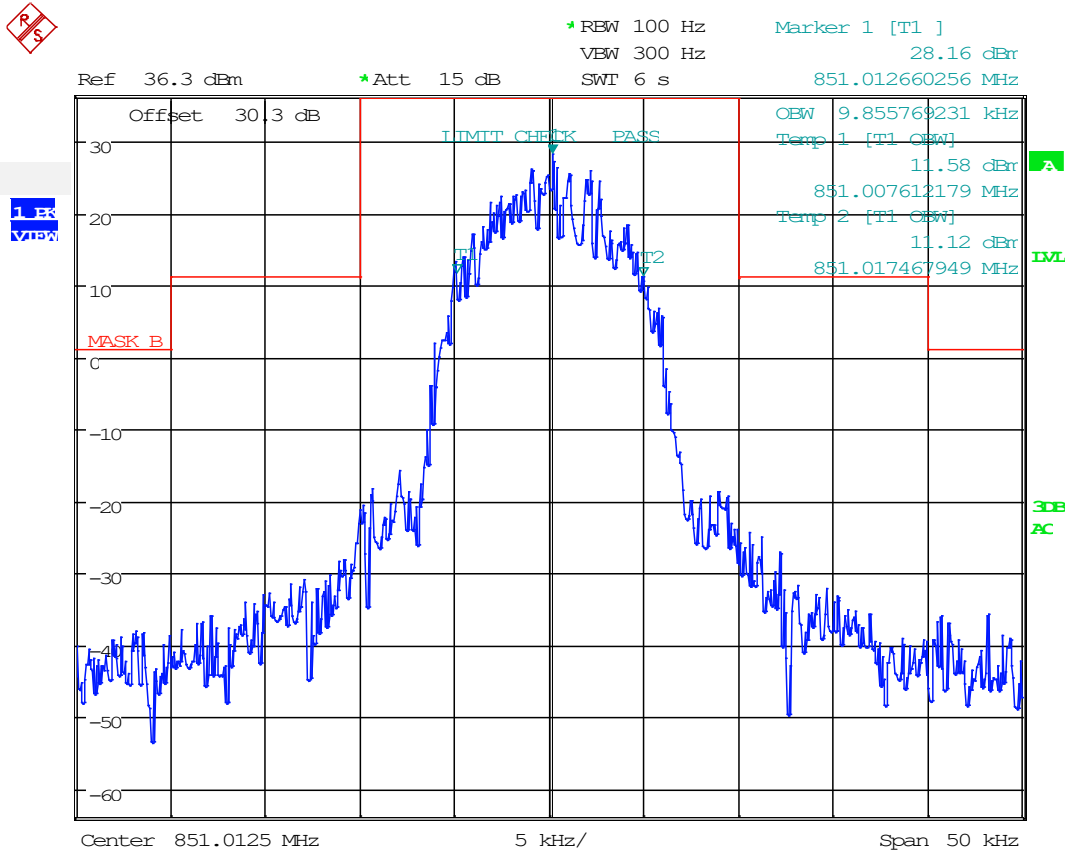


Date: 28.JAN.2003 06:40:32



8.6 Noise Figure

Referenced from test report "TR_2046-21_FCC_PT90_Booster Class B_DL_1".

Limits from FCC KDB 935210 D05 v01r04 Industrial Signal Boosters. Test method from "Noise Figure Measurement Accuracy: The Y-Factor Method" by Keysight Technologies.

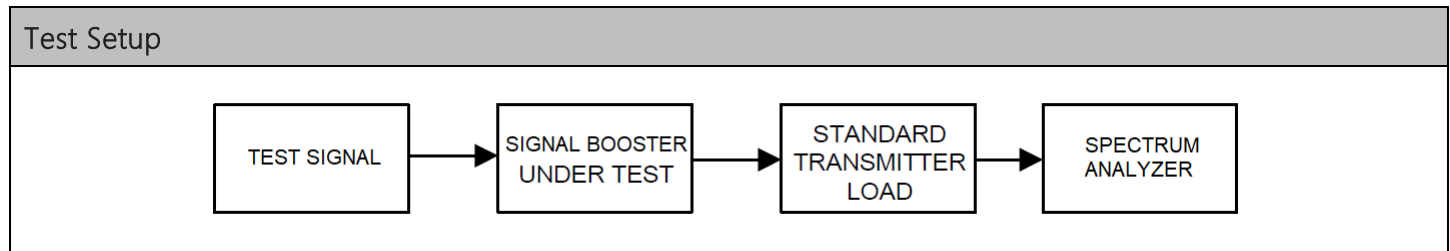

Test Results, Noise Figure			
Operating Band	Link Direction	Noise Figure (dB)	Limit
758 – 775 MHz	Downlink	7.77	< 9 dB
851 – 869 MHz	Downlink	6.64	< 9 dB




Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.7 Out-of-Band/Out-of-Block Emissions (Intermodulation Products)

Referenced from test report "TR_2046-21_FCC_PT90_Booster Class B_DL_1".


Limits from FCC Parts 2.1051, 90.210 and test procedure from ANSI C63.26-2015 and FCC KDB 935210 D05 v01r04 Industrial Signal Boosters.

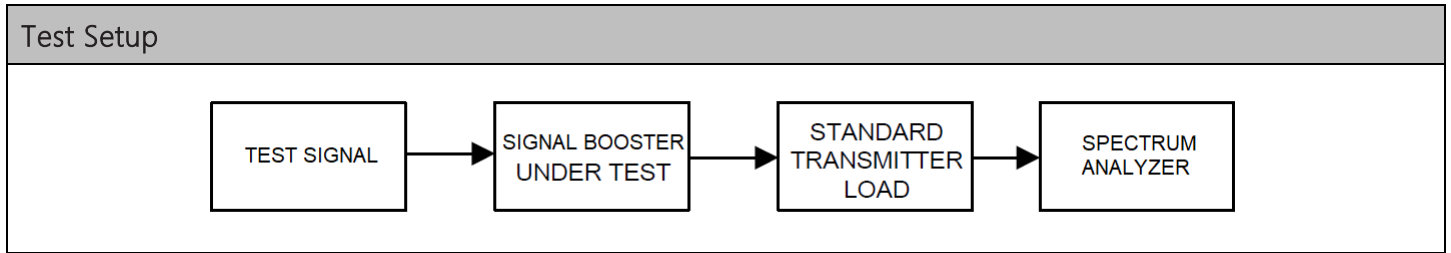




Intermodulation Products Spectrum Plots, 700 Band

8.7.1 12.5 kHz 700 Band Signal, Downlink, AGC

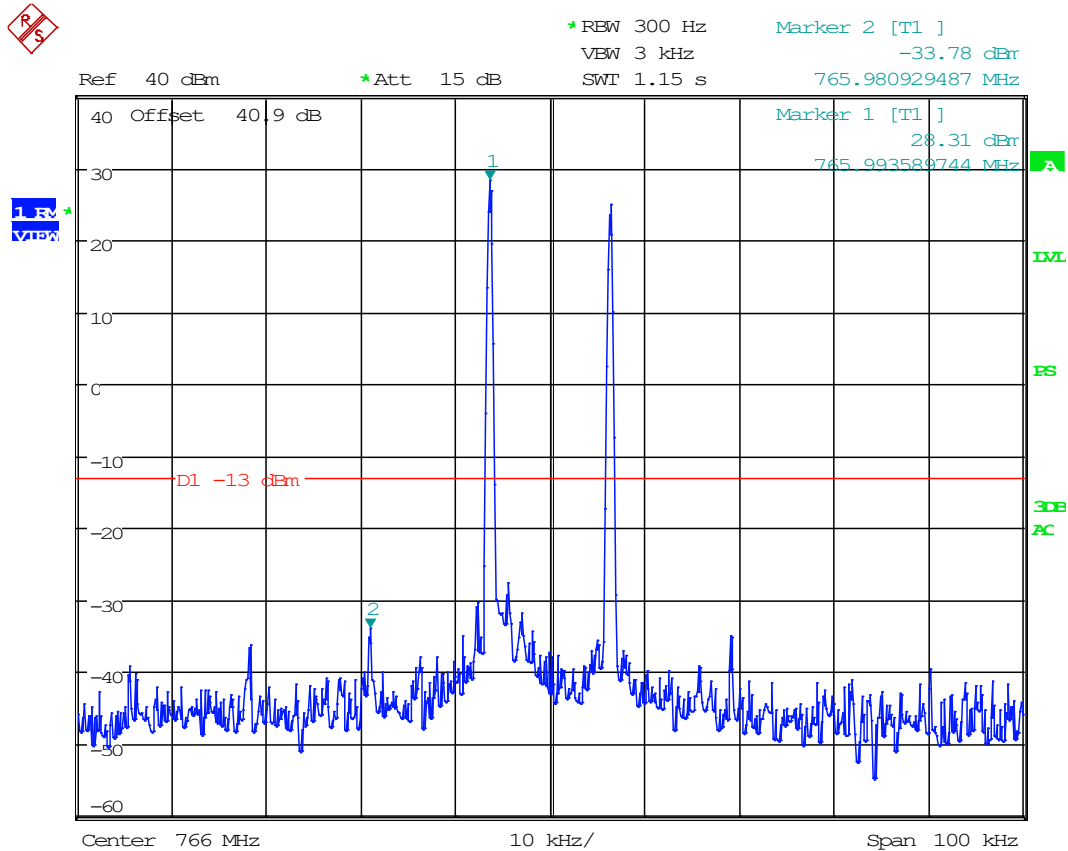

Date: 1.JAN.2003 01:37:16


8.7.2 12.5 kHz 700 Band Signal, Downlink, AGC +3dB

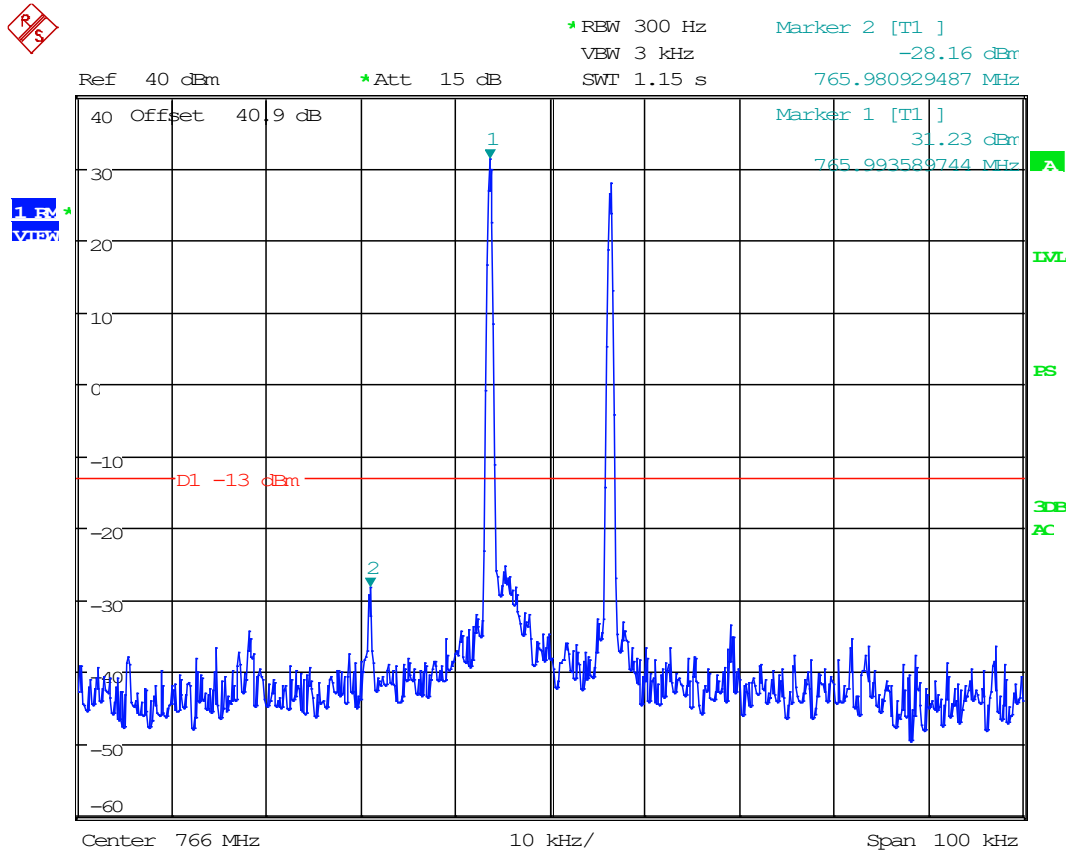

Date: 1.JAN.2003 01:39:26



8.7.1 25 kHz 700 Band Signal, Downlink, AGC

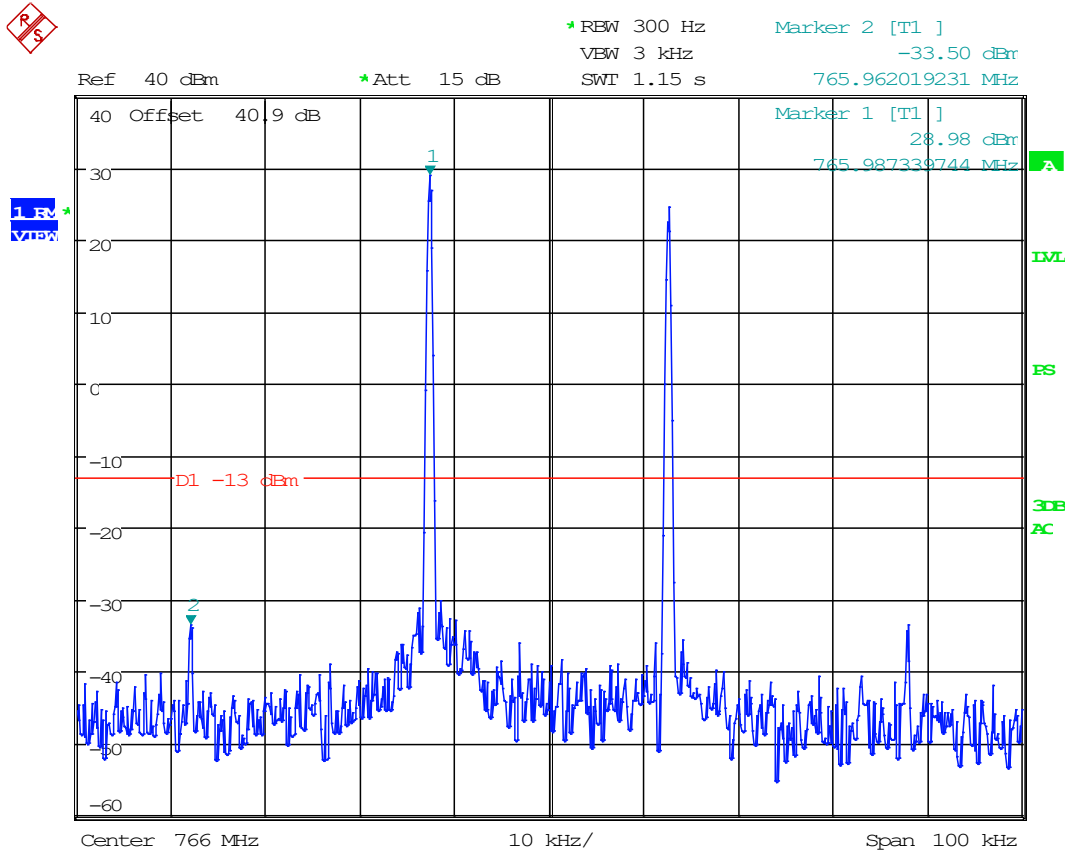


Date: 1.JAN.2003 01:41:08



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.7.1 25 kHz 700 Band Signal, Downlink, AGC +3dB

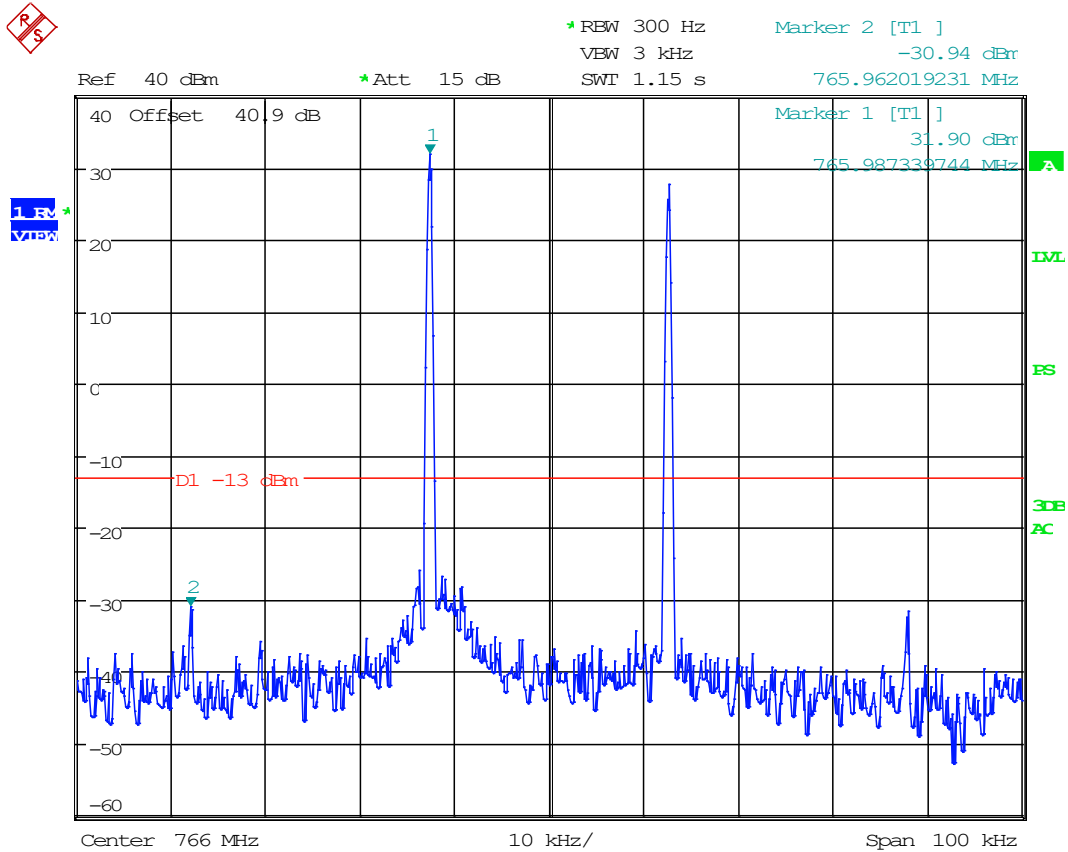


Date: 1.JAN.2003 01:40:42




Intermodulation Products Spectrum Plots, 800 Band

8.7.2 12.5 kHz 800 Band Signal, Downlink, AGC

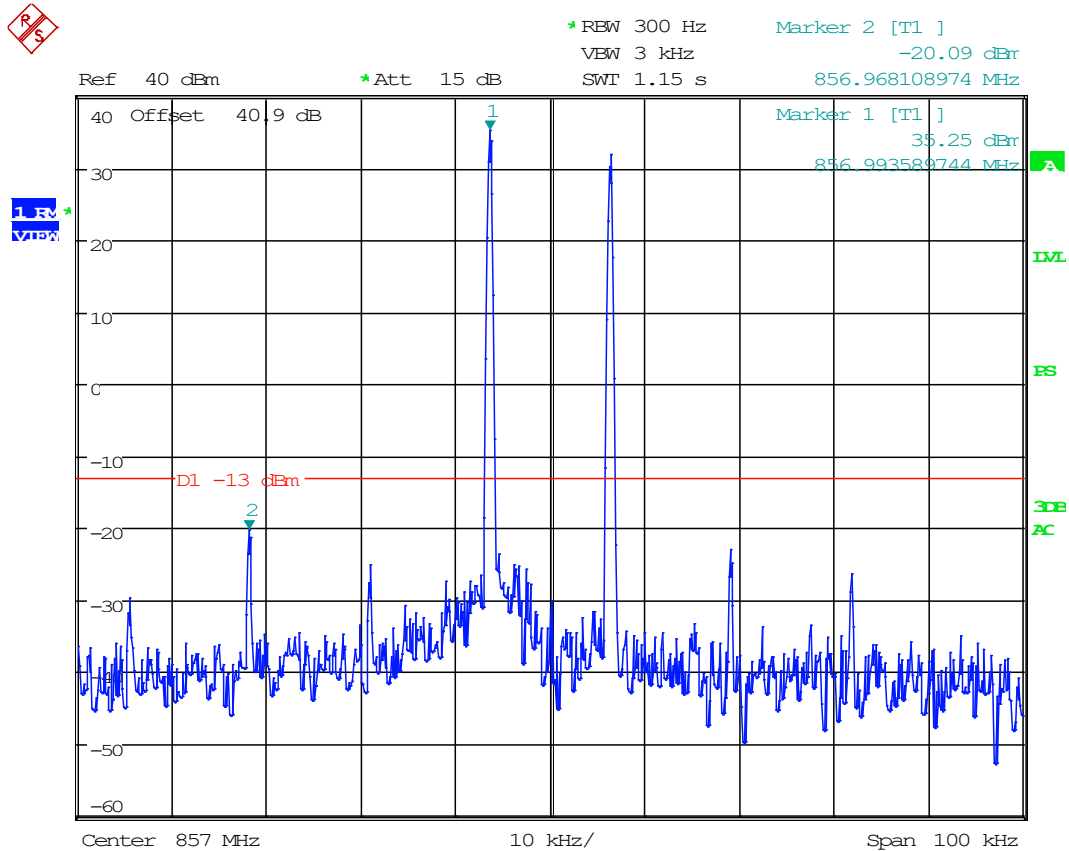


Date: 1.JAN.2003 01:43:56

8.7.3 12.5 kHz 800 Band Signal, Downlink, AGC +3dB

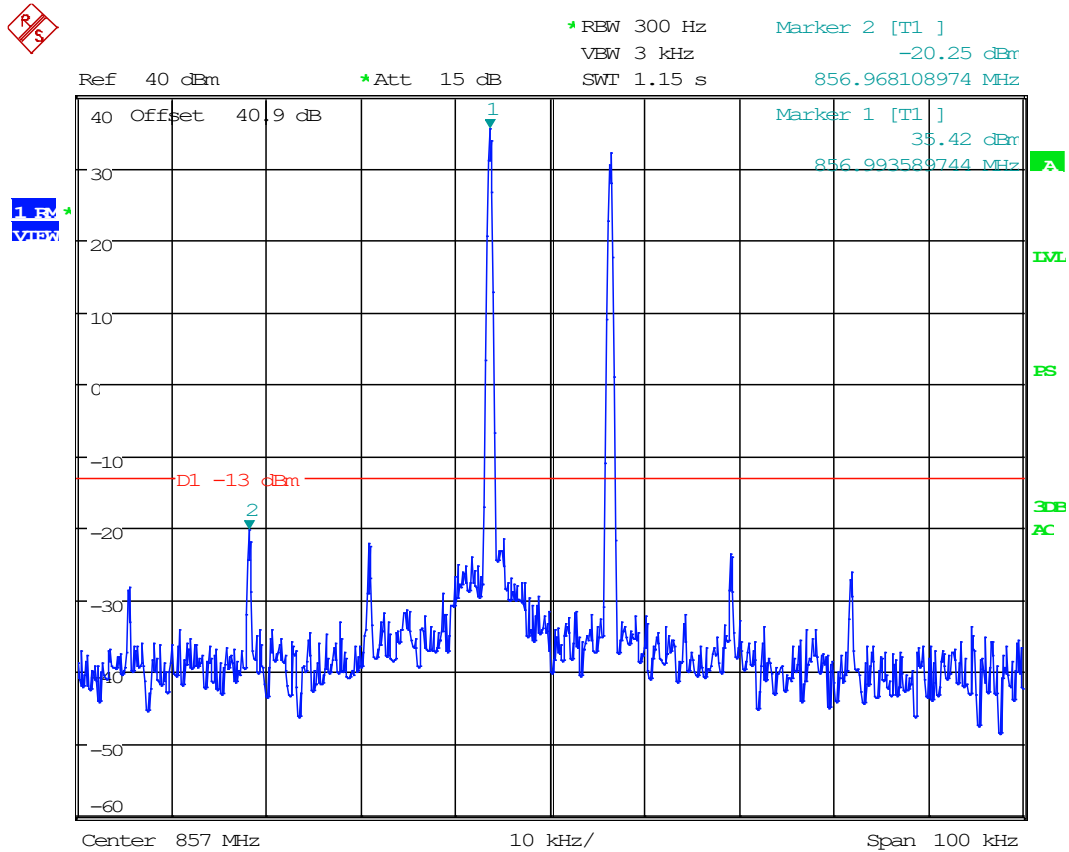


Date: 1.JAN.2003 01:44:34

8.7.4 25 kHz 800 Band Signal, Downlink, AGC

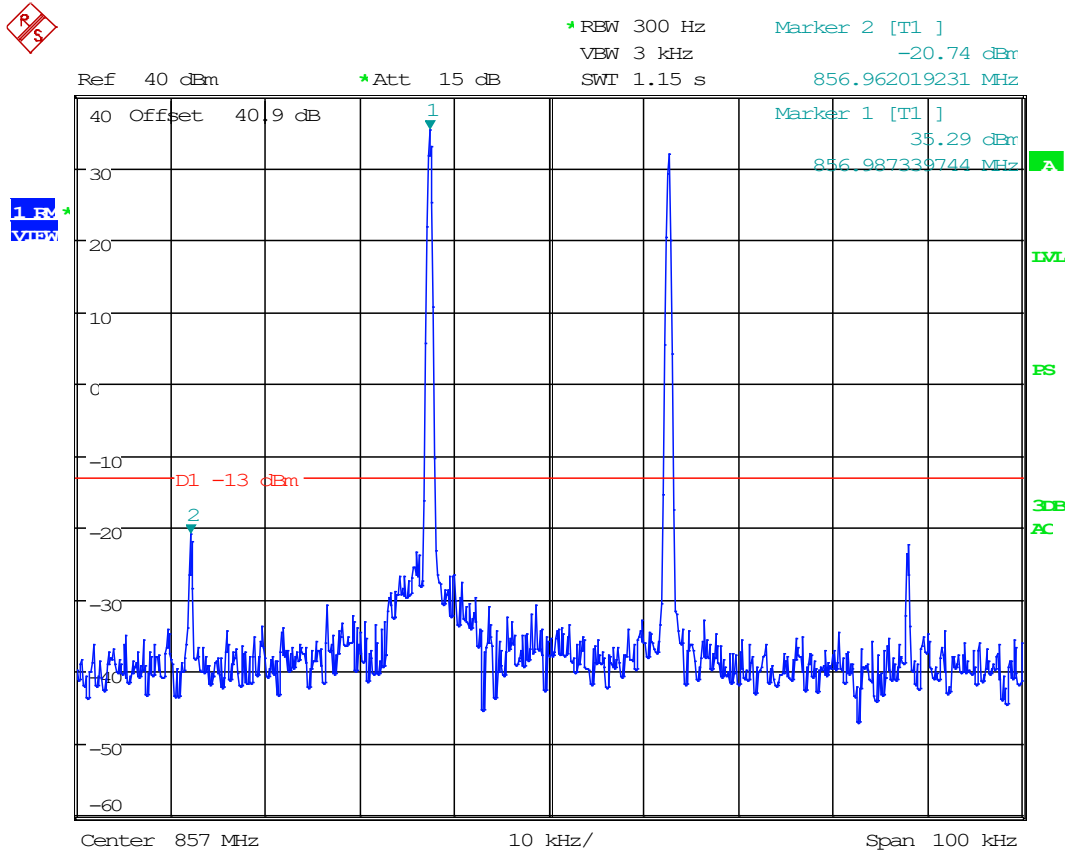

Date: 1.JAN.2003 01:45:46

8.7.5 25 kHz 800 Band Signal, Downlink, AGC +3dB

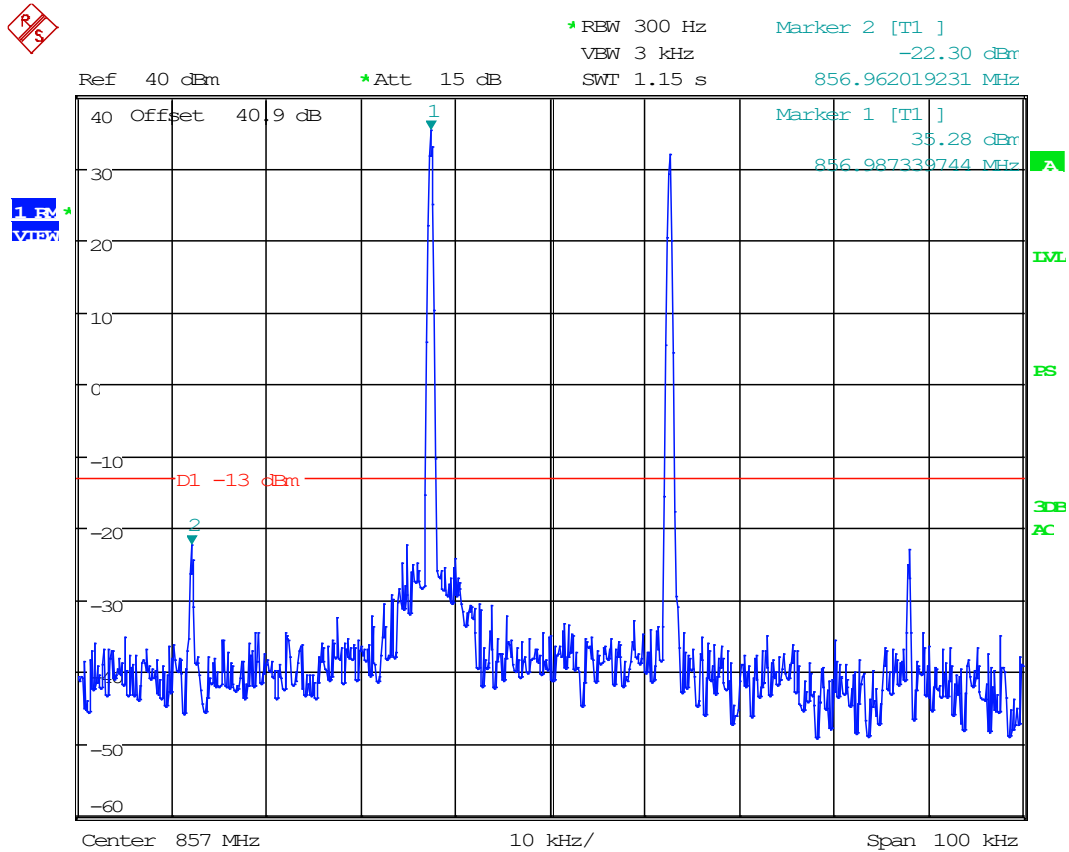


Date: 1.JAN.2003 01:45:18



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.8 Emission Mask, Out-of-Band


Limits from FCC Parts 2.1051, 90.210 and test procedure from ANSI C63.26-2015 and FCC KDB 935210 D05 v01r04 Industrial Signal Boosters.

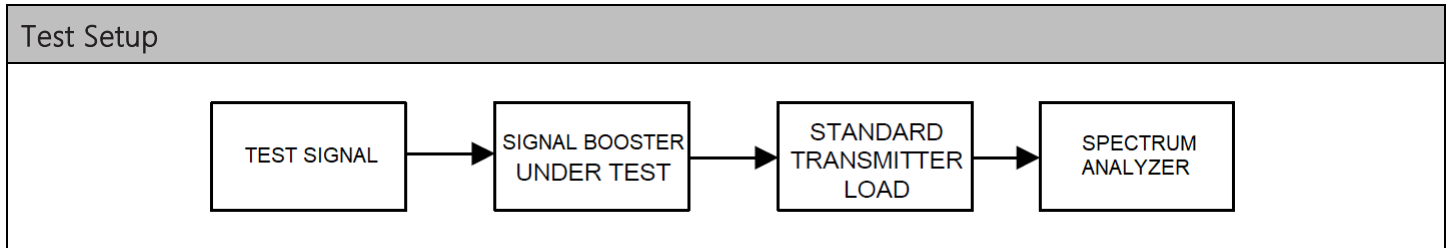



Conducted Emissions Spectrum Plots


8.8.1 30 MHz to 1 GHz, 700 Band Downlink

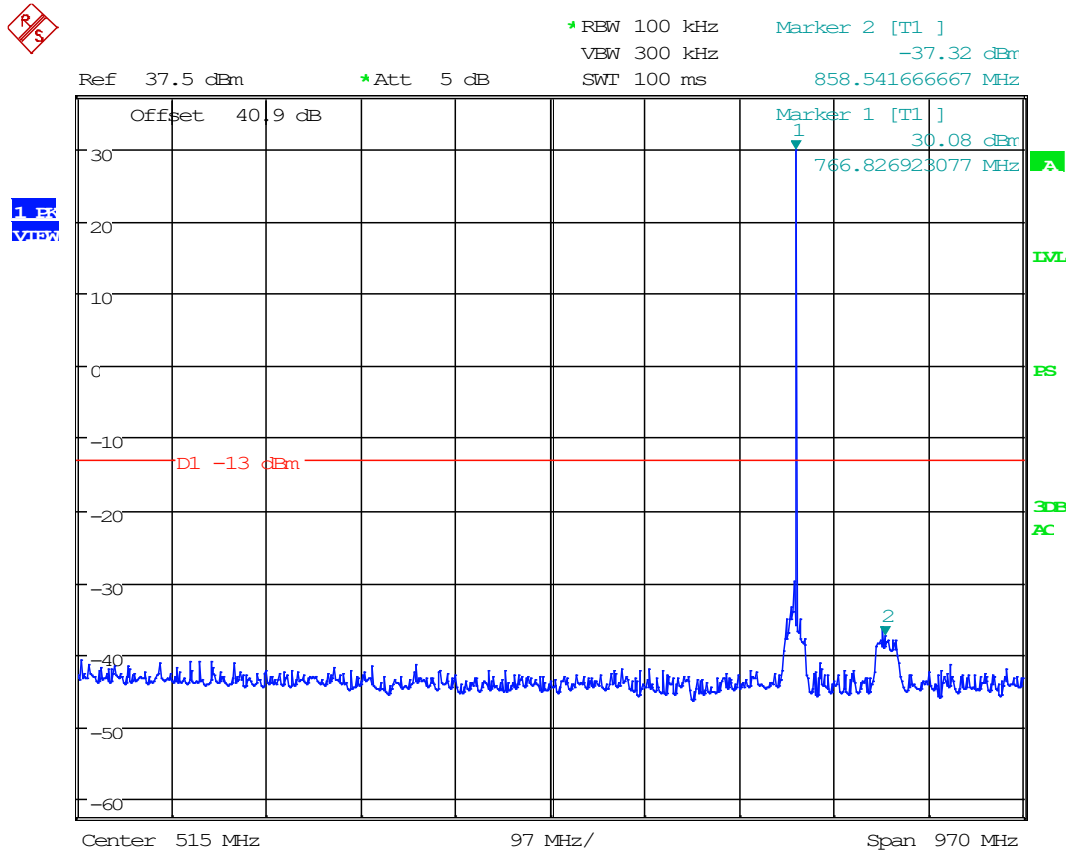

Date: 1.JAN.2003 02:10:10




8.8.2 1 GHz to 10th Harmonic, 700 Band Downlink

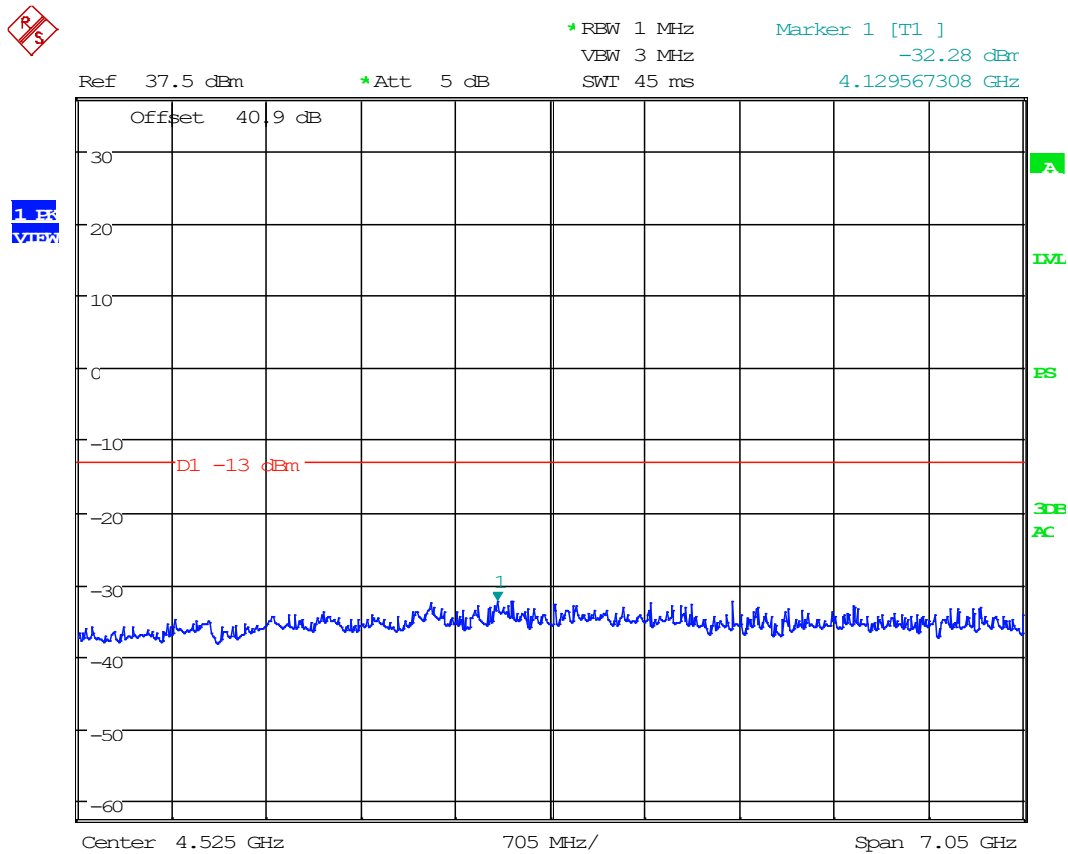

Date: 1.JAN.2003 02:08:27


8.8.3 30 MHz to 1 GHz, 800 Band Downlink

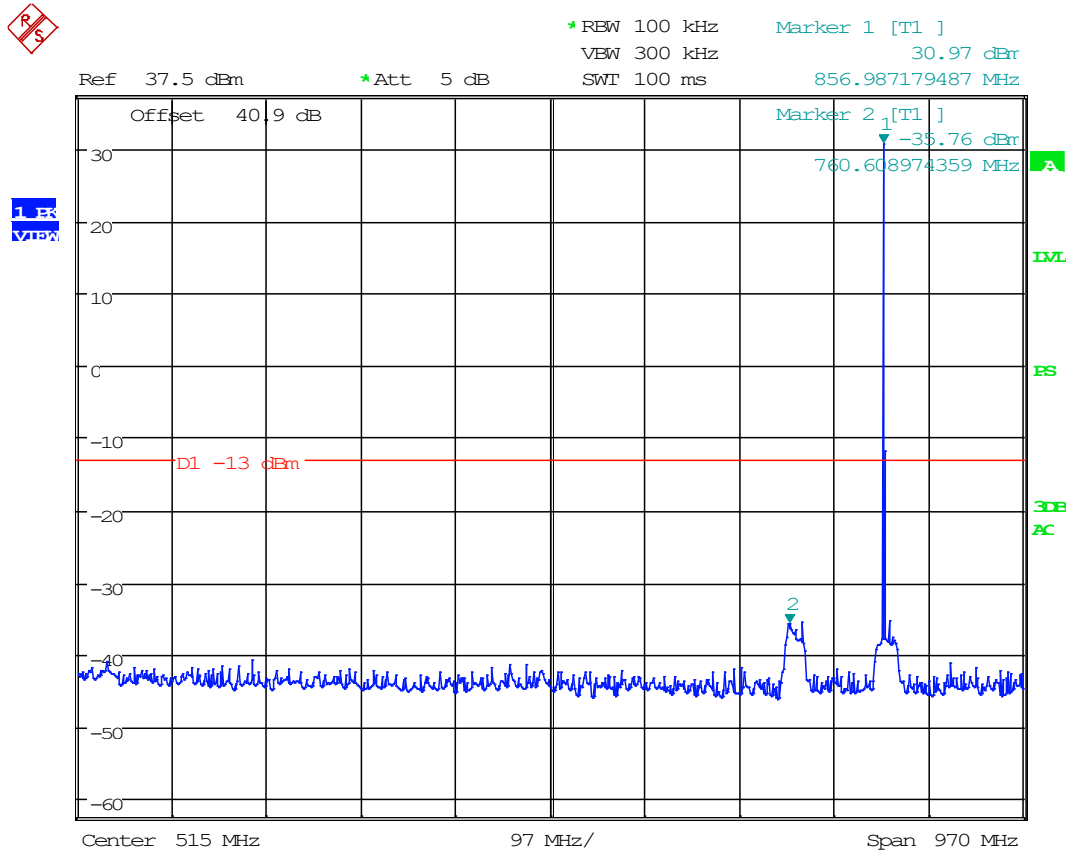

Date: 1.JAN.2003 02:09:40



8.8.4 1 GHz to 10th Harmonic, 800 Band Downlink

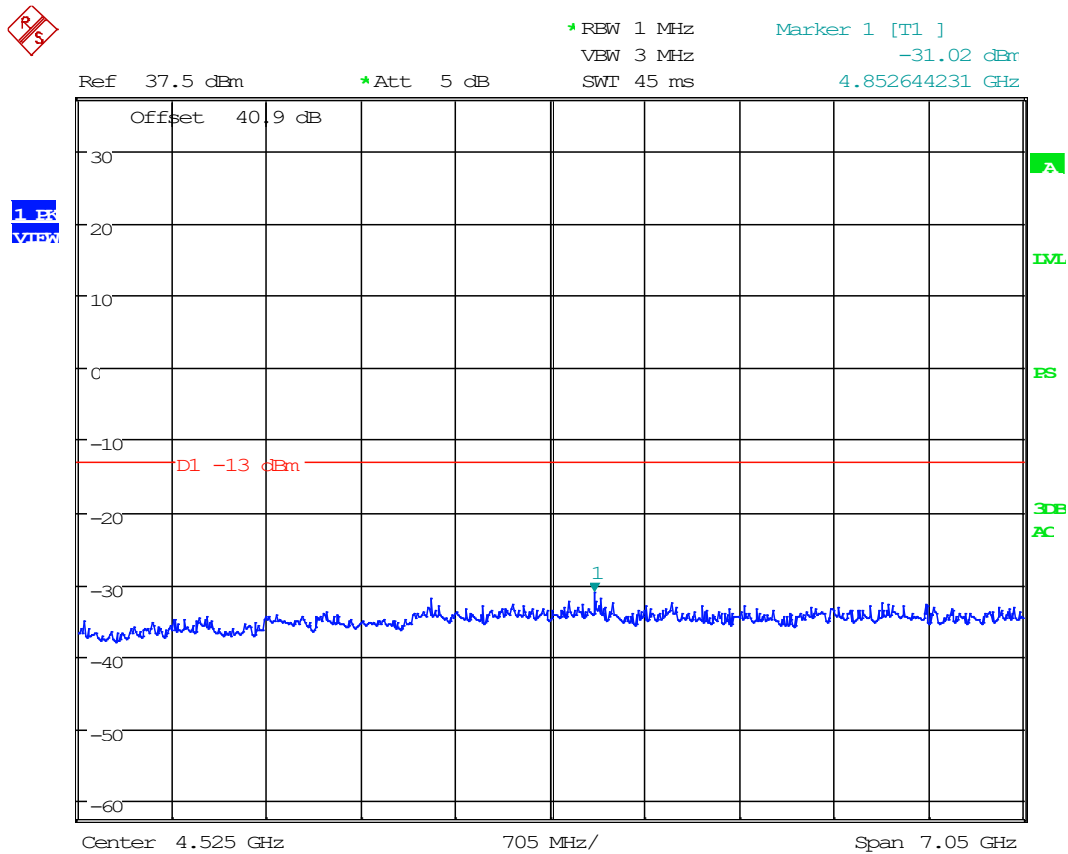


Date: 1.JAN.2003 02:08:58


8.9 Spurious Radiated Emissions

Limits from FCC Parts 2.1053, 90.210 and test procedure from ANSI C63.26-2015 and FCC KDB 935210 D05 v01r04 Industrial Signal Boosters.

Radiated Test Setup, 30 – 1000 MHz

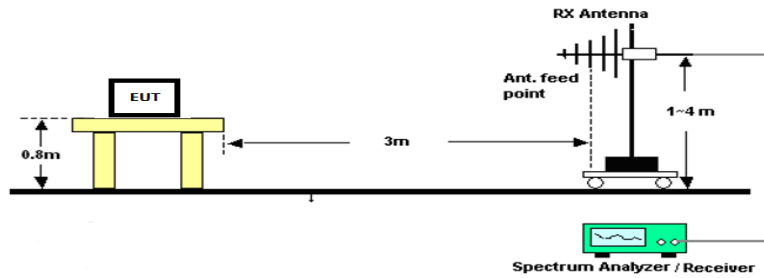

Radiated Test Setup, Above 1000 MHz

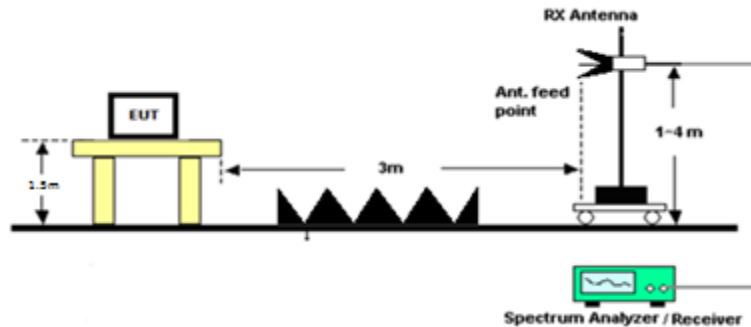



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

Radiated Emissions, Tabular Data

8.9.1 700 Downlink, Class A

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBuV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
766.00	1532.00	PK	10.75	H	4.54	27.76	3.00	43.05	-54.33	-13.00	41.33
766.00	1532.00	PK	11.37	V	4.54	27.76	3.00	43.67	-53.71	-13.00	40.71
766.00	2298.00	PK	11.11	H	5.49	31.51	3.00	48.11	-49.27	-13.00	36.27
766.00	2298.00	PK	11.98	V	5.49	31.51	3.00	48.98	-48.40	-13.00	35.40
766.00	3064.00	PK	11.37	H	6.43	32.67	3.00	50.46	-46.91	-13.00	33.91
766.00	3064.00	PK	13.36	V	6.43	32.67	3.00	52.45	-44.92	-13.00	31.92
766.00	3830.00	PK	9.82	H	6.47	33.18	3.00	49.47	-47.91	-13.00	34.91
766.00	3830.00	PK	10.84	V	6.47	33.18	3.00	50.49	-46.89	-13.00	33.89
766.00	4596.00	PK	9.59	H	7.54	34.05	3.00	51.19	-46.19	-13.00	33.19
766.00	4596.00	PK	10.04	V	7.54	34.05	3.00	51.64	-45.74	-13.00	32.74
766.00	5362.00	PK	11.47	H	8.12	34.30	3.00	53.89	-43.49	-13.00	30.49
766.00	5362.00	PK	9.95	V	8.12	34.30	3.00	52.37	-45.01	-13.00	32.01
766.00	6128.00	PK	11.29	H	8.60	35.29	3.00	55.19	-42.19	-13.00	29.19
766.00	6128.00	PK	10.14	V	8.60	35.29	3.00	54.04	-43.34	-13.00	30.34
766.00	6894.00	PK	10.83	H	9.22	35.93	3.00	55.98	-41.40	-13.00	28.40
766.00	6894.00	PK	9.71	V	9.22	35.93	3.00	54.86	-42.52	-13.00	29.52
766.00	7660.00	PK	8.58	H	10.06	35.93	3.00	54.57	-42.81	-13.00	29.81
766.00	7660.00	PK	0.08	V	10.06	35.93	3.00	46.07	-51.31	-13.00	38.31



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.9.2 800 Downlink, Class A


Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBuV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
857.00	1714.00	PK	13.01	H	4.80	29.25	3.00	47.06	-50.31	-13.00	37.31
857.00	1714.00	PK	12.00	V	4.80	29.25	3.00	46.05	-51.32	-13.00	38.32
857.00	2571.00	PK	12.48	H	5.73	32.52	3.00	50.73	-46.64	-13.00	33.64
857.00	2571.00	PK	11.73	V	5.73	32.52	3.00	49.98	-47.39	-13.00	34.39
857.00	3428.00	PK	13.75	H	6.85	32.62	3.00	51.95	-45.42	-13.00	32.42
857.00	3428.00	PK	13.38	V	6.85	32.62	3.00	52.85	-44.52	-13.00	31.52
857.00	4285.00	PK	8.97	H	7.39	33.42	3.00	54.57	-42.81	-13.00	29.81
857.00	4285.00	PK	9.25	V	7.39	33.42	3.00	50.07	-47.31	-13.00	34.31
857.00	5142.00	PK	9.59	H	7.86	34.09	3.00	50.92	-46.46	-13.00	33.46
857.00	5142.00	PK	9.30	V	7.86	34.09	3.00	51.25	-46.13	-13.00	33.13
857.00	5999.00	PK	9.87	H	8.66	35.14	3.00	53.39	-43.99	-13.00	30.99
857.00	5999.00	PK	8.55	V	8.66	35.14	3.00	52.35	-45.03	-13.00	32.03
857.00	6856.00	PK	10.10	H	9.22	35.85	3.00	54.94	-42.44	-13.00	29.44
857.00	6856.00	PK	9.93	V	9.22	35.85	3.00	55.00	-42.38	-13.00	29.38
857.00	7713.00	PK	9.35	H	10.11	35.87	3.00	56.08	-41.29	-13.00	28.29
857.00	7713.00	PK	9.01	V	10.11	35.87	3.00	54.99	-42.38	-13.00	29.38
857.00	8570.00	PK	10.84	H	10.06	36.00	3.00	55.42	-41.96	-13.00	28.96
857.00	8570.00	PK	10.45	V	10.06	36.00	3.00	56.52	-40.86	-13.00	27.86



8.10 Modulation Characteristics

Referenced from test report "TR_2046-21_FCC_PT90_Booster Class B_DL_".

Limits from FCC Parts 2.1047, and test procedure from ANSI C63.26-2015.

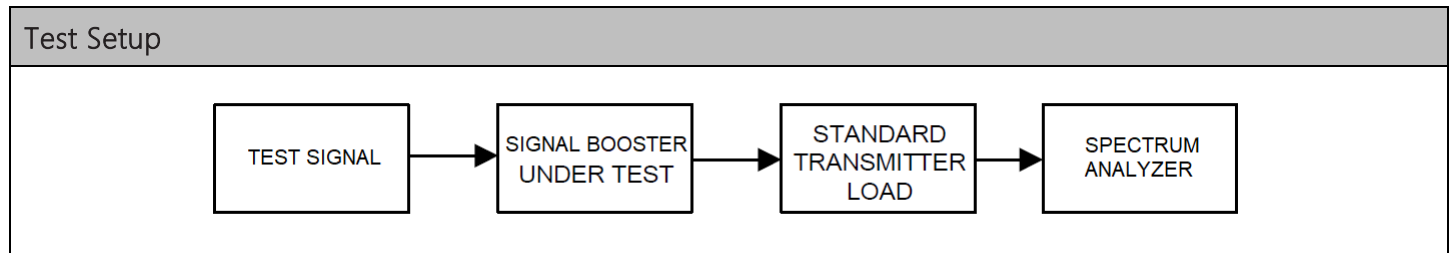


N/A. The EUT does not have any means to modulate the incoming signal.

8.11 Frequency Stability

Referenced from test report "TR_2046-21_FCC_PT90_Booster Class B_DL_".

Limits from FCC Parts 2.1055, 90.213 (a); and test procedure from ANSI C63.26-2015 and FCC KDB 935210 D05 v01r04 Industrial Signal Boosters.

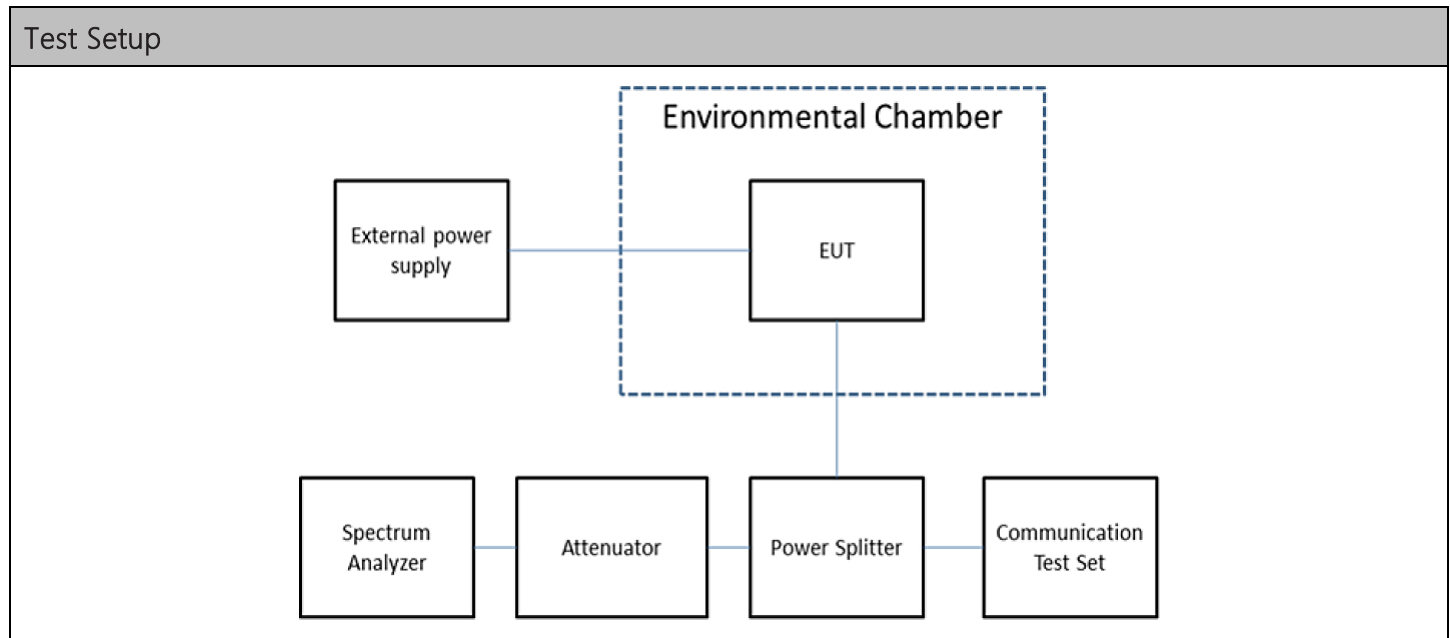

Test Results, Mode 1		
Tuned Frequency (MHz)	Max Deviation (ppm)	Limit (ppm)
n/a	n/a	n/a

N/A. The EUT does not alter the input signal in any way.



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.12 Transient Frequency Behavior

Referenced from test report "TR_2046-21_FCC_PT90_Booster Class B_DL_1".

Limits from FCC Part 90.214; and test procedure from ANSI C63.26-2015.

N/A. The EUT does not "key-on" or "key off", and instead transmits indefinitely.



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.13 Adjacent channel power limits

Referenced from test report "TR_2046-21_FCC_PT90_Booster Class B_DL_1".

Limits from FCC Part 90.221, and test procedure from ANSI C63.26-2015.

N/A. Device 800 MHz Band does not accommodate >25 kHz signals.



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

9. Photographs of the EUT

Photographs of the EUT and any manufacturer supplied accessories to be used with the EUT are in separate supplementary documents labelled EXTERNAL PHOTOS and INTERNAL PHOTOS.

10. Test Setup Photographs

Test setup photographs are located in a separate supplementary document labelled TEST SETUP PHOTOS.

11. History of Test Report Changes

Test Report #	Revision #	Description	Date of Issue
TR_2050-21_FCC_PT90_Booster Class A_DL_1	1	Initial release	June 3, 2021
TR_2050-21_FCC_PT90_Booster Class A_DL_2	2	Updated technical description and Sections 8.2 and 8.5	June 10, 2021



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

END OF TEST REPORT
