



## **K7 Max Wireless Mechanical Keyboard**

## **IN THE BOX:**

Keychron K7 Max Wireless Mechanical Keyboard x 1

Type-C Cable x 1

Manual x 1

Quick Start Guide x 1

Extra Keycaps Set x 1


Type-A to Type-C Adapter x 1

Type-A 2.4GHz Receiver x 1

# QUICK START GUIDE

If you are a Windows user, please find the appropriate keycaps in the box, then follow the instructions below to find and replace the following keycaps.

Mac / Windows

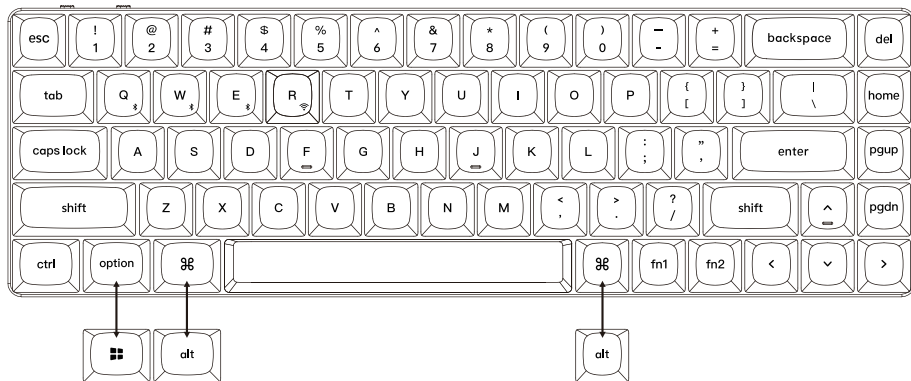


## 1 Connect 2.4GHz Receiver



Connect the 2.4GHz receiver to the device USB port.



Switch toggle to 2.4GHz mode



G = 2.4GHz




Note: For the best wireless experience, we recommend using the extension adapter for receiver and putting the 2.4GHz receiver somewhere on your desk close to your keyboard for a low rate of latency and fewer signal interferences.


## 2 Connect Bluetooth



Switch toggle to Bluetooth



Press fn1 + Q (for 4 seconds) and pair with device named Keychron K7 Max.




### 3 Connect Cable



### 4 Switch To The Right System

Please make sure the system toggle on the top left corner has been switched to the same system as your computer's operating system.



## 5 The VIA Key Remapping Software

Please visit [usevia.app](https://usevia.app) to use the online VIA software to remap the keys.  
If the VIA cannot recognize your keyboard, please reach our support to get the instruction.




\*The online VIA software can only run on the latest version of Chrome, Edge, and Opera browsers yet.

\*VIA only works when the keyboard is connected by wire to the computer.

---

## 6 The Layers

There are five layers of key settings on the keyboard.  
The layer 0 is for the Mac system.  
The layer 1 is for the Windows system.  
The layer 2 is for the Mac Multimedia keys.  
The layer 3 is for the Windows Multimedia keys.  
The layer 4 is for the Function keys.



If your system toggle is switched to Mac, then the layer 0 will be activated.



If your system toggle is switched to Windows, then the layer 1 will be activated.



## 7 The Backlight

Press fn1 + A to change the lighting effect



fn1 + A

Press fn1 + caps lock to turn the backlight on/off



fn1 + caps lock

---

## 8 Adjust The Backlight Brightness

Press fn1 + S to increase the backlight brightness



fn1 + S


Press fn1 + X to decrease the backlight brightness




fn1 + X

## 9 Adjust The Backlight Speed

Press fn1 + G to increase the light effect speed

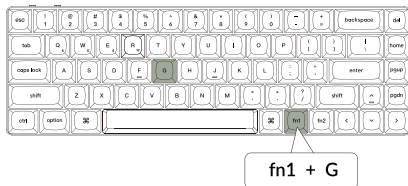

Press fn1 + B to decrease the light effect speed

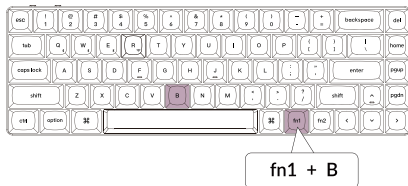


---

## 10 Warranty

The keyboard is highly customizable and easy to be rebuilt. If anything goes wrong with any of the keyboard components of keyboard during the warranty period, we will only replace the defective parts of the keyboard, not the whole keyboard.



## 11 Factory Reset

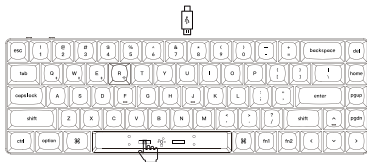

Troubleshooting? Don't know what's going on with the keyboard?

1. Download the right firmware and QMK Toolbox from our website.
  2. Unplug the power cable and switch the keyboard to Cable mode.
  3. Remove the space bar keycap to find the reset button on the PCB.
  4. Hold the reset key first, then plug the power cable into the keyboard.  
Release the reset key after 2 seconds, and the keyboard will now enter DFU mode.
  5. Flash the firmware with the QMK Toolbox.
  6. Factory reset the keyboard by pressing fn2 + J + Z (for 4 seconds).
- \*Step by step guide can be found on our website.

## K7 MAX WIRELESS MECHANICAL KEYBOARD SPECIFICATIONS

Number of keys: 68

Switch type: Mechanical

Battery: 1550mAh

Charging time: Around 3 hours

Charging port: USB Type-C

Mode: Bluetooth / Wired / 2.4GHz




Bluetooth operating distance: Within 10 meters (open space)

Name of Bluetooth device: Keychron K7 Max

### LED STATUS OVERVIEW

| Function  | LED Location        | Status                                                                                 |
|-----------|---------------------|----------------------------------------------------------------------------------------|
| Charging  | Power Indicator     | Low Power - Red Light Blinking<br>Charging - Static Red<br>Full charged - Static Green |
| Bluetooth | Bluetooth Indicator | Switching - Fast Blinking<br>Paired - Light Off<br>Pairing - Slow Blinking             |
| 2.4G      | 2.4G Indicator      | Reconnecting-Fast Blinking<br>Paired - Light Off<br>Pairing - Slow Blinking            |


# K7 MAX WIRELESS MECHANICAL KEYBOARD OVERVIEW

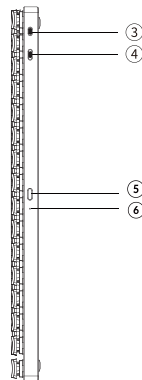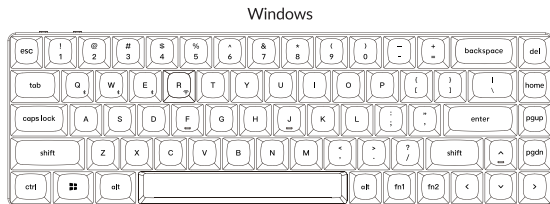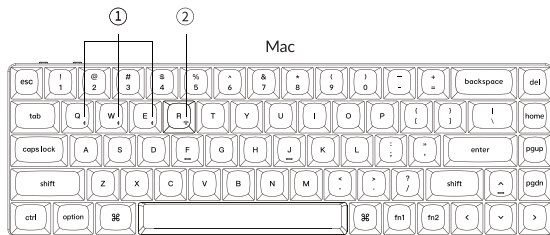


- ① Bluetooth Indicator
- ② 2.4G Indicator
- ③ Win/Android Mac/iOS (OS Toggle)
- ④ 2.4G / Cable / BT (Connection Mode Toggle)
- ⑤ Charging Port
- ⑥ Power Indicator

## DEFAULT KEY LAYOUT:

LAYER 0: This layer will be activated when your keyboard's system toggle is switched to Mac.

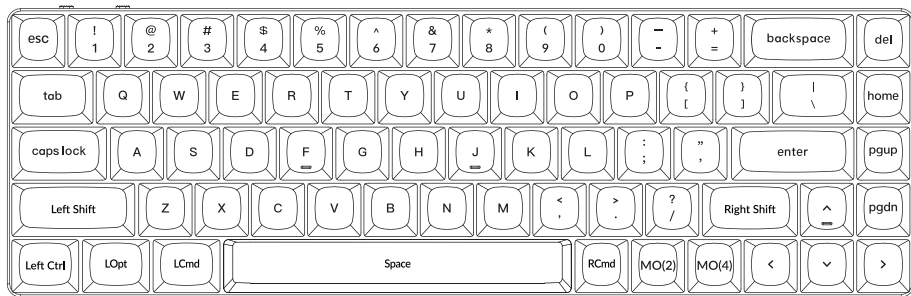

**LAYER 1:** This layer will be activated when your keyboard's system toggle is switched to Windows.

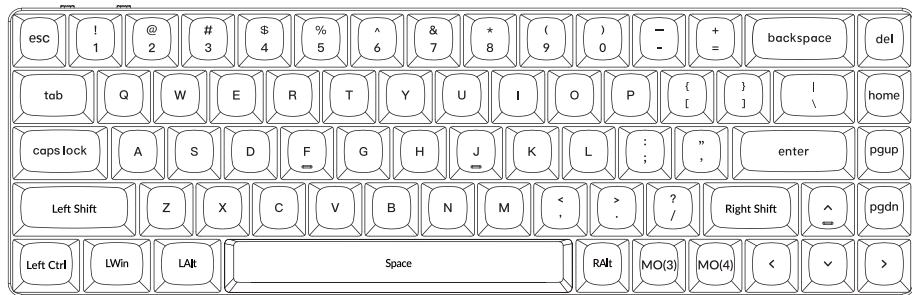

LWin = Left Windows    LAlt = Left Alt    RAlt = Right Alt