


EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band5_CH 39_NSS1_ANT 0+1	Test Voltage	AC 120V/60Hz

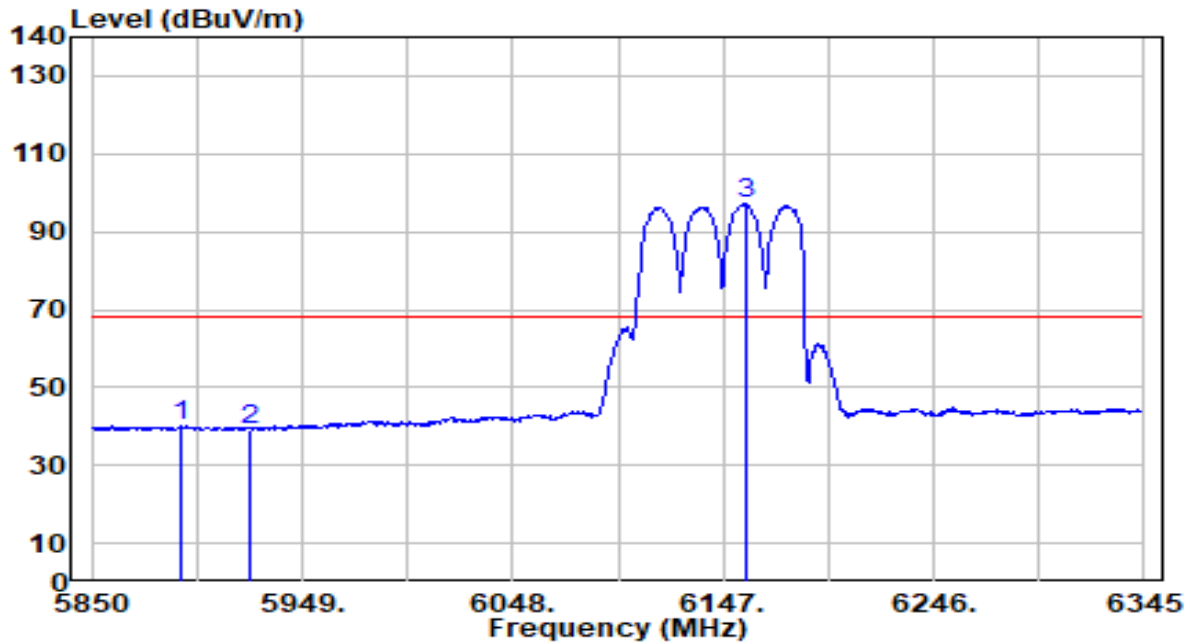


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5892.570	39.51	0.55	40.06	-28.14	68.20	193	221	Average
2		5925.000	38.66	0.53	39.18	-29.02	68.20	193	221	Average
3		6157.395	95.87	1.29	97.17	N/A	N/A	193	221	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band8_CH 215_NSS1_ANT 0+1	Test Voltage	AC 120V/60Hz

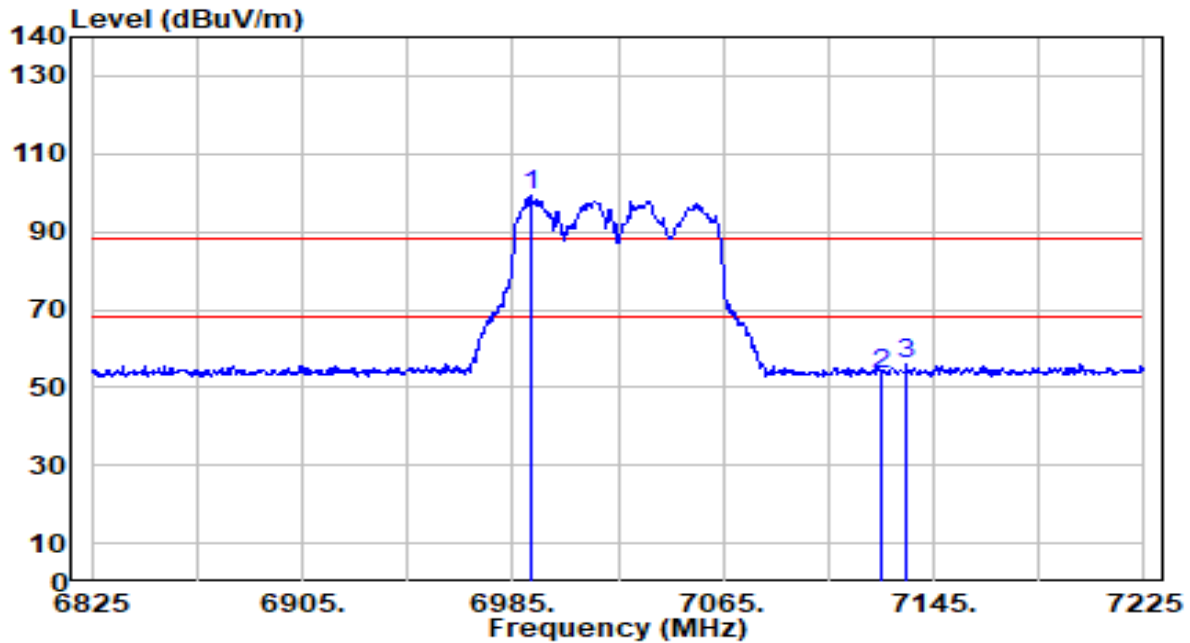


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6991.800	95.53	3.85	99.38	N/A	N/A	186	239	Peak
2	7125.000	49.35	3.88	53.22	-34.98	88.20	186	239	Peak
3	* 7134.600	52.32	3.88	56.20	-32.00	88.20	186	239	Peak

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band8_CH 215_NSS1_ANT 0+1	Test Voltage	AC 120V/60Hz

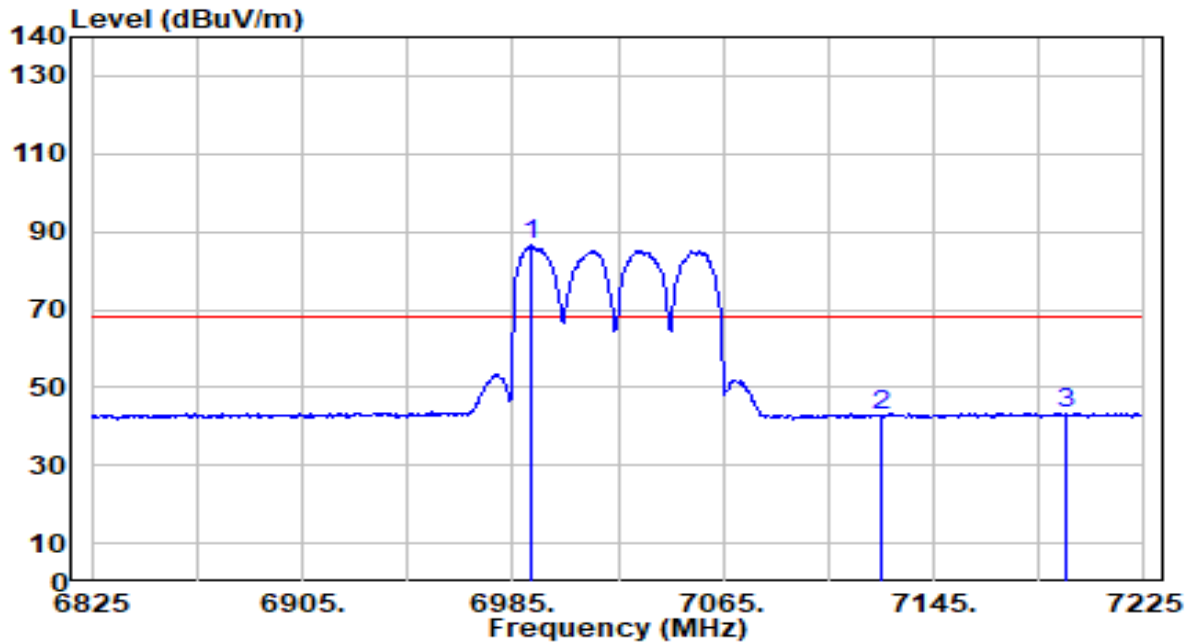


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6992.200	82.74	3.85	86.59	N/A	N/A	186	239	Average
2	7125.000	38.77	3.88	42.65	-25.55	68.20	186	239	Average
3	* 7195.400	39.46	3.89	43.35	-24.85	68.20	186	239	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band8_CH 215_NSS1_ANT 0+1	Test Voltage	AC 120V/60Hz

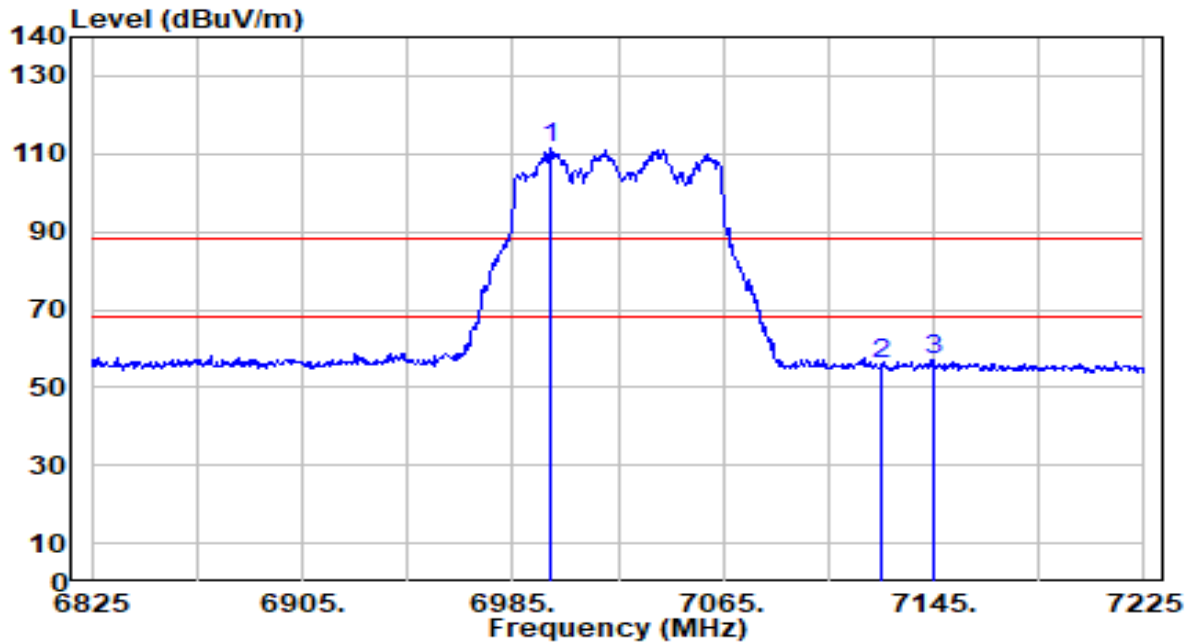


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6999.800	107.62	3.85	111.47	N/A	N/A	196	17	Peak
2	7125.000	52.30	3.88	56.18	-32.02	88.20	196	17	Peak
3	* 7144.600	53.10	3.88	56.98	-31.22	88.20	196	17	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band8_CH 215_NSS1_ANT 0+1	Test Voltage	AC 120V/60Hz

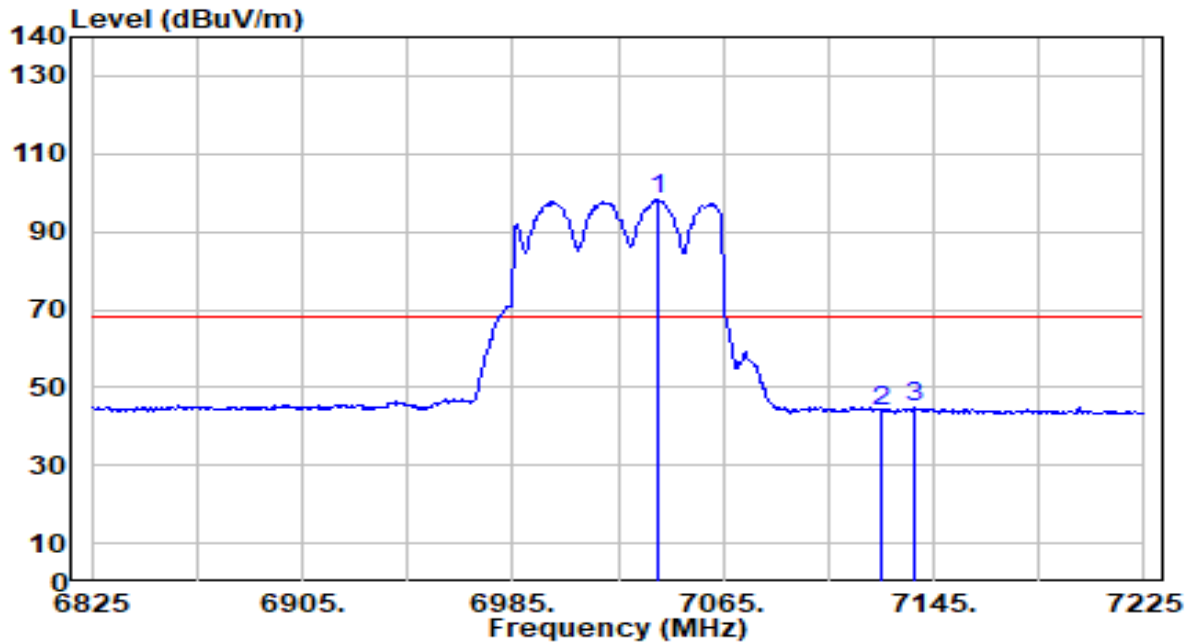


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7039.800	94.61	3.86	98.47	N/A	N/A	196	17	Average
2	7125.000	40.08	3.88	43.96	-24.24	68.20	196	17	Average
3	* 7137.800	40.93	3.88	44.81	-23.39	68.20	196	17	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-160MHz_TX_Band5_CH 47_NSS1_ANT 0+1	Test Voltage	AC 120V/60Hz

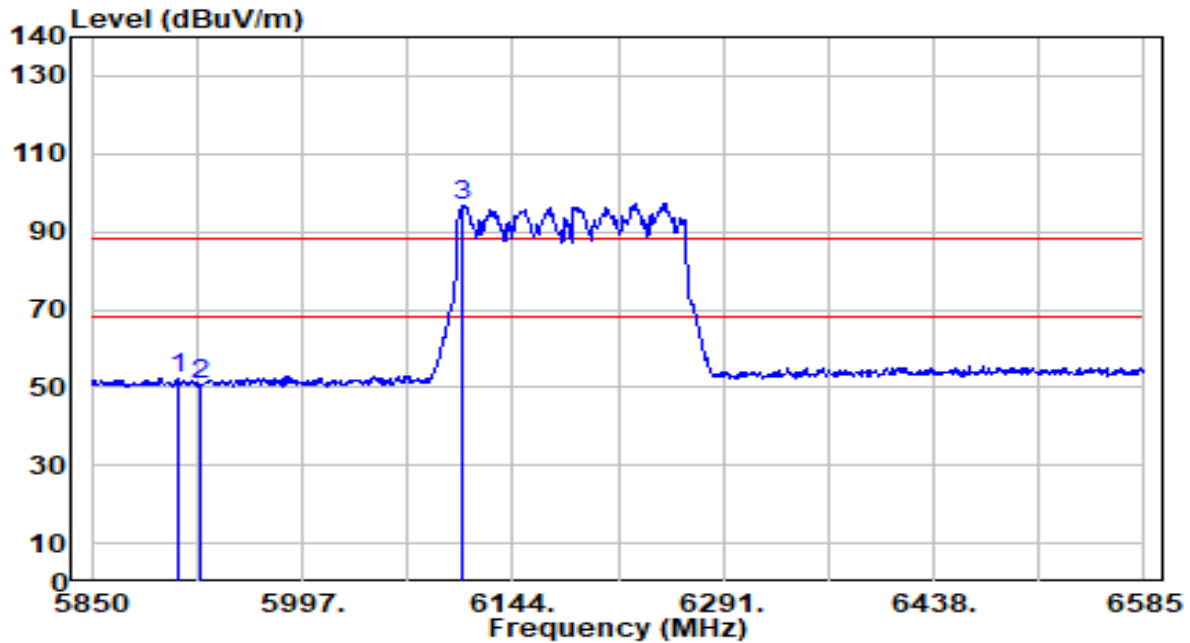


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5909.535	52.00	0.54	52.54	-35.66	88.20	192	215	Peak
2		5925.000	50.32	0.53	50.85	-37.35	88.20	192	215	Peak
3		6108.720	95.74	1.04	96.78	N/A	N/A	192	215	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-160MHz_TX_Band5_CH 47_NSS1_ANT 0+1	Test Voltage	AC 120V/60Hz

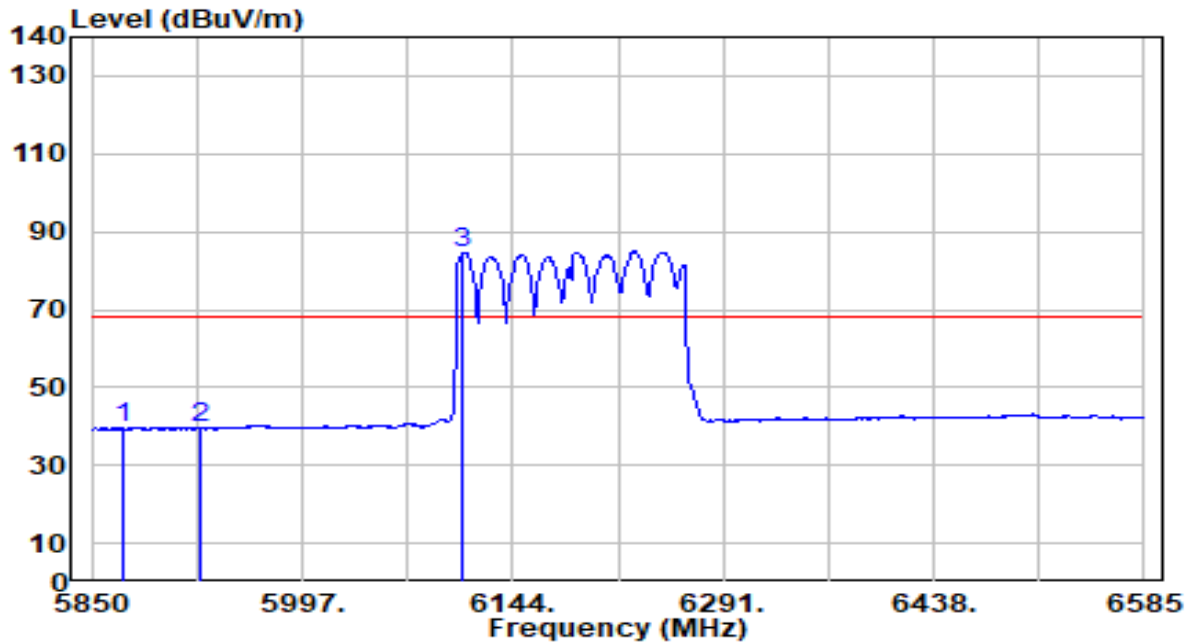


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5871.315	39.11	0.57	39.68	-28.52	68.20	192	215	Average
2		5925.000	38.96	0.53	39.49	-28.71	68.20	192	215	Average
3		6109.455	83.62	1.04	84.66	N/A	N/A	192	215	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-160MHz_TX_Band5_CH 47_NSS1_ANT 0+1	Test Voltage	AC 120V/60Hz

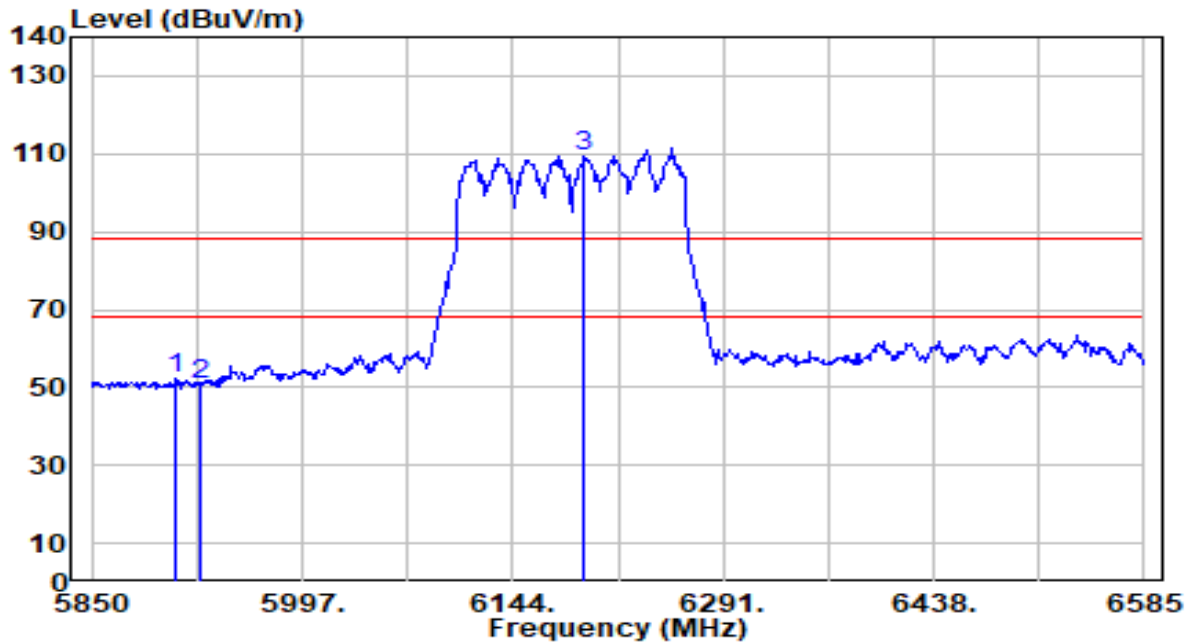


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5908.800	51.92	0.54	52.46	-35.74	88.20	179	224	Peak
2		5925.000	49.97	0.53	50.49	-37.71	88.20	179	224	Peak
3		6193.980	107.81	1.48	109.30	N/A	N/A	179	224	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-160MHz_TX_Band5_CH 47_NSS1_ANT 0+1	Test Voltage	AC 120V/60Hz

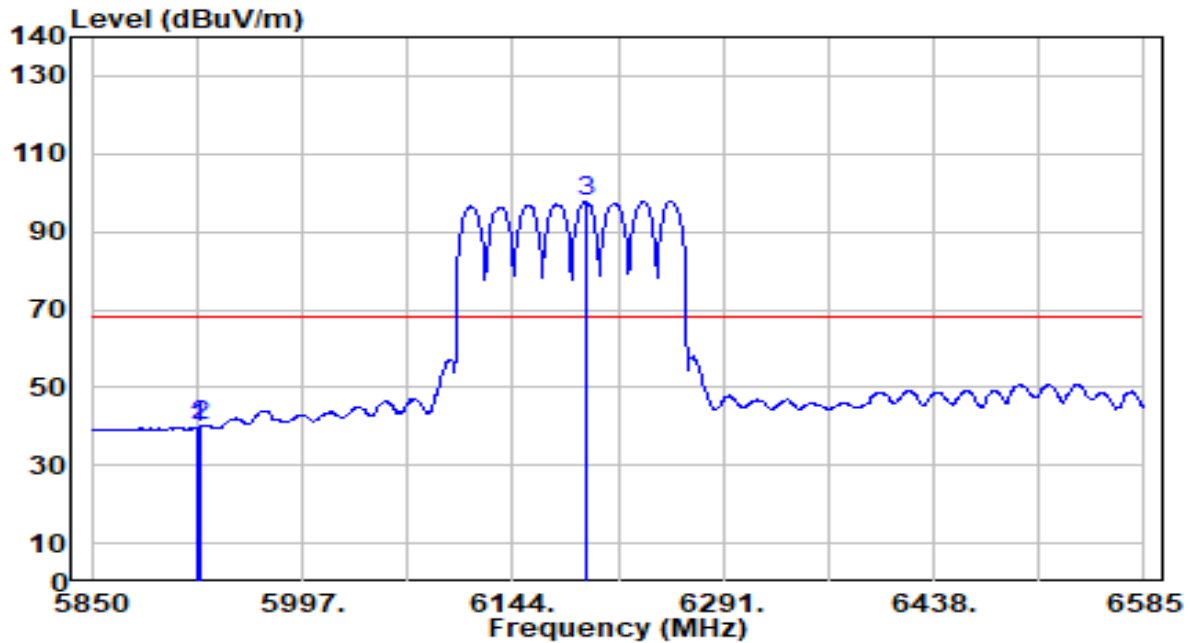


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5923.500	39.24	0.53	39.77	-28.43	68.20	179	224	Average
2	* 5925.000	39.39	0.53	39.91	-28.29	68.20	179	224	Average
3	6195.450	96.25	1.49	97.74	N/A	N/A	179	224	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-160MHz_TX_Band8_CH 207_NSS1_ANT 0+1	Test Voltage	AC 120V/60Hz

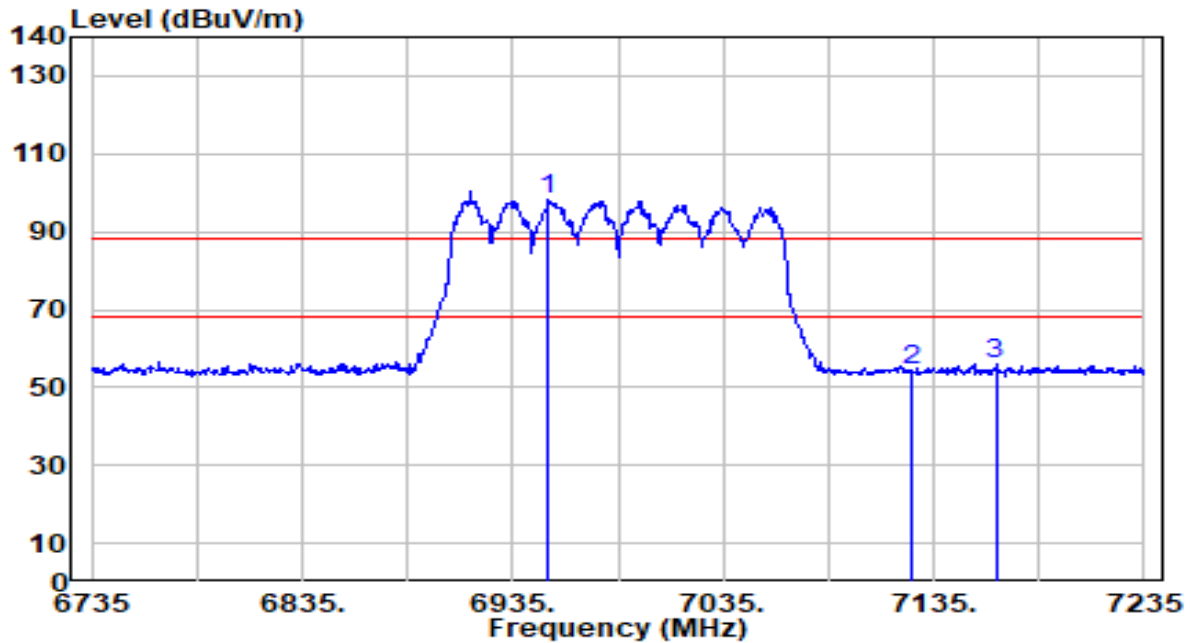


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6952.000	94.30	3.83	98.13	N/A	N/A	178	238	Peak
2	7125.000	50.34	3.88	54.22	-33.98	88.20	178	238	Peak
3	* 7164.500	52.28	3.89	56.17	-32.03	88.20	178	238	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-160MHz_TX_Band8_CH 207_NSS1_ANT 0+1	Test Voltage	AC 120V/60Hz

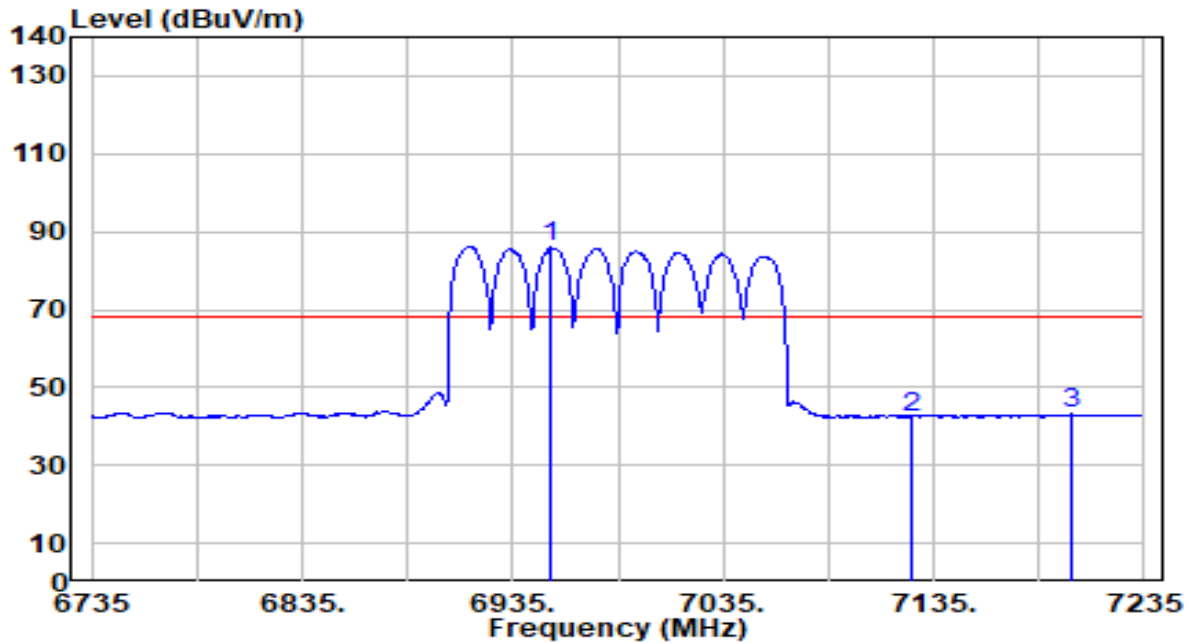


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6953.000	82.05	3.83	85.89	N/A	N/A	178	238	Average
2	7125.000	38.62	3.88	42.50	-25.70	68.20	178	238	Average
3	* 7200.000	39.19	3.89	43.08	-25.12	68.20	178	238	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-160MHz_TX_Band8_CH 207_NSS1_ANT 0+1	Test Voltage	AC 120V/60Hz

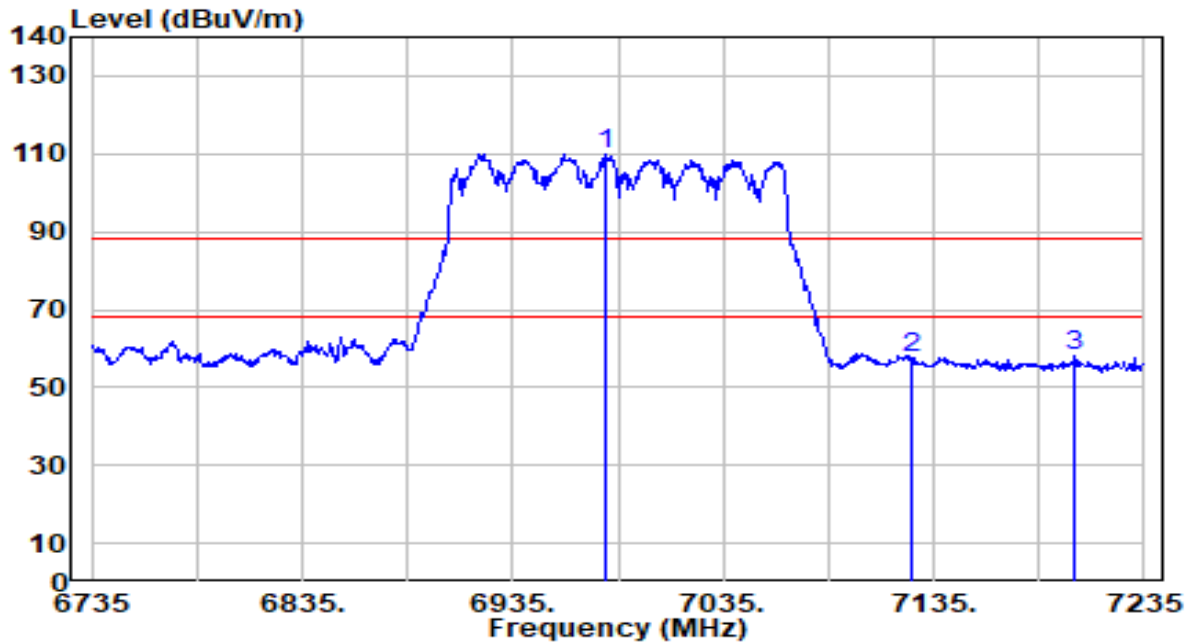


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6979.500	105.97	3.84	109.81	N/A	N/A	175	18	Peak
2	7125.000	53.51	3.88	57.39	-30.81	88.20	175	18	Peak
3	* 7202.000	54.32	3.89	58.22	-29.98	88.20	175	18	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-160MHz_TX_Band8_CH 207_NSS1_ANT 0+1	Test Voltage	AC 120V/60Hz

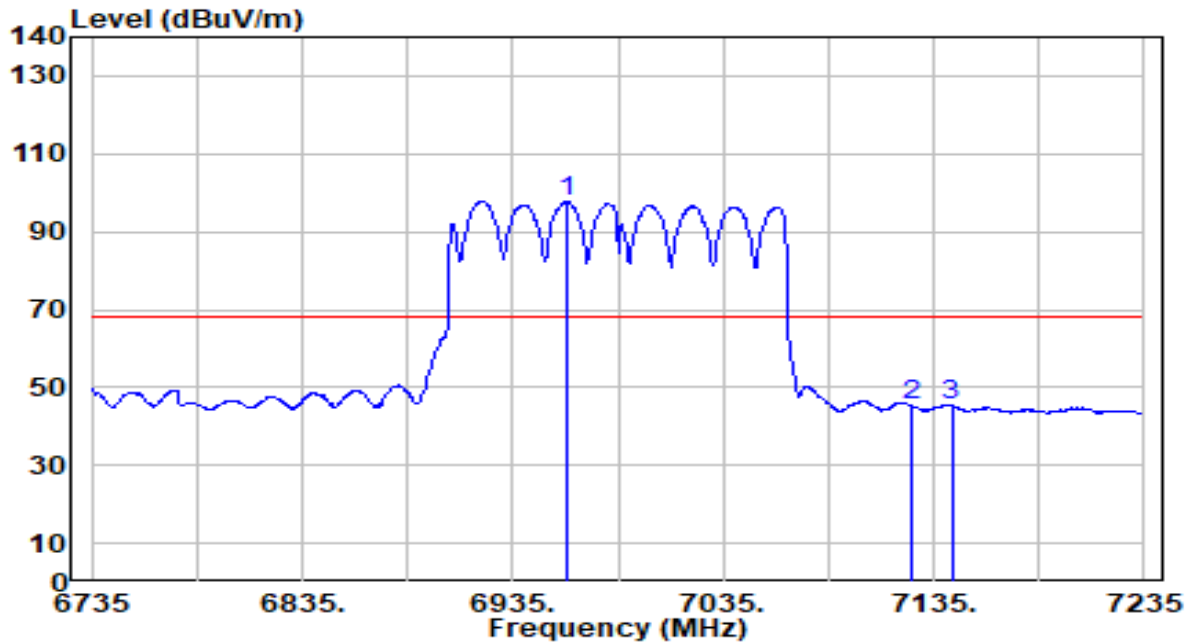


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6960.500	93.78	3.84	97.62	N/A	N/A	175	18	Average
2	7125.000	41.36	3.88	45.24	-22.96	68.20	175	18	Average
3	* 7143.500	41.66	3.88	45.54	-22.66	68.20	175	18	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_Band5_CH 35_NSS1_ANT 0+1	Test Voltage	AC 120V/60Hz

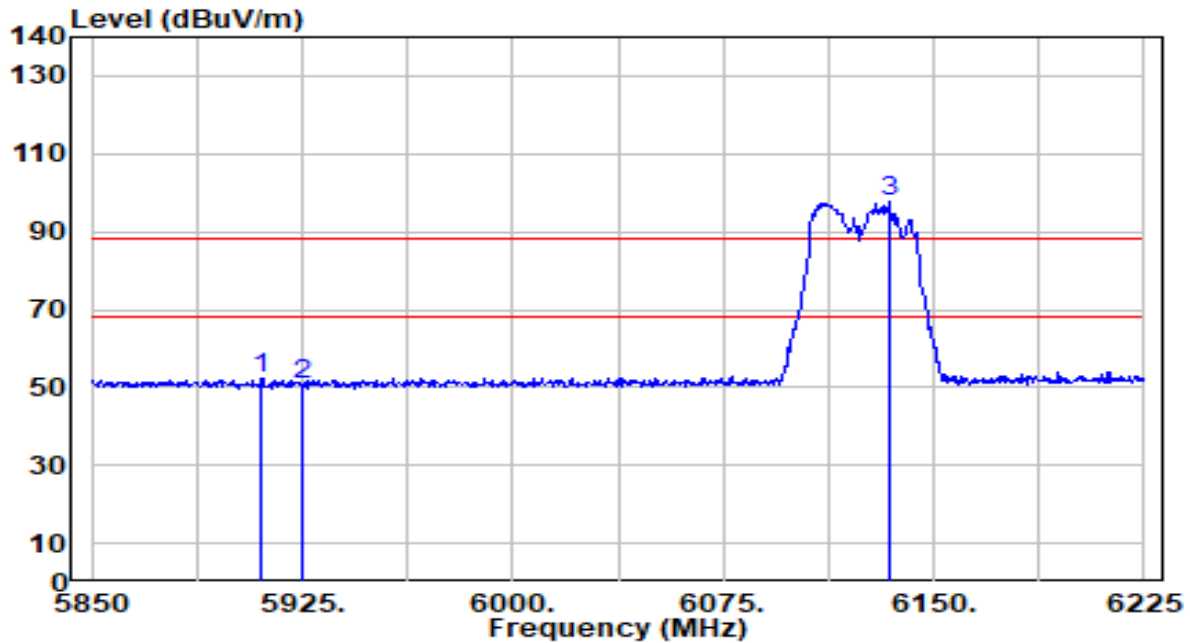


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5910.750	51.89	0.54	52.43	-35.77	88.20	193	213	Peak
2		5925.000	50.23	0.53	50.76	-37.44	88.20	193	213	Peak
3		6134.250	96.48	1.17	97.65	N/A	N/A	193	213	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_Band5_CH 35_NSS1_ANT 0+1	Test Voltage	AC 120V/60Hz

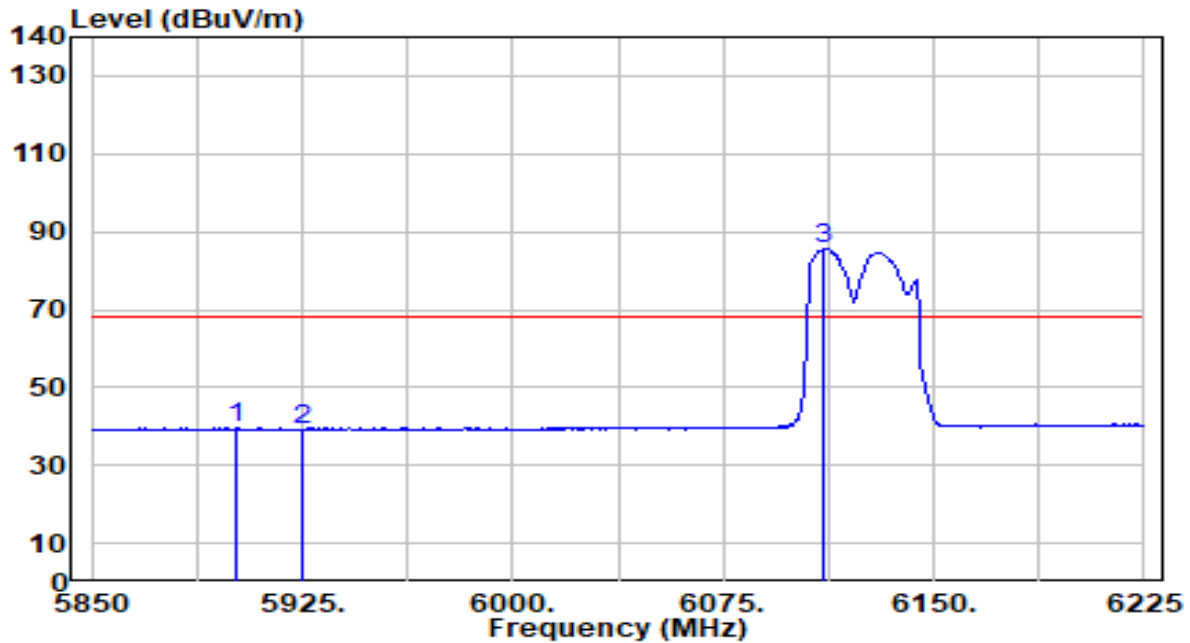


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5901.000	39.00	0.55	39.54	-28.66	68.20	193	213	Average
2		5925.000	38.77	0.53	39.30	-28.90	68.20	193	213	Average
3		6111.000	84.67	1.05	85.72	N/A	N/A	193	213	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_Band5_CH 35_NSS1_ANT 0+1	Test Voltage	AC 120V/60Hz

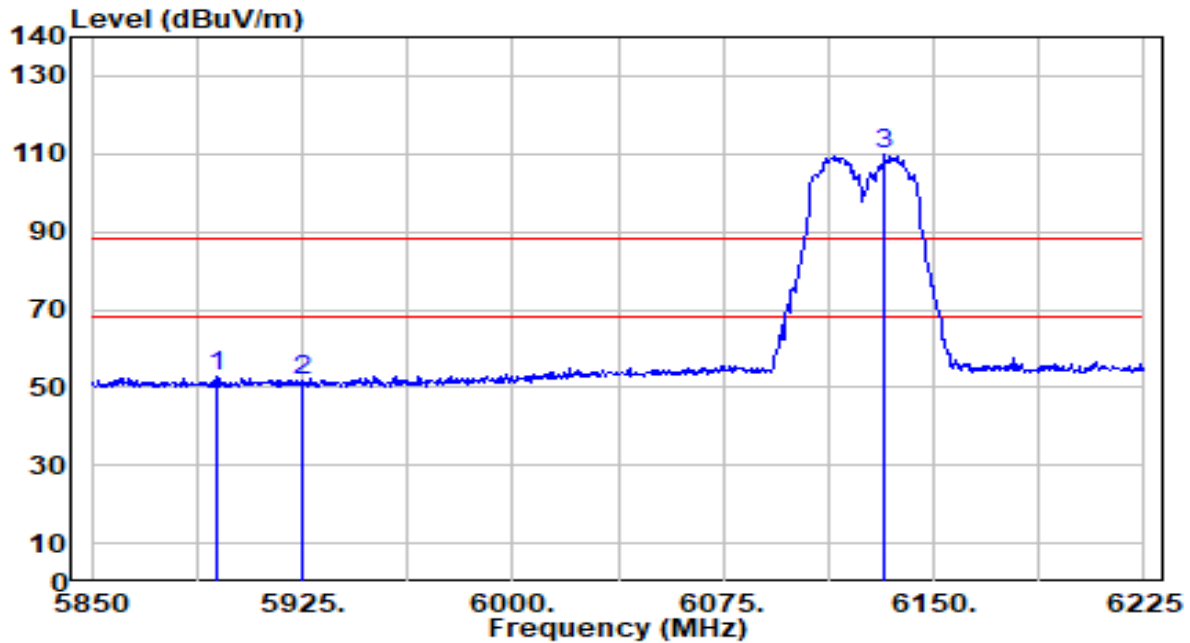


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5895.000	52.03	0.55	52.58	-35.62	88.20	178	33	Peak
2		5925.000	51.05	0.53	51.58	-36.62	88.20	178	33	Peak
3		6132.750	108.86	1.16	110.03	N/A	N/A	178	33	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_Band5_CH 35_NSS1_ANT 0+1	Test Voltage	AC 120V/60Hz

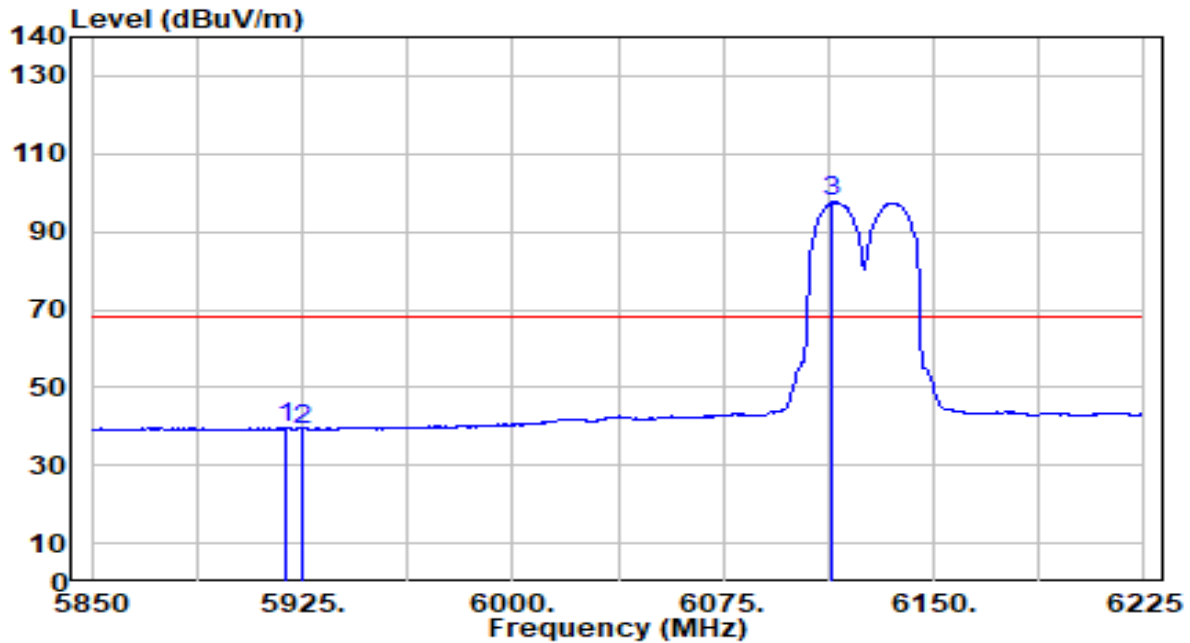


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5919.375	39.07	0.53	39.60	-28.60	68.20	178	33	Average
2		5925.000	38.78	0.53	39.31	-28.89	68.20	178	33	Average
3		6114.000	96.48	1.07	97.55	N/A	N/A	178	33	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_Band8_CH 227_NSS1_ANT 0+1	Test Voltage	AC 120V/60Hz

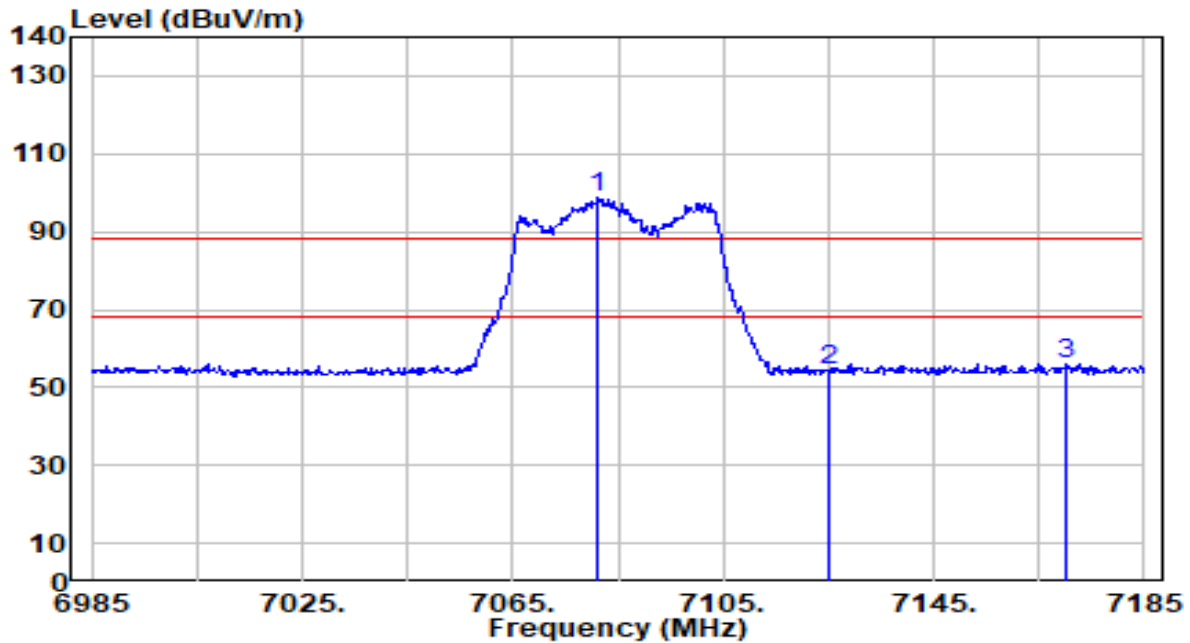


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7081.200	95.17	3.87	99.04	N/A	N/A	270	227	Peak
2	7125.000	50.48	3.88	54.35	-33.85	88.20	270	227	Peak
3	* 7170.400	52.14	3.89	56.03	-32.17	88.20	270	227	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_Band8_CH 227_NSS1_ANT 0+1	Test Voltage	AC 120V/60Hz

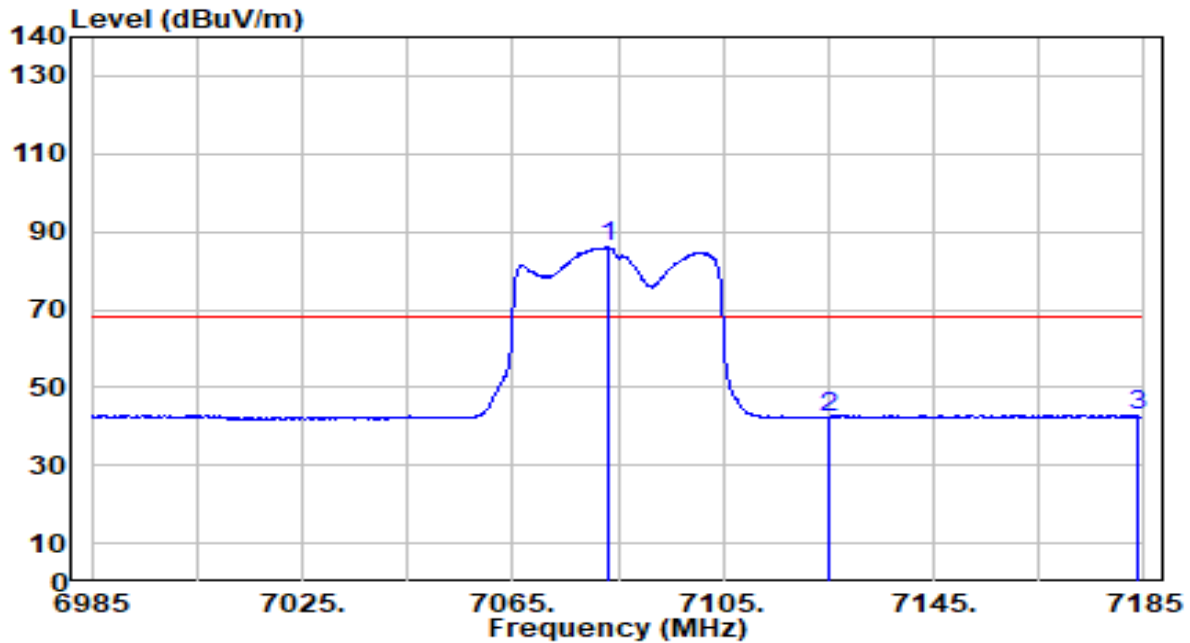


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7083.400	82.04	3.87	85.91	N/A	N/A	270	227	Average
2	7125.000	38.41	3.88	42.29	-25.91	68.20	270	227	Average
3	* 7184.000	38.88	3.89	42.77	-25.43	68.20	270	227	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_Band8_CH 227_NSS1_ANT 0+1	Test Voltage	AC 120V/60Hz

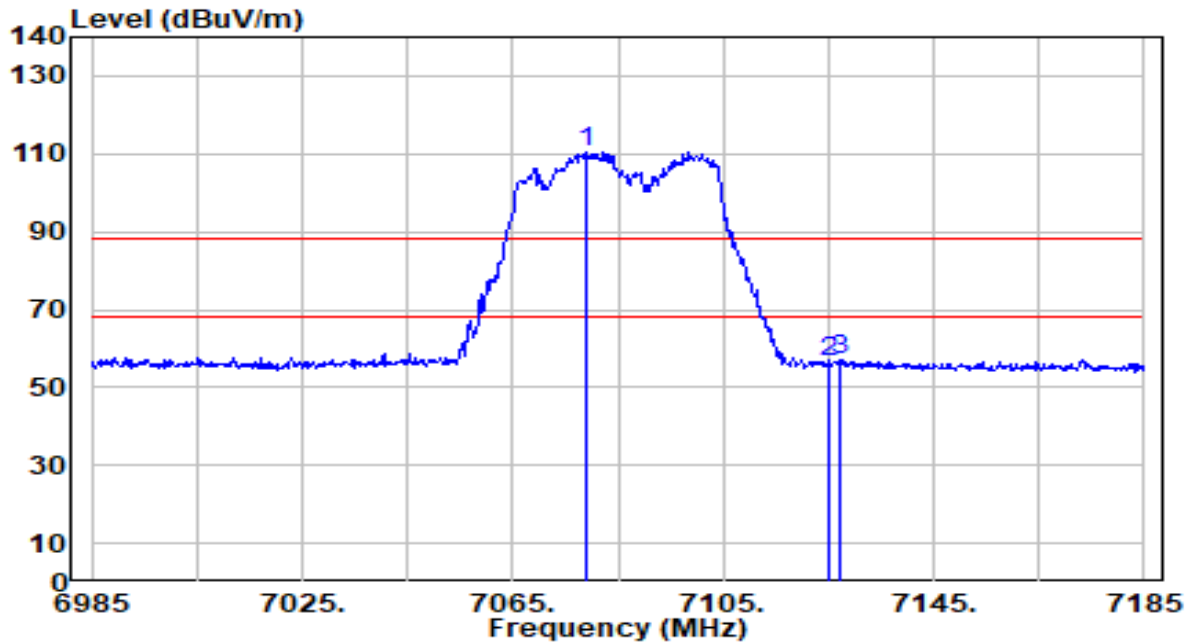


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7079.000	106.67	3.87	110.54	N/A	N/A	193	17	Peak
2	7125.000	52.65	3.88	56.53	-31.67	88.20	193	17	Peak
3	* 7127.400	53.16	3.88	57.04	-31.16	88.20	193	17	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_Band8_CH 227_NSS1_ANT 0+1	Test Voltage	AC 120V/60Hz

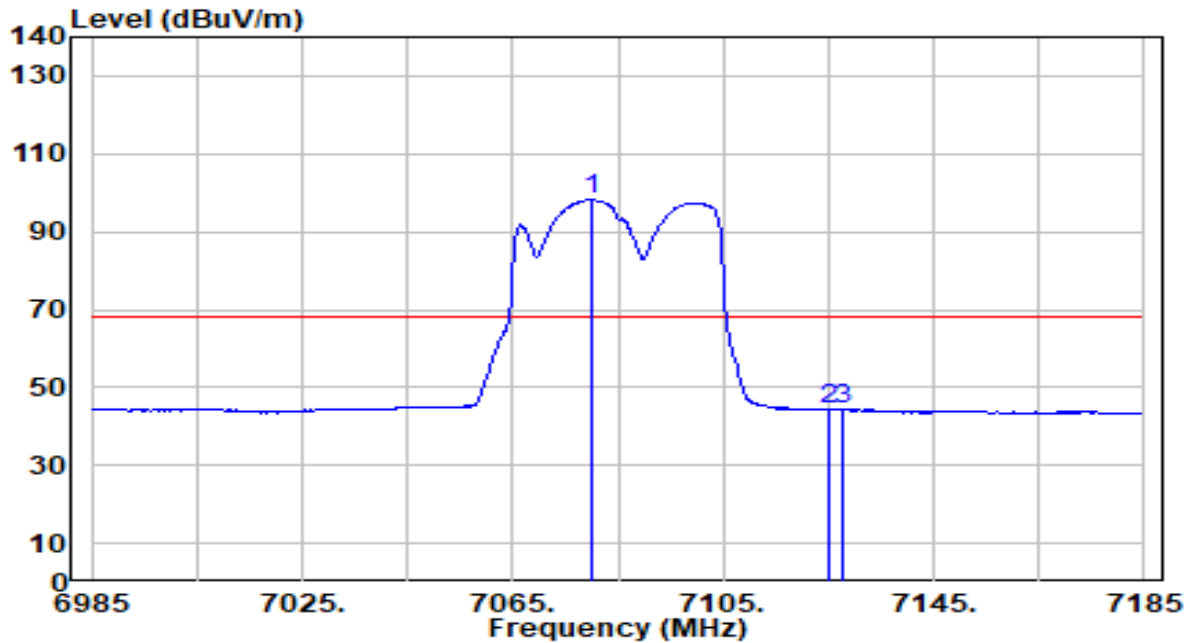


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7080.200	94.34	3.87	98.20	N/A	N/A	193	17	Average
2	* 7125.000	40.56	3.88	44.43	-23.77	68.20	193	17	Average
3	7127.600	40.49	3.88	44.36	-23.84	68.20	193	17	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-80MHz_TX_Band5_CH 39_NSS1_ANT 0+1	Test Voltage	AC 120V/60Hz

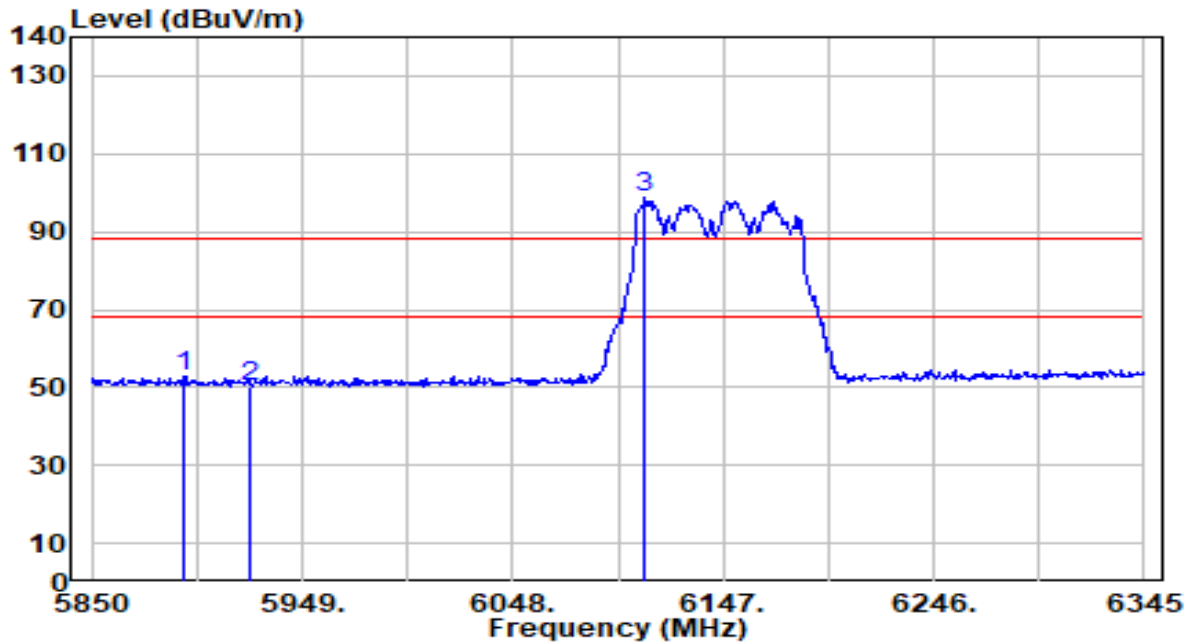


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5893.560	52.41	0.55	52.96	-35.24	88.20	192	214	Peak
2		5925.000	49.91	0.53	50.43	-37.77	88.20	192	214	Peak
3		6110.370	97.64	1.05	98.69	N/A	N/A	192	214	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-80MHz_TX_Band5_CH 39_NSS1_ANT 0+1	Test Voltage	AC 120V/60Hz

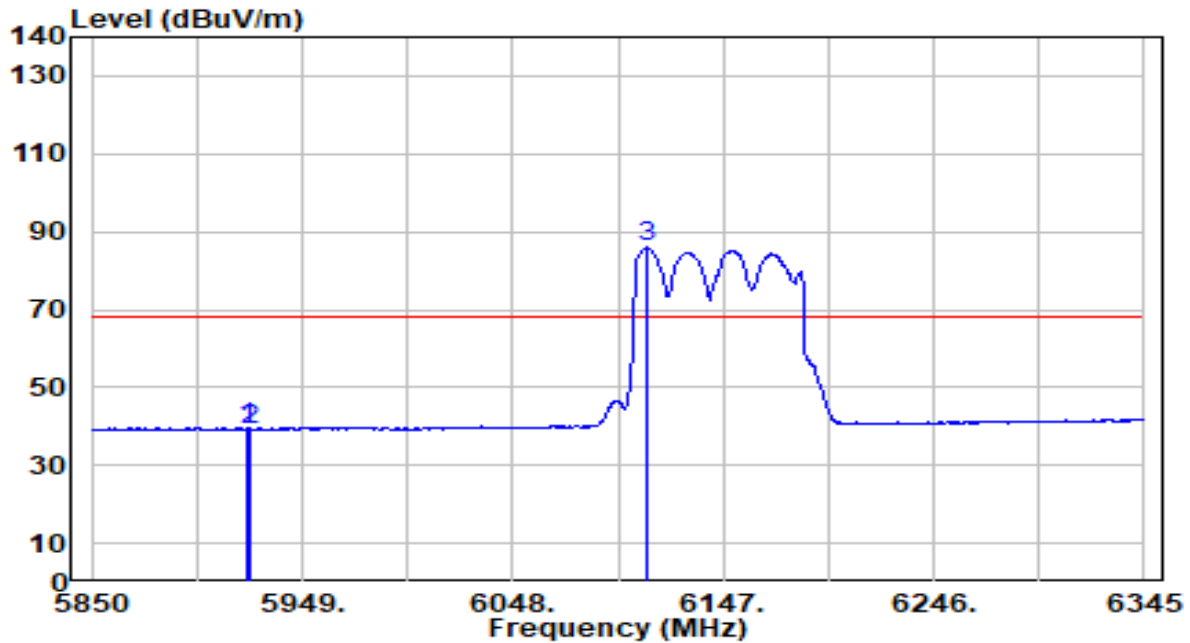


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5922.765	39.20	0.53	39.73	-28.47	68.20	192	214	Average
2	5925.000	38.73	0.53	39.26	-28.94	68.20	192	214	Average
3	6110.865	84.81	1.05	85.86	N/A	N/A	192	214	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-80MHz_TX_Band5_CH 39_NSS1_ANT 0+1	Test Voltage	AC 120V/60Hz

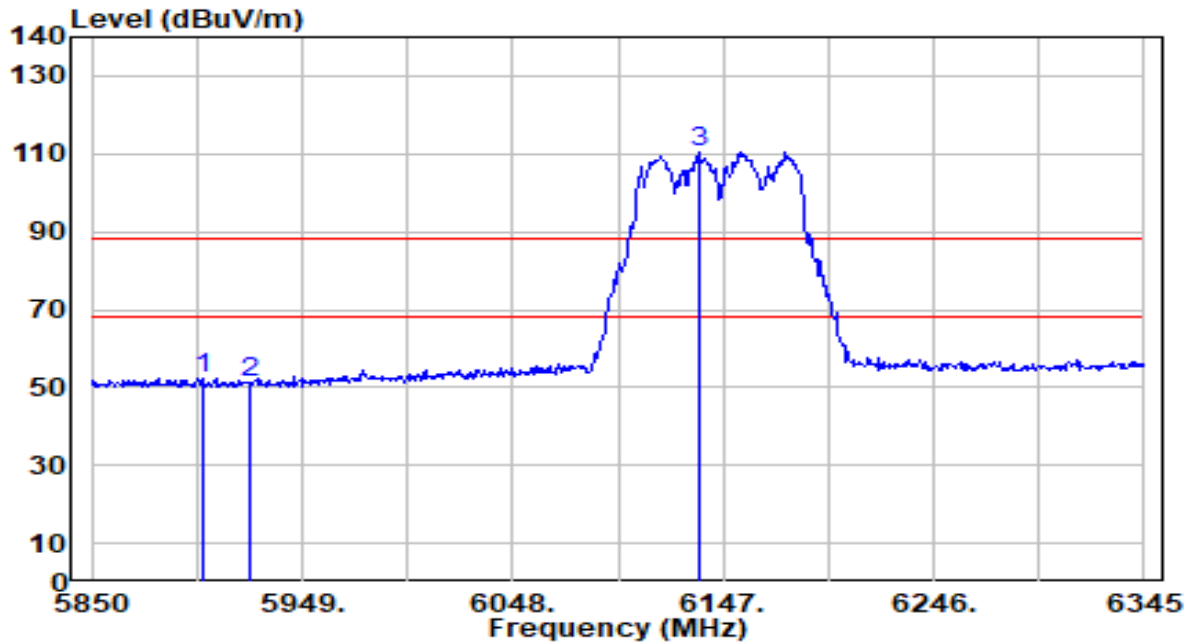


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5901.975	51.92	0.54	52.47	-35.73	88.20	194	221	Peak
2		5925.000	50.67	0.53	51.20	-37.00	88.20	194	221	Peak
3		6135.615	109.16	1.18	110.34	N/A	N/A	194	221	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-80MHz_TX_Band5_CH 39_NSS1_ANT 0+1	Test Voltage	AC 120V/60Hz

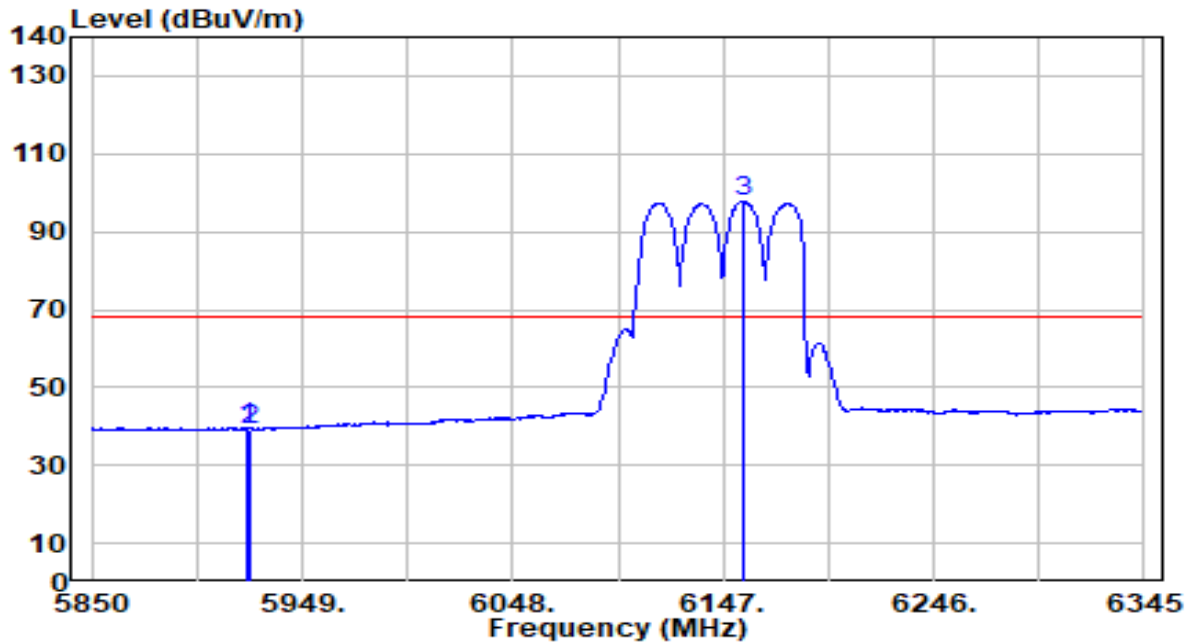


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5923.260	39.02	0.53	39.55	-28.65	68.20	194	221	Average
2		5925.000	38.78	0.53	39.31	-28.89	68.20	194	221	Average
3		6156.900	96.61	1.29	97.90	N/A	N/A	194	221	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-80MHz_TX_Band8_CH 215_NSS1_ANT 0+1	Test Voltage	AC 120V/60Hz

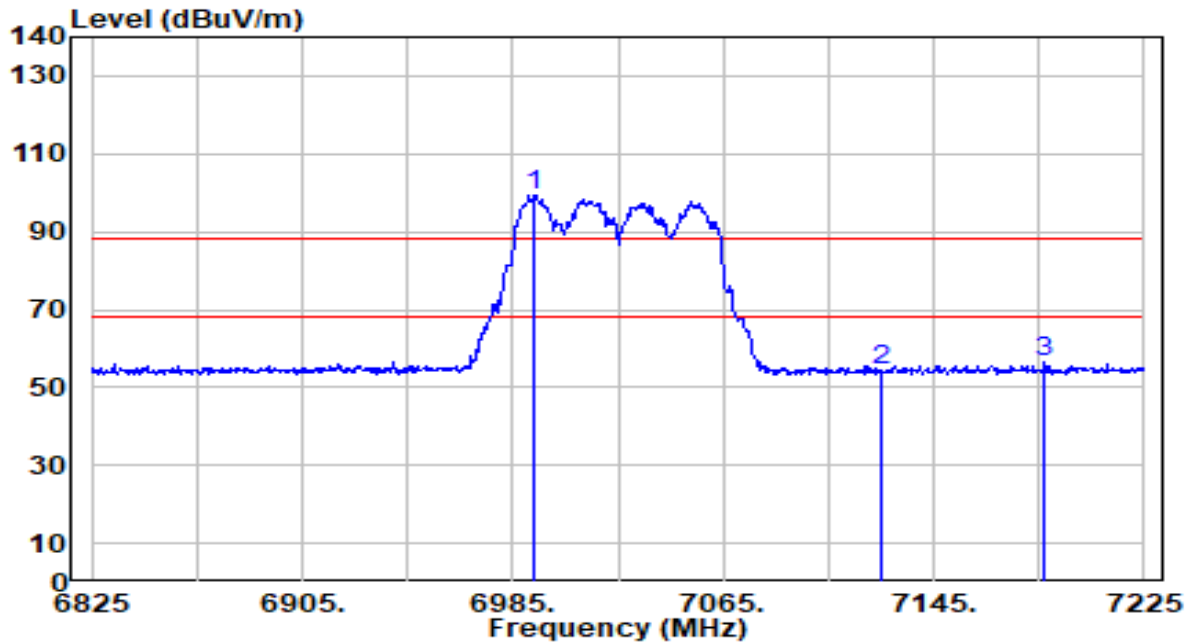


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6993.400	95.62	3.85	99.47	N/A	N/A	172	239	Peak
2	7125.000	50.46	3.88	54.34	-33.86	88.20	172	239	Peak
3	* 7187.000	52.42	3.89	56.31	-31.89	88.20	172	239	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-80MHz_TX_Band8_CH 215_NSS1_ANT 0+1	Test Voltage	AC 120V/60Hz

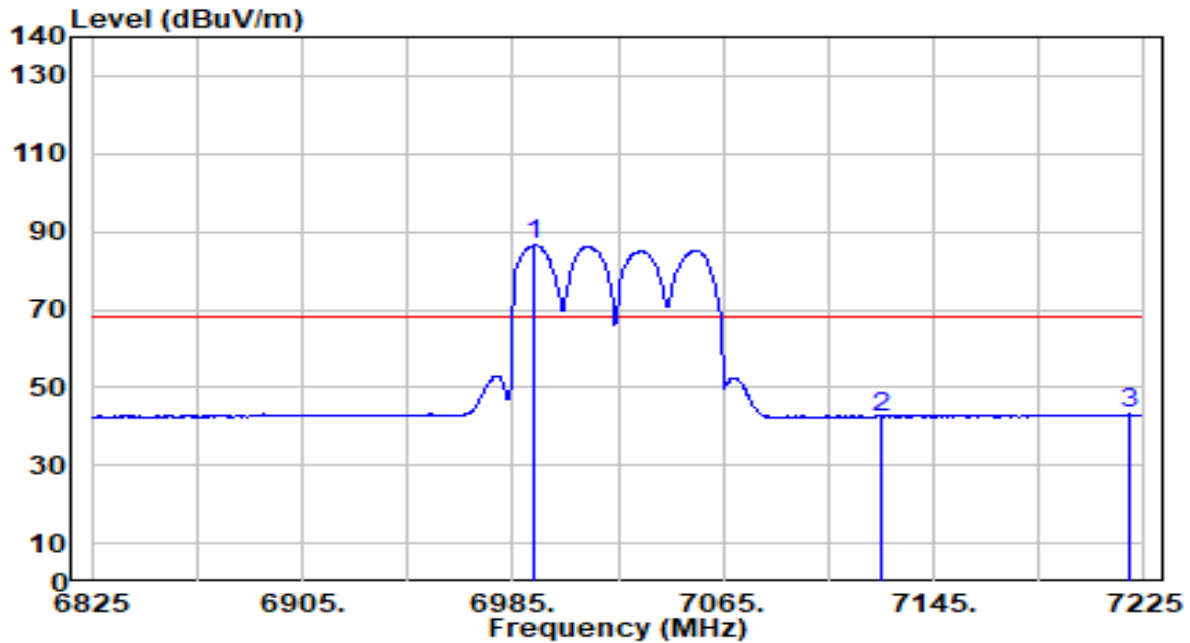


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6993.000	82.79	3.85	86.63	N/A	N/A	172	239	Average
2	7125.000	38.62	3.88	42.50	-25.70	68.20	172	239	Average
3	* 7219.400	39.21	3.90	43.11	-25.09	68.20	172	239	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-80MHz_TX_Band8_CH 215_NSS1_ANT 0+1	Test Voltage	AC 120V/60Hz

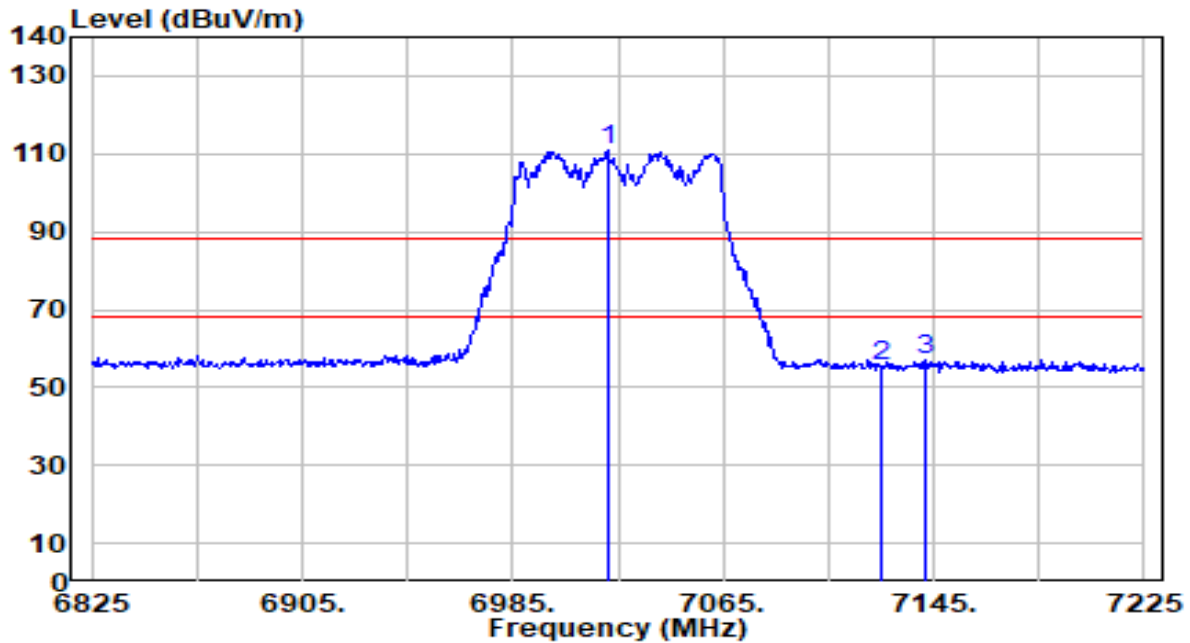


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7021.400	107.09	3.85	110.94	N/A	N/A	187	17	Peak
2	7125.000	51.54	3.88	55.42	-32.78	88.20	187	17	Peak
3	* 7141.800	53.23	3.88	57.11	-31.09	88.20	187	17	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-80MHz_TX_Band8_CH 215_NSS1_ANT 0+1	Test Voltage	AC 120V/60Hz

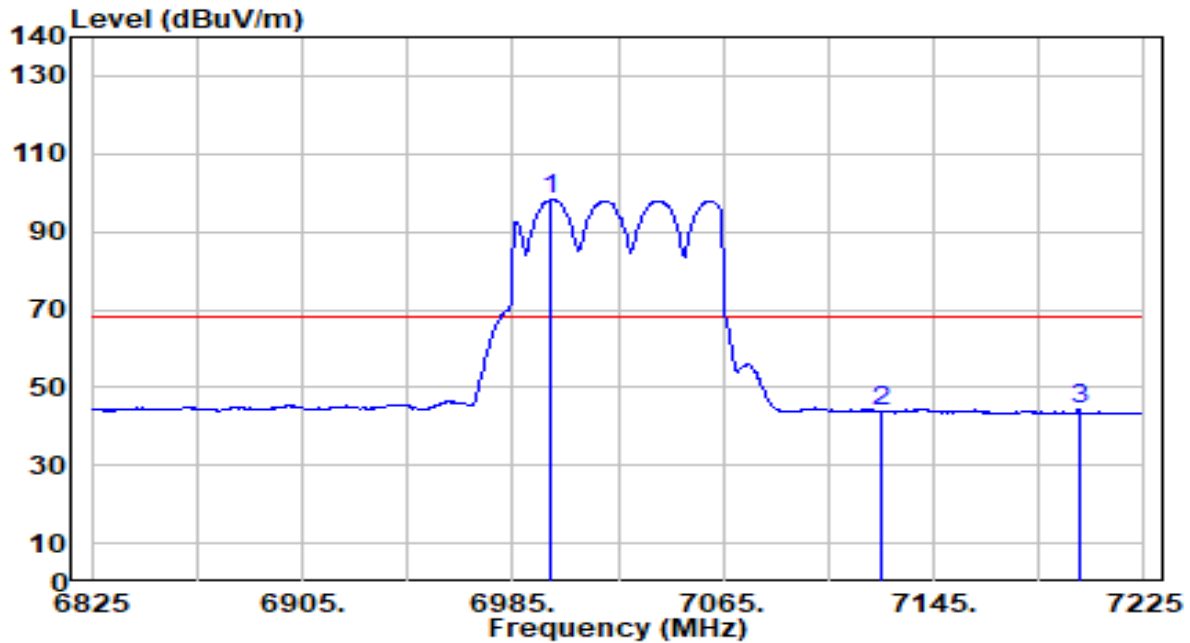


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6999.000	94.32	3.85	98.17	N/A	N/A	187	17	Average
2	7125.000	40.10	3.88	43.97	-24.23	68.20	187	17	Average
3	* 7200.600	40.60	3.89	44.49	-23.71	68.20	187	17	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-160MHz_TX_Band5_CH 47_NSS1_ANT 0+1	Test Voltage	AC 120V/60Hz

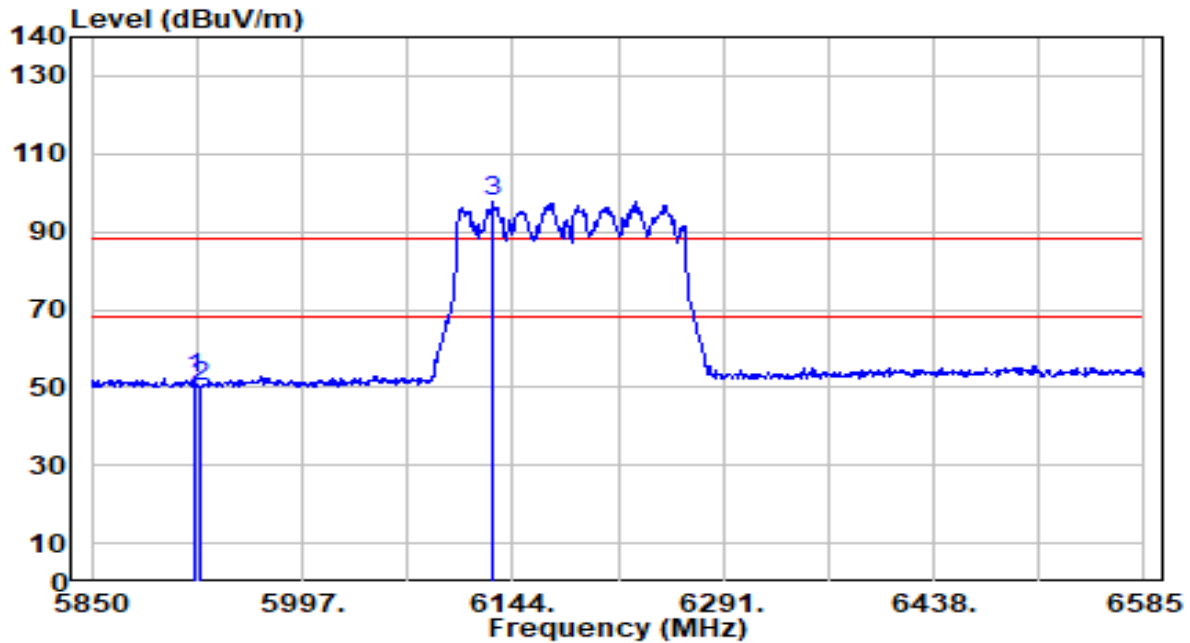


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5921.295	51.65	0.53	52.18	-36.02	88.20	200	215	Peak
2		5925.000	49.76	0.53	50.29	-37.91	88.20	200	215	Peak
3		6130.770	96.32	1.15	97.48	N/A	N/A	200	215	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-160MHz_TX_Band5_CH 47_NSS1_ANT 0+1	Test Voltage	AC 120V/60Hz

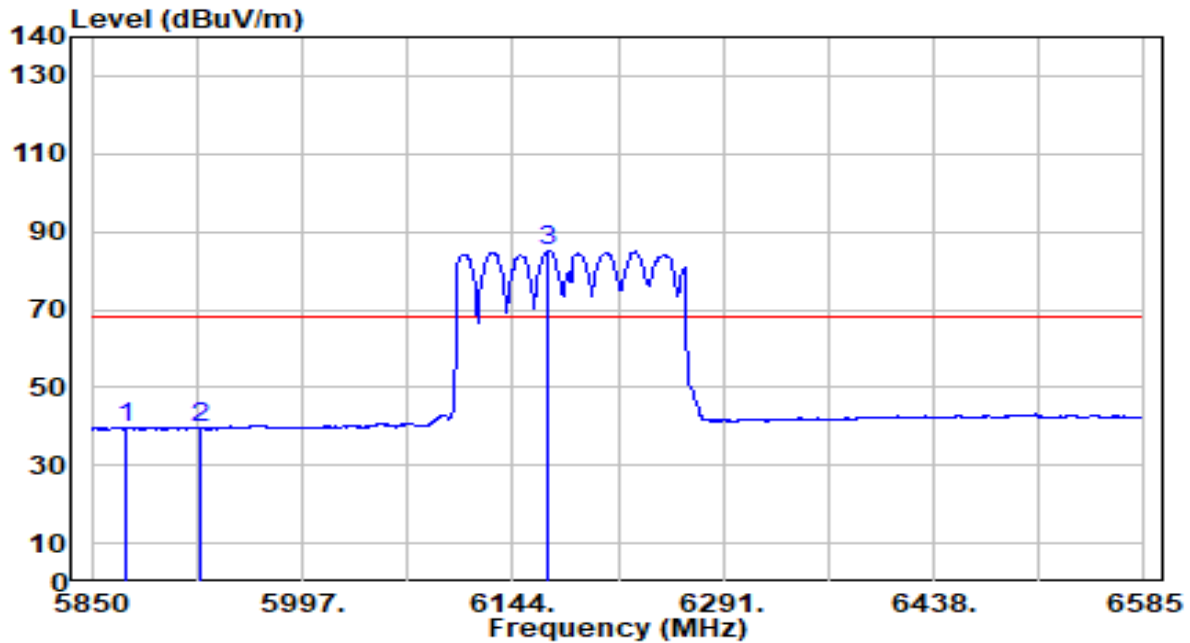


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5874.255	39.09	0.57	39.65	-28.55	68.20	200	215	Average
2		5925.000	38.93	0.53	39.46	-28.74	68.20	200	215	Average
3		6168.255	83.89	1.35	85.24	N/A	N/A	200	215	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-160MHz_TX_Band5_CH 47_NSS1_ANT 0+1	Test Voltage	AC 120V/60Hz

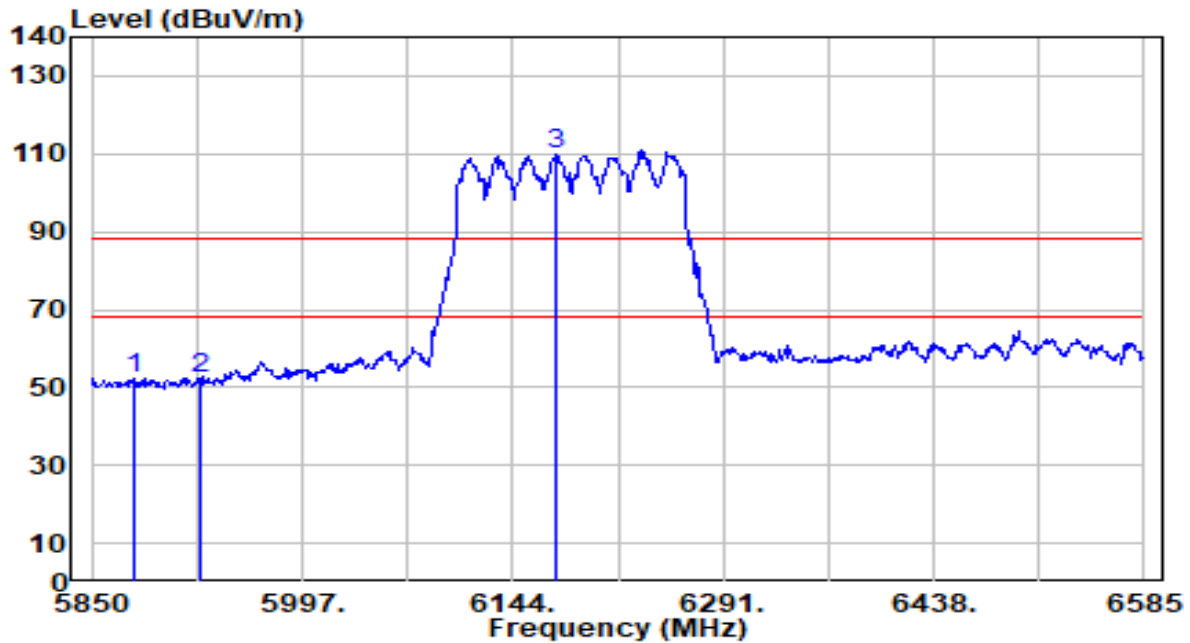


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5879.400	51.79	0.56	52.35	-35.85	88.20	180	224	Peak
2		5925.000	51.72	0.53	52.25	-35.95	88.20	180	224	Peak
3		6174.870	108.24	1.38	109.62	N/A	N/A	180	224	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-160MHz_TX_Band5_CH 47_NSS1_ANT 0+1	Test Voltage	AC 120V/60Hz

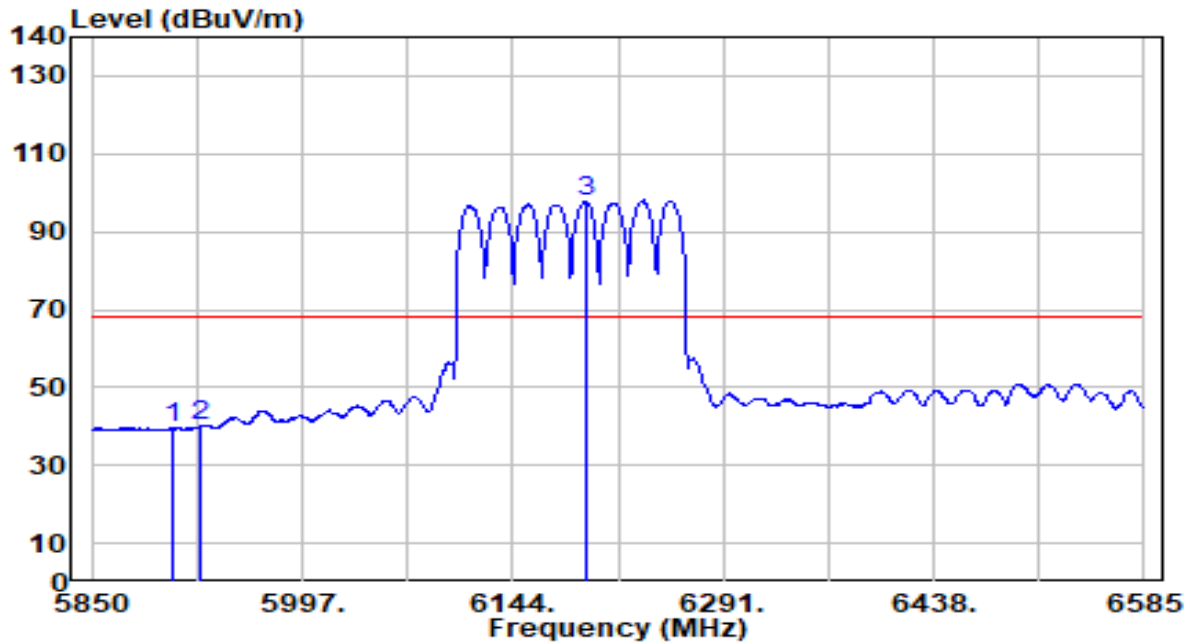


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5907.330	39.28	0.54	39.82	-28.38	68.20	180	224	Average
2	* 5925.000	39.37	0.53	39.90	-28.30	68.20	180	224	Average
3	6194.715	96.26	1.49	97.75	N/A	N/A	180	224	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-160MHz_TX_Band8_CH 207_NSS1_ANT 0+1	Test Voltage	AC 120V/60Hz

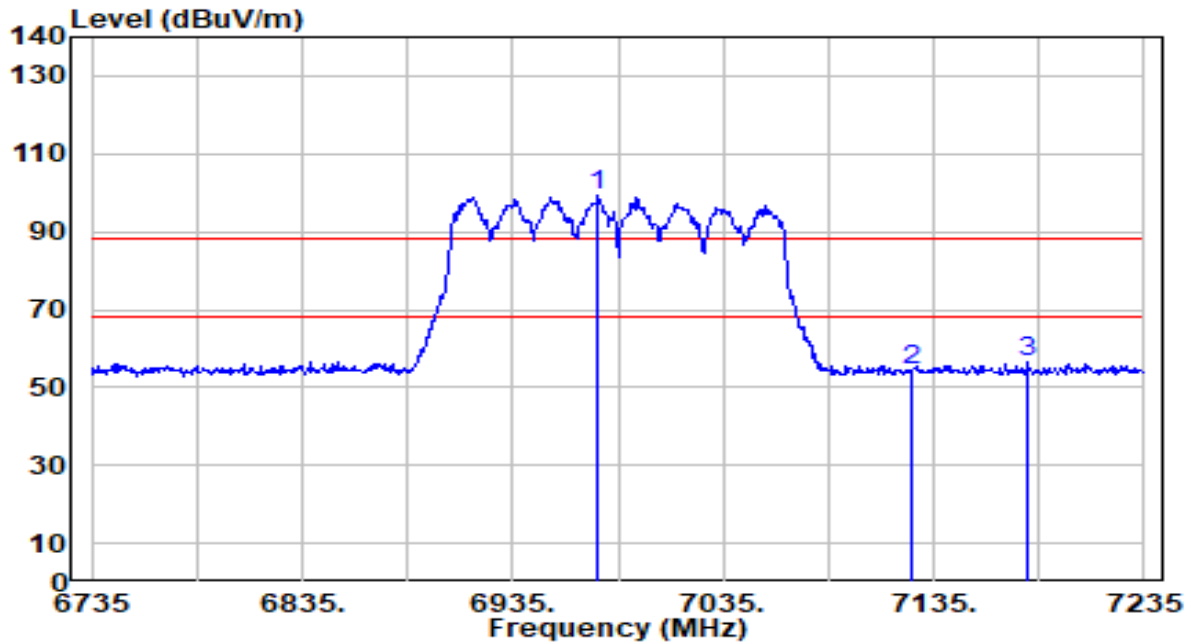


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6975.500	95.54	3.84	99.38	N/A	N/A	178	238	Peak
2	7125.000	50.69	3.88	54.57	-33.63	88.20	178	238	Peak
3	* 7179.500	52.77	3.89	56.66	-31.54	88.20	178	238	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-160MHz_TX_Band8_CH 207_NSS1_ANT 0+1	Test Voltage	AC 120V/60Hz

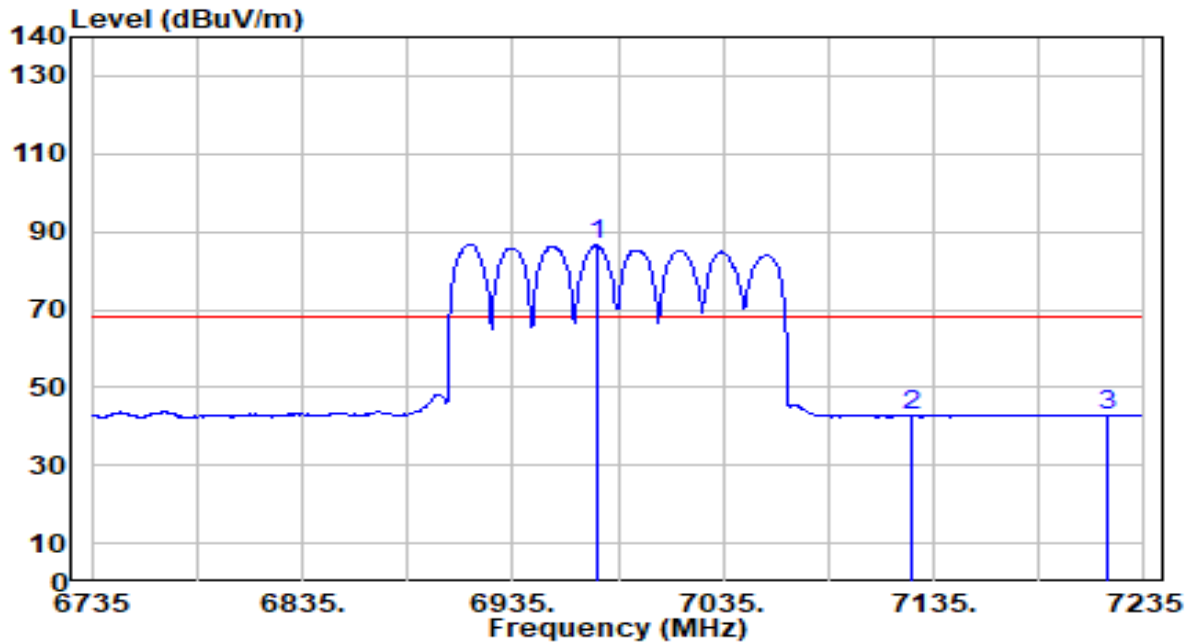


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6975.500	82.54	3.84	86.38	N/A	N/A	178	238	Average
2	7125.000	38.80	3.88	42.67	-25.53	68.20	178	238	Average
3	* 7217.500	39.11	3.90	43.00	-25.20	68.20	178	238	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-160MHz_TX_Band8_CH 207_NSS1_ANT 0+1	Test Voltage	AC 120V/60Hz

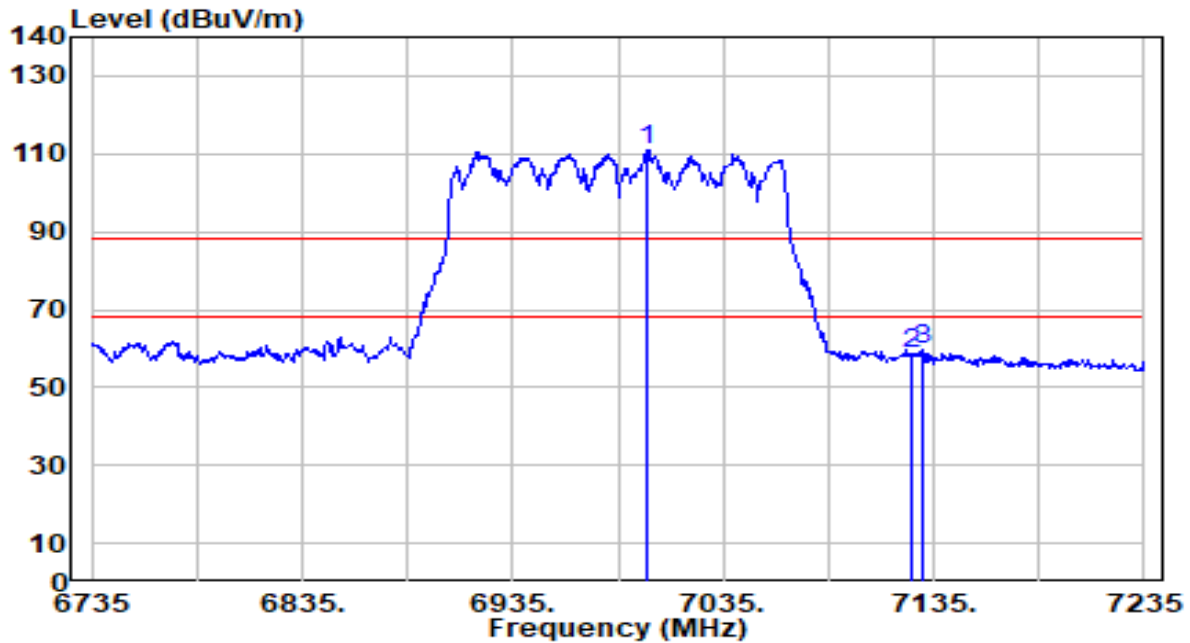


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6999.000	107.08	3.85	110.93	N/A	N/A	180	18	Peak
2	7125.000	54.81	3.88	58.68	-29.52	88.20	180	18	Peak
3	* 7130.000	56.02	3.88	59.90	-28.30	88.20	180	18	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-160MHz_TX_Band8_CH 207_NSS1_ANT 0+1	Test Voltage	AC 120V/60Hz

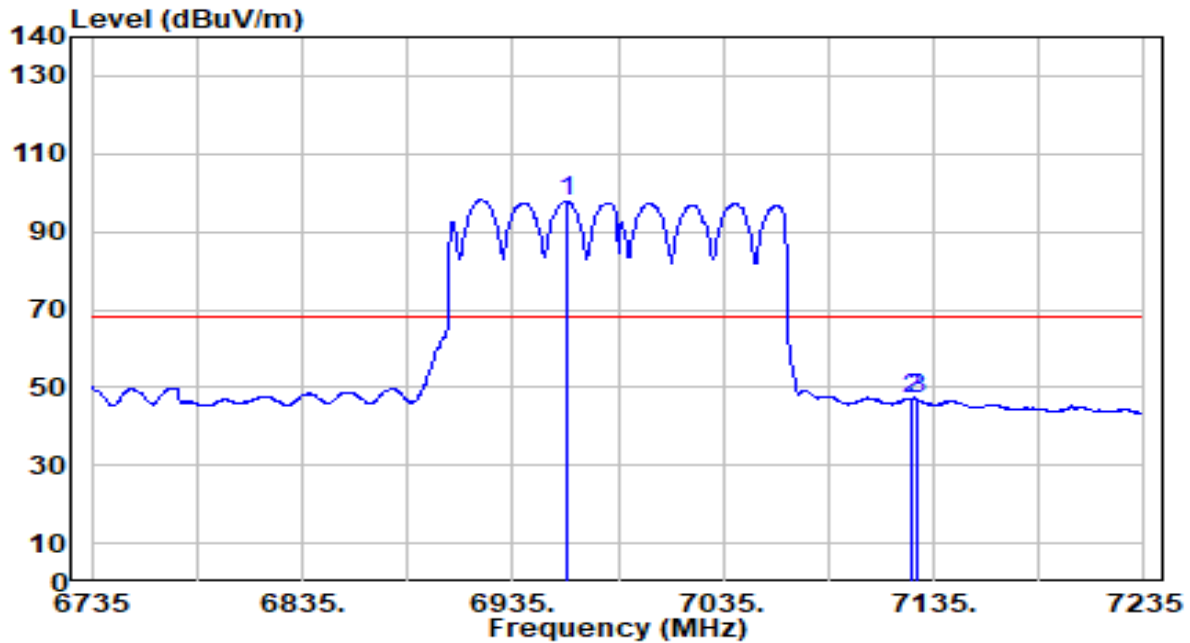


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6960.500	93.94	3.84	97.77	N/A	N/A	180	18	Average
2	* 7125.000	43.32	3.88	47.20	-21.00	68.20	180	18	Average
3	7127.000	42.96	3.88	46.84	-21.36	68.20	180	18	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band5_CH 33_NSS2_ANT 0+1	Test Voltage	AC 120V/60Hz

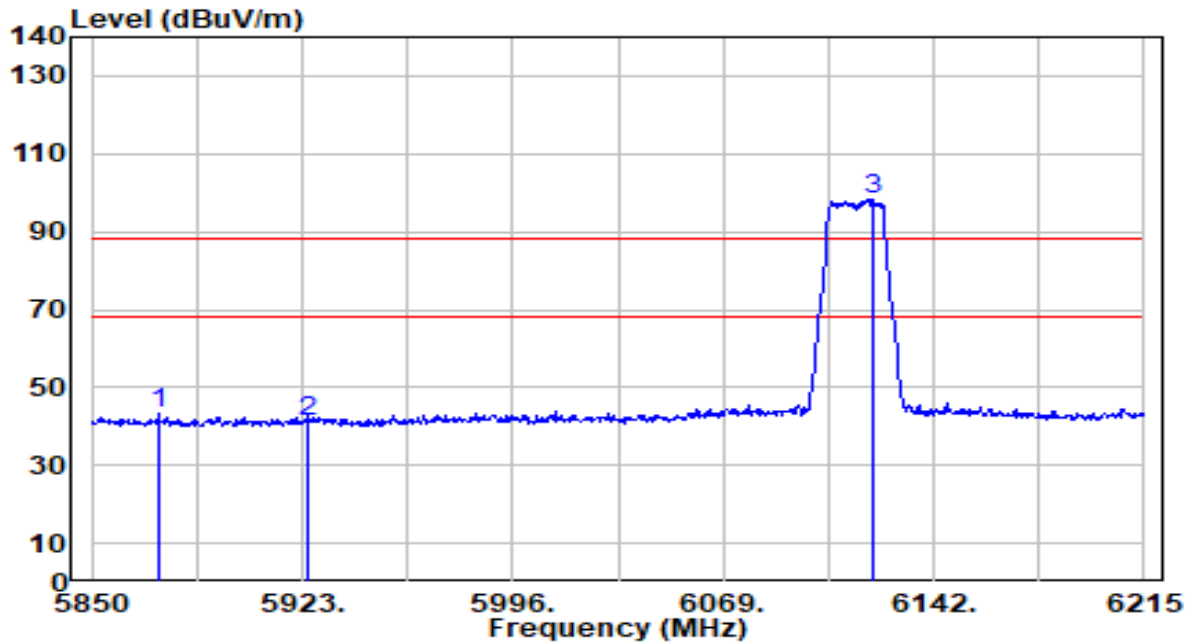


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5873.360	42.62	0.57	43.18	-45.02	88.20	197	212	Peak
2		5925.000	40.88	0.53	41.40	-46.80	88.20	197	212	Peak
3		6120.830	97.24	1.10	98.35	N/A	N/A	197	212	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band5_CH 33_NSS2_ANT 0+1	Test Voltage	AC 120V/60Hz

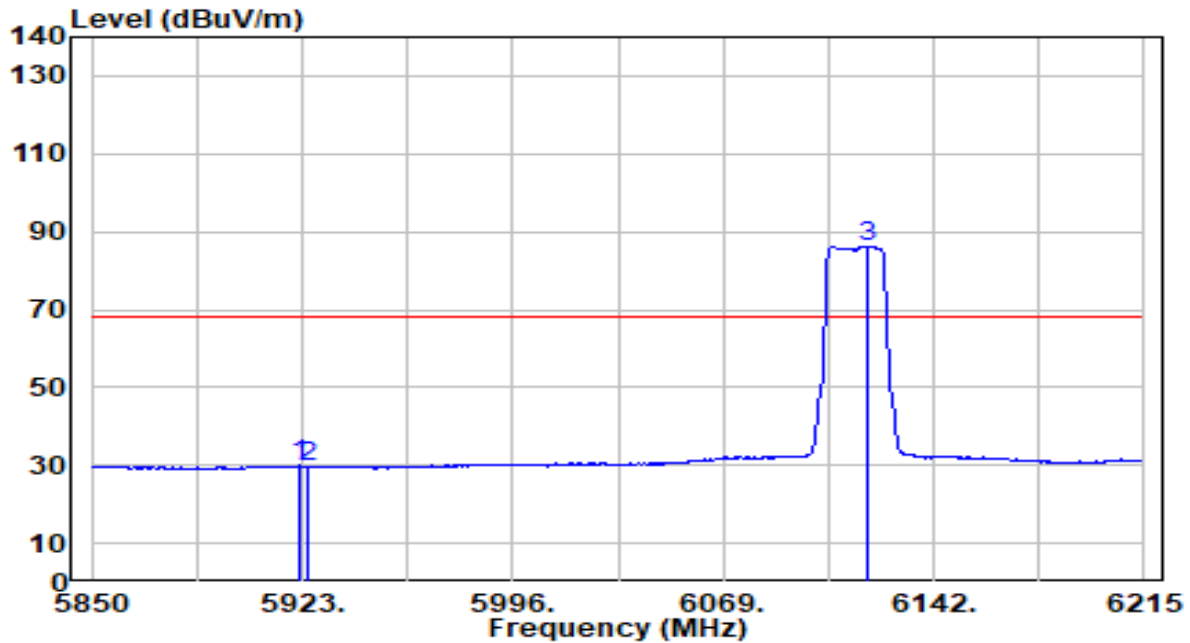


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5921.905	29.36	0.53	29.89	-38.31	68.20	197	212	Average
2		5925.000	28.97	0.53	29.49	-38.71	68.20	197	212	Average
3		6118.640	85.27	1.09	86.36	N/A	N/A	197	212	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band5_CH 33_NSS2_ANT 0+1	Test Voltage	AC 120V/60Hz

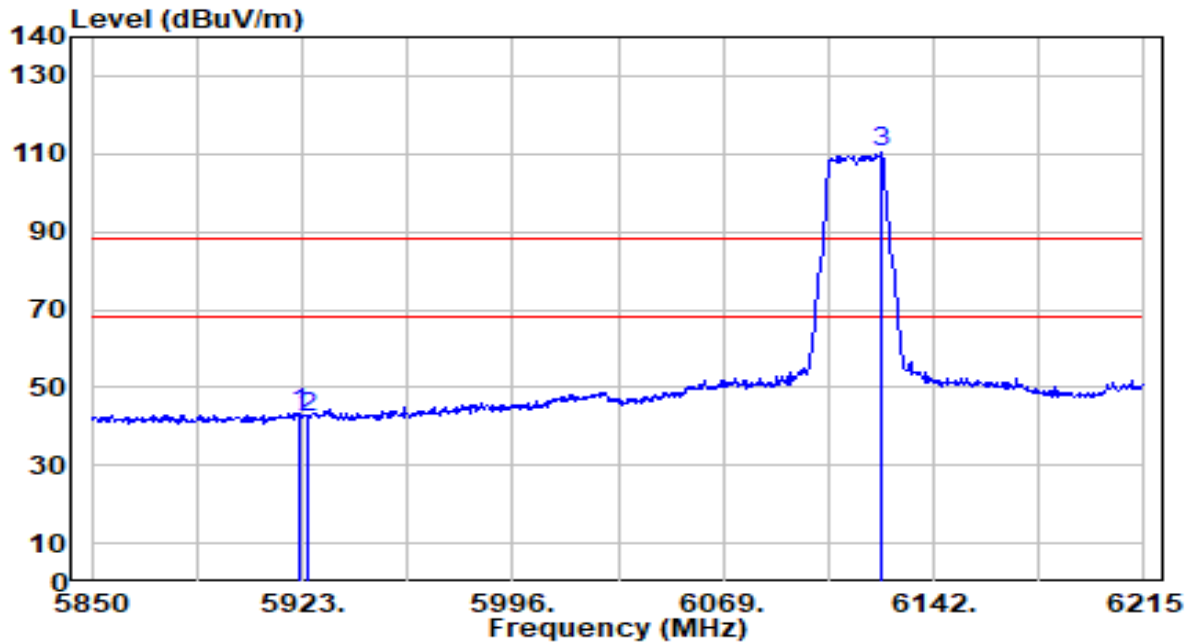


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5922.270	42.94	0.53	43.47	-44.73	88.20	190	219	Peak
2		5925.000	41.97	0.53	42.50	-45.70	88.20	190	219	Peak
3		6124.115	109.04	1.12	110.16	N/A	N/A	190	219	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band5_CH 33_NSS2_ANT 0+1	Test Voltage	AC 120V/60Hz

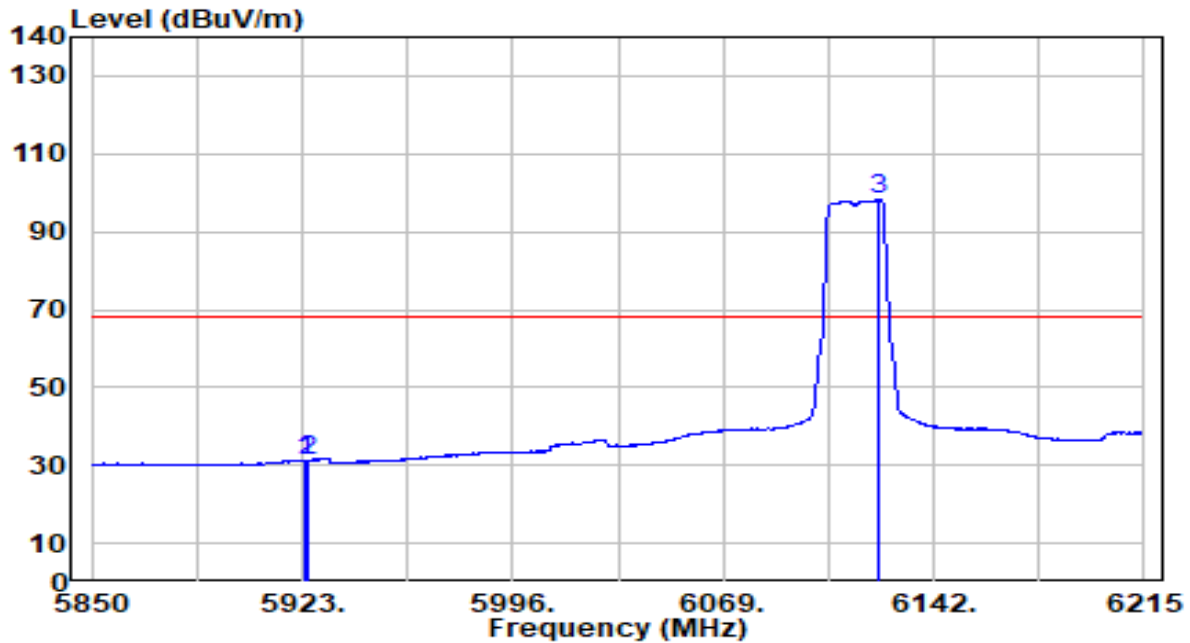


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5923.730	30.62	0.53	31.15	-37.05	68.20	190	219	Average
2	* 5925.000	30.78	0.53	31.31	-36.89	68.20	190	219	Average
3	6122.655	97.11	1.11	98.22	N/A	N/A	190	219	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band8_CH 229_NSS2_ANT 0+1	Test Voltage	AC 120V/60Hz

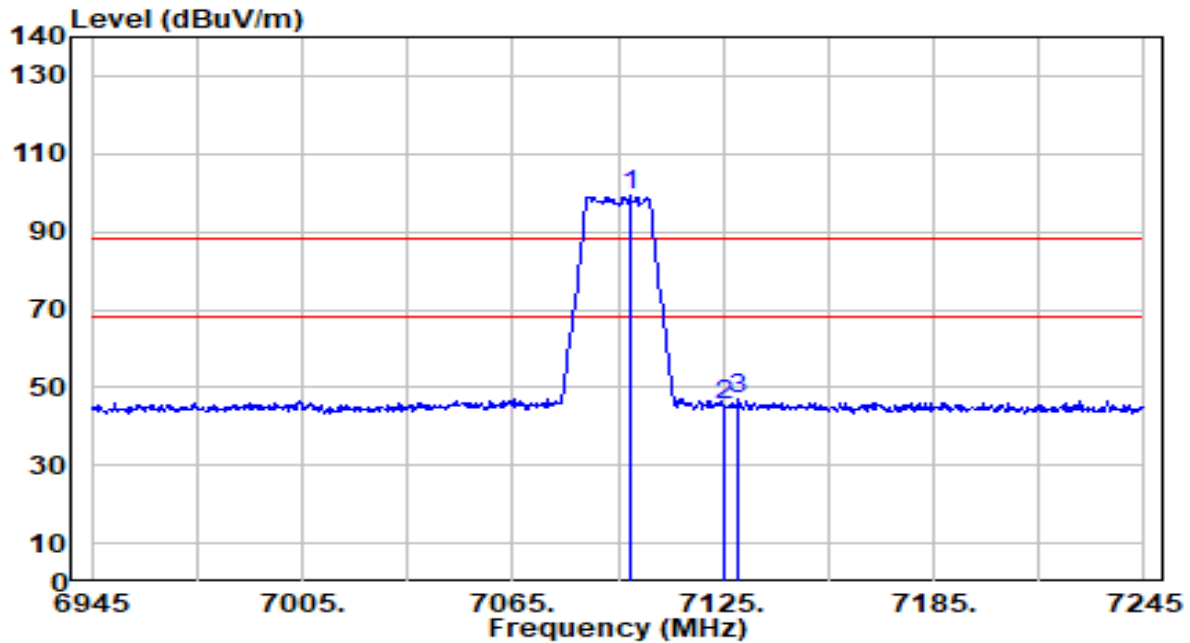


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7098.600	95.21	3.87	99.08	N/A	N/A	122	50	Peak
2	7125.000	41.63	3.88	45.51	-42.69	88.20	122	50	Peak
3	* 7129.200	43.16	3.88	47.04	-41.16	88.20	122	50	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band8_CH 229_NSS2_ANT 0+1	Test Voltage	AC 120V/60Hz

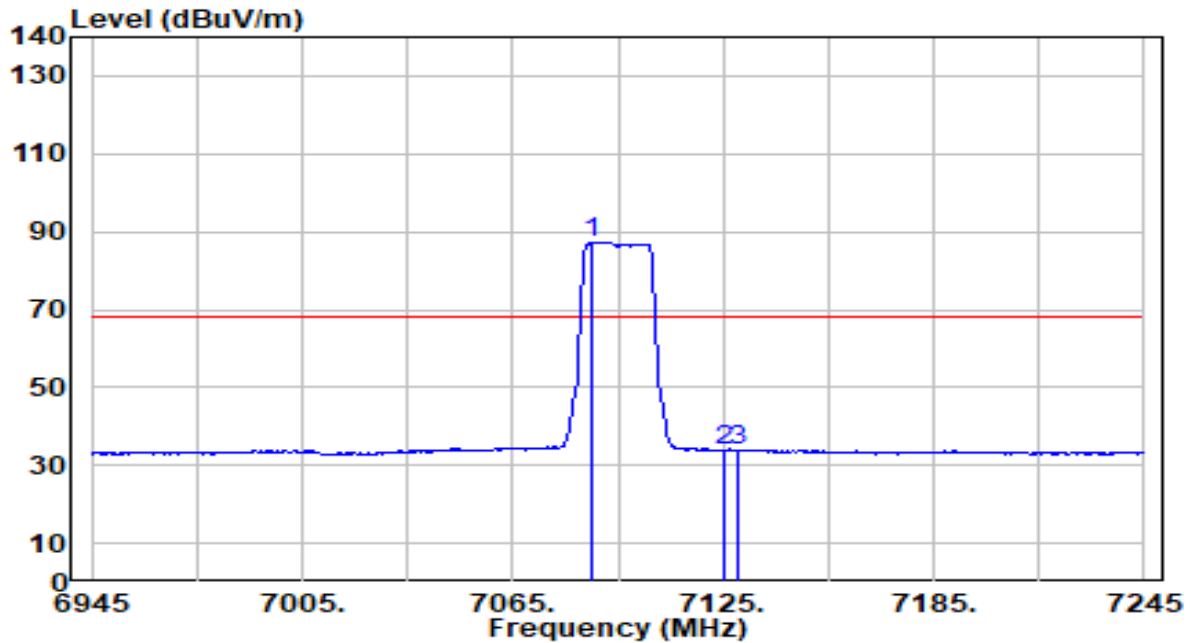


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7087.800	83.24	3.87	87.10	N/A	N/A	122	50	Average
2	7125.000	30.06	3.88	33.94	-34.26	68.20	122	50	Average
3	* 7128.900	30.13	3.88	34.01	-34.19	68.20	122	50	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band8_CH 229_NSS2_ANT 0+1	Test Voltage	AC 120V/60Hz

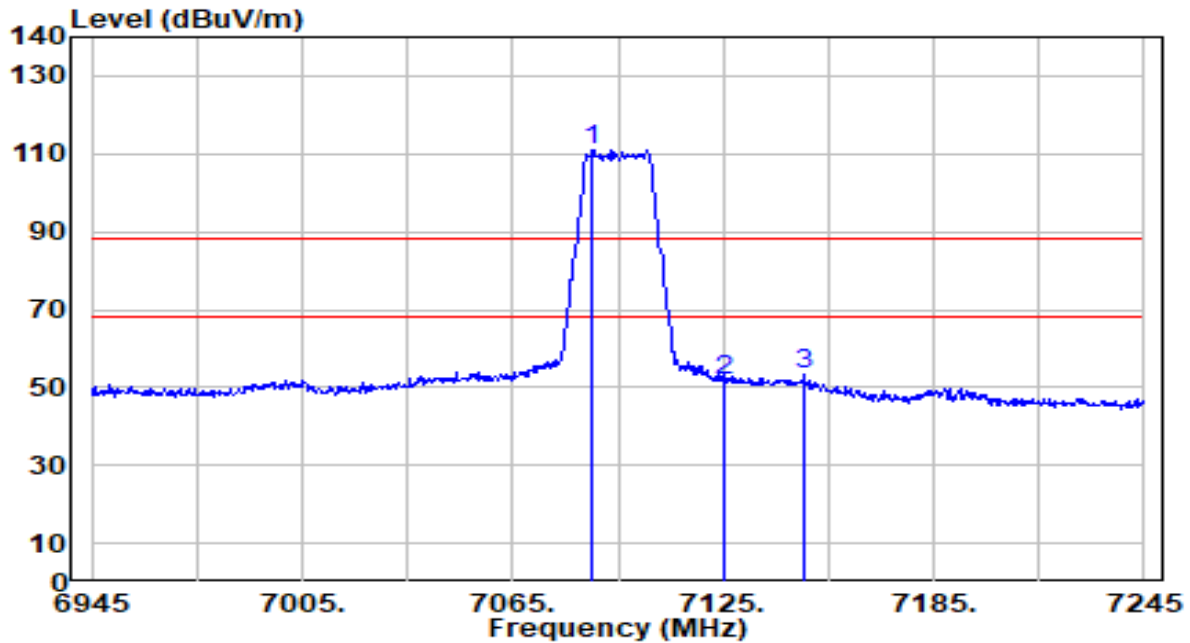


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7087.500	107.02	3.87	110.89	N/A	N/A	188	252	Peak
2	7125.000	47.97	3.88	51.84	-36.36	88.20	188	252	Peak
3	* 7148.100	49.22	3.88	53.10	-35.10	88.20	188	252	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band8_CH 229_NSS2_ANT 0+1	Test Voltage	AC 120V/60Hz

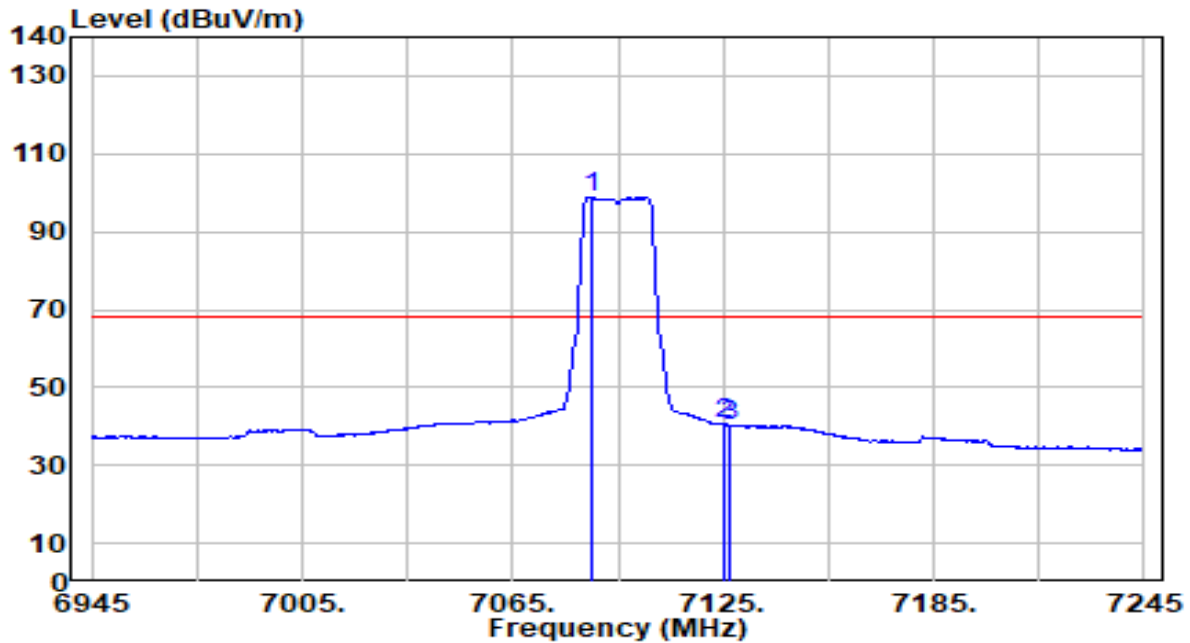


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7087.500	95.06	3.87	98.93	N/A	N/A	188	252	Average
2	* 7125.000	36.67	3.88	40.55	-27.65	68.20	188	252	Average
3	7126.800	36.52	3.88	40.40	-27.80	68.20	188	252	Average

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band5_CH 33_NSS2_ANT 0+1	Test Voltage	AC 120V/60Hz

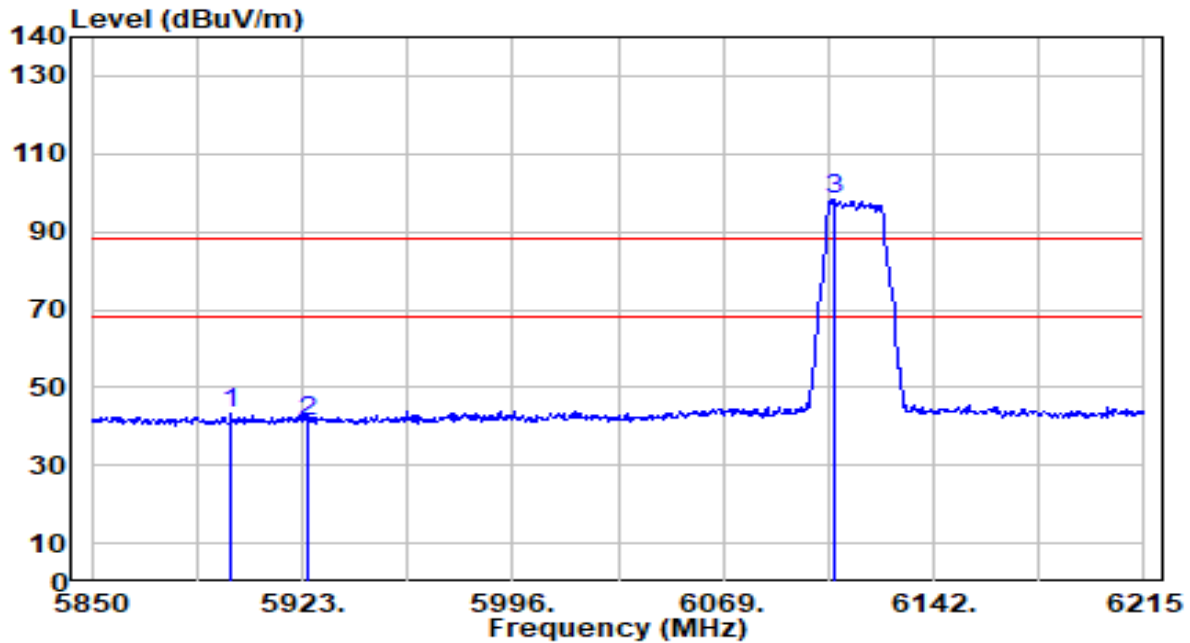


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5898.180	42.69	0.55	43.23	-44.97	88.20	216	212	Peak
2		5925.000	40.65	0.53	41.18	-47.02	88.20	216	212	Peak
3		6107.325	97.16	1.03	98.19	N/A	N/A	216	212	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band5_CH 33_NSS2_ANT 0+1	Test Voltage	AC 120V/60Hz

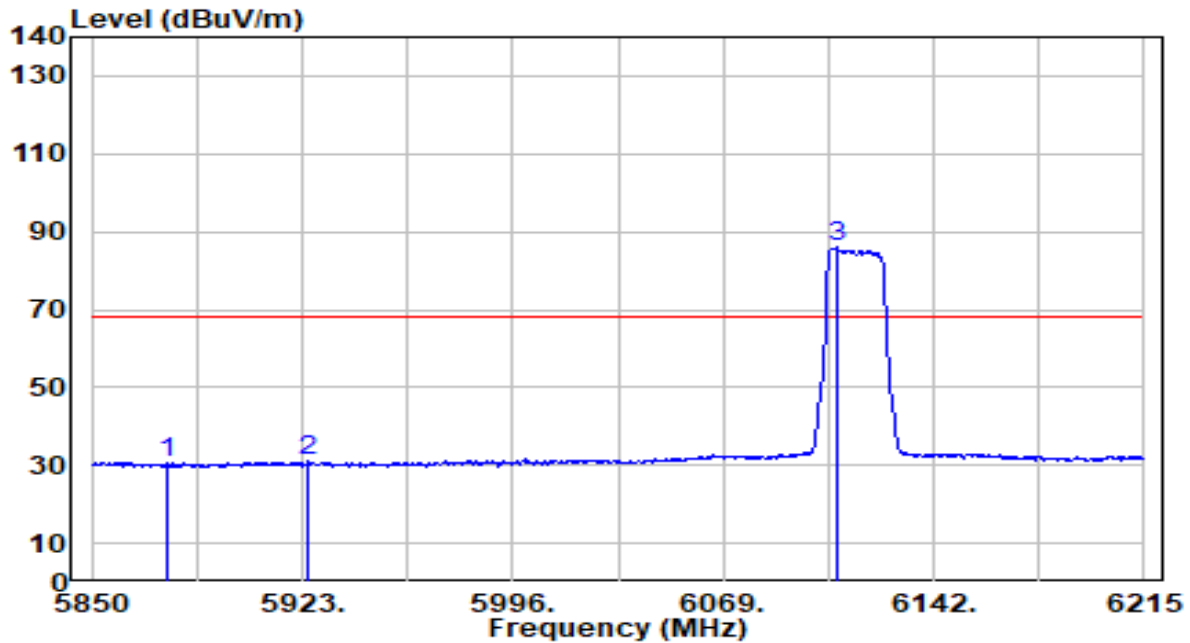


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5875.915	30.17	0.56	30.73	-37.47	68.20	216	212	Average
2	* 5925.000	30.41	0.53	30.94	-37.26	68.20	216	212	Average
3	6108.420	84.84	1.04	85.88	N/A	N/A	216	212	Average

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band5_CH 33_NSS2_ANT 0+1	Test Voltage	AC 120V/60Hz

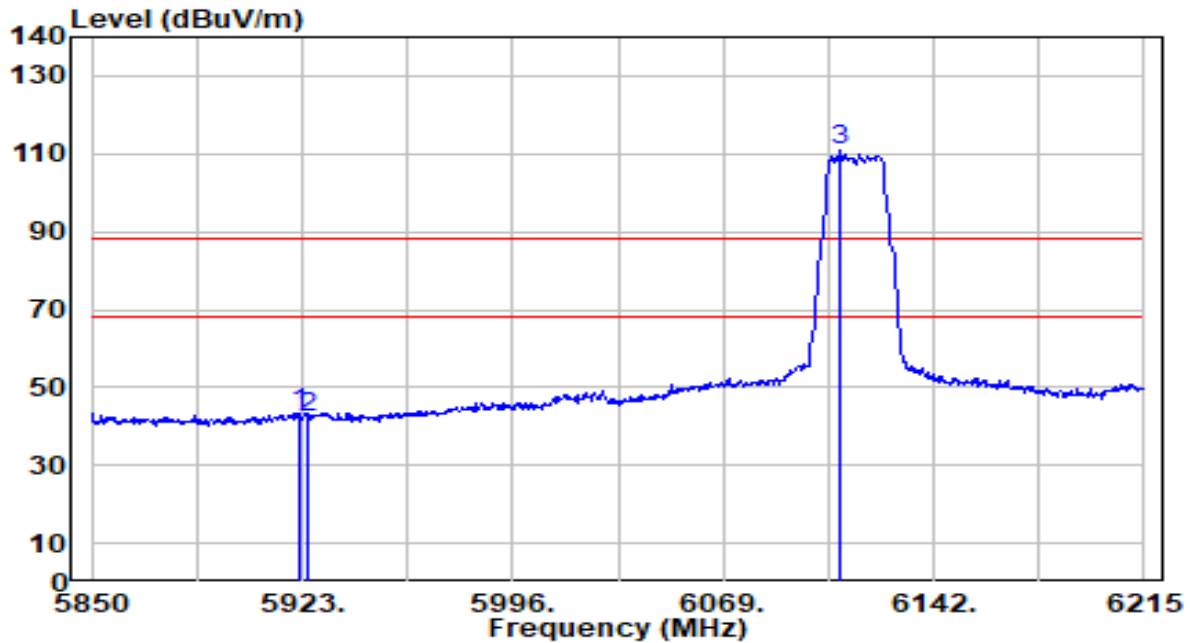


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5921.905	42.83	0.53	43.36	-44.84	88.20	180	219	Peak
2		5925.000	41.75	0.53	42.28	-45.92	88.20	180	219	Peak
3		6109.880	109.79	1.04	110.84	N/A	N/A	180	219	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band5_CH 33_NSS2_ANT 0+1	Test Voltage	AC 120V/60Hz

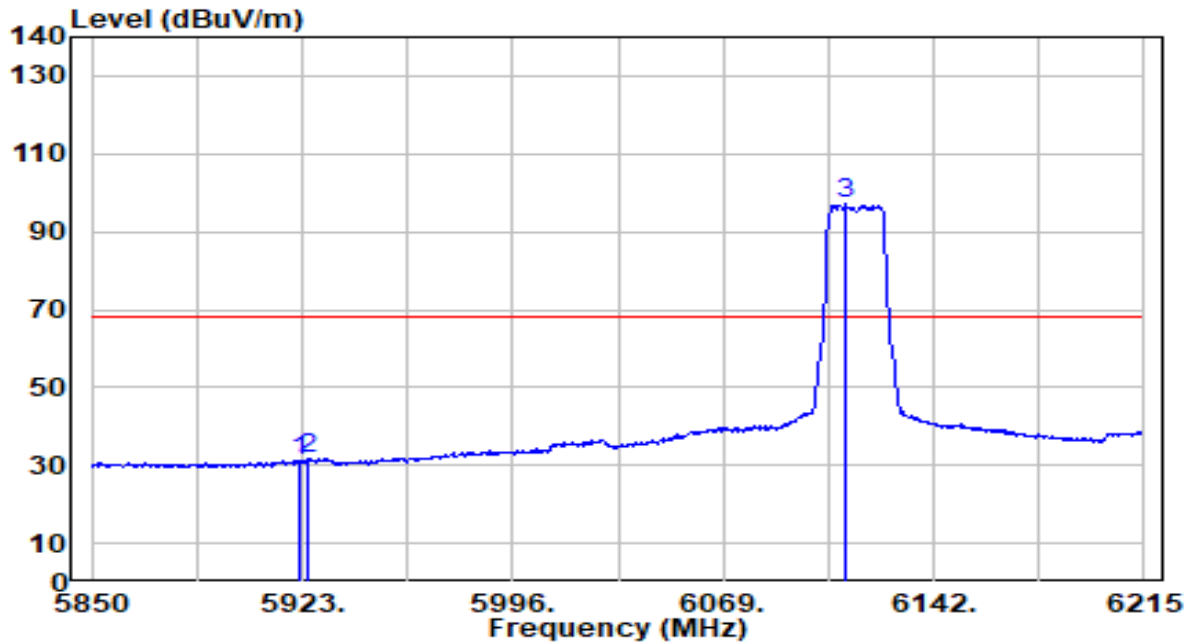


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5921.905	30.74	0.53	31.27	-36.93	68.20	180	219	Average
2	* 5925.000	31.02	0.53	31.55	-36.65	68.20	180	219	Average
3	6111.705	95.89	1.05	96.95	N/A	N/A	180	219	Average

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band8_CH 229_NSS2_ANT 0+1	Test Voltage	AC 120V/60Hz

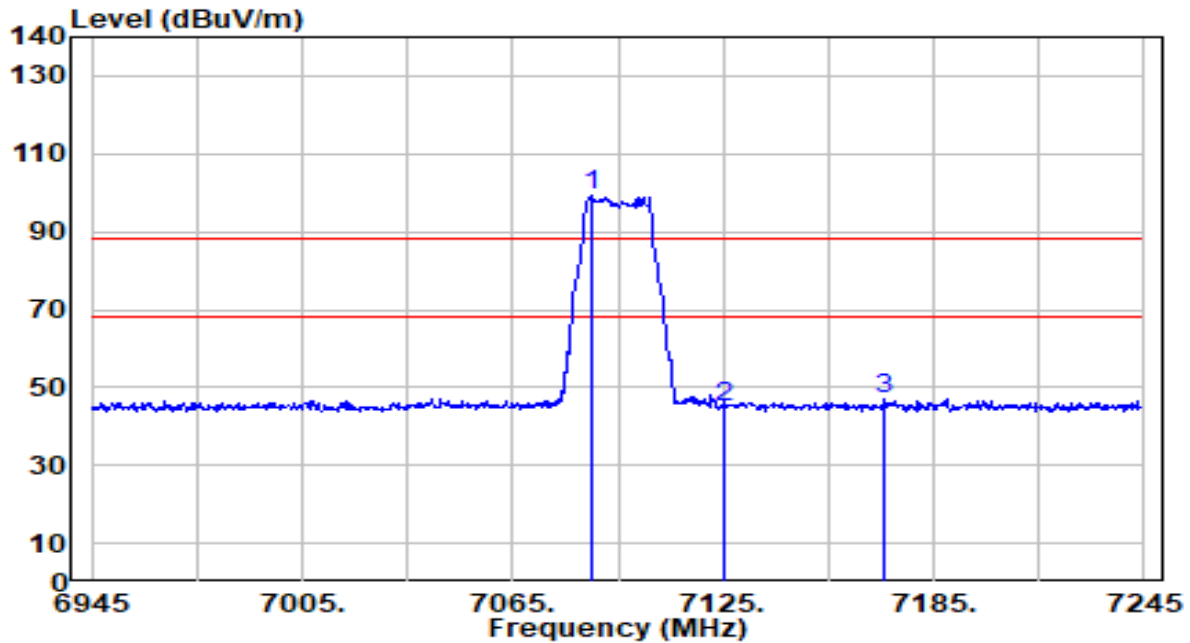


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7087.200	95.22	3.87	99.08	N/A	N/A	103	51	Peak
2	7125.000	41.19	3.88	45.07	-43.13	88.20	103	51	Peak
3	* 7171.200	43.39	3.89	47.28	-40.92	88.20	103	51	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band8_CH 229_NSS2_ANT 0+1	Test Voltage	AC 120V/60Hz

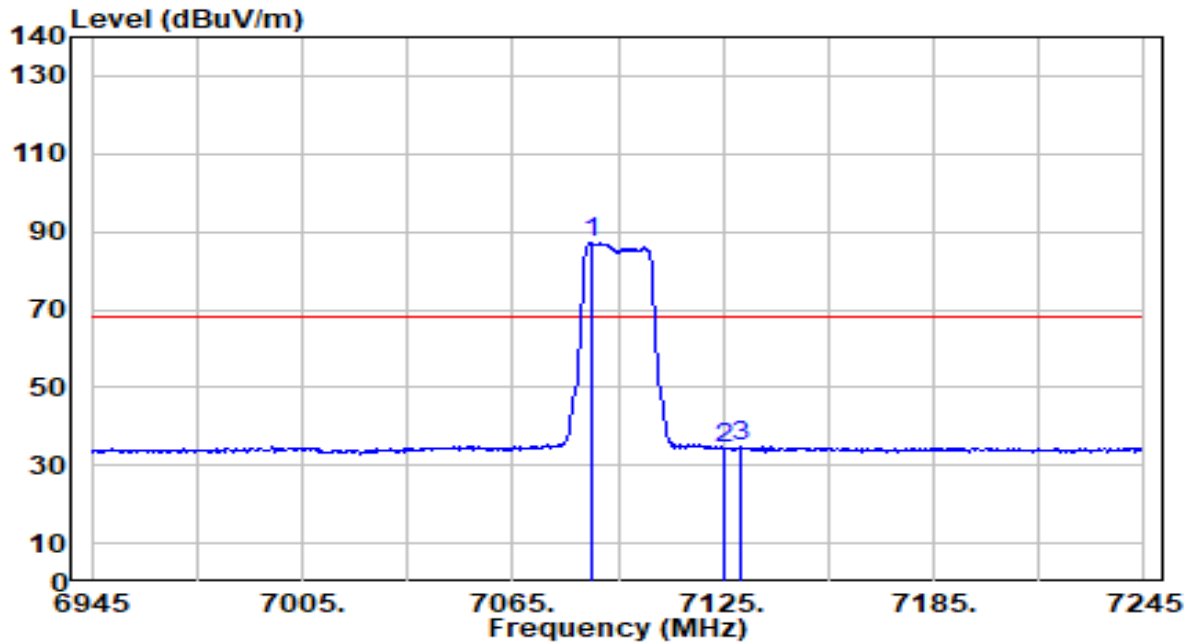


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7087.800	83.11	3.87	86.98	N/A	N/A	103	51	Average
2	7125.000	30.35	3.88	34.22	-33.98	68.20	103	51	Average
3	* 7129.800	30.82	3.88	34.70	-33.50	68.20	103	51	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band8_CH 229_NSS2_ANT 0+1	Test Voltage	AC 120V/60Hz

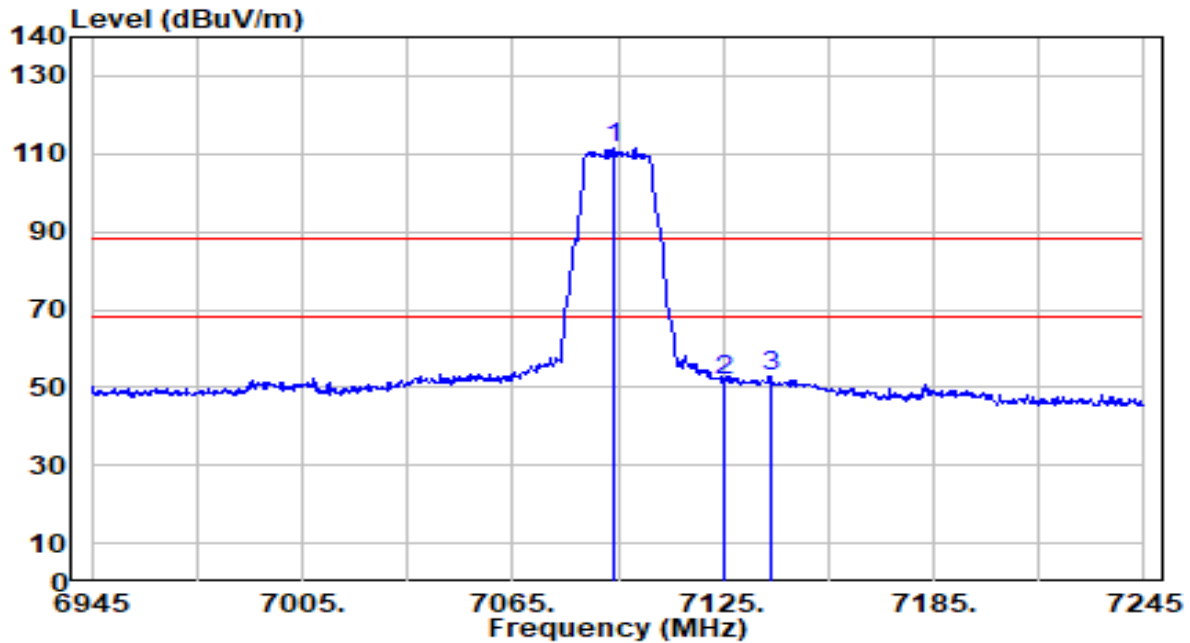


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7093.800	107.55	3.87	111.42	N/A	N/A	204	253	Peak
2	7125.000	47.84	3.88	51.72	-36.48	88.20	204	253	Peak
3	* 7138.500	49.10	3.88	52.98	-35.22	88.20	204	253	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band8_CH 229_NSS2_ANT 0+1	Test Voltage	AC 120V/60Hz

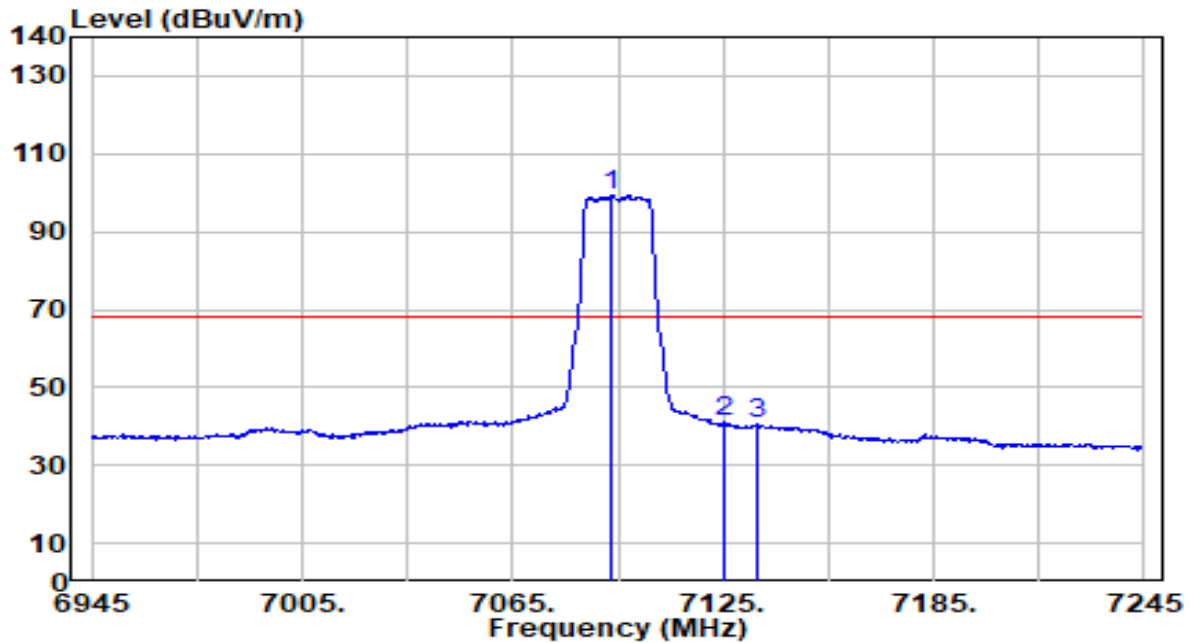


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7092.900	95.61	3.87	99.48	N/A	N/A	204	253	Average
2	* 7125.000	37.18	3.88	41.06	-27.14	68.20	204	253	Average
3	7134.600	36.59	3.88	40.47	-27.73	68.20	204	253	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-320MHz_TX_Band5_CH 63_NSS2_ANT 0+1	Test Voltage	AC 120V/60Hz

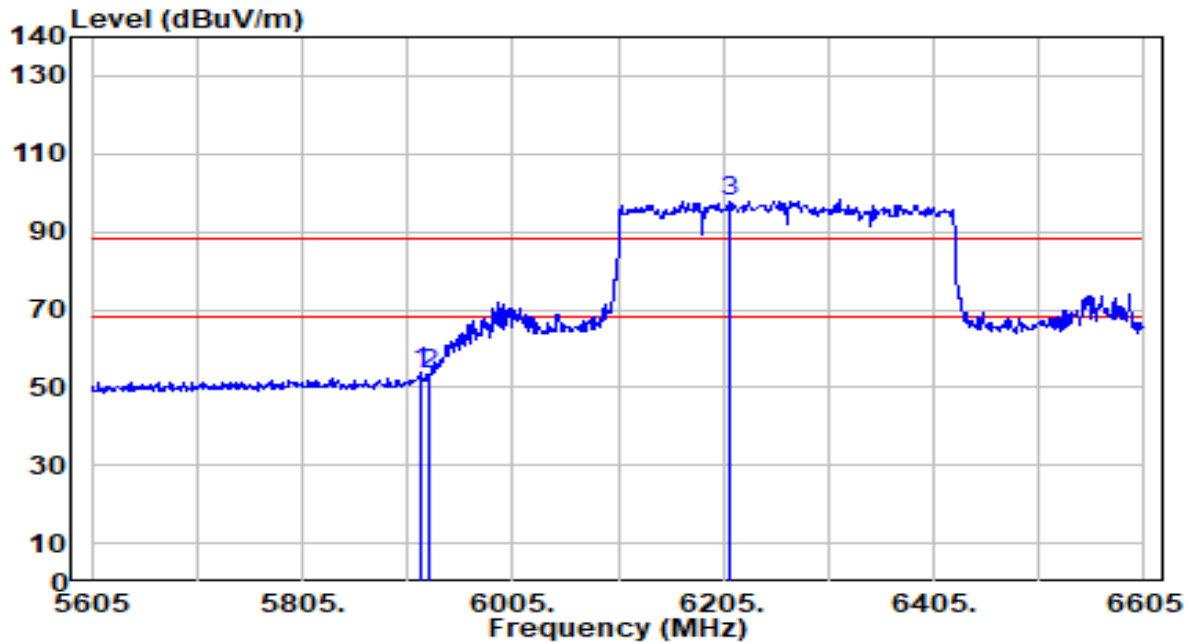


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5918.000	53.34	0.53	53.87	-34.33	88.20	200	216	Peak
2		5925.000	52.71	0.53	53.24	-34.96	88.20	200	216	Peak
3		6210.000	95.98	1.59	97.57	N/A	N/A	200	216	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-320MHz_TX_Band5_CH 63_NSS2_ANT 0+1	Test Voltage	AC 120V/60Hz

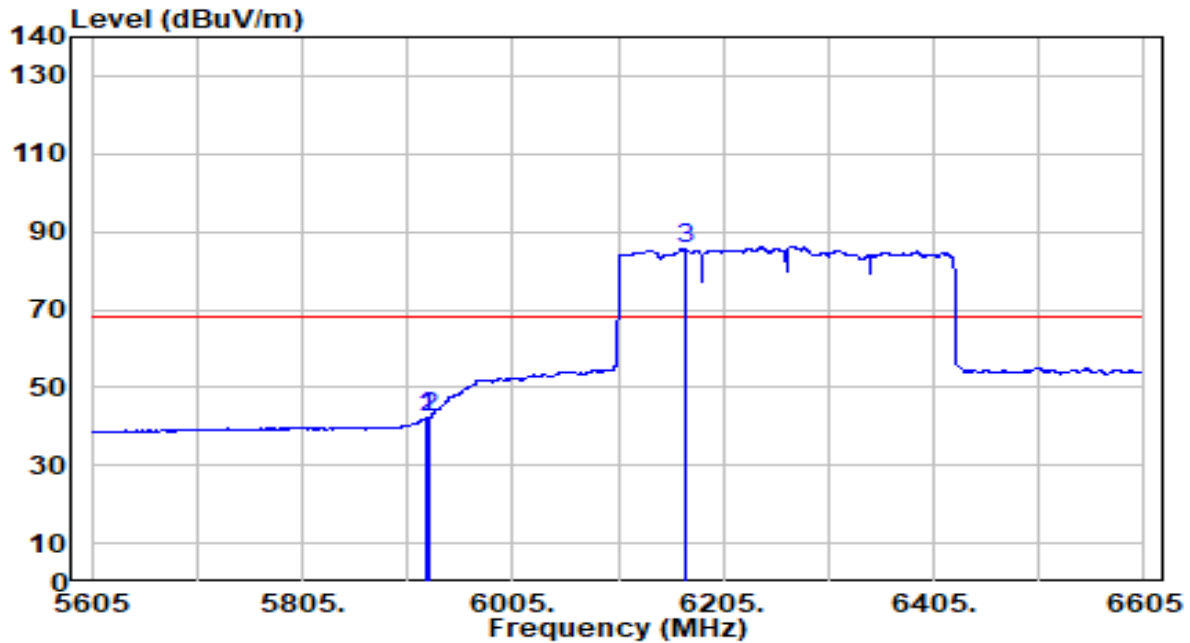


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5924.000	41.77	0.53	42.30	-25.90	68.20	200	216	Average
2		5925.000	41.76	0.53	42.29	-25.91	68.20	200	216	Average
3		6168.000	84.13	1.35	85.48	N/A	N/A	200	216	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-320MHz_TX_Band5_CH 63_NSS2_ANT 0+1	Test Voltage	AC 120V/60Hz

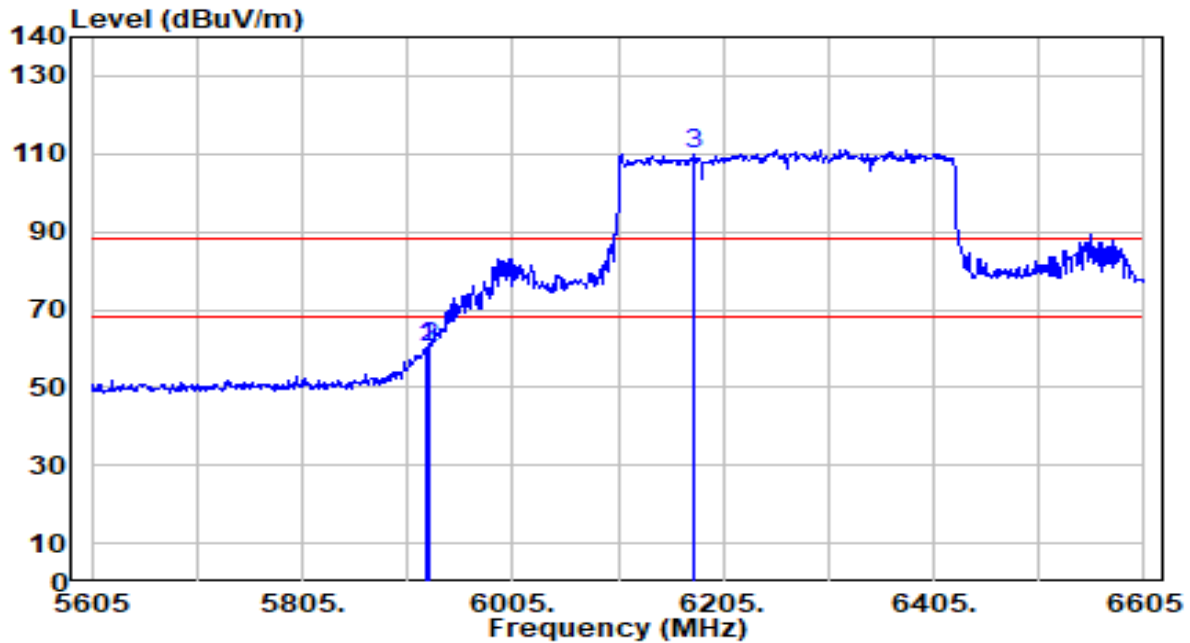


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5924.000	59.69	0.53	60.22	-27.98	88.20	184	223	Peak
2	* 5925.000	59.85	0.53	60.38	-27.82	88.20	184	223	Peak
3	6177.000	108.61	1.40	110.00	N/A	N/A	184	223	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-320MHz_TX_Band5_CH 63_NSS2_ANT 0+1	Test Voltage	AC 120V/60Hz

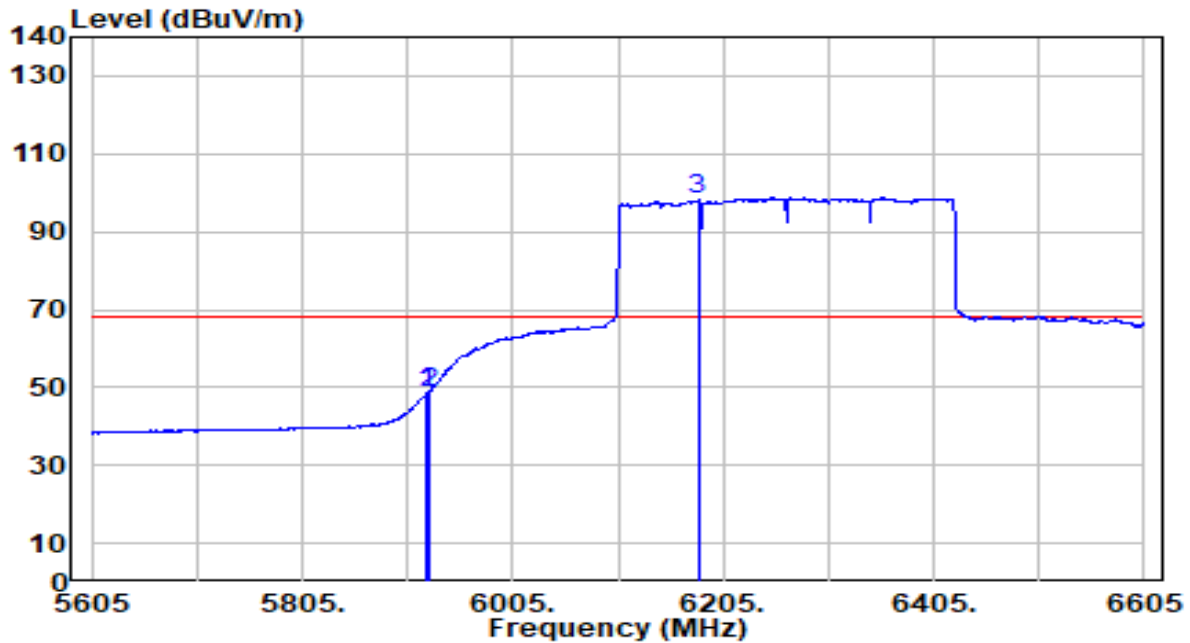


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5924.000	48.09	0.53	48.62	-19.58	68.20	184	223	Average
2	* 5925.000	48.21	0.53	48.74	-19.46	68.20	184	223	Average
3	6181.000	96.62	1.42	98.04	N/A	N/A	184	223	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-320MHz_TX_Band8_CH 191_NSS2_ANT 0+1	Test Voltage	AC 120V/60Hz

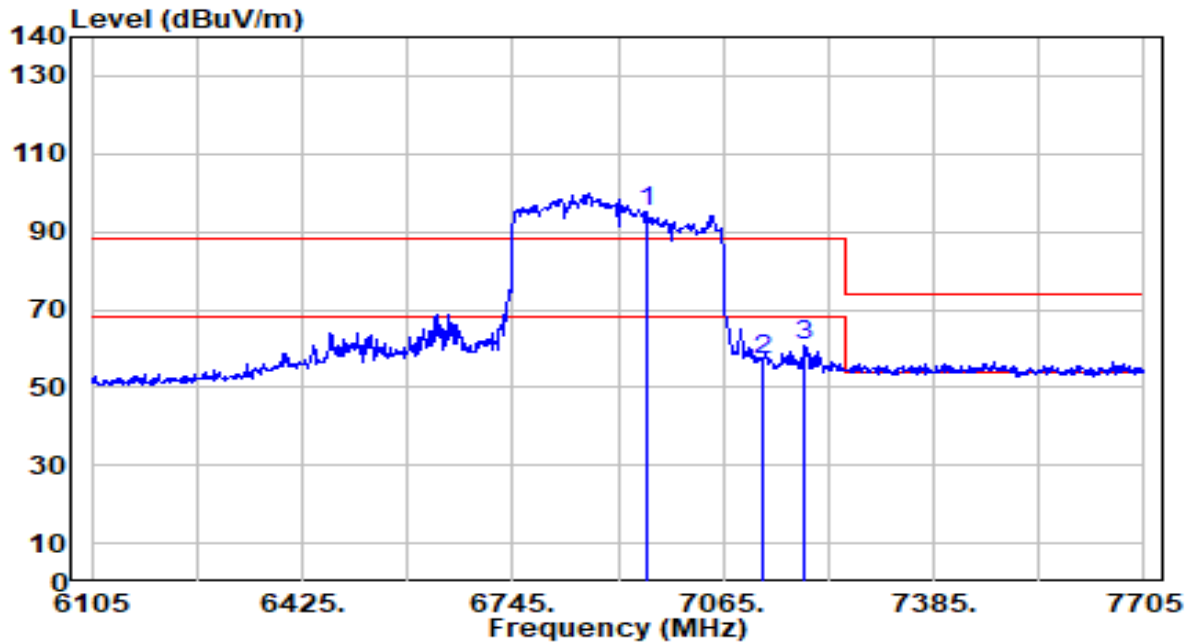


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6948.200	91.05	3.83	94.88	N/A	N/A	100	26	Peak
2	7125.000	53.36	3.88	57.24	-30.96	88.20	100	26	Peak
3	* 7189.800	56.82	3.89	60.71	-27.49	88.20	100	26	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-320MHz_TX_Band8_CH 191_NSS2_ANT 0+1	Test Voltage	AC 120V/60Hz

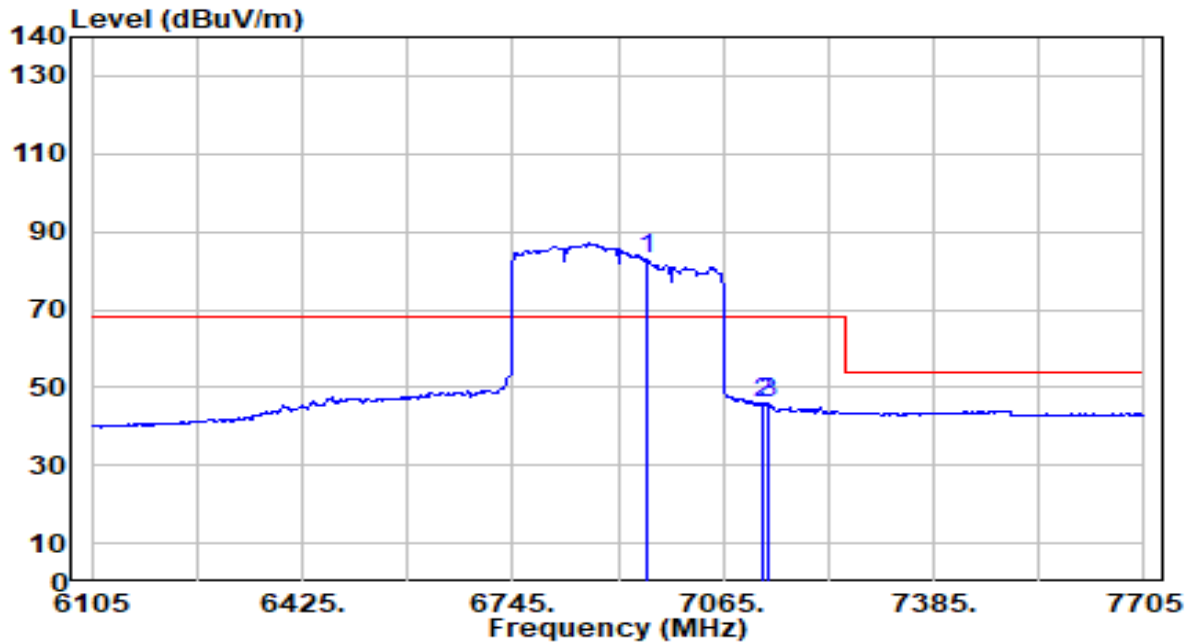


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6948.200	79.09	3.83	82.93	N/A	N/A	100	26	Average
2	* 7125.000	42.10	3.88	45.98	-22.22	68.20	100	26	Average
3	7133.800	41.97	3.88	45.85	-22.35	68.20	100	26	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-320MHz_TX_Band8_CH 191_NSS2_ANT 0+1	Test Voltage	AC 120V/60Hz

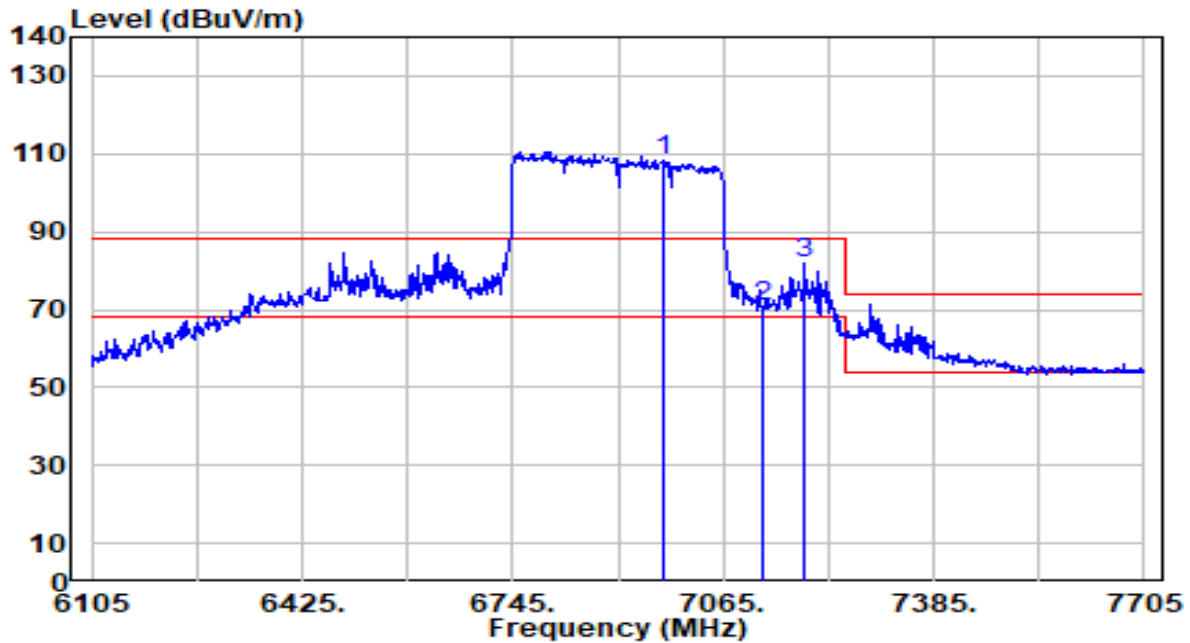


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6973.800	104.64	3.84	108.48	N/A	N/A	200	20	Peak
2	7125.000	66.82	3.88	70.69	-17.51	88.20	200	20	Peak
3	* 7189.800	78.18	3.89	82.07	-6.13	88.20	200	20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-05
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-320MHz_TX_Band8_CH 191_NSS2_ANT 0+1	Test Voltage	AC 120V/60Hz

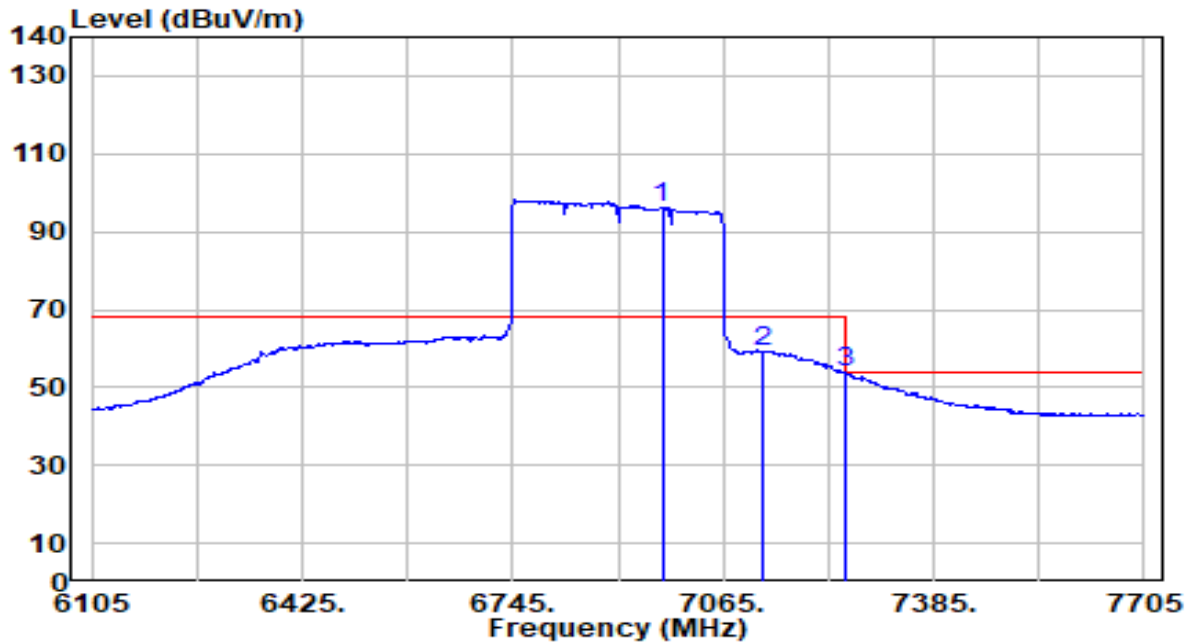

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6972.200	92.31	3.84	96.15	N/A	N/A	200	20	Average
2	7125.000	55.33	3.88	59.20	-9.00	68.20	200	20	Average
3	* 7250.600	49.94	3.91	53.85	-0.15	54.00	200	20	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

6.10. AC Conducted Emissions


6.10.1. Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

6.10.2. Test Setup

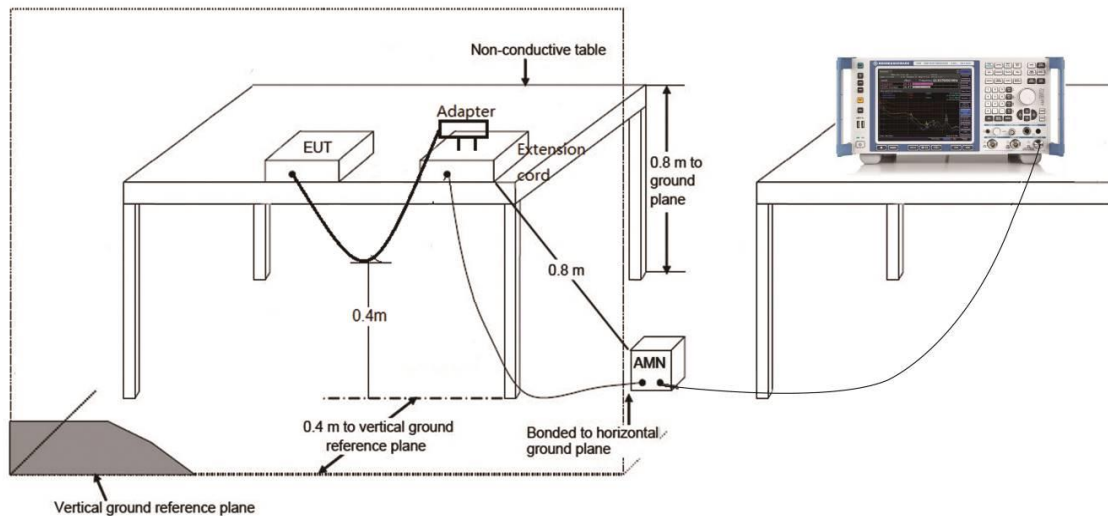

6.10.3. Test Result

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-12
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	23.7°C /52%
Polarity	Line1	Site / Test Engineer	SR2 / Bob
Test Mode	802.11ax-20MHz_TX_Band5_CH 33_ANT 0+1 NSS1	Test Voltage	AC 120V/60Hz

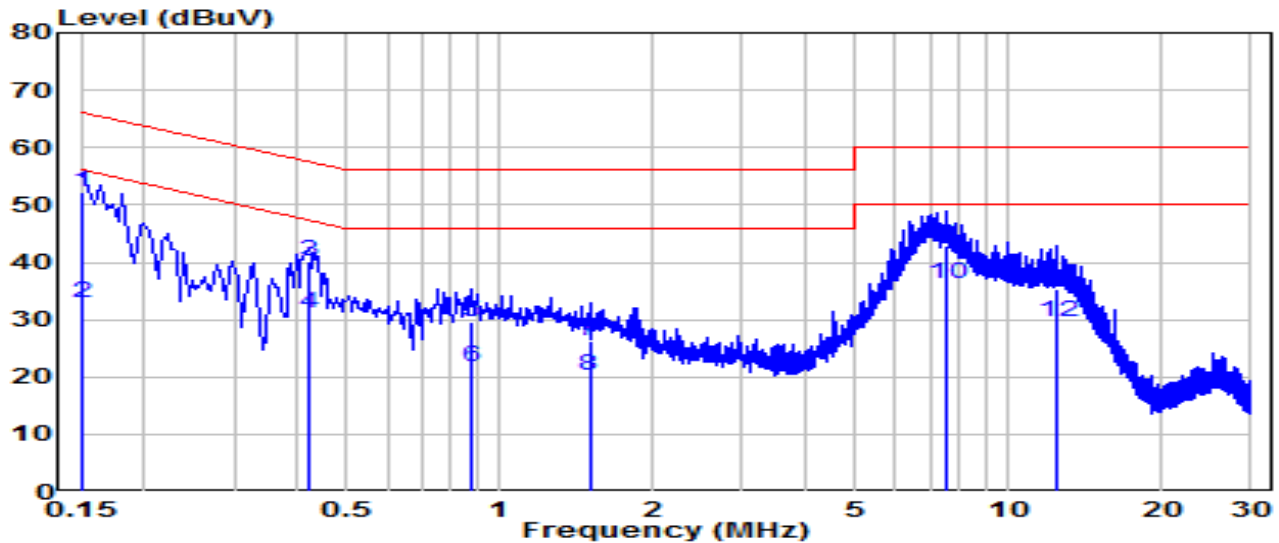


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.150	42.57	9.62	52.19	-13.81	66.00	QP
2	0.150	23.37	9.62	32.99	-23.01	56.00	Average
3	0.420	30.60	9.64	40.23	-17.21	57.45	QP
4	0.420	21.60	9.64	31.24	-16.21	47.45	Average
5	0.883	19.85	9.66	29.51	-26.49	56.00	QP
6	0.883	12.05	9.66	21.72	-24.28	46.00	Average
7	1.500	16.63	9.68	26.31	-29.69	56.00	QP
8	1.500	10.50	9.68	20.18	-25.82	46.00	Average
9	*	7.601	9.80	43.00	-17.00	60.00	QP
10	*	7.601	9.80	36.24	-13.76	50.00	Average
11	12.501	25.59	9.88	35.46	-24.54	60.00	QP
12	12.501	19.68	9.88	29.55	-20.45	50.00	Average

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-12
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	23.7°C /52%
Polarity	Neutral	Site / Test Engineer	SR2 / Bob
Test Mode	802.11ax-20MHz_TX_Band5_CH 33_ANT 0+1 NSS1	Test Voltage	AC 120V/60Hz

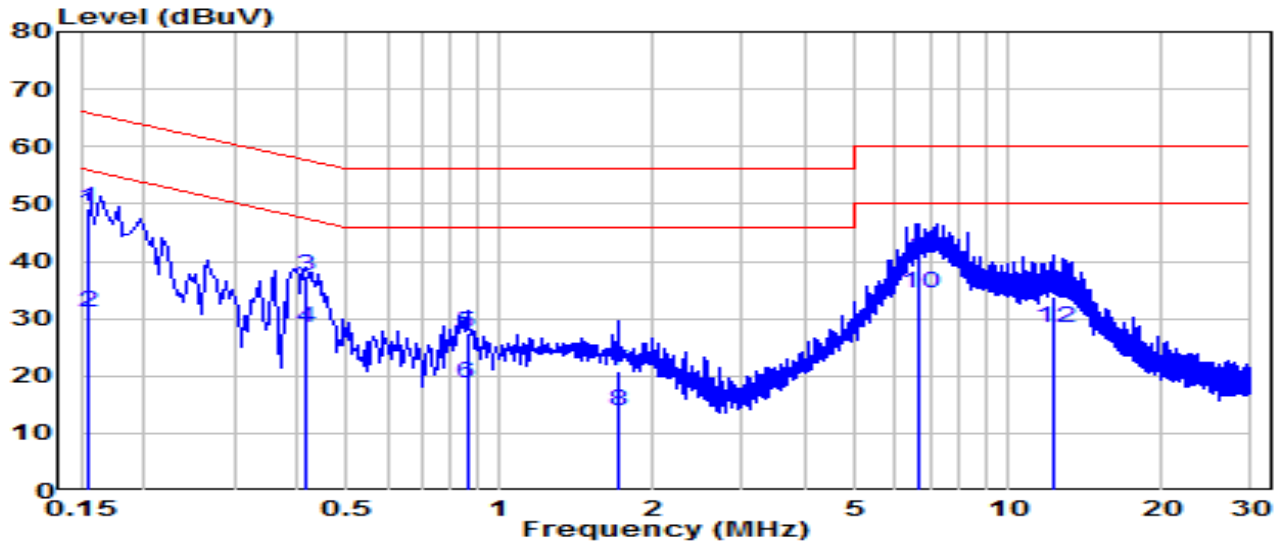


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.154	39.45	9.62	49.07	-16.68	65.75	QP
2	0.154	21.37	9.62	30.99	-24.77	55.75	Average
3	0.415	27.81	9.64	37.45	-20.09	57.54	QP
4	0.415	18.82	9.64	28.46	-19.08	47.54	Average
5	0.861	17.76	9.66	27.42	-28.58	56.00	QP
6	0.861	9.18	9.66	18.85	-27.15	46.00	Average
7	1.716	11.16	9.68	20.84	-35.16	56.00	QP
8	1.716	4.10	9.68	13.78	-32.22	46.00	Average
9	*	6.674	9.79	40.50	-19.50	60.00	QP
10	*	6.674	9.79	34.39	-15.61	50.00	Average
11	12.339	24.03	9.90	33.93	-26.07	60.00	QP
12	12.339	18.36	9.90	28.25	-21.75	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-12
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	23.7°C /52%
Polarity	Line1	Site / Test Engineer	SR2 / Bob
Test Mode	802.11ax-20MHz_TX_Band5_CH 33_ANT 0+1 NSS1	Test Voltage	AC 240V/60Hz

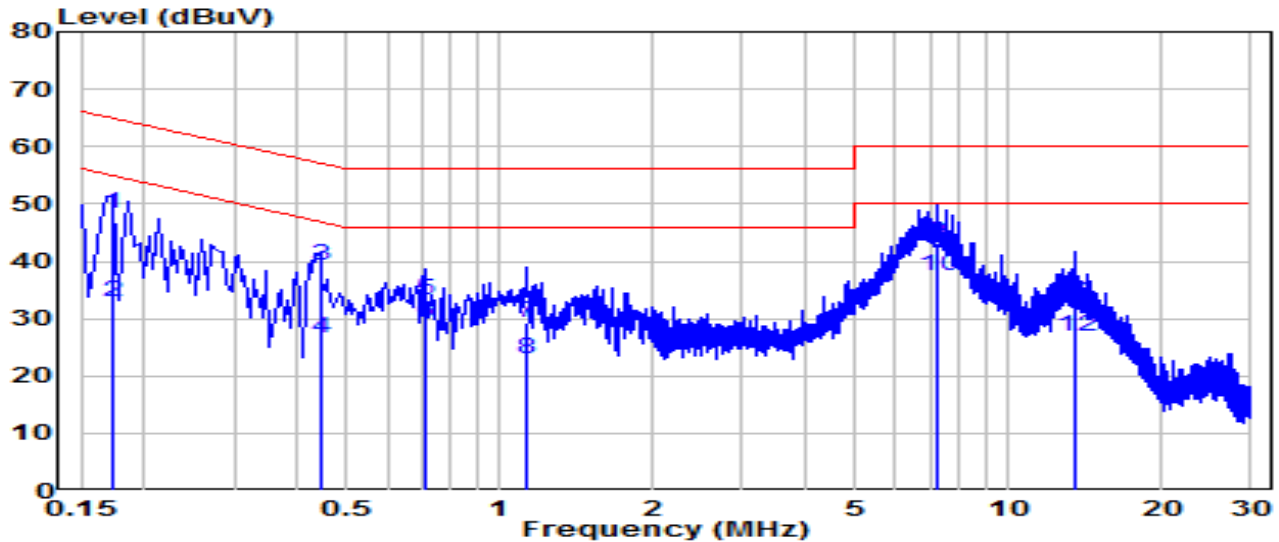


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1		0.172	38.72	9.62	48.34	-16.50	64.84	QP
2		0.172	23.42	9.62	33.05	-21.79	54.84	Average
3		0.442	29.55	9.64	39.19	-17.83	57.02	QP
4		0.442	17.06	9.64	26.70	-20.31	47.02	Average
5		0.712	23.47	9.65	33.13	-22.87	56.00	QP
6		0.712	19.54	9.65	29.20	-16.80	46.00	Average
7		1.122	19.74	9.67	29.41	-26.59	56.00	QP
8		1.122	13.27	9.67	22.94	-23.06	46.00	Average
9	*	7.282	33.32	9.80	43.12	-16.88	60.00	QP
10	*	7.282	27.49	9.80	37.29	-12.71	50.00	Average
11		13.518	23.04	9.88	32.92	-27.08	60.00	QP
12		13.518	17.11	9.88	26.99	-23.01	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-12
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	23.7°C /52%
Polarity	Neutral	Site / Test Engineer	SR2 / Bob
Test Mode	802.11ax-20MHz_TX_Band5_CH 33_ANT 0+1 NSS1	Test Voltage	AC 240V/60Hz

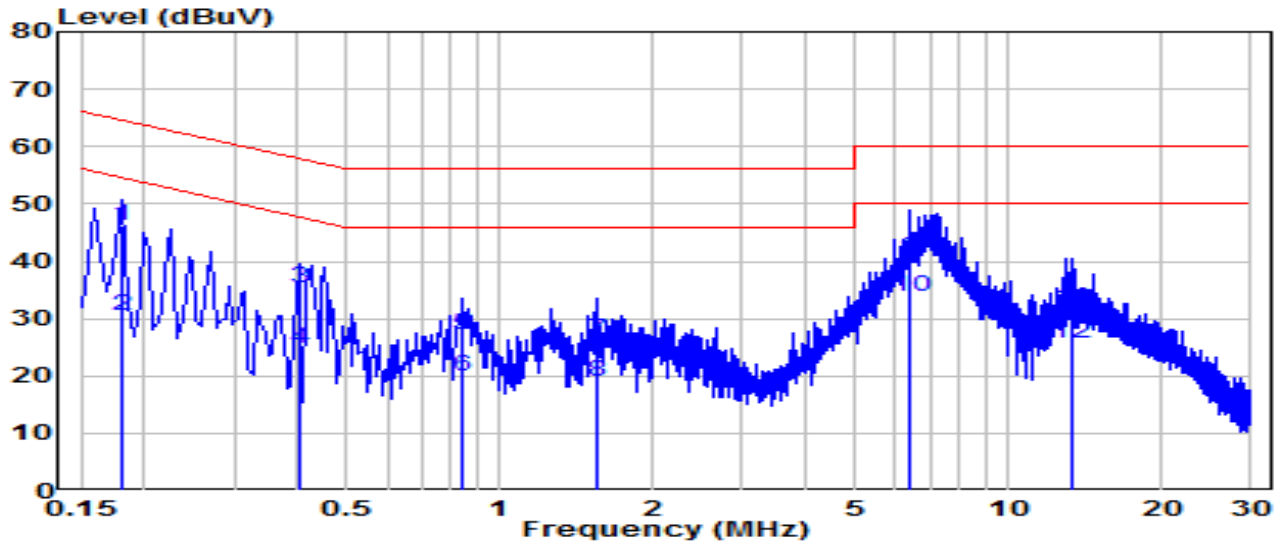


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.181	36.44	9.62	46.07	-18.35	64.42	QP
2	0.181	20.91	9.62	30.53	-23.89	54.42	Average
3	0.402	25.68	9.63	35.32	-22.49	57.81	QP
4	0.402	15.15	9.63	24.78	-23.03	47.81	Average
5	0.847	17.44	9.66	27.10	-28.90	56.00	QP
6	0.847	10.15	9.66	19.81	-26.19	46.00	Average
7	1.554	16.54	9.68	26.22	-29.78	56.00	QP
8	1.554	9.44	9.68	19.12	-26.88	46.00	Average
9	*	6.436	9.78	40.60	-19.40	60.00	QP
10	*	6.436	9.78	33.86	-16.14	50.00	Average
11	13.257	21.92	9.91	31.83	-28.17	60.00	QP
12	13.257	15.69	9.91	25.60	-24.40	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-12
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	23.7°C /52%
Polarity	Line1	Site / Test Engineer	SR2 / Bob
Test Mode	802.11ax-20MHz_TX_Band5_CH 33_ANT 0+1 NSS2	Test Voltage	AC 120V/60Hz

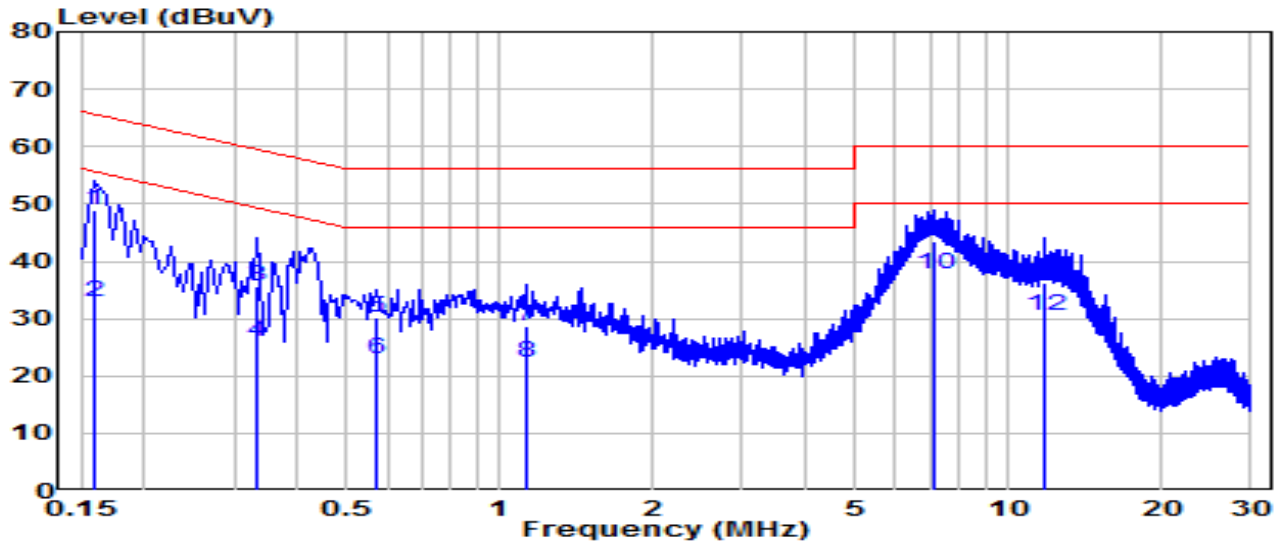


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.159	39.32	9.62	48.94	-16.57	65.52	QP
2	0.159	23.33	9.62	32.95	-22.56	55.52	Average
3	0.334	26.02	9.63	35.65	-23.69	59.34	QP
4	0.334	16.19	9.63	25.82	-23.52	49.34	Average
5	0.573	20.45	9.65	30.09	-25.91	56.00	QP
6	0.573	13.24	9.65	22.88	-23.12	46.00	Average
7	1.122	19.03	9.67	28.71	-27.29	56.00	QP
8	1.122	12.70	9.67	22.37	-23.63	46.00	Average
9	*	7.165	9.79	43.36	-16.64	60.00	QP
10	*	7.165	9.79	37.80	-12.20	50.00	Average
11	11.844	26.50	9.87	36.37	-23.63	60.00	QP
12	11.844	20.58	9.87	30.45	-19.55	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-12
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	23.7°C /52%
Polarity	Neutral	Site / Test Engineer	SR2 / Bob
Test Mode	802.11ax-20MHz_TX_Band5_CH 33_ANT 0+1 NSS2	Test Voltage	AC 120V/60Hz

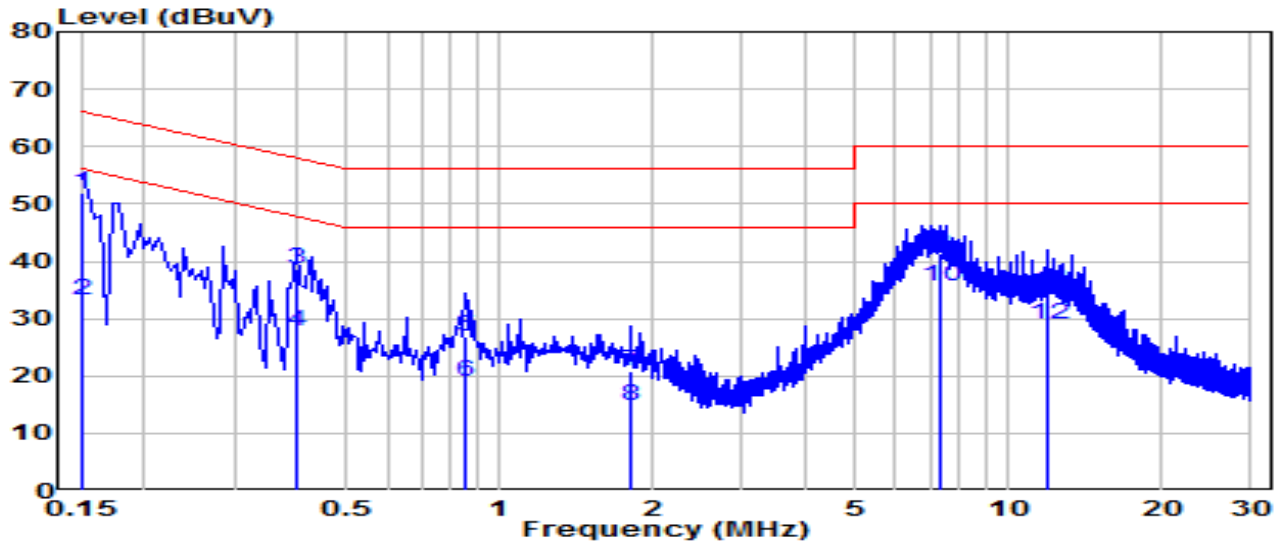


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	0.150	42.18	9.62	51.80	-14.20	66.00	QP
2	*	0.150	23.47	9.62	33.09	-22.91	56.00	Average
3		0.397	28.90	9.63	38.53	-19.37	57.91	QP
4		0.397	18.16	9.63	27.79	-20.11	47.91	Average
5		0.852	17.14	9.66	26.80	-29.20	56.00	QP
6		0.852	9.22	9.66	18.88	-27.12	46.00	Average
7		1.810	11.07	9.69	20.76	-35.24	56.00	QP
8		1.810	5.05	9.69	14.74	-31.26	46.00	Average
9		7.336	31.51	9.80	41.31	-18.69	60.00	QP
10		7.336	25.73	9.80	35.54	-14.46	50.00	Average
11		12.020	24.68	9.89	34.58	-25.42	60.00	QP
12		12.020	18.96	9.89	28.86	-21.14	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-12
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	23.7°C /52%
Polarity	Line1	Site / Test Engineer	SR2 / Bob
Test Mode	802.11ax-20MHz_TX_Band5_CH 33_ANT 0+1 NSS2	Test Voltage	AC 240V/60Hz

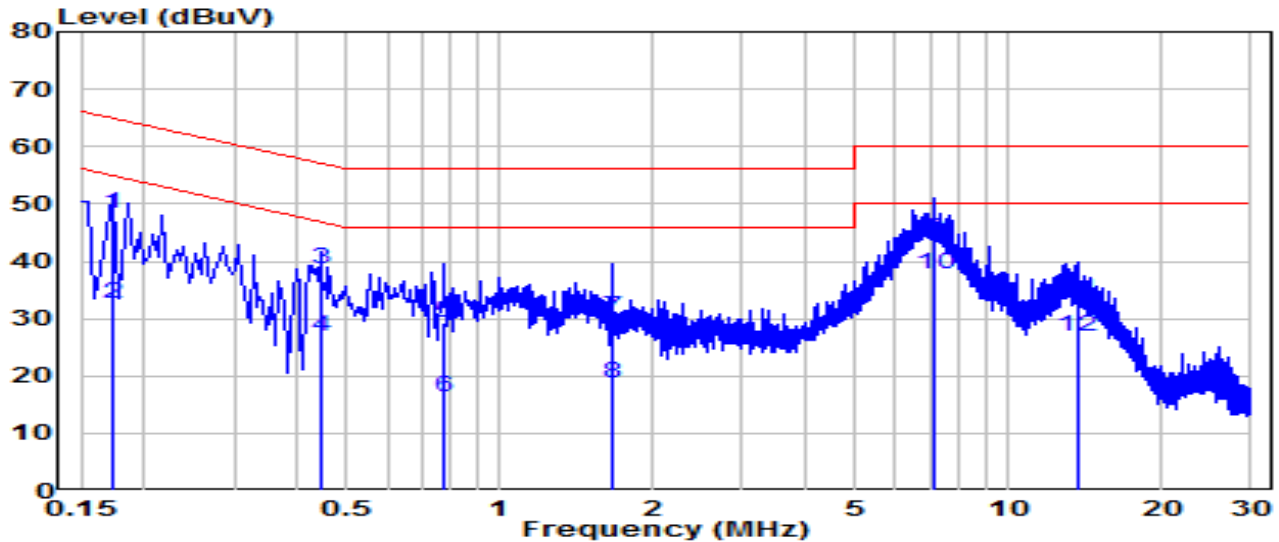


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.172	38.56	9.62	48.18	-16.66	64.84	QP
2	0.172	23.07	9.62	32.69	-22.15	54.84	Average
3	0.442	28.92	9.64	38.56	-18.46	57.02	QP
4	0.442	17.36	9.64	27.00	-20.02	47.02	Average
5	0.780	19.68	9.66	29.34	-26.66	56.00	QP
6	0.780	6.74	9.66	16.40	-29.60	46.00	Average
7	1.662	20.45	9.68	30.14	-25.86	56.00	QP
8	1.662	9.15	9.68	18.83	-27.17	46.00	Average
9	7.174	34.00	9.79	43.79	-16.21	60.00	QP
10	*	7.174	9.79	37.78	-12.22	50.00	Average
11	13.640	23.24	9.88	33.12	-26.88	60.00	QP
12	13.640	16.95	9.88	26.83	-23.17	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	BE11000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2023-12-12
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	23.7°C /52%
Polarity	Neutral	Site / Test Engineer	SR2 / Bob
Test Mode	802.11ax-20MHz_TX_Band5_CH 33_ANT 0+1 NSS2	Test Voltage	AC 240V/60Hz

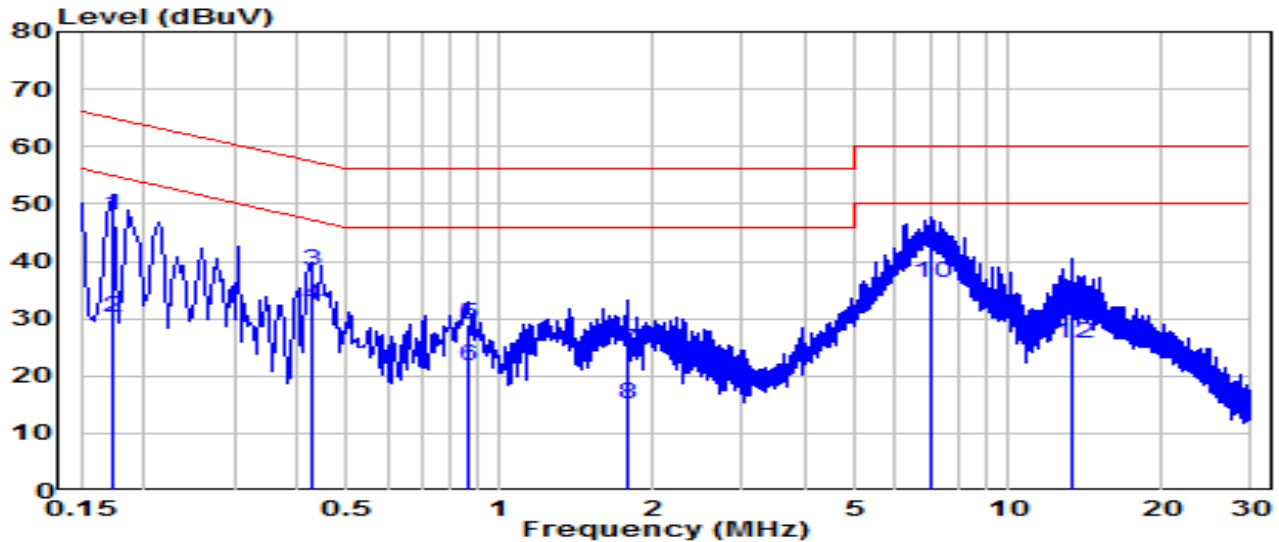

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.172	38.50	9.62	48.12	-16.72	64.84	QP
2	0.172	20.61	9.62	30.23	-24.61	54.84	Average
3	0.424	28.78	9.64	38.42	-18.94	57.36	QP
4	0.424	22.60	9.64	32.24	-15.12	47.36	Average
5	0.865	19.38	9.66	29.05	-26.95	56.00	QP
6	0.865	12.12	9.66	21.78	-24.22	46.00	Average
7	1.788	14.77	9.69	24.46	-31.54	56.00	QP
8	1.788	5.33	9.69	15.01	-30.99	46.00	Average
9	7.043	31.87	9.80	41.67	-18.33	60.00	QP
10	*	7.043	9.80	36.19	-13.81	50.00	Average
11	13.338	22.38	9.91	32.29	-27.71	60.00	QP
12	13.338	15.83	9.91	25.74	-24.26	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

7. Conclusion

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15E of the FCC rules.

Appendix A : Test Setup Photograph

Refer to “2311TW0113-UT” file.

Appendix B : External Photograph

Refer to “2311TW0113-UE” file.

Appendix C : Internal Photograph

Refer to “2311TW0113-UI” file.

The End
