


Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-AV	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz		

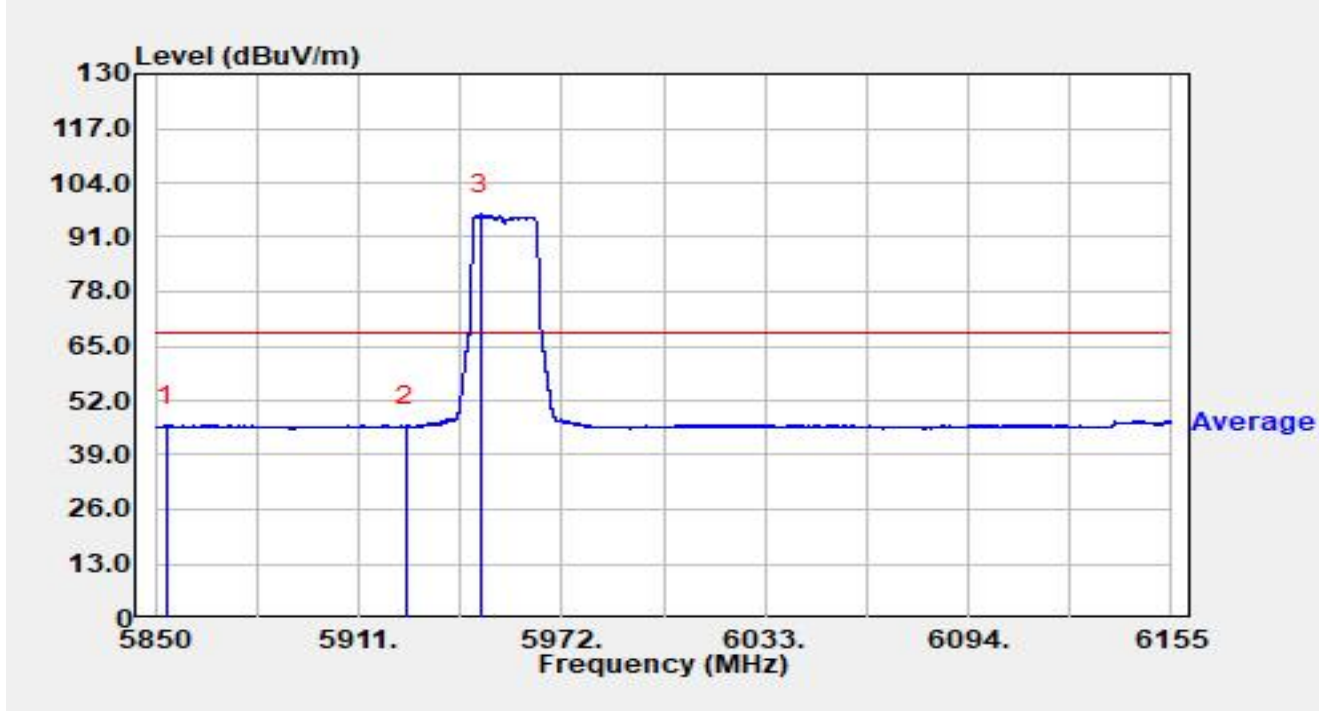


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5853.325	24.45	21.52	45.97	-22.23	68.20	Average
2		5925.000	24.27	21.59	45.87	-22.33	68.20	Average
3		5947.630	74.80	21.66	96.46	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-PK	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 7095MHz		

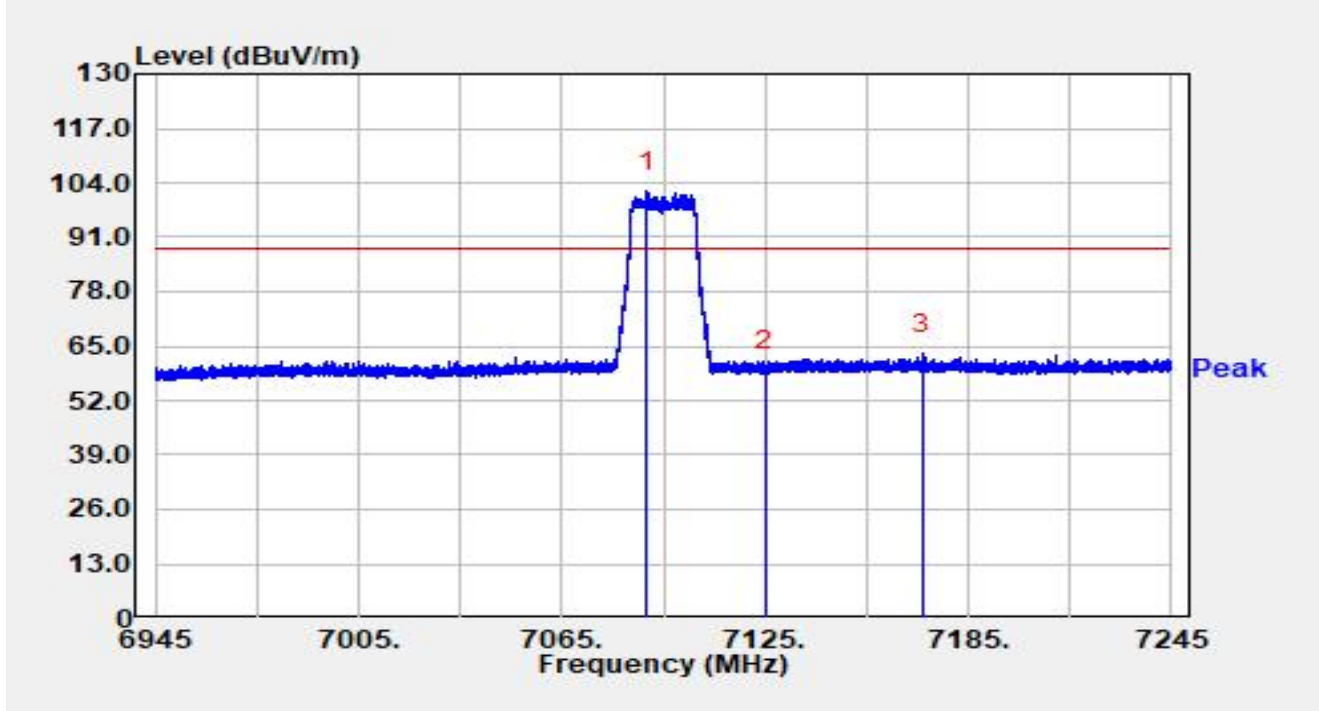


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7089.960	75.00	26.88	101.88	N/A	N/A	Peak
2		7125.000	32.37	26.94	59.31	-28.89	88.20	Peak
3	*	7171.500	35.96	27.28	63.24	-24.96	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-AV	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 7095MHz		

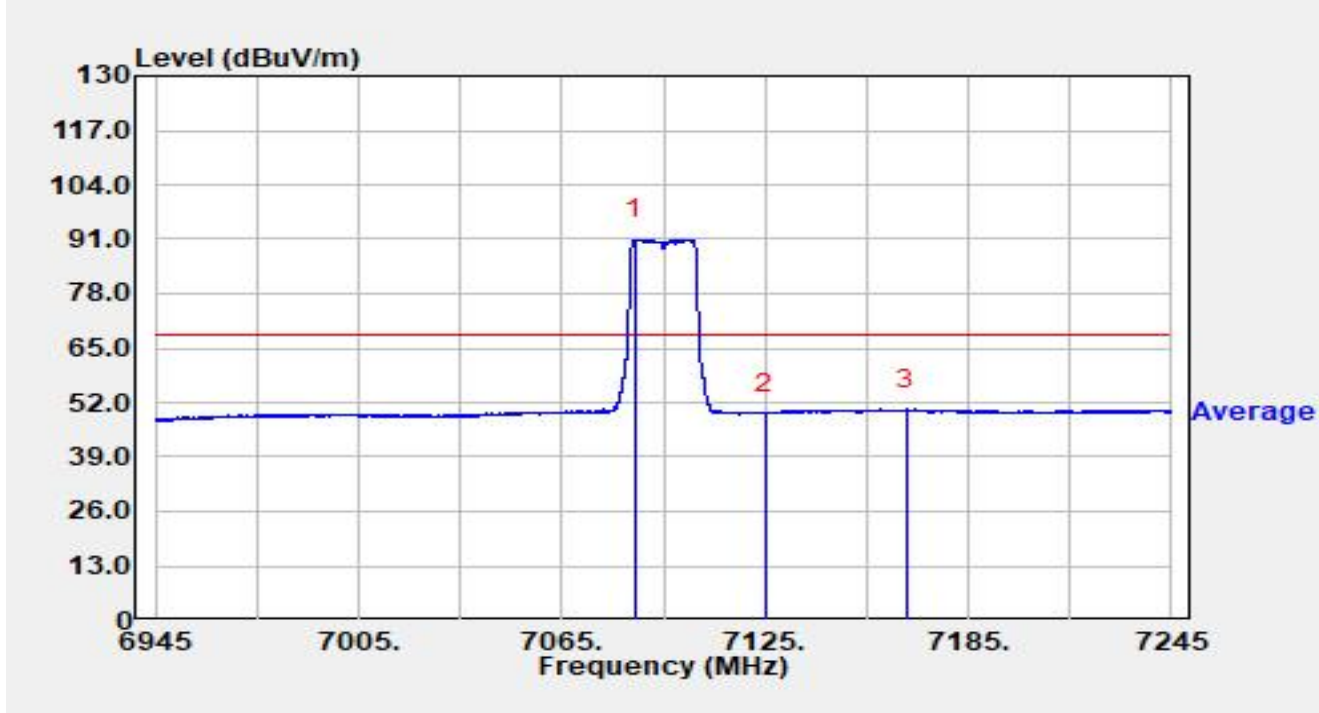


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7086.480	64.02	26.90	90.92	N/A	N/A	Average
2		7125.000	22.53	26.94	49.47	-18.73	68.20	Average
3	*	7166.670	23.01	27.33	50.34	-17.86	68.20	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-PK	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 7095MHz		

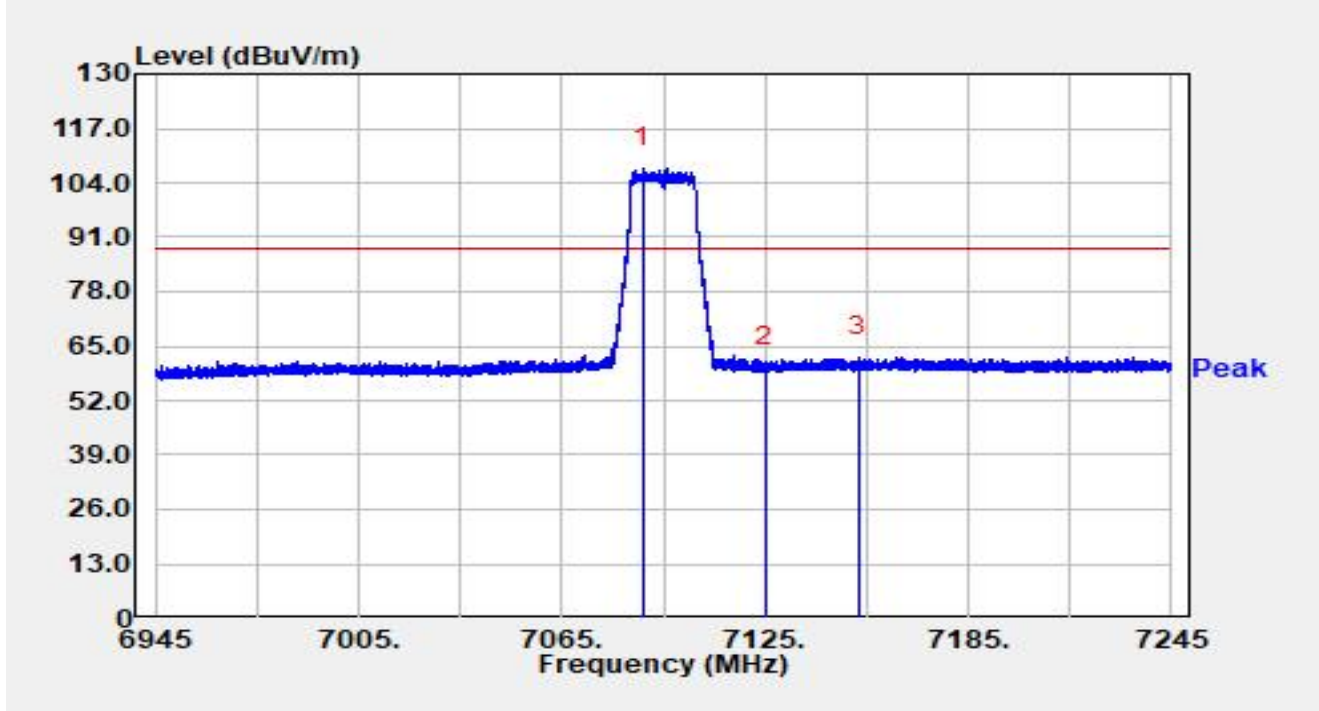


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7089.060	80.58	26.88	107.46	N/A	N/A	Peak
2		7125.000	33.04	26.94	59.98	-28.22	88.20	Peak
3	*	7152.660	35.01	27.34	62.35	-25.85	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-AV	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 7095MHz		

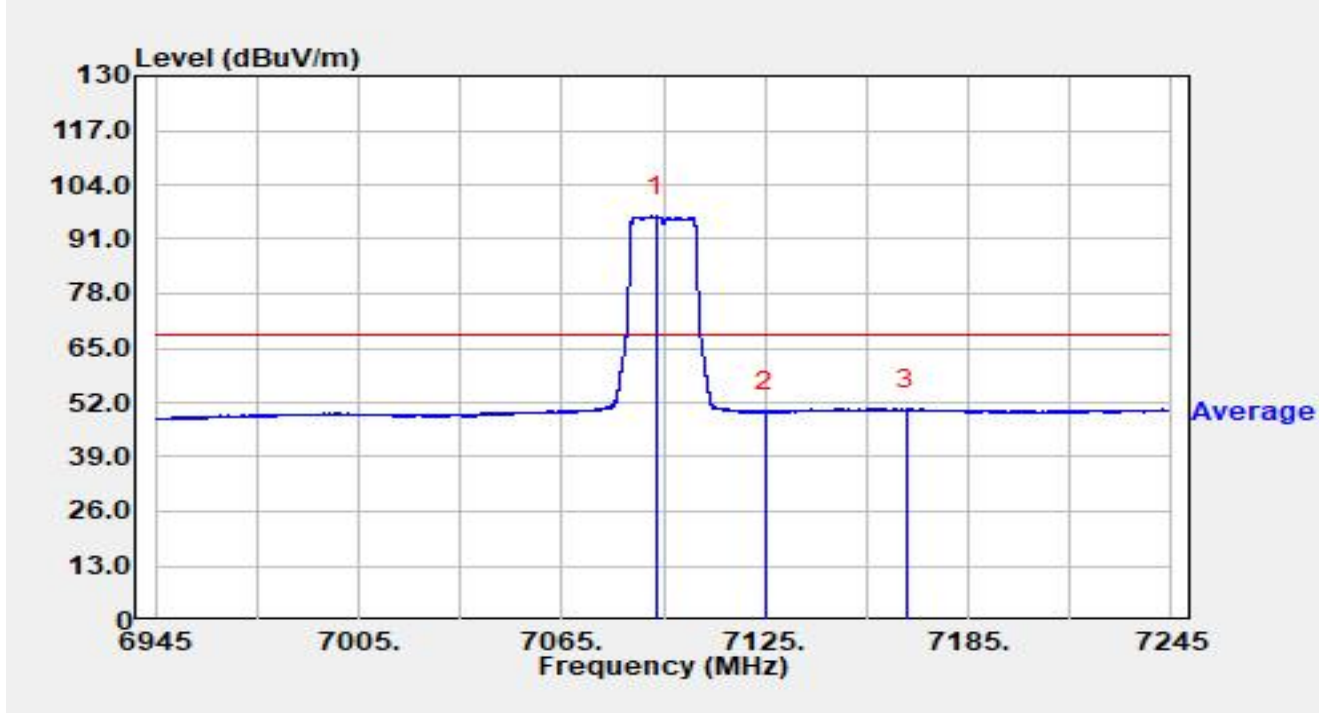


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7092.930	69.75	26.86	96.61	N/A	N/A	Average
2		7125.000	22.66	26.94	49.60	-18.60	68.20	Average
3	*	7166.820	23.13	27.33	50.46	-17.74	68.20	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-PK	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5965MHz		

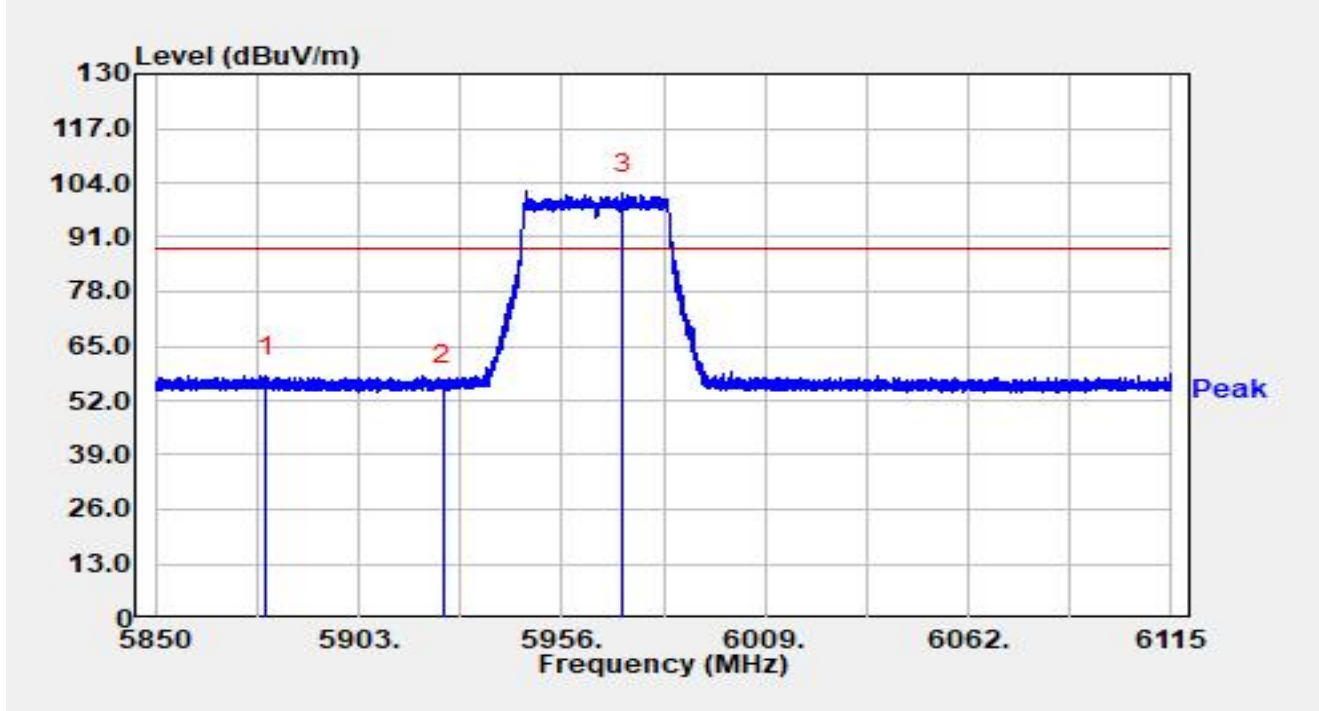


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5879.044	36.23	21.60	57.83	-30.37	88.20	Peak
2		5925.000	34.14	21.59	55.73	-32.47	88.20	Peak
3		5971.820	79.89	21.65	101.54	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-AV	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5965MHz		

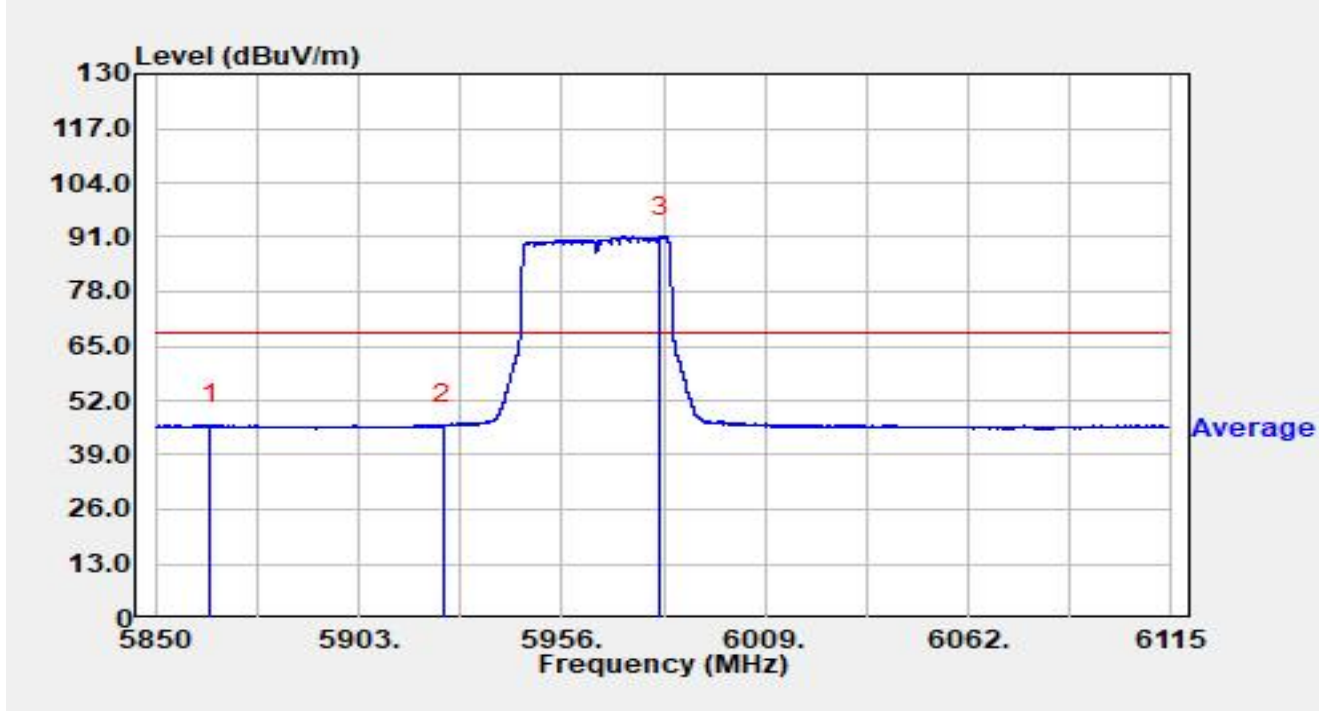


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5864.390	24.63	21.61	46.25	-21.95	68.20	Average
2		5925.000	24.60	21.59	46.19	-22.01	68.20	Average
3		5981.599	69.61	21.63	91.24	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-PK	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5965MHz		

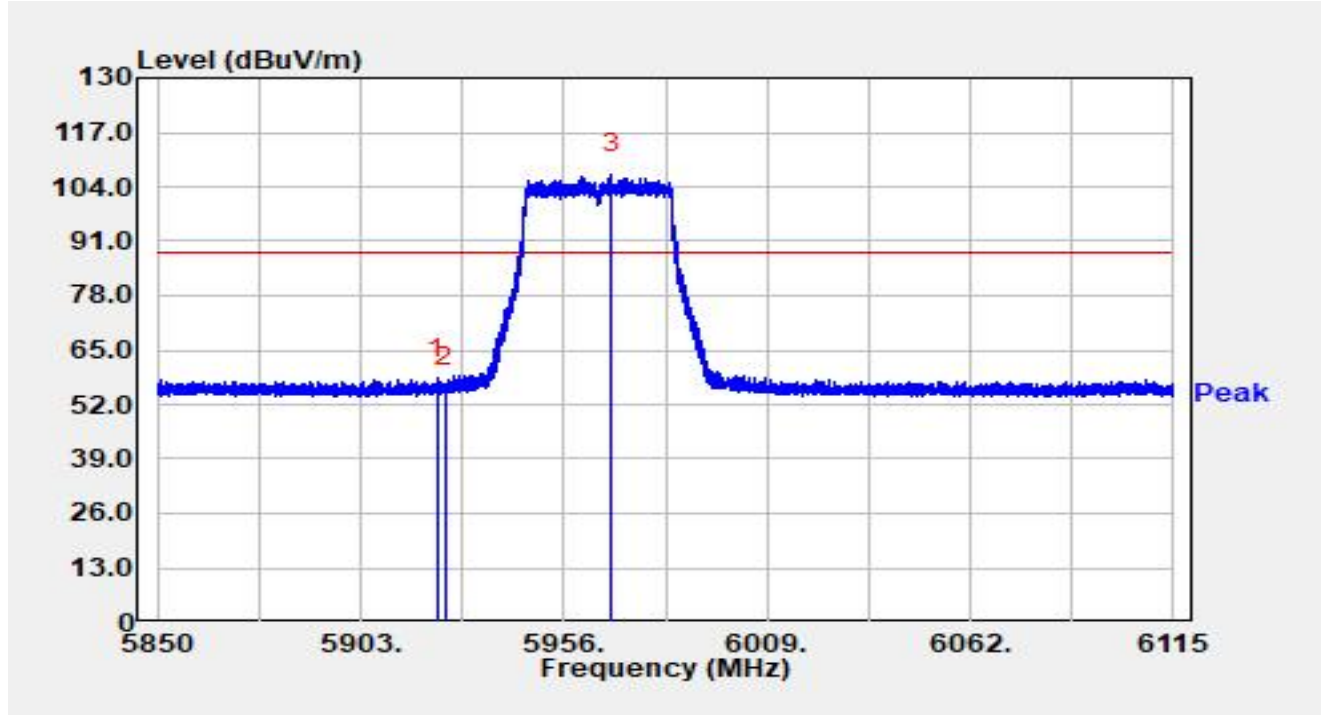


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5922.955	36.62	21.58	58.20	-30.00	88.20	Peak
2		5925.000	34.53	21.59	56.12	-32.08	88.20	Peak
3		5968.508	85.37	21.64	107.01	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-AV	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5965MHz		

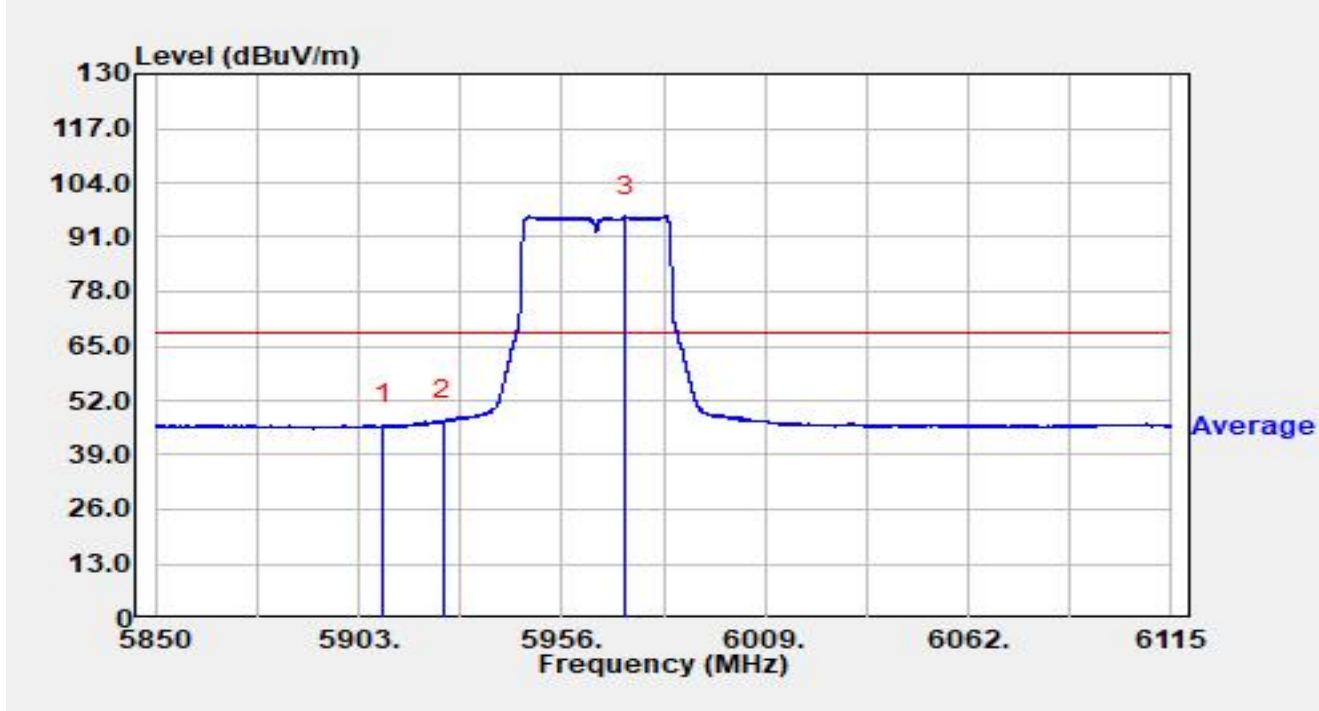


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5909.387	24.59	21.54	46.13	-22.07	68.20	Average
2	*	5925.000	25.71	21.59	47.30	-20.90	68.20	Average
3		5972.722	74.28	21.65	95.93	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-PK	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 7085MHz		

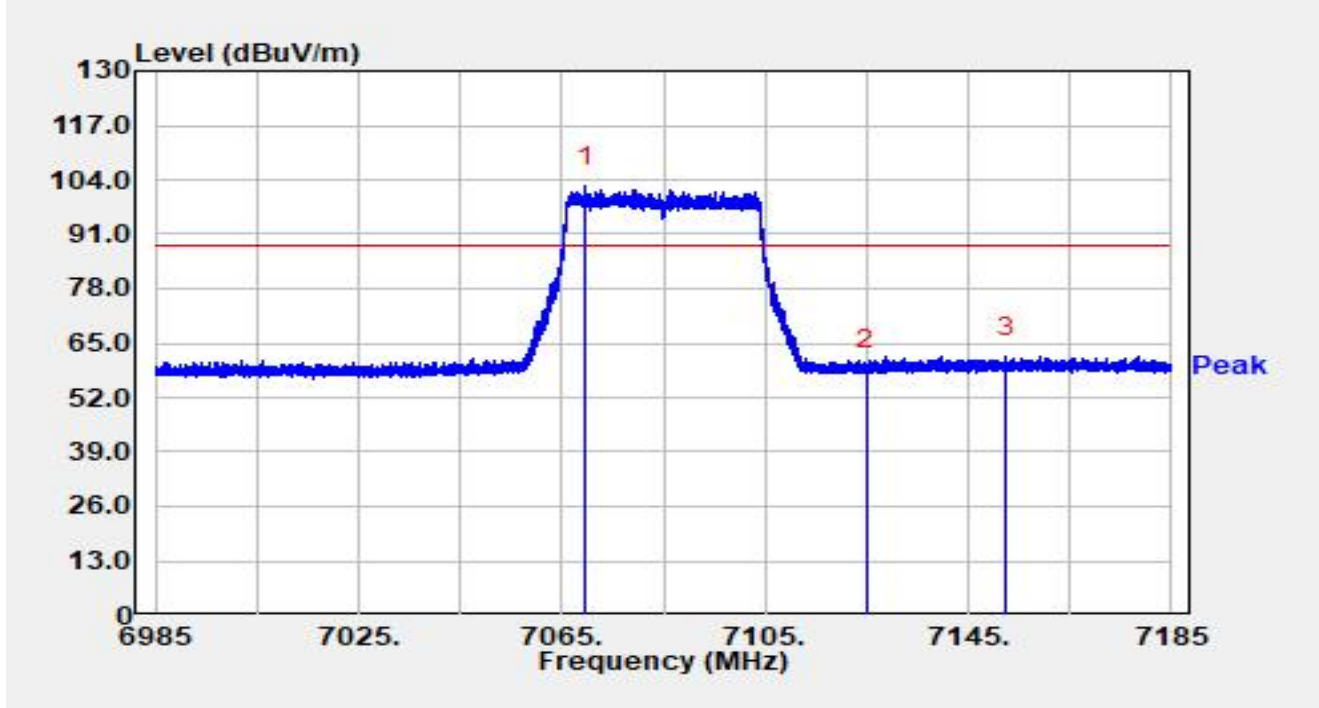


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7069.800	75.30	27.05	102.35	N/A	N/A	Peak
2		7125.000	31.67	26.94	58.61	-29.59	88.20	Peak
3	*	7152.480	34.37	27.34	61.71	-26.49	88.20	Peak

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-AV	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 7085MHz		

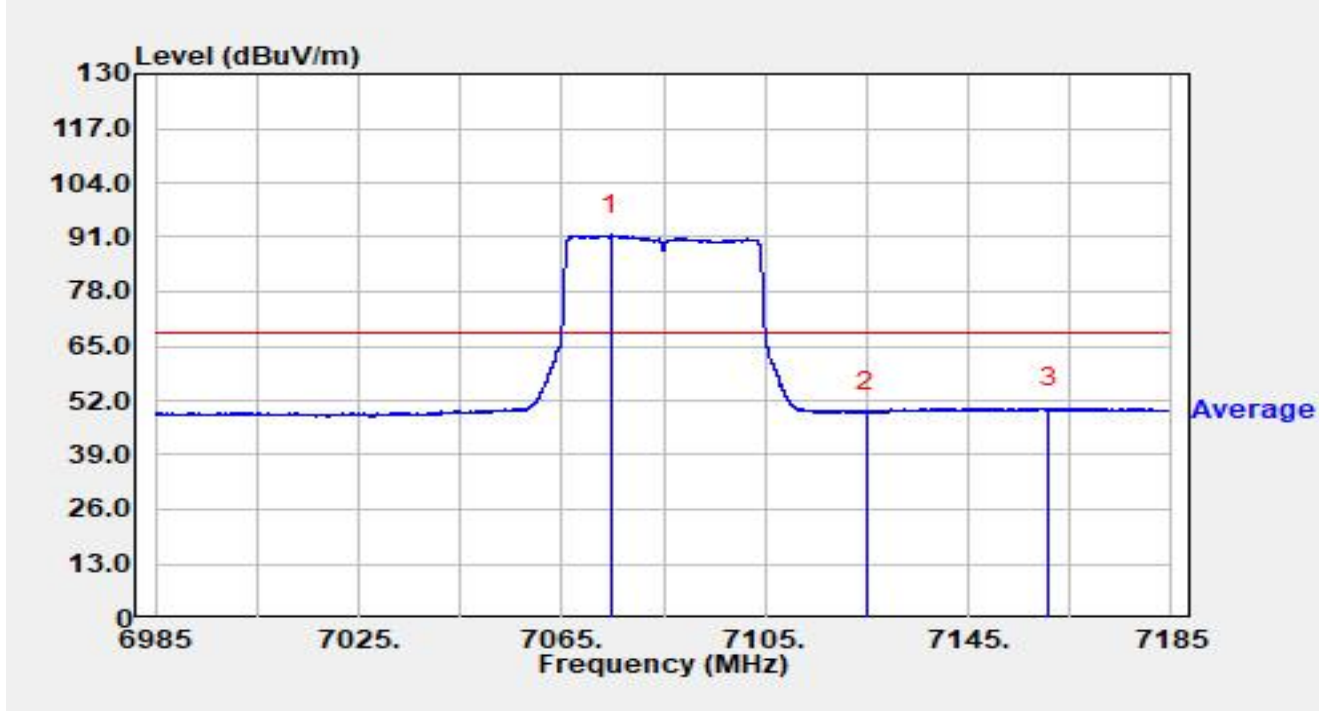


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7074.680	64.51	26.99	91.50	N/A	N/A	Average
2		7125.000	22.34	26.94	49.28	-18.92	68.20	Average
3	*	7160.820	22.78	27.36	50.13	-18.07	68.20	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-PK	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 7085MHz		

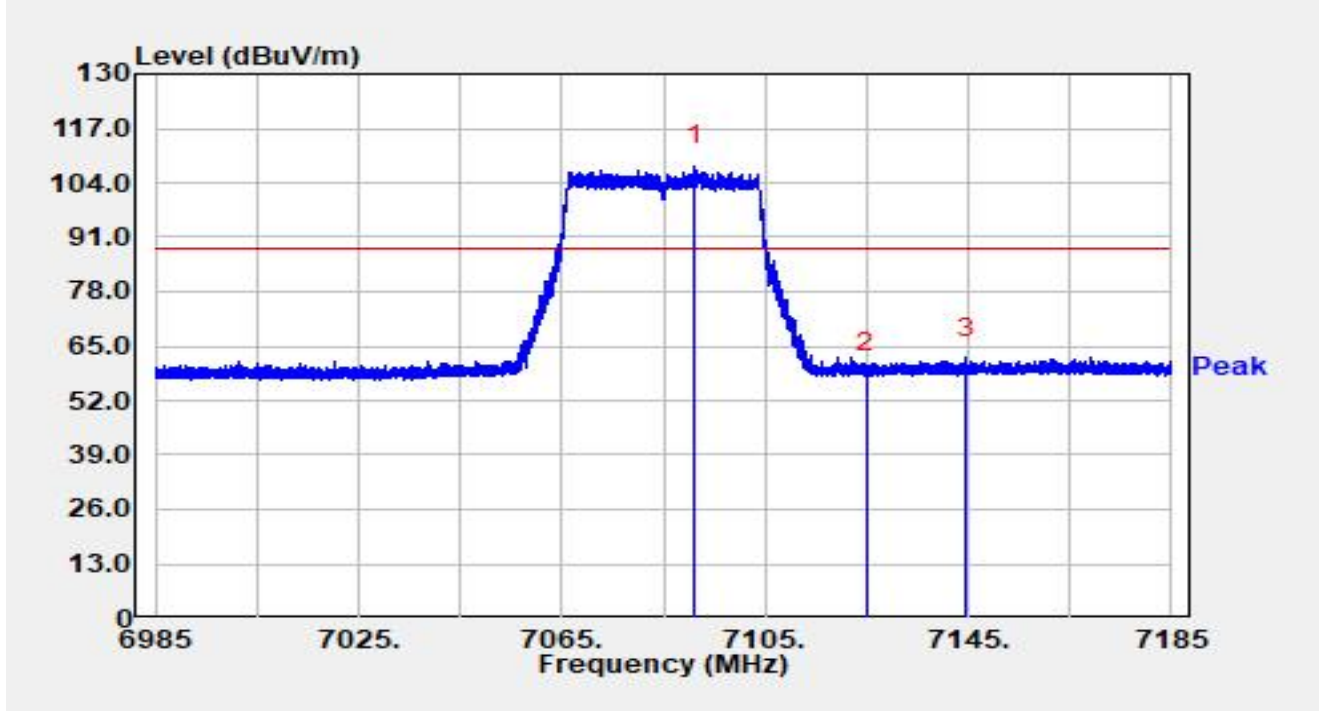


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7091.260	81.24	26.87	108.12	N/A	N/A	Peak
2		7125.000	31.78	26.94	58.72	-29.48	88.20	Peak
3	*	7144.480	35.05	27.24	62.29	-25.91	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-AV	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 7085MHz		

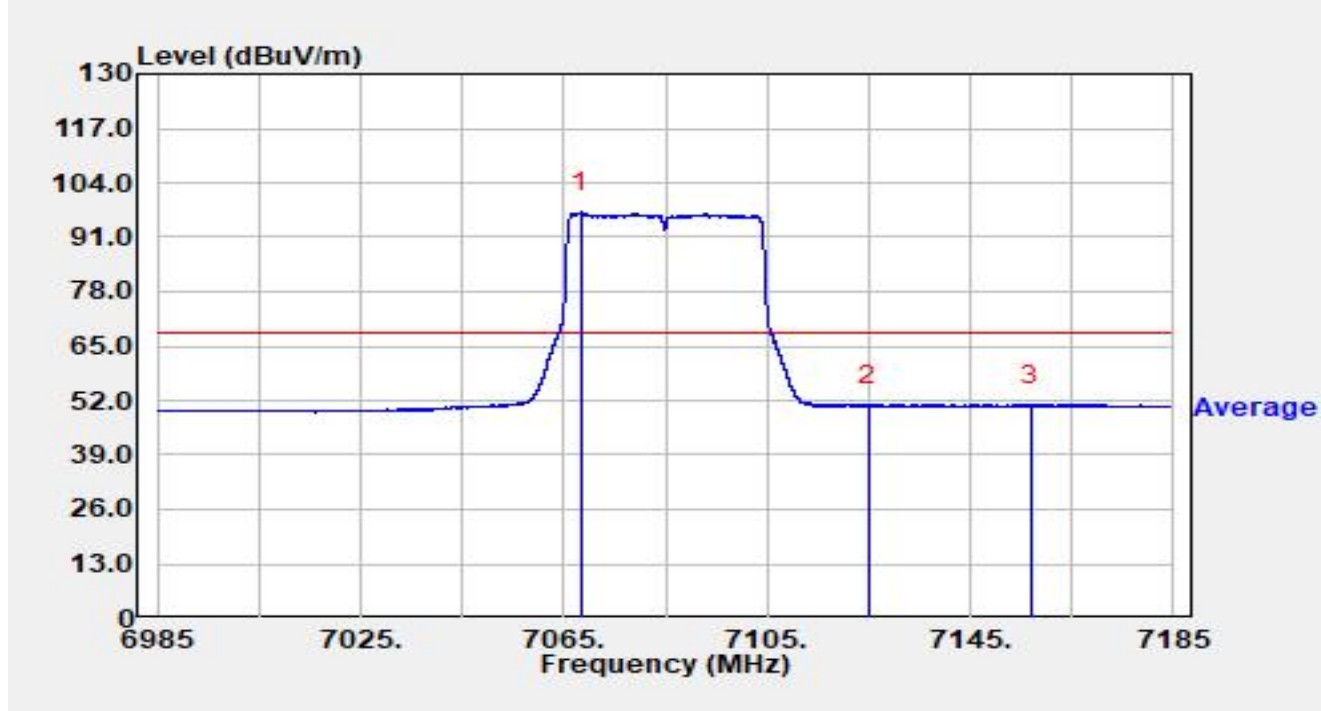


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7068.280	69.87	27.05	96.92	N/A	N/A	Average
2		7125.000	23.62	26.94	50.56	-17.64	68.20	Average
3	*	7156.880	23.61	27.36	50.97	-17.23	68.20	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-PK	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5985MHz		

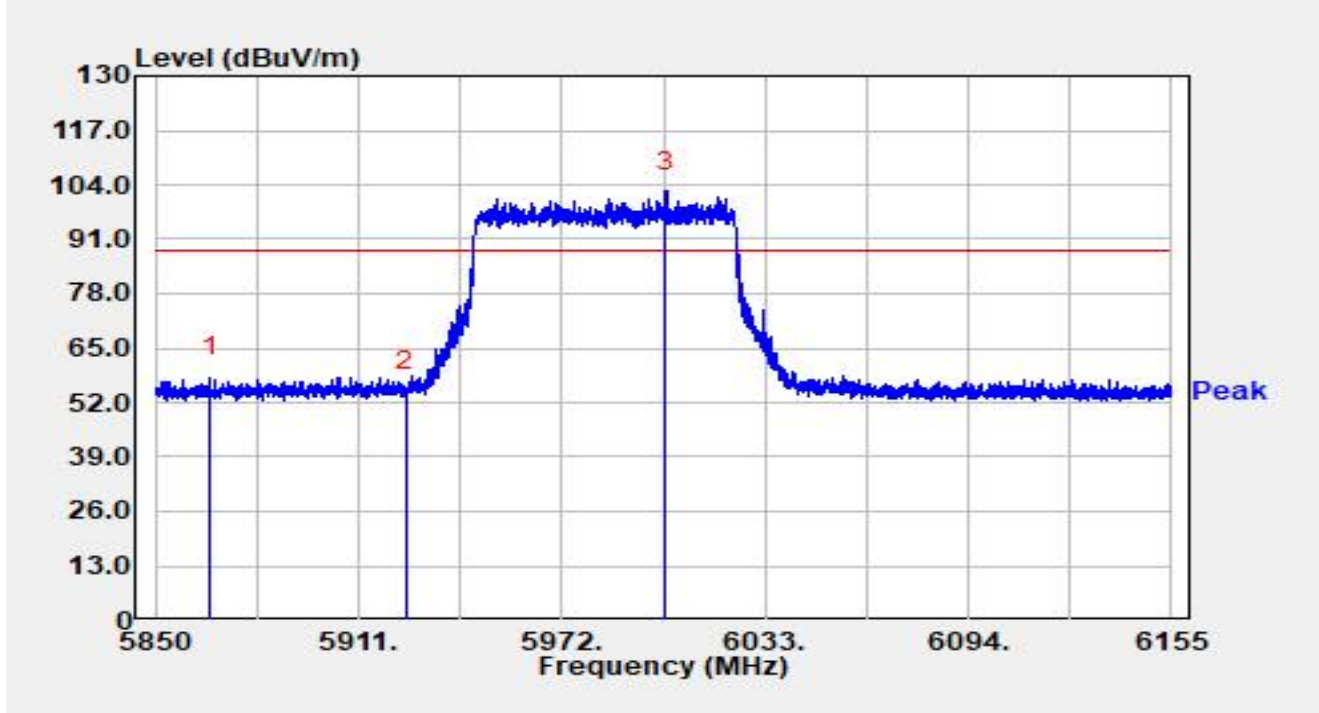


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5866.409	36.32	21.61	57.93	-30.27	88.20	Peak
2		5925.000	33.02	21.59	54.61	-33.59	88.20	Peak
3		6003.293	80.59	21.79	102.38	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-AV	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5985MHz		

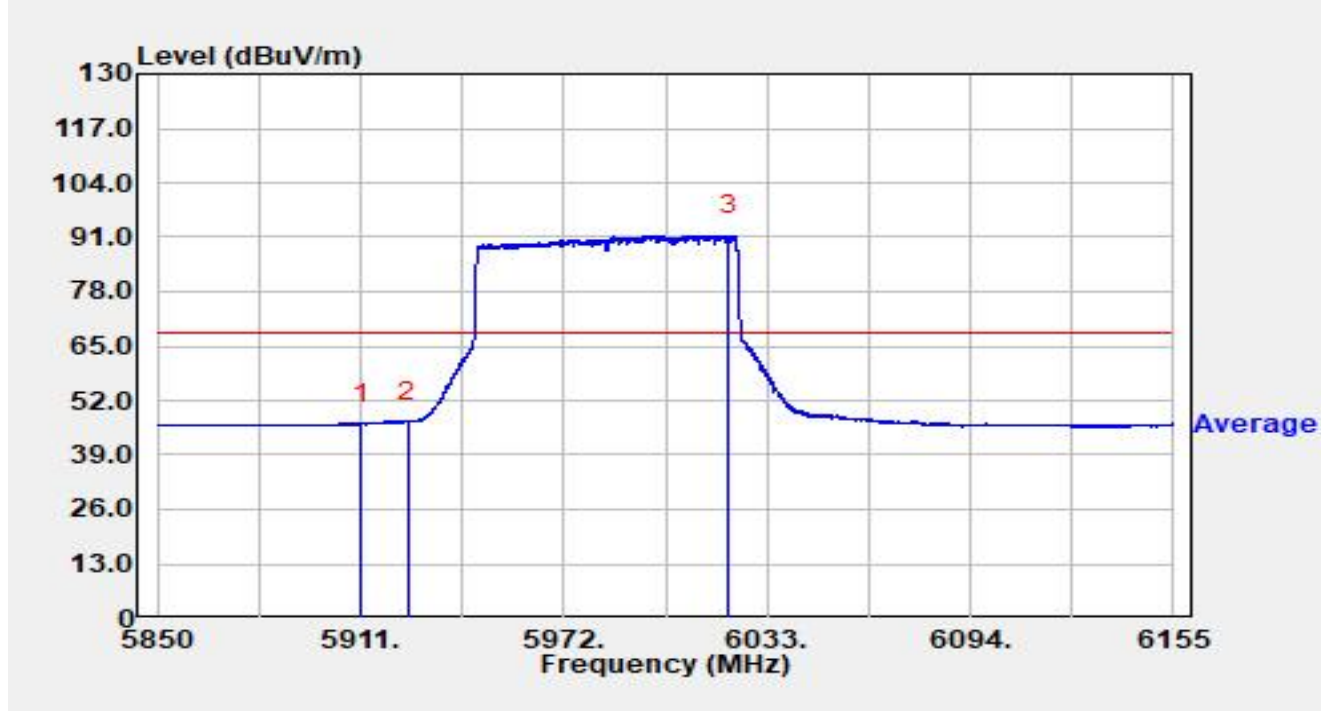


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5911.366	25.04	21.54	46.58	-21.62	68.20	Average
2	*	5925.000	25.38	21.59	46.98	-21.22	68.20	Average
3		6021.563	69.35	22.01	91.36	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-PK	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5985MHz		

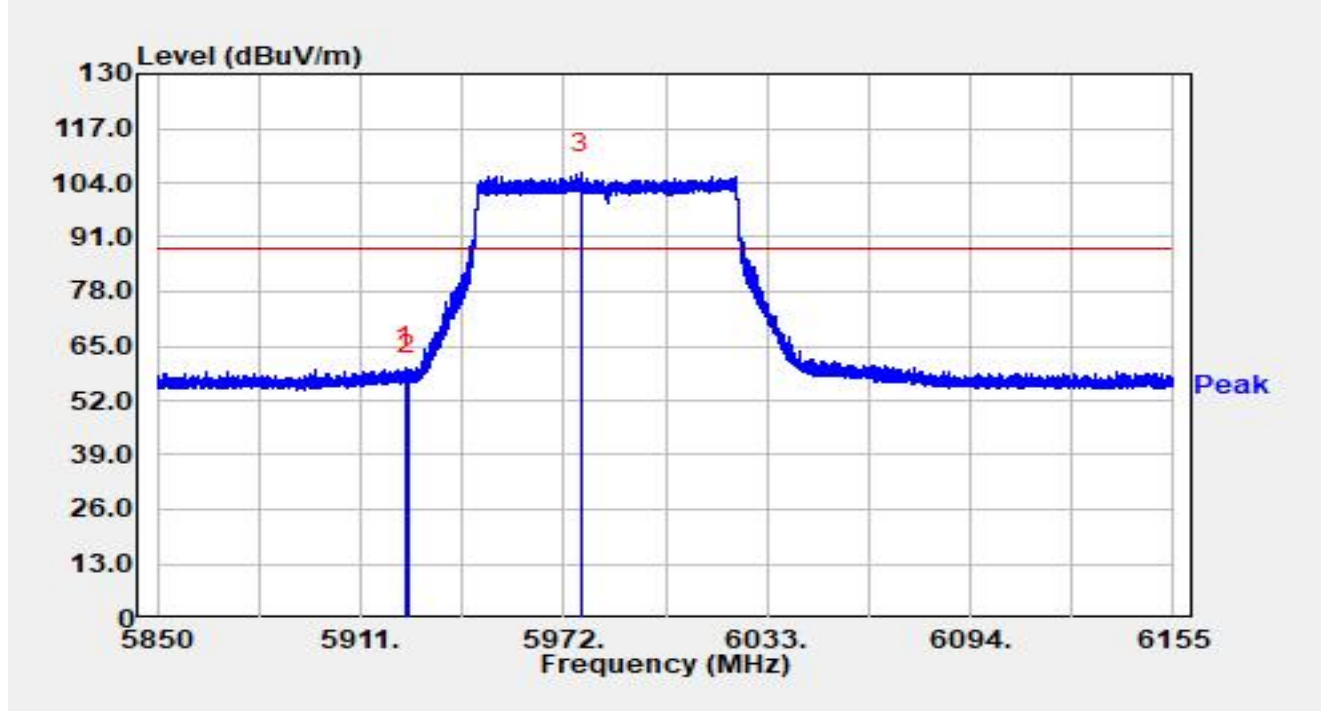


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.237	38.28	21.59	59.87	-28.33	88.20	Peak
2		5925.000	36.54	21.59	58.14	-30.06	88.20	Peak
3		5977.002	84.71	21.65	106.36	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-AV	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5985MHz		

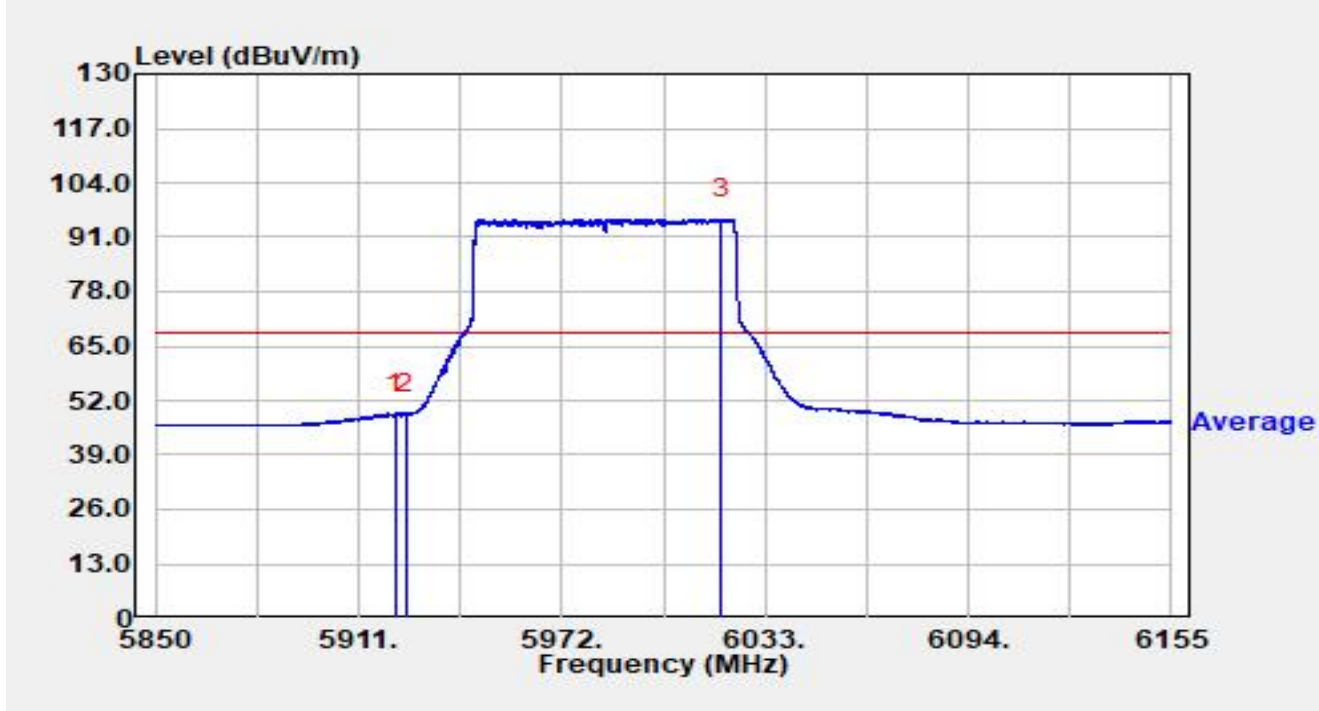


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5921.950	27.34	21.58	48.92	-19.28	68.20	Average
2		5925.000	27.22	21.59	48.81	-19.39	68.20	Average
3		6020.038	73.39	22.00	95.39	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-PK	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 7025MHz		

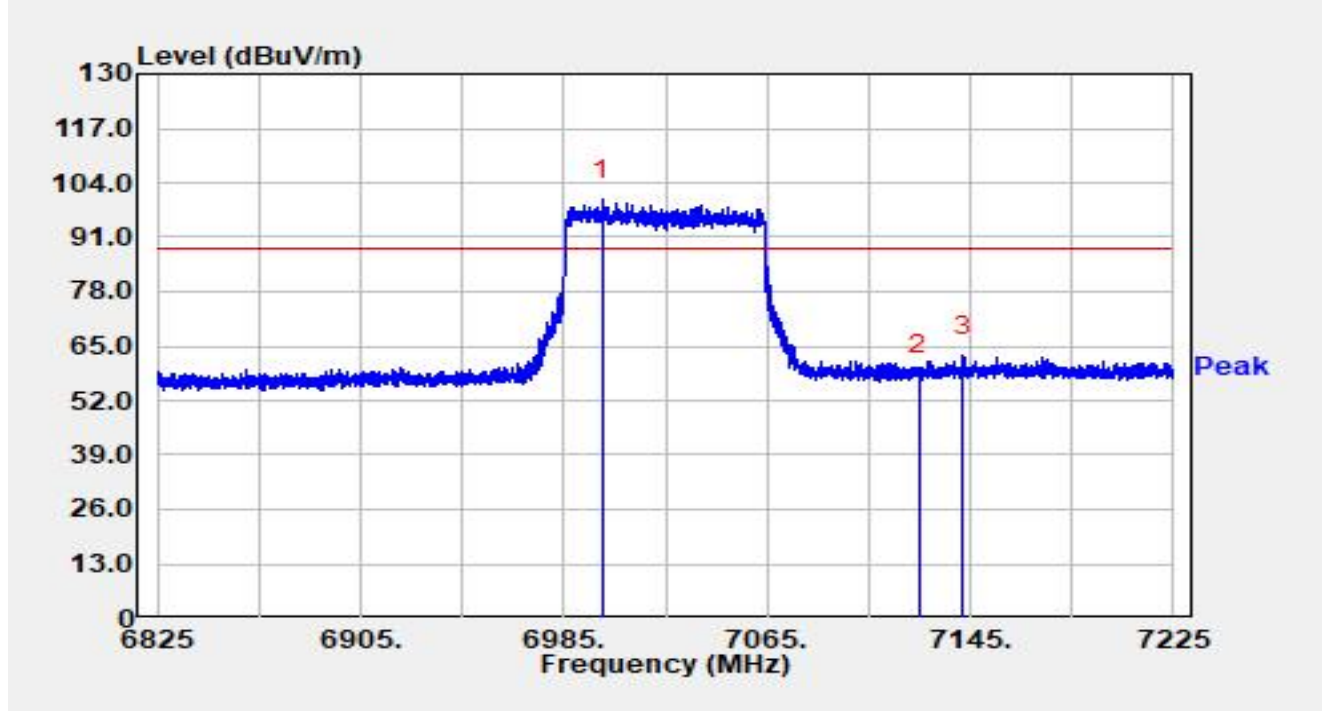


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7000.120	73.48	26.43	99.91	N/A	N/A	Peak
2		7125.000	31.43	26.94	58.37	-29.83	88.20	Peak
3	*	7142.360	35.33	27.23	62.55	-25.65	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-AV	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 7025MHz		

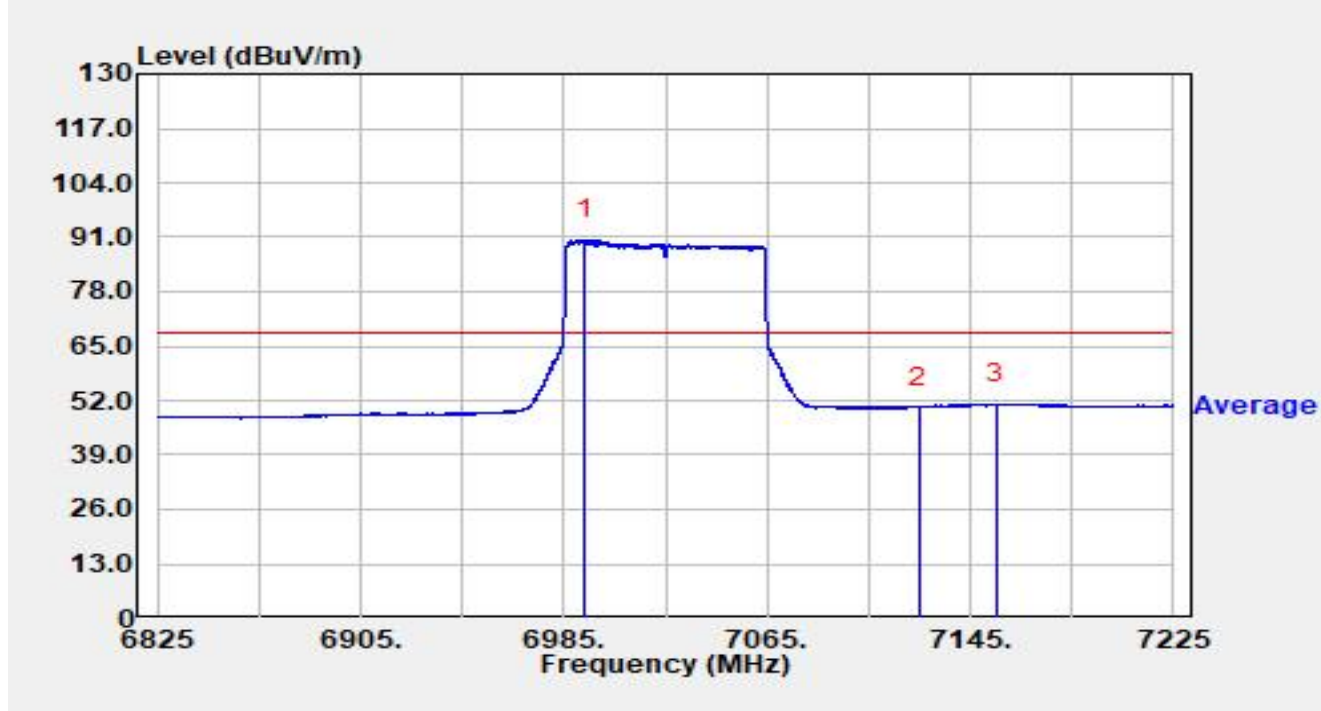


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6993.240	64.01	26.38	90.39	N/A	N/A	Average
2		7125.000	23.48	26.94	50.42	-17.78	68.20	Average
3	*	7155.360	23.75	27.36	51.11	-17.09	68.20	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-PK	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 7025MHz		

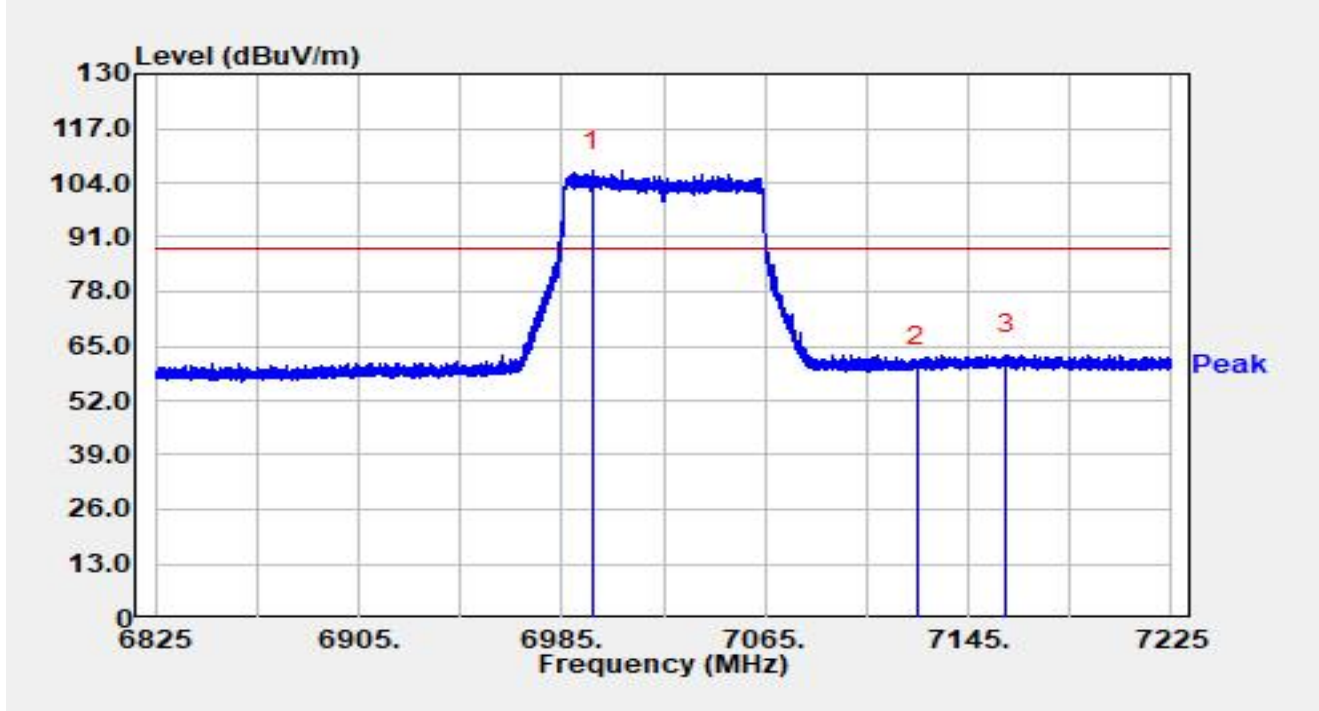


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6996.960	80.34	26.40	106.74	N/A	N/A	Peak
2		7125.000	33.13	26.94	60.07	-28.13	88.20	Peak
3	*	7159.760	35.63	27.36	62.99	-25.21	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-AV	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 7025MHz		

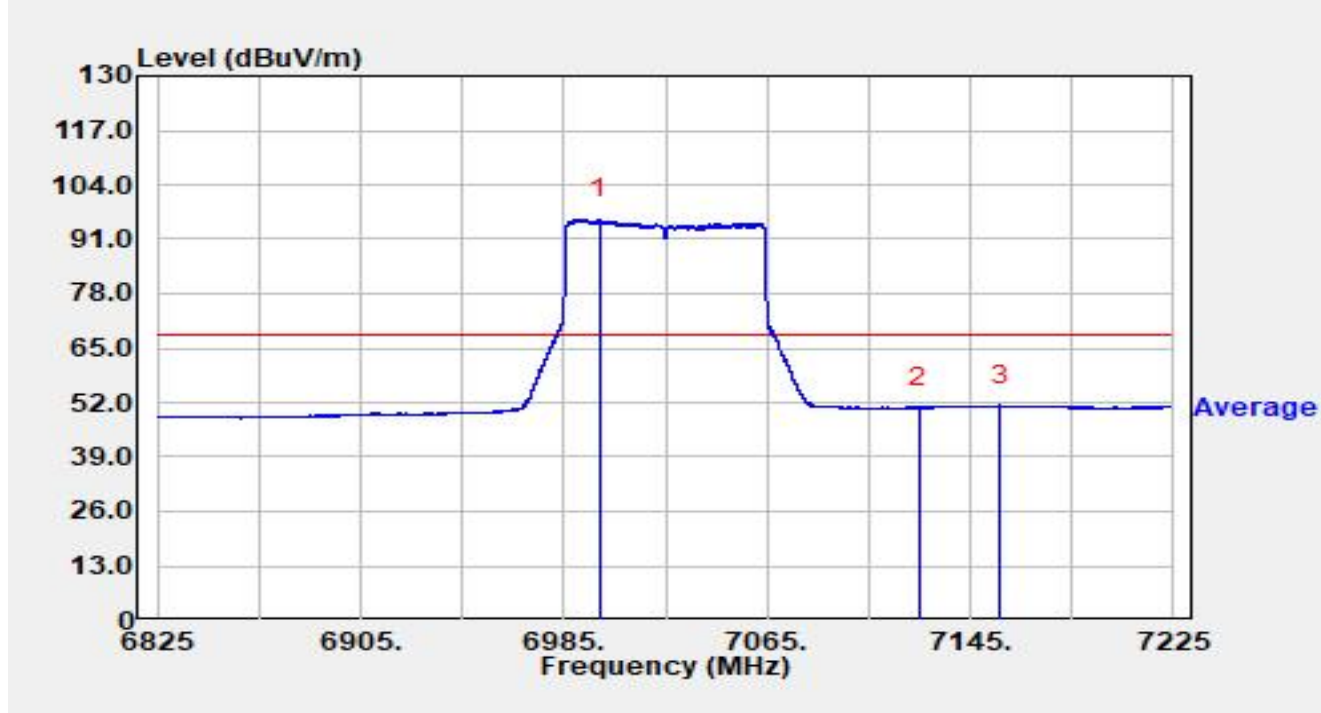


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6998.880	69.35	26.42	95.77	N/A	N/A	Average
2		7125.000	23.80	26.94	50.74	-17.46	68.20	Average
3	*	7156.960	23.92	27.36	51.28	-16.92	68.20	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-PK	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz		

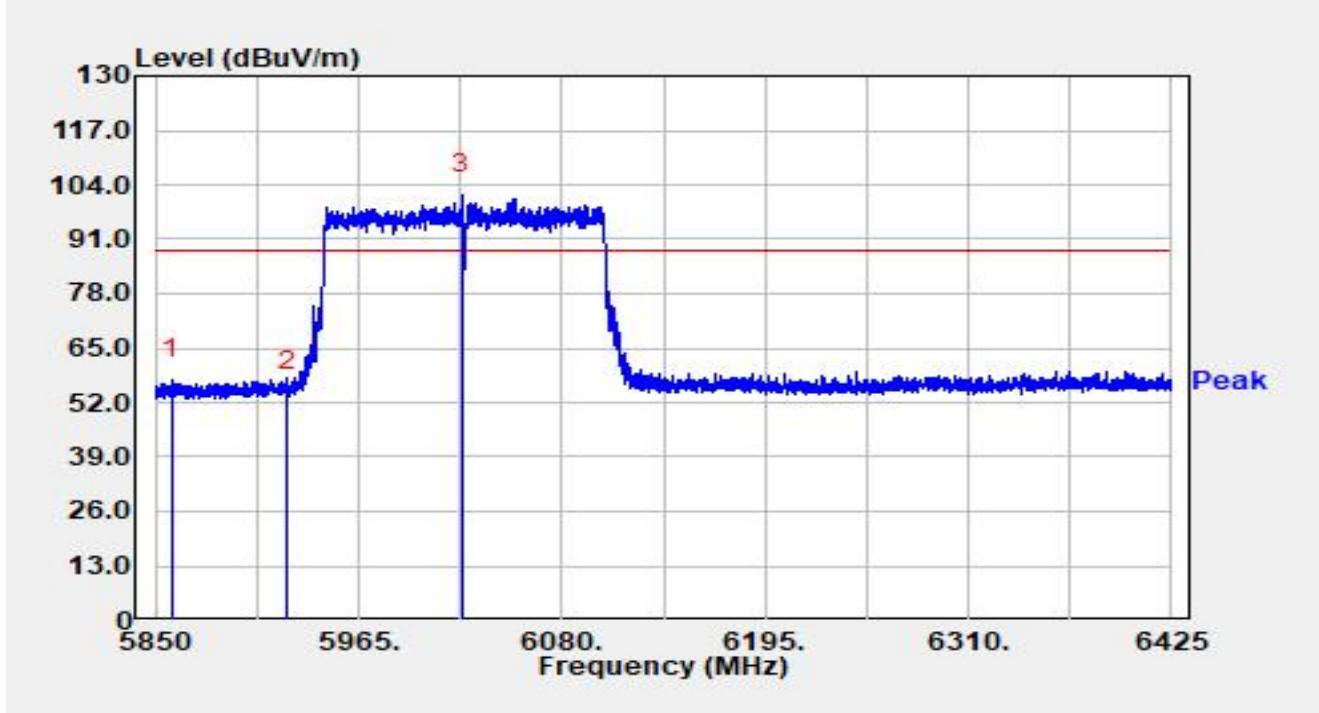


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5859.027	35.85	21.58	57.44	-30.76	88.20	Peak
2		5925.000	33.34	21.59	54.93	-33.27	88.20	Peak
3		6023.362	79.61	22.03	101.64	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-AV	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz		

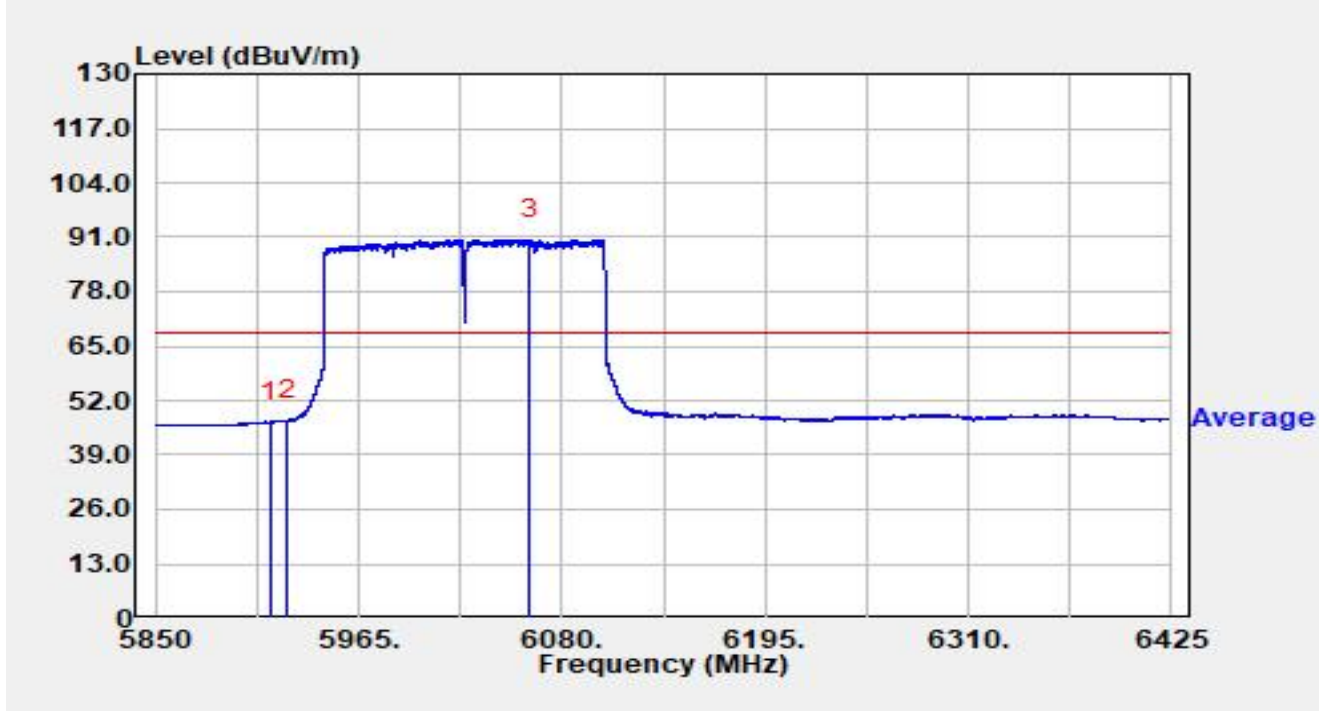


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5915.263	25.35	21.55	46.89	-21.31	68.20	Average
2	*	5925.000	25.55	21.59	47.14	-21.06	68.20	Average
3		6061.485	68.39	21.99	90.37	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-PK	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz		

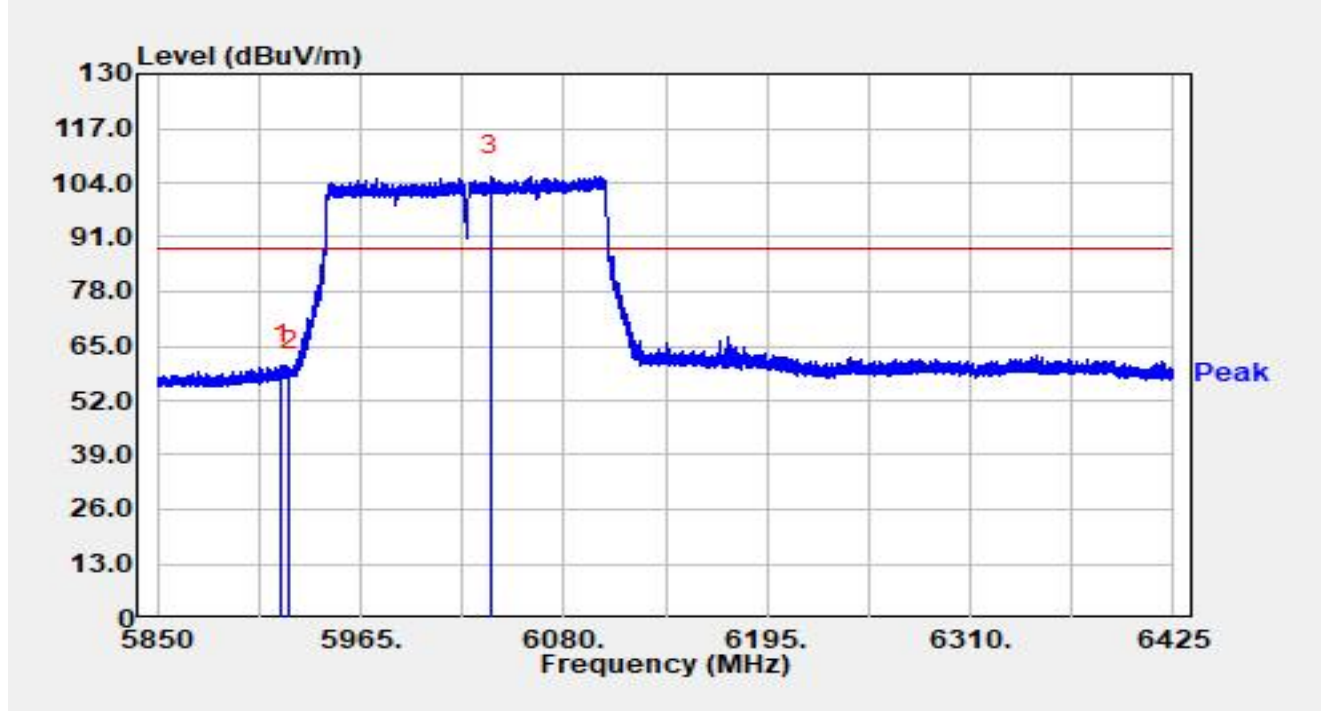


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5920.495	38.87	21.57	60.45	-27.75	88.20	Peak
2		5925.000	37.41	21.59	59.01	-29.19	88.20	Peak
3		6038.197	83.58	22.07	105.65	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-AV	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz		

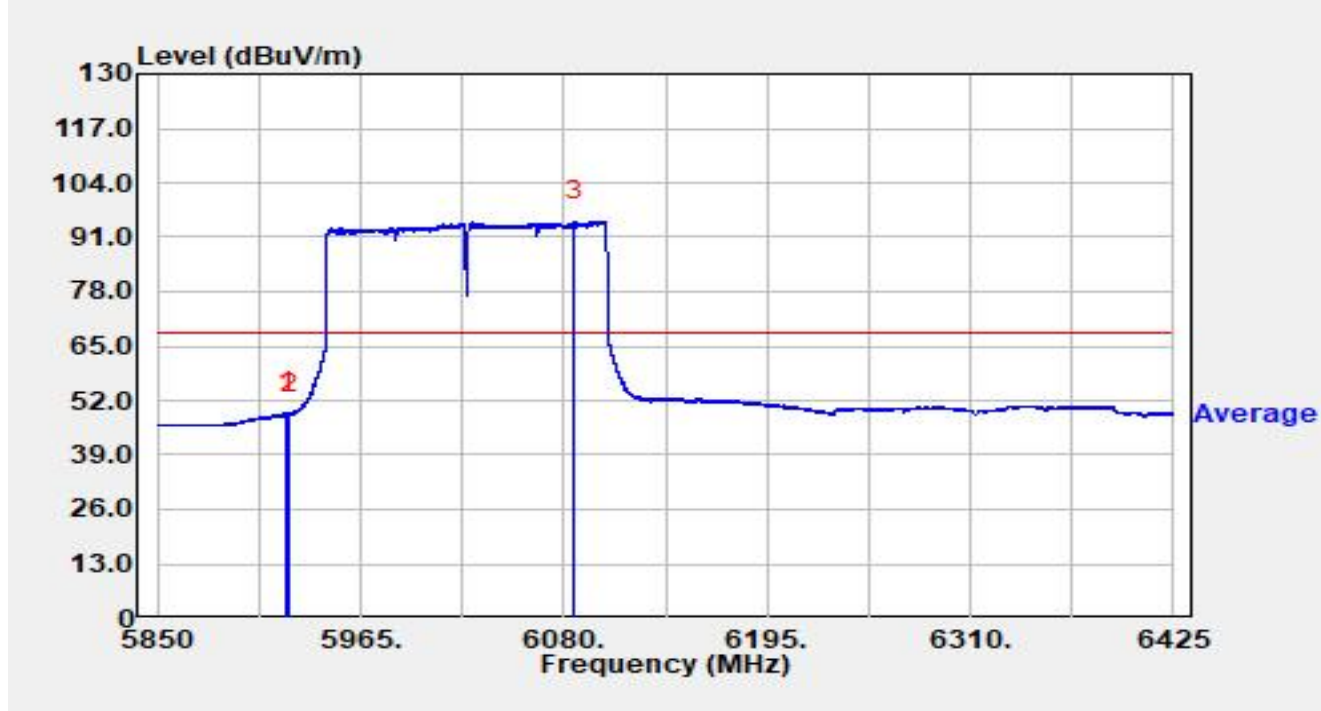


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5922.967	27.57	21.58	49.15	-19.05	68.20	Average
2		5925.000	27.39	21.59	48.98	-19.22	68.20	Average
3		6085.635	72.59	22.22	94.81	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-PK	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6985MHz		

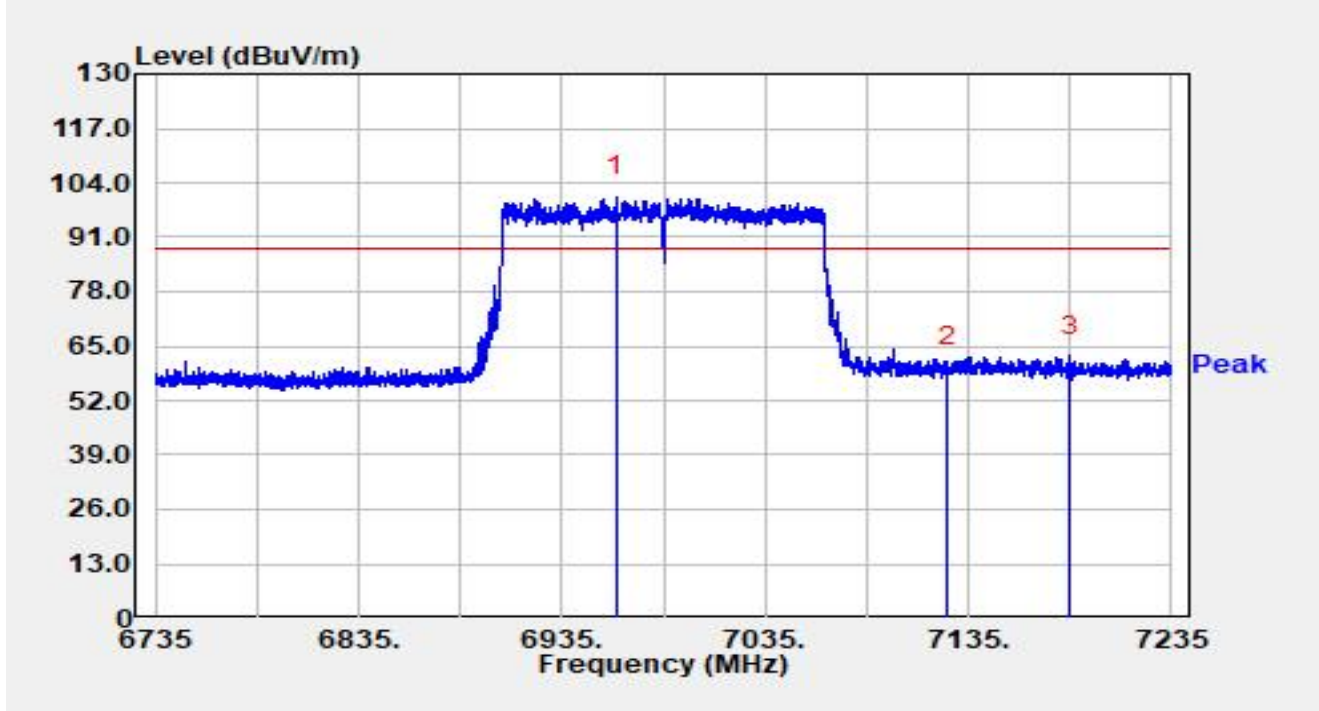


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6961.850	74.73	25.91	100.63	N/A	N/A	Peak
2		7125.000	33.01	26.94	59.95	-28.25	88.20	Peak
3	*	7184.800	35.53	27.05	62.58	-25.62	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-AV	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6985MHz		

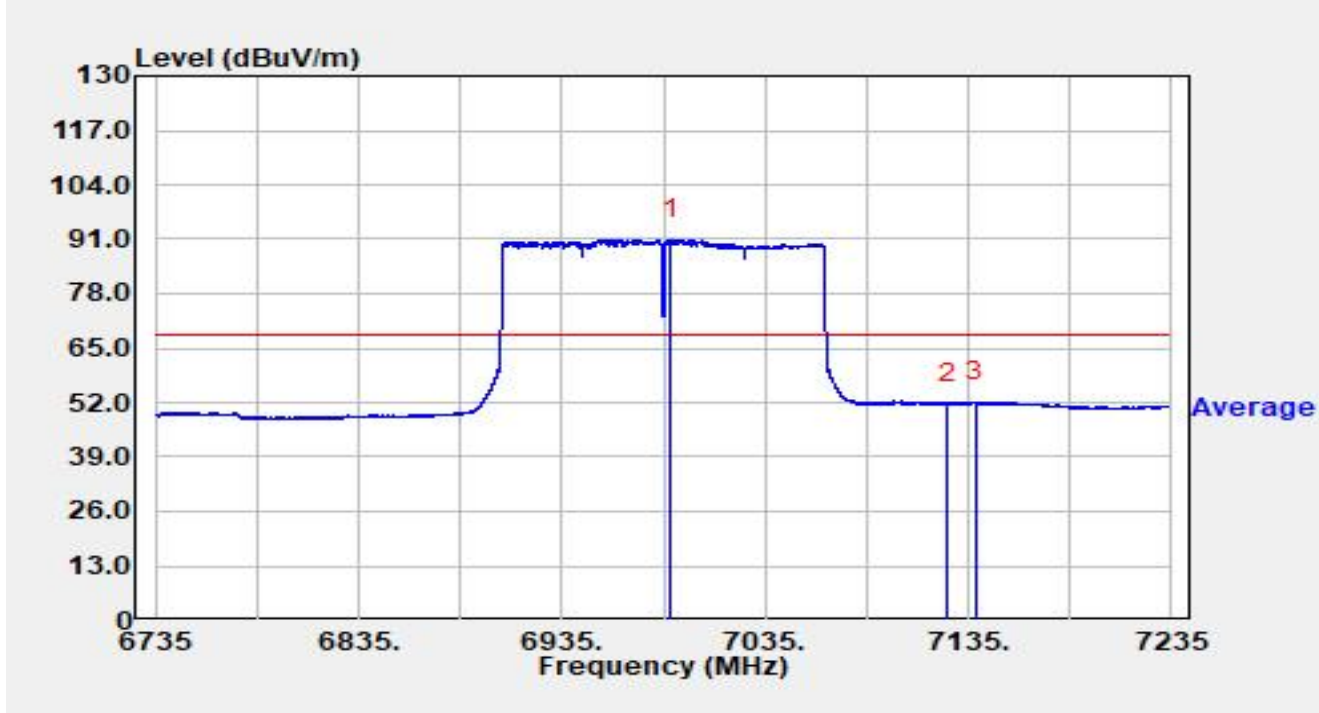


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6988.300	64.50	26.34	90.84	N/A	N/A	Average
2		7125.000	24.69	26.94	51.63	-16.57	68.20	Average
3	*	7138.450	24.90	27.20	52.09	-16.11	68.20	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-PK	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6985MHz		

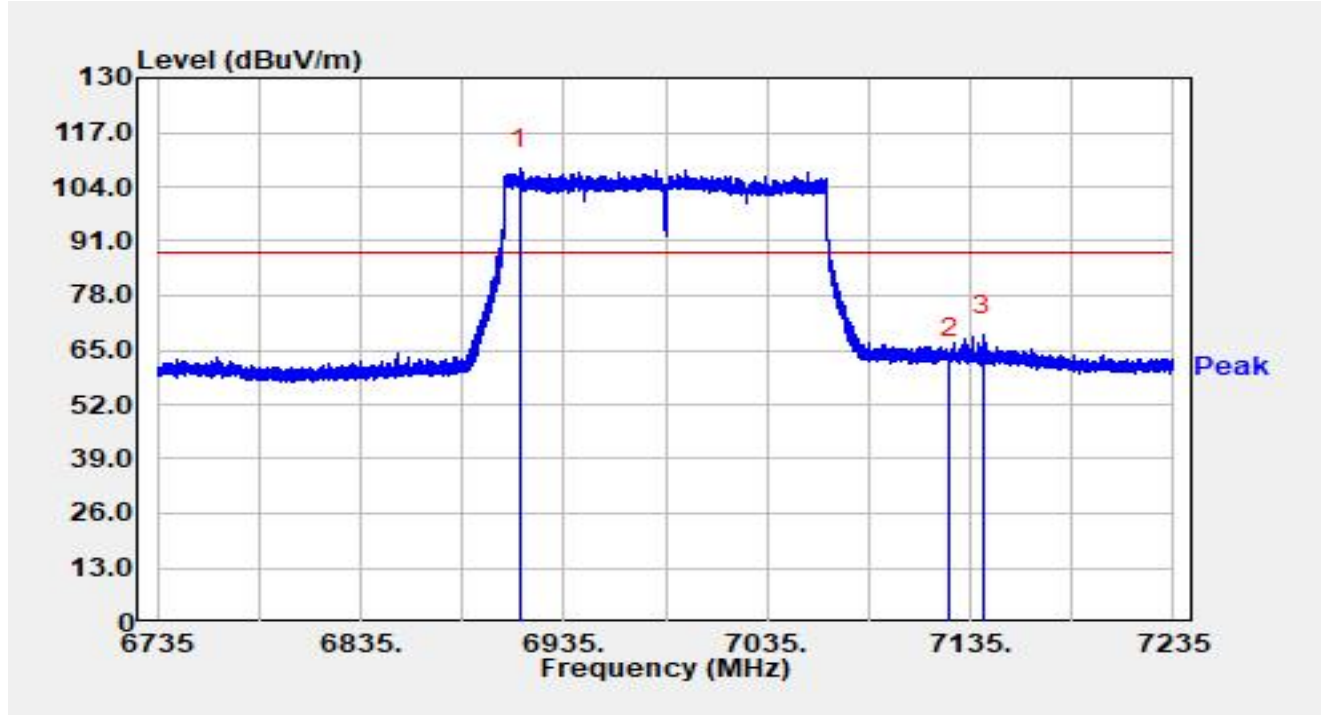


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6913.100	82.81	25.52	108.33	N/A	N/A	Peak
2		7125.000	36.33	26.94	63.27	-24.93	88.20	Peak
3	*	7141.200	41.30	27.22	68.52	-19.68	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-AV	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6985MHz		

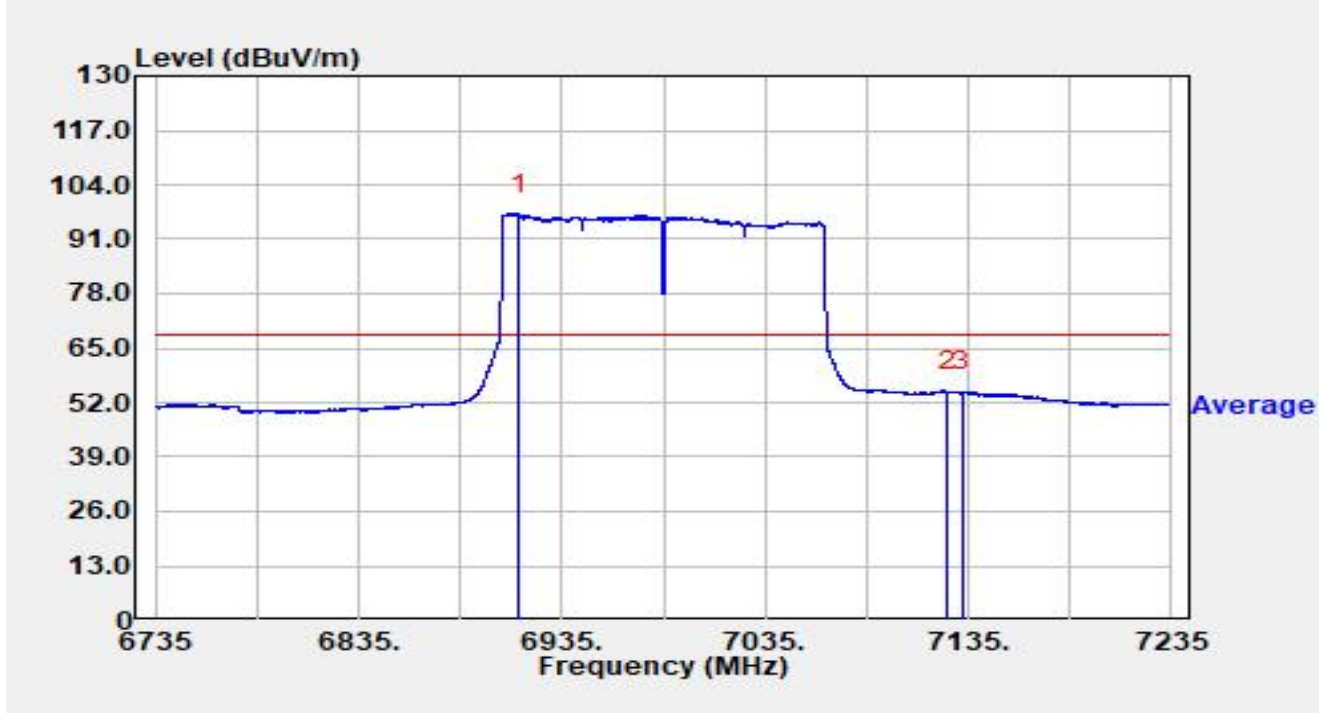


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6913.750	71.57	25.53	97.09	N/A	N/A	Average
2	*	7125.000	27.65	26.94	54.59	-13.61	68.20	Average
3		7132.250	27.46	27.09	54.55	-13.65	68.20	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-PK	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5955MHz		

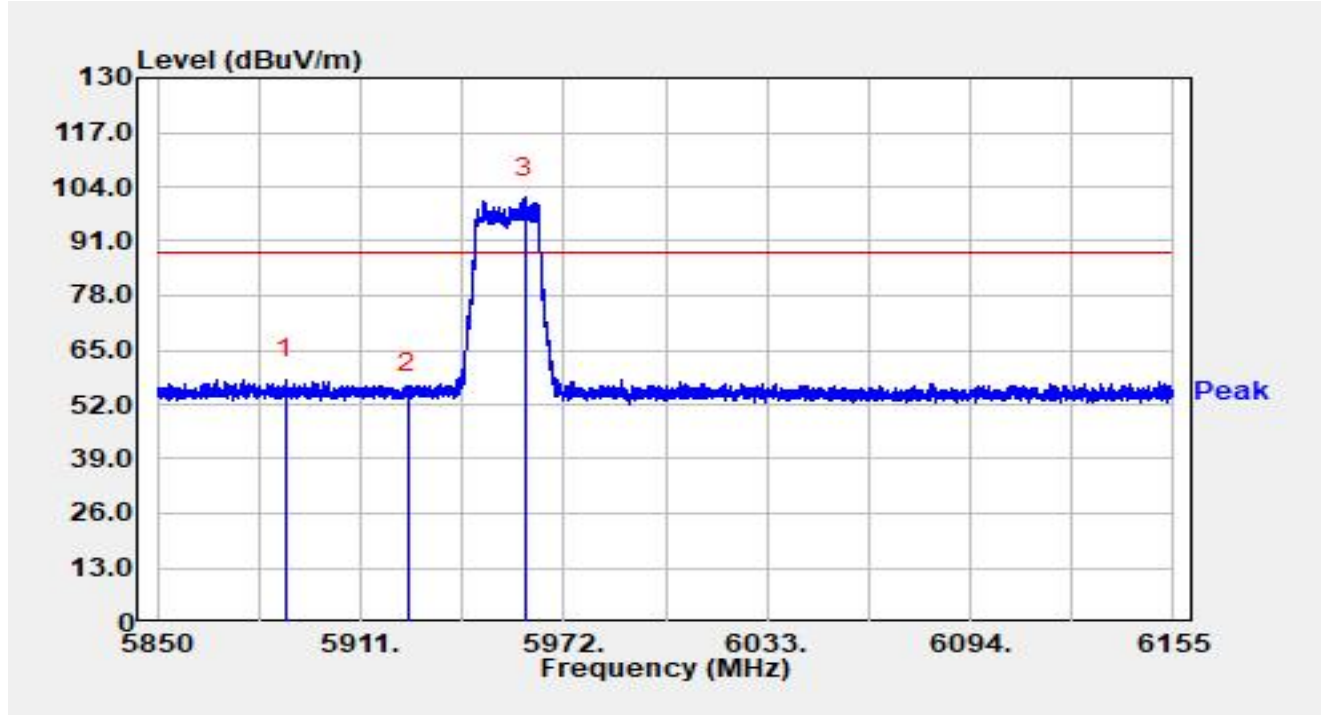


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5888.521	36.46	21.56	58.02	-30.18	88.20	Peak
2		5925.000	33.31	21.59	54.90	-33.30	88.20	Peak
3		5960.166	79.71	21.64	101.35	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-AV	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5955MHz		

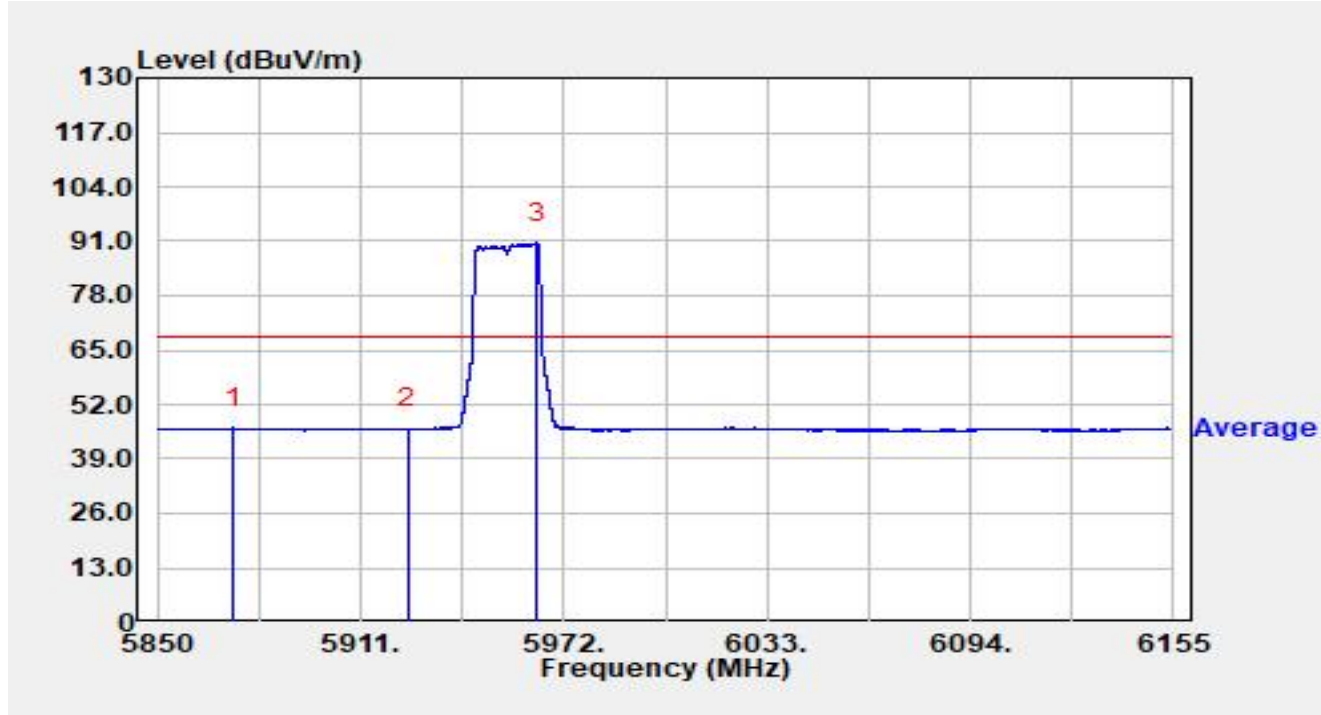


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5872.966	24.78	21.60	46.38	-21.82	68.20	Average
2		5925.000	24.62	21.59	46.22	-21.98	68.20	Average
3		5963.765	68.93	21.64	90.57	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-PK	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5955MHz		

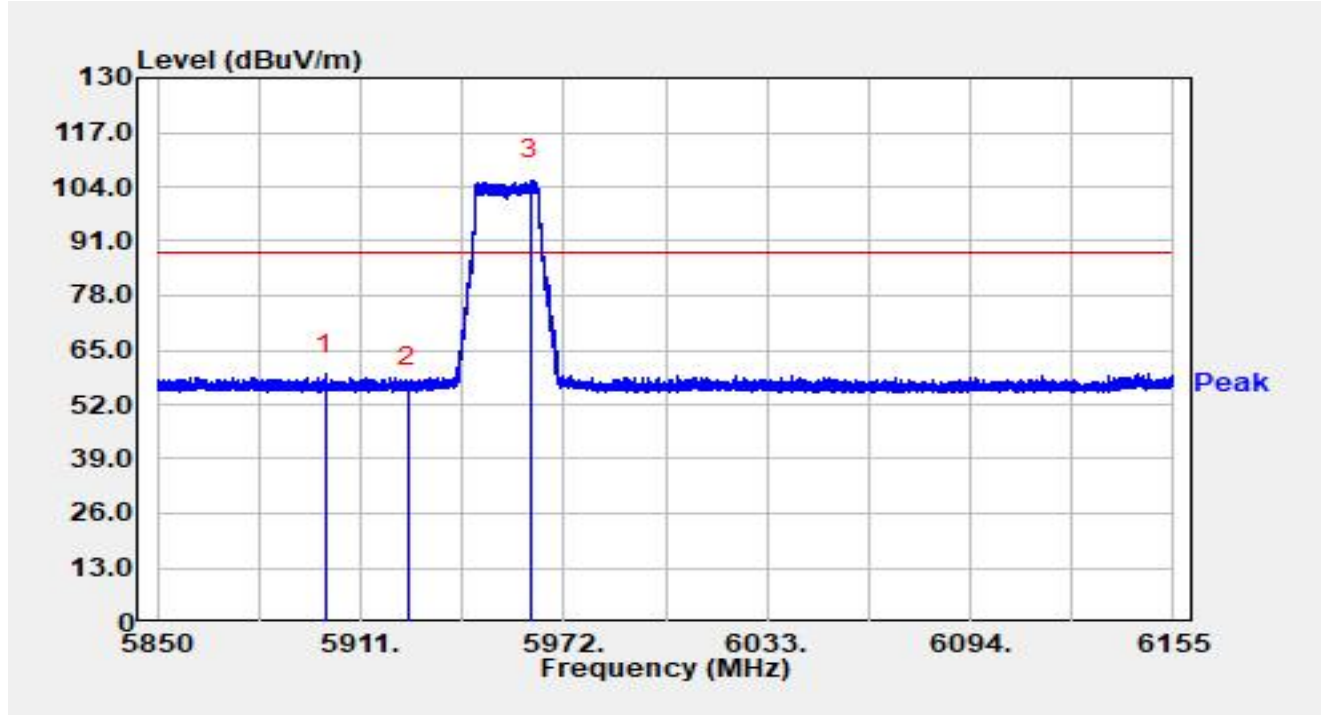


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5900.233	37.75	21.53	59.28	-28.92	88.20	Peak
2		5925.000	34.76	21.59	56.36	-31.84	88.20	Peak
3		5961.996	83.84	21.64	105.47	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-AV	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5955MHz		

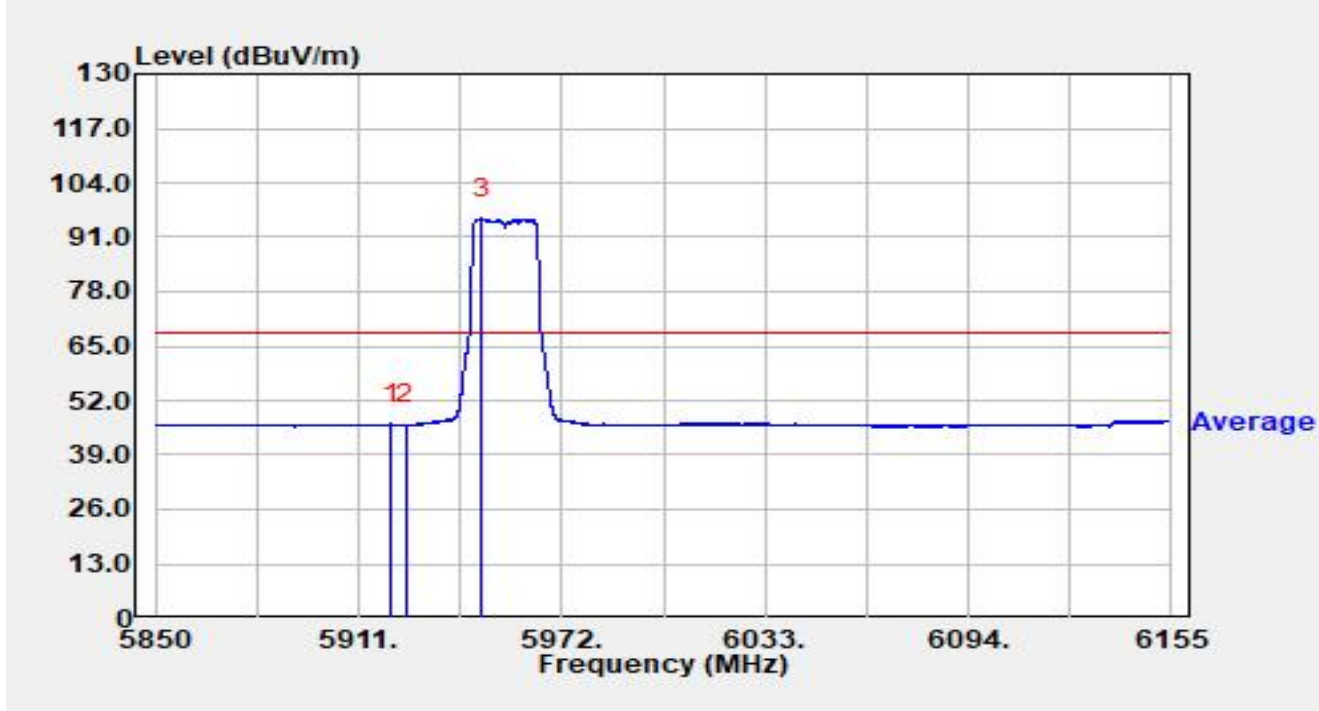


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5920.943	24.79	21.57	46.37	-21.83	68.20	Average
2		5925.000	24.76	21.59	46.35	-21.85	68.20	Average
3		5947.966	73.85	21.66	95.51	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-PK	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 7095MHz		

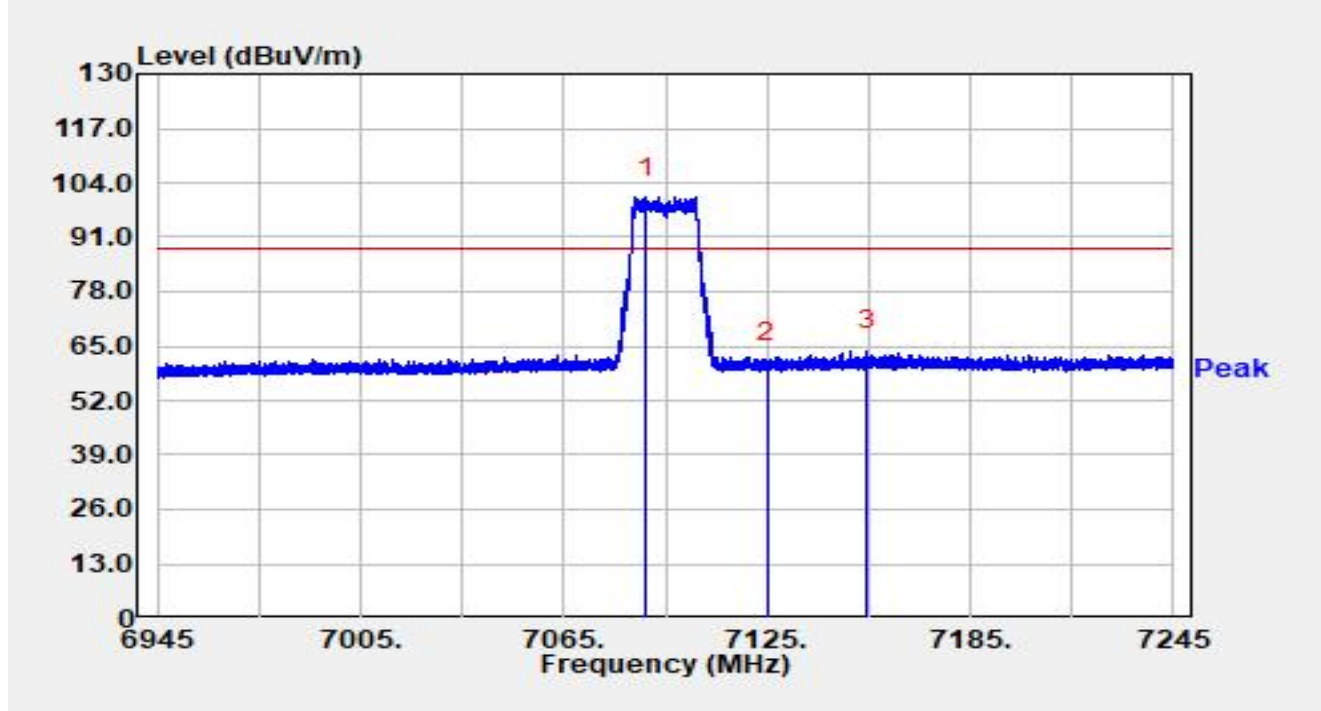


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7089.120	73.61	26.88	100.49	N/A	N/A	Peak
2		7125.000	33.96	26.94	60.90	-27.30	88.20	Peak
3	*	7154.580	36.58	27.36	63.94	-24.26	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-AV	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 7095MHz		

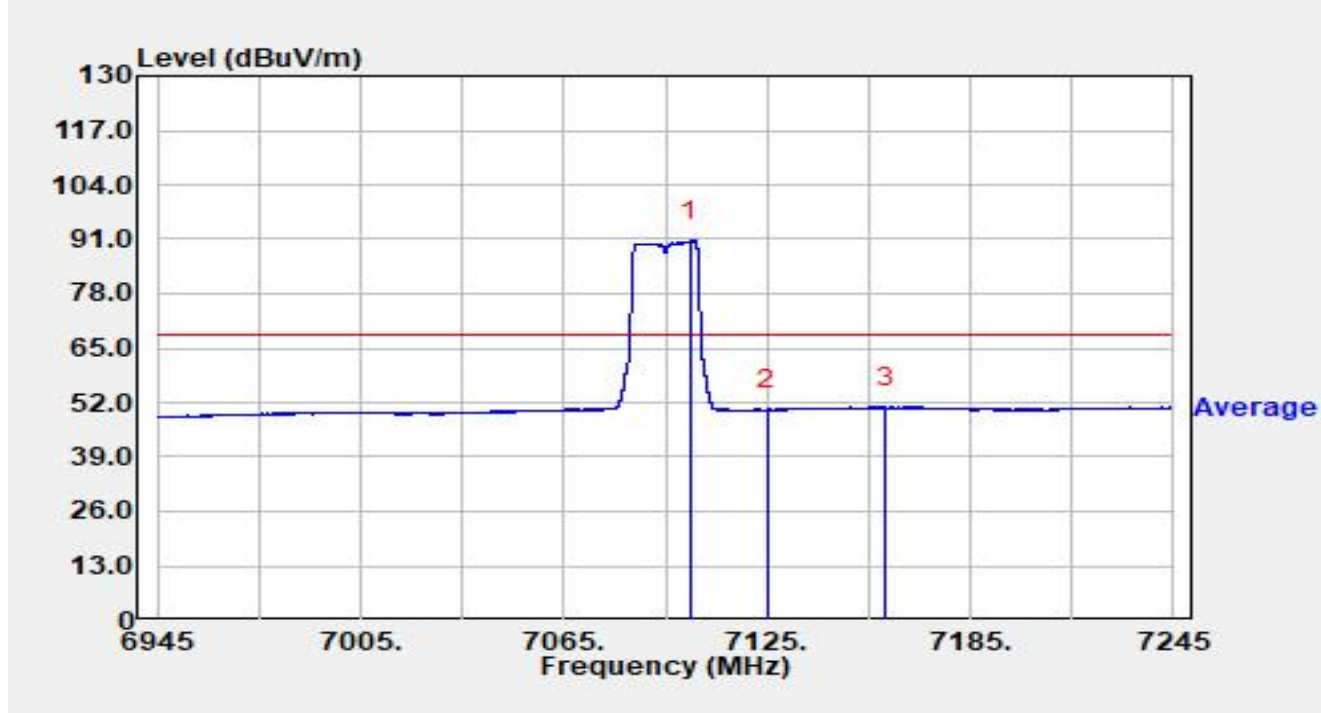


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7102.410	63.92	26.76	90.67	N/A	N/A	Average
2		7125.000	23.30	26.94	50.24	-17.96	68.20	Average
3	*	7160.100	23.54	27.36	50.89	-17.31	68.20	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-PK	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 7095MHz		

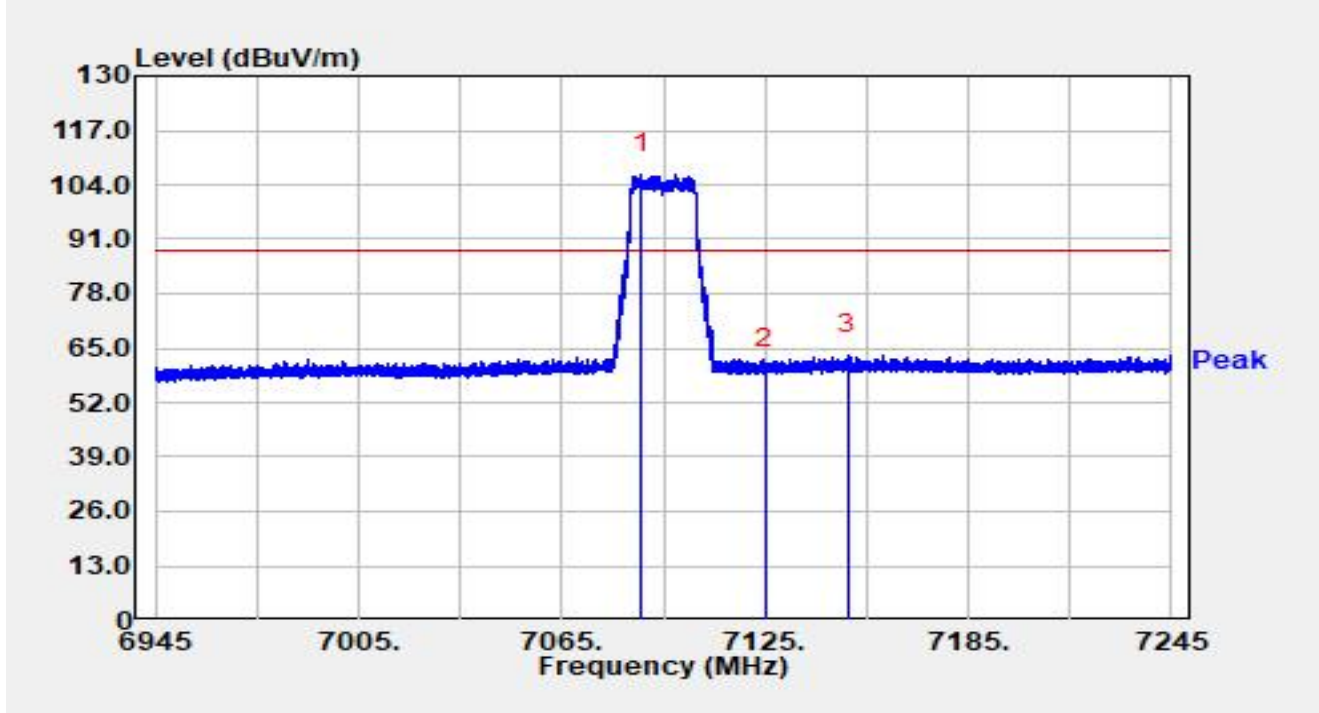


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7088.610	79.73	26.89	106.62	N/A	N/A	Peak
2		7125.000	33.15	26.94	60.09	-28.11	88.20	Peak
3	*	7149.270	36.13	27.30	63.43	-24.77	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-AV	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 7095MHz		

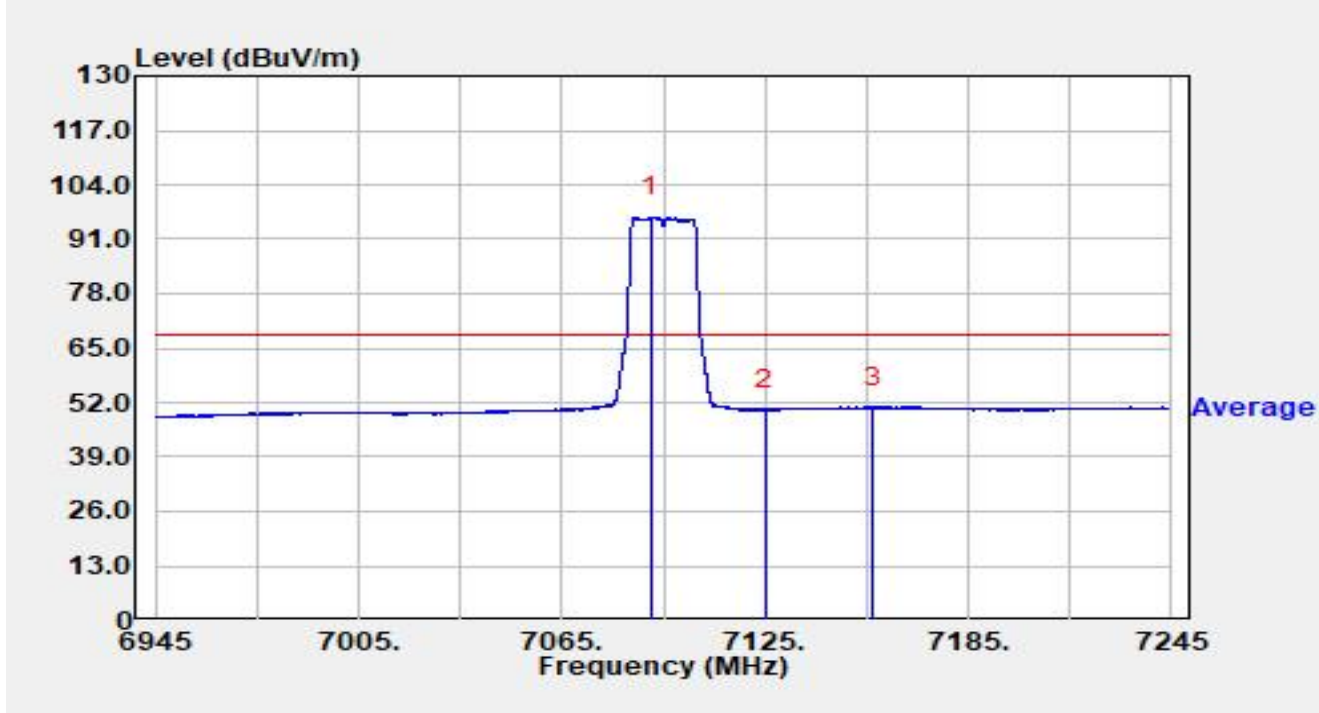


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7091.340	69.39	26.87	96.26	N/A	N/A	Average
2		7125.000	23.36	26.94	50.30	-17.90	68.20	Average
3	*	7156.830	23.63	27.36	50.99	-17.21	68.20	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-PK	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5965MHz		

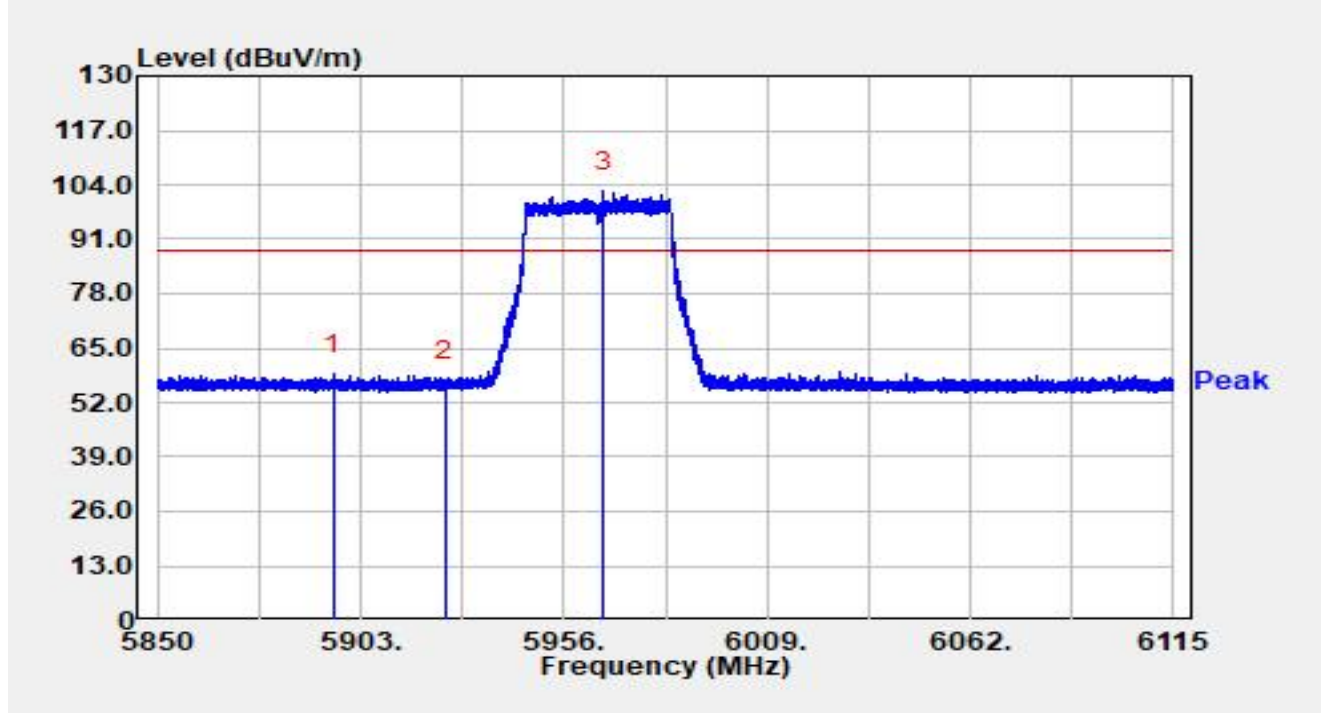


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5896.004	37.30	21.52	58.81	-29.39	88.20	Peak
2		5925.000	35.42	21.59	57.01	-31.19	88.20	Peak
3		5966.521	80.70	21.64	102.34	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-AV	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5965MHz		

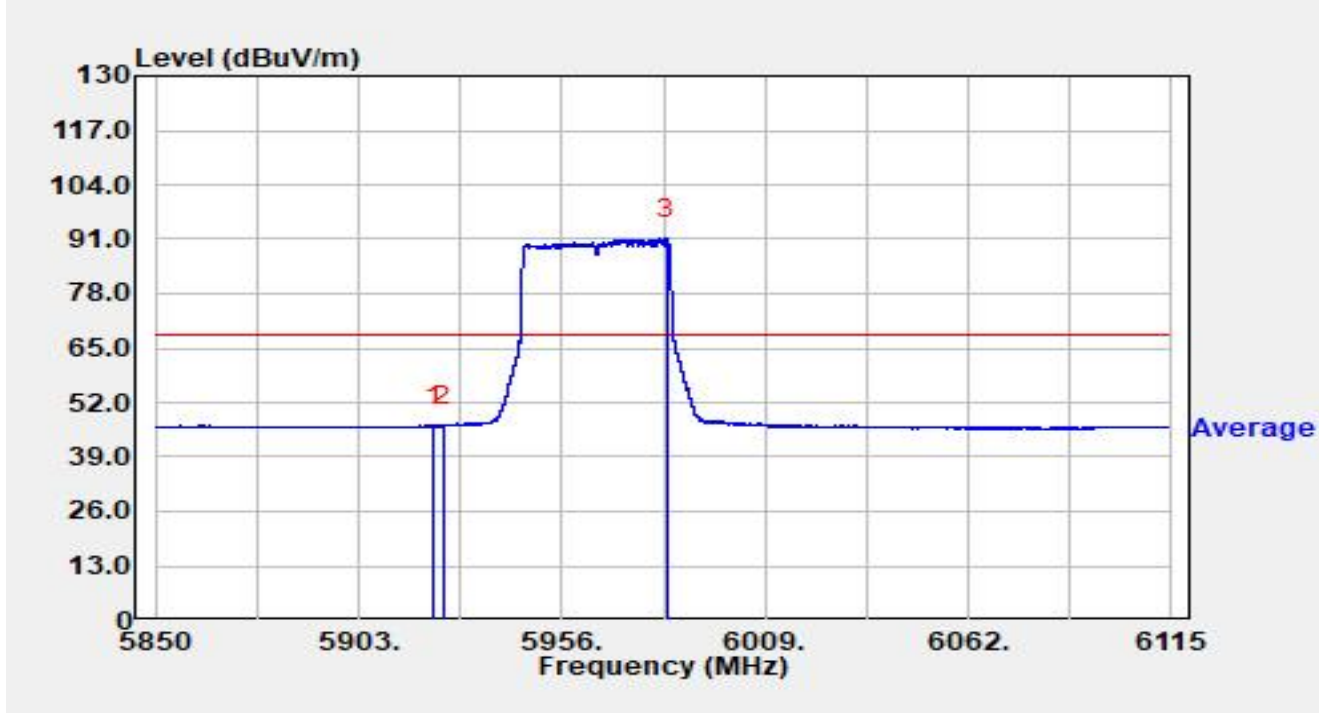


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5922.637	24.95	21.58	46.54	-21.66	68.20	Average
2		5925.000	24.89	21.59	46.48	-21.72	68.20	Average
3		5983.348	69.49	21.64	91.13	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-PK	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5965MHz		

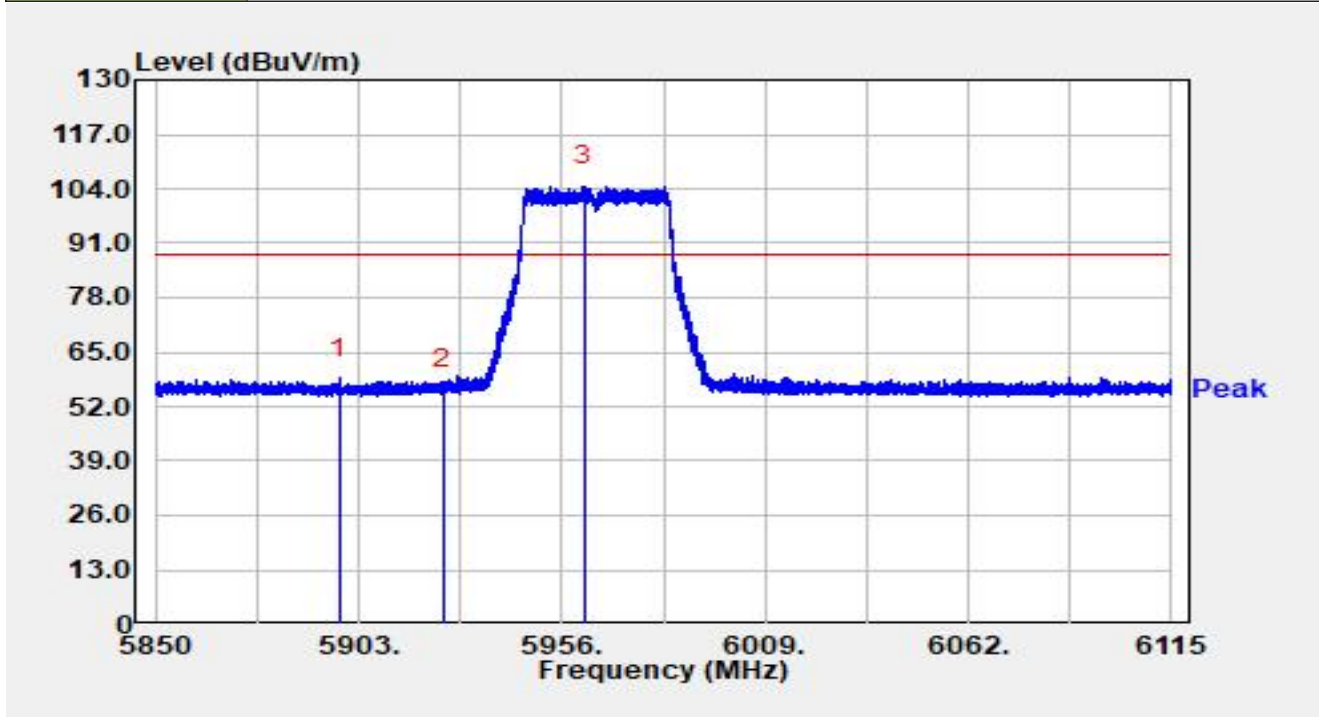


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5897.833	37.19	21.52	58.72	-29.48	88.20	Peak
2		5925.000	34.54	21.59	56.13	-32.07	88.20	Peak
3		5961.989	83.01	21.64	104.65	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-AV	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5965MHz		

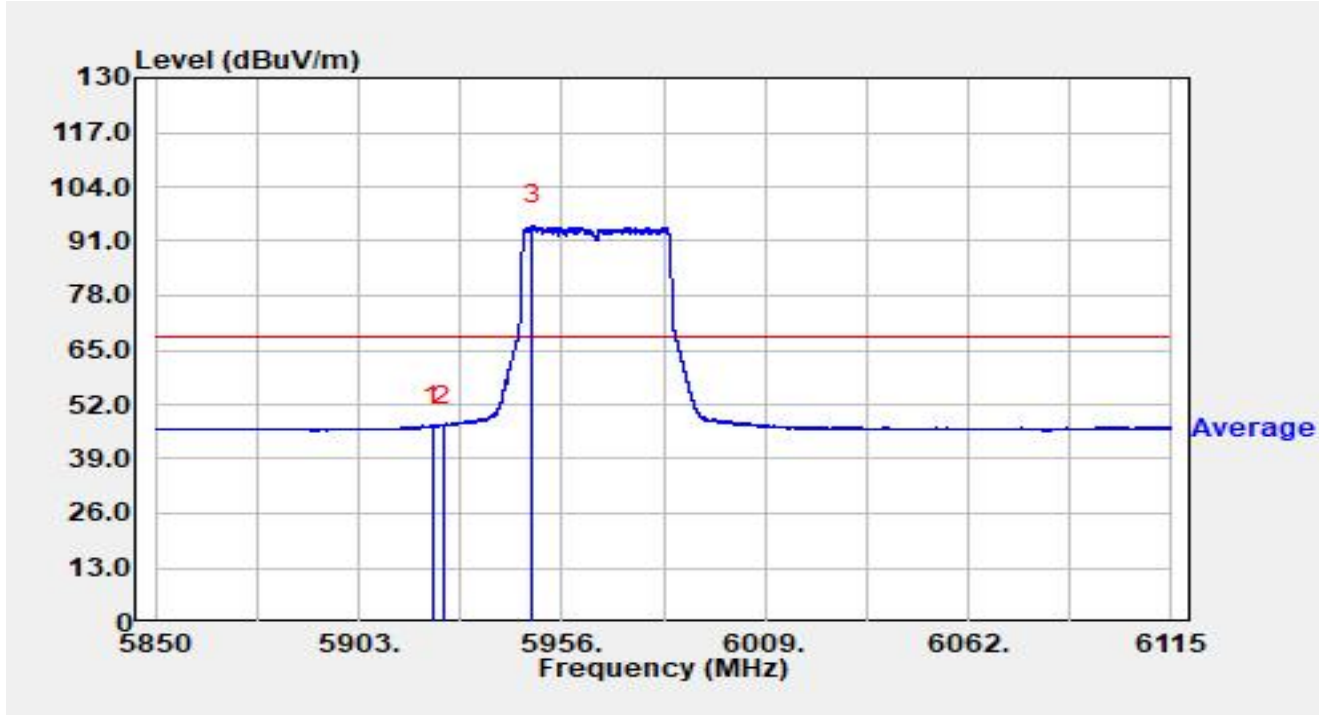


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1		5922.292	25.39	21.58	46.97	-21.23	68.20	Average
2	*	5924.995	25.49	21.59	47.09	-21.11	68.20	Average
3		5948.315	73.08	21.66	94.74	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement(dBUV/m) = Reading(dBUV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-PK	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 7085MHz		

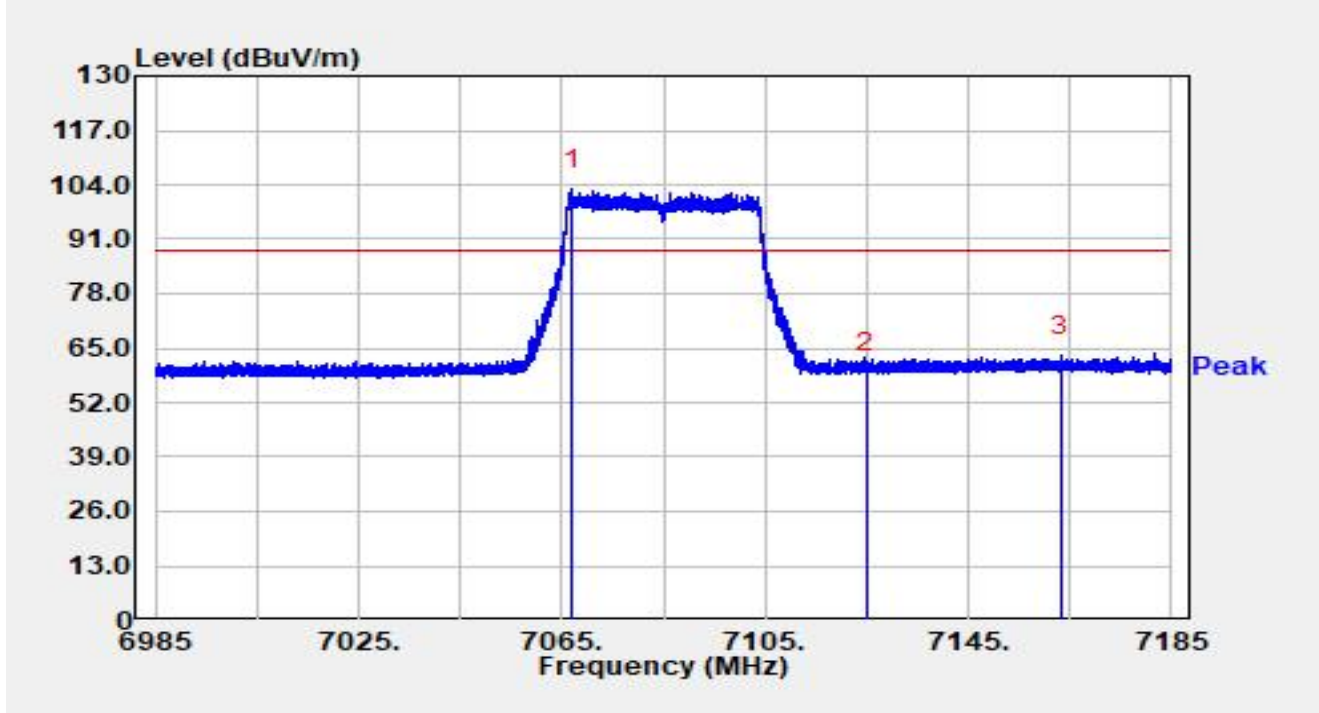


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7067.140	75.88	27.04	102.92	N/A	N/A	Peak
2		7125.000	32.29	26.94	59.23	-28.97	88.20	Peak
3	*	7163.200	35.72	27.35	63.07	-25.13	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-AV	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 7085MHz		

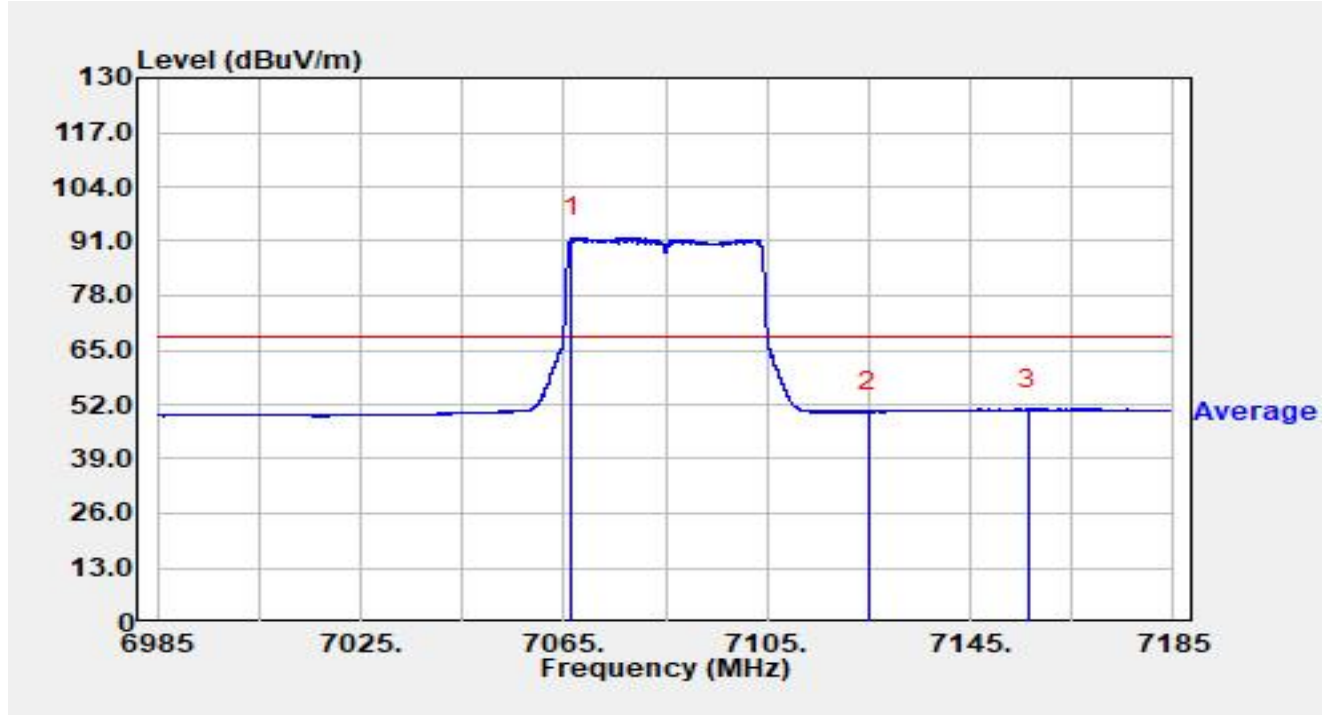


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7066.580	64.80	27.03	91.83	N/A	N/A	Average
2		7125.000	23.40	26.94	50.34	-17.86	68.20	Average
3	*	7156.260	23.54	27.36	50.90	-17.30	68.20	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-PK	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 7085MHz		

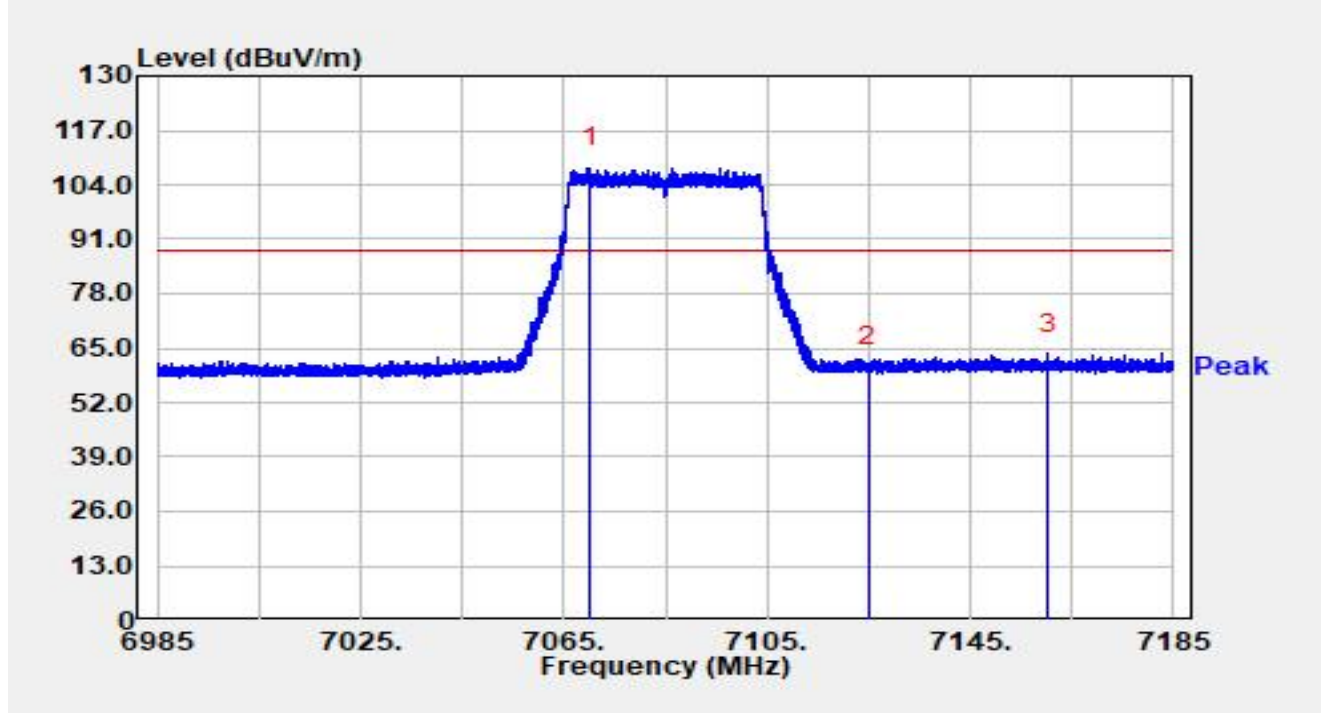


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7070.160	80.91	27.05	107.96	N/A	N/A	Peak
2		7125.000	33.84	26.94	60.78	-27.42	88.20	Peak
3	*	7160.420	36.19	27.36	63.54	-24.66	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-AV	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 7085MHz		

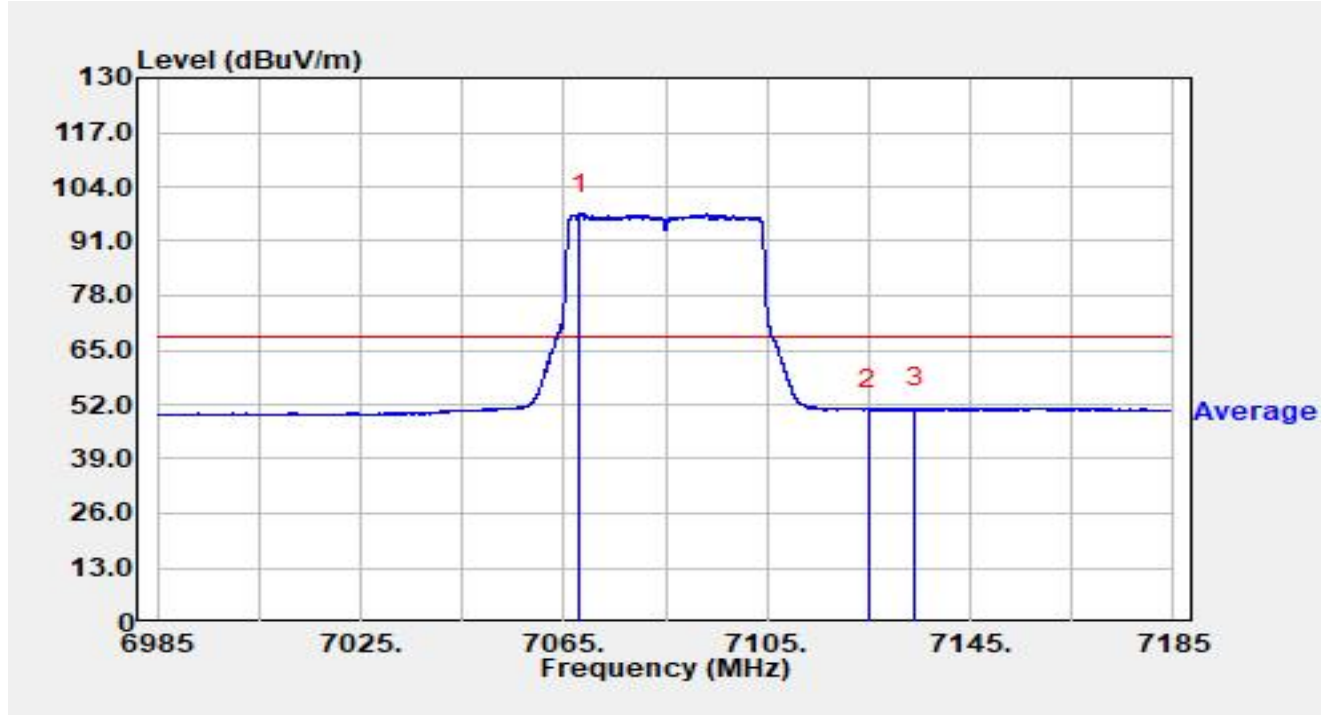


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7068.060	70.47	27.05	97.52	N/A	N/A	Average
2		7125.000	23.86	26.94	50.80	-17.40	68.20	Average
3	*	7134.080	23.95	27.13	51.08	-17.12	68.20	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-PK	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5985MHz		

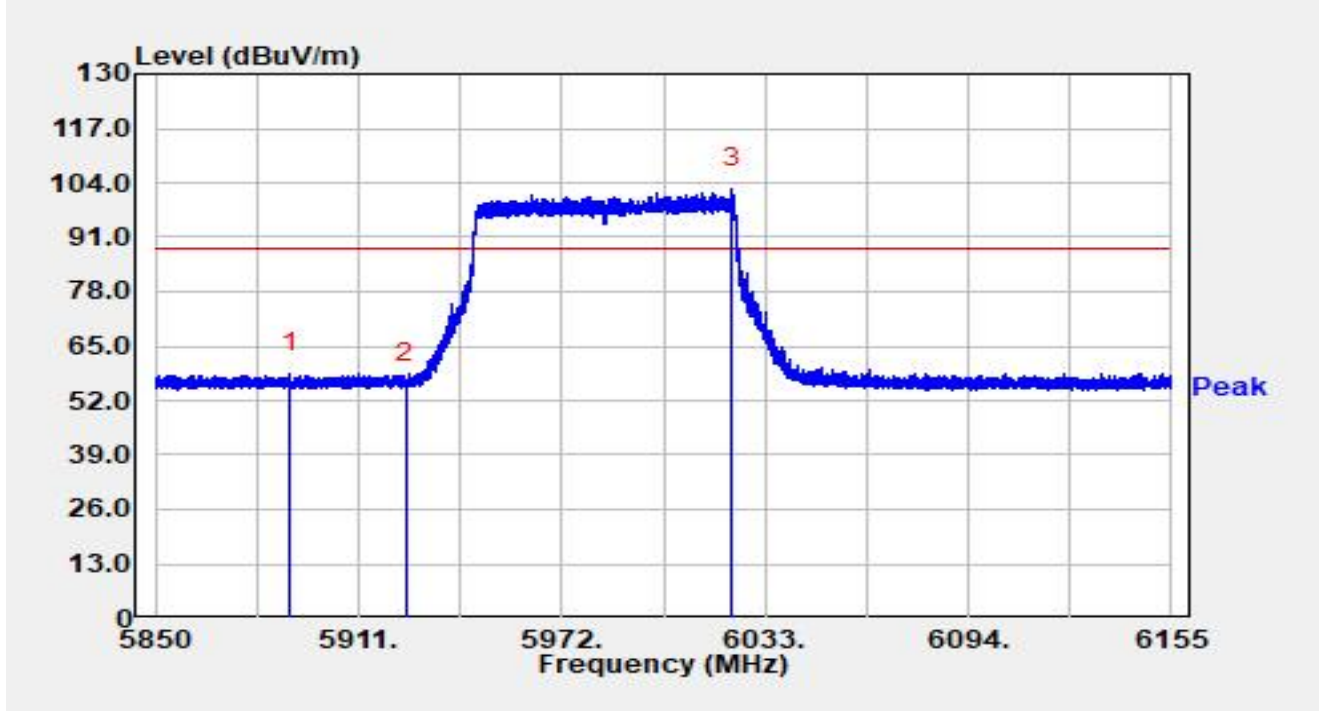


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5890.413	37.02	21.55	58.57	-29.63	88.20	Peak
2		5925.000	34.71	21.59	56.30	-31.90	88.20	Peak
3		6022.965	80.66	22.02	102.68	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-AV	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5985MHz		

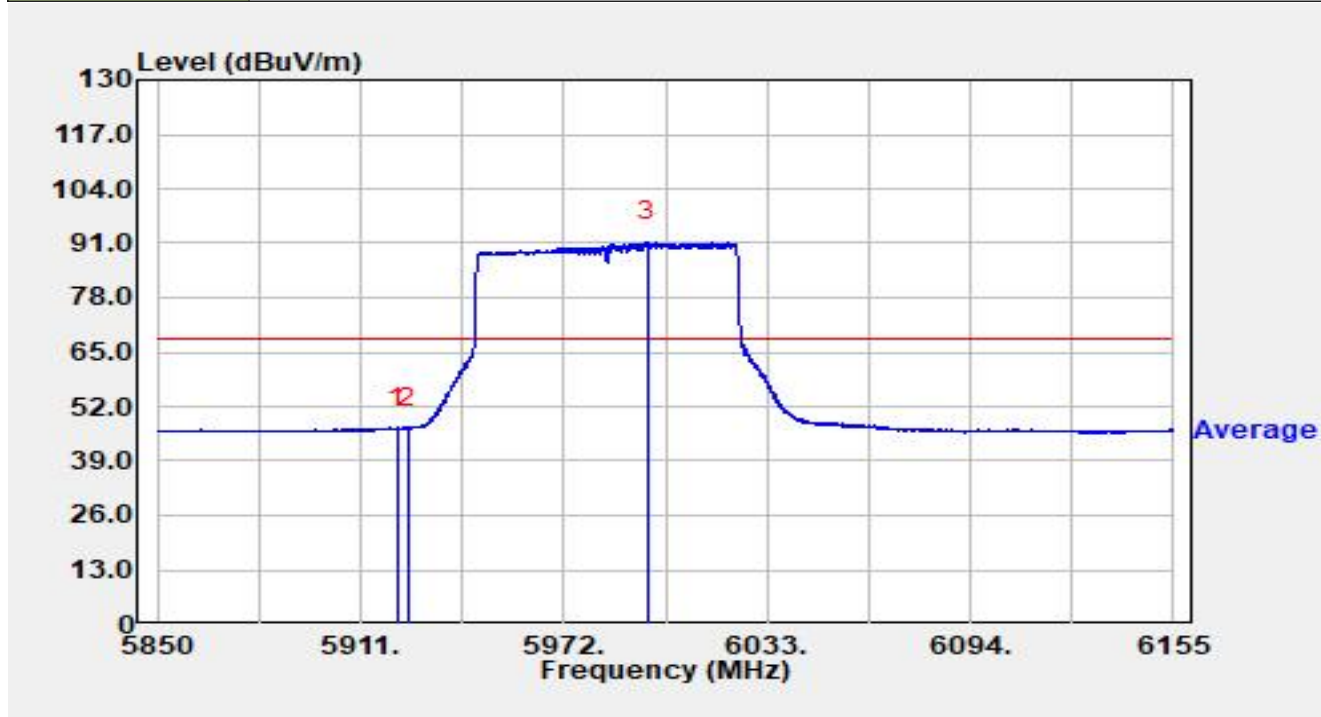


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5922.071	25.32	21.58	46.90	-21.30	68.20	Average
2	*	5925.000	25.32	21.59	46.91	-21.29	68.20	Average
3		5996.918	69.57	21.70	91.28	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-PK	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5985MHz		

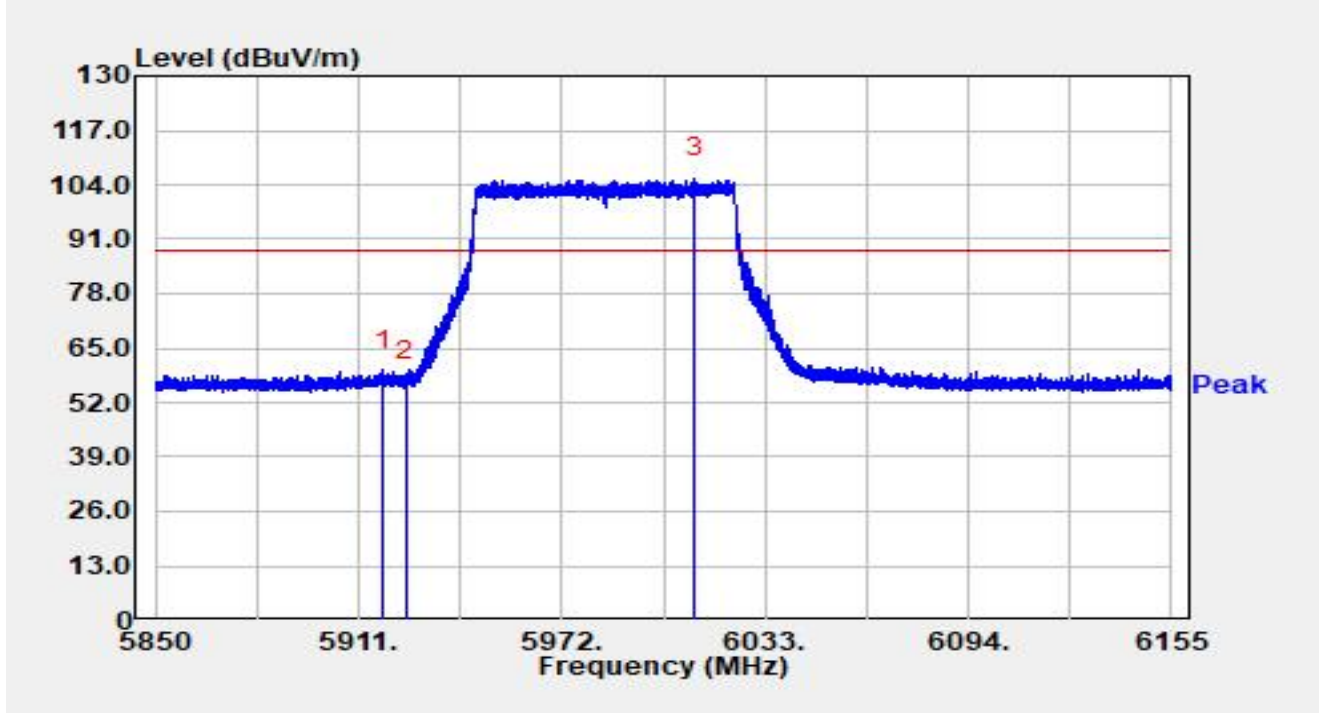


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5918.503	38.05	21.56	59.61	-28.59	88.20	Peak
2		5925.000	35.60	21.59	57.19	-31.01	88.20	Peak
3		6012.046	83.78	21.92	105.70	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-AV	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5985MHz		

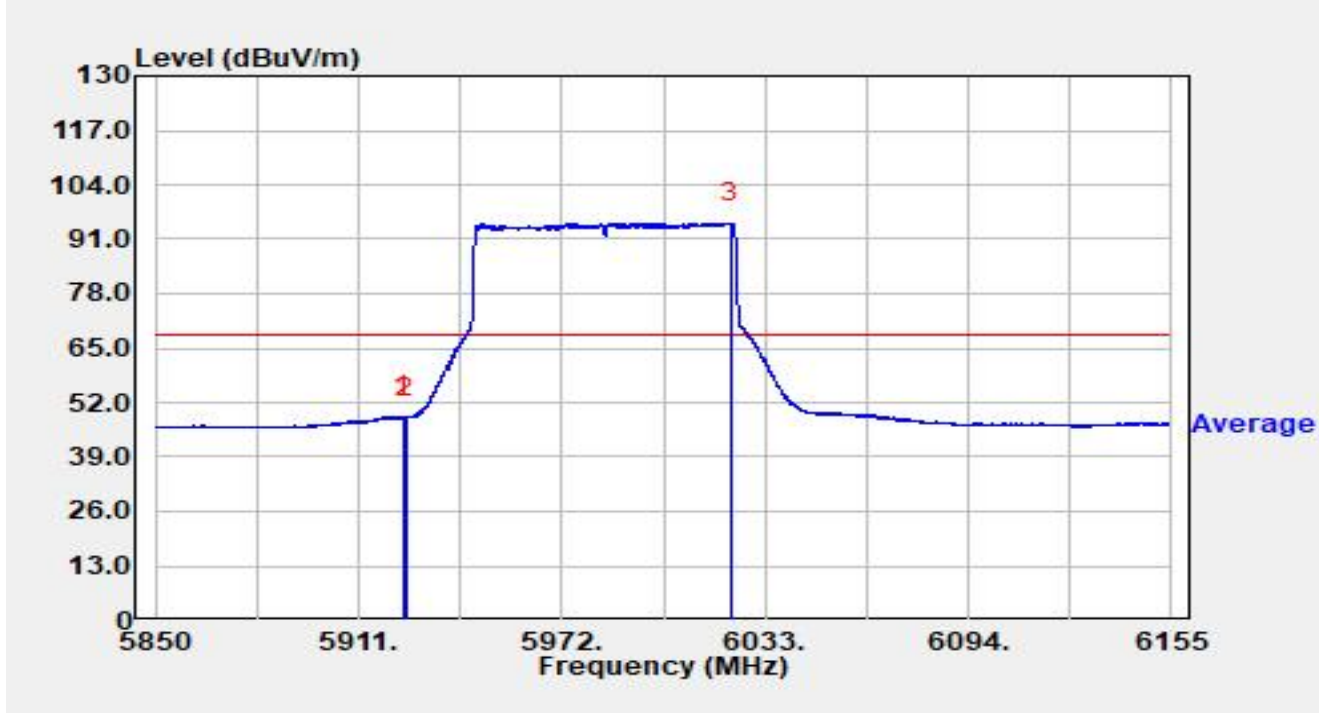


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.207	27.09	21.59	48.68	-19.52	68.20	Average
2		5925.000	26.78	21.59	48.37	-19.83	68.20	Average
3		6022.691	72.88	22.02	94.90	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-PK	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 7025MHz		

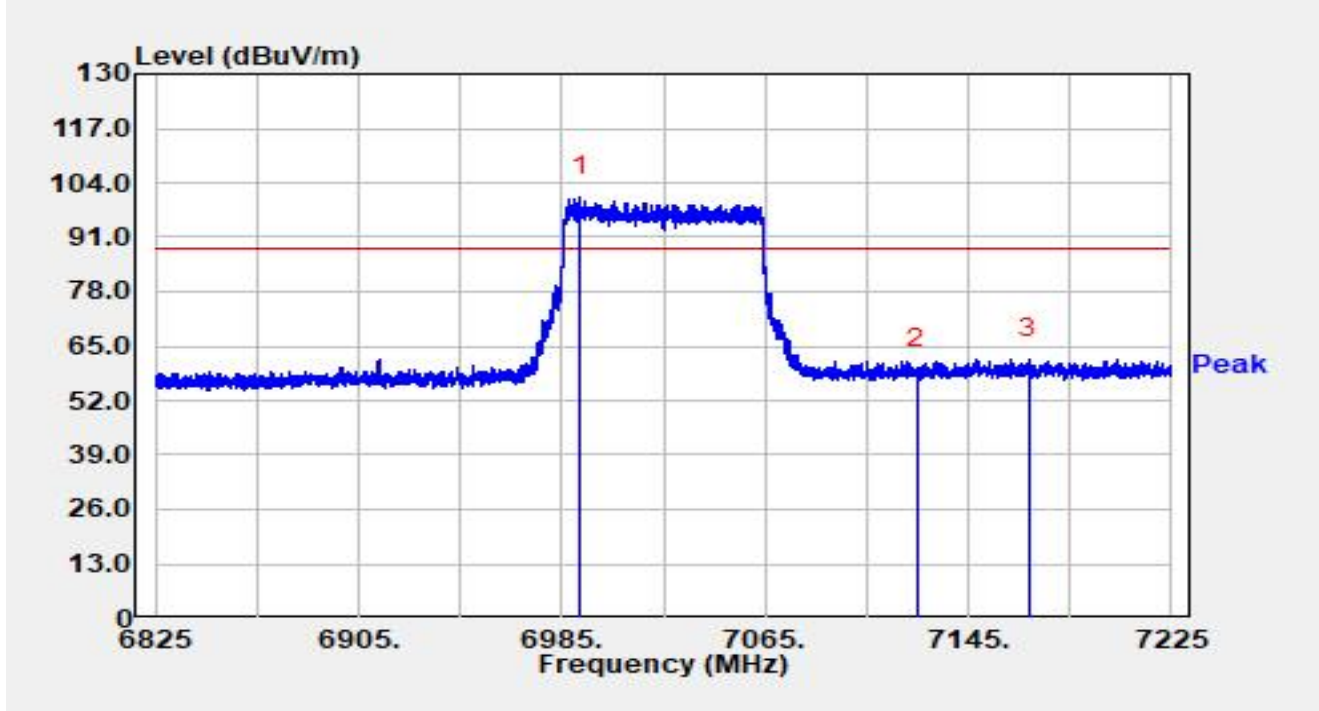


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6992.120	74.34	26.37	100.71	N/A	N/A	Peak
2		7125.000	32.49	26.94	59.43	-28.77	88.20	Peak
3	*	7168.840	34.59	27.31	61.90	-26.30	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-AV	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 7025MHz		

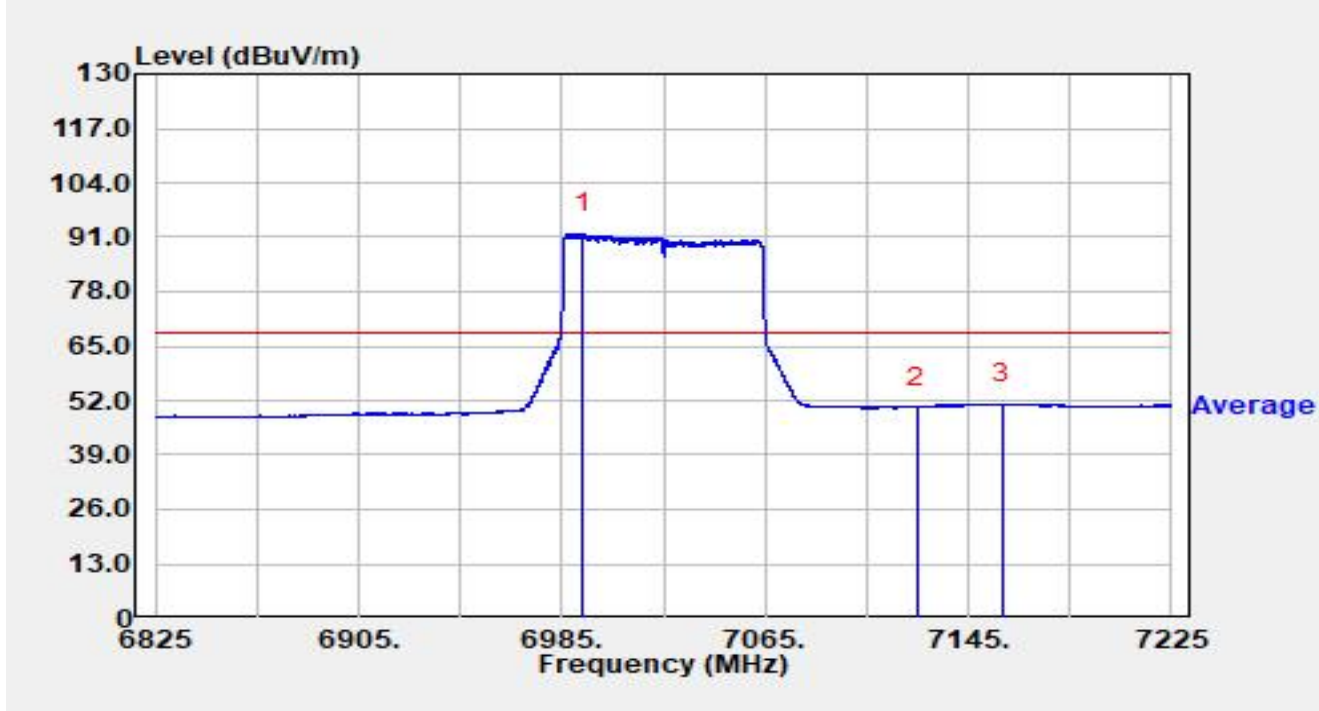


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6993.360	65.43	26.38	91.80	N/A	N/A	Average
2		7125.000	23.49	26.94	50.43	-17.77	68.20	Average
3	*	7158.240	23.80	27.36	51.16	-17.04	68.20	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-PK	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 7025MHz		

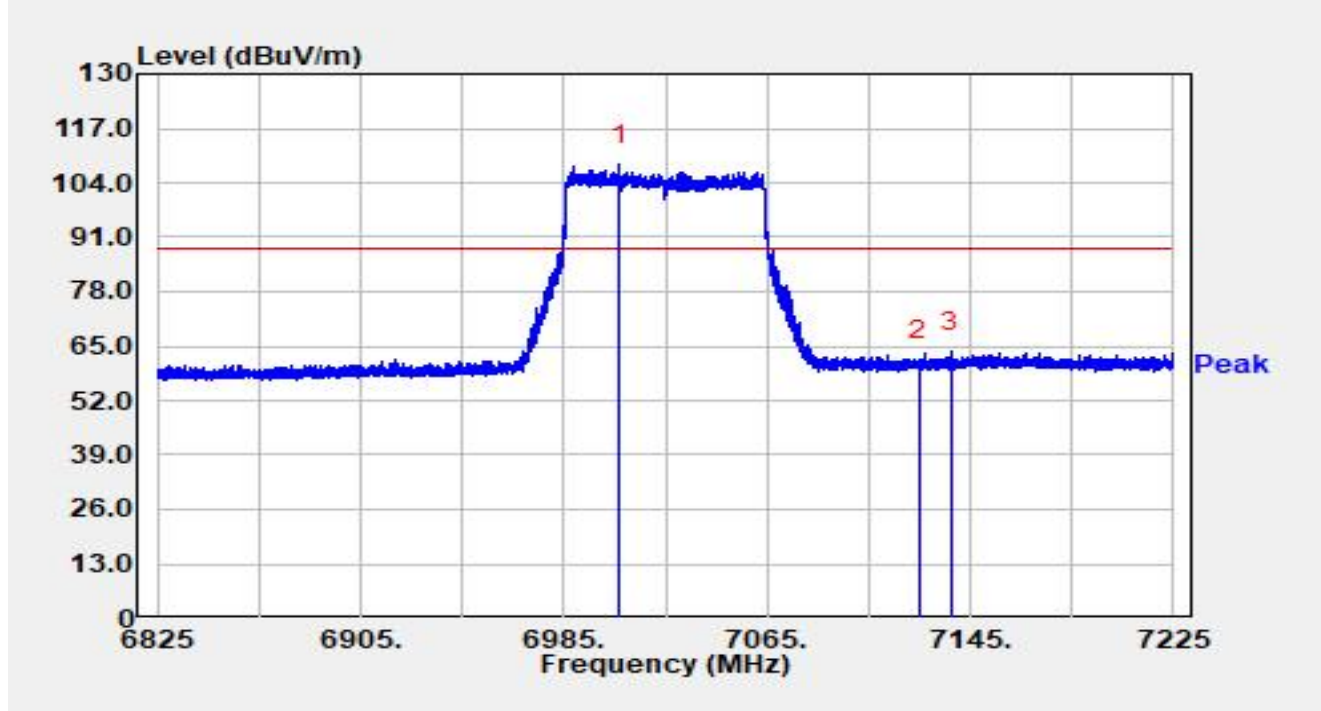


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7006.680	81.85	26.41	108.25	N/A	N/A	Peak
2		7125.000	34.41	26.94	61.35	-26.85	88.20	Peak
3	*	7137.280	36.36	27.19	63.54	-24.66	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-AV	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 7025MHz		

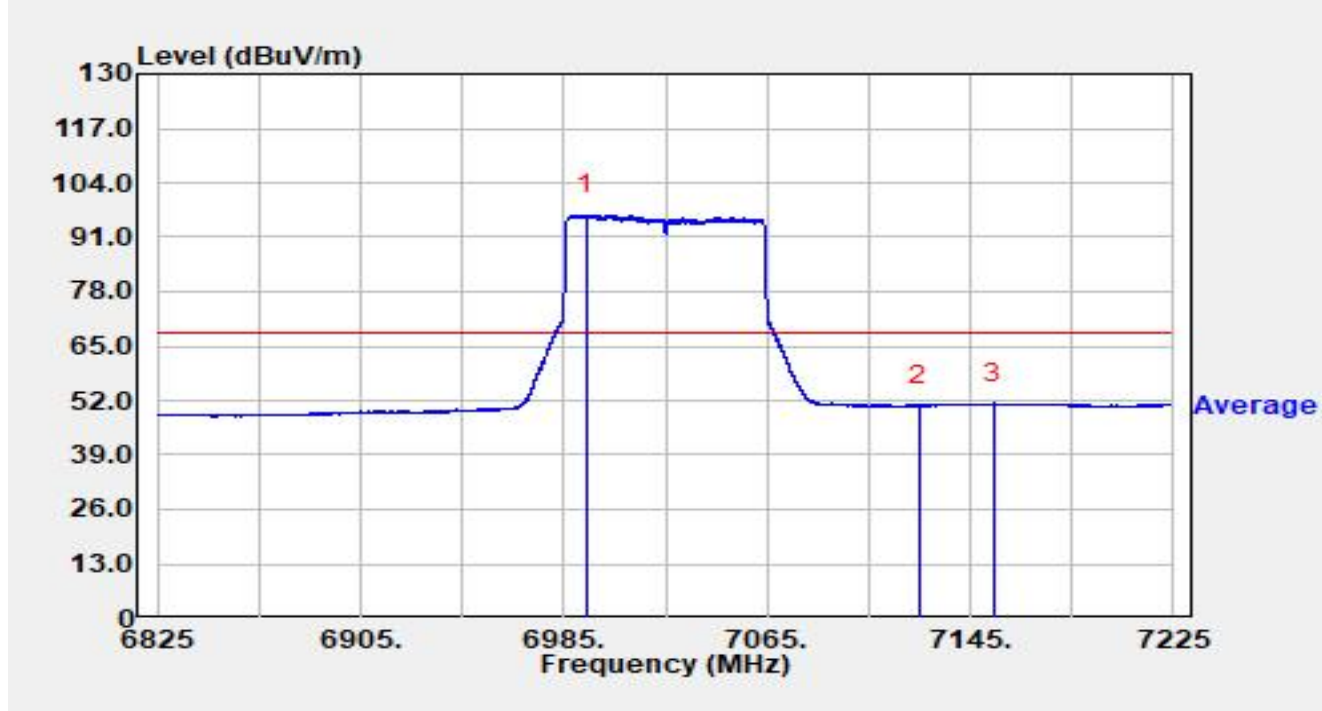


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6994.000	69.88	26.38	96.26	N/A	N/A	Average
2		7125.000	23.79	26.94	50.73	-17.47	68.20	Average
3	*	7153.920	23.93	27.36	51.29	-16.91	68.20	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-PK	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6025MHz		

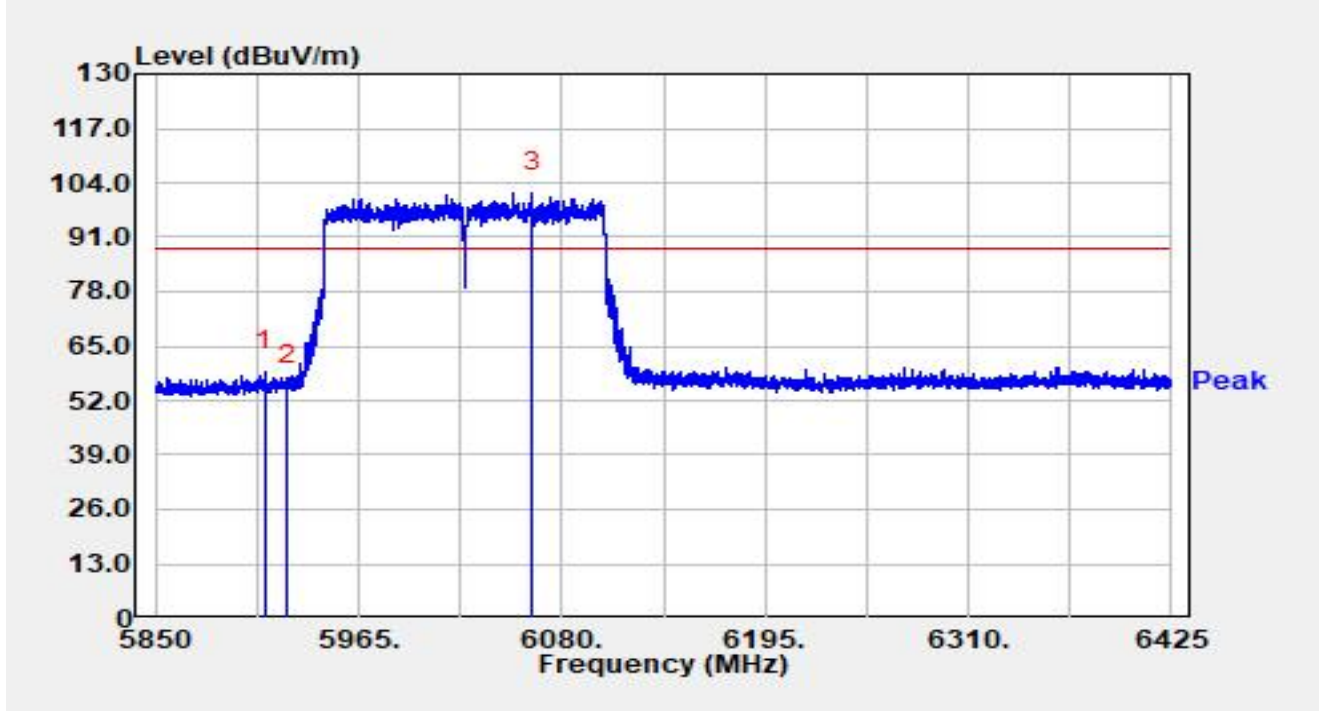


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5912.158	37.56	21.54	59.10	-29.10	88.20	Peak
2		5925.000	33.90	21.59	55.50	-32.70	88.20	Peak
3		6063.038	79.63	21.98	101.61	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-AV	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6025MHz		

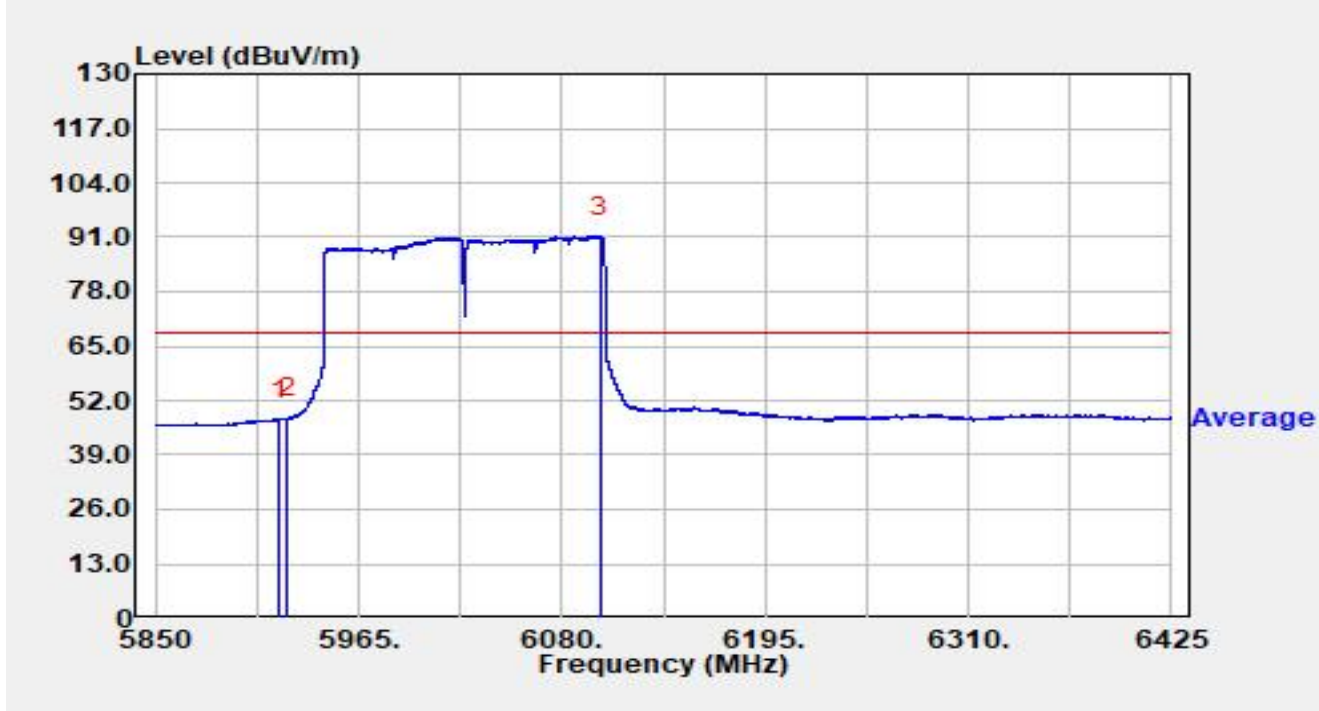


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5920.035	25.97	21.57	47.54	-20.66	68.20	Average
2	*	5925.000	26.08	21.59	47.67	-20.53	68.20	Average
3		6101.505	68.74	22.48	91.22	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-PK	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6025MHz		

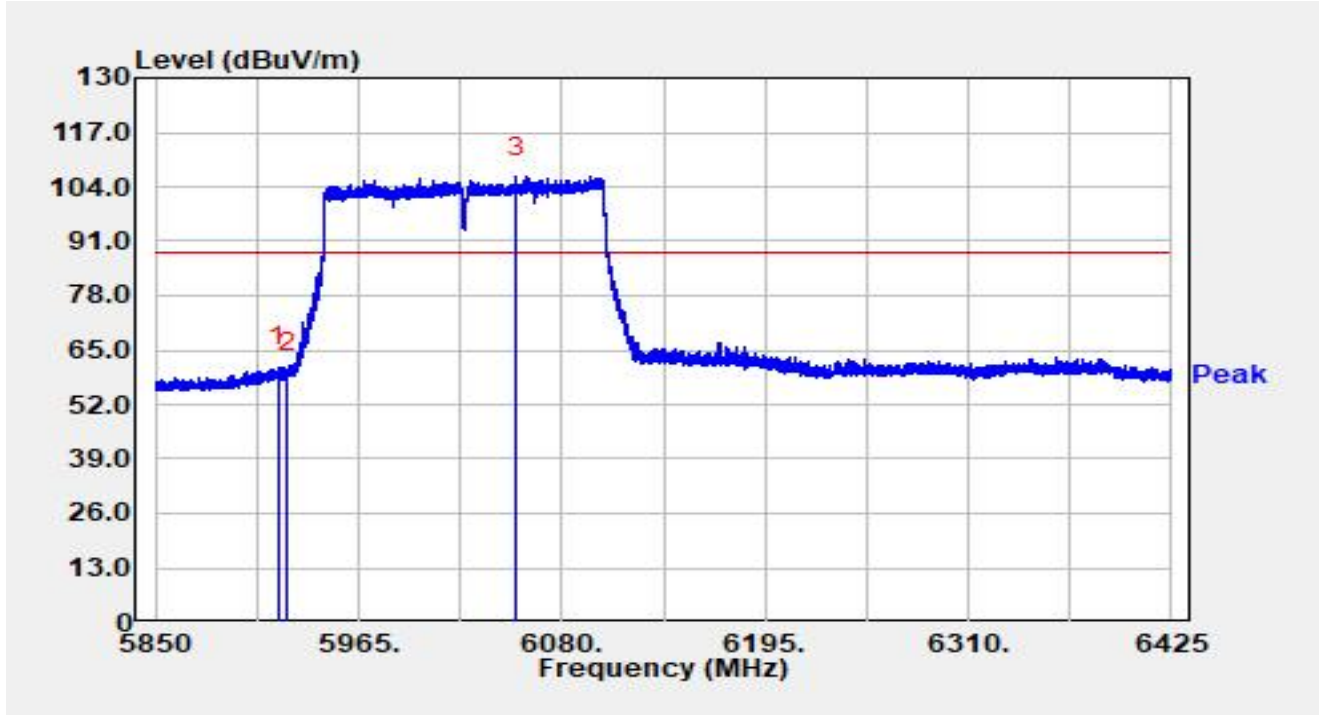


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5919.748	39.48	21.57	61.05	-27.15	88.20	Peak
2		5925.000	38.08	21.59	59.68	-28.52	88.20	Peak
3		6054.413	84.42	22.02	106.44	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-AV	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6025MHz		

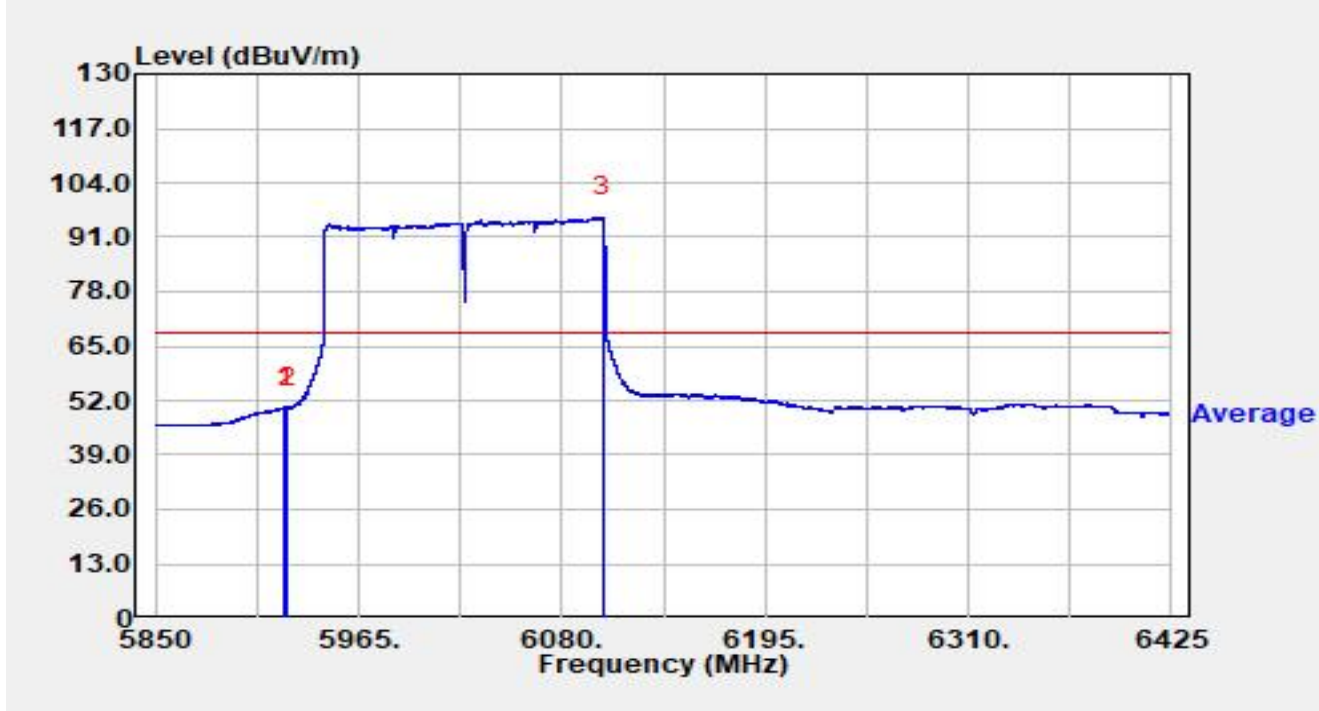


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.428	28.84	21.59	50.43	-17.77	68.20	Average
2		5925.000	28.79	21.59	50.38	-17.82	68.20	Average
3		6103.345	73.22	22.48	95.70	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-PK	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6985MHz		

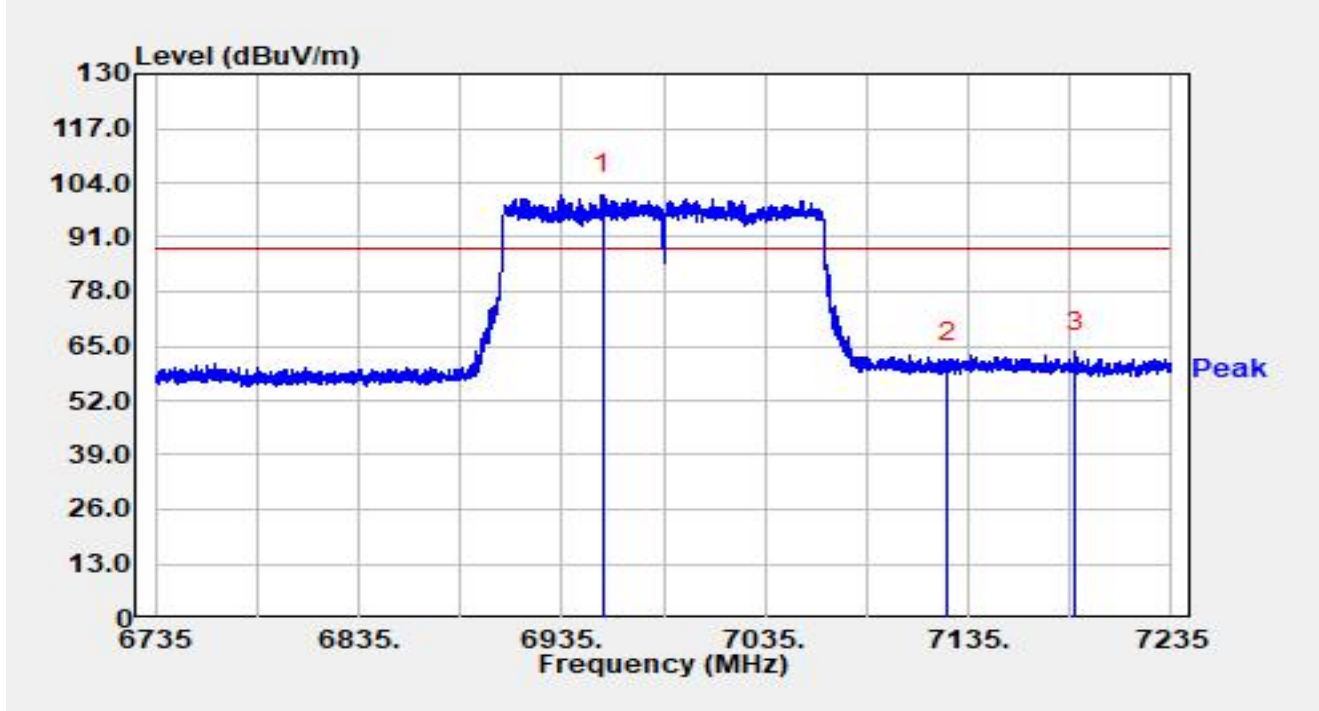


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6955.200	75.50	25.75	101.26	N/A	N/A	Peak
2		7125.000	34.09	26.94	61.03	-27.17	88.20	Peak
3	*	7187.900	36.69	26.99	63.68	-24.52	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-AV	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6985MHz		

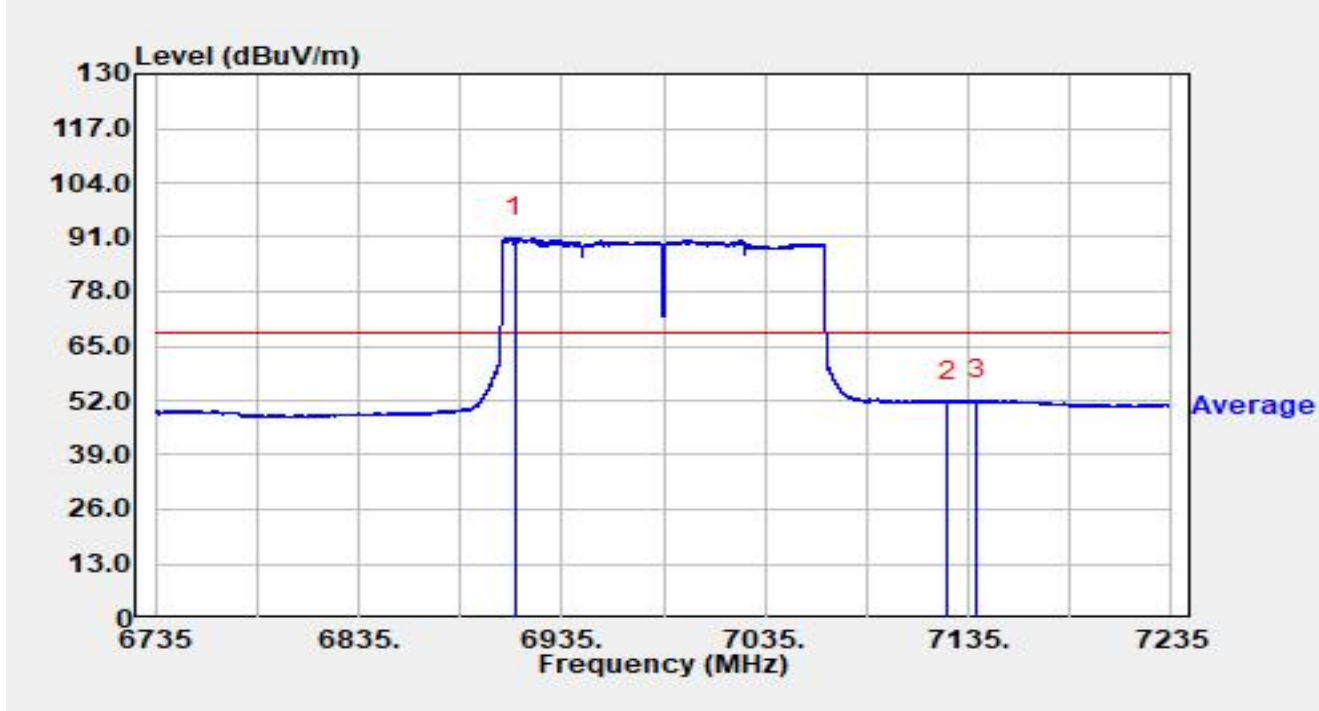


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6912.000	65.39	25.51	90.90	N/A	N/A	Average
2		7125.000	24.76	26.94	51.70	-16.50	68.20	Average
3	*	7139.100	24.94	27.20	52.15	-16.05	68.20	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-PK	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6985MHz		

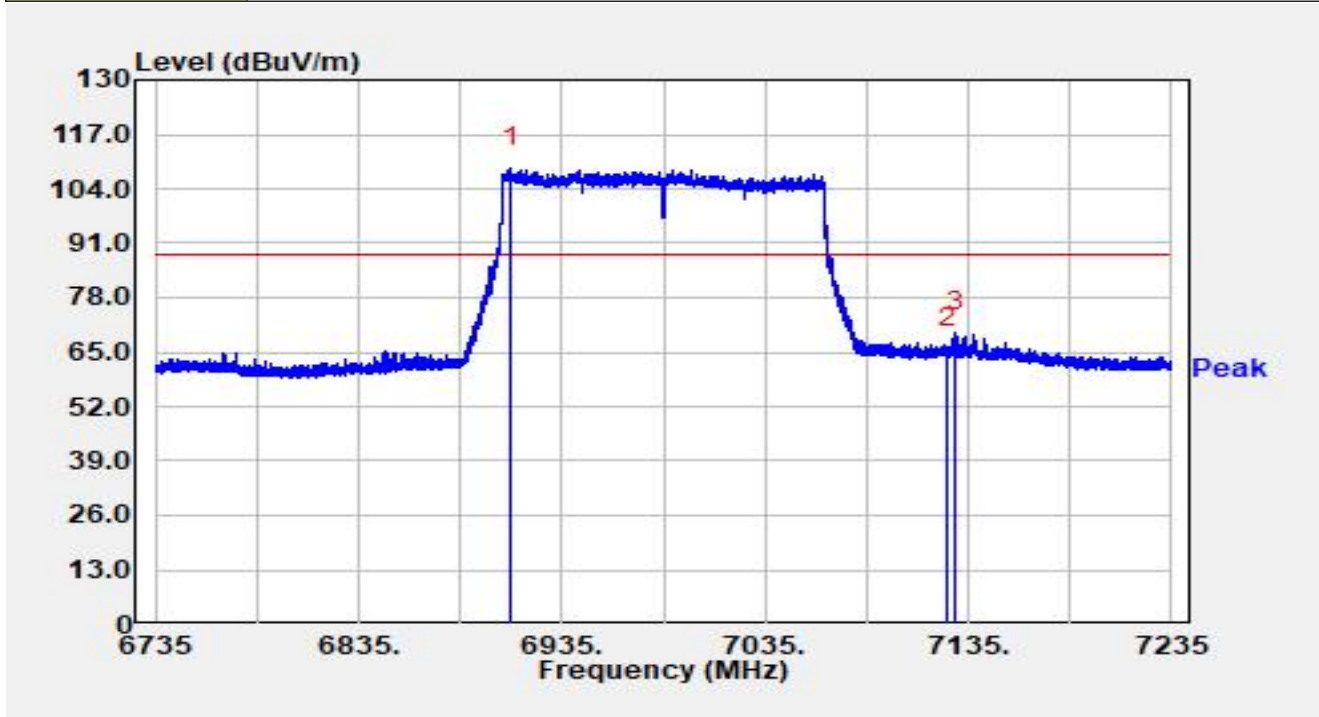


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6910.300	83.49	25.48	108.97	N/A	N/A	Peak
2		7125.000	38.87	26.94	65.81	-22.39	88.20	Peak
3	*	7128.850	42.81	27.02	69.83	-18.37	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-AV	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6985MHz		

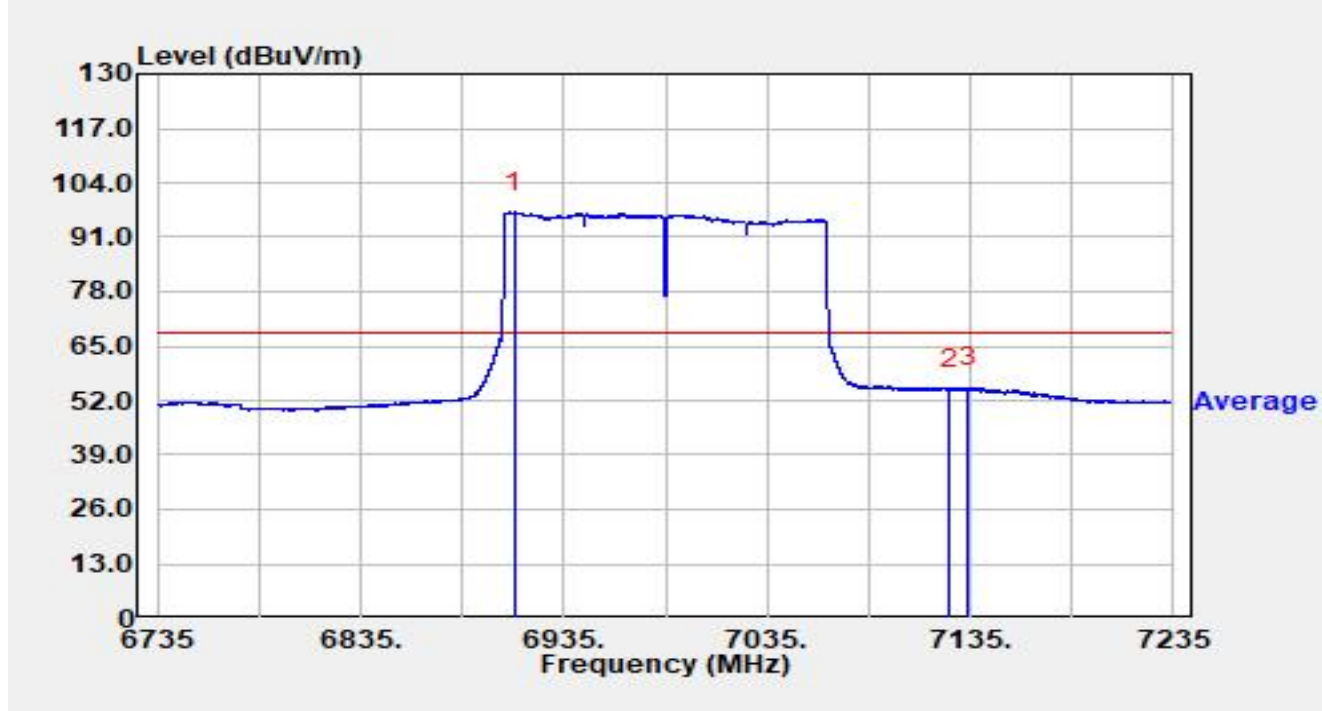


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6910.350	71.41	25.48	96.90	N/A	N/A	Average
2		7125.000	27.69	26.94	54.63	-13.57	68.20	Average
3	*	7133.750	27.92	27.12	55.04	-13.16	68.20	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-PK	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320 at 6105MHz		

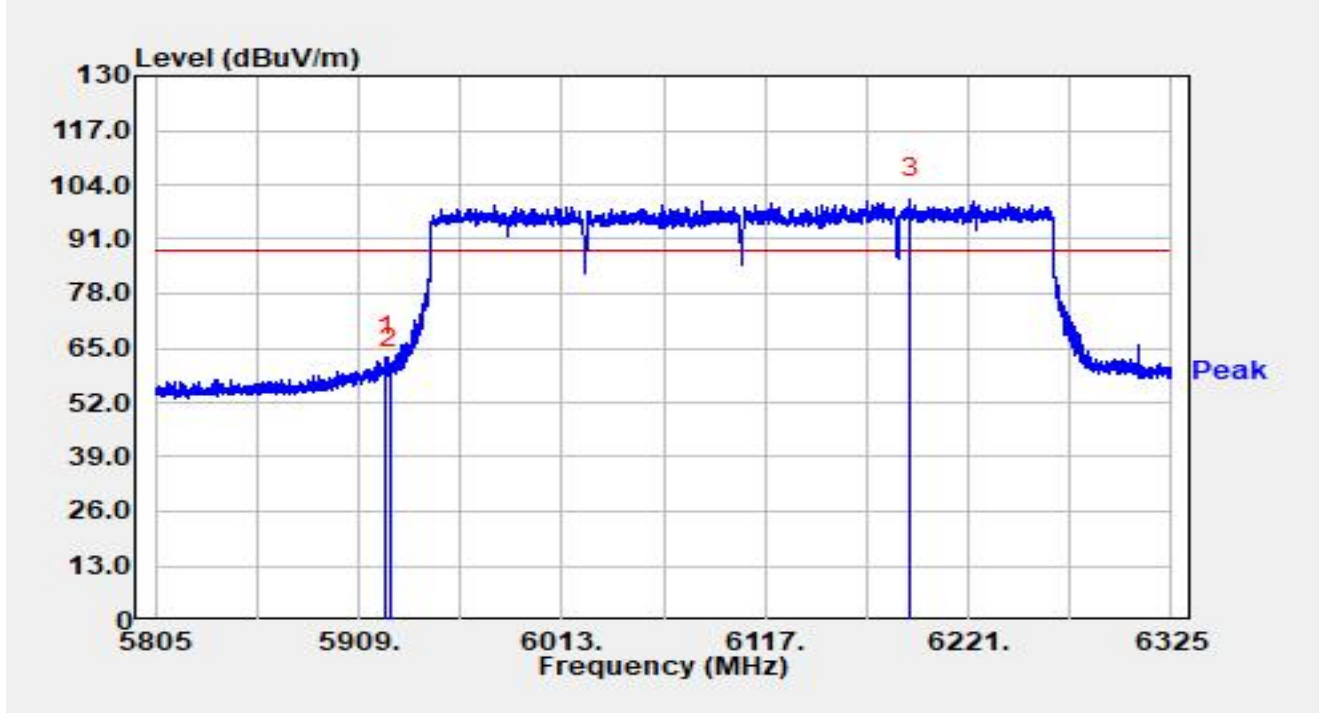


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.300	41.42	21.59	63.01	-25.19	88.20	Peak
2		5925.000	38.45	21.59	60.04	-28.16	88.20	Peak
3		6191.204	77.67	22.98	100.65	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-AV	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320 at 6105MHz		

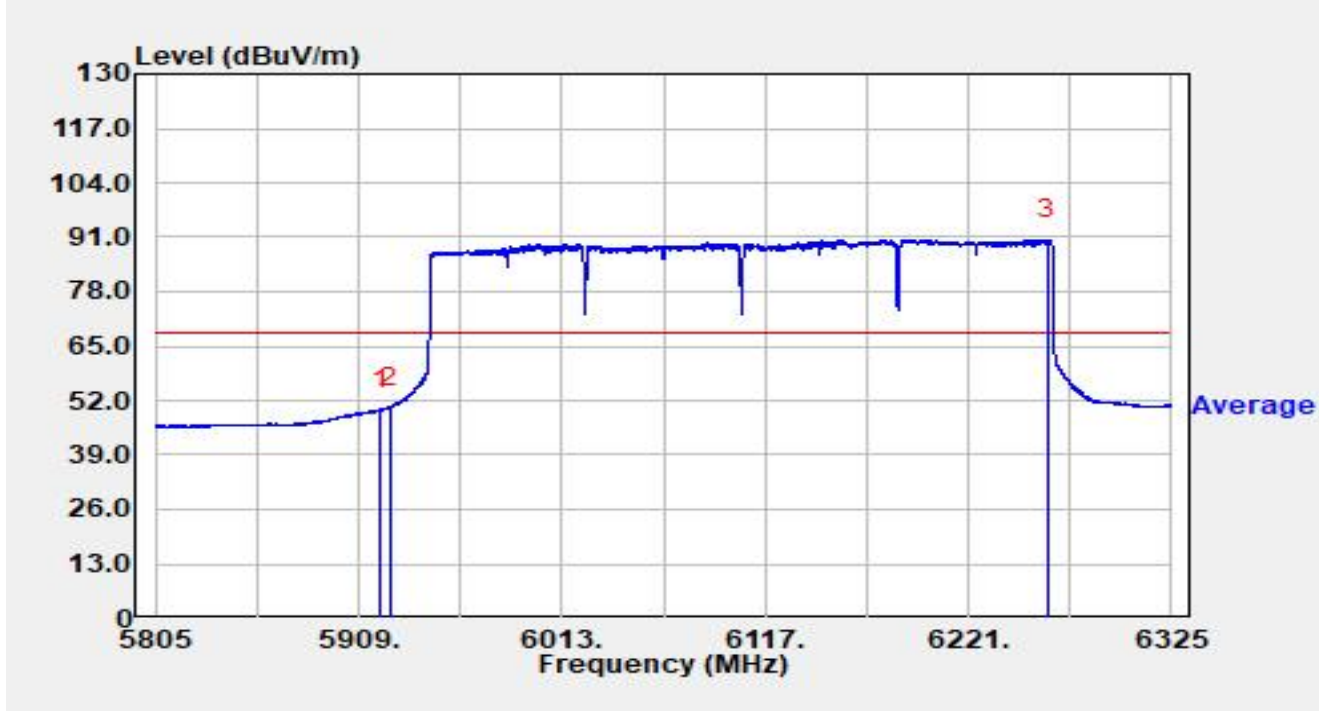


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5920.440	28.27	21.57	49.84	-18.36	68.20	Average
2	*	5925.000	28.63	21.59	50.23	-17.97	68.20	Average
3		6261.456	67.67	22.80	90.47	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-PK	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320 at 6105MHz		

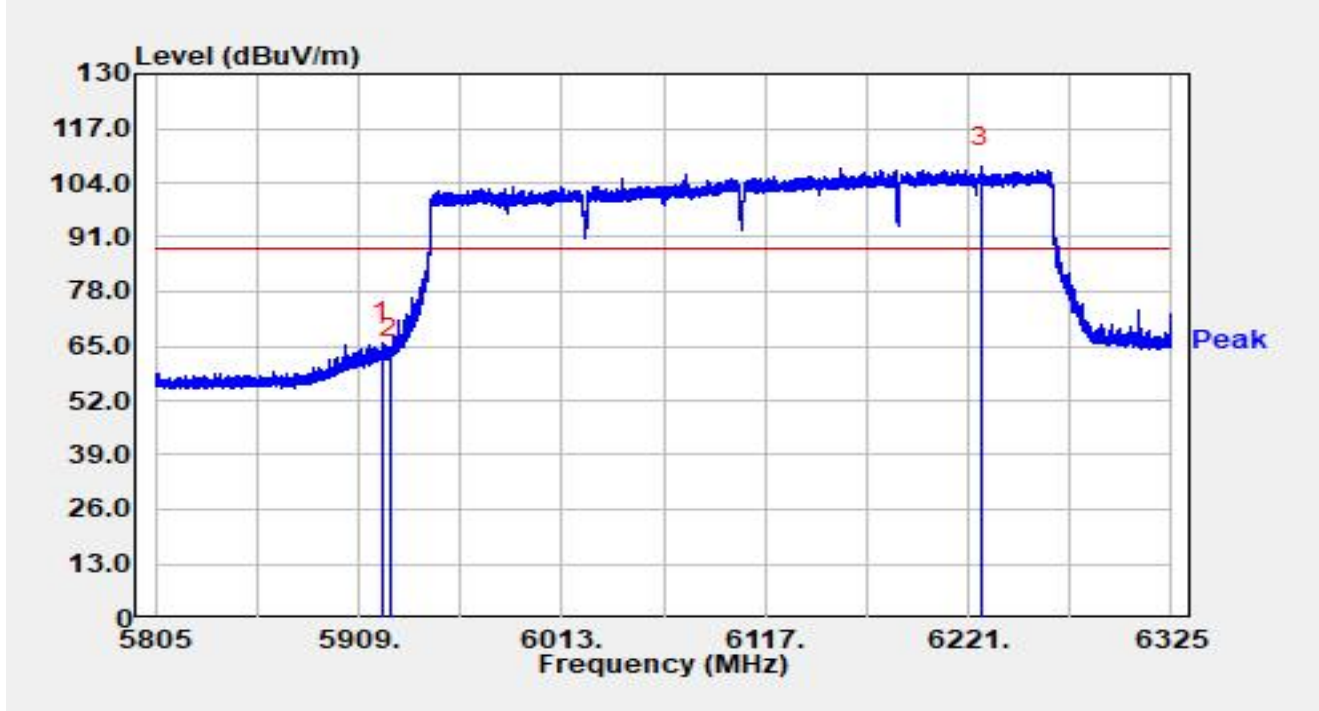


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5920.648	44.31	21.57	65.88	-22.32	88.20	Peak
2		5925.000	40.29	21.59	61.89	-26.31	88.20	Peak
3		6227.240	85.15	22.61	107.76	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-AV	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320 at 6105MHz		

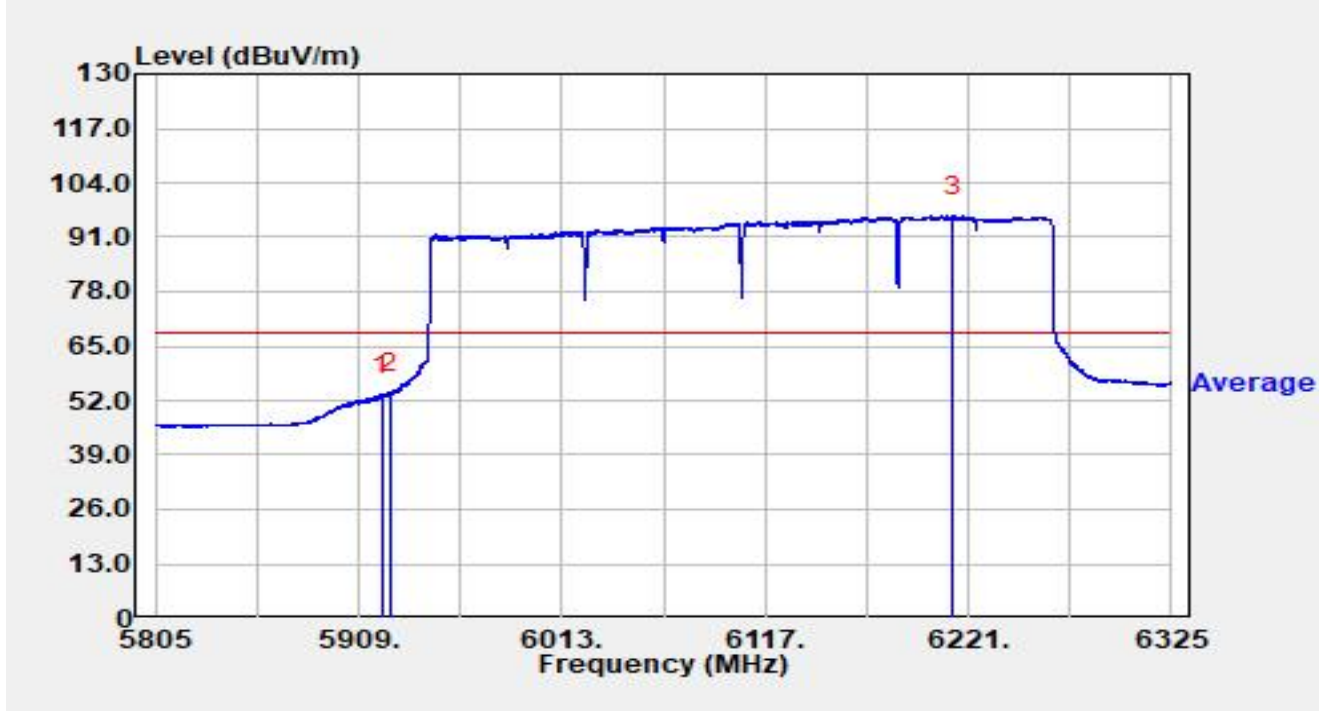


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5920.804	31.77	21.57	53.34	-14.86	68.20	Average
2	*	5925.000	32.04	21.59	53.64	-14.56	68.20	Average
3		6212.836	73.35	22.77	96.12	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-PK	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320 at 6905MHz		

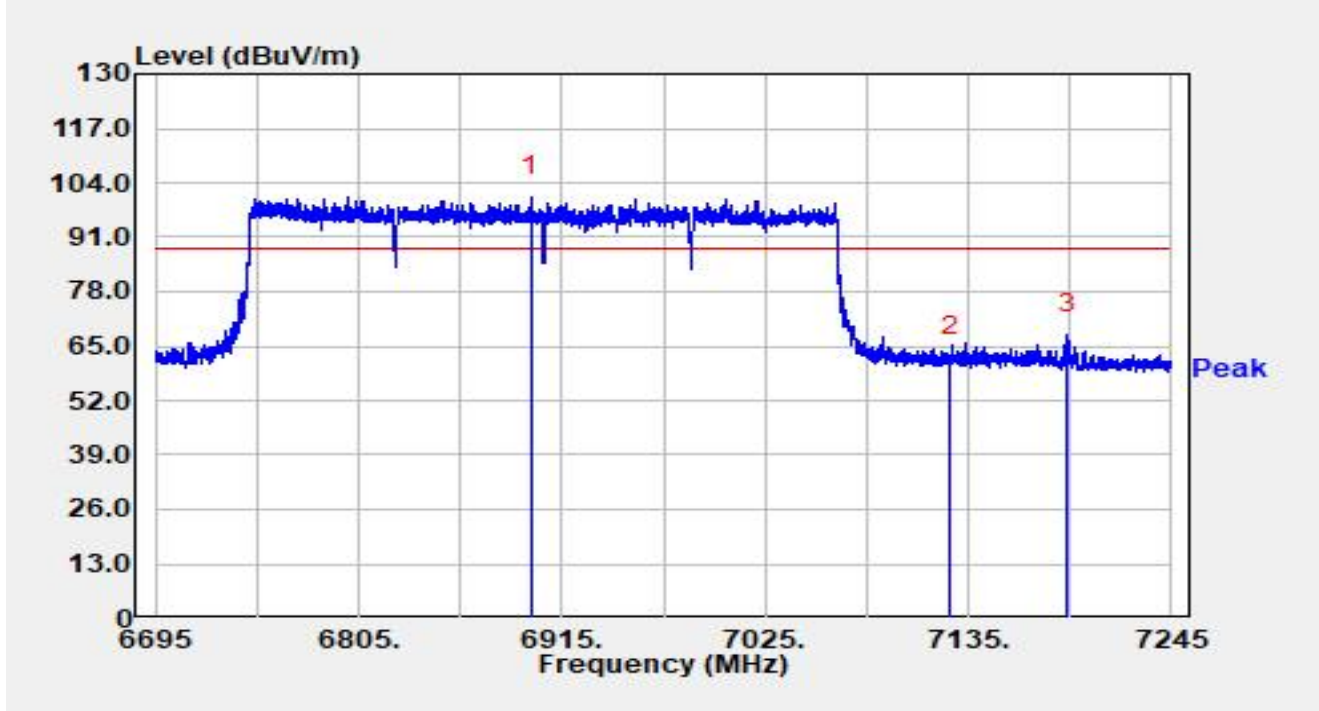


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6898.335	75.44	25.29	100.73	N/A	N/A	Peak
2		7125.000	35.72	26.94	62.66	-25.54	88.20	Peak
3	*	7188.845	40.74	26.98	67.72	-20.48	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-AV	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320 at 6905MHz		

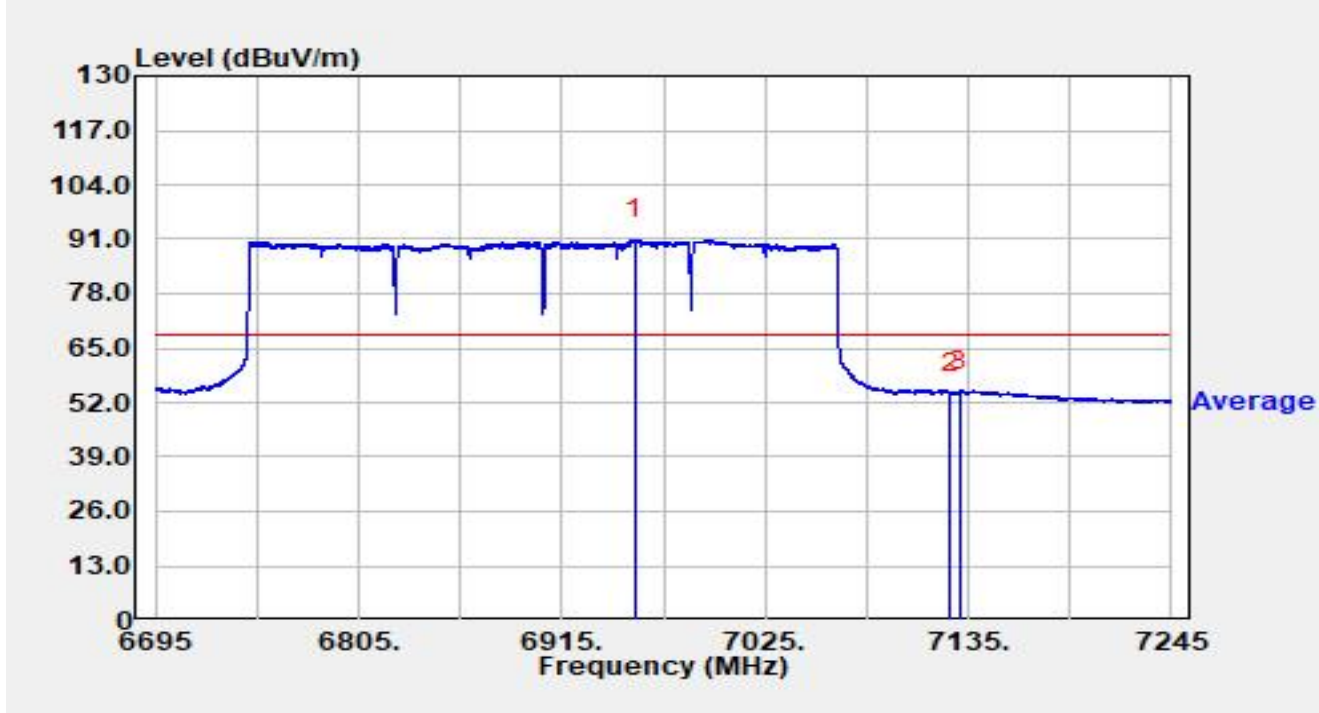


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6954.160	65.05	25.73	90.78	N/A	N/A	Average
2		7125.000	27.07	26.94	54.01	-14.19	68.20	Average
3	*	7130.160	27.72	27.04	54.76	-13.44	68.20	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-PK	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320 at 6905MHz		

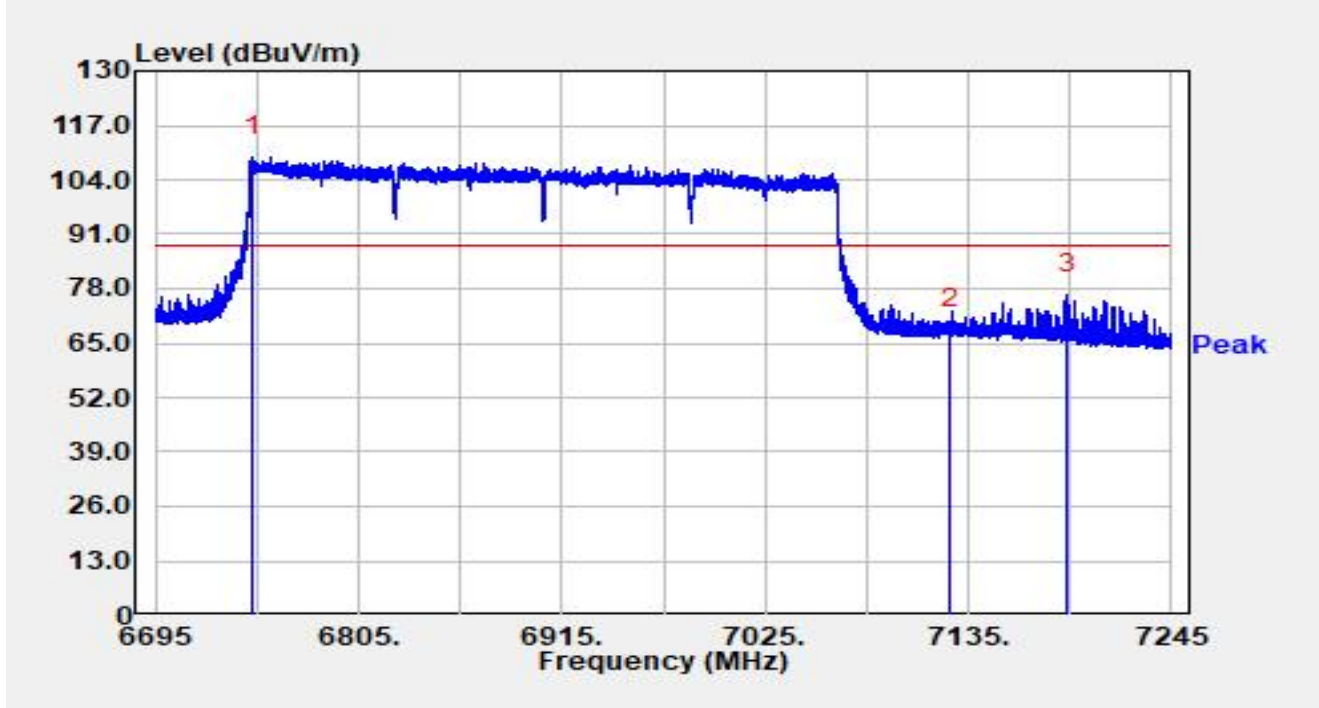


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6748.075	84.89	24.67	109.56	N/A	N/A	Peak
2		7125.000	41.48	26.94	68.42	-19.78	88.20	Peak
3	*	7188.680	49.79	26.98	76.77	-11.43	88.20	Peak

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-01-03
Temperature	19.6°C	Humidity	30.4%
Limit	FCC_6G RE(3m)-AV	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320 at 6905MHz		

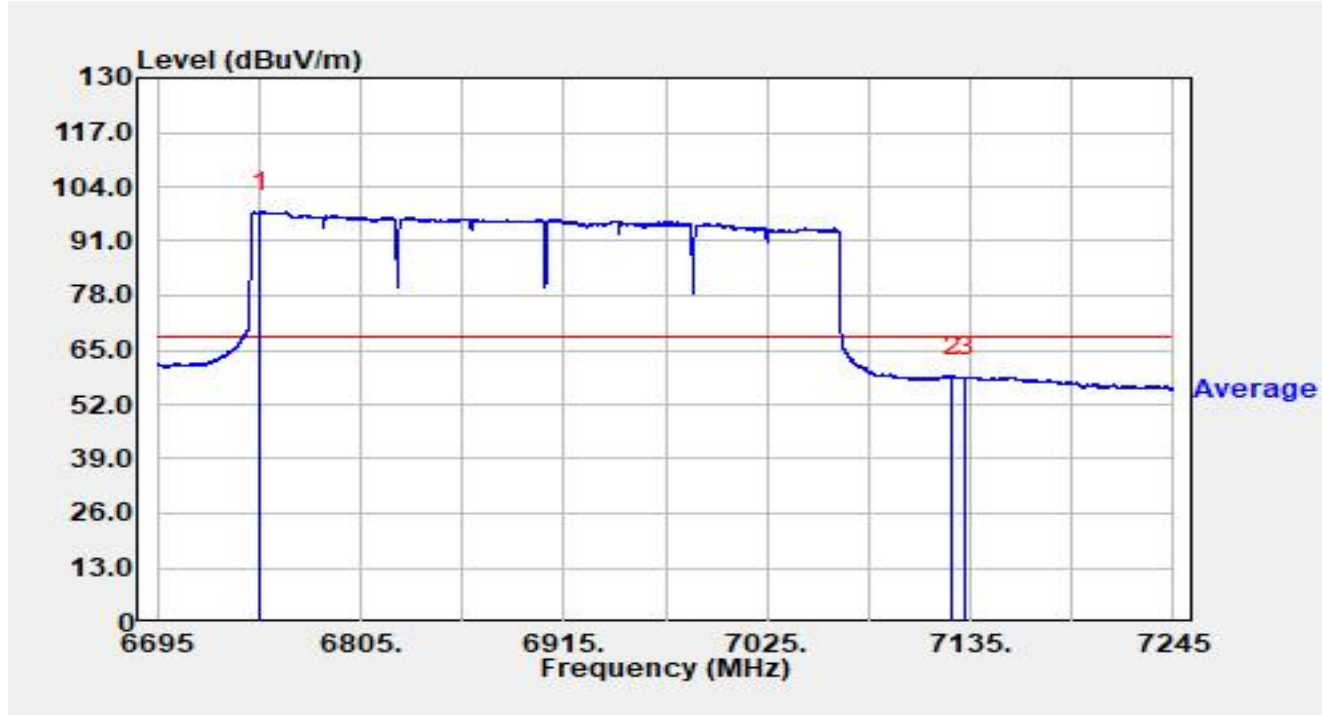


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6750.330	73.33	24.68	98.00	N/A	N/A	Average
2		7125.000	31.66	26.94	58.60	-9.60	68.20	Average
3	*	7132.140	31.53	27.09	58.62	-9.58	68.20	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

A.10 AC Conducted Emissions Test Result

Site	WZ-SR2	Test Date	2025-01-09
Temperature	18.0°C	Humidity	31.1%
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Linda Wei
Factor	ENV216_101683_L1_Filter Off_E	Polarity	Line
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320 at 6105MHz		

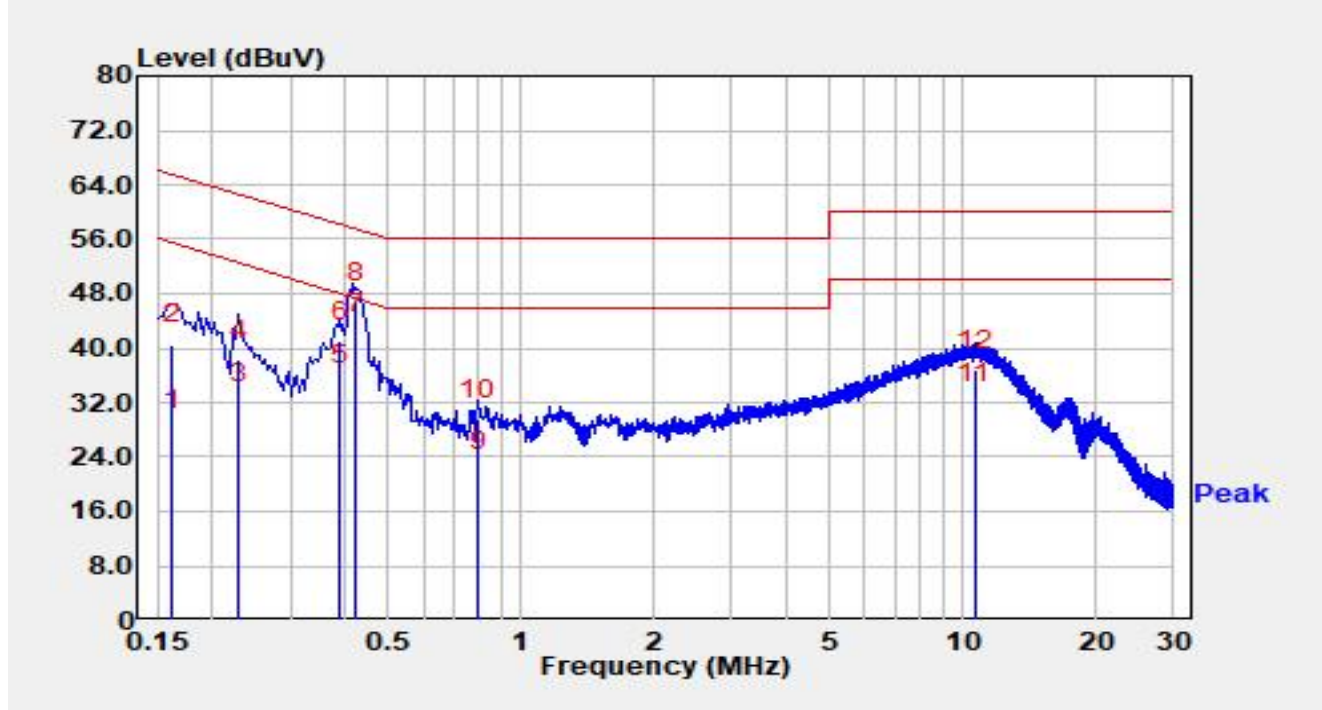


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.162	18.30	9.77	28.07	-27.29	55.36	Average
2		0.162	30.80	9.77	40.57	-24.79	65.36	QP
3		0.230	22.00	9.81	31.81	-20.64	52.45	Average
4		0.230	28.40	9.81	38.21	-24.24	62.45	QP
5		0.390	24.70	9.87	34.57	-13.49	48.06	Average
6		0.390	31.10	9.87	40.97	-17.09	58.06	QP
7	*	0.422	32.30	9.89	42.19	-5.22	47.41	Average
8		0.422	36.90	9.89	46.79	-10.62	57.41	QP
9		0.798	11.80	10.08	21.88	-24.12	46.00	Average
10		0.798	19.50	10.08	29.58	-26.42	56.00	QP
11		10.650	20.90	11.01	31.91	-18.09	50.00	Average

12		10.650	25.70	11.01	36.71	-23.29	60.00	QP
----	--	--------	-------	-------	-------	--------	-------	----

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).

Site	WZ-SR2	Test Date	2025-01-09
Temperature	18.0°C	Humidity	31.1%
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Linda Wei
Factor	ENV216_101683_N_Filter Off_E	Polarity	Neutral
EUT	High-Speed Tri-Band 2x2 Wi-Fi 7 Wireless AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320 at 6105MHz		

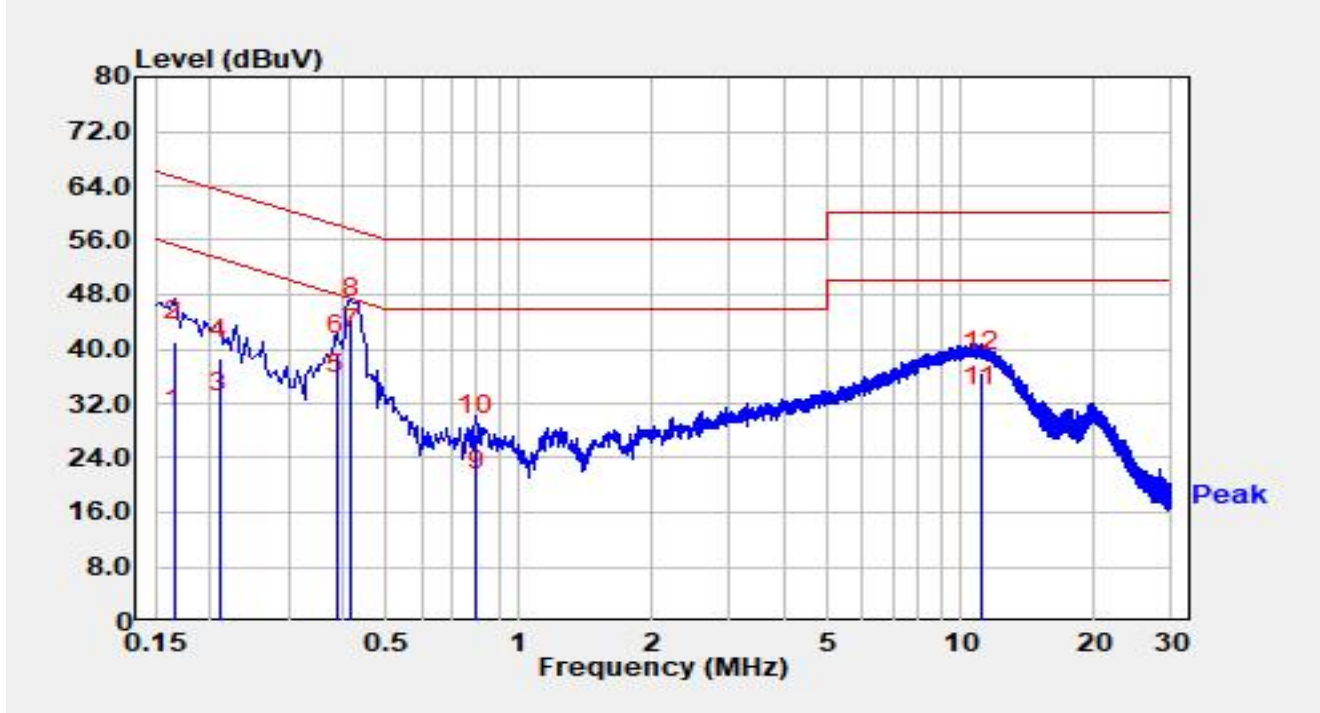

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.166	18.50	9.76	28.26	-26.90	55.16	Average
2		0.166	31.30	9.76	41.06	-24.10	65.16	QP
3		0.210	21.00	9.78	30.78	-22.43	53.21	Average
4		0.210	28.80	9.78	38.58	-24.63	63.21	QP
5		0.386	23.40	9.86	33.26	-14.89	48.15	Average
6		0.386	29.30	9.86	39.16	-18.99	58.15	QP
7	*	0.418	30.20	9.87	40.07	-7.42	47.49	Average
8		0.418	34.60	9.87	44.47	-13.02	57.49	QP
9		0.798	9.10	10.07	19.17	-26.83	46.00	Average
10		0.798	17.30	10.07	27.37	-28.63	56.00	QP
11		11.140	20.50	11.08	31.58	-18.42	50.00	Average
12		11.140	25.60	11.08	36.68	-23.32	60.00	QP

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).

Appendix B – Test Setup Photograph

Refer to “2412RSU001-UT” file.

Appendix C – EUT Photograph

Refer to “2412RSU001-UE” file.

The End
