


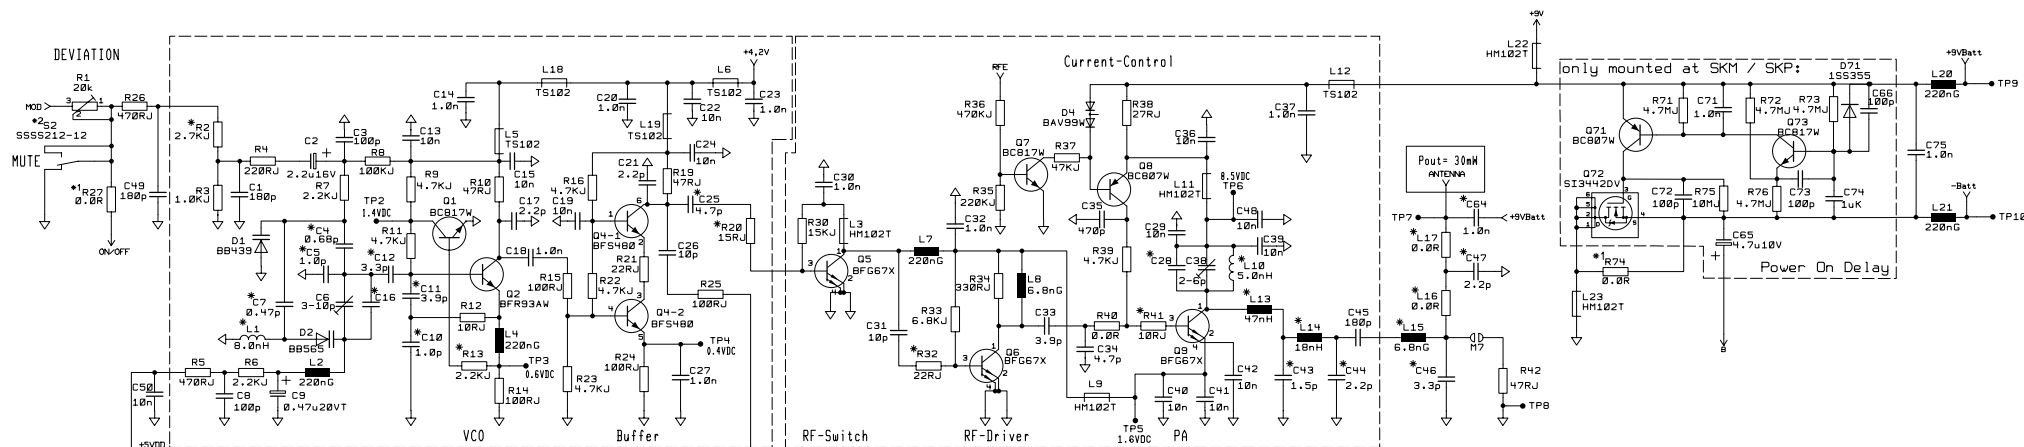

RF-Parts shown Range 790-822MHz

*COMPONENTS SK/SKM/SKP/SR Versions: SK=1, SKM/SKP=2, SR=3


		VCO										BUFFER		DRIVER		POWER-AMP										Code Parts	
RANGE	Freq. (MHz)	R54	R2	L1	C4	C5	C7	C10	C11	C12	R13	C25	R20	R32	R41	L10	L13	C43	L14	C44	L/R15	C46	L/R16	C47	L17	Vers.1: R901=120R	Vers.3: R903=470R
1	518-550	82k	2k2	18n5	3p3	1p0	0p47	10p	6p8	15p	47k	6p8	0R0	33R	33R	12n5	82n	1p8	33n	4p7	12n	5p8	6n8	4p7	0R0	R801= 120R	
2	630-662	82k	18k	12n5	3p3	1p0	0p47	2p2	5p6	15p	10k	6p8	0R0	22R	22R	8n0	68n	2p2	22n	3p3	0R0	4p7	3n9	4p7	0R0	R802= 270R	
3	740-772	120k	10k	8n0	2p2	2p2	0p47	2p2	5p6	10p	4k7	6p8	0R0	22R	22R	8n0	68n	1p5	18n	3p3	0R0	6p8	3n9	6p8	0R0	R803= 470R	
4	790-822	100k	2k7	8n0	0p68	1p0	0p47	1p0	3p9	3p3	2k2	4p7	15R	22R	10R	5n0	47n	1p5	18n	2p2	6n8	3p3	0R0	2p2	0R0	R804= 680R	
5	838-870	68k	1k0	8n0	0p68	1p2	0p47	1p0	3p9	3p3	2k2	4p7	15R	22R	10R	5n0	47n	1p5	18n	2p2	6n8	3p3	0R0	2p2	0R0	R805= 1k0	

Differing for SKM/SKP (Vers.2)										Code Parts	
18p	6n8	22p	6n8								
15p	4n7	15p	0R0								
4p7	0R0	15p	0R0								
10p	5n6	15p	0R0								
4p7	5n6	6p8	15p								

NOTE: C16, C28, C64 mounted if necessary.

*1 only mounted at SK/SR

*2 only mounted at SKM/SKP



SKX 1XX0 UHF

HF-Teil

STROMLAUFPLAN

21.06.99 Kra.

08.07.99 Kra.

09.07.99 Pri

23.07.99 Poh

19.08.99 Pri

20.08.99 Pri

