


|             |                                               |               |              |
|-------------|-----------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                        | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                       | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                 | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                 | Polarity      | Horizontal   |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11ax-HE160 at 6985MHz (Nss=3) |               |              |

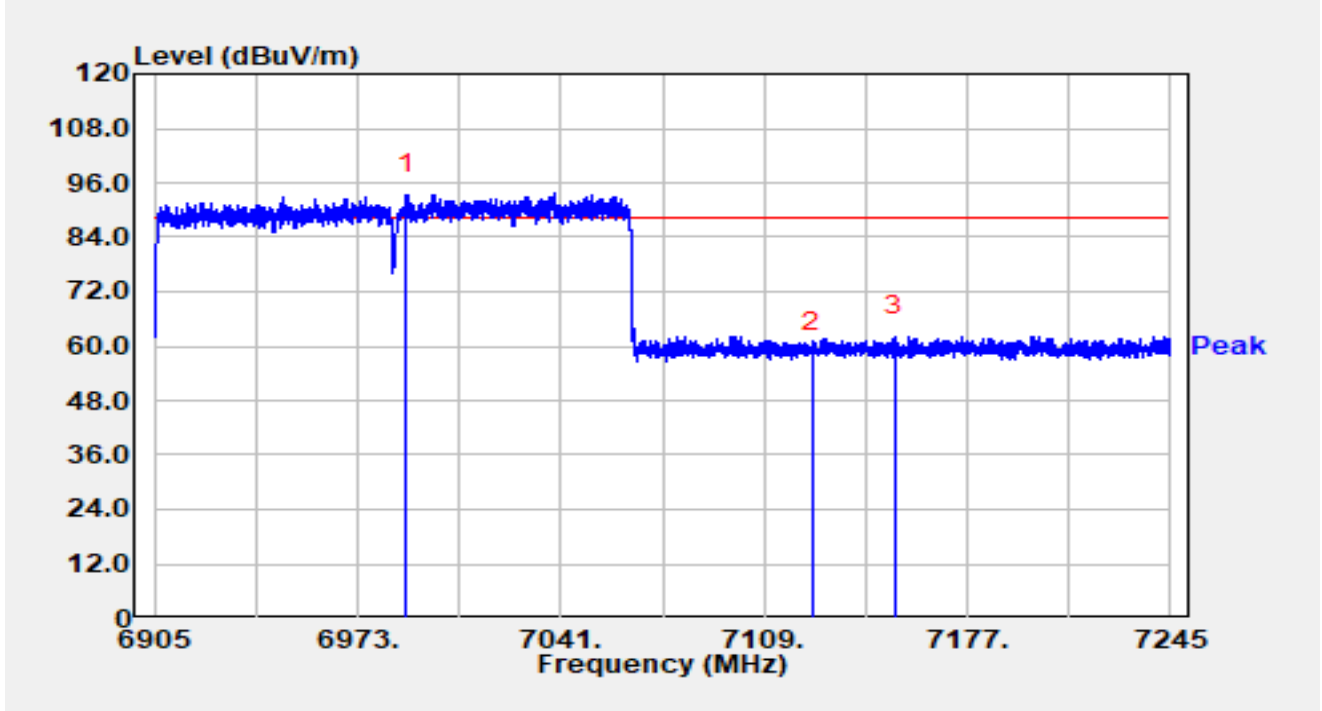


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 6989.184        | 73.14          | 20.29      | 93.43                | N/A         | N/A            | Peak     |
| 2  |      | 7125.000        | 38.42          | 20.42      | 58.84                | -29.36      | 88.20          | Peak     |
| 3  | *    | 7152.656        | 41.74          | 20.37      | 62.12                | -26.08      | 88.20          | Peak     |

Notes:

- " \* ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                               |               |              |
|-------------|-----------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                        | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                       | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                 | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                 | Polarity      | Horizontal   |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11ax-HE160 at 6985MHz (Nss=3) |               |              |

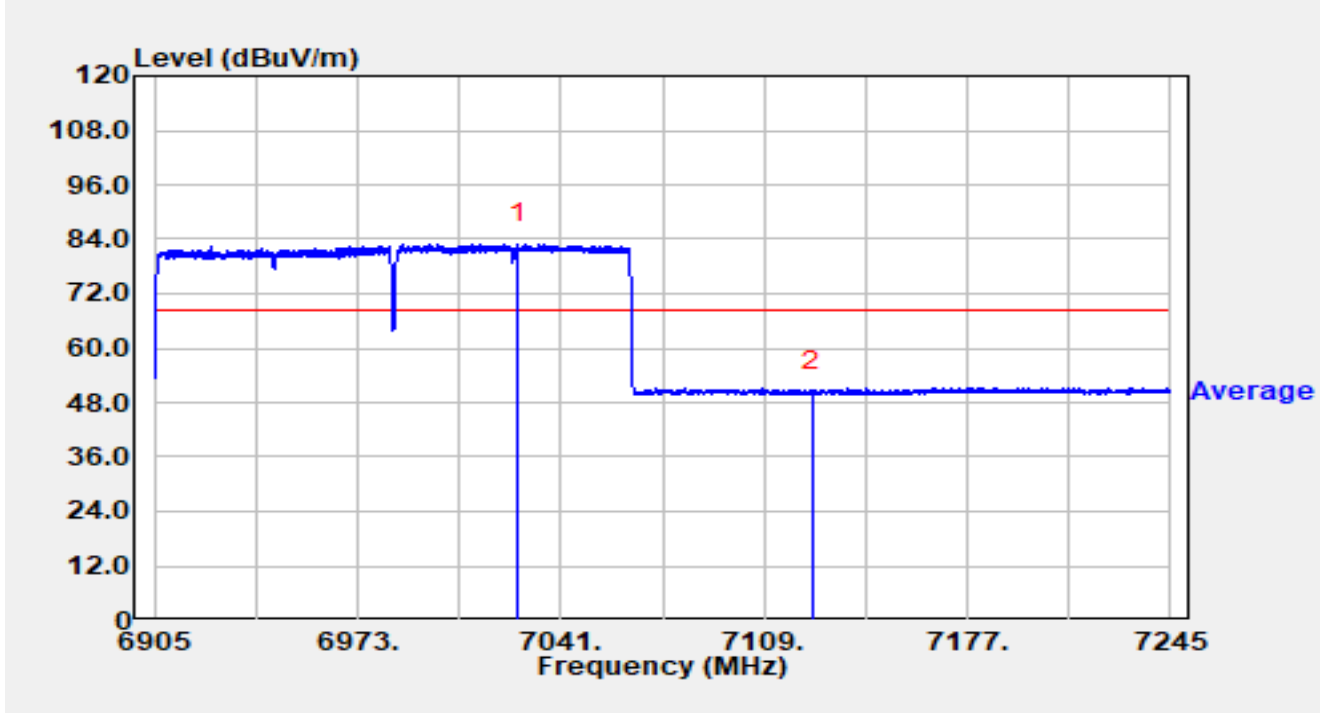


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 7026.584        | 62.65          | 20.30      | 82.95                | N/A         | N/A            | Average  |
| 2  | *    | 7125.000        | 30.08          | 20.42      | 50.50                | -17.70      | 68.20          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                               |               |              |
|-------------|-----------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                        | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                       | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                 | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                 | Polarity      | Vertical     |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11ax-HE160 at 6985MHz (Nss=3) |               |              |

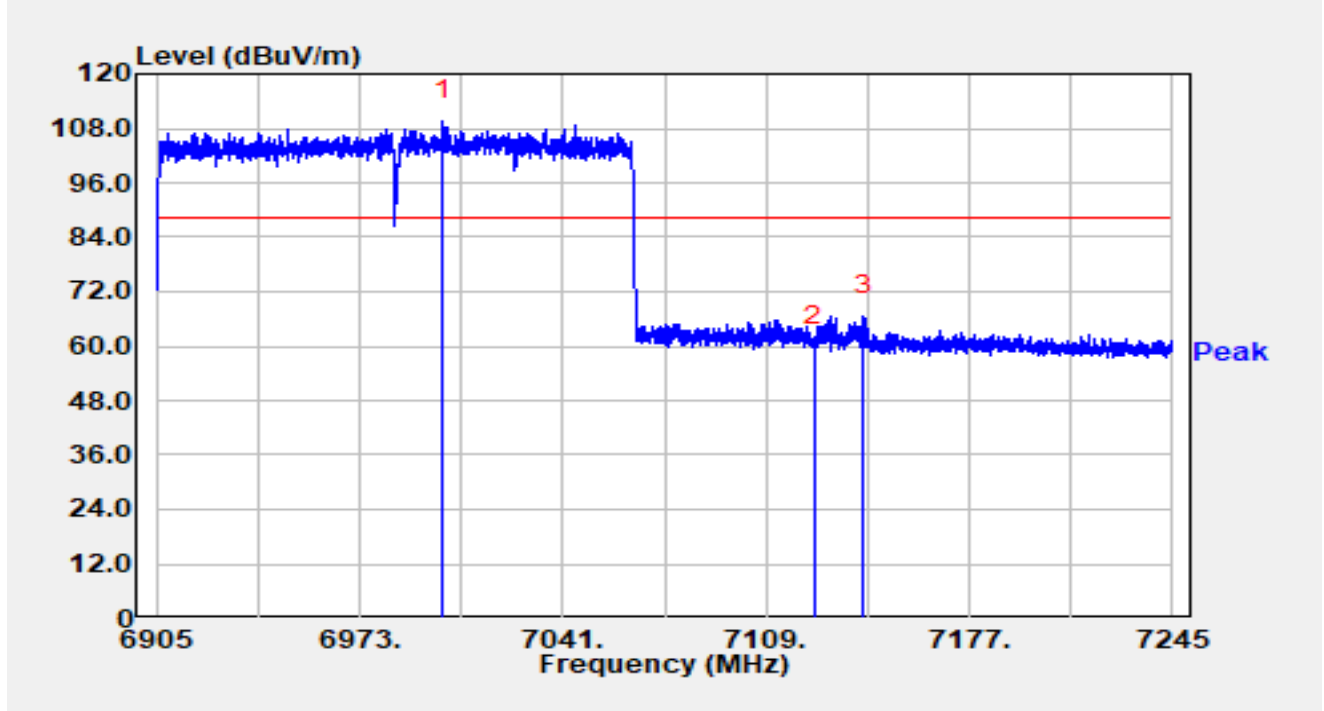


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 7000.744        | 89.53          | 20.26      | 109.79               | N/A         | N/A            | Peak     |
| 2  |      | 7125.000        | 39.45          | 20.42      | 59.88                | -28.32      | 88.20          | Peak     |
| 3  | *    | 7141.742        | 46.38          | 20.40      | 66.77                | -21.43      | 88.20          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                               |               |              |
|-------------|-----------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                        | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                       | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                 | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                 | Polarity      | Vertical     |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11ax-HE160 at 6985MHz (Nss=3) |               |              |

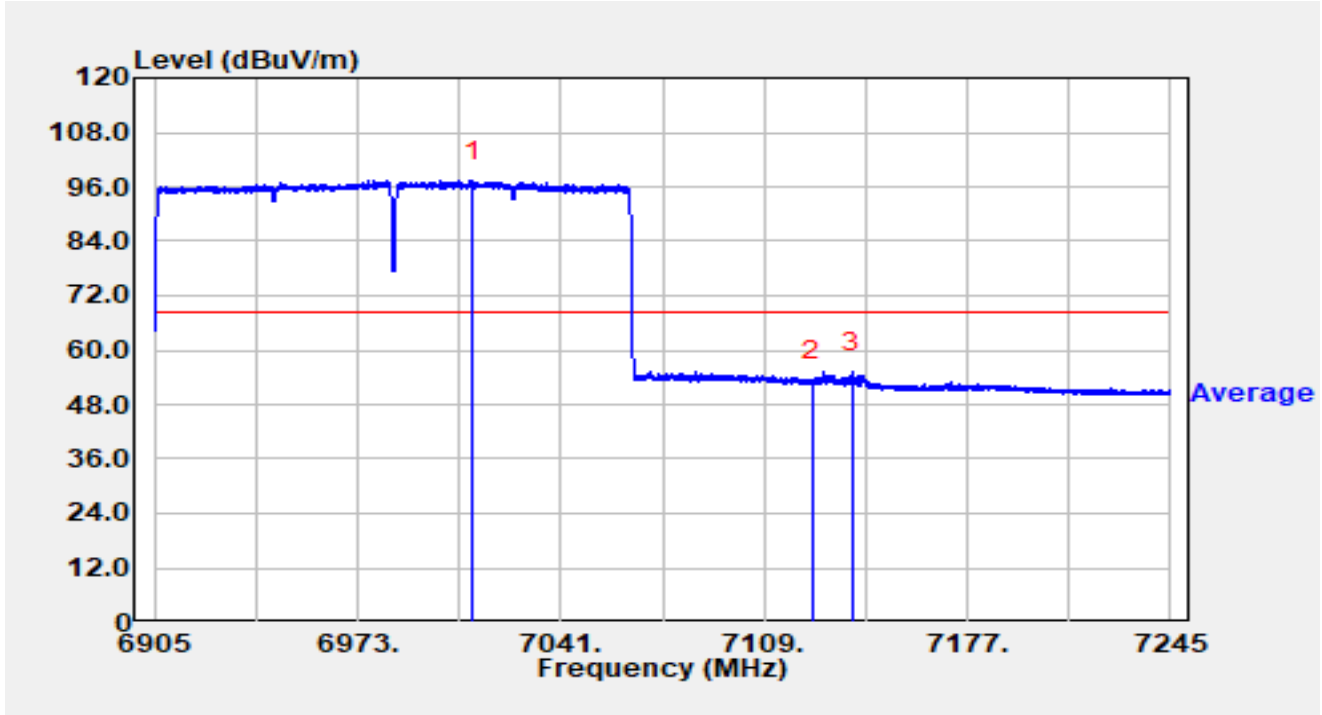


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 7011.454        | 76.97          | 20.35      | 97.32                | N/A         | N/A            | Average  |
| 2  |      | 7125.000        | 32.68          | 20.42      | 53.10                | -15.10      | 68.20          | Average  |
| 3  | *    | 7138.614        | 34.76          | 20.42      | 55.18                | -13.02      | 68.20          | Average  |

Notes:

- " \* ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                               |               |              |
|-------------|-----------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                        | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                       | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                 | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                 | Polarity      | Horizontal   |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT20 at 6115MHz (Nss=3) |               |              |

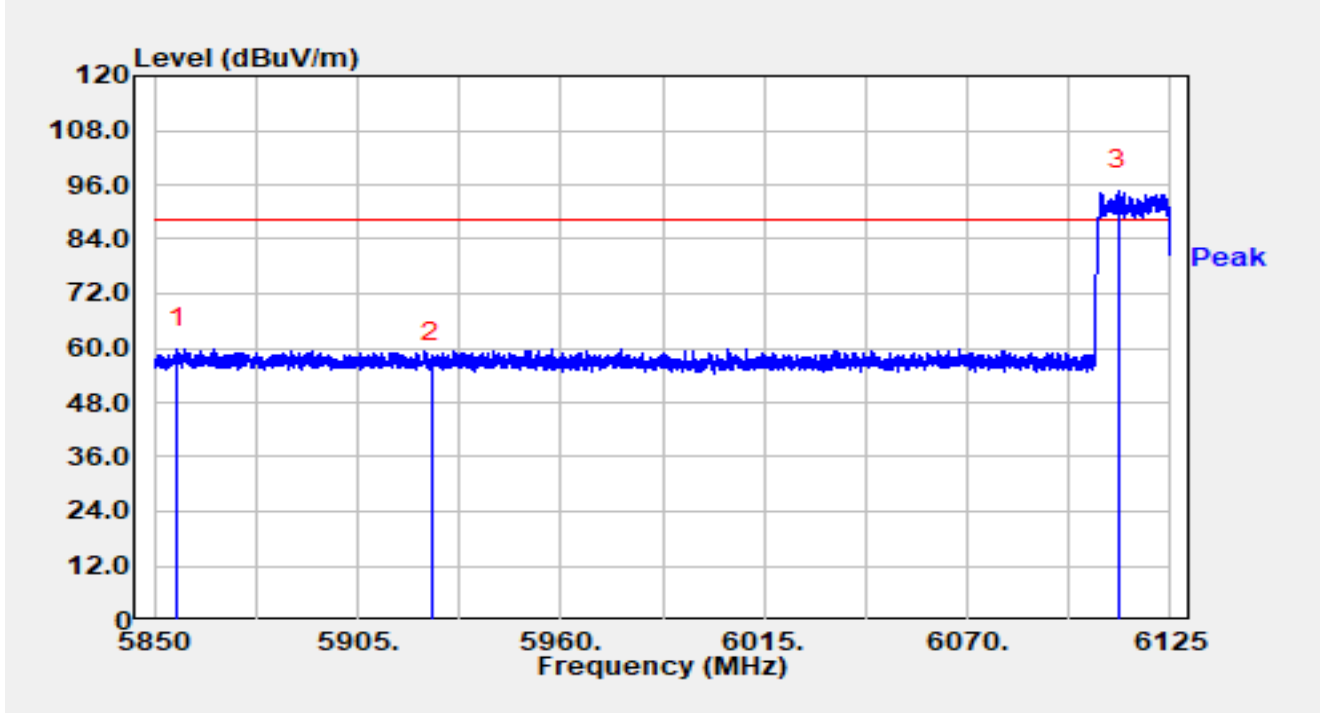


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5856.078        | 42.64          | 17.33      | 59.96                | -28.24      | 88.20          | Peak     |
| 2  |      | 5925.000        | 39.27          | 17.36      | 56.63                | -31.57      | 88.20          | Peak     |
| 3  |      | 6110.728        | 76.60          | 18.15      | 94.74                | N/A         | N/A            | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                               |               |              |
|-------------|-----------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                        | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                       | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                 | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                 | Polarity      | Horizontal   |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT20 at 6115MHz (Nss=3) |               |              |

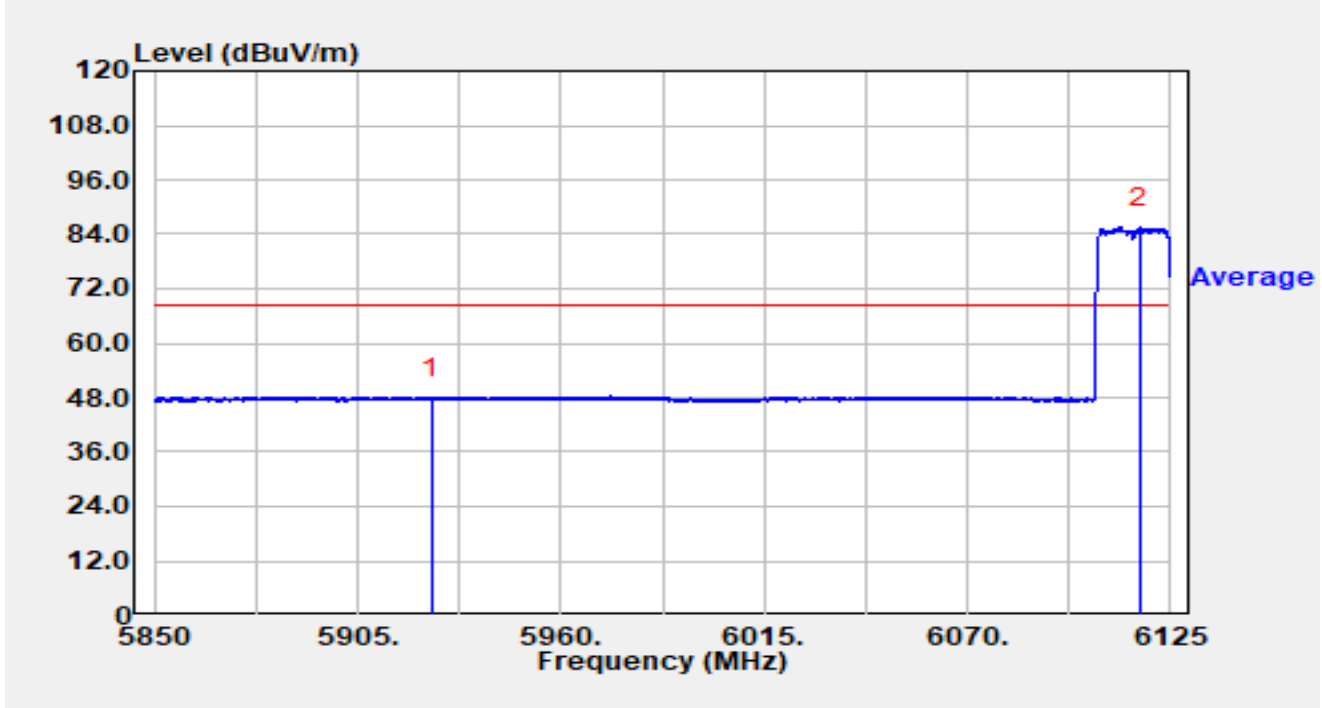


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5925.000        | 30.50          | 17.36      | 47.86                | -20.34      | 68.20          | Average  |
| 2  |      | 6116.695        | 67.21          | 18.26      | 85.47                | N/A         | N/A            | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                               |               |              |
|-------------|-----------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                        | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                       | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                 | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                 | Polarity      | Vertical     |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT20 at 6115MHz (Nss=3) |               |              |

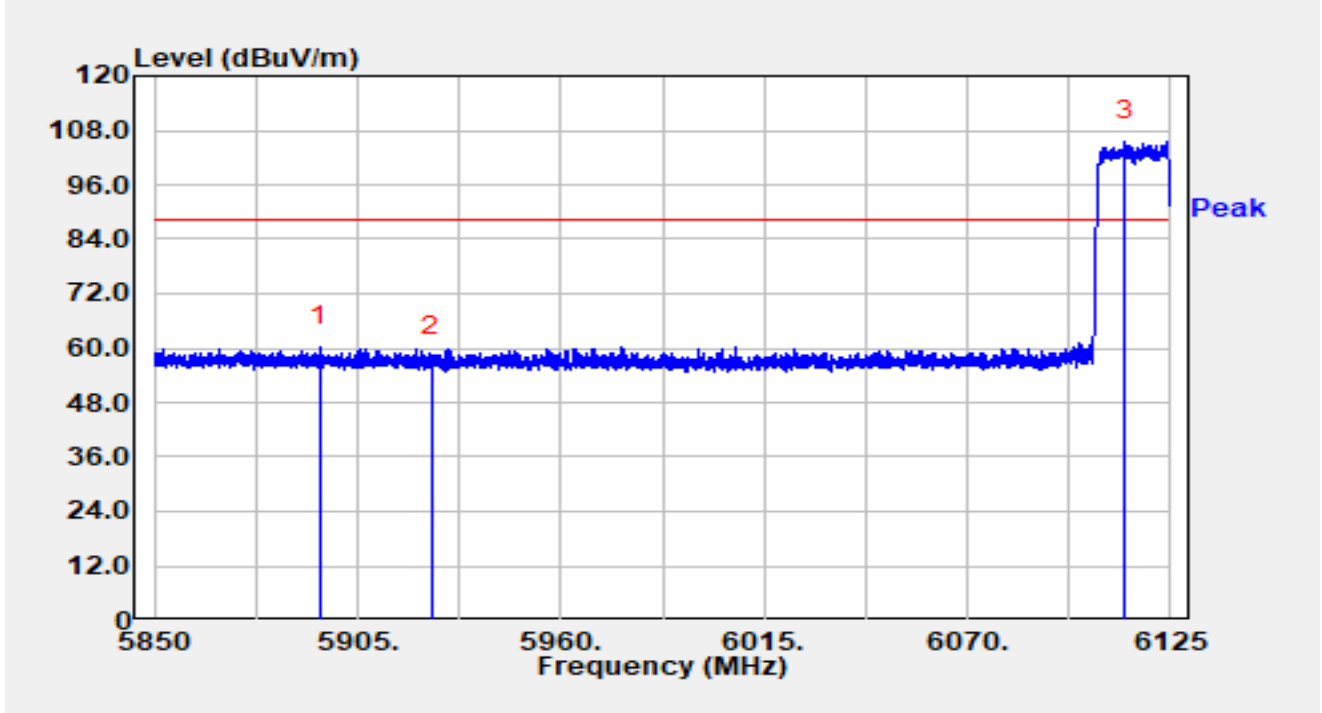


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5894.880        | 43.01          | 17.38      | 60.38                | -27.82      | 88.20          | Peak     |
| 2  |      | 5925.000        | 40.72          | 17.36      | 58.09                | -30.11      | 88.20          | Peak     |
| 3  |      | 6112.625        | 87.50          | 18.18      | 105.68               | N/A         | N/A            | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                               |               |              |
|-------------|-----------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                        | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                       | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                 | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                 | Polarity      | Vertical     |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT20 at 6115MHz (Nss=3) |               |              |

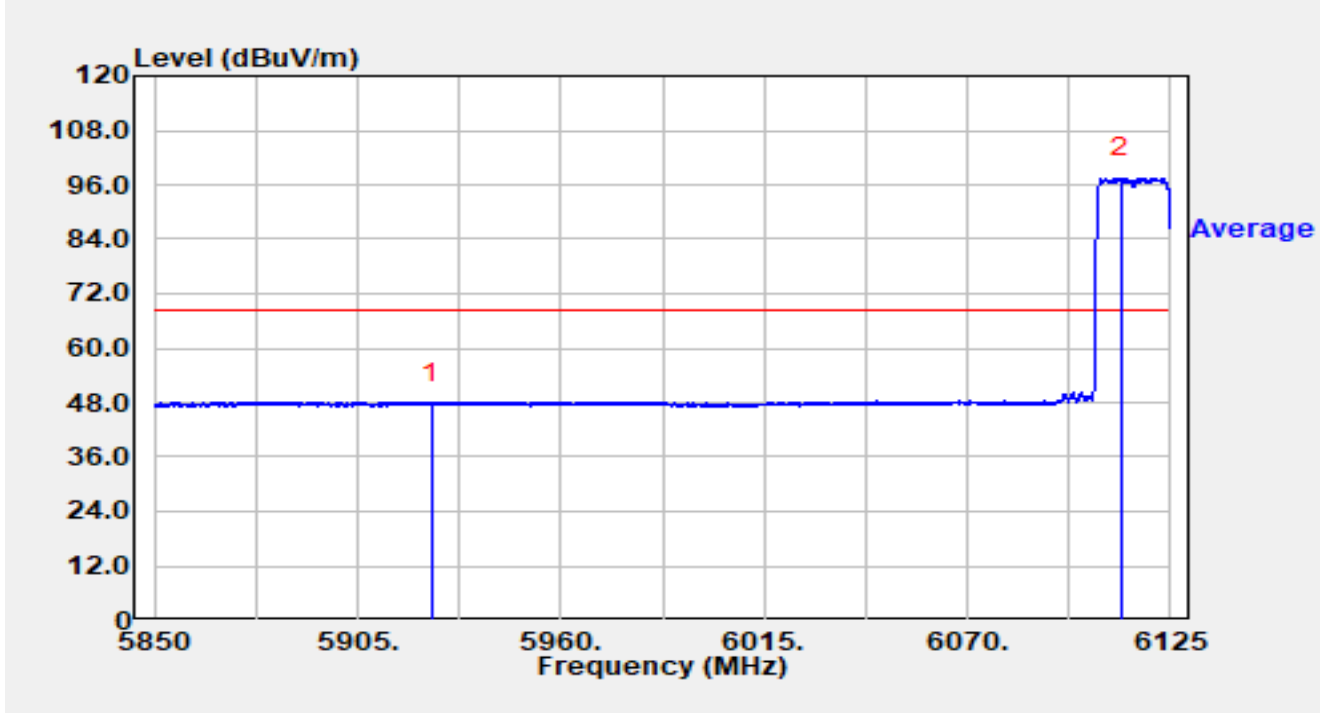


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5925.000        | 30.50          | 17.36      | 47.87                | -20.33      | 68.20          | Average  |
| 2  |      | 6111.498        | 79.38          | 18.16      | 97.55                | N/A         | N/A            | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                               |               |              |
|-------------|-----------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                        | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                       | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                 | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                 | Polarity      | Horizontal   |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT20 at 7095MHz (Nss=3) |               |              |

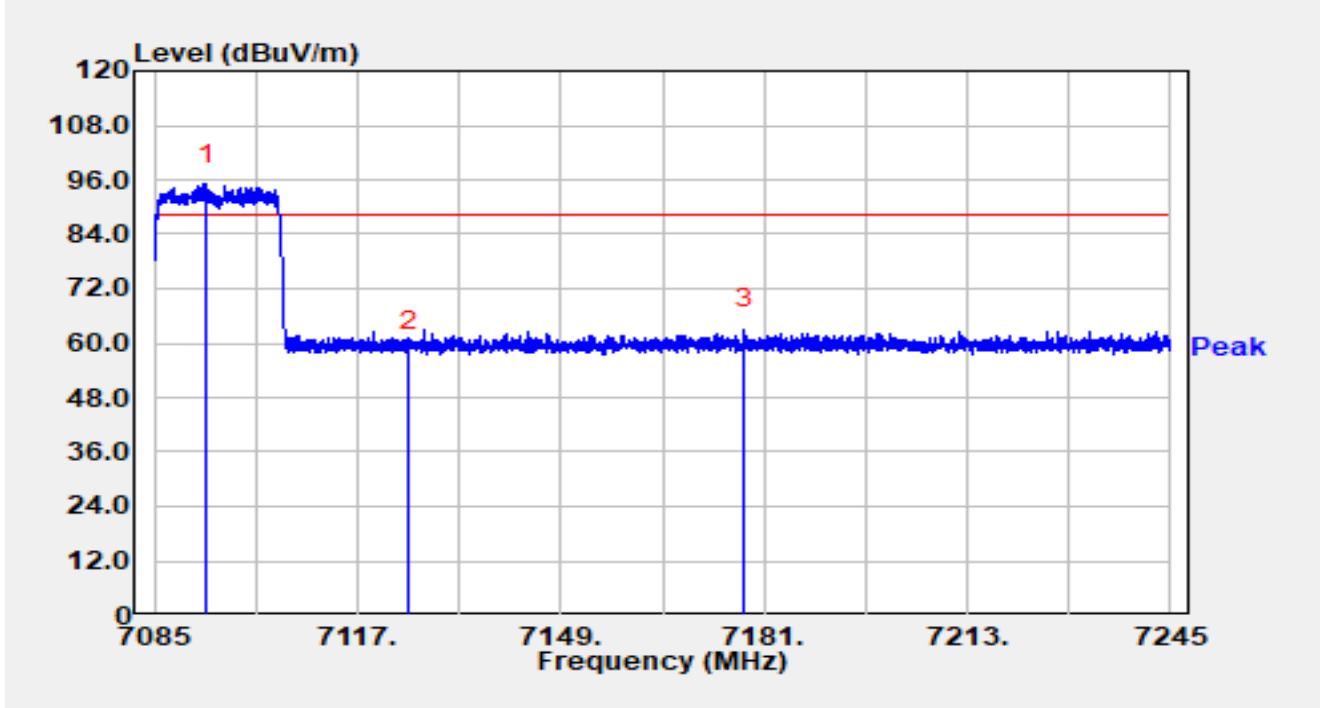


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 7093.256        | 74.54          | 20.50      | 95.04                | N/A         | N/A            | Peak     |
| 2  |      | 7125.000        | 37.93          | 20.42      | 58.35                | -29.85      | 88.20          | Peak     |
| 3  | *    | 7177.960        | 42.32          | 20.72      | 63.04                | -25.16      | 88.20          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                               |               |              |
|-------------|-----------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                        | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                       | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                 | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                 | Polarity      | Horizontal   |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT20 at 7095MHz (Nss=3) |               |              |

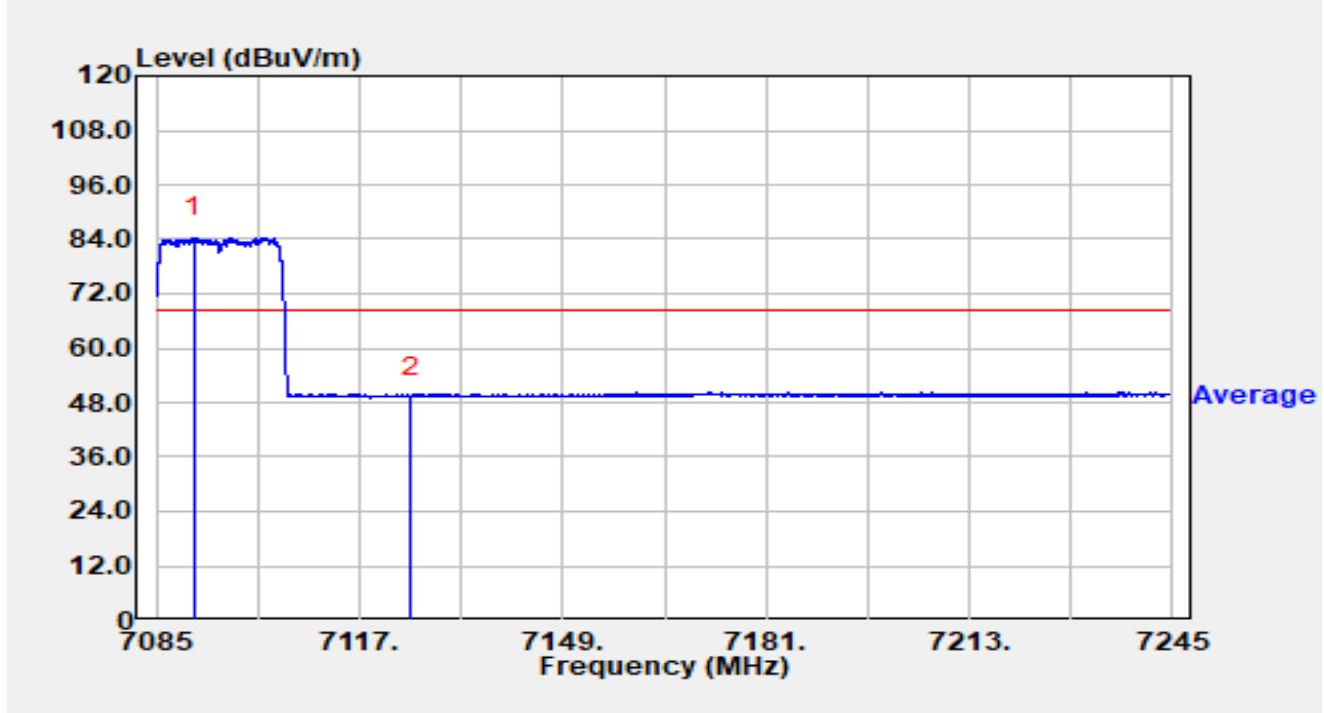


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 7090.984        | 63.93          | 20.50      | 84.42                | N/A         | N/A            | Average  |
| 2  | *    | 7125.000        | 28.92          | 20.42      | 49.35                | -18.85      | 68.20          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                               |               |              |
|-------------|-----------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                        | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                       | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                 | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                 | Polarity      | Vertical     |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT20 at 7095MHz (Nss=3) |               |              |

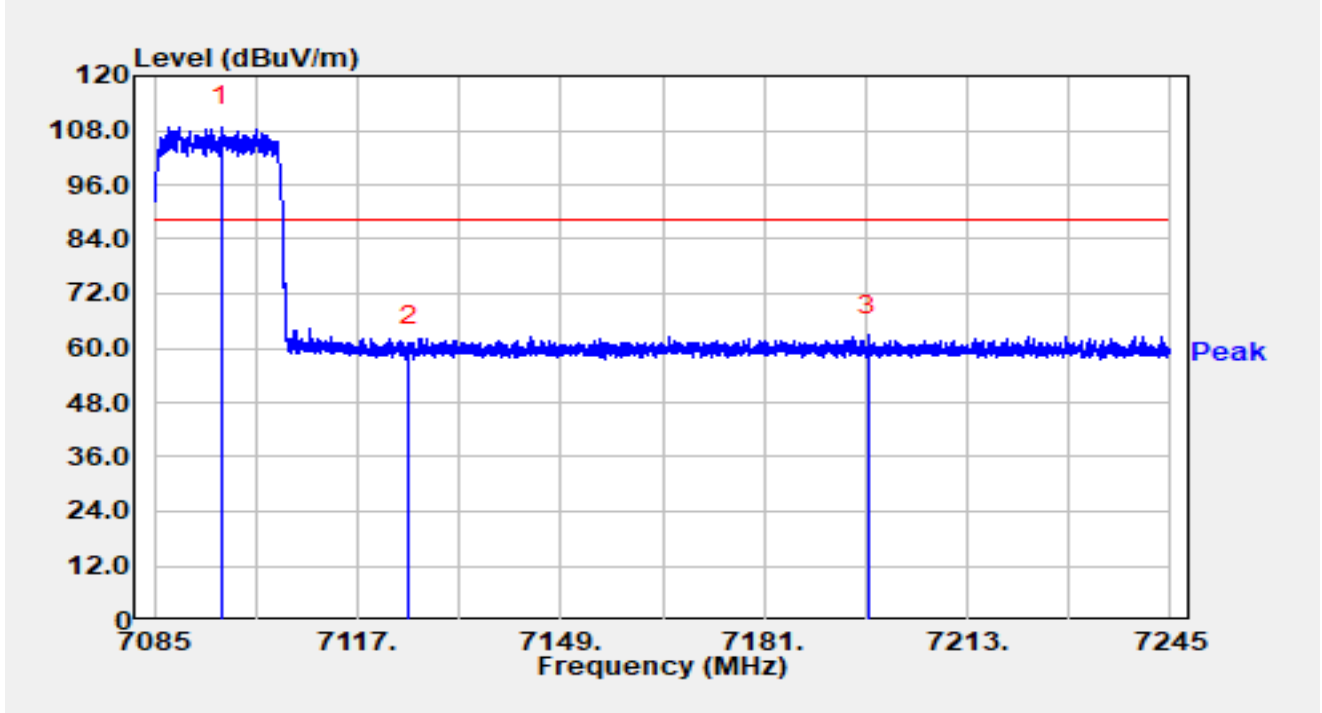


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 7095.464        | 88.24          | 20.50      | 108.73               | N/A         | N/A            | Peak     |
| 2  |      | 7125.000        | 39.85          | 20.42      | 60.27                | -27.93      | 88.20          | Peak     |
| 3  | *    | 7197.448        | 42.27          | 20.65      | 62.92                | -25.28      | 88.20          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                               |               |              |
|-------------|-----------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                        | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                       | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                 | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                 | Polarity      | Vertical     |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT20 at 7095MHz (Nss=3) |               |              |

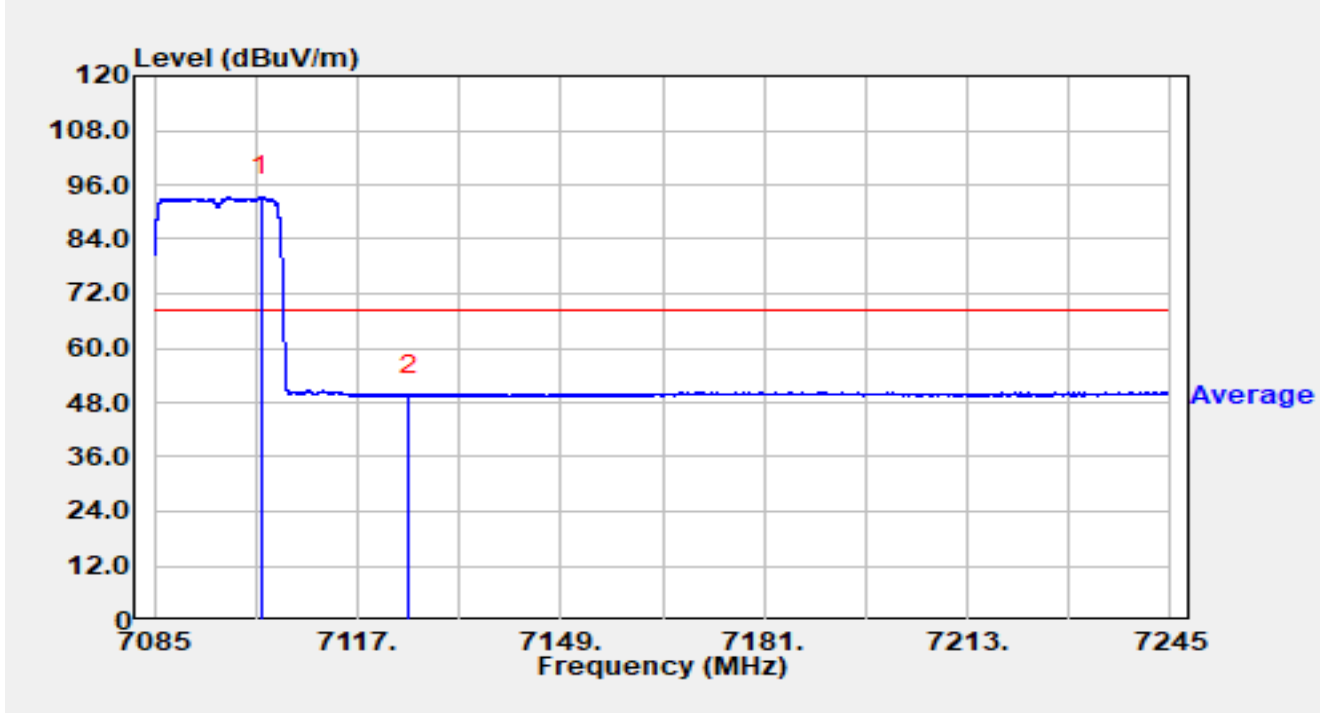


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 7101.848        | 72.86          | 20.49      | 93.36                | N/A         | N/A            | Average  |
| 2  | *    | 7125.000        | 29.27          | 20.42      | 49.69                | -18.51      | 68.20          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                               |               |              |
|-------------|-----------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                        | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                       | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                 | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                 | Polarity      | Horizontal   |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT40 at 6125MHz (Nss=3) |               |              |

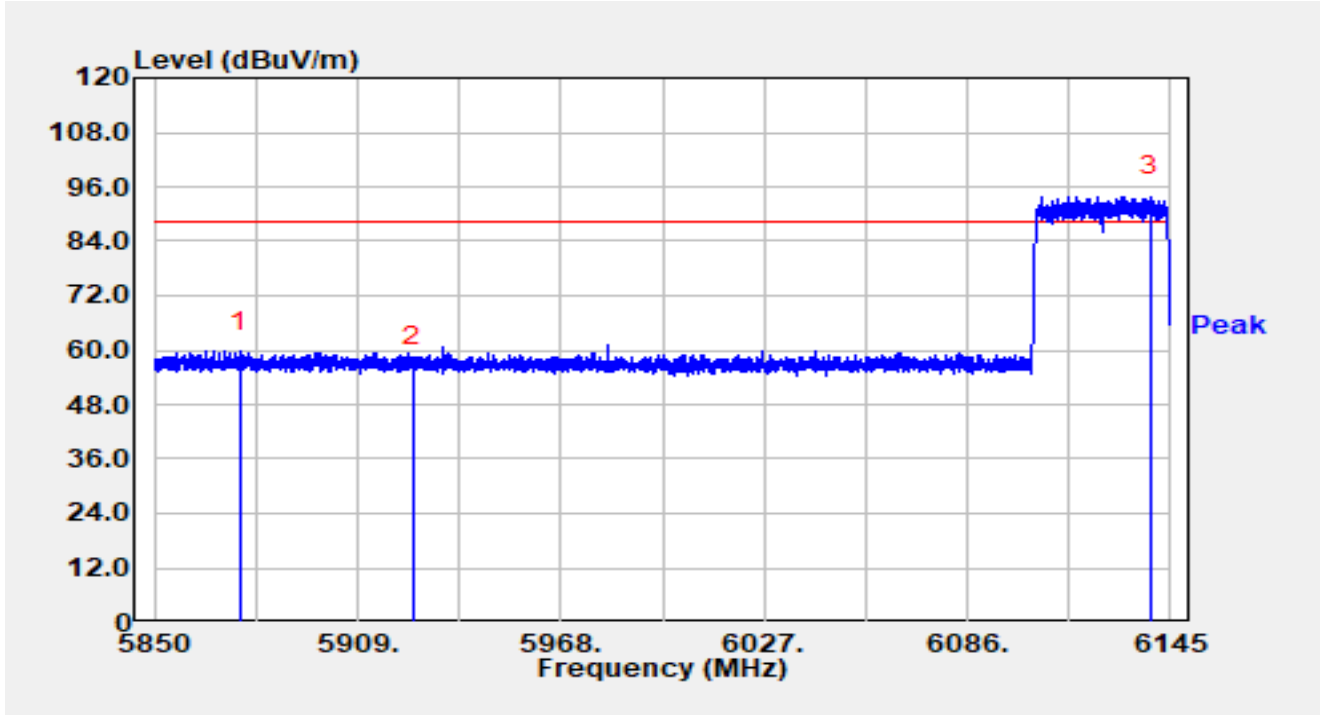


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5874.957        | 42.33          | 17.38      | 59.71                | -28.49      | 88.20          | Peak     |
| 2  |      | 5925.000        | 38.85          | 17.36      | 56.21                | -31.99      | 88.20          | Peak     |
| 3  |      | 6139.307        | 75.46          | 18.43      | 93.89                | N/A         | N/A            | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                               |               |              |
|-------------|-----------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                        | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                       | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                 | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                 | Polarity      | Horizontal   |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT40 at 6125MHz (Nss=3) |               |              |

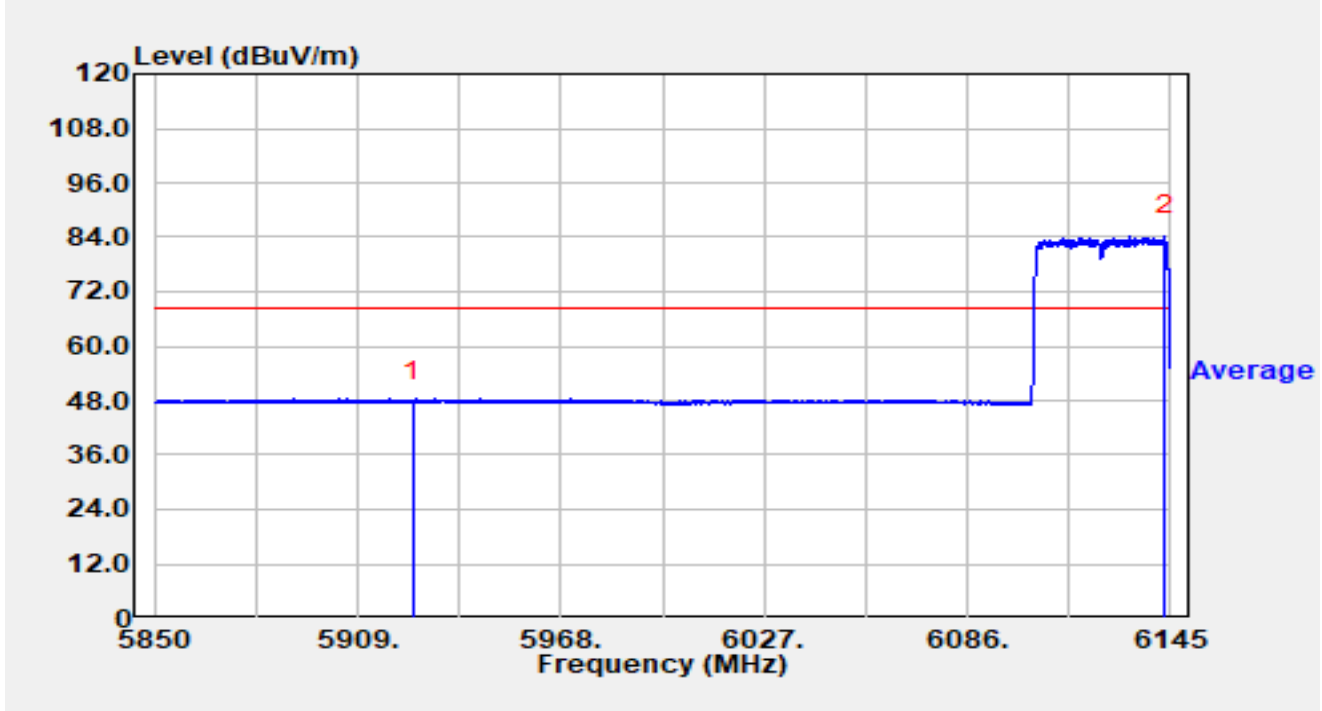


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5925.000        | 30.37          | 17.36      | 47.73                | -20.47      | 68.20          | Average  |
| 2  |      | 6143.437        | 65.83          | 18.45      | 84.28                | N/A         | N/A            | Average  |

Notes:

- "\*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                               |               |              |
|-------------|-----------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                        | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                       | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                 | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                 | Polarity      | Vertical     |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT40 at 6125MHz (Nss=3) |               |              |

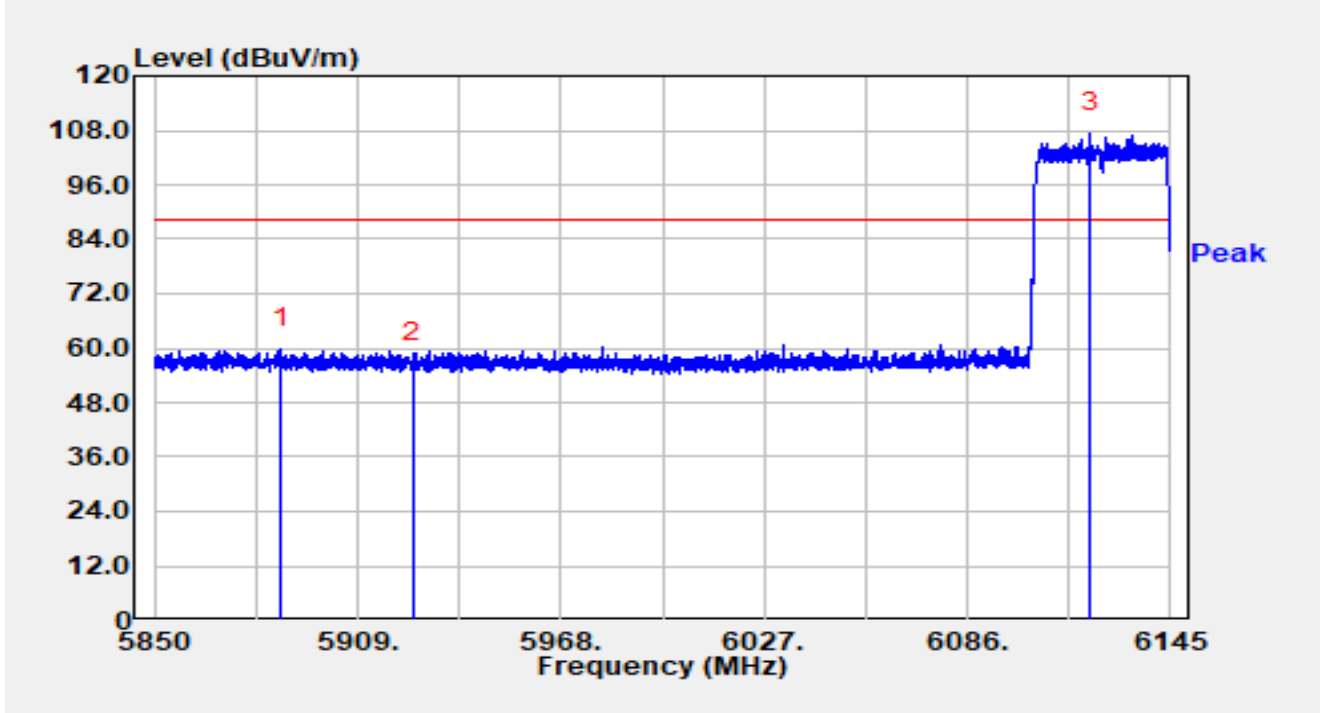


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5886.728        | 42.43          | 17.40      | 59.83                | -28.37      | 88.20          | Peak     |
| 2  |      | 5925.000        | 39.36          | 17.36      | 56.72                | -31.48      | 88.20          | Peak     |
| 3  |      | 6121.636        | 89.18          | 18.31      | 107.49               | N/A         | N/A            | Peak     |

Notes:

- " \* ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                               |               |              |
|-------------|-----------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                        | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                       | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                 | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                 | Polarity      | Vertical     |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT40 at 6125MHz (Nss=3) |               |              |

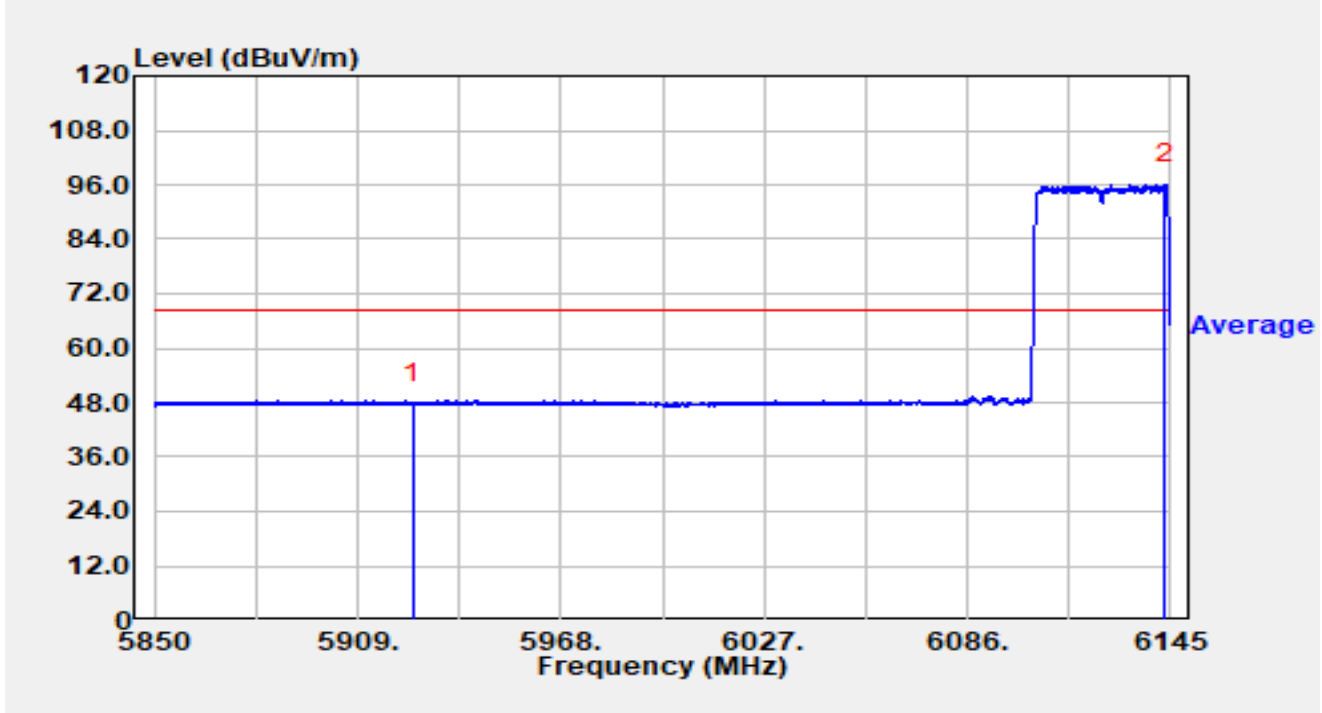


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5925.000        | 30.44          | 17.36      | 47.80                | -20.40      | 68.20          | Average  |
| 2  |      | 6143.466        | 77.77          | 18.45      | 96.22                | N/A         | N/A            | Average  |

Notes:

- "\*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                               |               |              |
|-------------|-----------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                        | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                       | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                 | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                 | Polarity      | Horizontal   |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT40 at 7085MHz (Nss=3) |               |              |

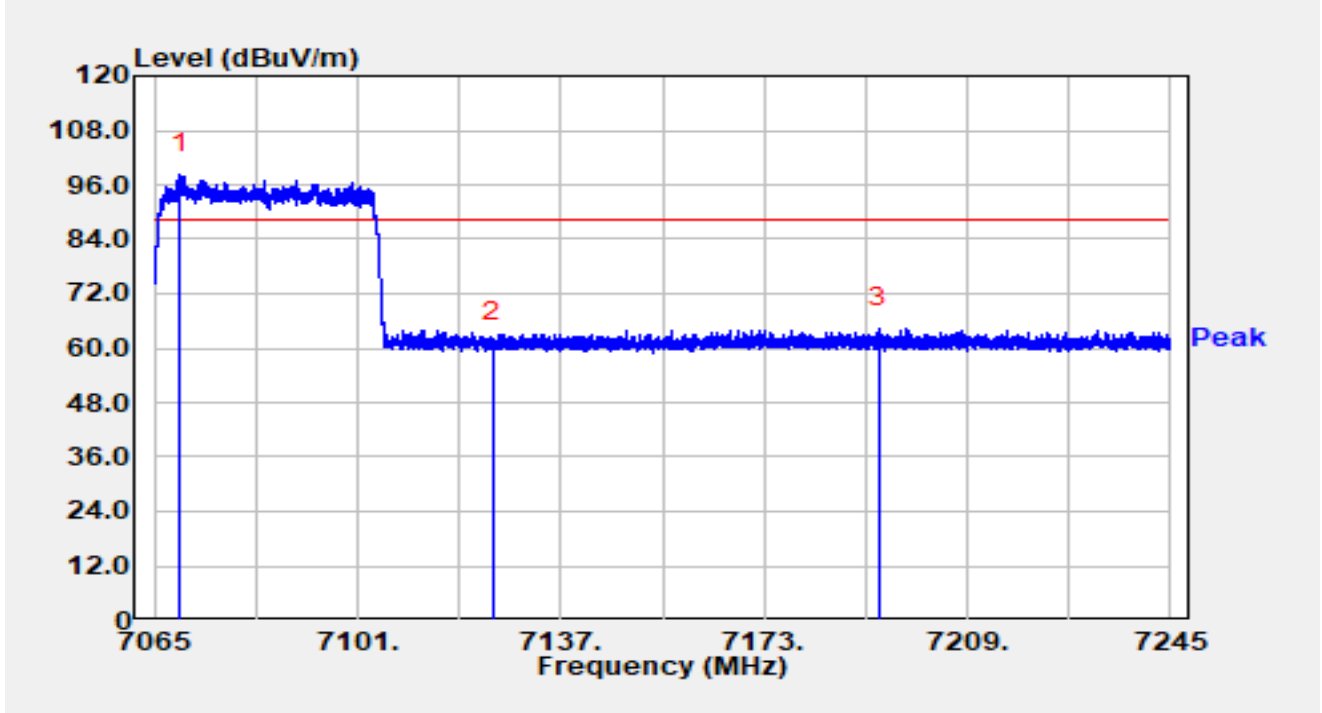


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 7069.482        | 77.96          | 20.33      | 98.28                | N/A         | N/A            | Peak     |
| 2  |      | 7125.000        | 41.06          | 20.42      | 61.49                | -26.71      | 88.20          | Peak     |
| 3  | *    | 7193.250        | 43.84          | 20.67      | 64.51                | -23.69      | 88.20          | Peak     |

Notes:

- " \* ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                               |               |              |
|-------------|-----------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                        | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                       | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                 | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                 | Polarity      | Horizontal   |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT40 at 7085MHz (Nss=3) |               |              |

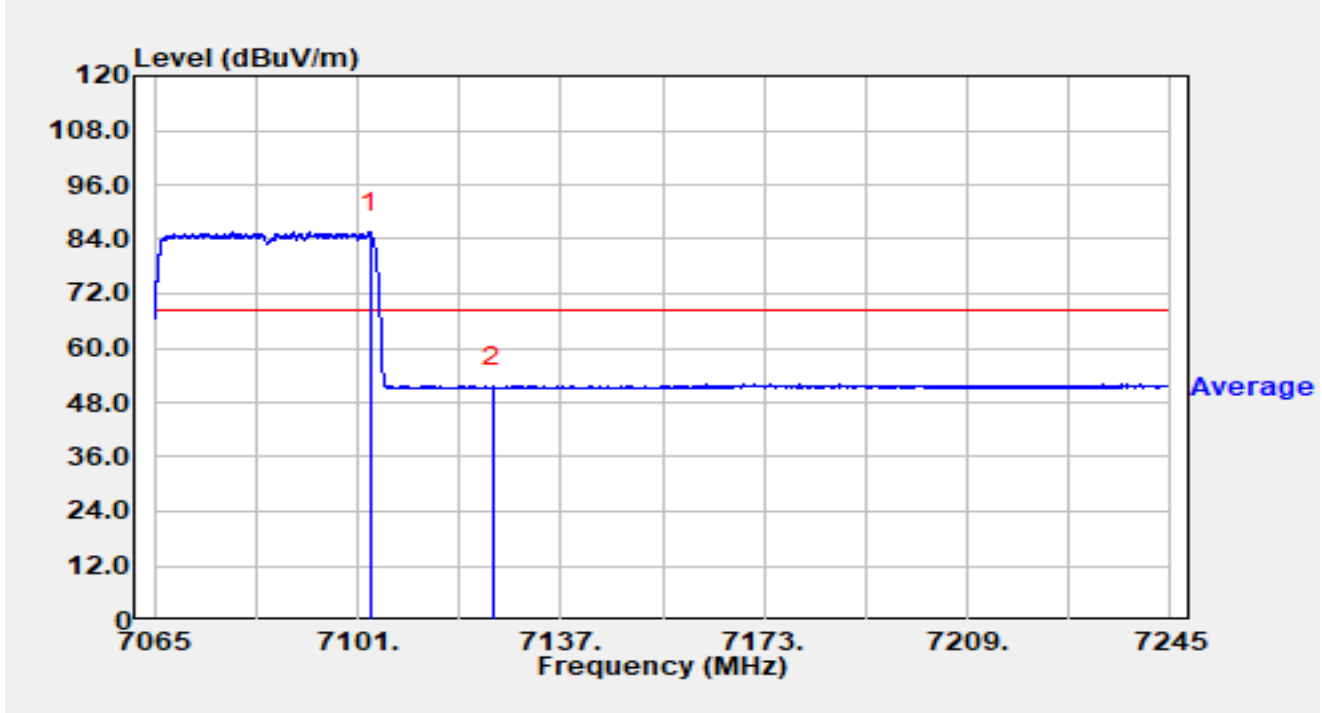


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 7103.214        | 65.06          | 20.49      | 85.55                | N/A         | N/A            | Average  |
| 2  | *    | 7125.000        | 30.87          | 20.42      | 51.29                | -16.91      | 68.20          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                               |               |              |
|-------------|-----------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                        | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                       | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                 | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                 | Polarity      | Vertical     |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT40 at 7085MHz (Nss=3) |               |              |

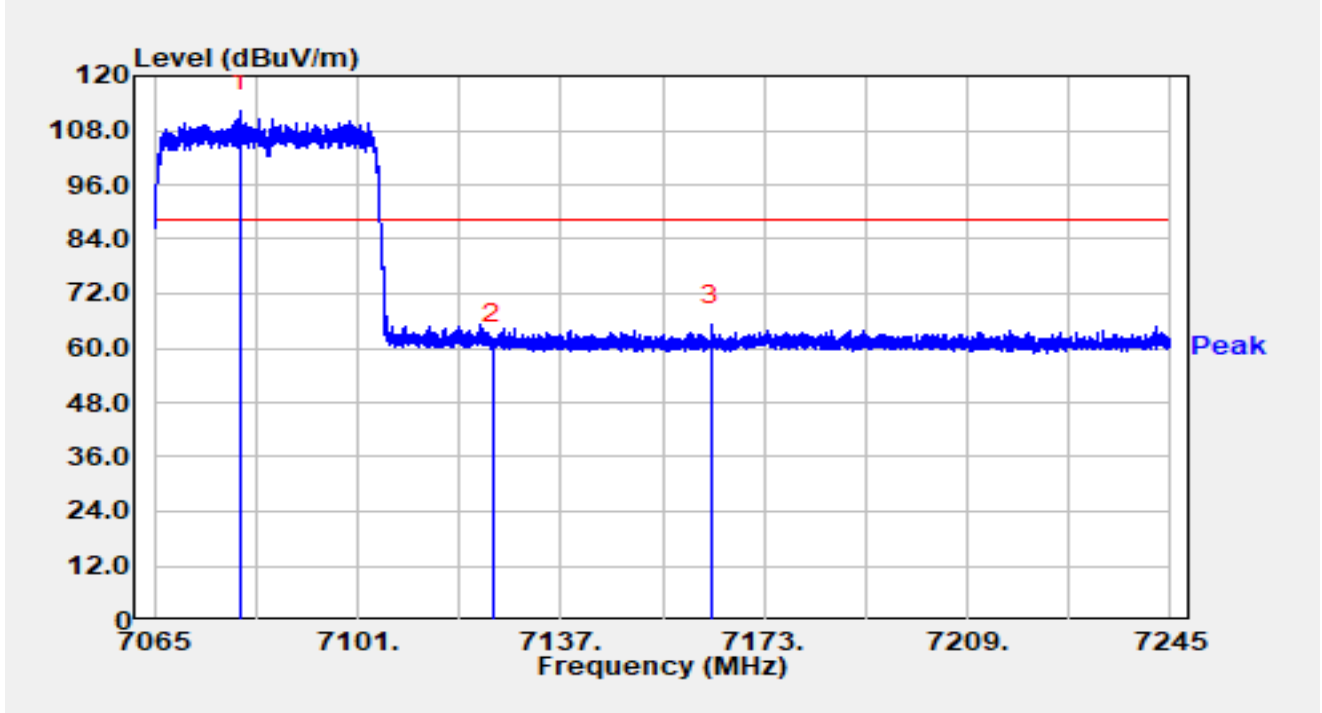


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 7080.102        | 91.66          | 20.43      | 112.10               | N/A         | N/A            | Peak     |
| 2  |      | 7125.000        | 40.67          | 20.42      | 61.09                | -27.11      | 88.20          | Peak     |
| 3  | *    | 7163.640        | 44.39          | 20.60      | 64.99                | -23.21      | 88.20          | Peak     |

Notes:

- " \* ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                               |               |              |
|-------------|-----------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                        | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                       | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                 | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                 | Polarity      | Vertical     |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT40 at 7085MHz (Nss=3) |               |              |

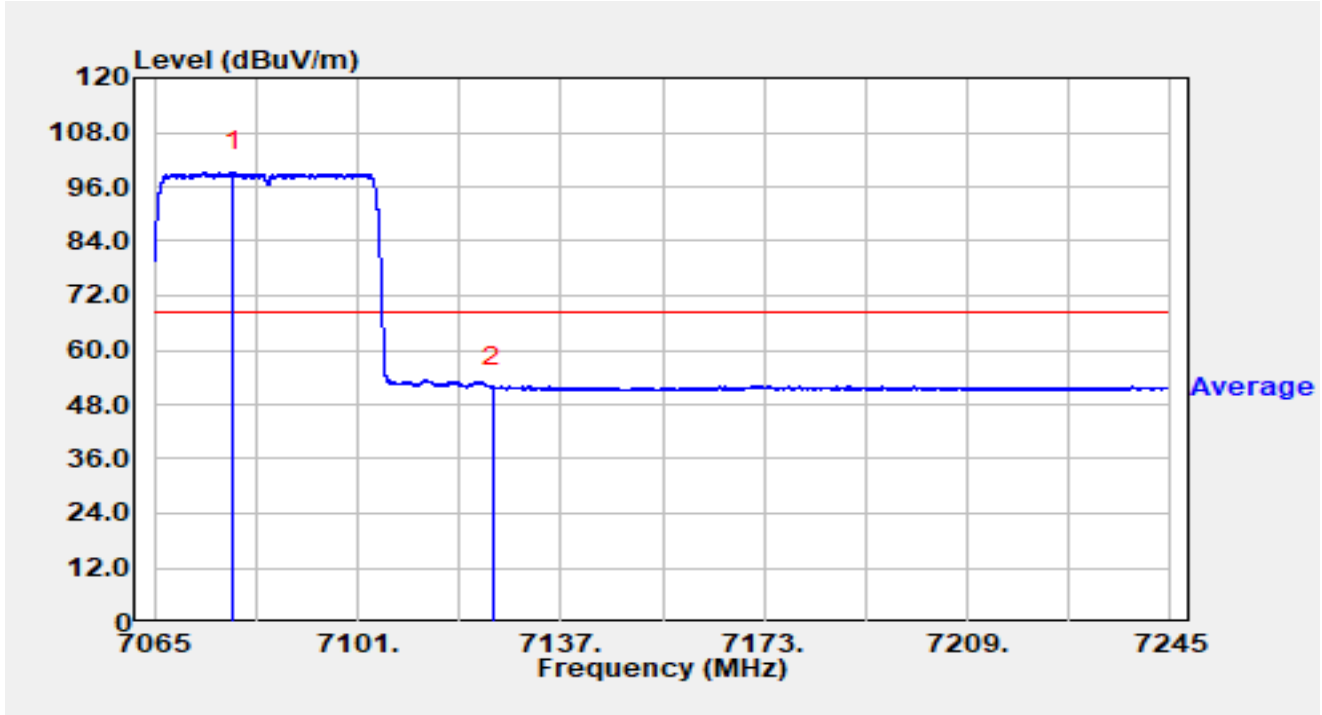


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 7078.896        | 78.90          | 20.42      | 99.32                | N/A         | N/A            | Average  |
| 2  | *    | 7125.000        | 31.35          | 20.42      | 51.78                | -16.42      | 68.20          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                               |               |              |
|-------------|-----------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                        | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                       | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                 | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                 | Polarity      | Horizontal   |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT80 at 6145MHz (Nss=3) |               |              |

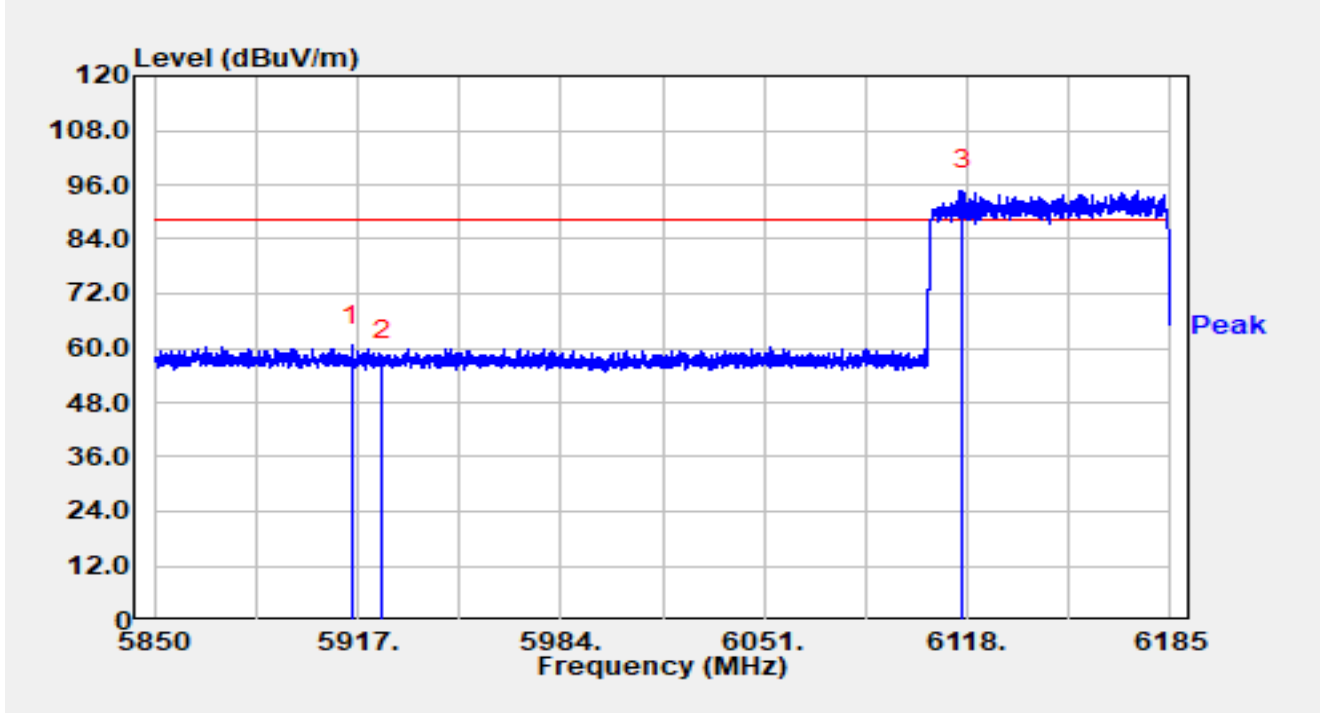


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5915.124        | 43.19          | 17.35      | 60.54                | -27.66      | 88.20          | Peak     |
| 2  |      | 5925.000        | 39.81          | 17.36      | 57.18                | -31.02      | 88.20          | Peak     |
| 3  |      | 6116.325        | 76.39          | 18.25      | 94.64                | N/A         | N/A            | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                               |               |              |
|-------------|-----------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                        | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                       | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                 | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                 | Polarity      | Horizontal   |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT80 at 6145MHz (Nss=3) |               |              |

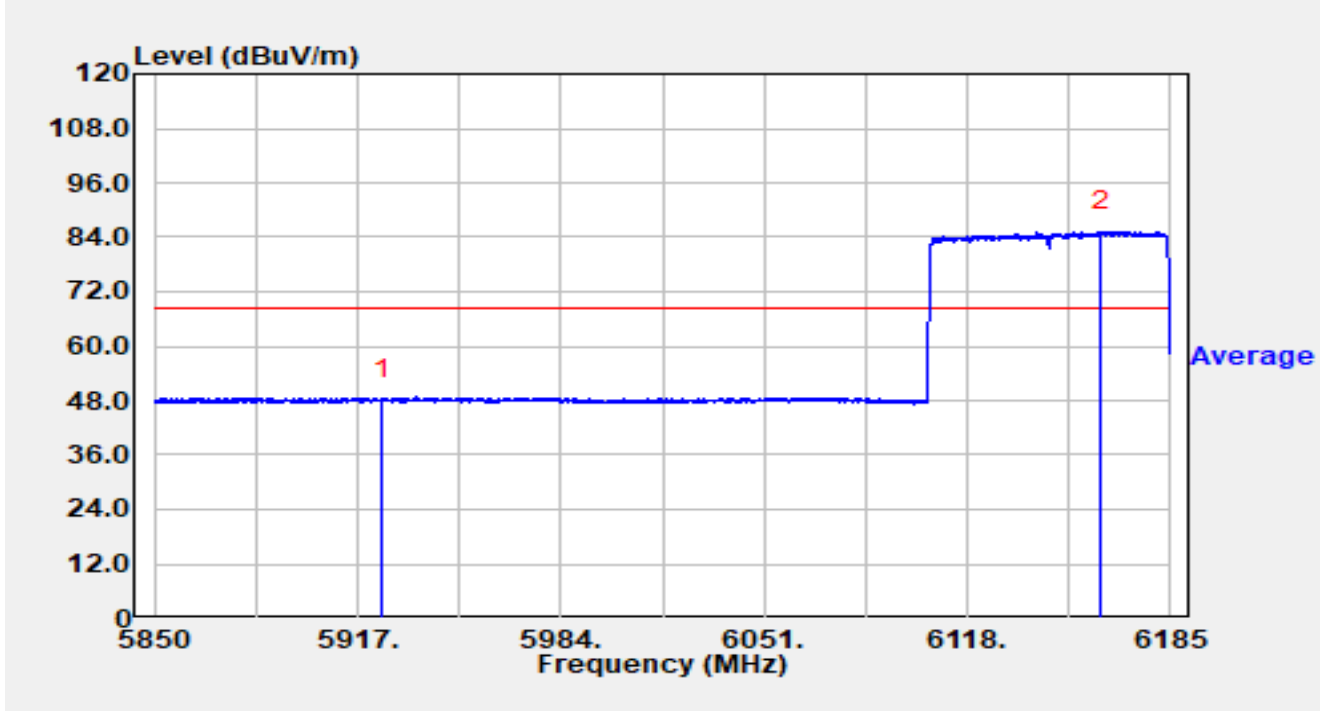


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5925.000        | 30.67          | 17.36      | 48.03                | -20.17      | 68.20          | Average  |
| 2  |      | 6162.187        | 66.62          | 18.57      | 85.19                | N/A         | N/A            | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                               |               |              |
|-------------|-----------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                        | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                       | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                 | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                 | Polarity      | Vertical     |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT80 at 6145MHz (Nss=3) |               |              |

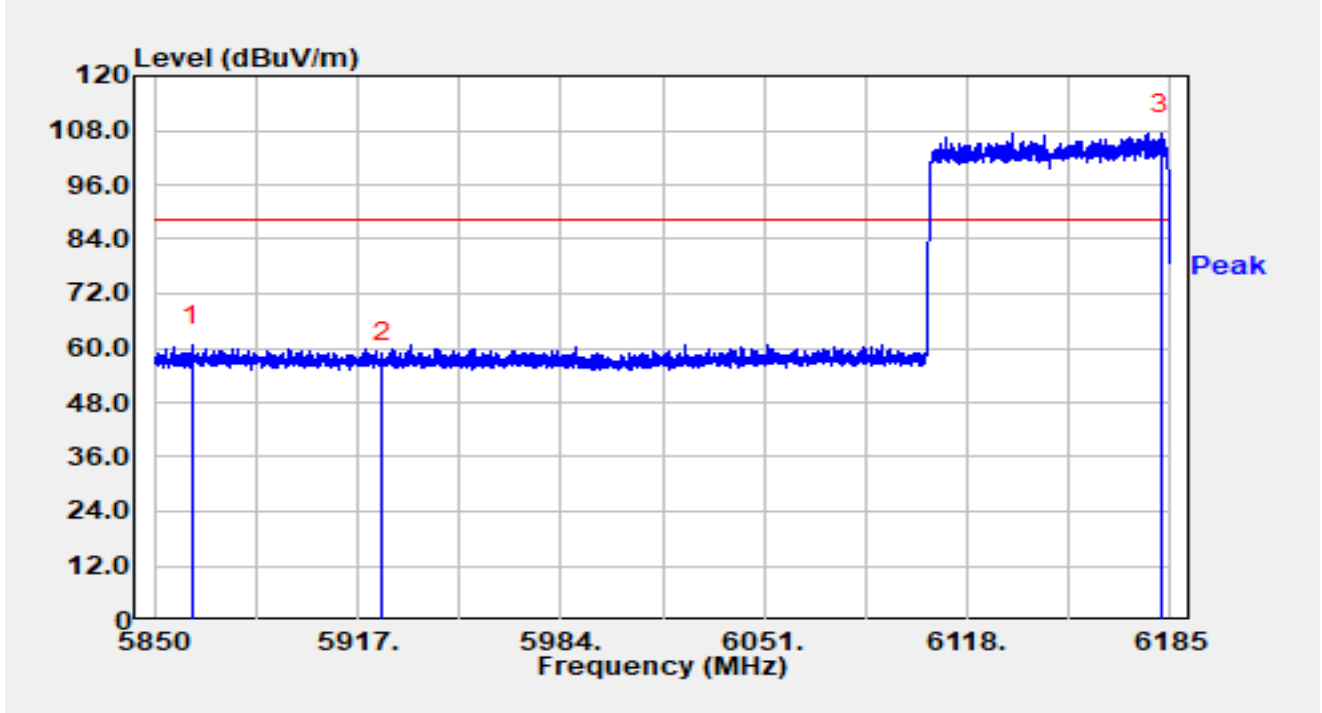


| No | Mark | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5862.294        | 43.16          | 17.33      | 60.49                | -27.71      | 88.20          | Peak     |
| 2  |      | 5925.000        | 39.58          | 17.36      | 56.94                | -31.26      | 88.20          | Peak     |
| 3  |      | 6181.918        | 88.69          | 18.52      | 107.20               | N/A         | N/A            | Peak     |

Notes:

- " \* ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

|             |                                               |               |              |
|-------------|-----------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                        | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                       | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                 | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                 | Polarity      | Vertical     |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT80 at 6145MHz (Nss=3) |               |              |

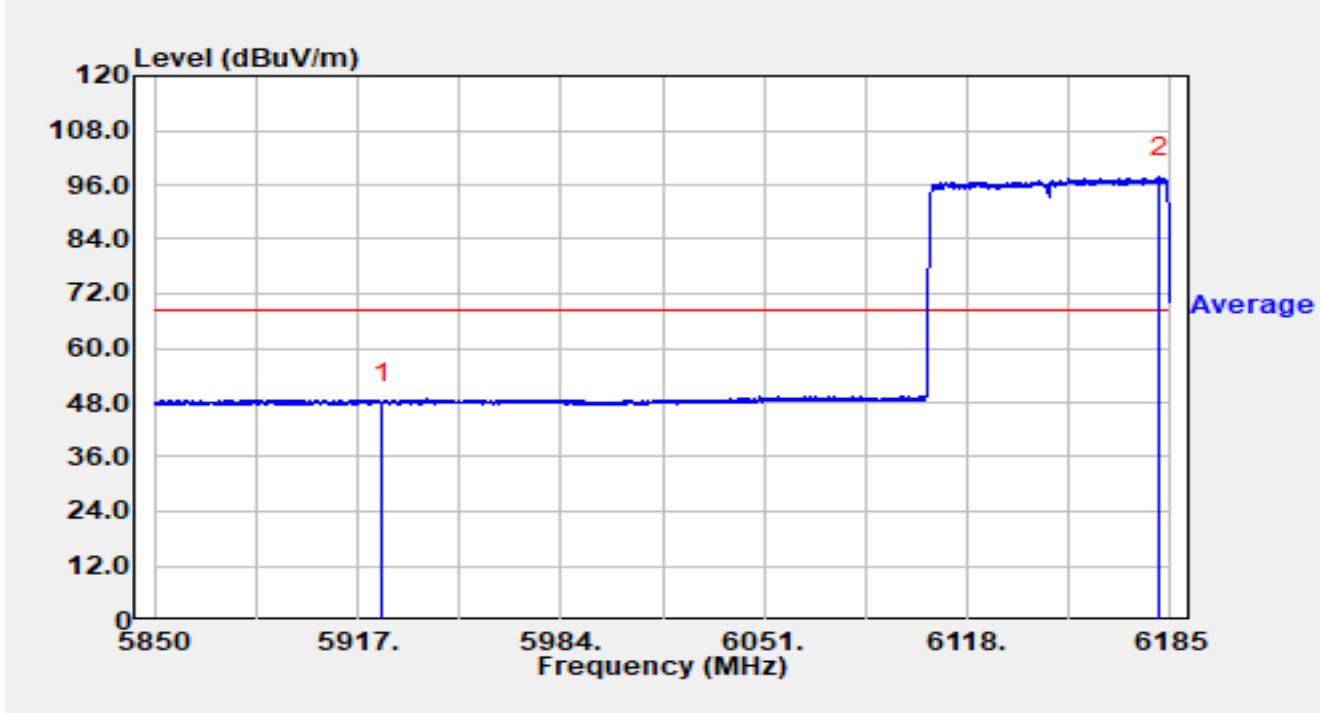


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5925.000        | 30.50          | 17.36      | 47.86                | -20.34      | 68.20          | Average  |
| 2  |      | 6181.583        | 79.11          | 18.52      | 97.62                | N/A         | N/A            | Average  |

Notes:

- "\*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                               |               |              |
|-------------|-----------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                        | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                       | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                 | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                 | Polarity      | Horizontal   |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT80 at 7025MHz (Nss=3) |               |              |

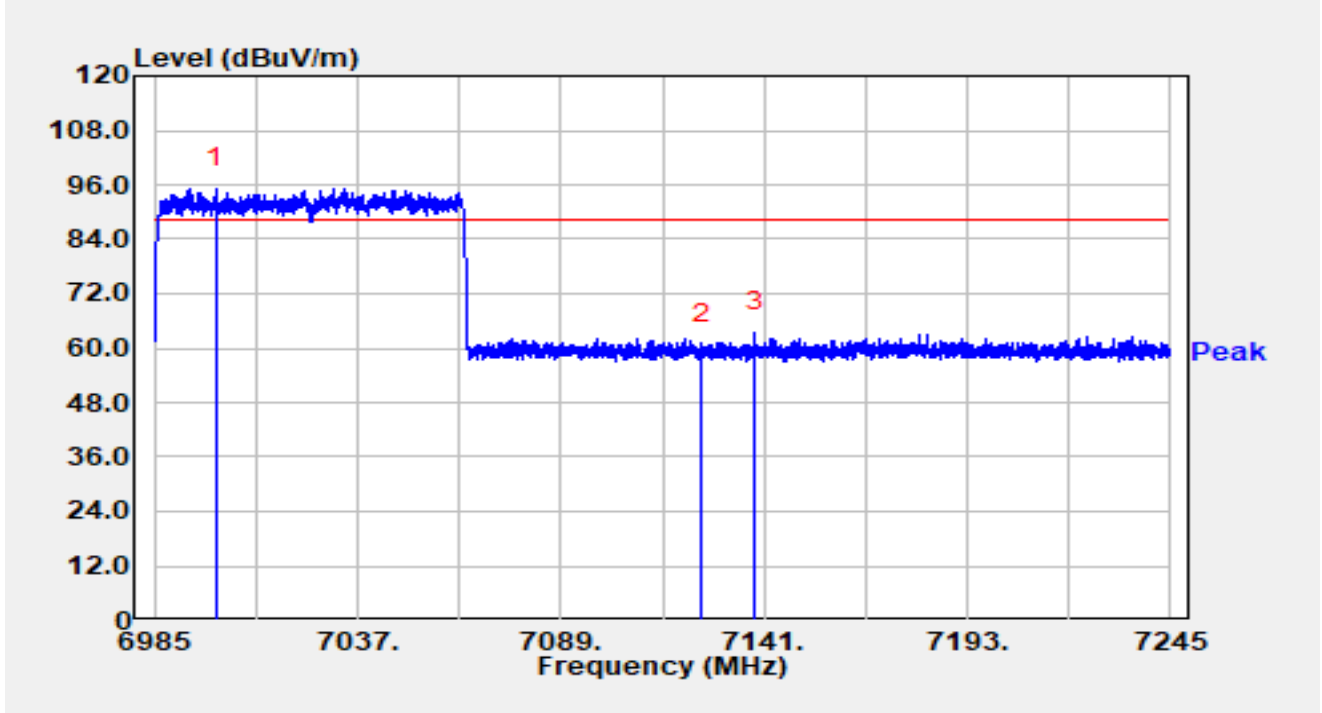


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 7000.704        | 75.02          | 20.26      | 95.28                | N/A         | N/A            | Peak     |
| 2  |      | 7125.000        | 40.34          | 20.42      | 60.77                | -27.43      | 88.20          | Peak     |
| 3  | *    | 7138.634        | 43.10          | 20.42      | 63.52                | -24.68      | 88.20          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                               |               |              |
|-------------|-----------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                        | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                       | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                 | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                 | Polarity      | Horizontal   |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT80 at 7025MHz (Nss=3) |               |              |

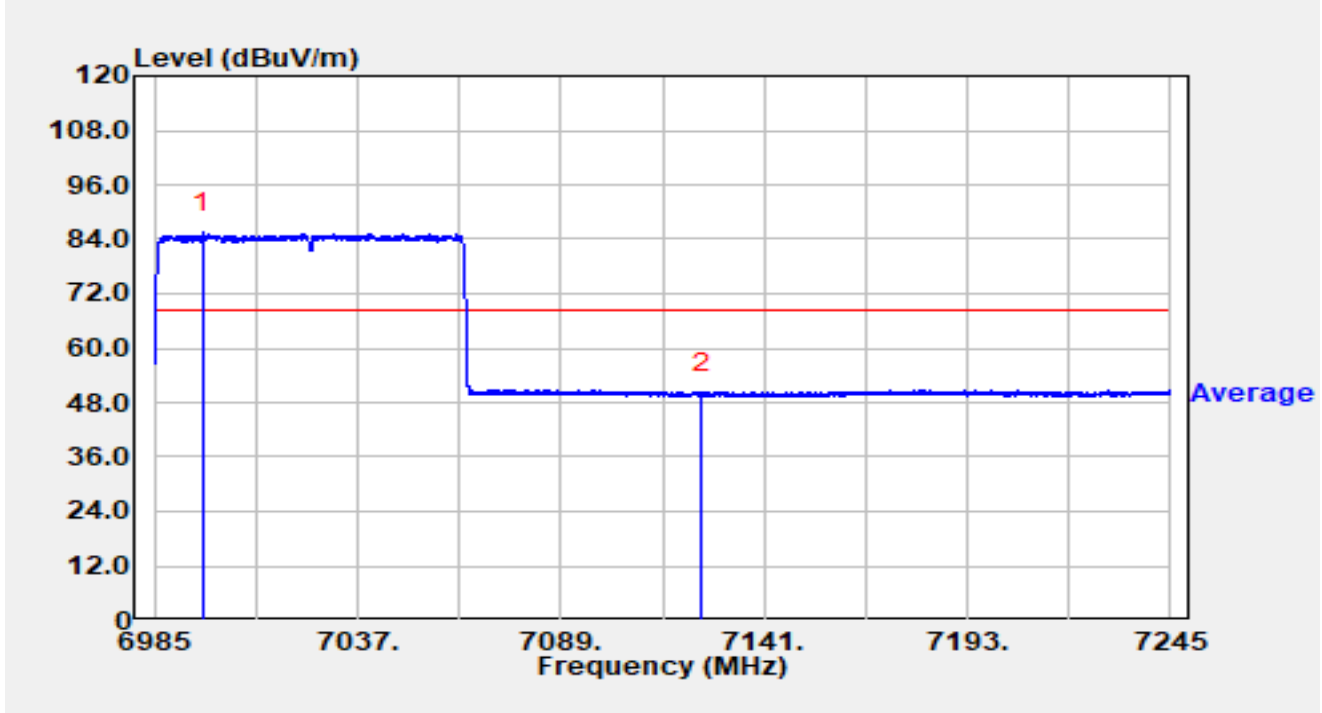


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 6997.376        | 65.24          | 20.27      | 85.51                | N/A         | N/A            | Average  |
| 2  | *    | 7125.000        | 29.46          | 20.42      | 49.88                | -18.32      | 68.20          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                               |               |              |
|-------------|-----------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                        | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                       | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                 | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                 | Polarity      | Vertical     |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT80 at 7025MHz (Nss=3) |               |              |

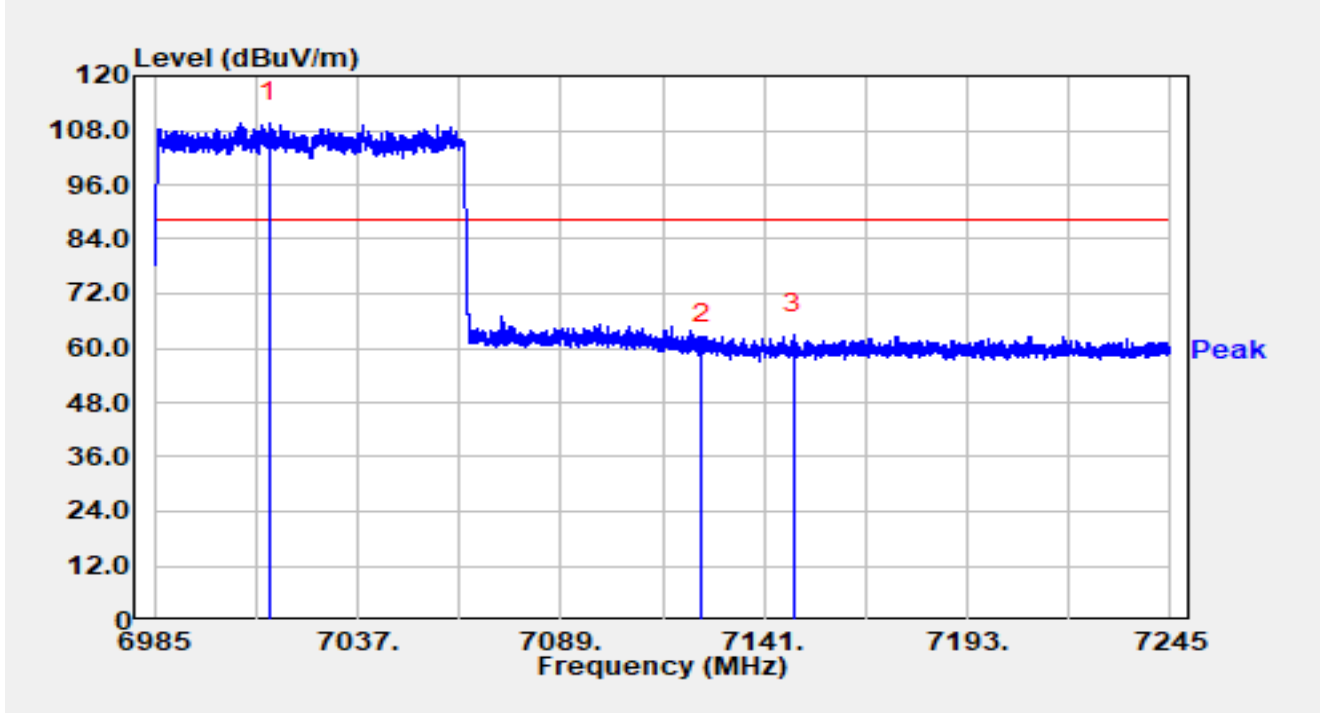


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 7014.354        | 89.22          | 20.37      | 109.59               | N/A         | N/A            | Peak     |
| 2  |      | 7125.000        | 40.65          | 20.42      | 61.08                | -27.12      | 88.20          | Peak     |
| 3  | *    | 7148.566        | 42.66          | 20.37      | 63.03                | -25.17      | 88.20          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                               |               |              |
|-------------|-----------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                        | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                       | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                 | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                 | Polarity      | Vertical     |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT80 at 7025MHz (Nss=3) |               |              |

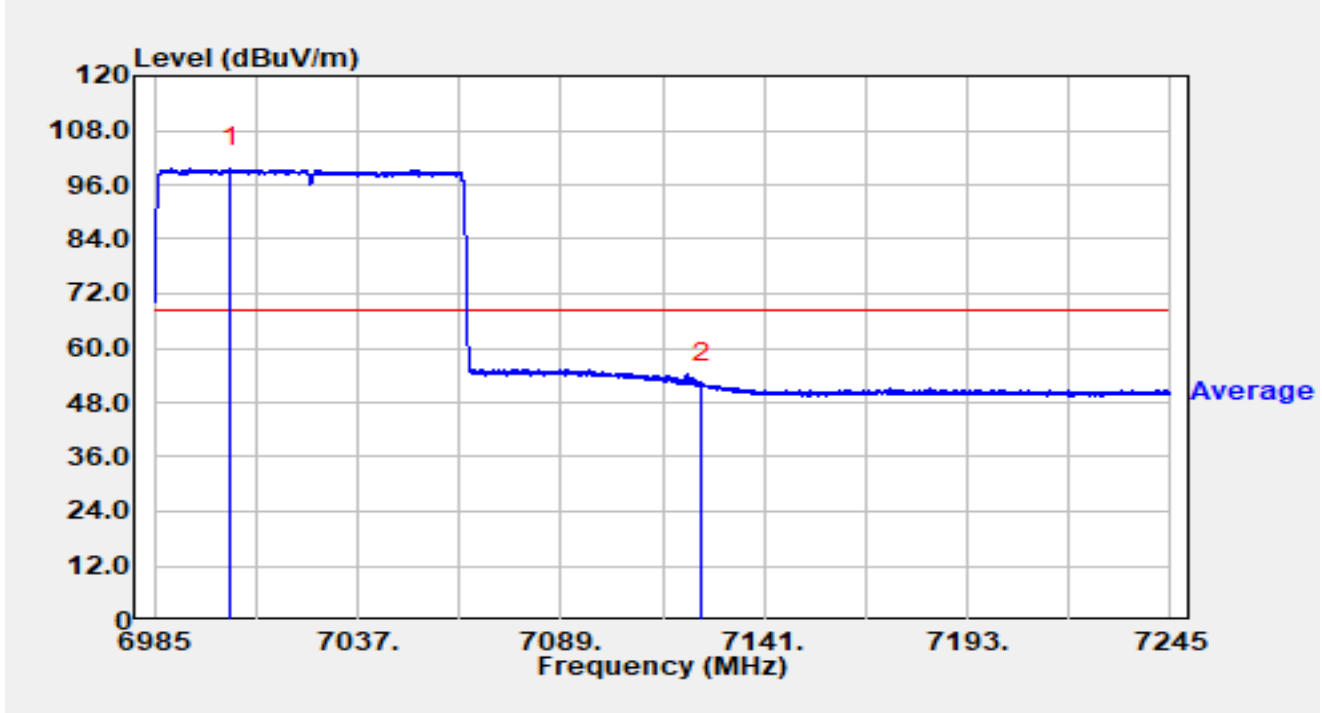


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 7004.396        | 79.55          | 20.29      | 99.84                | N/A         | N/A            | Average  |
| 2  | *    | 7125.000        | 31.80          | 20.42      | 52.22                | -15.98      | 68.20          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                |               |              |
|-------------|------------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                         | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                        | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                  | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                  | Polarity      | Horizontal   |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System         | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT160 at 6185MHz (Nss=3) |               |              |

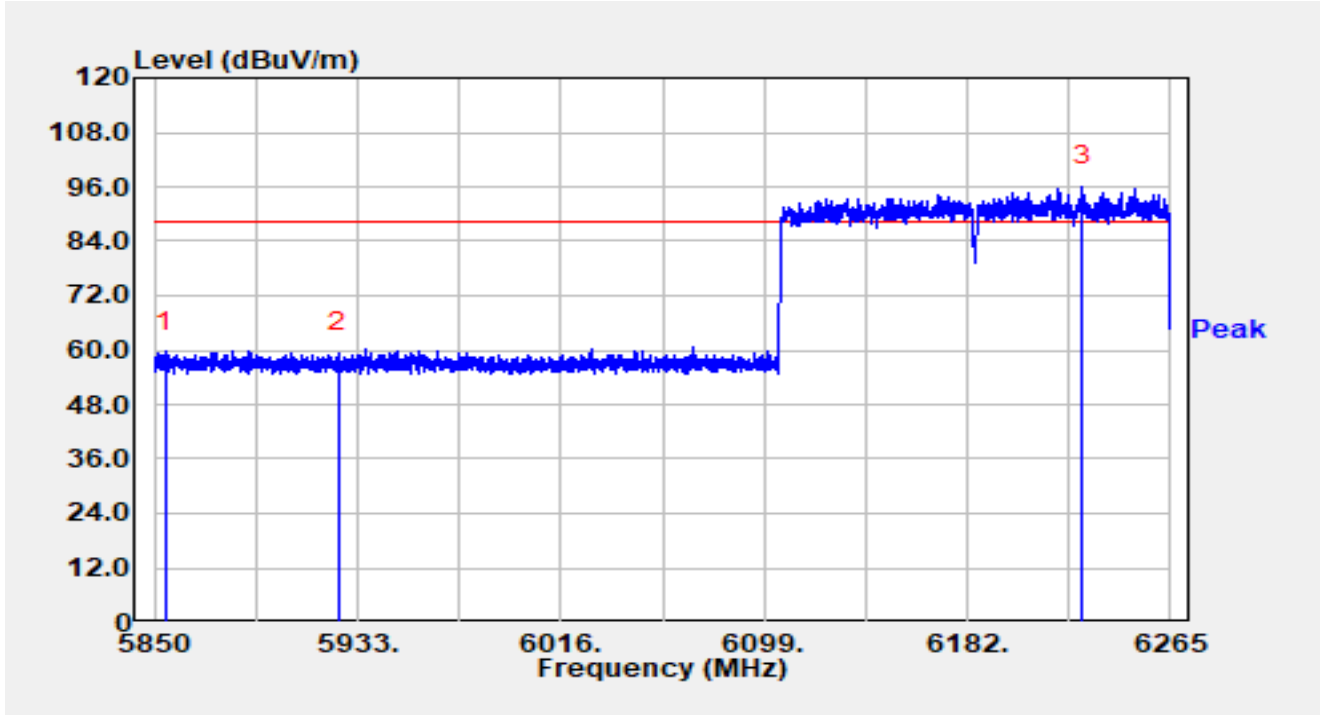


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5854.399        | 42.31          | 17.32      | 59.63                | -28.57      | 88.20          | Peak     |
| 2  |      | 5925.000        | 41.98          | 17.36      | 59.35                | -28.85      | 88.20          | Peak     |
| 3  |      | 6228.771        | 77.27          | 18.74      | 96.01                | N/A         | N/A            | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                |               |              |
|-------------|------------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                         | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                        | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                  | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                  | Polarity      | Horizontal   |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System         | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT160 at 6185MHz (Nss=3) |               |              |

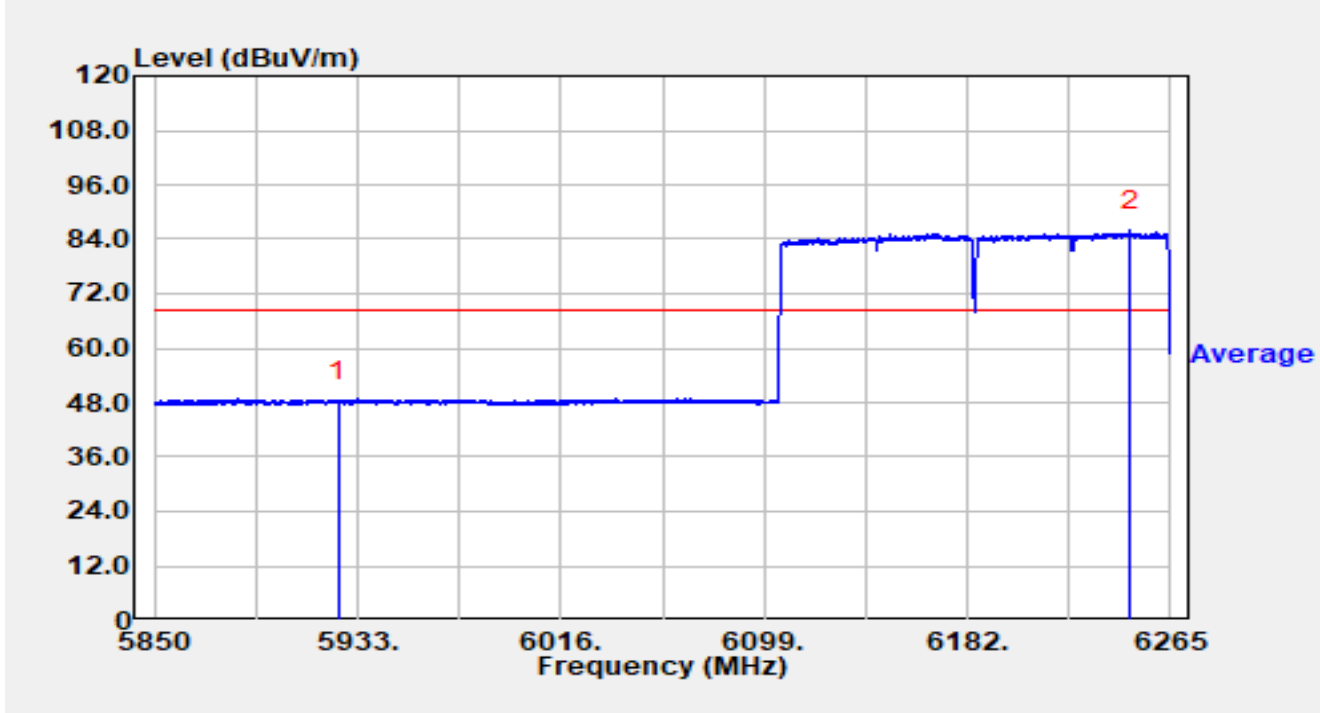


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5925.000        | 30.80          | 17.36      | 48.16                | -20.04      | 68.20          | Average  |
| 2  |      | 6248.732        | 67.12          | 18.81      | 85.92                | N/A         | N/A            | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                |               |              |
|-------------|------------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                         | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                        | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                  | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                  | Polarity      | Vertical     |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System         | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT160 at 6185MHz (Nss=3) |               |              |

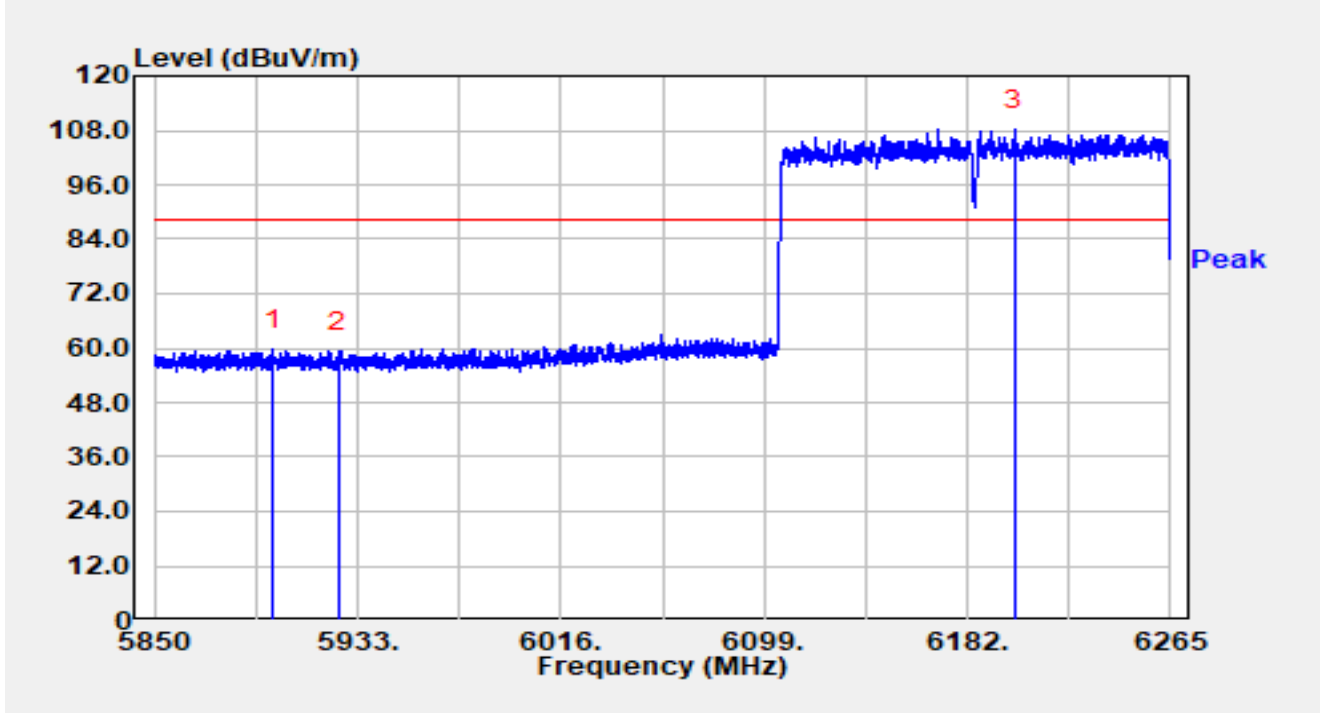


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5898.265        | 42.40          | 17.37      | 59.77                | -28.43      | 88.20          | Peak     |
| 2  |      | 5925.000        | 41.55          | 17.36      | 58.91                | -29.29      | 88.20          | Peak     |
| 3  |      | 6201.297        | 89.67          | 18.55      | 108.22               | N/A         | N/A            | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                |               |              |
|-------------|------------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                         | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                        | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                  | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                  | Polarity      | Vertical     |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System         | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT160 at 6185MHz (Nss=3) |               |              |

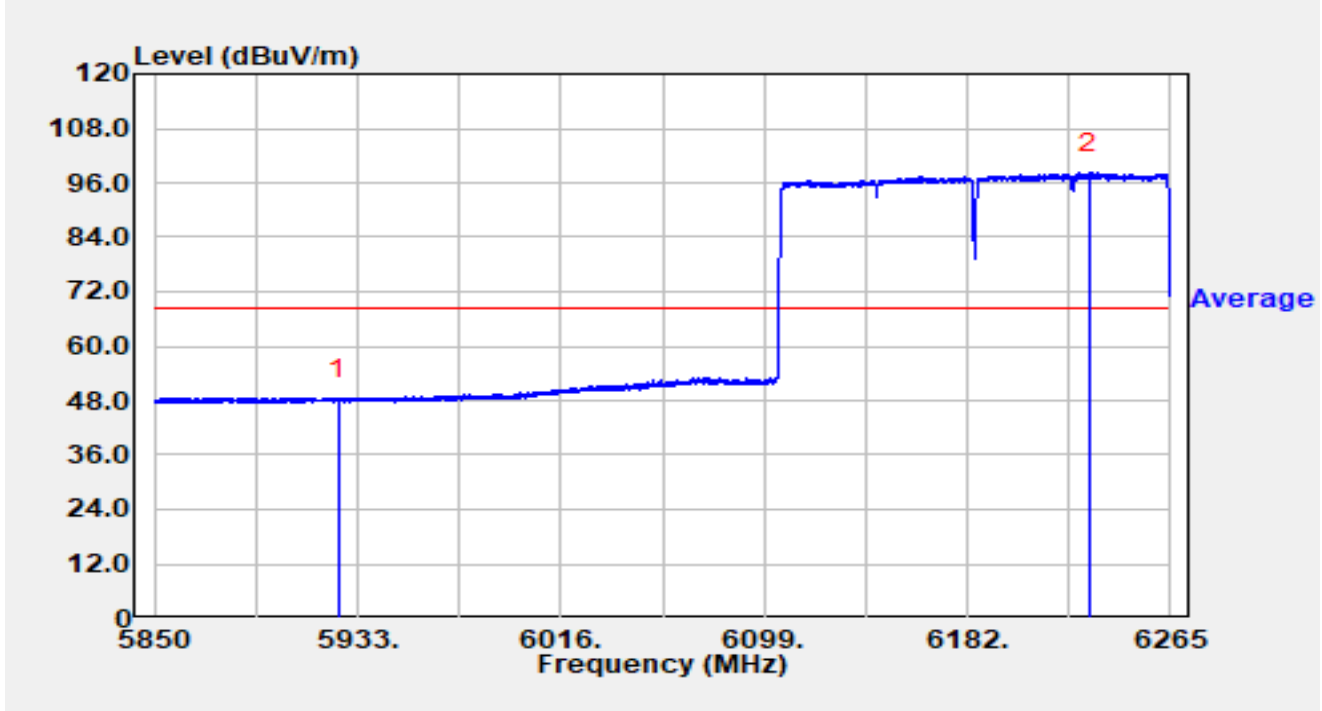


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5925.000        | 30.72          | 17.36      | 48.08                | -20.12      | 68.20          | Average  |
| 2  |      | 6231.675        | 79.40          | 18.75      | 98.16                | N/A         | N/A            | Average  |

Notes:

- "\*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                |               |              |
|-------------|------------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                         | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                        | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                  | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                  | Polarity      | Horizontal   |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System         | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT160 at 6985MHz (Nss=3) |               |              |

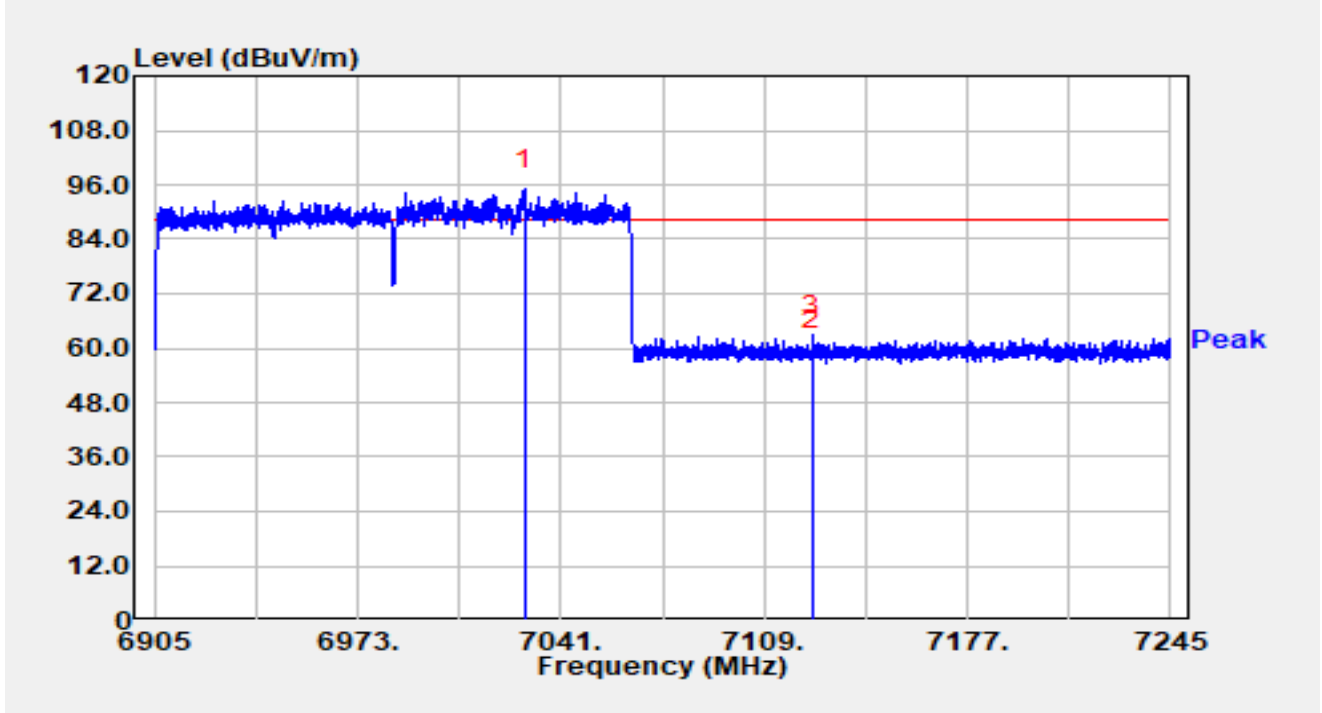


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 7028.828        | 74.73          | 20.27      | 95.00                | N/A         | N/A            | Peak     |
| 2  |      | 7125.000        | 38.95          | 20.42      | 59.37                | -28.83      | 88.20          | Peak     |
| 3  | *    | 7125.218        | 42.49          | 20.43      | 62.91                | -25.29      | 88.20          | Peak     |

Notes:

- " \* ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                |               |              |
|-------------|------------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                         | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                        | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                  | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                  | Polarity      | Horizontal   |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System         | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT160 at 6985MHz (Nss=3) |               |              |

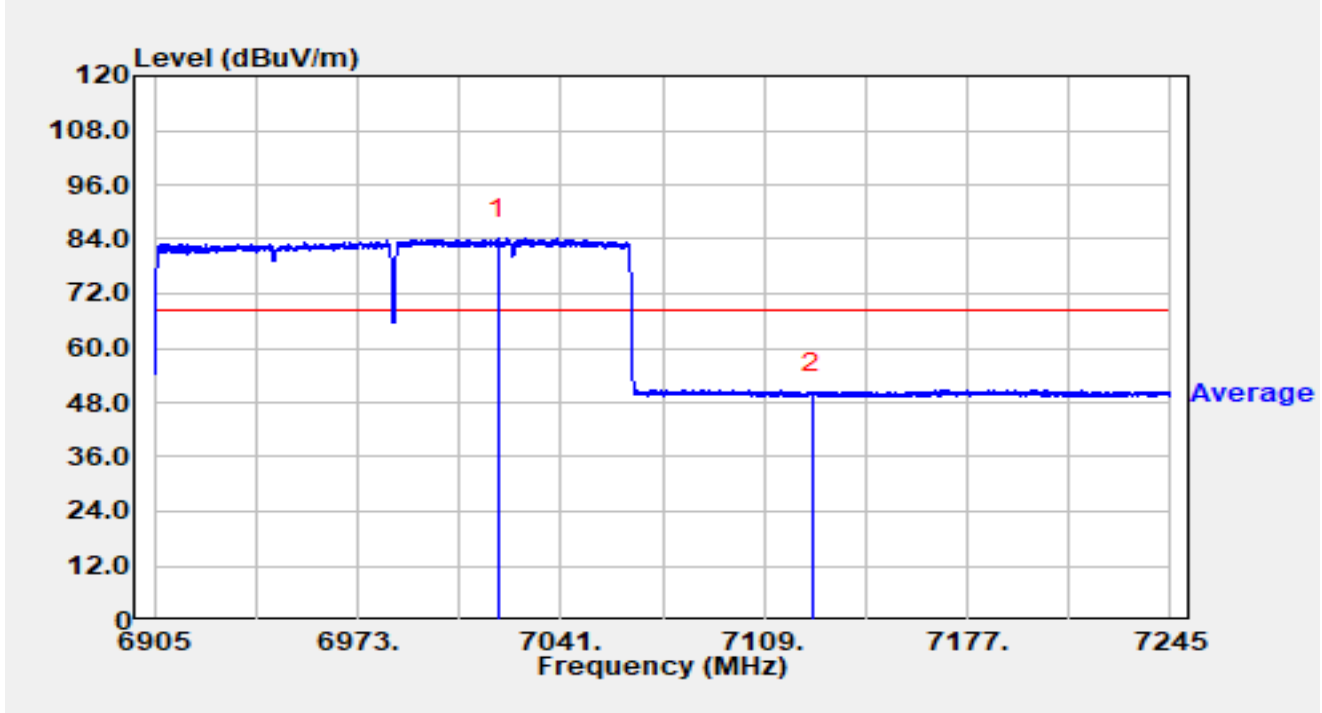


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 7019.920        | 63.77          | 20.37      | 84.14                | N/A         | N/A            | Average  |
| 2  | *    | 7125.000        | 29.80          | 20.42      | 50.22                | -17.98      | 68.20          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                |               |              |
|-------------|------------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                         | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                        | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                  | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                  | Polarity      | Vertical     |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System         | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT160 at 6985MHz (Nss=3) |               |              |

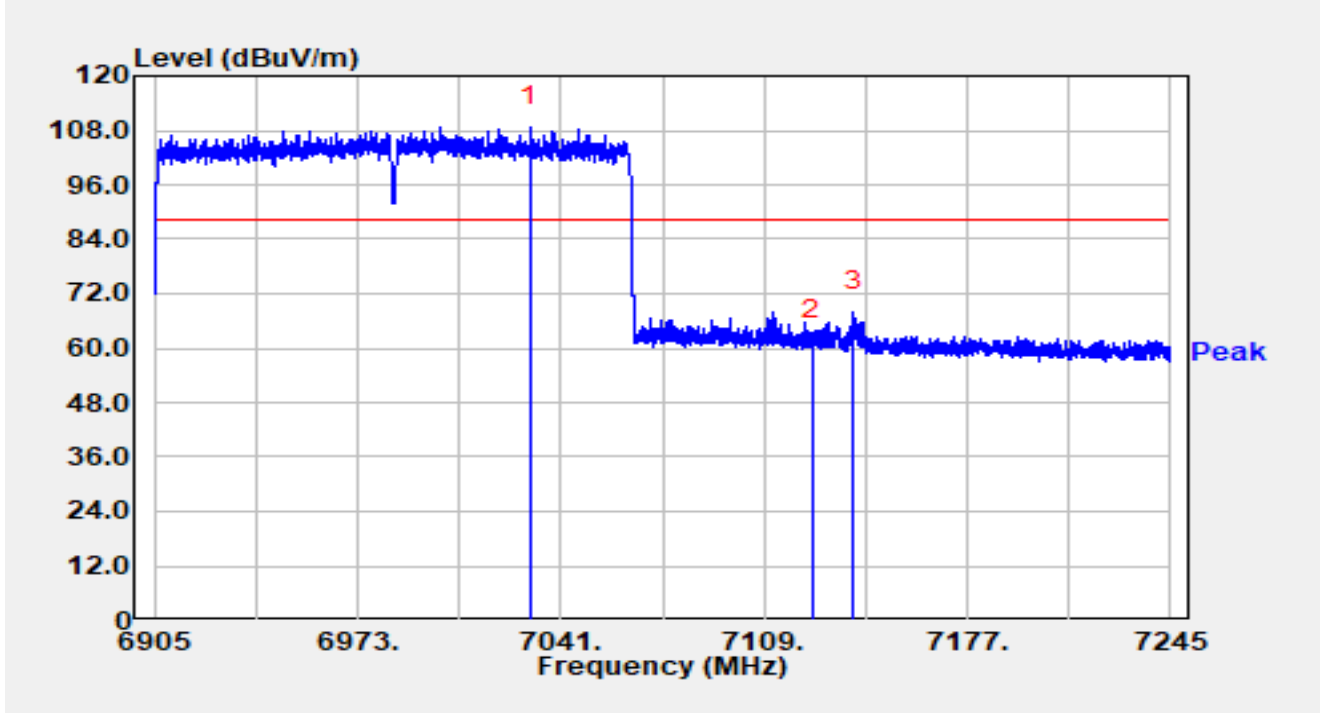


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 7030.630        | 88.65          | 20.26      | 108.90               | N/A         | N/A            | Peak     |
| 2  |      | 7125.000        | 41.42          | 20.42      | 61.85                | -26.35      | 88.20          | Peak     |
| 3  | *    | 7138.750        | 47.69          | 20.42      | 68.11                | -20.09      | 88.20          | Peak     |

Notes:

- " \* ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                |               |              |
|-------------|------------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                         | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                        | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                  | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                  | Polarity      | Vertical     |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System         | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT160 at 6985MHz (Nss=3) |               |              |

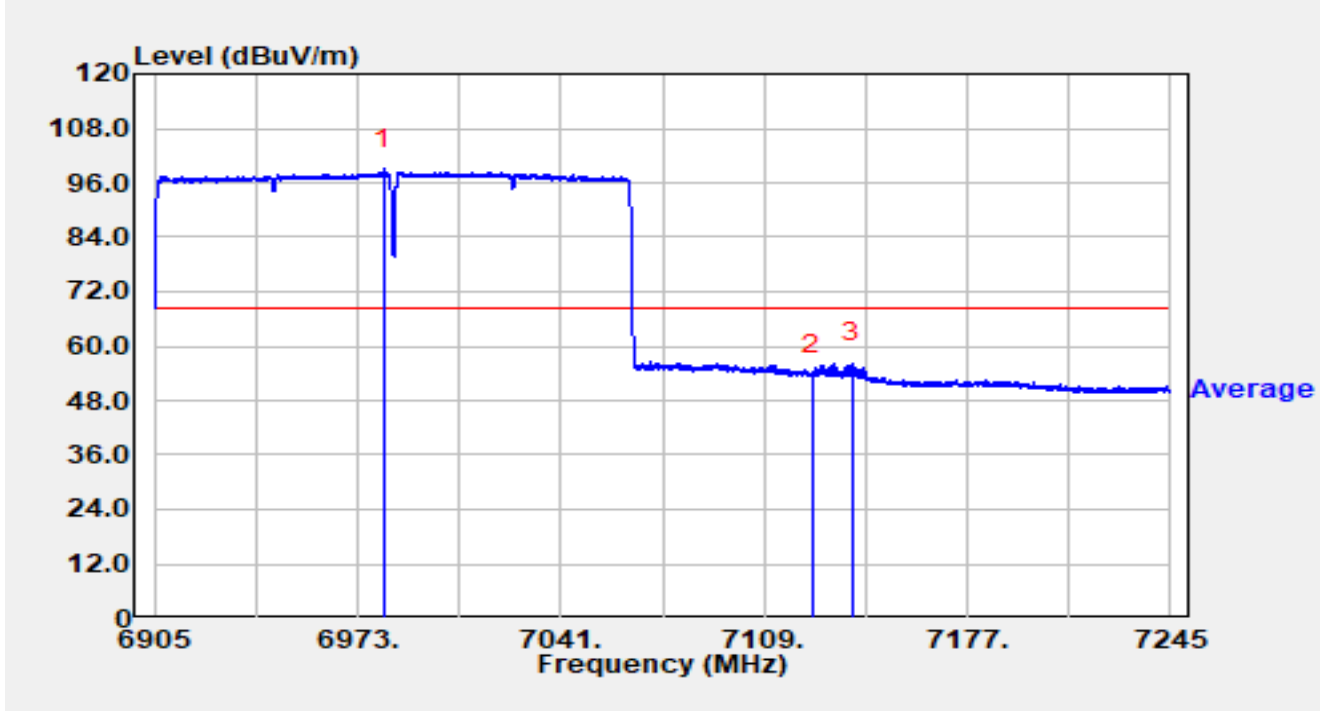


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 6981.602        | 78.74          | 20.29      | 99.02                | N/A         | N/A            | Average  |
| 2  |      | 7125.000        | 33.17          | 20.42      | 53.60                | -14.60      | 68.20          | Average  |
| 3  | *    | 7138.682        | 35.87          | 20.42      | 56.29                | -11.91      | 68.20          | Average  |

Notes:

- " \* ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                  |               |              |
|-------------|--------------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                           | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                          | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                    | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                    | Polarity      | Horizontal   |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System           | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT320-1 at 6425MHz (Nss=3) |               |              |

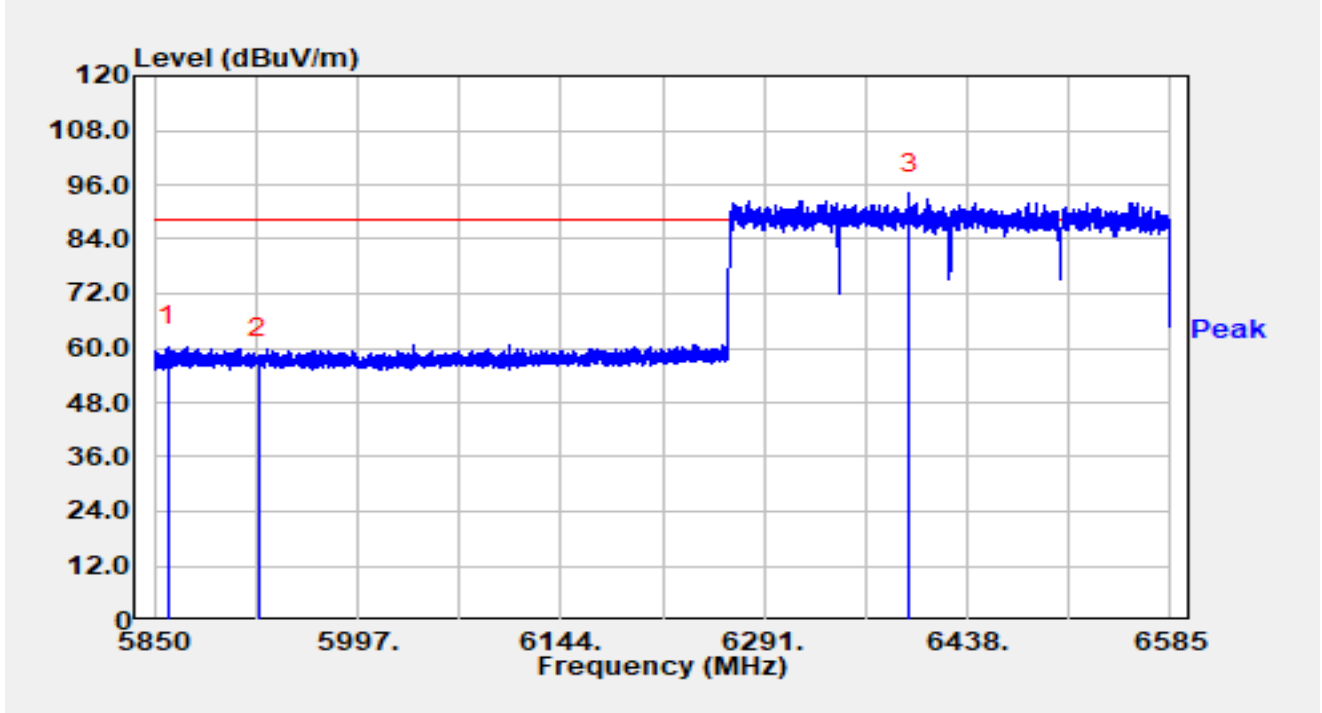


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5859.408        | 42.92          | 17.33      | 60.25                | -27.95      | 88.20          | Peak     |
| 2  |      | 5925.000        | 40.51          | 17.36      | 57.88                | -30.32      | 88.20          | Peak     |
| 3  |      | 6396.399        | 74.55          | 19.45      | 94.00                | N/A         | N/A            | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                  |               |              |
|-------------|--------------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                           | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                          | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                    | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                    | Polarity      | Horizontal   |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System           | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT320-1 at 6425MHz (Nss=3) |               |              |

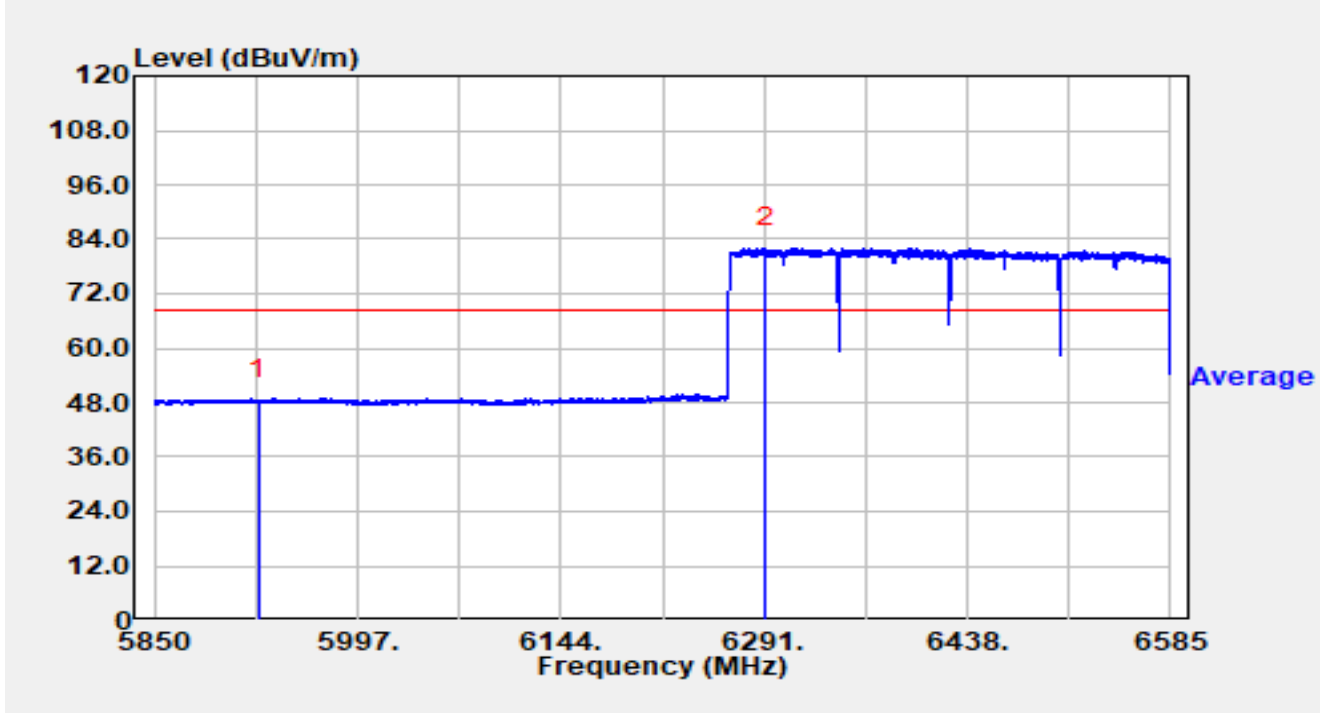


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5925.000        | 31.15          | 17.36      | 48.52                | -19.68      | 68.20          | Average  |
| 2  |      | 6292.029        | 63.06          | 19.04      | 82.10                | N/A         | N/A            | Average  |

Notes:

- "\*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                  |               |              |
|-------------|--------------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                           | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                          | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                    | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                    | Polarity      | Vertical     |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System           | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT320-1 at 6425MHz (Nss=3) |               |              |

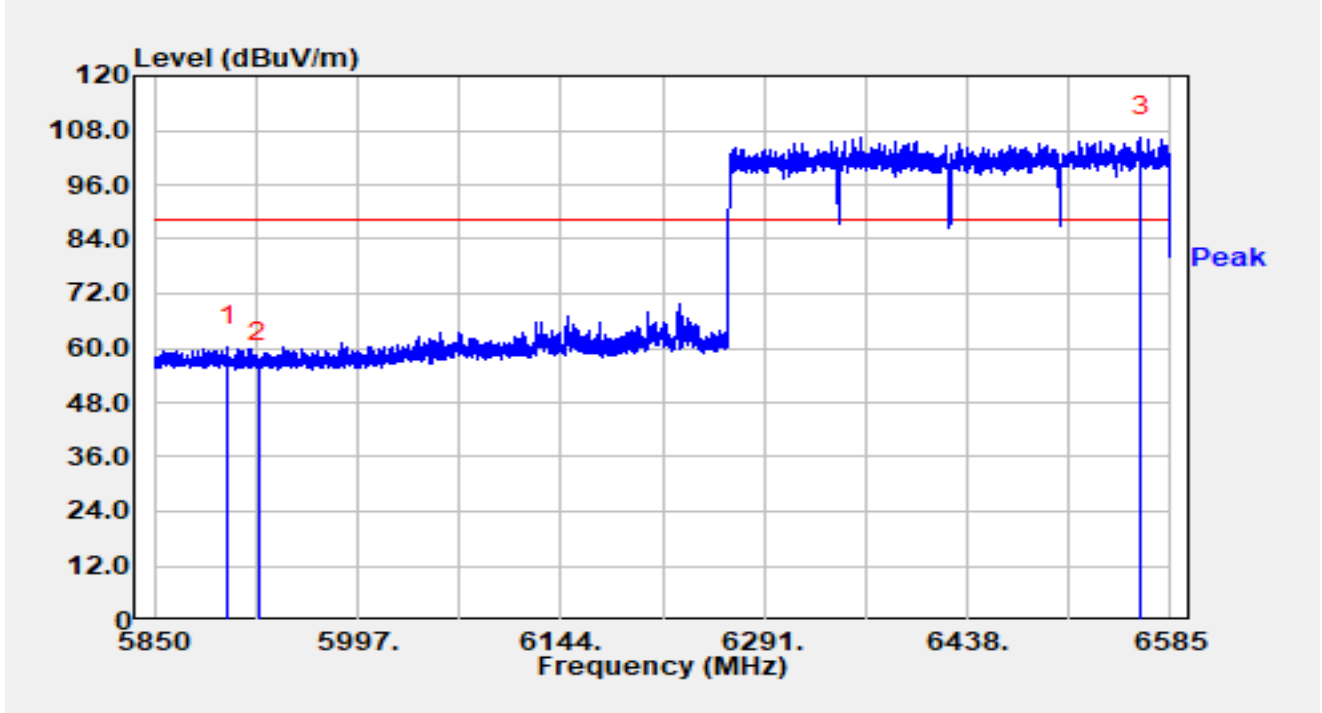


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5902.994        | 42.99          | 17.36      | 60.36                | -27.84      | 88.20          | Peak     |
| 2  |      | 5925.000        | 39.38          | 17.36      | 56.74                | -31.46      | 88.20          | Peak     |
| 3  |      | 6563.905        | 86.37          | 20.08      | 106.45               | N/A         | N/A            | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                  |               |              |
|-------------|--------------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                           | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                          | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                    | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                    | Polarity      | Vertical     |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System           | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT320-1 at 6425MHz (Nss=3) |               |              |

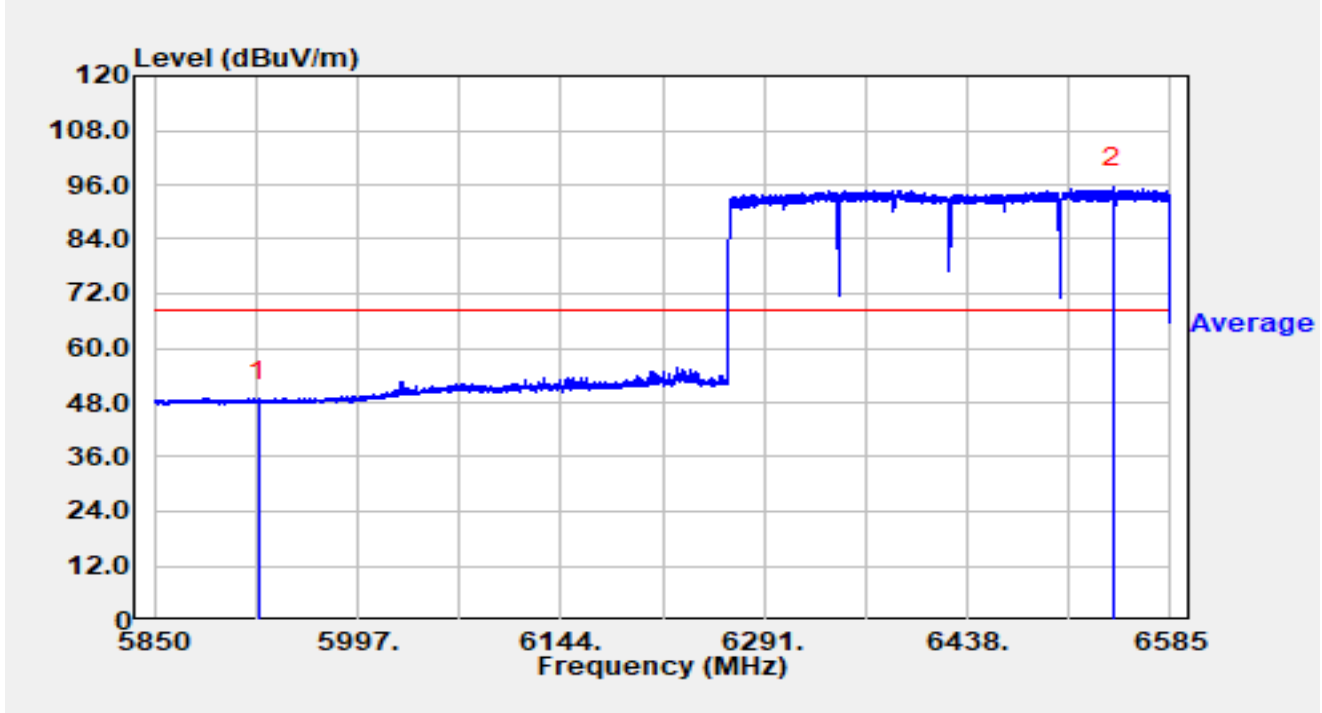


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5925.000        | 30.67          | 17.36      | 48.03                | -20.17      | 68.20          | Average  |
| 2  |      | 6543.767        | 75.43          | 20.09      | 95.52                | N/A         | N/A            | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                  |               |              |
|-------------|--------------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                           | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                          | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                    | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                    | Polarity      | Horizontal   |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System           | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT320-1 at 6745MHz (Nss=3) |               |              |

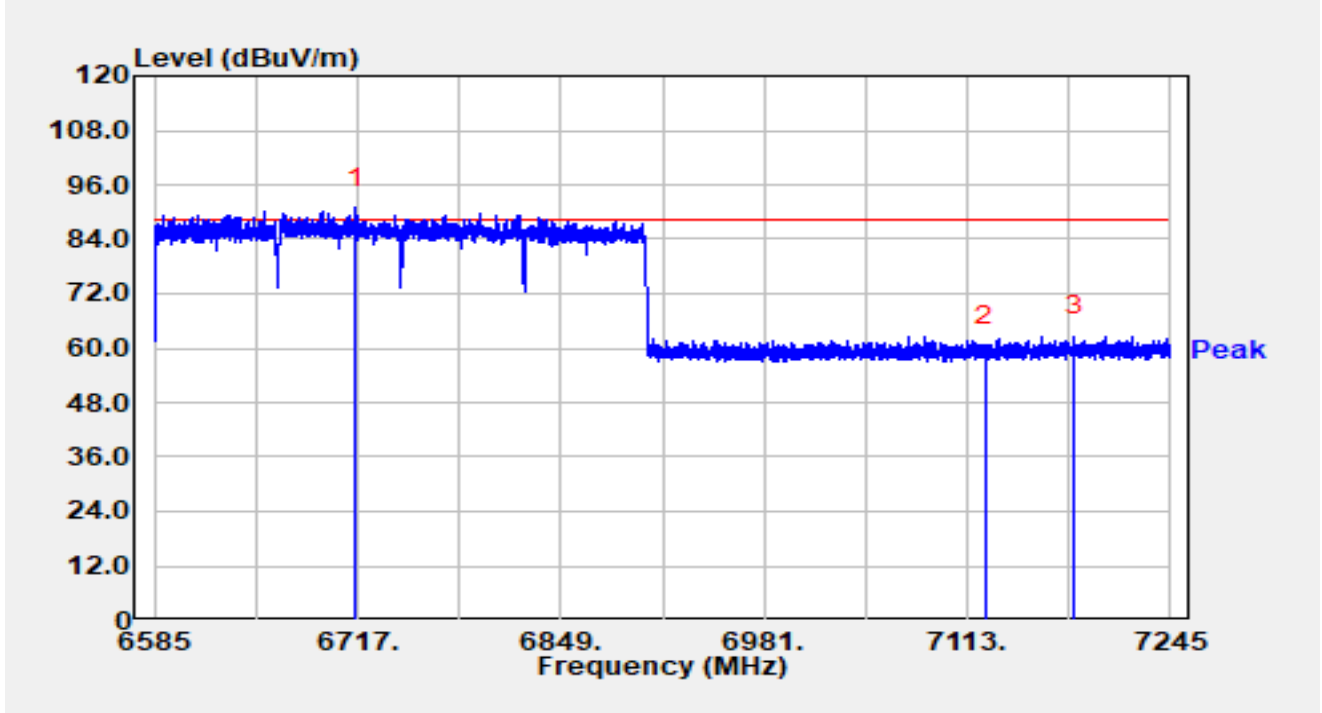


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 6715.944        | 70.41          | 20.39      | 90.80                | N/A         | N/A            | Peak     |
| 2  |      | 7125.000        | 39.93          | 20.42      | 60.36                | -27.84      | 88.20          | Peak     |
| 3  | *    | 7182.498        | 41.81          | 20.70      | 62.51                | -25.69      | 88.20          | Peak     |

Notes:

- " \* ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                  |               |              |
|-------------|--------------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                           | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                          | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                    | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                    | Polarity      | Horizontal   |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System           | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT320-1 at 6745MHz (Nss=3) |               |              |

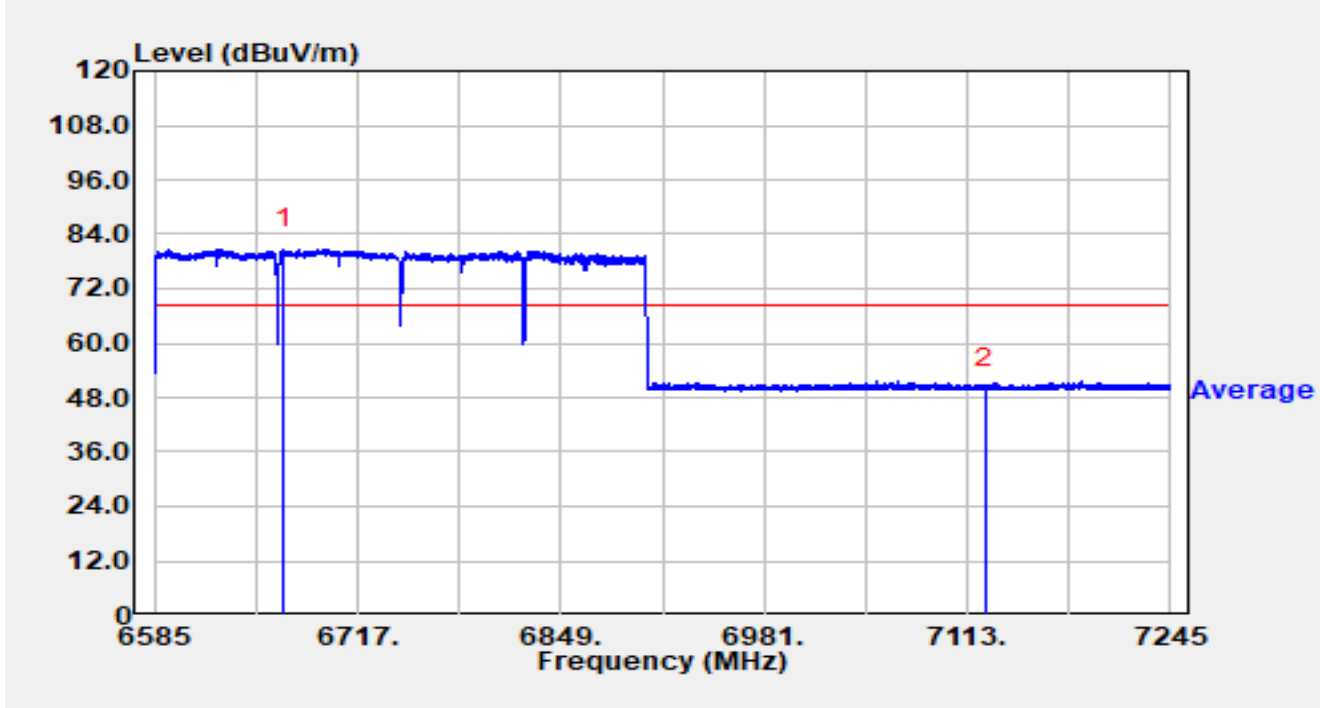


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 6668.688        | 60.47          | 20.26      | 80.73                | N/A         | N/A            | Average  |
| 2  | *    | 7125.000        | 29.61          | 20.42      | 50.04                | -18.16      | 68.20          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                  |               |              |
|-------------|--------------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                           | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                          | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                    | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                    | Polarity      | Vertical     |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System           | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT320-1 at 6745MHz (Nss=3) |               |              |

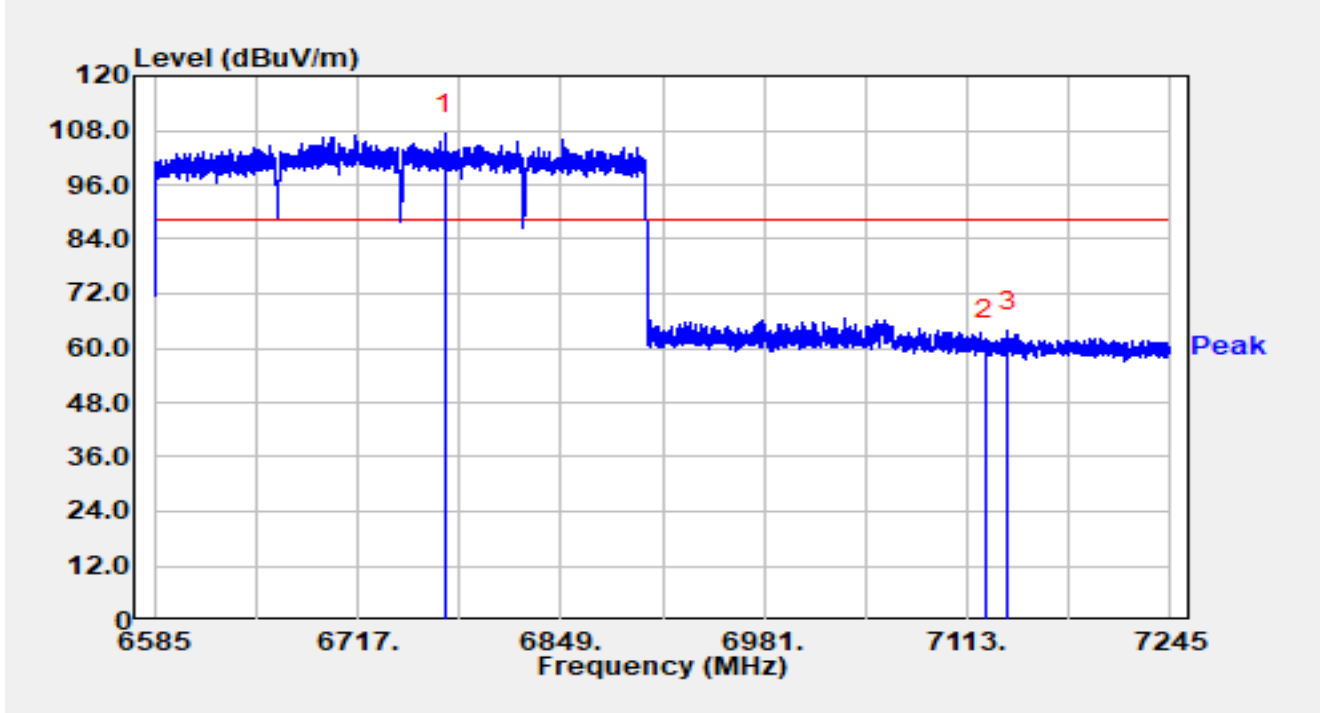


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 6773.562        | 86.84          | 20.41      | 107.25               | N/A         | N/A            | Peak     |
| 2  |      | 7125.000        | 41.25          | 20.42      | 61.67                | -26.53      | 88.20          | Peak     |
| 3  | *    | 7139.466        | 43.31          | 20.41      | 63.72                | -24.48      | 88.20          | Peak     |

Notes:

- " \* ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                  |               |              |
|-------------|--------------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                           | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                          | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                    | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                    | Polarity      | Vertical     |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System           | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT320-1 at 6745MHz (Nss=3) |               |              |

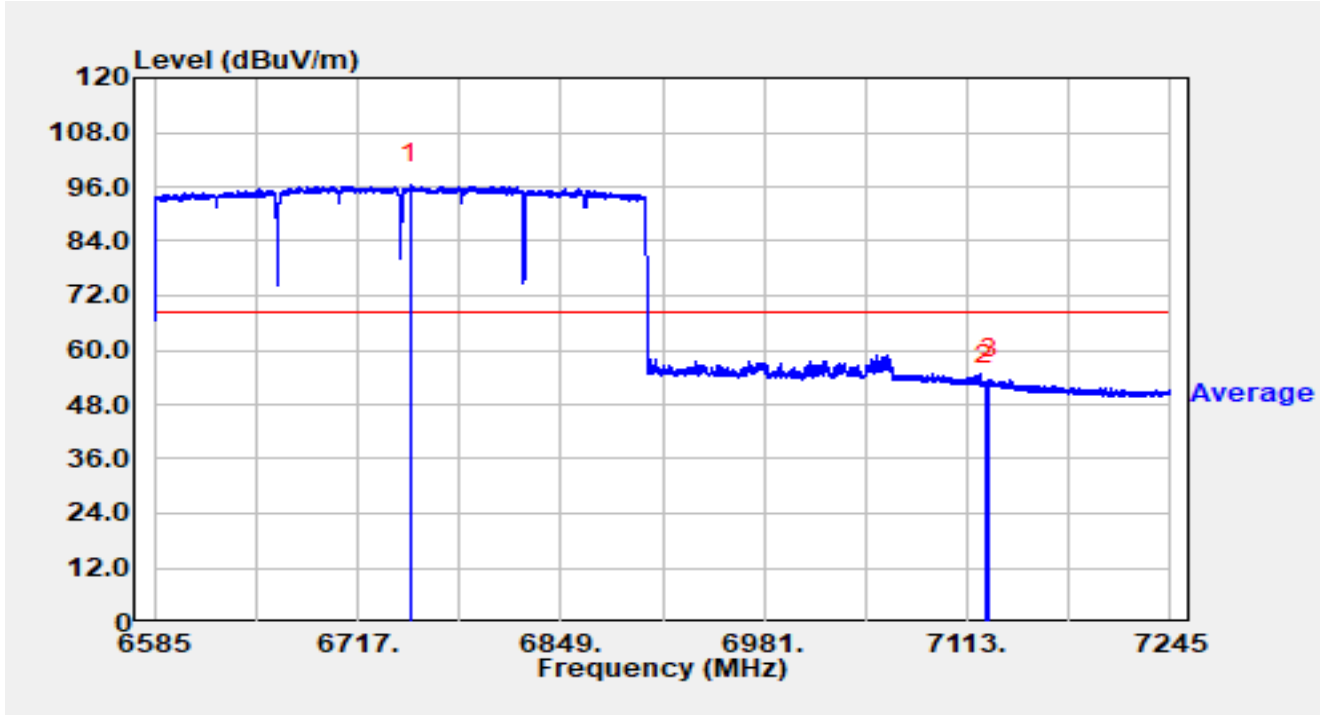


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 6751.122        | 76.17          | 20.37      | 96.54                | N/A         | N/A            | Average  |
| 2  |      | 7125.000        | 32.03          | 20.42      | 52.45                | -15.75      | 68.20          | Average  |
| 3  | *    | 7127.388        | 33.00          | 20.44      | 53.44                | -14.76      | 68.20          | Average  |

Notes:

- " \* ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                  |               |              |
|-------------|--------------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                           | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                          | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                    | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                    | Polarity      | Horizontal   |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System           | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT320-2 at 6265MHz (Nss=3) |               |              |

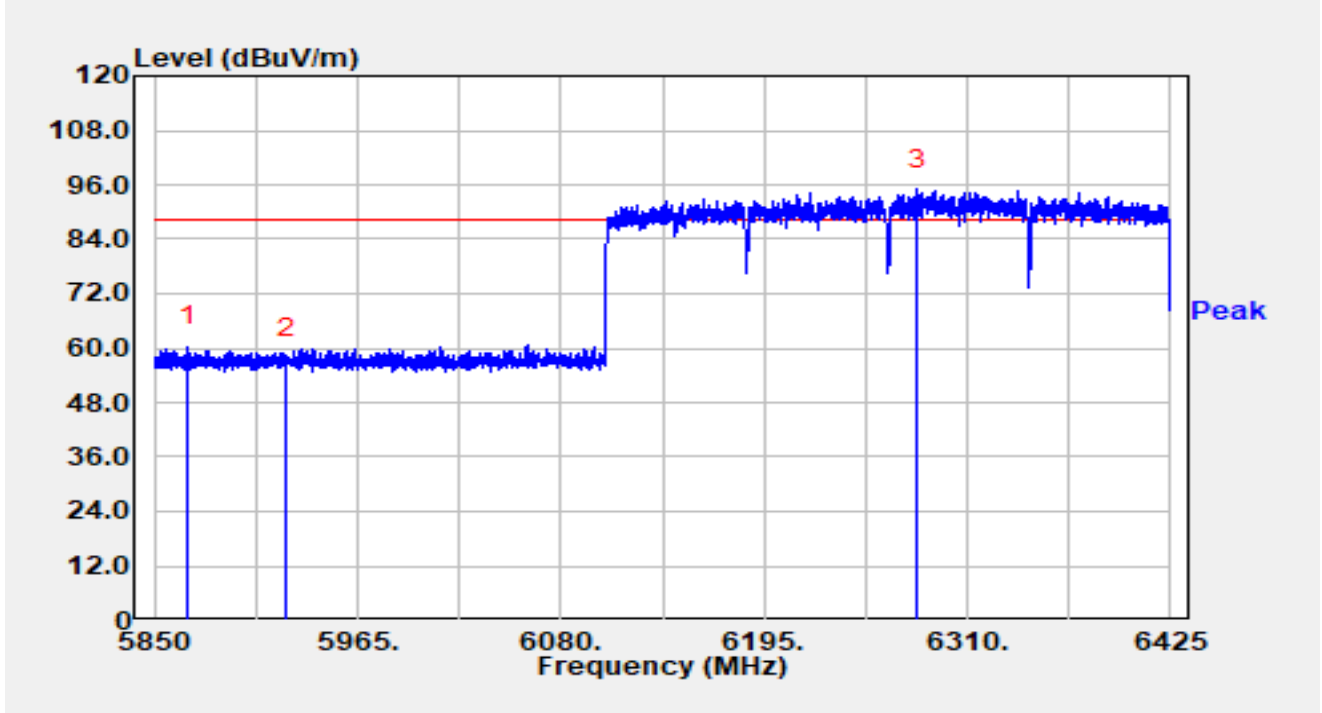


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5869.263        | 42.90          | 17.34      | 60.25                | -27.95      | 88.20          | Peak     |
| 2  |      | 5925.000        | 40.16          | 17.36      | 57.52                | -30.68      | 88.20          | Peak     |
| 3  |      | 6281.710        | 76.10          | 18.97      | 95.07                | N/A         | N/A            | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                  |               |              |
|-------------|--------------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                           | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                          | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                    | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                    | Polarity      | Horizontal   |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System           | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT320-2 at 6265MHz (Nss=3) |               |              |

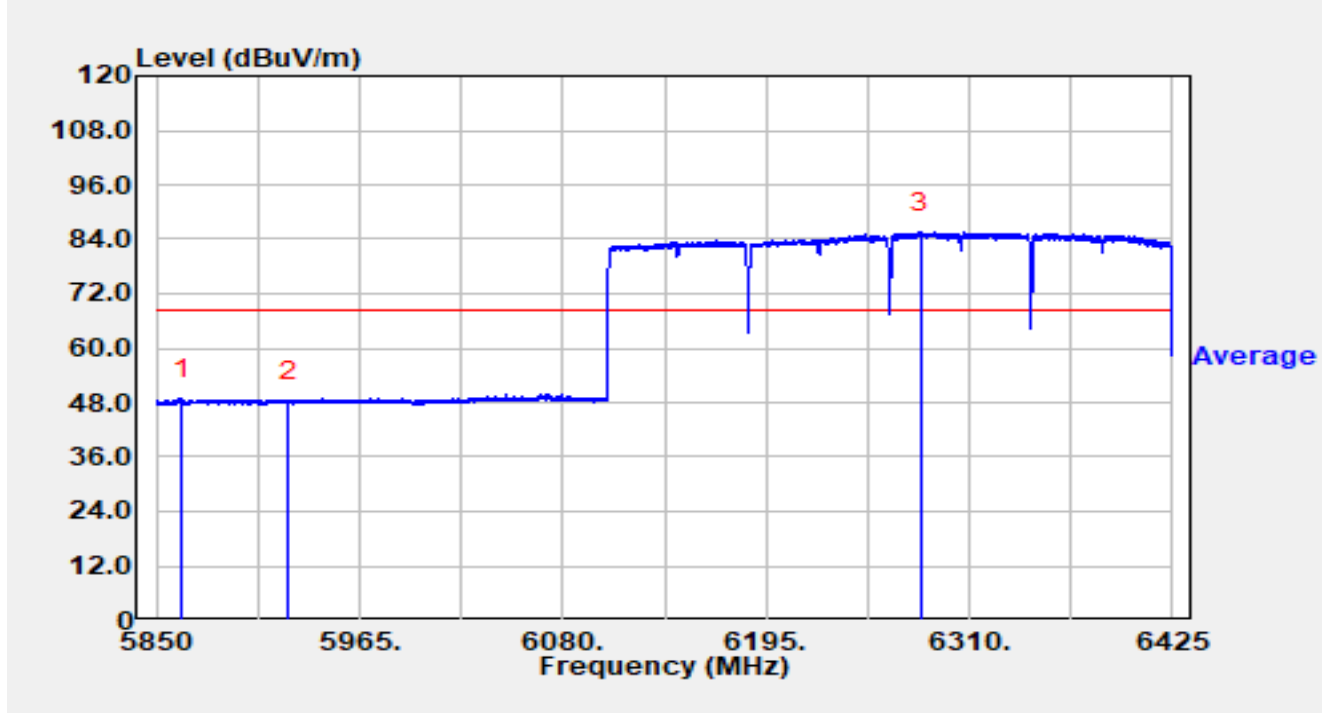


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5864.720        | 31.38          | 17.34      | 48.71                | -19.49      | 68.20          | Average  |
| 2  |      | 5925.000        | 30.68          | 17.36      | 48.05                | -20.15      | 68.20          | Average  |
| 3  |      | 6282.112        | 66.48          | 18.98      | 85.45                | N/A         | N/A            | Average  |

Notes:

- " \* ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                  |               |              |
|-------------|--------------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                           | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                          | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                    | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                    | Polarity      | Vertical     |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System           | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT320-2 at 6265MHz (Nss=3) |               |              |

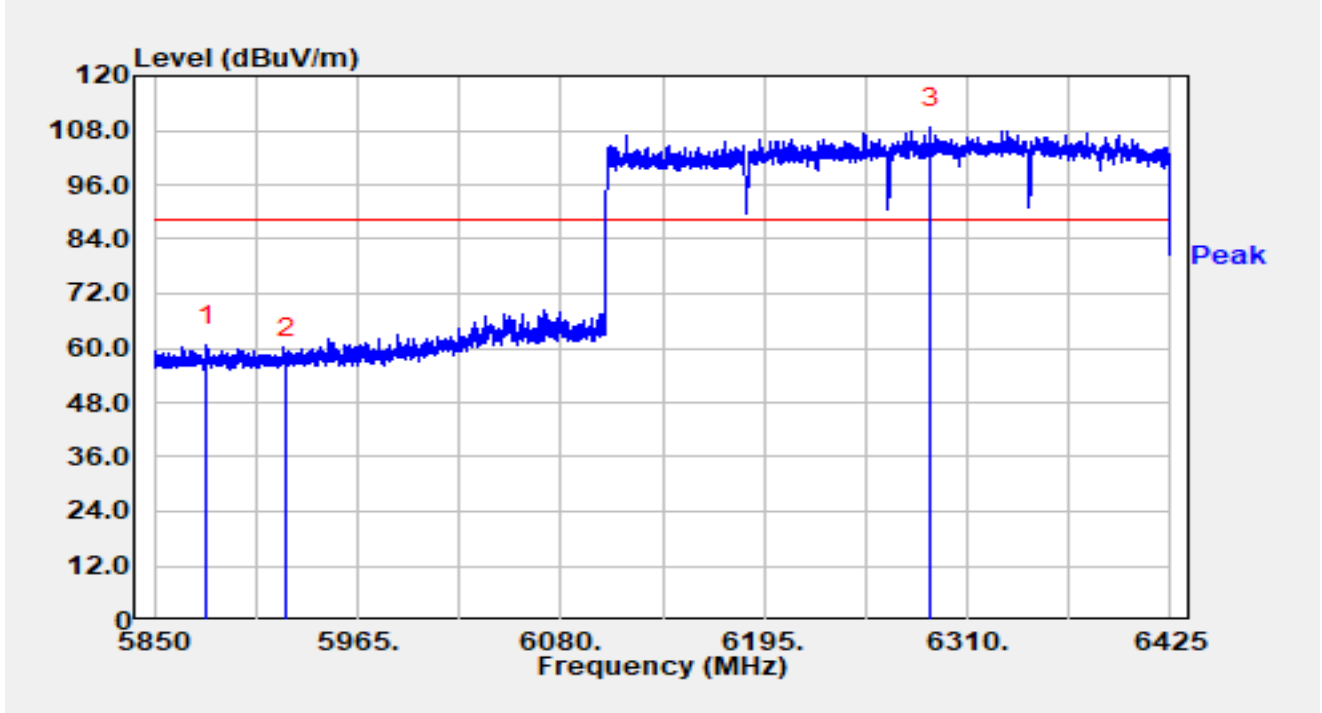


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5879.842        | 43.17          | 17.40      | 60.57                | -27.63      | 88.20          | Peak     |
| 2  |      | 5925.000        | 40.23          | 17.36      | 57.60                | -30.60      | 88.20          | Peak     |
| 3  |      | 6289.300        | 89.55          | 19.02      | 108.57               | N/A         | N/A            | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                  |               |              |
|-------------|--------------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                           | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                          | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                    | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                    | Polarity      | Vertical     |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System           | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT320-2 at 6265MHz (Nss=3) |               |              |

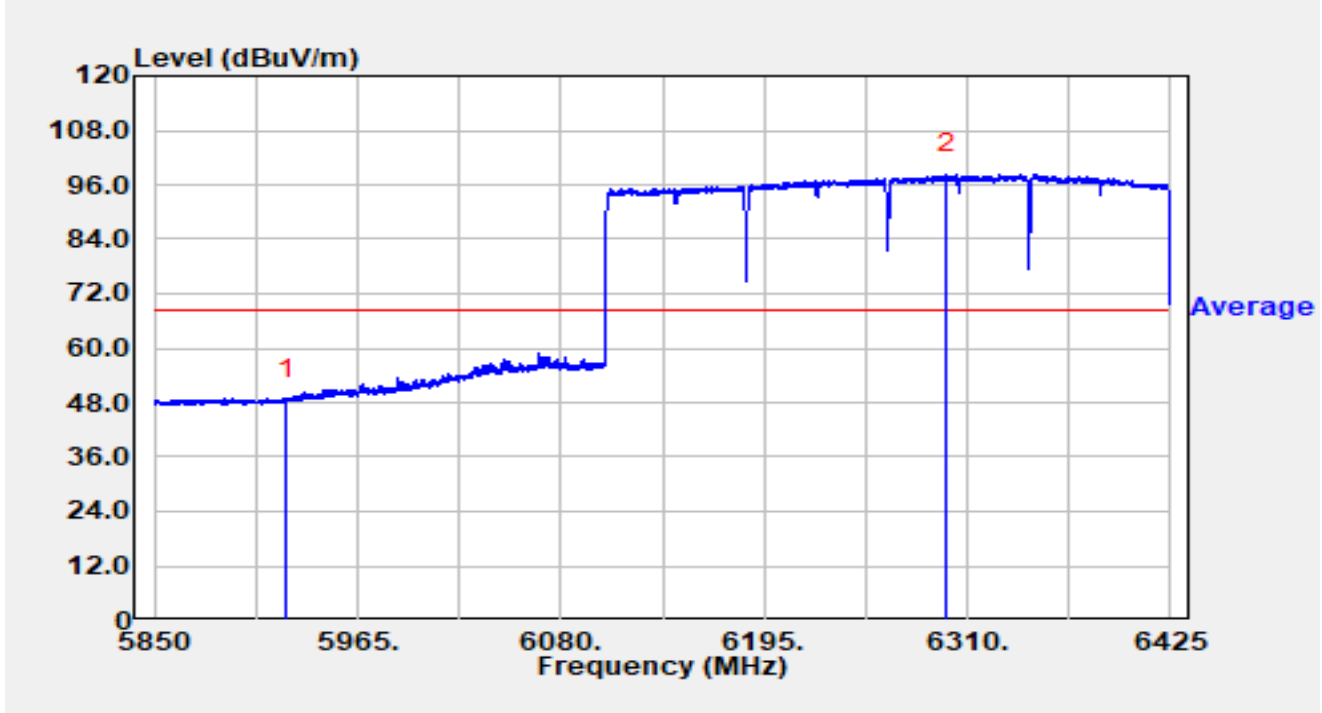


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5925.000        | 31.16          | 17.36      | 48.52                | -19.68      | 68.20          | Average  |
| 2  |      | 6298.328        | 79.24          | 19.07      | 98.32                | N/A         | N/A            | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                  |               |              |
|-------------|--------------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                           | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                          | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                    | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                    | Polarity      | Horizontal   |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System           | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT320-2 at 6905MHz (Nss=3) |               |              |

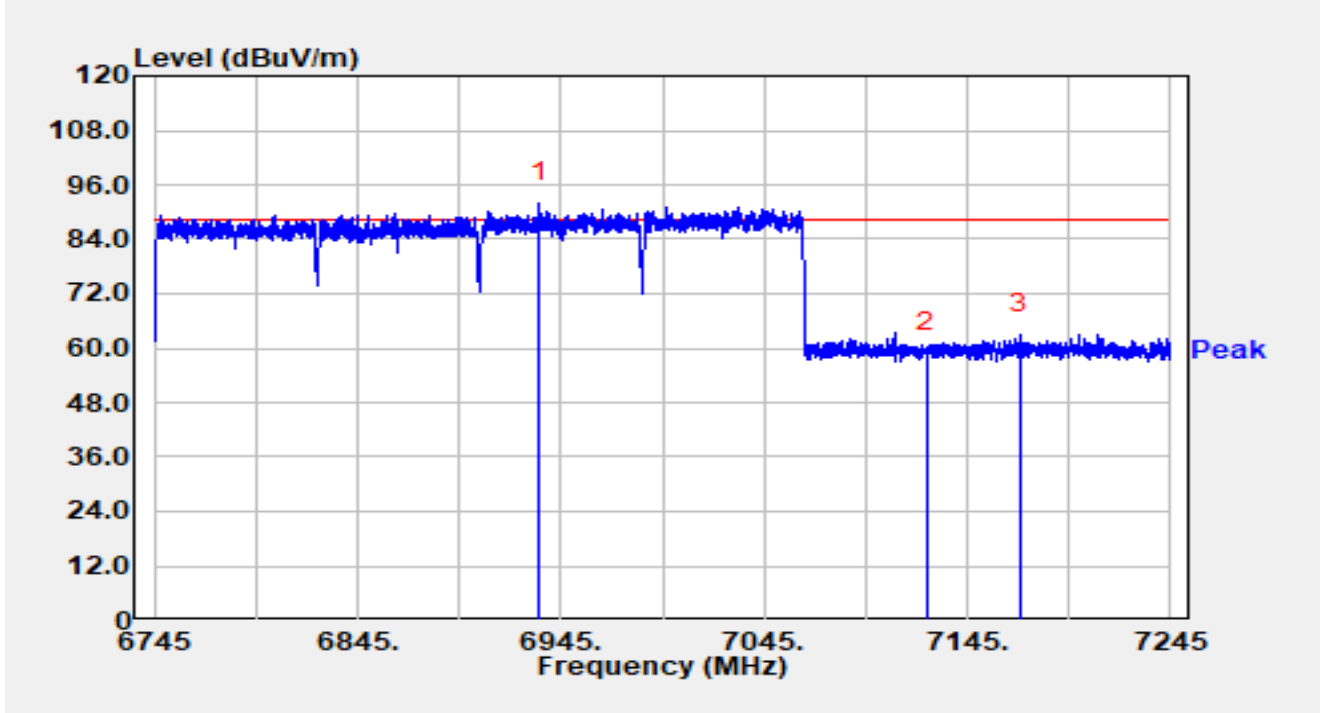


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 6934.100        | 71.56          | 20.42      | 91.99                | N/A         | N/A            | Peak     |
| 2  |      | 7125.000        | 38.65          | 20.42      | 59.08                | -29.12      | 88.20          | Peak     |
| 3  | *    | 7170.800        | 42.22          | 20.75      | 62.97                | -25.23      | 88.20          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                  |               |              |
|-------------|--------------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                           | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                          | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                    | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                    | Polarity      | Horizontal   |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System           | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT320-2 at 6905MHz (Nss=3) |               |              |

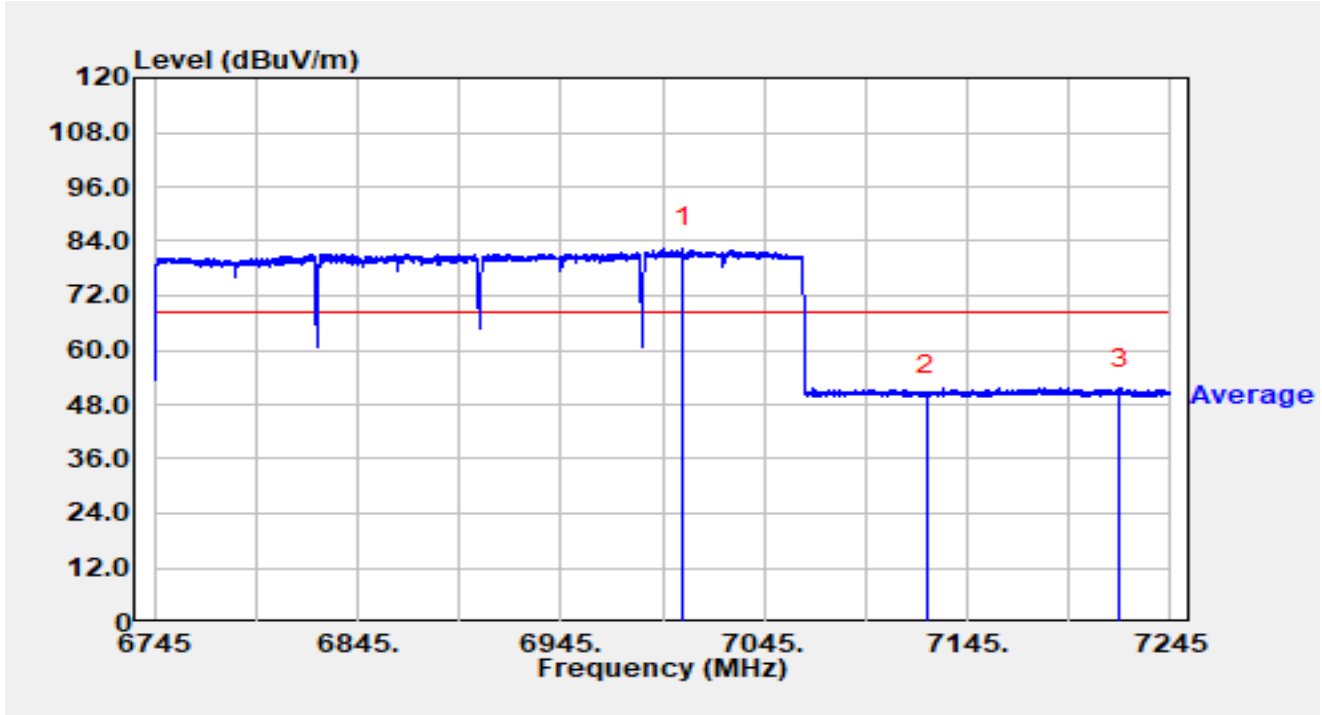


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 7005.150        | 62.22          | 20.30      | 82.52                | N/A         | N/A            | Average  |
| 2  |      | 7125.000        | 29.74          | 20.42      | 50.17                | -18.03      | 68.20          | Average  |
| 3  | *    | 7219.900        | 31.04          | 20.56      | 51.60                | -16.60      | 68.20          | Average  |

Notes:

- " \* ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                  |               |              |
|-------------|--------------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                           | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                          | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                    | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                    | Polarity      | Vertical     |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System           | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT320-2 at 6905MHz (Nss=3) |               |              |

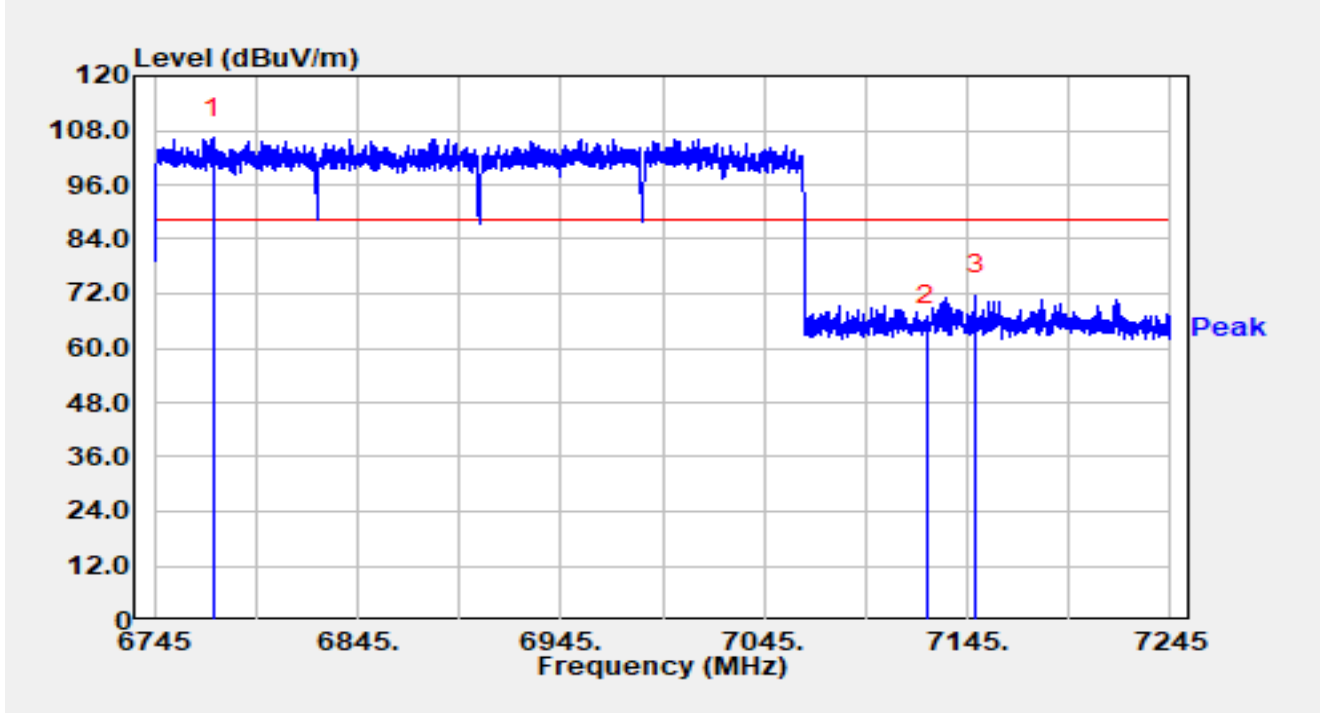


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 6773.700        | 85.97          | 20.41      | 106.38               | N/A         | N/A            | Peak     |
| 2  |      | 7125.000        | 44.51          | 20.42      | 64.93                | -23.27      | 88.20          | Peak     |
| 3  | *    | 7149.250        | 51.21          | 20.37      | 71.58                | -16.62      | 88.20          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                  |               |              |
|-------------|--------------------------------------------------|---------------|--------------|
| Site        | WJ-AC2                                           | Test Date     | 2025-02-08   |
| Temperature | 18.4 °C                                          | Humidity      | 23.5 %       |
| Limit       | FCC_6G RE(3m)                                    | Test Engineer | Bob Zhang    |
| Factor      | DRH18-E_07105                                    | Polarity      | Vertical     |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System           | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT320-2 at 6905MHz (Nss=3) |               |              |

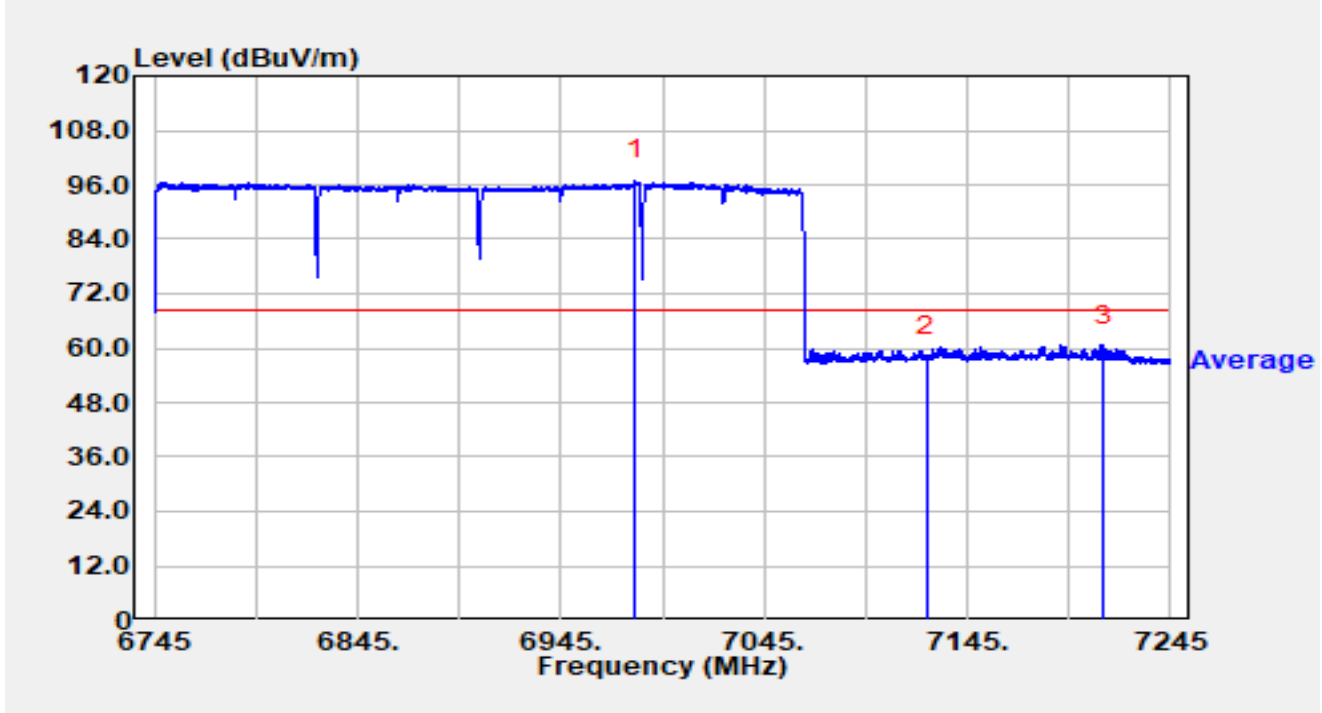


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 6981.700        | 76.65          | 20.29      | 96.94                | N/A         | N/A            | Average  |
| 2  |      | 7125.000        | 37.57          | 20.42      | 57.99                | -10.21      | 68.20          | Average  |
| 3  | *    | 7211.950        | 39.99          | 20.60      | 60.59                | -7.61       | 68.20          | Average  |

Notes:

- " \* ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

#### A.10 AC Conducted Emissions Test Result

|             |                                        |               |              |
|-------------|----------------------------------------|---------------|--------------|
| Site        | WJ-SR5                                 | Test Date     | 2025-02-11   |
| Temperature | 18.1 °C                                | Humidity      | 40.5 %       |
| Limit       | FCC Part 15.207_CE                     | Test Engineer | Carl Jiang   |
| Factor      | ENV216-07202_L1_Filter Off_E           | Polarity      | Line         |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT320 at 6265MHz |               |              |

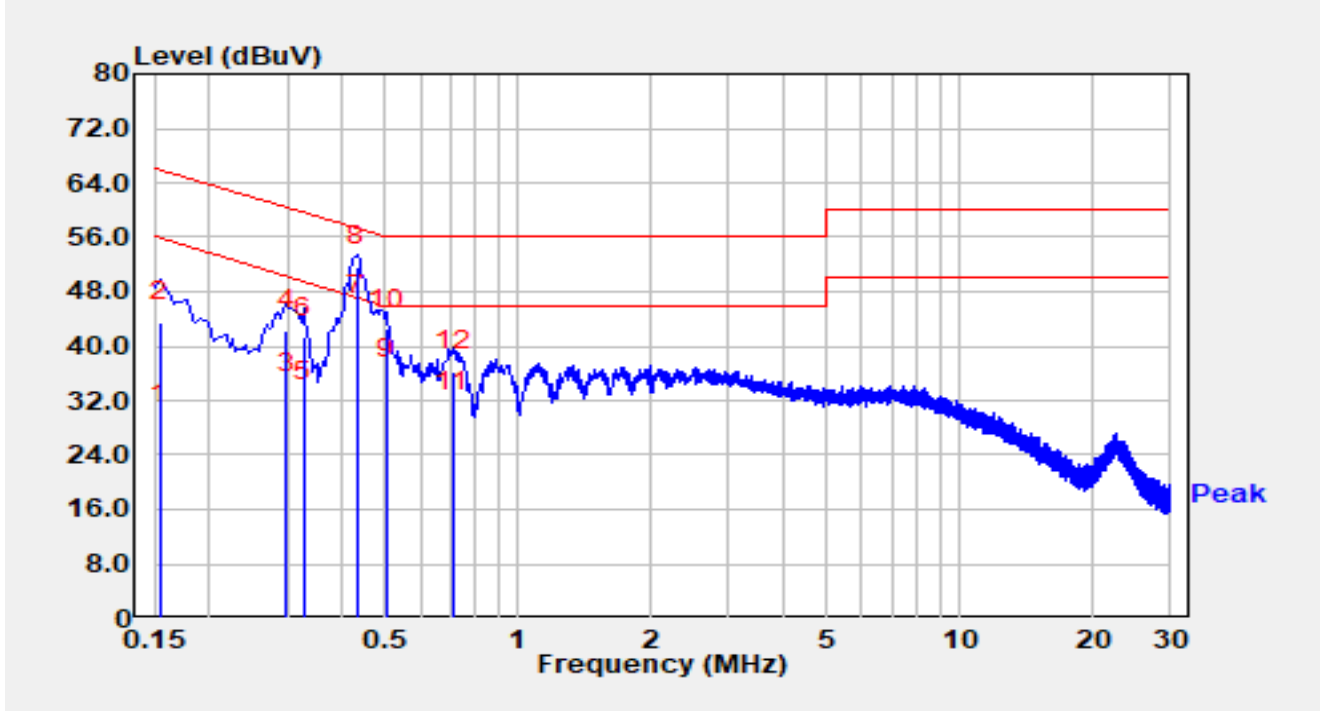

| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB) | Measurement (dBμV) | Margin (dB) | Limit (dBμV) | Detector |
|----|------|-----------------|----------------|----------|--------------------|-------------|--------------|----------|
| 1  |      | 0.154           | 18.70          | 9.89     | 28.59              | -27.19      | 55.78        | Average  |
| 2  |      | 0.154           | 33.60          | 9.89     | 43.49              | -22.29      | 65.78        | QP       |
| 3  |      | 0.298           | 23.20          | 9.90     | 33.10              | -17.20      | 50.30        | Average  |
| 4  |      | 0.298           | 32.40          | 9.90     | 42.30              | -18.00      | 60.30        | QP       |
| 5  |      | 0.326           | 21.80          | 9.90     | 31.70              | -17.85      | 49.55        | Average  |
| 6  |      | 0.326           | 31.40          | 9.90     | 41.30              | -18.25      | 59.55        | QP       |
| 7  | *    | 0.430           | 34.60          | 9.94     | 44.54              | -2.72       | 47.25        | Average  |
| 8  |      | 0.430           | 41.70          | 9.94     | 51.64              | -5.62       | 57.25        | QP       |
| 9  |      | 0.502           | 25.20          | 9.96     | 35.16              | -10.84      | 46.00        | Average  |
| 10 |      | 0.502           | 32.50          | 9.96     | 42.46              | -13.54      | 56.00        | QP       |
| 11 |      | 0.710           | 20.40          | 10.05    | 30.45              | -15.55      | 46.00        | Average  |


---

|    |  |       |       |       |       |        |       |    |
|----|--|-------|-------|-------|-------|--------|-------|----|
| 12 |  | 0.710 | 26.30 | 10.05 | 36.35 | -19.65 | 56.00 | QP |
|----|--|-------|-------|-------|-------|--------|-------|----|

## Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB $\mu$ V) = Reading (dB $\mu$ V) + C.F (dB).

|             |                                        |               |              |
|-------------|----------------------------------------|---------------|--------------|
| Site        | WJ-SR5                                 | Test Date     | 2025-02-11   |
| Temperature | 18.1 °C                                | Humidity      | 40.5 %       |
| Limit       | FCC Part 15.207_CE                     | Test Engineer | Carl Jiang   |
| Factor      | ENV216-07202_N_Filter Off_E            | Polarity      | Neutral      |
| EUT         | BE14000 Whole Home Mesh Wi-Fi 7 System | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT320 at 6265MHz |               |              |

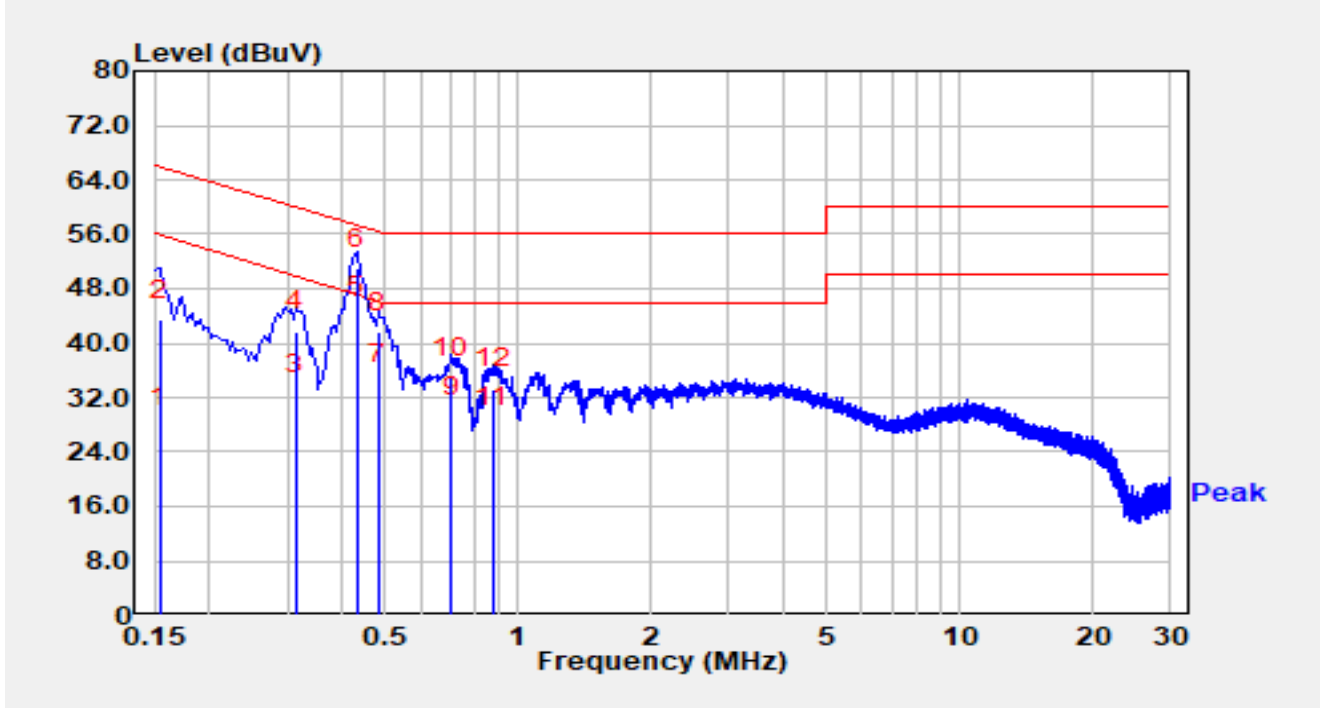

| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB) | Measurement (dBμV) | Margin (dB) | Limit (dBμV) | Detector |
|----|------|-----------------|----------------|----------|--------------------|-------------|--------------|----------|
| 1  |      | 0.154           | 17.80          | 9.90     | 27.70              | -28.08      | 55.78        | Average  |
| 2  |      | 0.154           | 33.50          | 9.90     | 43.40              | -22.38      | 65.78        | QP       |
| 3  |      | 0.314           | 22.40          | 9.91     | 32.31              | -17.55      | 49.86        | Average  |
| 4  |      | 0.314           | 31.80          | 9.91     | 41.71              | -18.15      | 59.86        | QP       |
| 5  | *    | 0.430           | 34.00          | 9.95     | 43.95              | -3.30       | 47.25        | Average  |
| 6  |      | 0.430           | 41.00          | 9.95     | 50.95              | -6.30       | 57.25        | QP       |
| 7  |      | 0.482           | 24.10          | 9.97     | 34.07              | -12.23      | 46.30        | Average  |
| 8  |      | 0.482           | 31.60          | 9.97     | 41.57              | -14.73      | 56.30        | QP       |
| 9  |      | 0.706           | 19.00          | 10.08    | 29.08              | -16.92      | 46.00        | Average  |
| 10 |      | 0.706           | 24.90          | 10.08    | 34.98              | -21.02      | 56.00        | QP       |
| 11 |      | 0.874           | 17.60          | 10.15    | 27.75              | -18.25      | 46.00        | Average  |
| 12 |      | 0.874           | 23.20          | 10.15    | 33.35              | -22.65      | 56.00        | QP       |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB $\mu$ V) = Reading (dB $\mu$ V) + C.F (dB).

## **Appendix B – Test Setup Photograph**

Refer to “2412RSU044-UT” file.

## **Appendix C – EUT Photograph**

Refer to “2412RSU044-UE” file.

\_\_\_\_\_ The End \_\_\_\_\_