



802.11 n40 CH06 (2437MHz)



802.11 n40 CH06 (2437MHz)

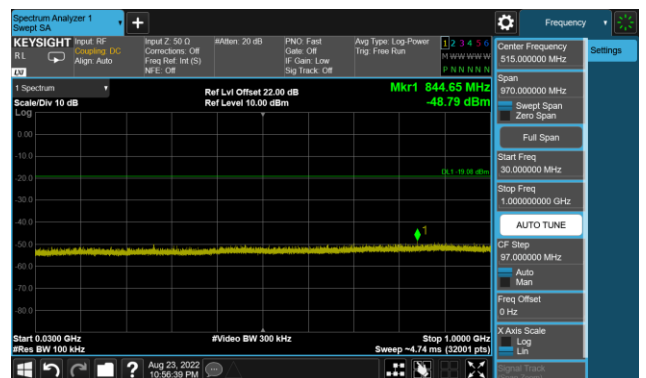


802.11 n40 CH06 (2437MHz)

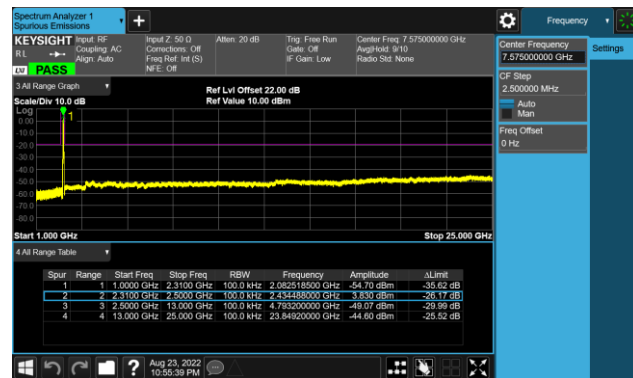


802.11 n40 CH09 (2452MHz)




802.11 n40 CH09 (2452MHz)

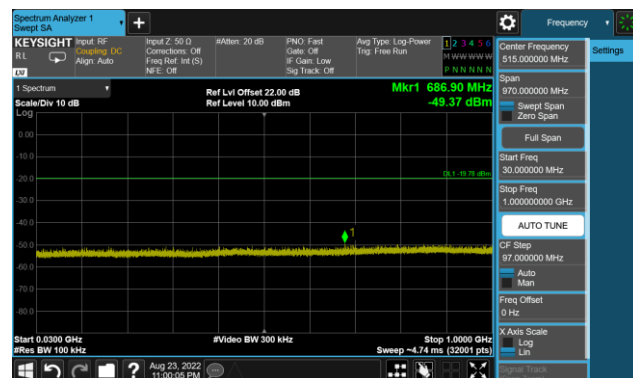


802.11 n40 CH09 (2452MHz)

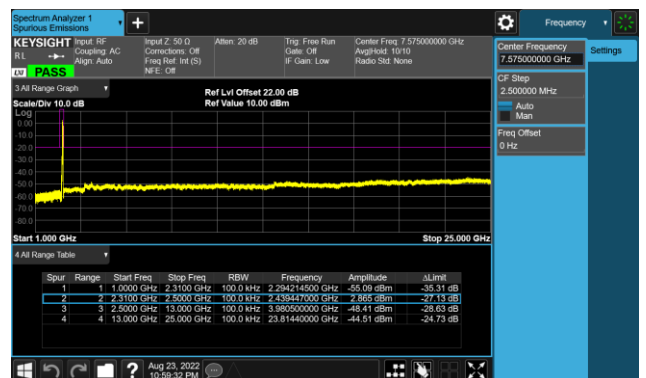

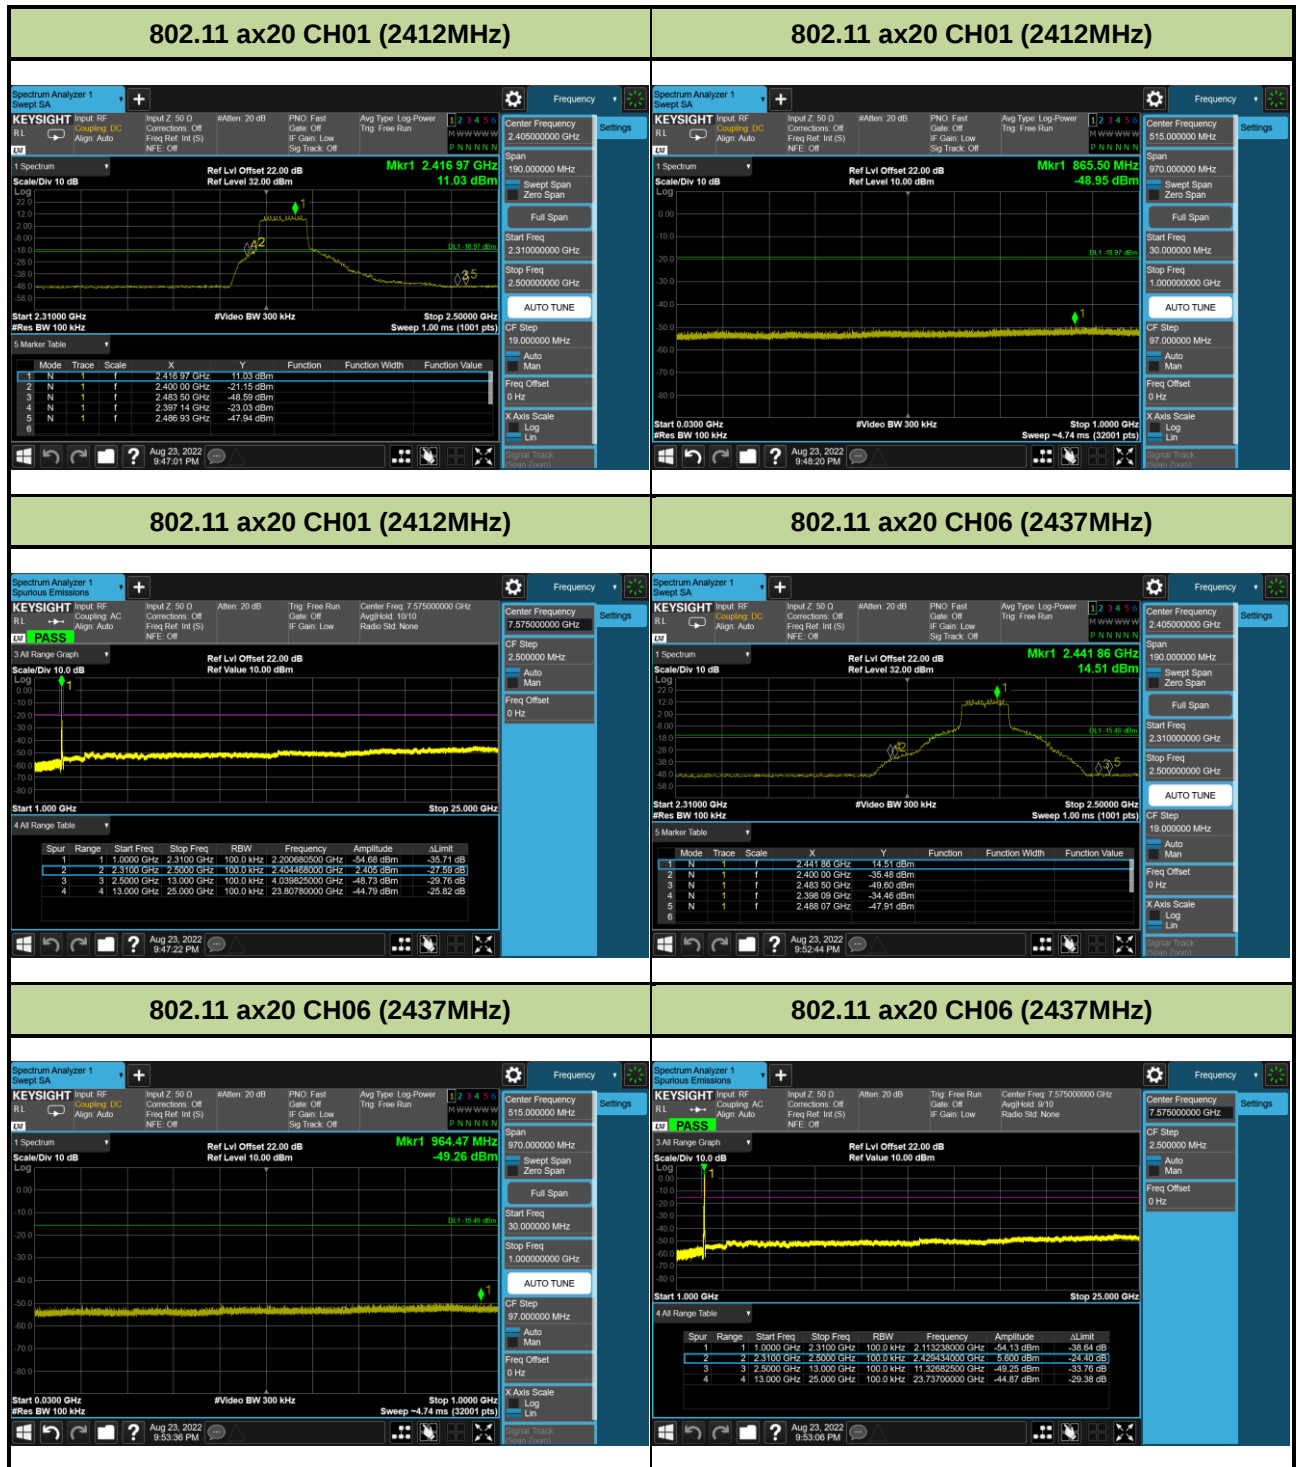



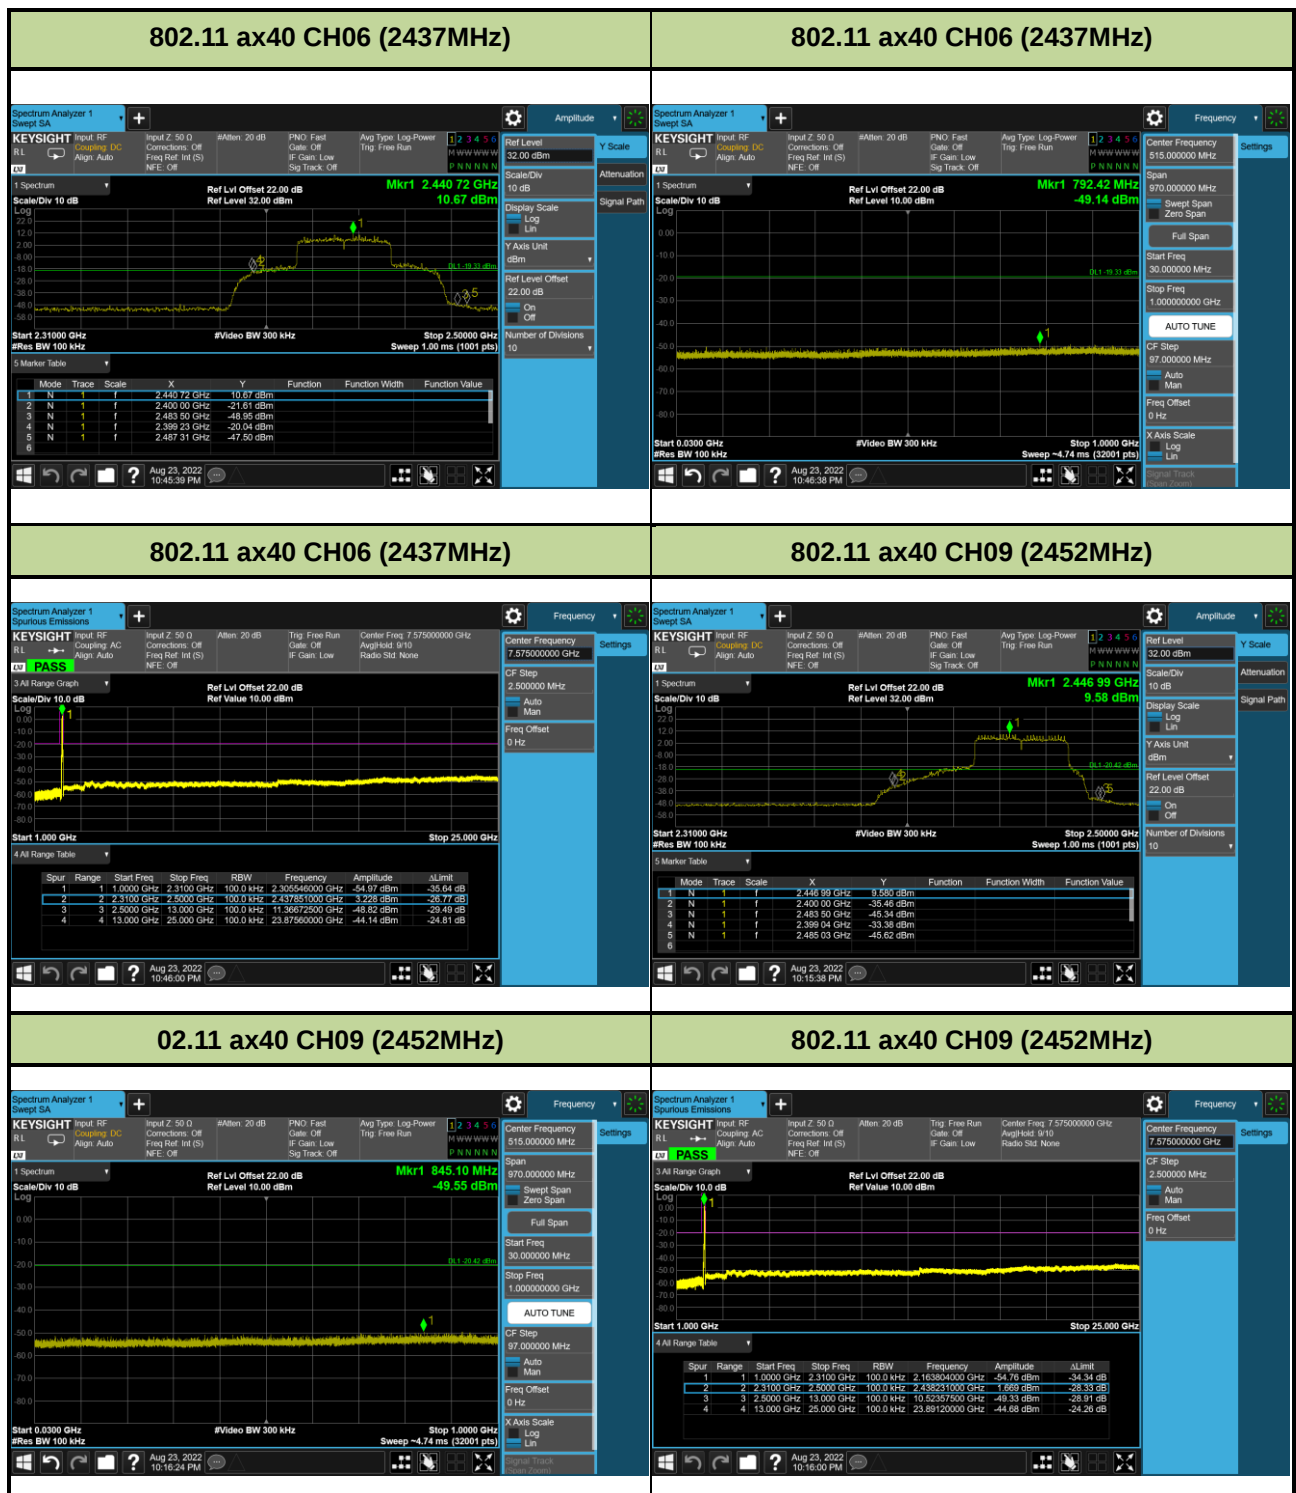

7.6. Radiated Spurious Emission Measurement

7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [Uv/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.6.2. Test Procedure Used

ANSI C63.10 - 2013 - Section 11.11 & 11.12

ANSI C63.10 - 2013 - Section 6.3 (General Requirements)

ANSI C63.10 - 2013 - Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 - 2013 - Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 - 2013 - Section 6.6 (Standard test method above 1GHz)

7.6.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.6.4. Test Setup

Below 1GHz Test Setup:

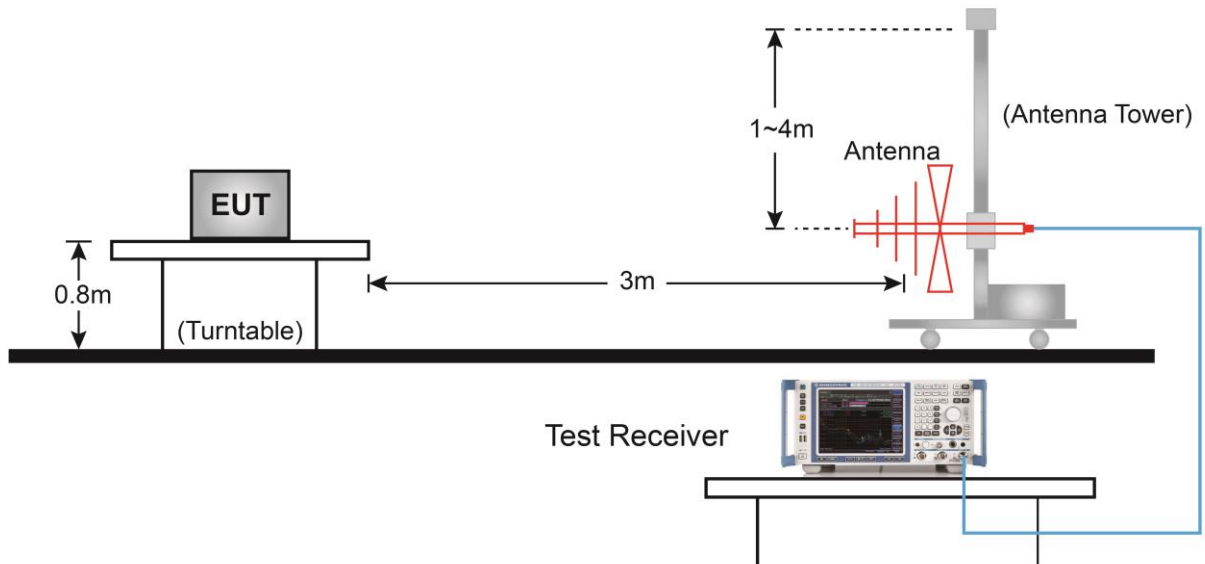


Above 1GHz Test Setup:

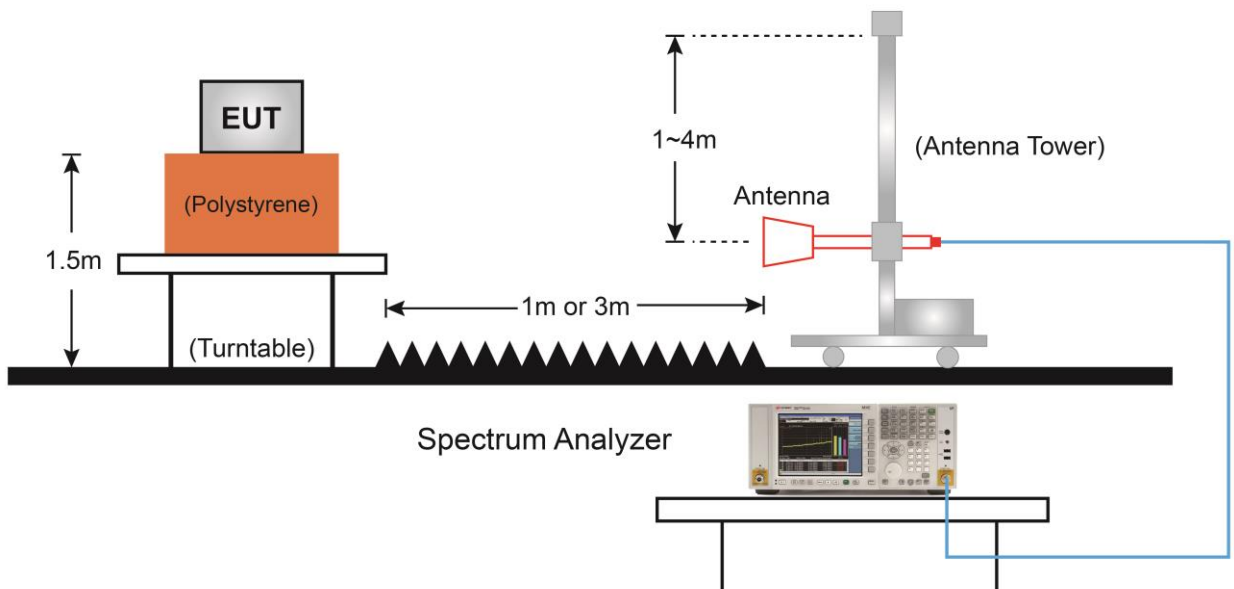

7.6.5. Test Result

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-07-29
Factor	VULB 9162	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

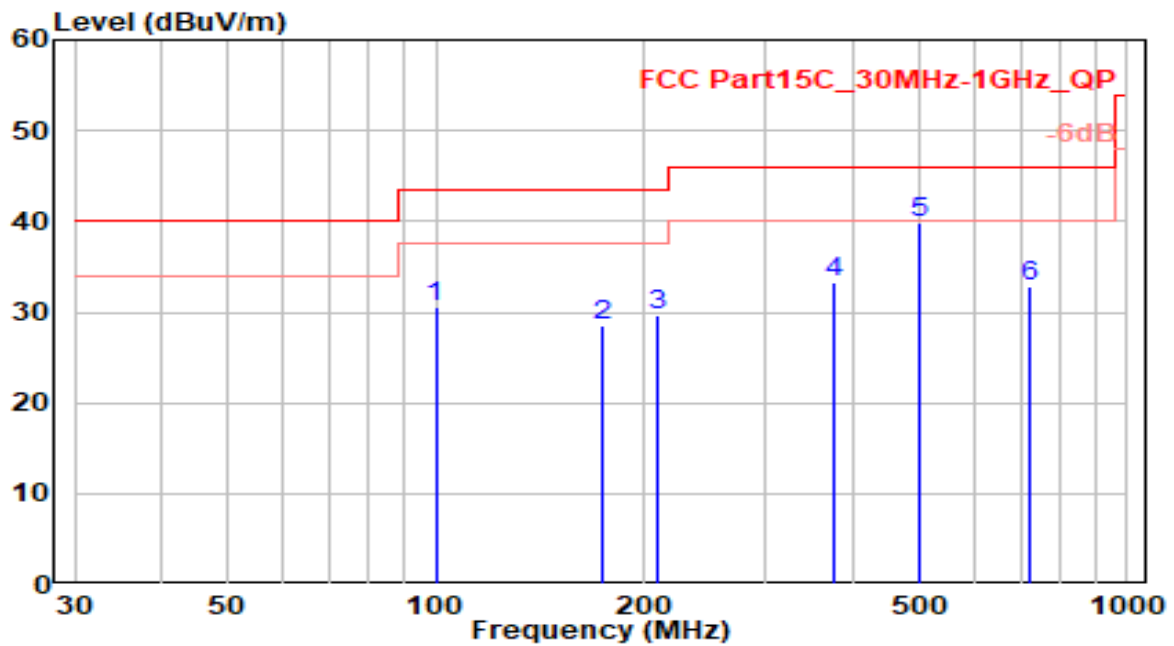


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	99.840	11.35	19.29	30.65	-12.85	43.50	100	70	QP
2	173.560	11.67	16.82	28.49	-15.01	43.50	100	330	QP
3	208.480	11.01	18.65	29.66	-13.84	43.50	100	340	QP
4	375.320	9.79	23.50	33.29	-12.71	46.00	100	205	QP
5	* 500.450	14.16	25.73	39.89	-6.11	46.00	100	180	QP
6	724.520	3.56	29.26	32.81	-13.19	46.00	100	90	QP

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-07-29
Factor	VULB 9162	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

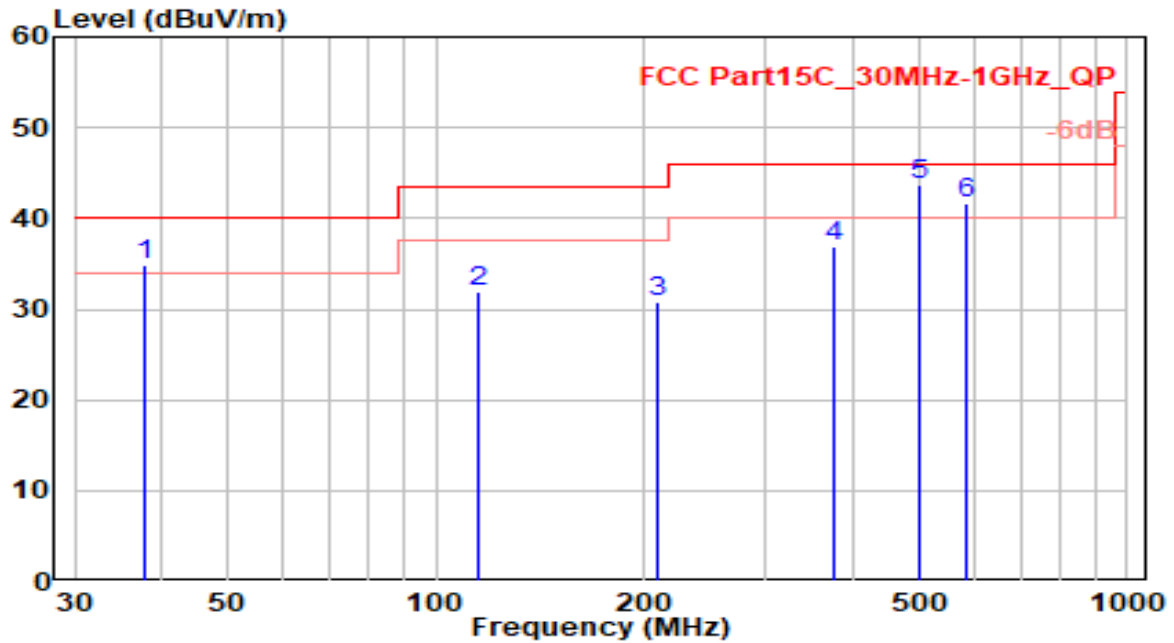


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	37.760	15.28	19.59	34.87	-5.13	40.00	100	320	QP
2	115.360	13.65	18.17	31.82	-11.68	43.50	100	40	QP
3	209.450	12.08	18.64	30.72	-12.78	43.50	100	0	QP
4	375.320	13.37	23.50	36.87	-9.13	46.00	100	65	QP
5	* 500.450	17.90	25.73	43.63	-2.37	46.00	100	190	QP
6	584.840	14.24	27.31	41.55	-4.45	46.00	100	310	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

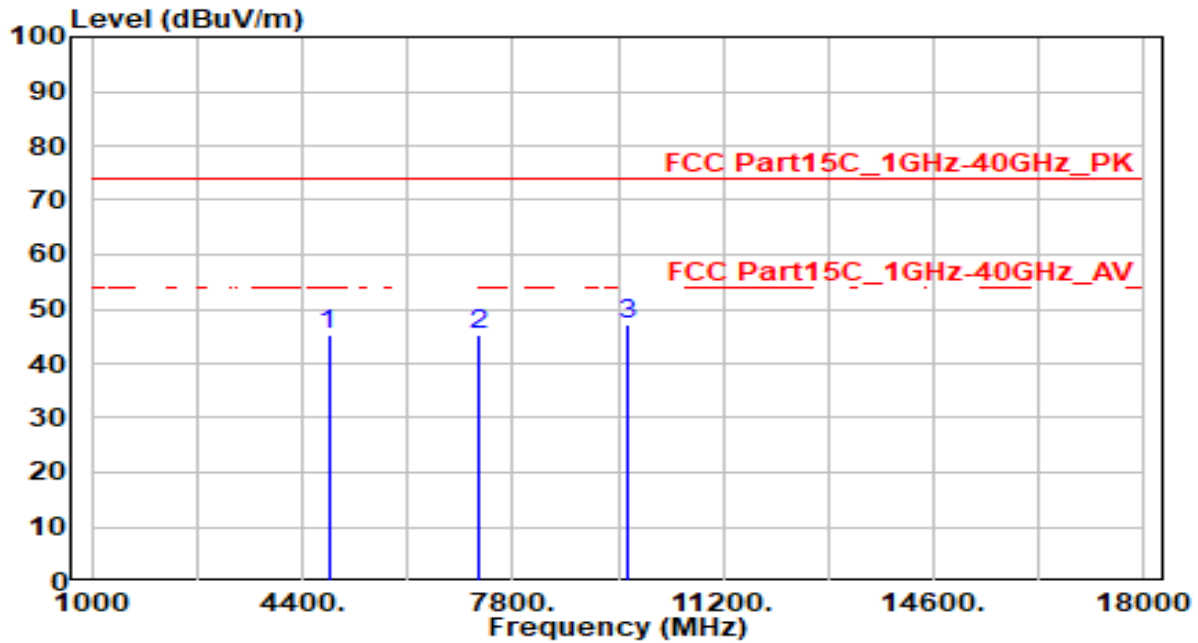


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	44.86	0.25	45.11	-28.89	74.00	200	35	Peak
2	7236.000	39.61	5.81	45.42	-28.58	74.00	100	130	Peak
3	* 9648.000	41.79	5.32	47.12	-26.88	74.00	200	335	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

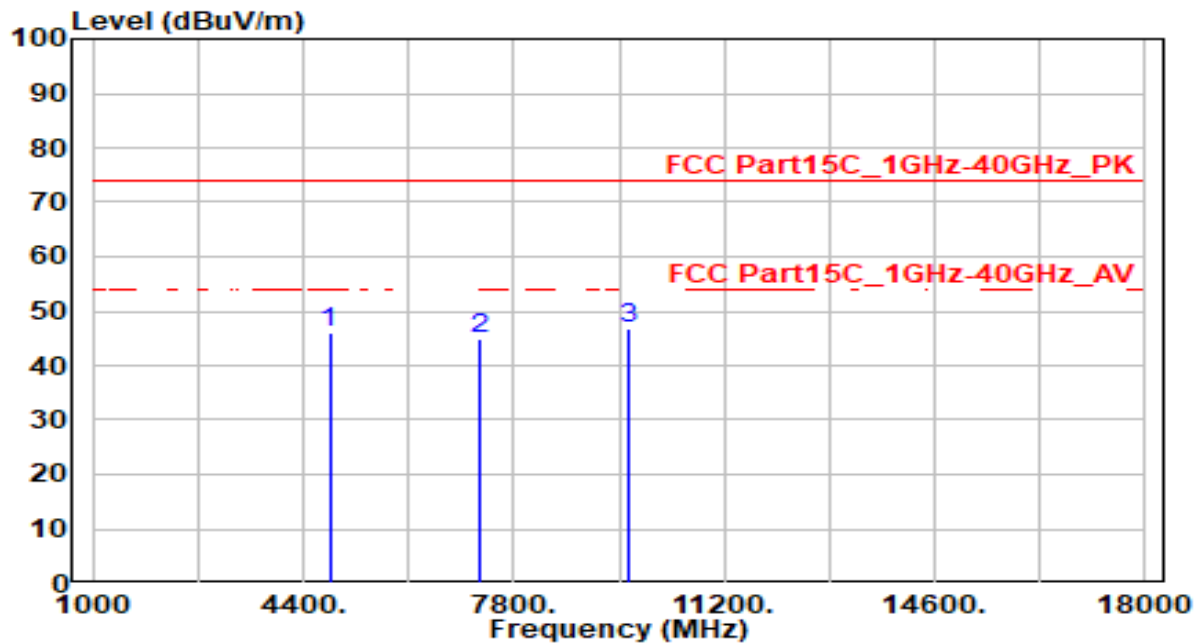


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	45.83	0.25	46.08	-27.92	74.00	100	125	Peak
2	7236.000	38.95	5.81	44.76	-29.24	74.00	100	350	Peak
3	* 9648.000	41.30	5.32	46.62	-27.38	74.00	200	85	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

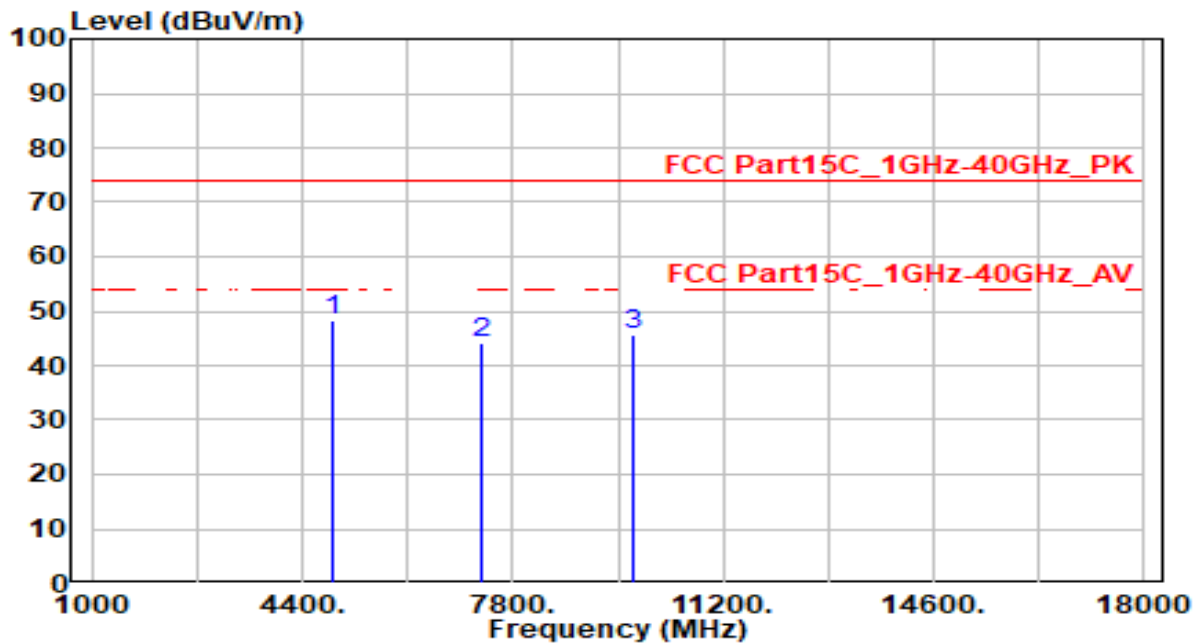


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4874.000	47.88	0.35	48.23	-25.77	74.00	100	355	Peak
2		7311.000	38.38	5.79	44.17	-29.83	74.00	100	360	Peak
3		9748.000	40.46	5.34	45.80	-28.20	74.00	100	190	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

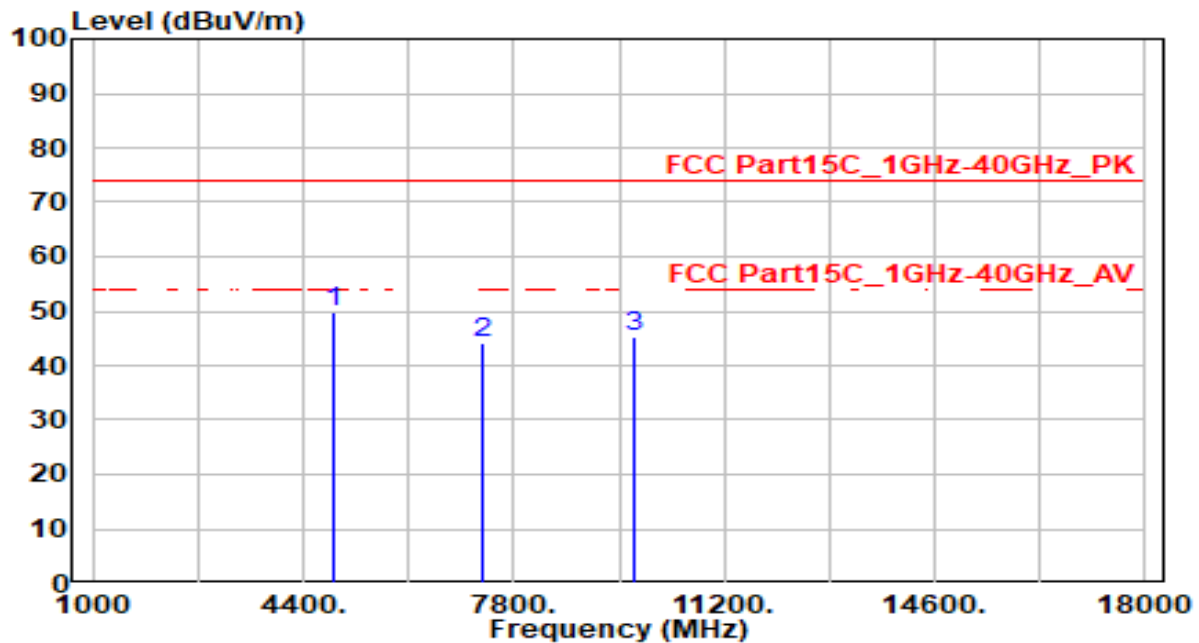


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4874.000	49.48	0.35	49.83	-24.17	74.00	100	170	Peak
2		7311.000	38.24	5.79	44.03	-29.97	74.00	100	80	Peak
3		9748.000	40.11	5.34	45.45	-28.55	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

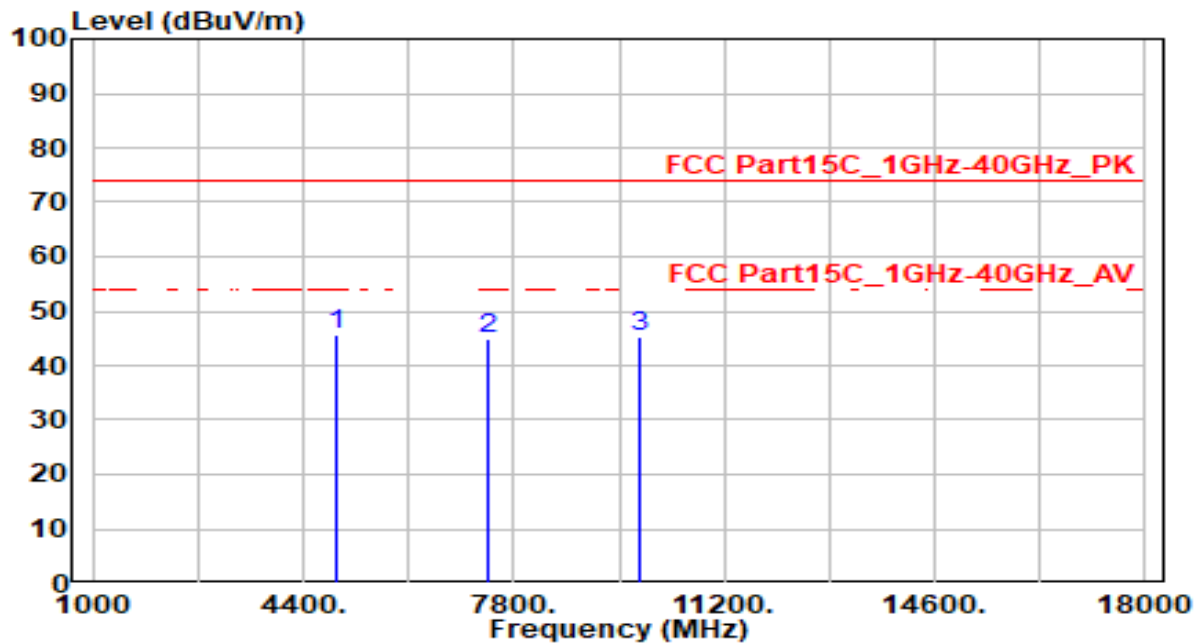


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4924.000	45.23	0.45	45.68	-28.32	74.00	100	35	Peak
2		7386.000	39.12	5.77	44.89	-29.11	74.00	100	355	Peak
3		9848.000	39.92	5.38	45.30	-28.70	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

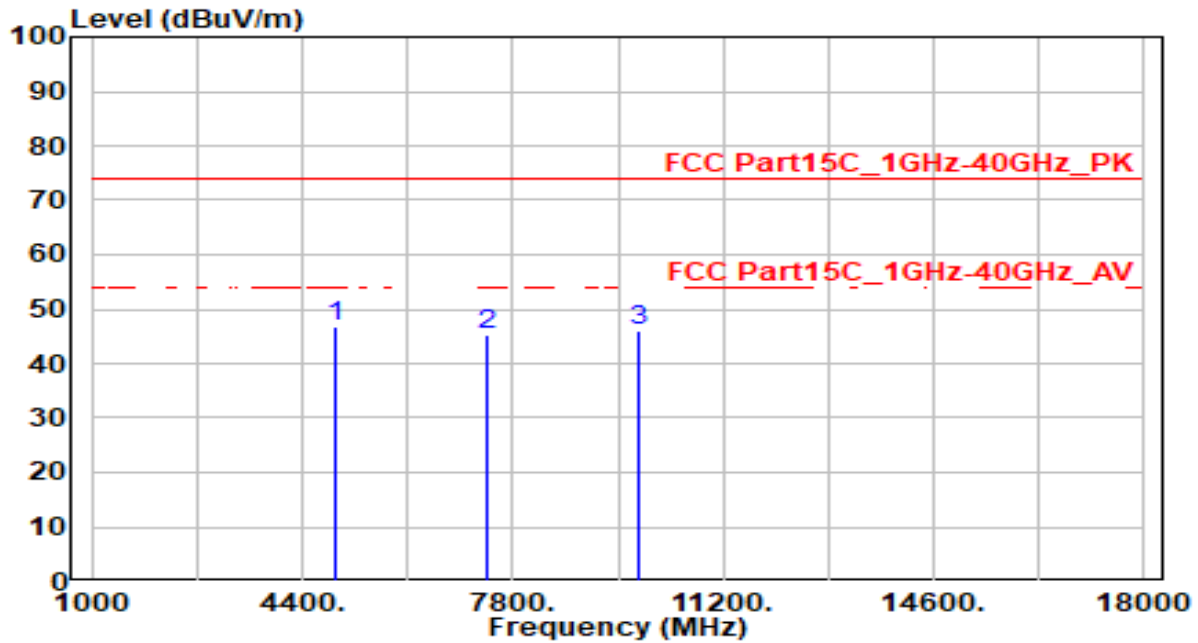


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4924.000	46.52	0.45	46.98	-27.02	74.00	100	180	Peak
2		7386.000	39.39	5.77	45.17	-28.83	74.00	100	310	Peak
3		9848.000	40.58	5.38	45.96	-28.04	74.00	100	225	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

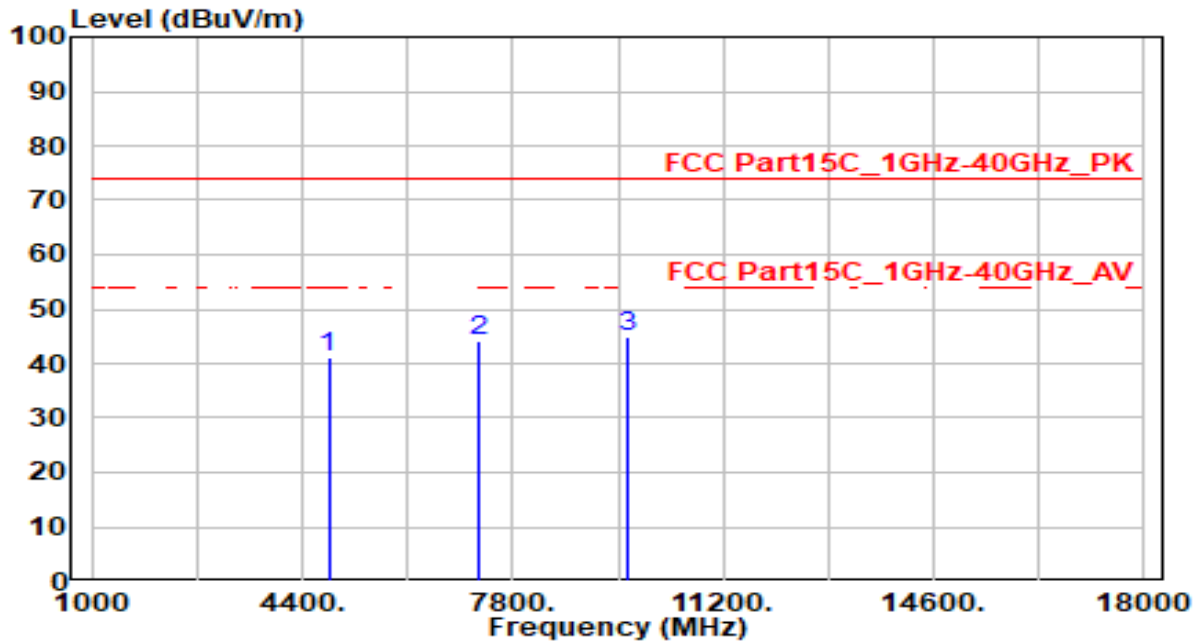


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	40.98	0.25	41.23	-32.77	74.00	100	260	Peak
2	7236.000	38.26	5.81	44.08	-29.92	74.00	100	360	Peak
3	* 9648.000	39.46	5.32	44.78	-29.22	74.00	100	320	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

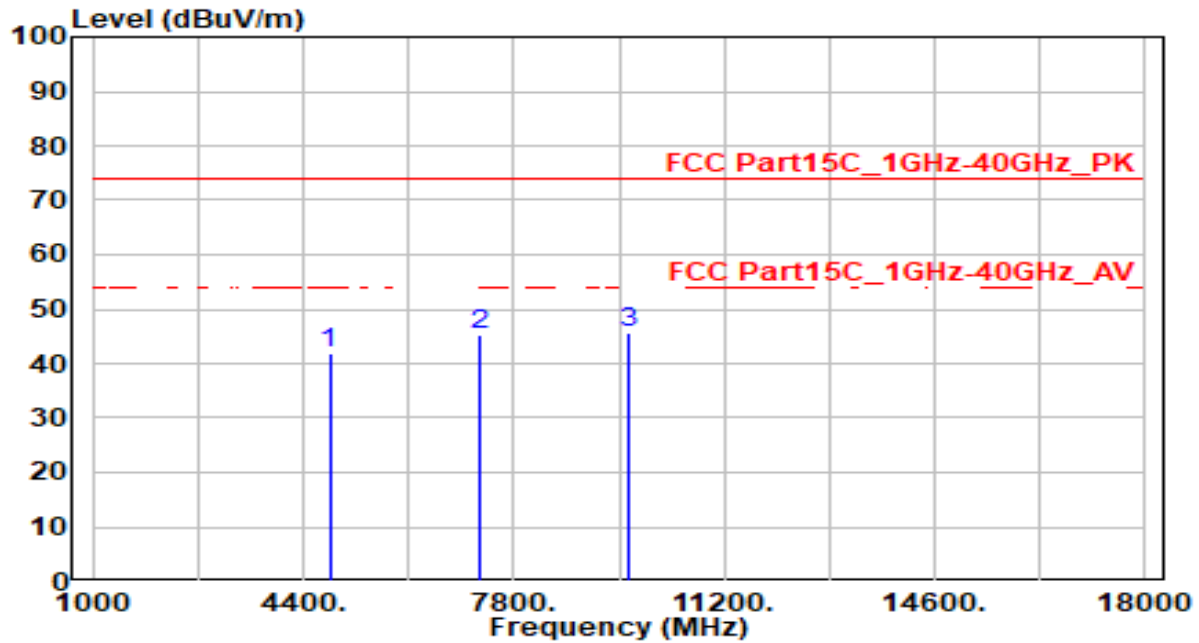


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	41.62	0.25	41.87	-32.13	74.00	100	150	Peak
2	7236.000	39.30	5.81	45.12	-28.88	74.00	100	125	Peak
3	* 9648.000	40.17	5.32	45.49	-28.51	74.00	100	290	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

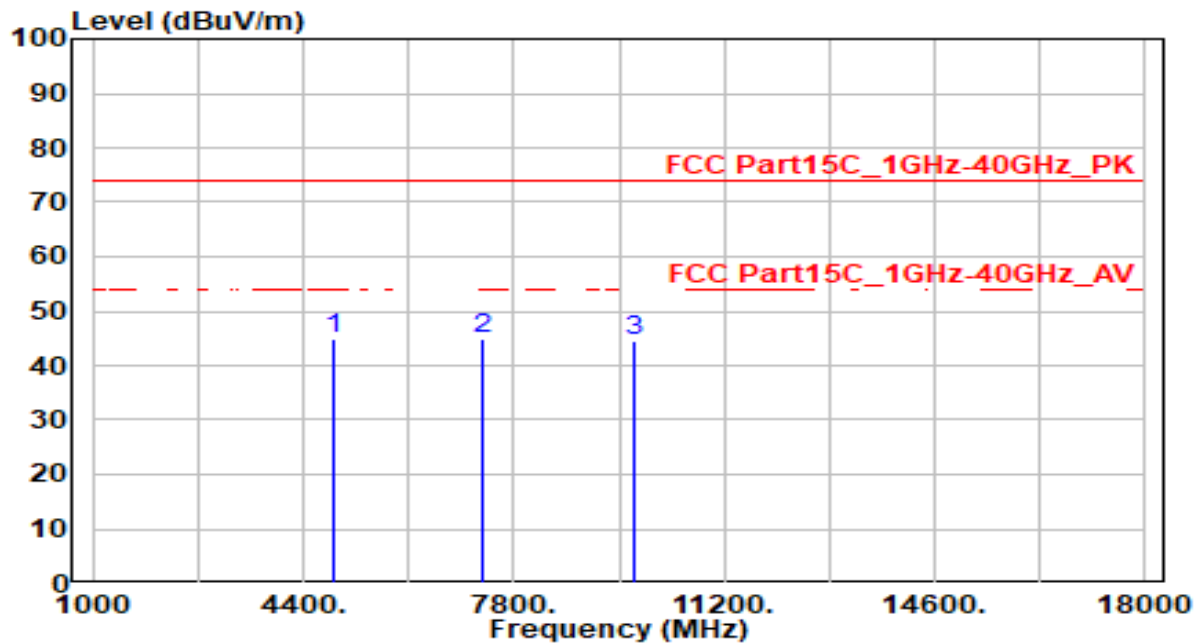


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	44.37	0.35	44.72	-29.28	74.00	100	350	Peak
2	* 7311.000	39.04	5.79	44.83	-29.17	74.00	100	90	Peak
3	9748.000	39.08	5.34	44.42	-29.58	74.00	100	45	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

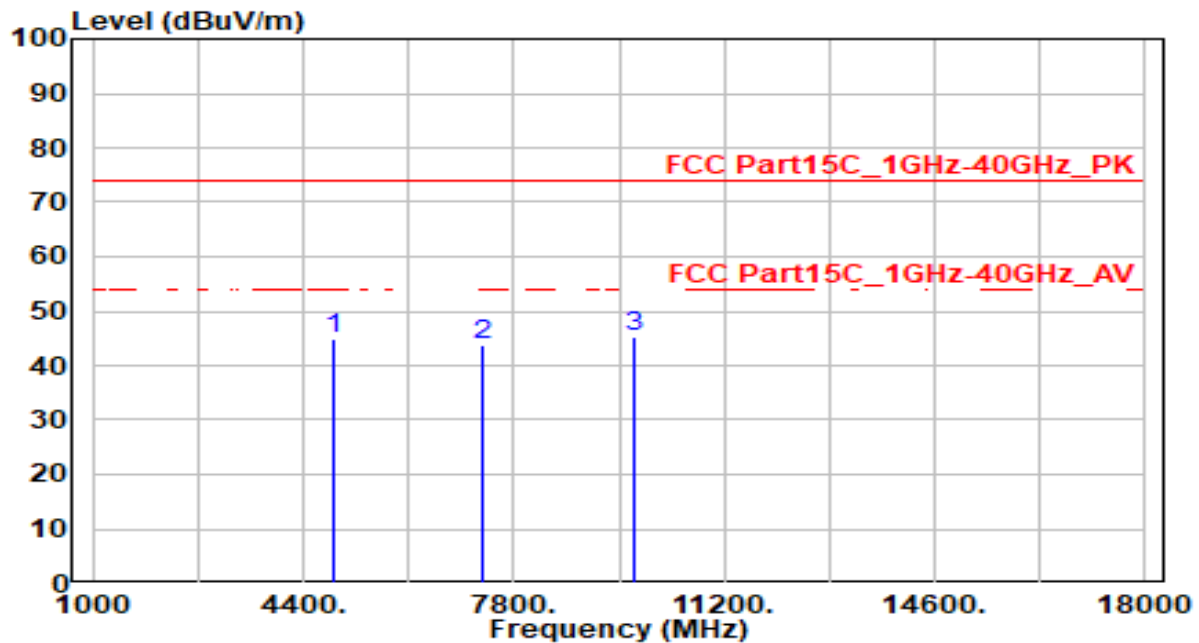


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	44.70	0.35	45.06	-28.94	74.00	100	180	Peak
2	7311.000	37.97	5.79	43.77	-30.23	74.00	100	210	Peak
3	* 9748.000	40.00	5.34	45.34	-28.66	74.00	100	100	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

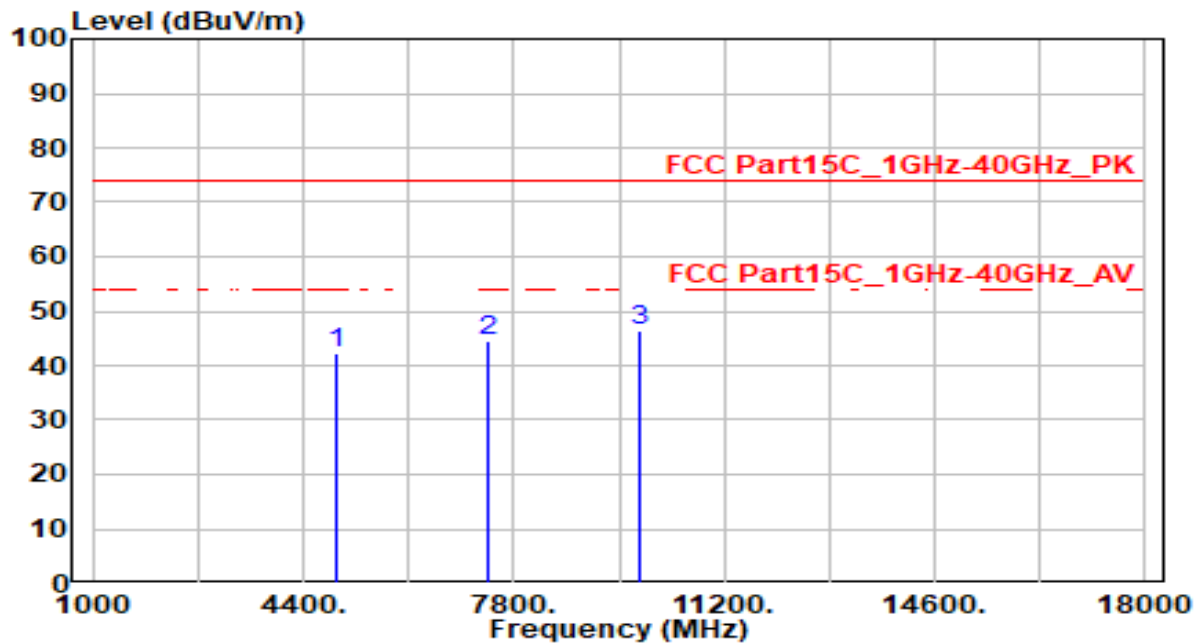


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	41.69	0.45	42.14	-31.86	74.00	100	115	Peak
2	7386.000	38.61	5.77	44.38	-29.62	74.00	100	280	Peak
3	* 9848.000	40.86	5.38	46.24	-27.76	74.00	100	300	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

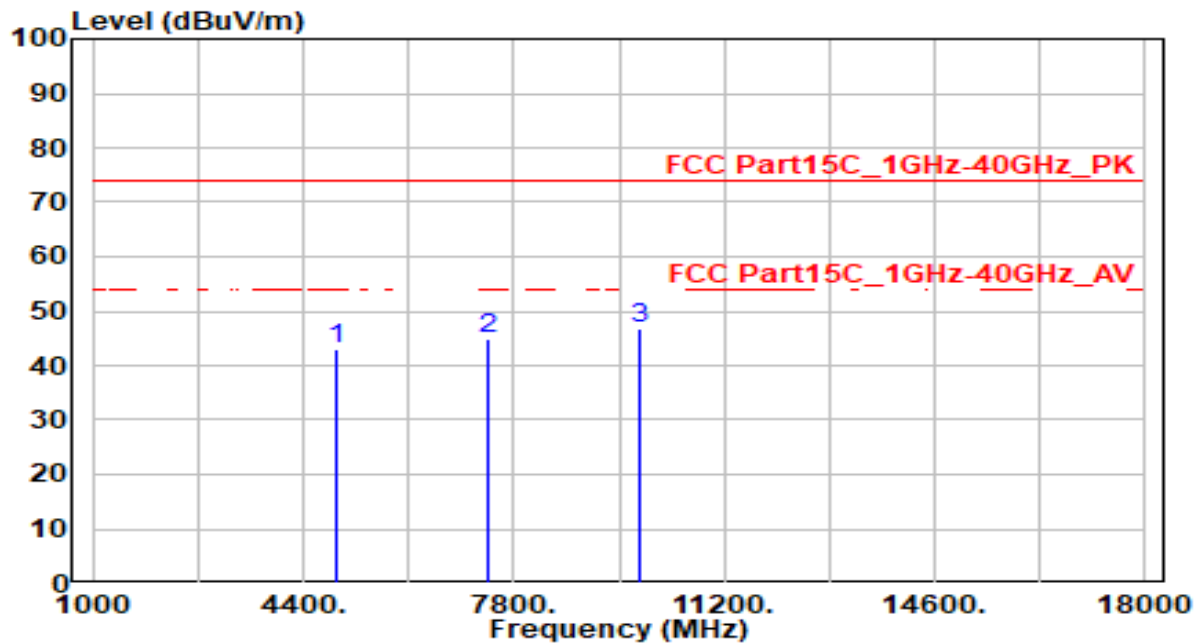


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	42.71	0.45	43.16	-30.84	74.00	100	175	Peak
2	7386.000	39.10	5.77	44.87	-29.13	74.00	100	300	Peak
3	* 9848.000	41.44	5.38	46.81	-27.19	74.00	100	250	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

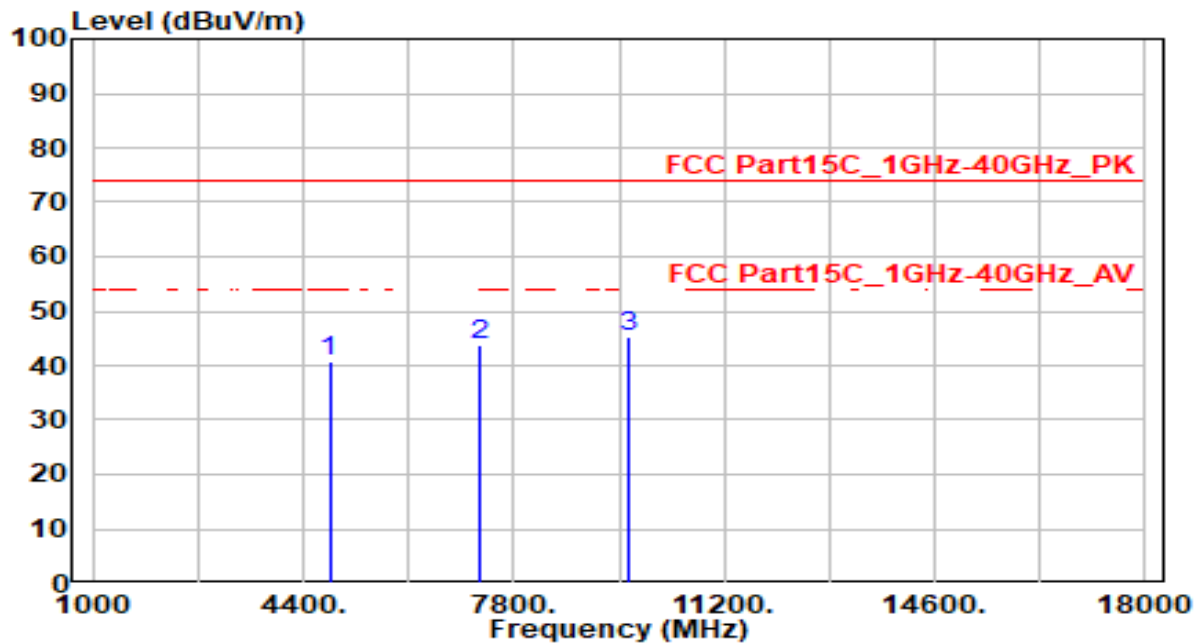


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	40.61	0.25	40.86	-33.14	74.00	100	280	Peak
2	7236.000	38.14	5.81	43.95	-30.05	74.00	100	75	Peak
3	* 9648.000	39.85	5.32	45.17	-28.83	74.00	100	130	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

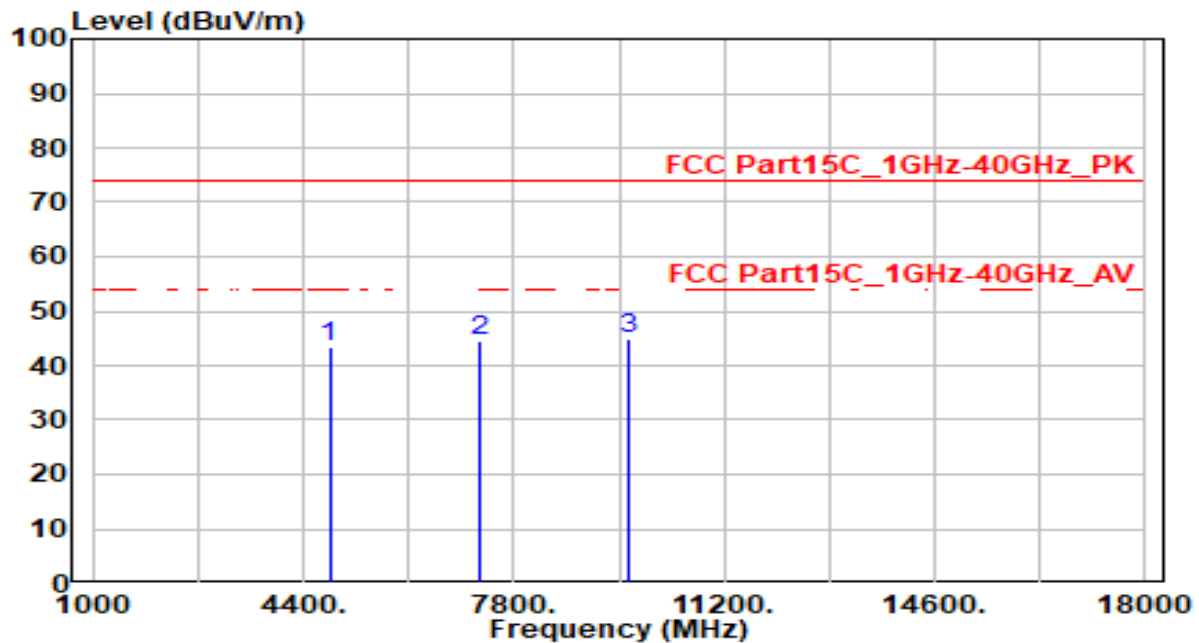


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	43.05	0.25	43.30	-30.70	74.00	100	230	Peak
2	7236.000	38.56	5.81	44.37	-29.63	74.00	100	110	Peak
3	* 9648.000	39.75	5.32	45.07	-28.93	74.00	100	265	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

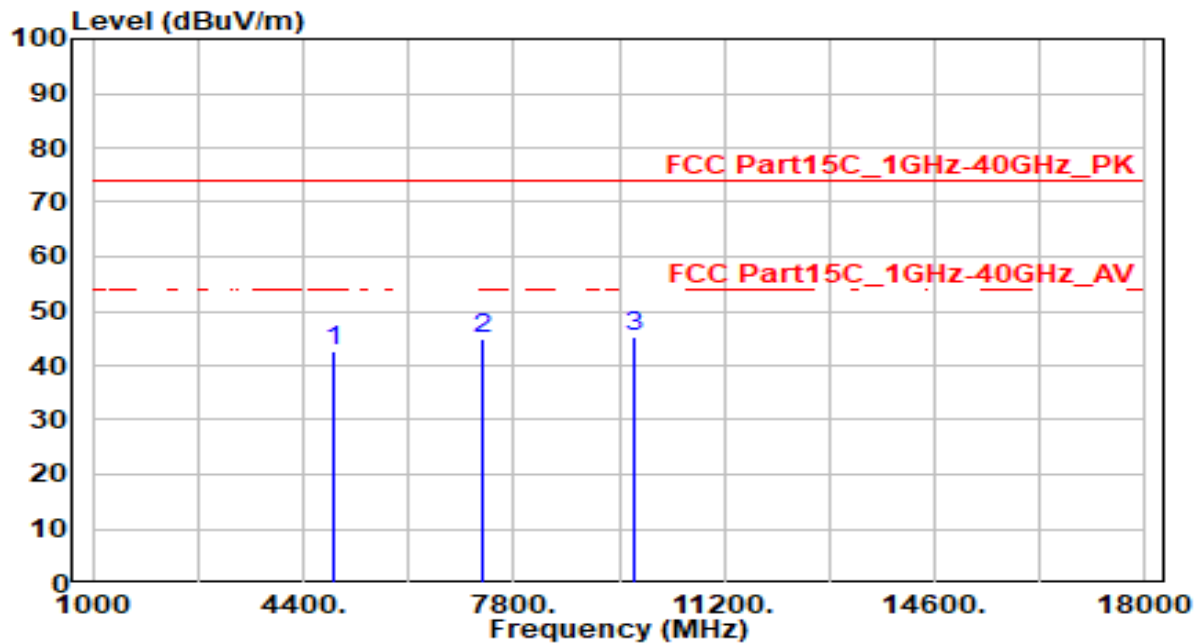


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	42.23	0.35	42.58	-31.42	74.00	100	345	Peak
2	7311.000	39.09	5.79	44.88	-29.12	74.00	100	115	Peak
3	* 9748.000	40.01	5.34	45.35	-28.65	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

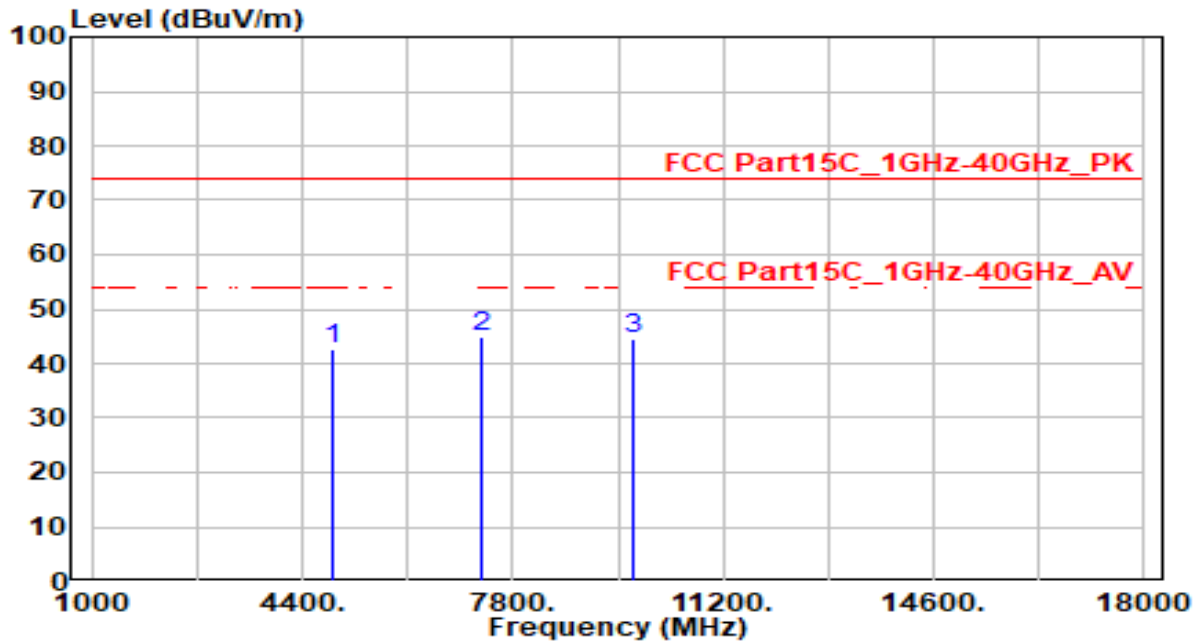


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	42.28	0.35	42.64	-31.36	74.00	100	200	Peak
2	* 7311.000	39.18	5.79	44.97	-29.03	74.00	100	360	Peak
3	9748.000	39.24	5.34	44.58	-29.42	74.00	100	280	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

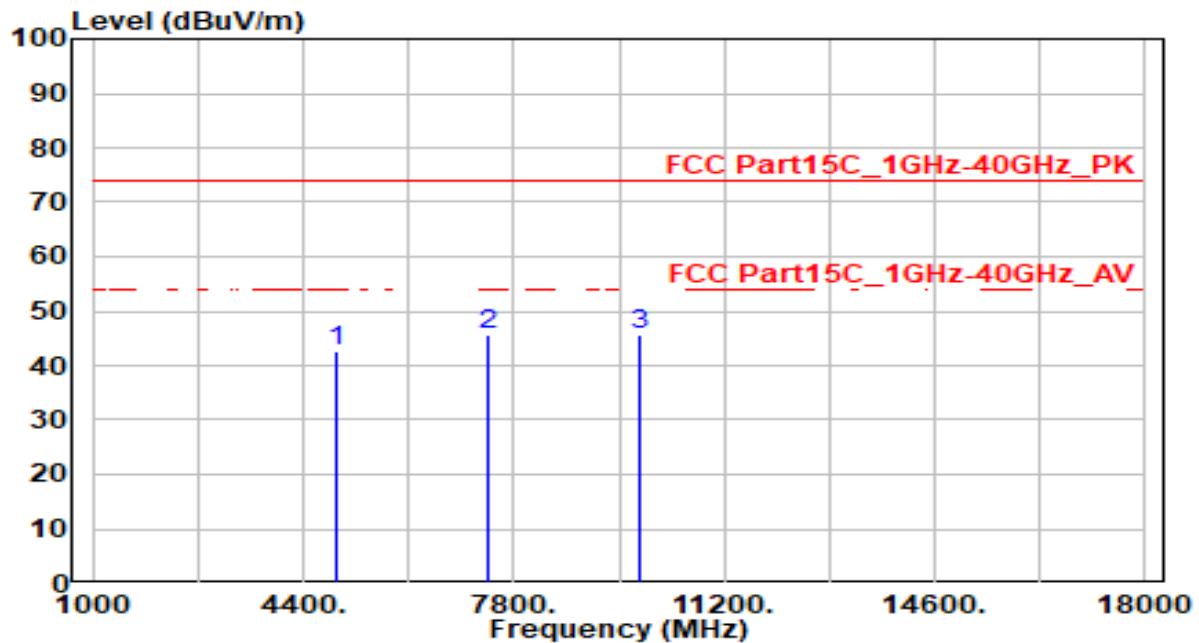


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	42.12	0.45	42.57	-31.43	74.00	100	120	Peak
2	7386.000	39.81	5.77	45.58	-28.42	74.00	100	315	Peak
3	* 9848.000	40.47	5.38	45.85	-28.15	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

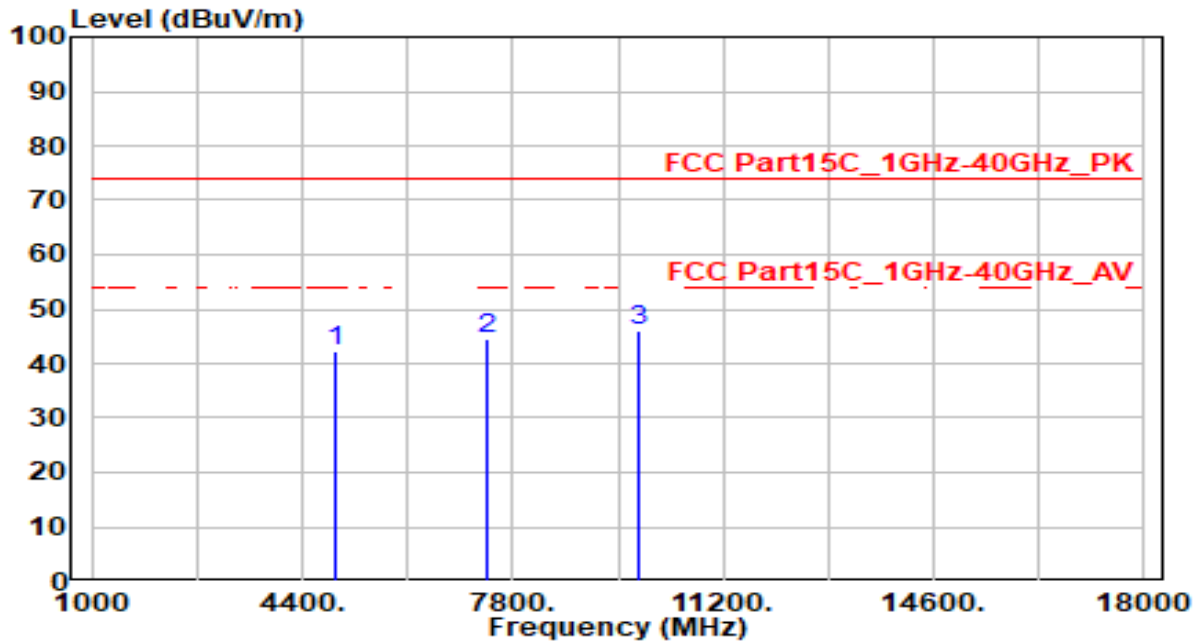


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	41.93	0.45	42.38	-31.62	74.00	100	275	Peak
2	7386.000	38.66	5.77	44.43	-29.57	74.00	100	230	Peak
3	* 9848.000	40.59	5.38	45.97	-28.03	74.00	100	340	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

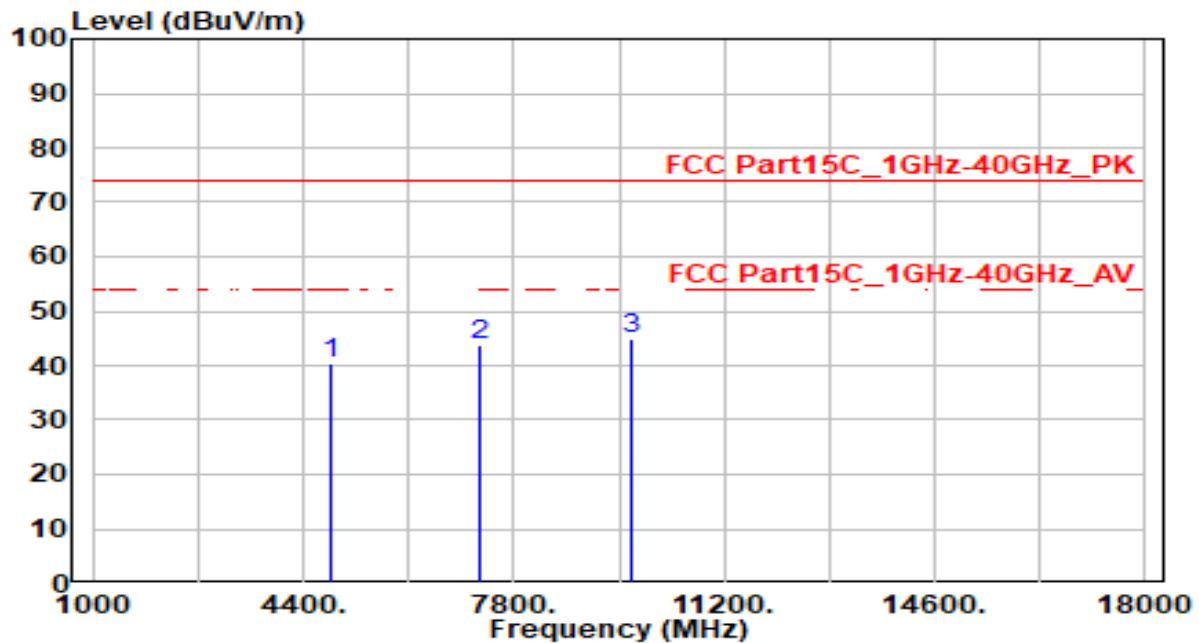


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	40.20	0.29	40.49	-33.51	74.00	100	360	Peak
2	7266.000	38.11	5.81	43.92	-30.08	74.00	100	200	Peak
3	* 9688.000	39.69	5.33	45.02	-28.98	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

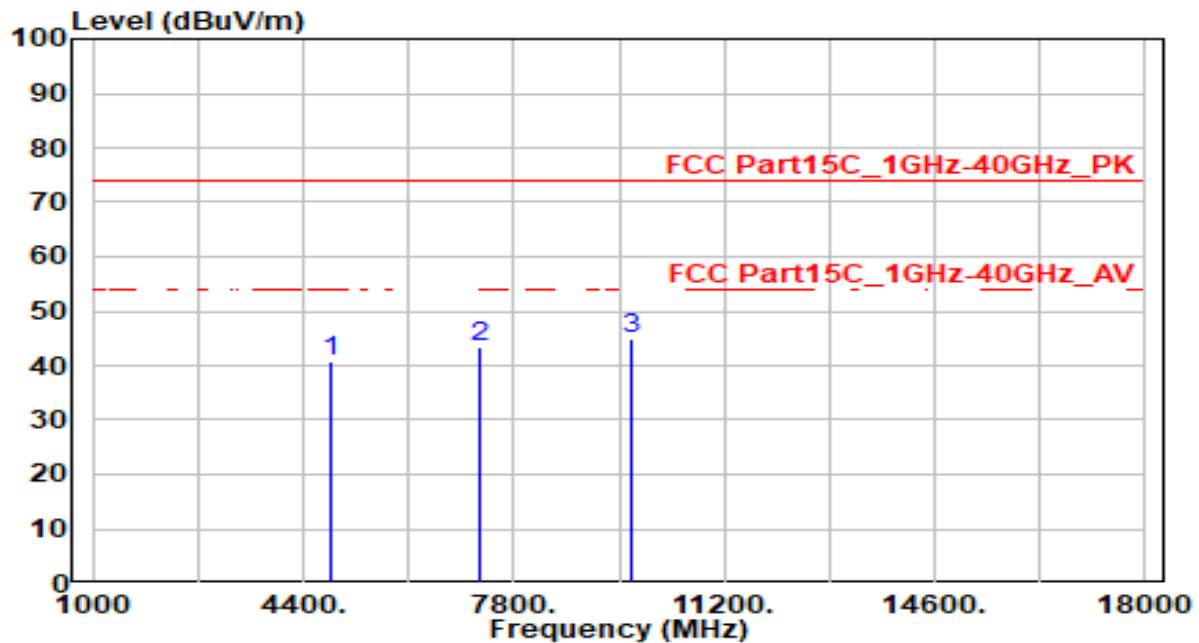


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	40.55	0.29	40.84	-33.16	74.00	100	210	Peak
2	7266.000	37.73	5.81	43.53	-30.47	74.00	100	130	Peak
3	* 9688.000	39.70	5.33	45.03	-28.97	74.00	100	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

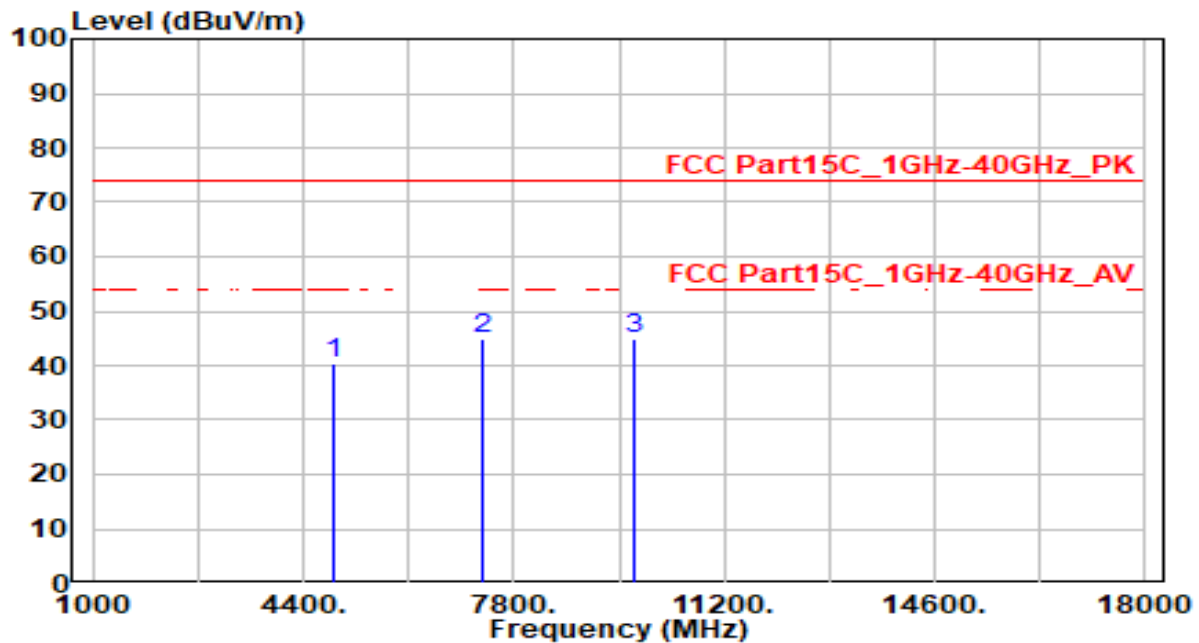


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.05	0.35	40.40	-33.60	74.00	100	175	Peak
2	7311.000	39.05	5.79	44.84	-29.16	74.00	100	5	Peak
3	* 9748.000	39.60	5.34	44.94	-29.06	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

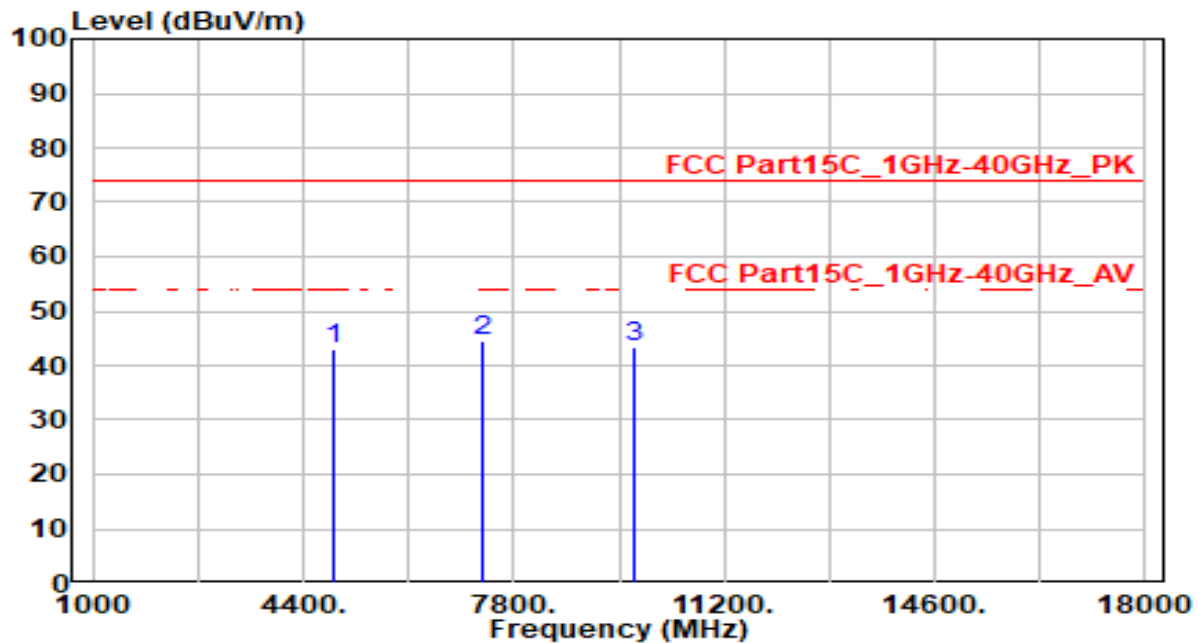


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	42.59	0.35	42.94	-31.06	74.00	100	170	Peak
2	* 7311.000	38.64	5.79	44.43	-29.57	74.00	100	255	Peak
3	9748.000	38.19	5.34	43.53	-30.47	74.00	100	65	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

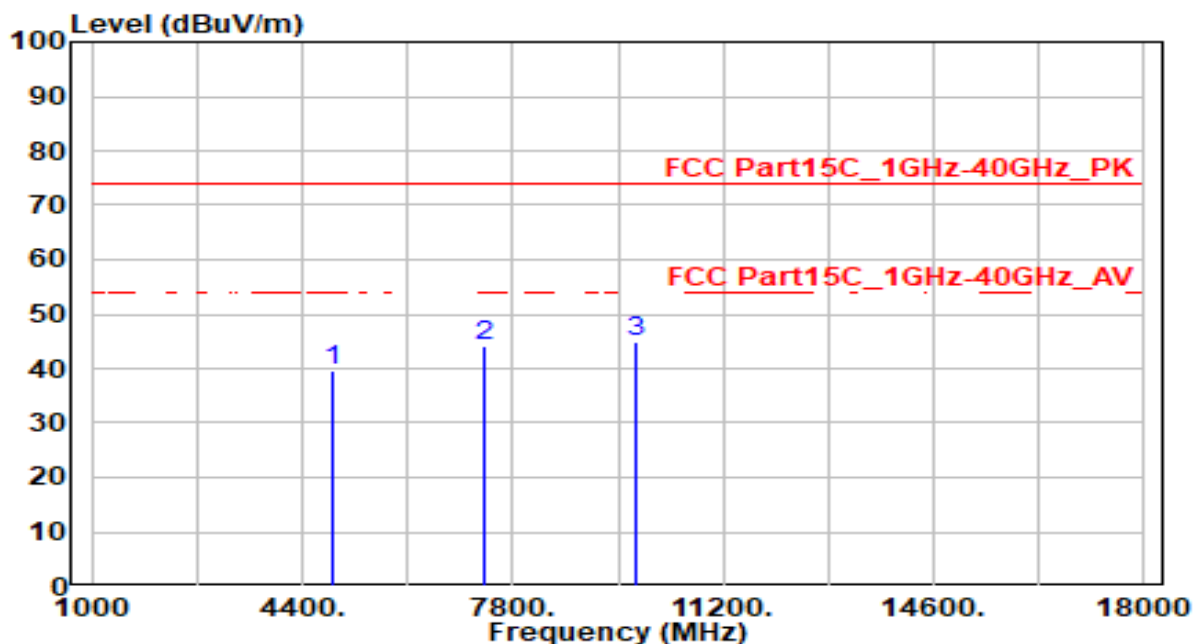


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	39.36	0.41	39.78	-34.22	74.00	100	200	Peak
2	7356.000	38.32	5.78	44.10	-29.90	74.00	100	355	Peak
3	* 9808.000	39.55	5.35	44.90	-29.10	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

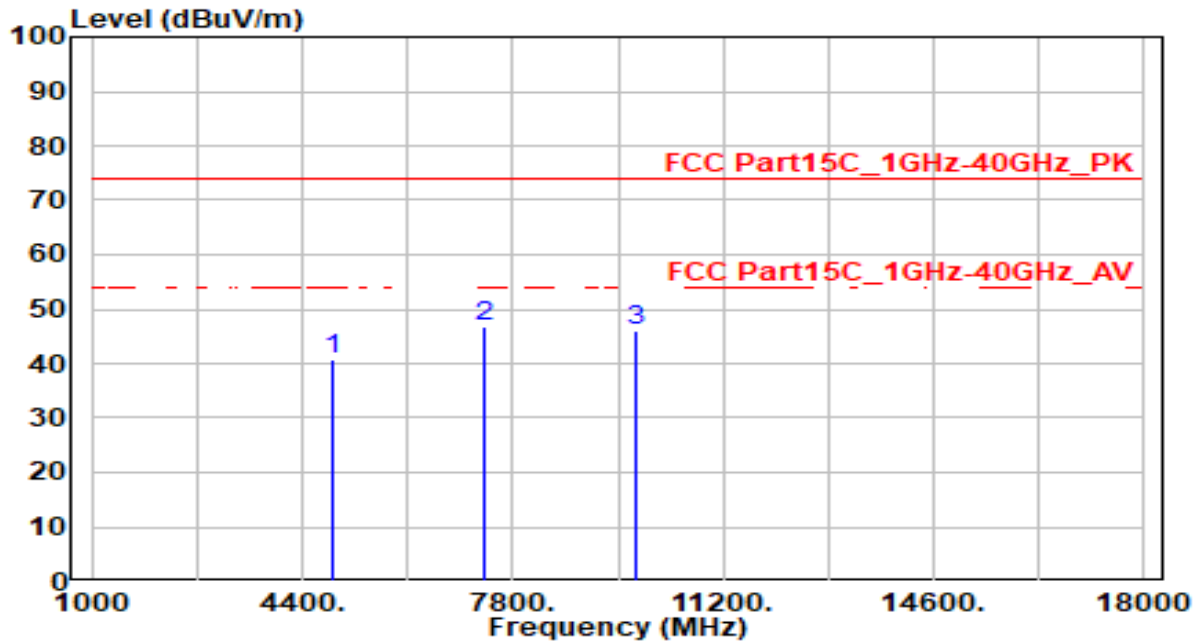


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	40.21	0.41	40.62	-33.38	74.00	100	180	Peak
2	* 7356.000	41.04	5.78	46.82	-27.18	74.00	100	260	Peak
3	9808.000	40.51	5.35	45.86	-28.14	74.00	100	75	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

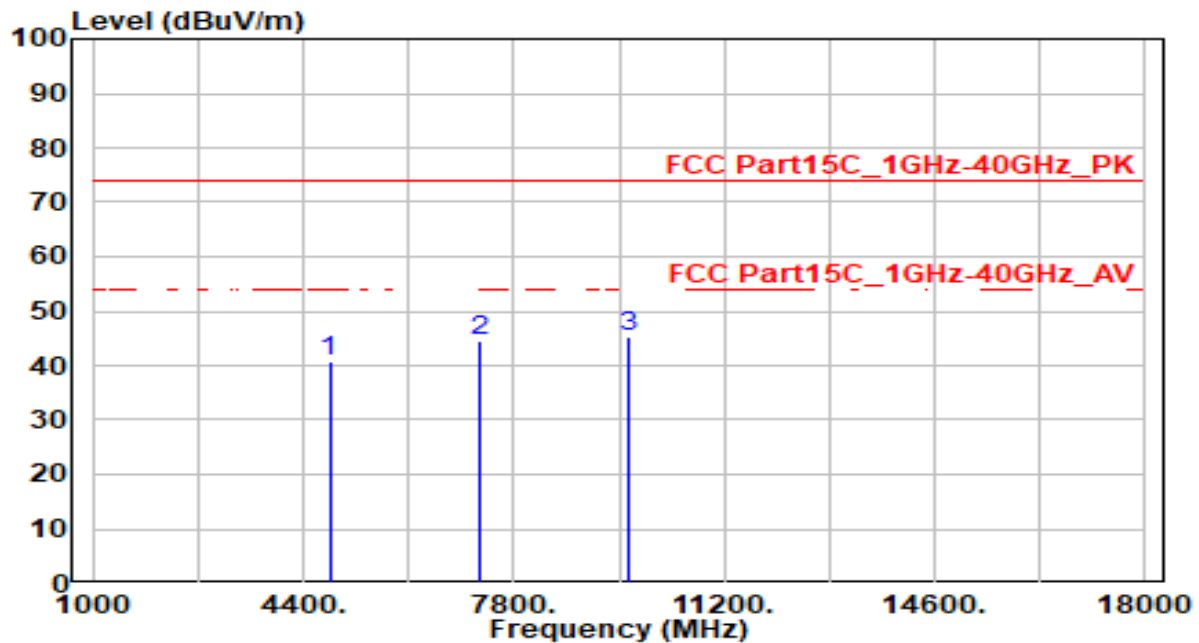


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	40.47	0.25	40.72	-33.28	74.00	100	200	Peak
2	7236.000	38.71	5.81	44.53	-29.47	74.00	100	260	Peak
3	* 9648.000	39.95	5.32	45.27	-28.73	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

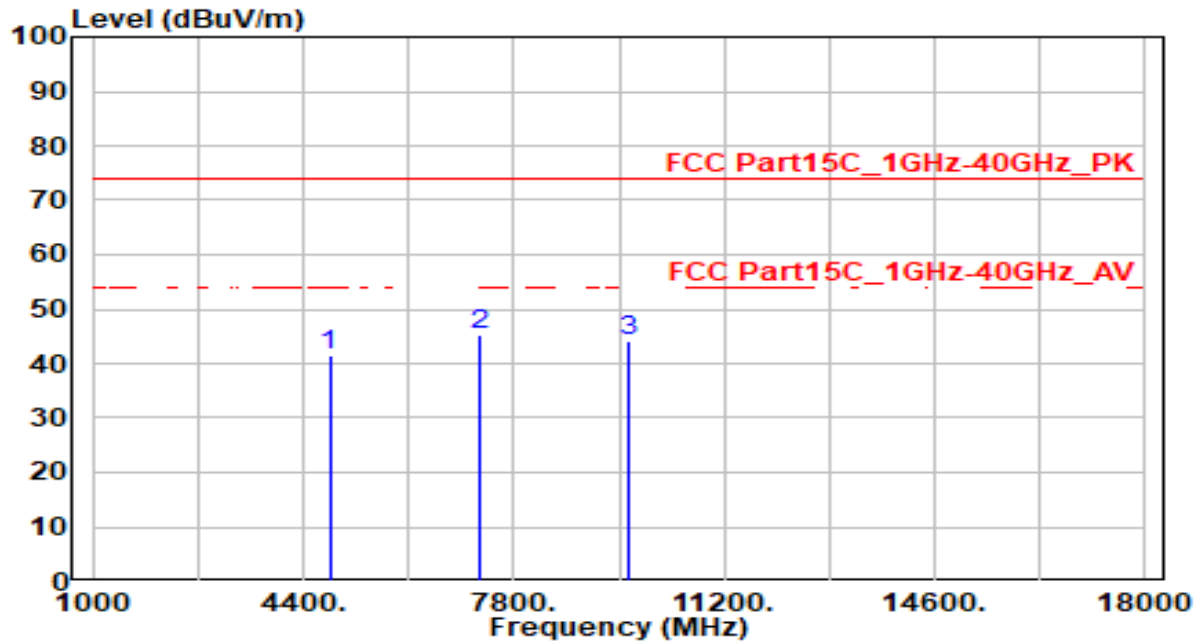


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	41.32	0.25	41.57	-32.43	74.00	100	270	Peak
2	* 7236.000	39.30	5.81	45.11	-28.89	74.00	100	240	Peak
3	9648.000	38.91	5.32	44.23	-29.77	74.00	100	65	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

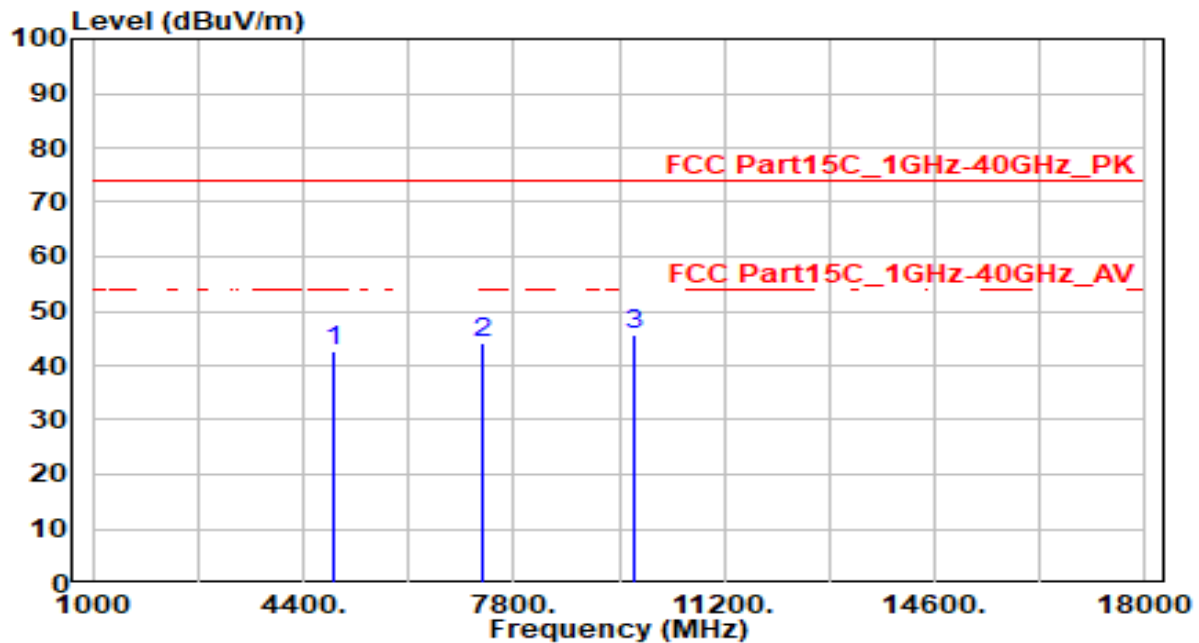


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	42.37	0.35	42.72	-31.28	74.00	100	345	Peak
2	7311.000	38.47	5.79	44.27	-29.73	74.00	100	205	Peak
3	* 9748.000	40.21	5.34	45.55	-28.45	74.00	100	225	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

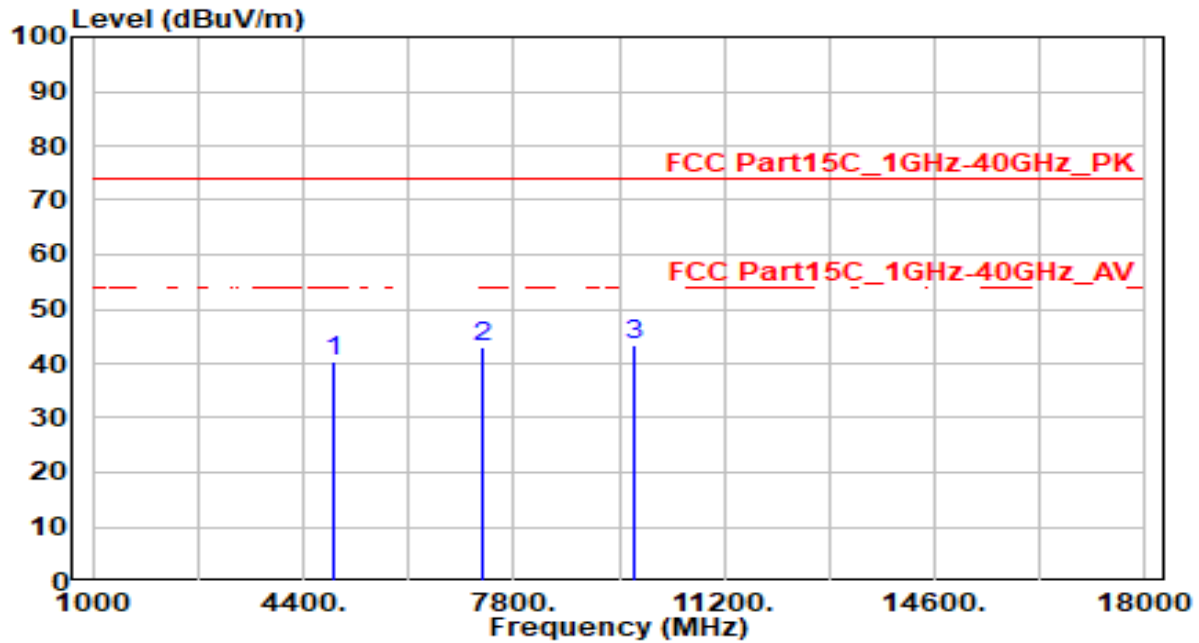


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	39.99	0.35	40.35	-33.65	74.00	100	0	Peak
2	7311.000	37.14	5.79	42.93	-31.07	74.00	100	220	Peak
3	* 9748.000	38.19	5.34	43.53	-30.47	74.00	100	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

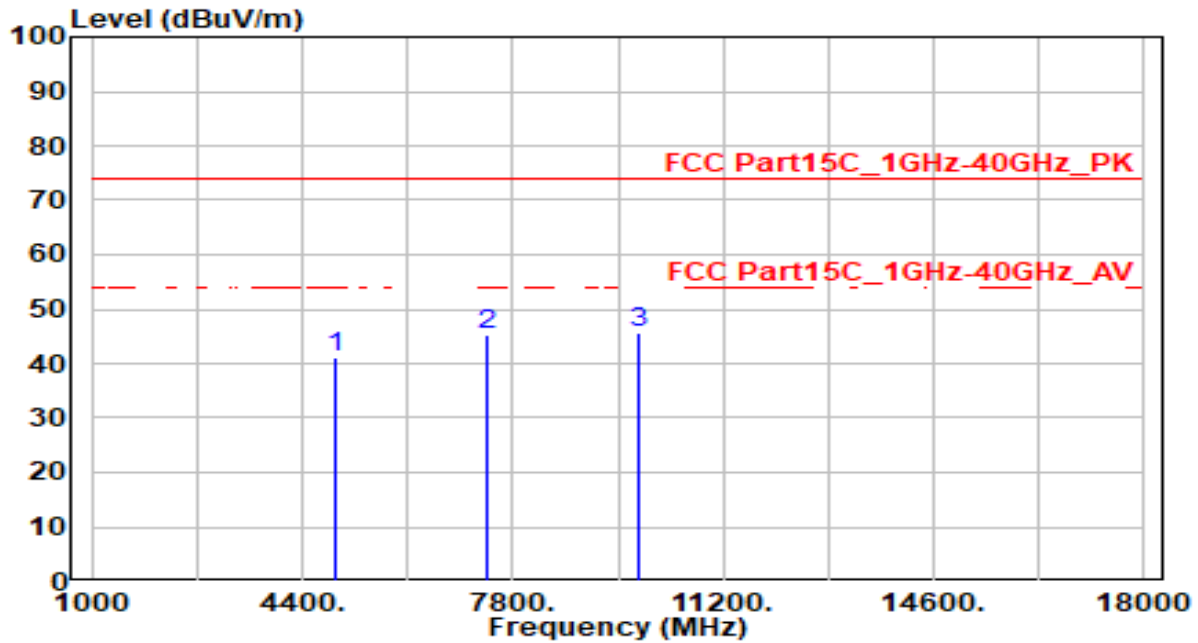


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	40.82	0.45	41.27	-32.73	74.00	100	125	Peak
2	7386.000	39.34	5.77	45.11	-28.89	74.00	100	240	Peak
3	* 9848.000	40.10	5.38	45.48	-28.52	74.00	100	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

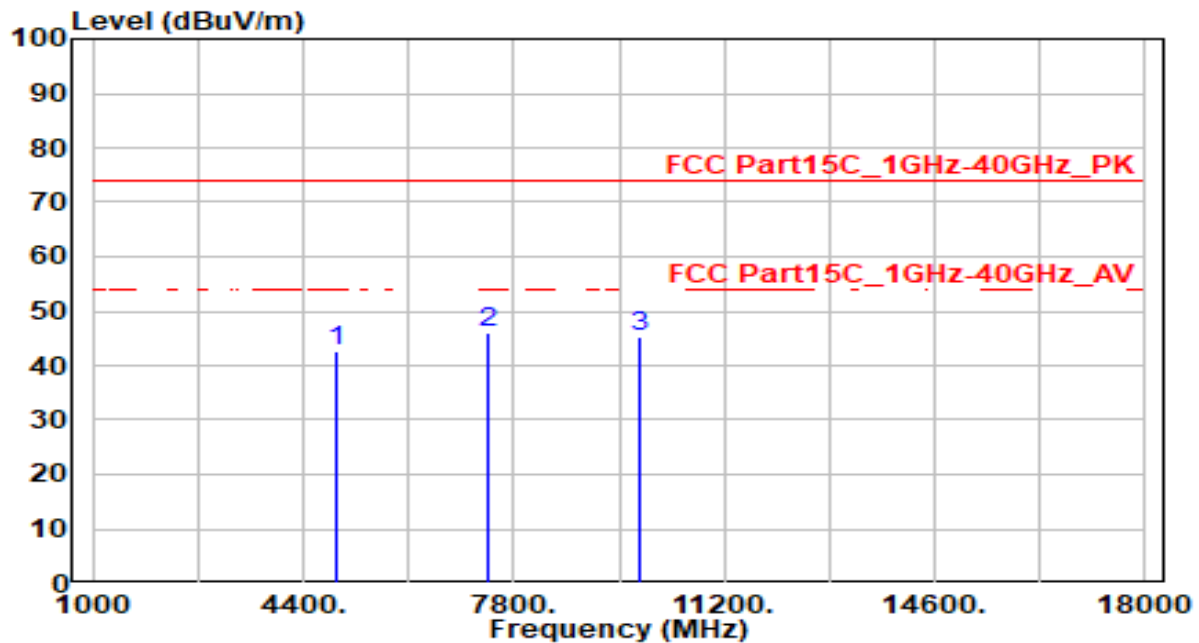


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	42.23	0.45	42.68	-31.32	74.00	100	155	Peak
2	* 7386.000	40.22	5.77	45.99	-28.01	74.00	100	0	Peak
3	9848.000	39.96	5.38	45.34	-28.66	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

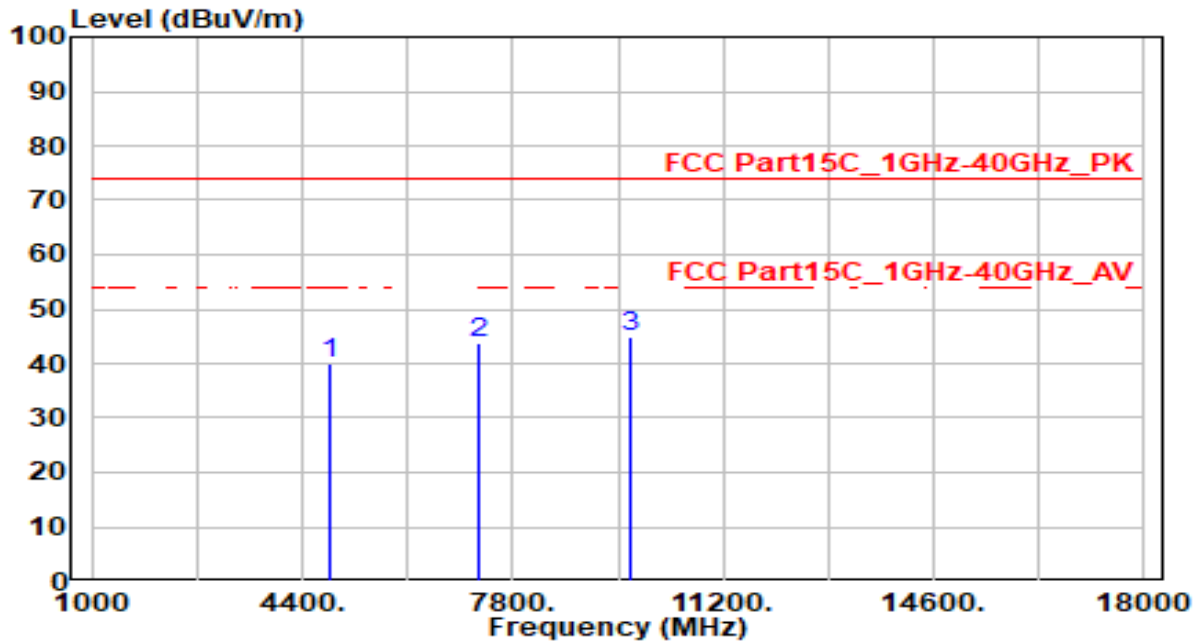


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	39.78	0.29	40.07	-33.93	74.00	100	250	Peak
2	7266.000	37.86	5.81	43.66	-30.34	74.00	100	30	Peak
3	* 9688.000	39.53	5.33	44.86	-29.14	74.00	100	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

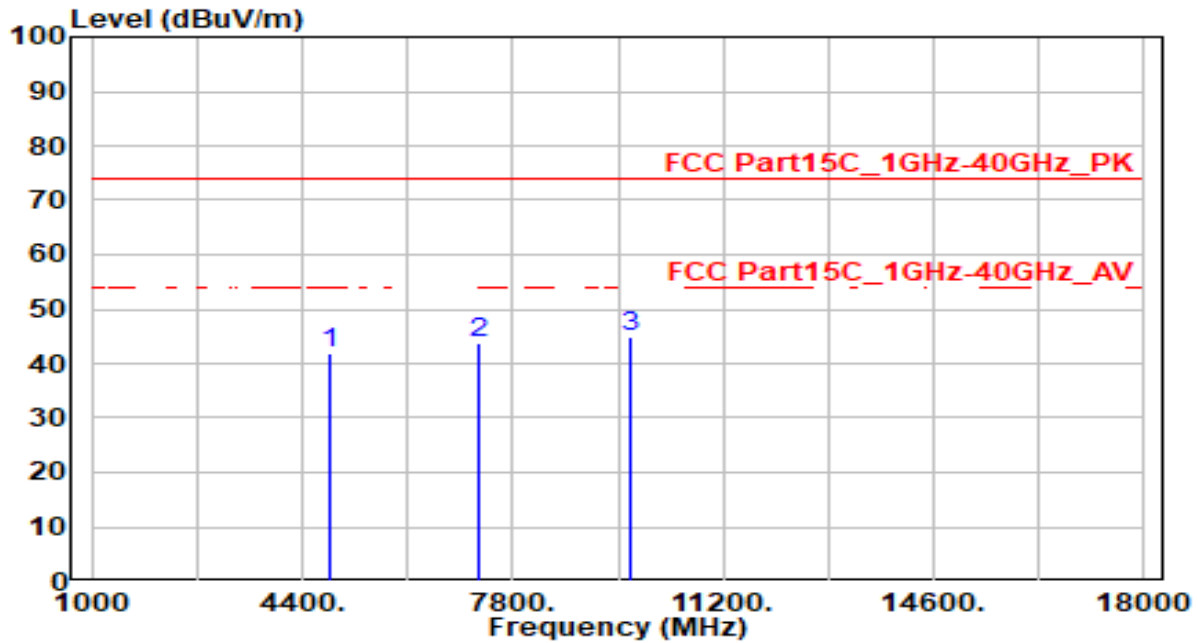


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	41.66	0.29	41.95	-32.05	74.00	100	165	Peak
2	7266.000	37.97	5.81	43.77	-30.23	74.00	100	325	Peak
3	* 9688.000	39.52	5.33	44.85	-29.15	74.00	100	275	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

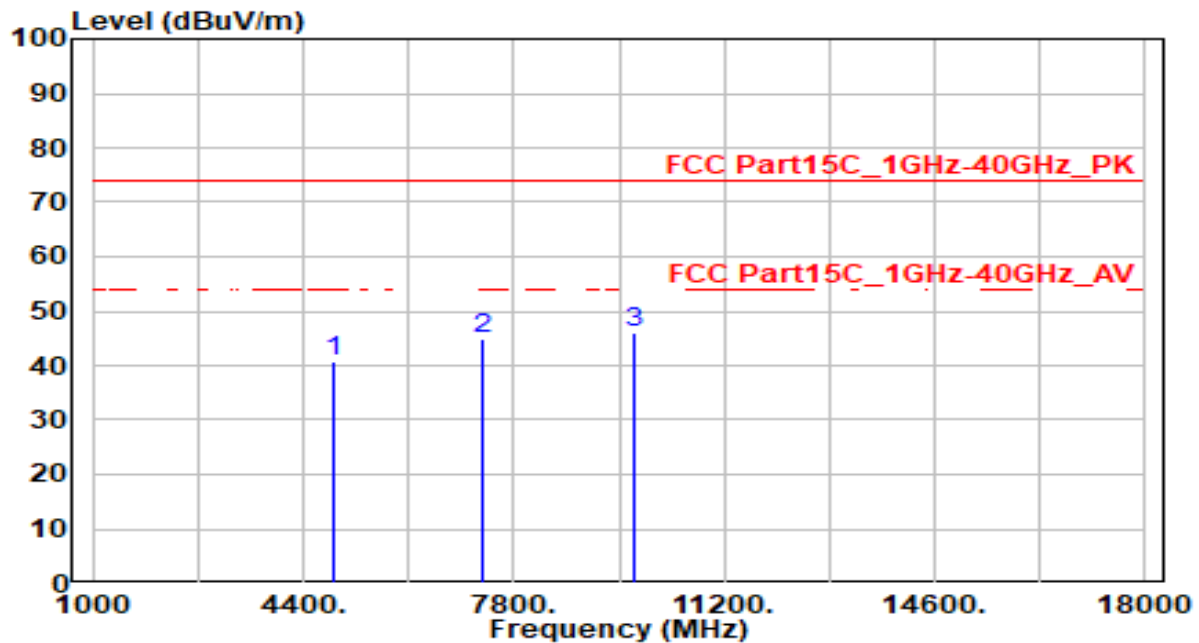


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.21	0.35	40.57	-33.43	74.00	100	190	Peak
2	7311.000	39.18	5.79	44.97	-29.03	74.00	100	20	Peak
3	* 9748.000	40.75	5.34	46.09	-27.91	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

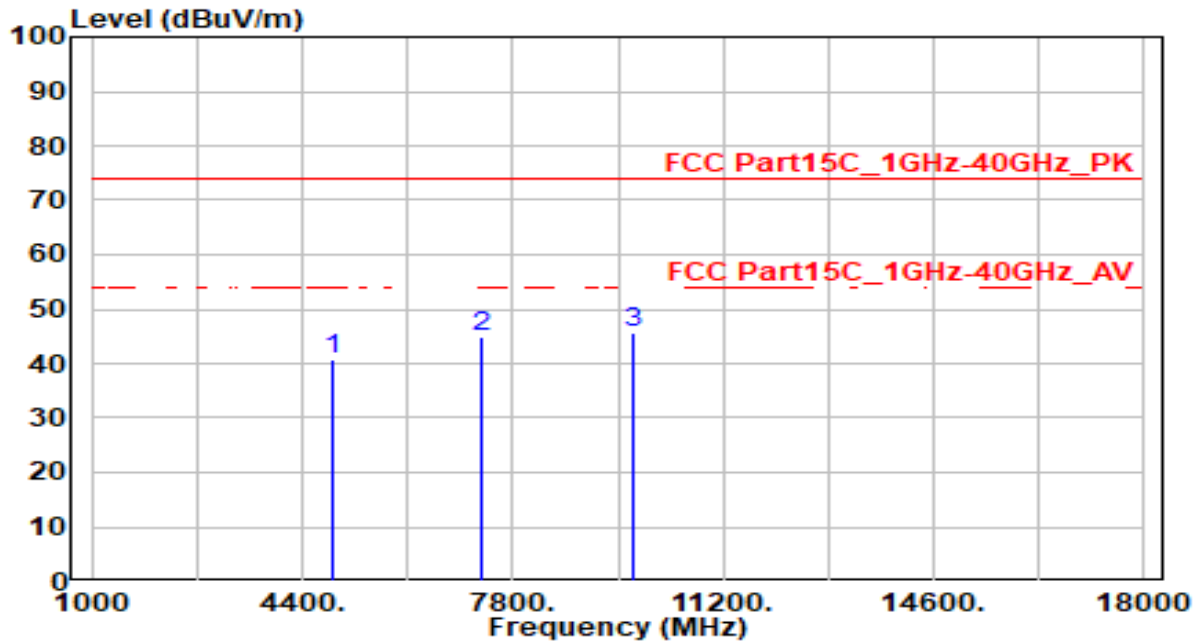


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.42	0.35	40.77	-33.23	74.00	100	190	Peak
2	7311.000	39.12	5.79	44.91	-29.09	74.00	100	260	Peak
3	* 9748.000	40.16	5.34	45.50	-28.50	74.00	100	55	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

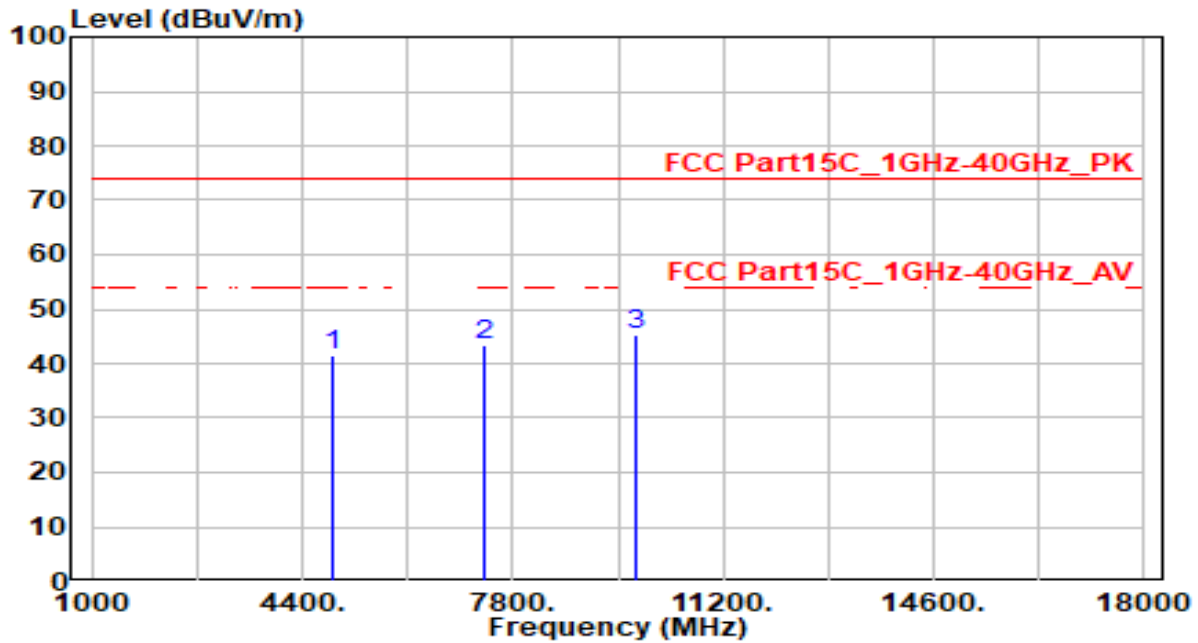


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	40.92	0.41	41.34	-32.66	74.00	100	35	Peak
2	7356.000	37.66	5.78	43.44	-30.56	74.00	100	295	Peak
3	* 9808.000	39.95	5.35	45.30	-28.70	74.00	100	300	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

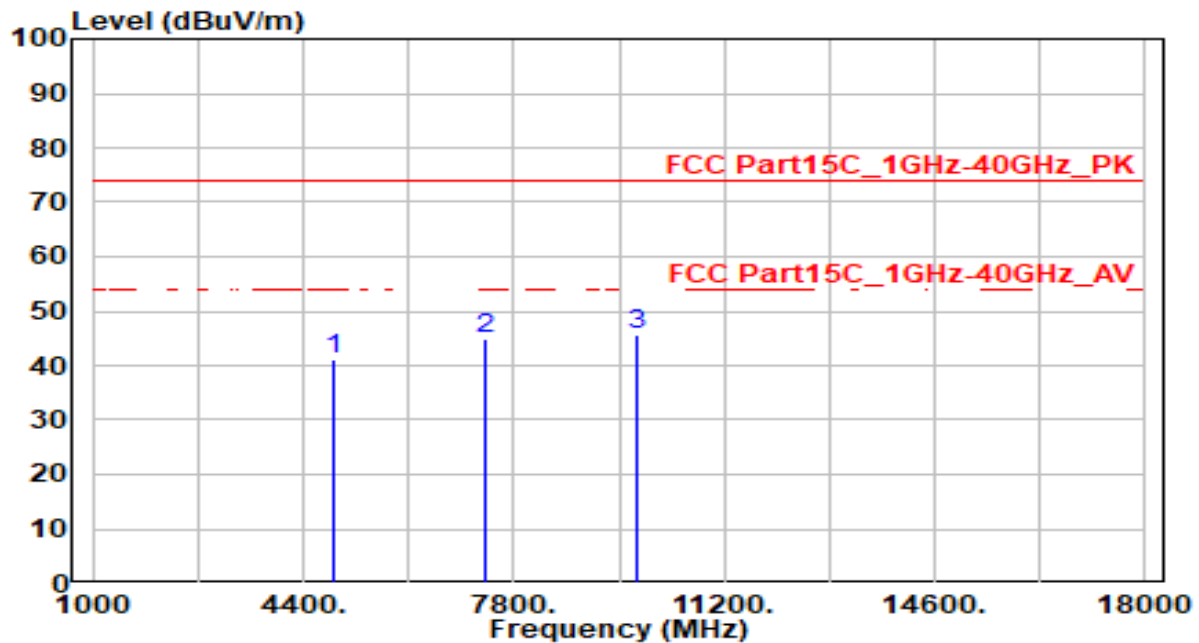

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	40.55	0.41	40.96	-33.04	74.00	100	80	Peak
2	7356.000	39.27	5.78	45.05	-28.95	74.00	100	310	Peak
3	* 9808.000	40.27	5.35	45.62	-28.38	74.00	100	190	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.7.2.Test Procedure Used

ANSI C63.10 - 2013 - Section 11.11 & 11.12

ANSI C63.10 - 2013 - Section 6.3 (General Requirements)

ANSI C63.10 - 2013 - Section 6.6 (Standard test method above 1GHz)

7.7.3.Test Setting


Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.7.4.Test Setup

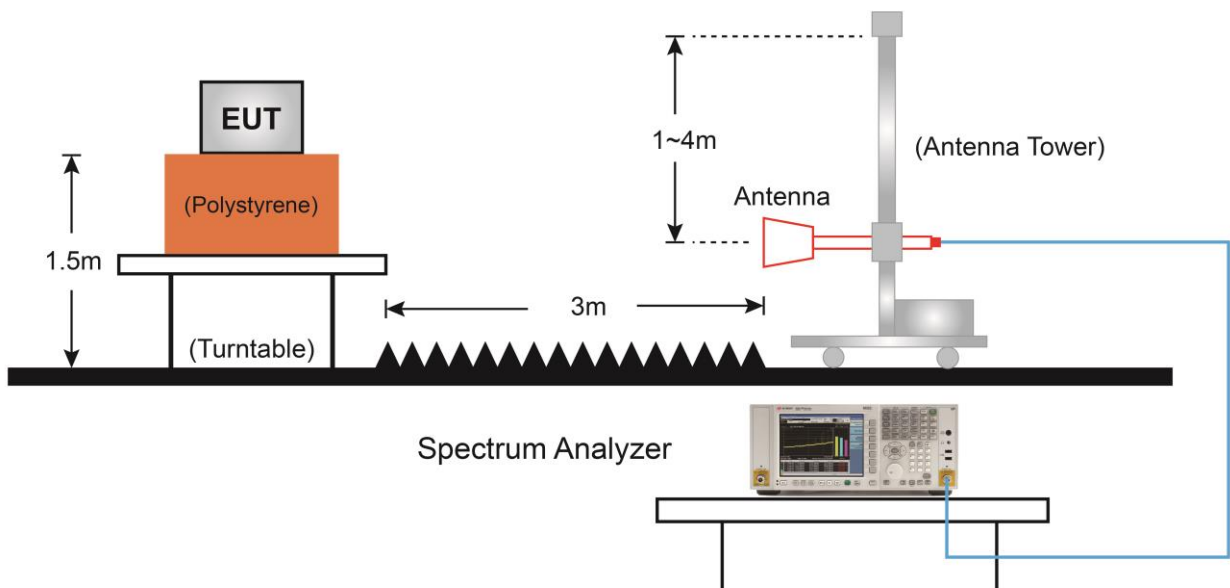

7.7.5.Test Result

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

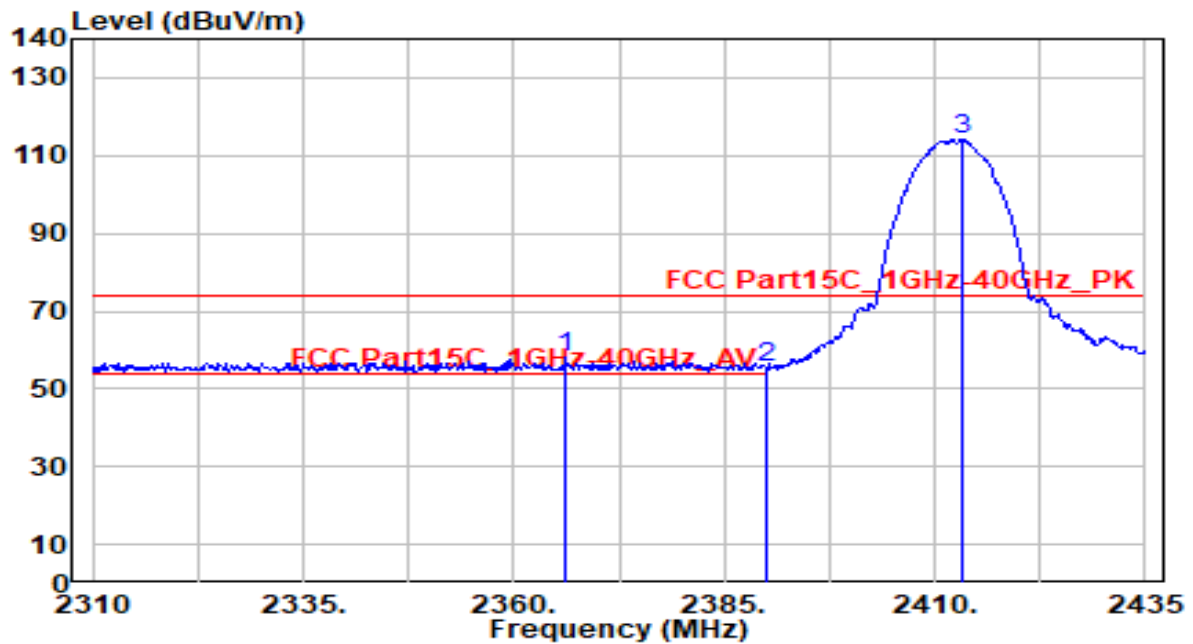


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2366.125	27.39	30.58	57.97	-16.03	74.00	170	355	Peak
2		2390.000	24.73	30.61	55.35	-18.65	74.00	170	355	Peak
3		2413.250	83.38	30.67	N/A	N/A	74.00	170	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

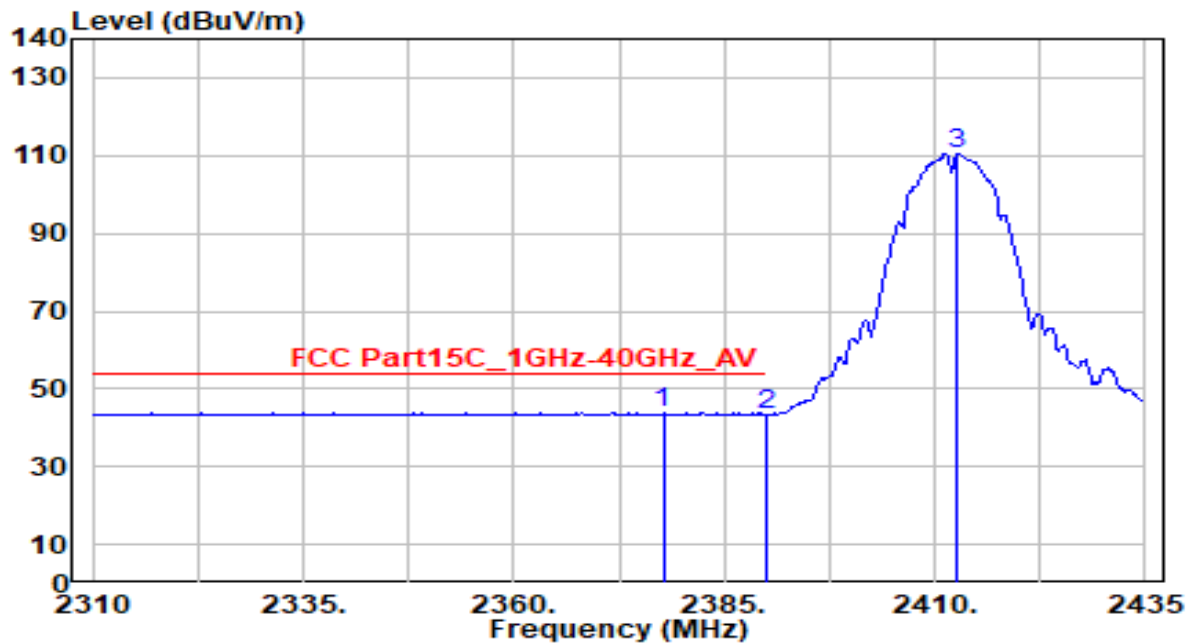


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2377.750	13.22	30.60	43.82	-10.18	54.00	170	355	Average
2		2390.000	12.83	30.61	43.44	-10.56	54.00	170	355	Average
3		2412.750	79.86	30.67	110.53	N/A	N/A	170	355	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

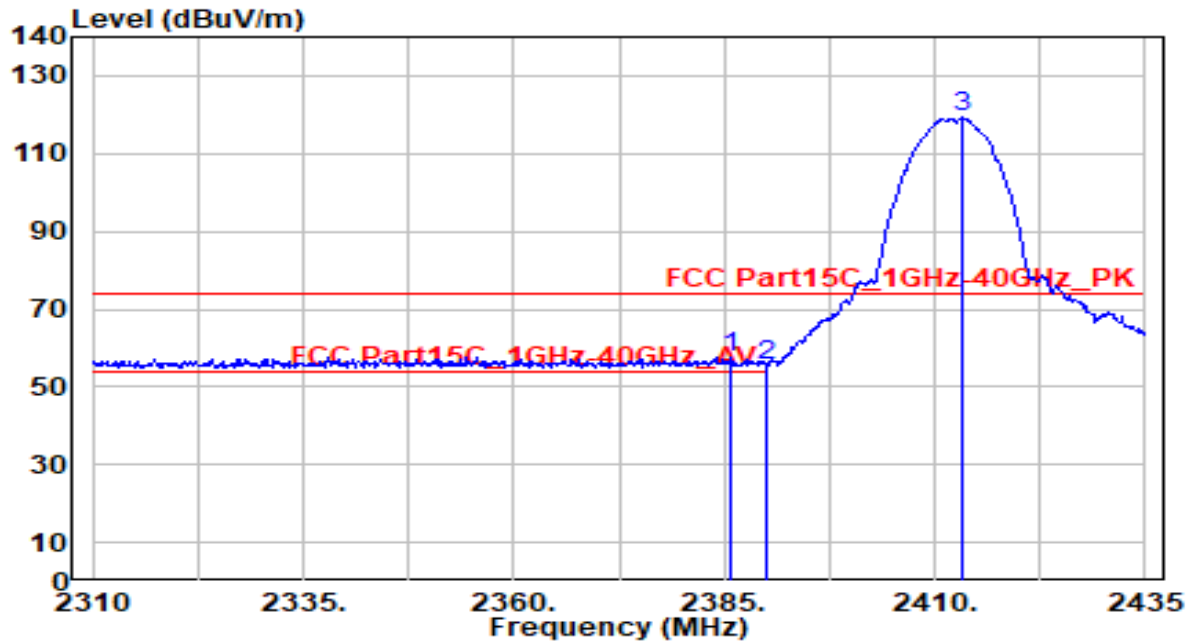


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.625	26.98	30.61	57.58	-16.42	74.00	135	345	Peak
2		2390.000	24.90	30.61	55.51	-18.49	74.00	135	345	Peak
3		2413.250	88.55	30.67	119.22	N/A	N/A	135	345	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

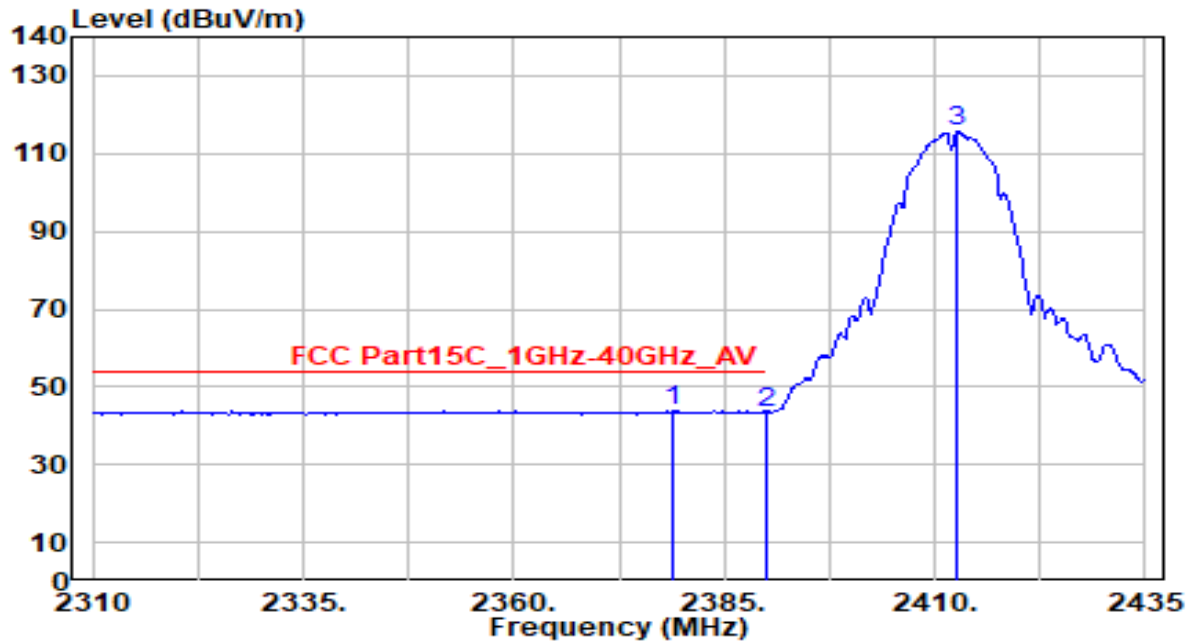


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2379.000	13.16	30.60	43.75	-10.25	54.00	135	345	Average
2		2390.000	12.76	30.61	43.38	-10.62	54.00	135	345	Average
3		2412.750	84.95	30.67	115.62	N/A	N/A	135	345	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

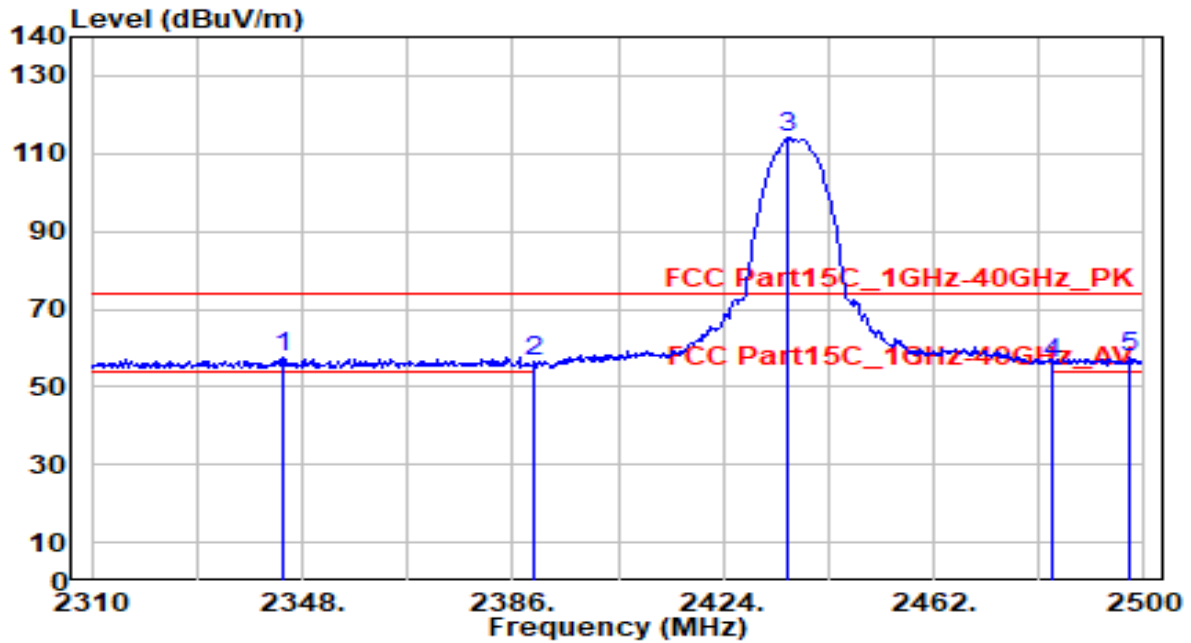


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2344.390	27.02	30.55	57.57	-16.43	74.00	110	355	Peak
2		2390.000	26.00	30.61	56.62	-17.38	74.00	110	355	Peak
3		2435.780	83.12	30.75	113.87	N/A	N/A	110	355	Peak
4		2483.500	25.19	30.91	56.10	-17.90	74.00	110	355	Peak
5		2497.530	26.42	30.96	57.39	-16.61	74.00	110	355	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

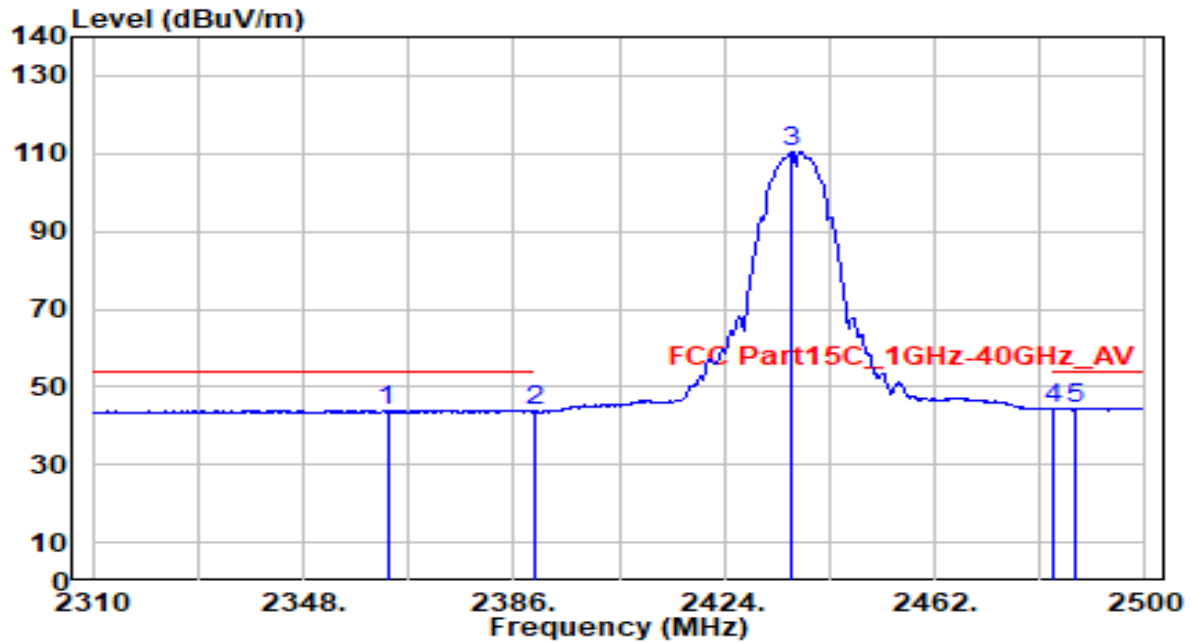


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2363.200	13.38	30.58	43.96	-10.04	54.00	110	355	Average
2	2390.000	13.00	30.61	43.62	-10.38	54.00	110	355	Average
3	2436.350	79.82	30.75	110.57	N/A	N/A	110	355	Average
4	2483.500	13.21	30.91	44.13	-9.87	54.00	110	355	Average
5	* 2487.460	13.65	30.93	44.58	-9.42	54.00	110	355	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

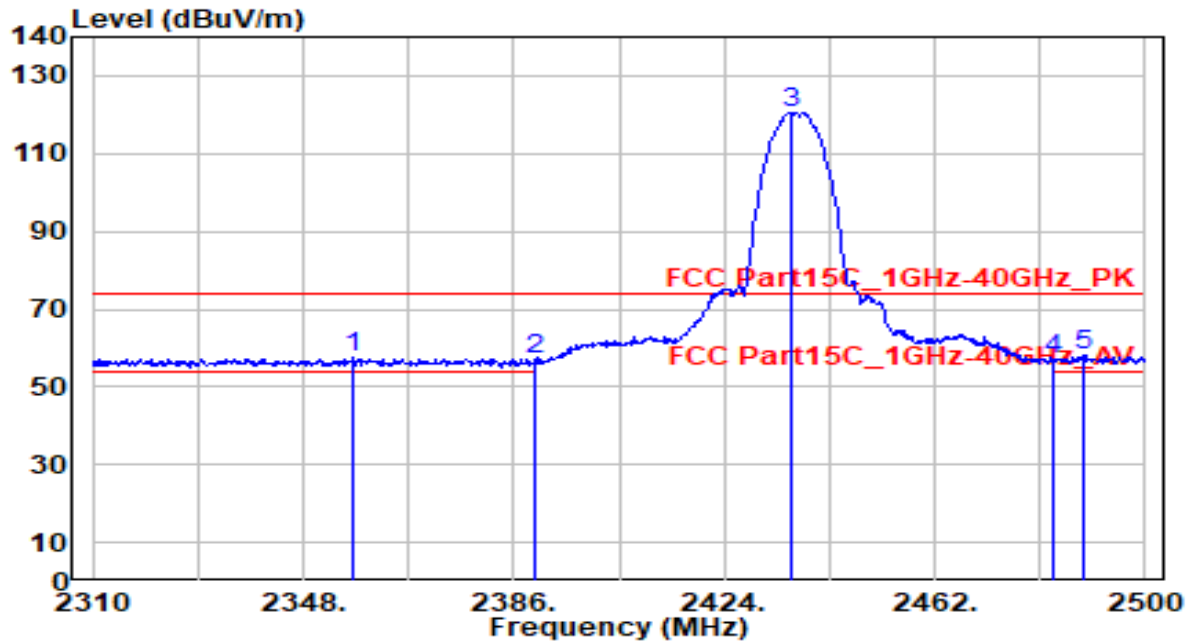


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2356.930	27.00	30.57	57.56	-16.44	74.00	180	230	Peak
2	2390.000	26.60	30.61	57.22	-16.78	74.00	180	230	Peak
3	2435.970	89.95	30.75	120.70	N/A	N/A	180	230	Peak
4	2483.500	26.24	30.91	57.15	-16.85	74.00	180	230	Peak
5	* 2488.980	27.26	30.93	58.19	-15.81	74.00	180	230	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

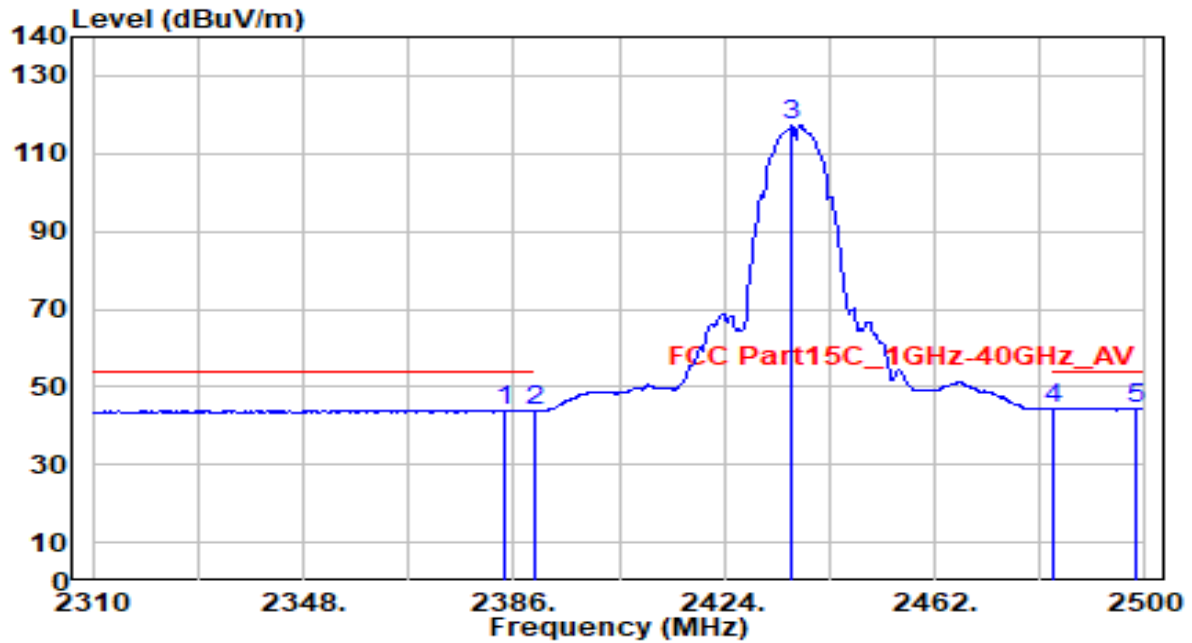


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2384.290	13.33	30.61	43.93	-10.07	54.00	180	230	Average
2	2390.000	13.00	30.61	43.62	-10.38	54.00	180	230	Average
3	2436.350	86.52	30.75	117.27	N/A	N/A	180	230	Average
4	2483.500	13.32	30.91	44.24	-9.76	54.00	180	230	Average
5	* 2498.100	13.63	30.96	44.59	-9.41	54.00	180	230	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

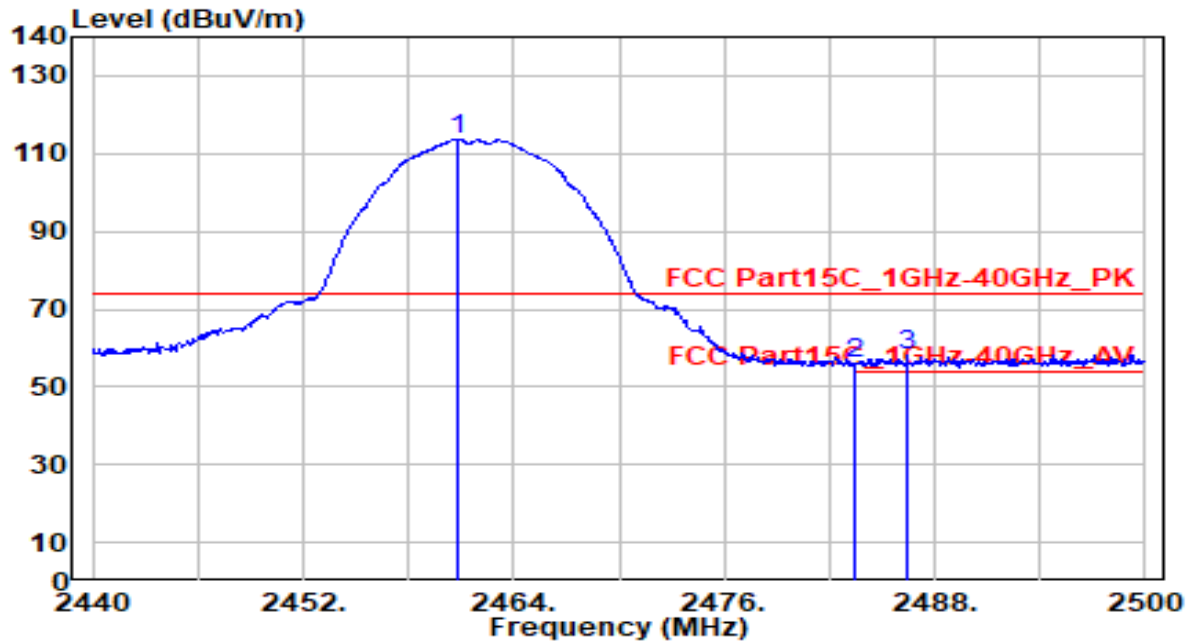


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.820	82.70	30.84	113.53	N/A	N/A	160	355	Peak
2	2483.500	25.32	30.91	56.23	-17.77	74.00	160	355	Peak
3	* 2486.440	27.36	30.92	58.28	-15.72	74.00	160	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

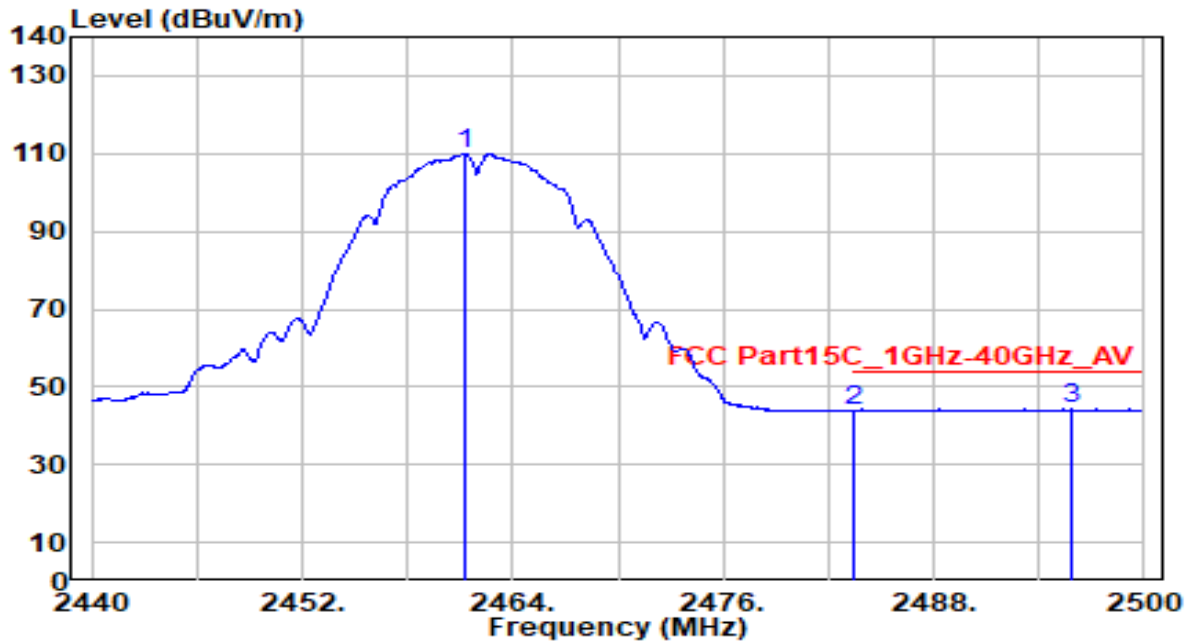


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.240	79.15	30.84	109.99	N/A	N/A	160	355	Average
2	2483.500	12.77	30.91	43.68	-10.32	54.00	160	355	Average
3	* 2495.860	13.18	30.96	44.14	-9.86	54.00	160	355	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

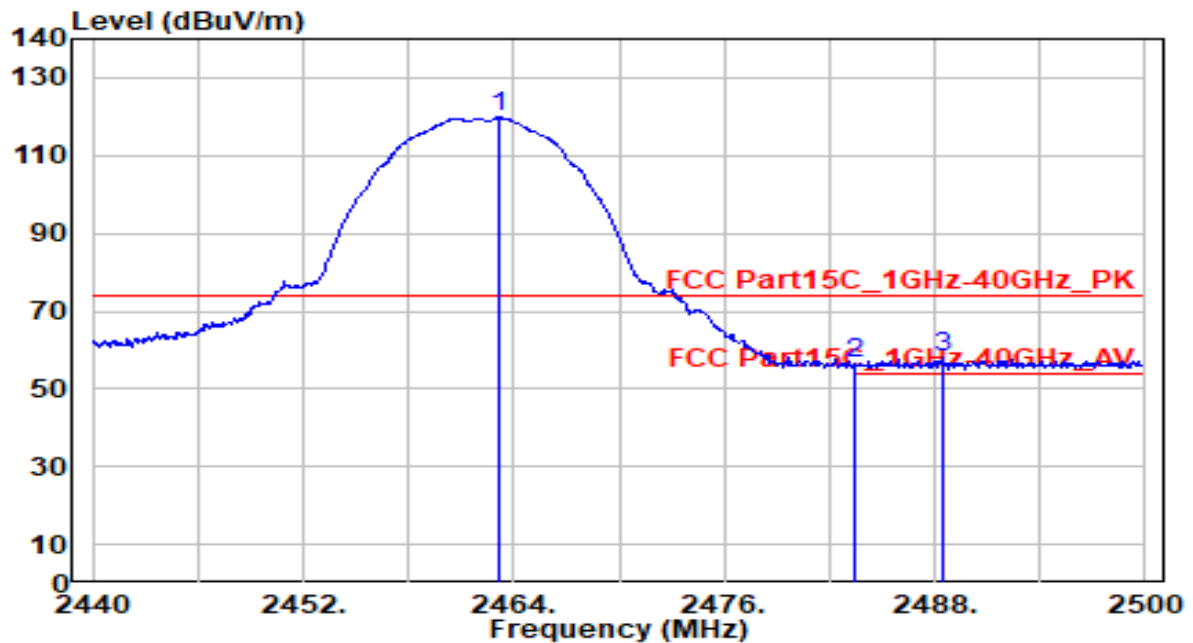


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.100	88.90	30.84	119.75	N/A	N/A	215	65	Peak
2	2483.500	25.48	30.91	56.39	-17.61	74.00	215	65	Peak
3	* 2488.420	27.01	30.93	57.94	-16.06	74.00	215	65	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

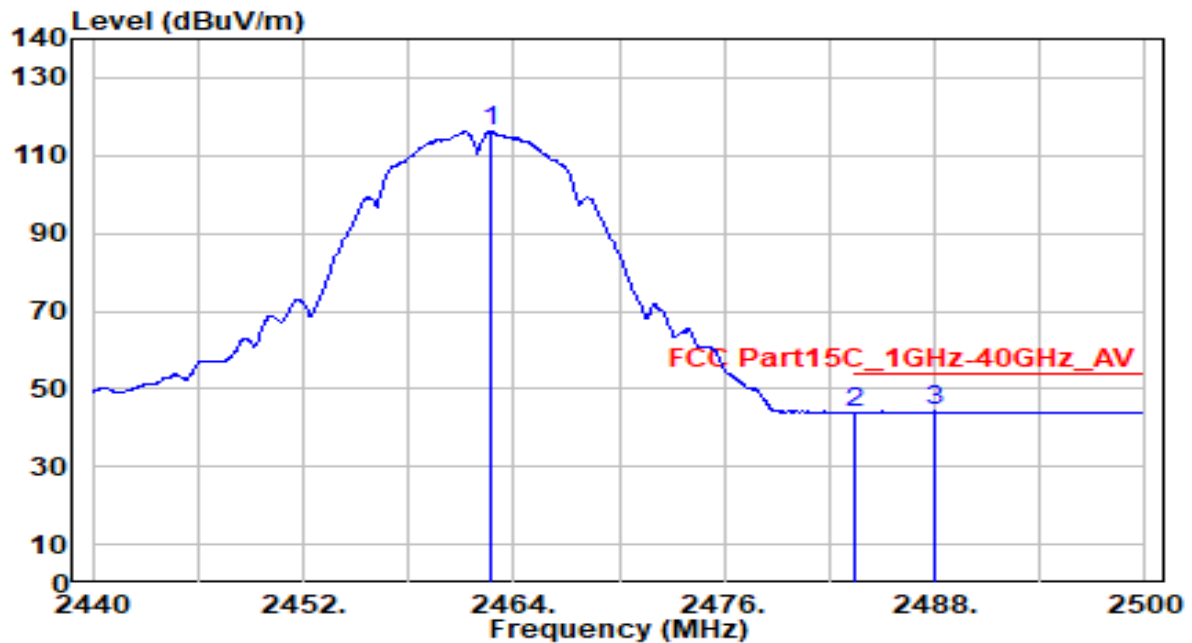


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.740	85.38	30.84	116.22	N/A	N/A	215	65	Average
2	2483.500	12.89	30.91	43.80	-10.20	54.00	215	65	Average
3	* 2488.000	13.39	30.93	44.32	-9.68	54.00	215	65	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

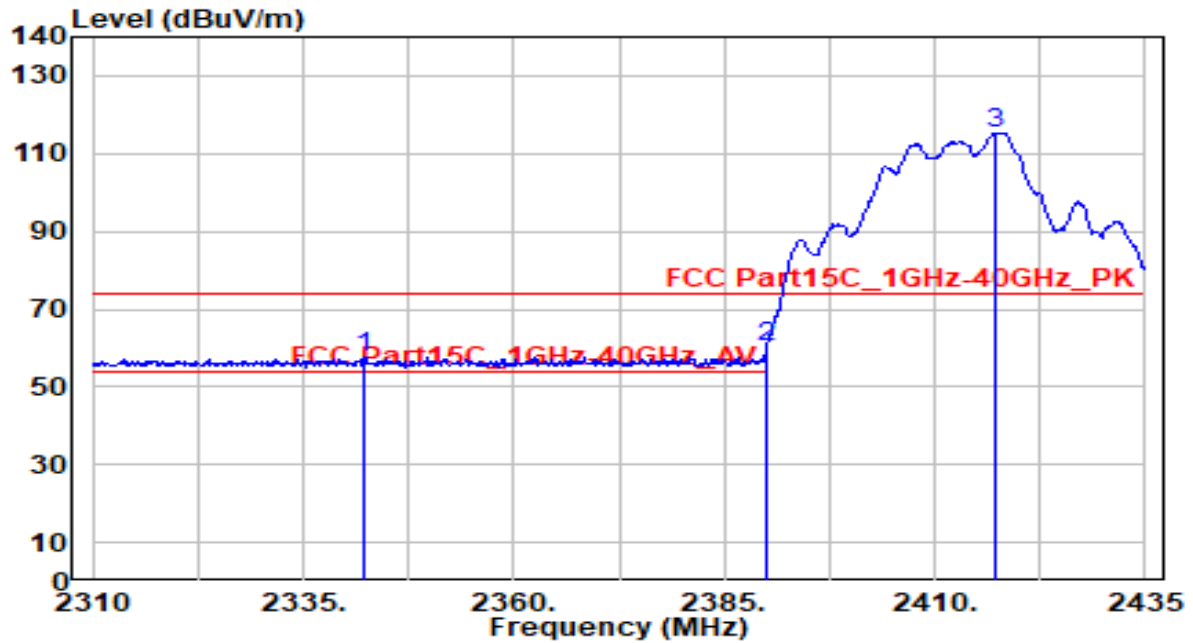


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2342.250	27.11	30.55	57.66	-16.34	74.00	160	350	Peak
2	* 2390.000	29.54	30.61	60.15	-13.85	74.00	160	350	Peak
3	2417.125	84.63	30.69	115.32	N/A	N/A	160	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

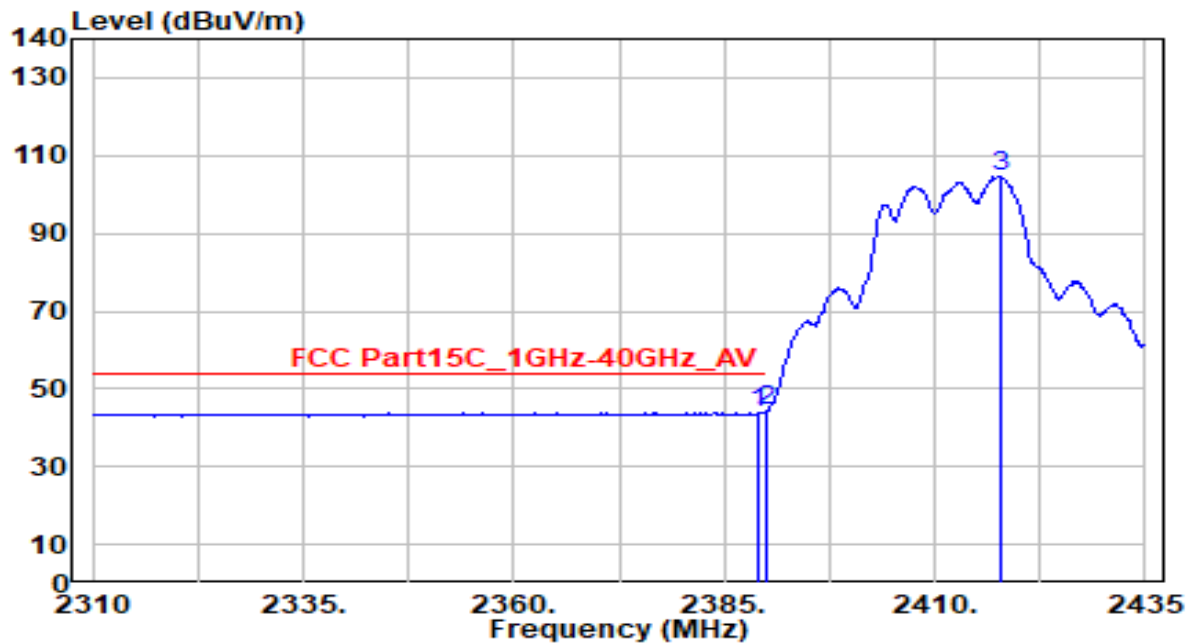


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.000	13.14	30.61	43.75	-10.25	54.00	160	350	Average
2	*	2390.000	13.65	30.61	44.26	-9.74	54.00	160	350	Average
3		2417.875	74.07	30.69	104.76	N/A	N/A	160	350	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

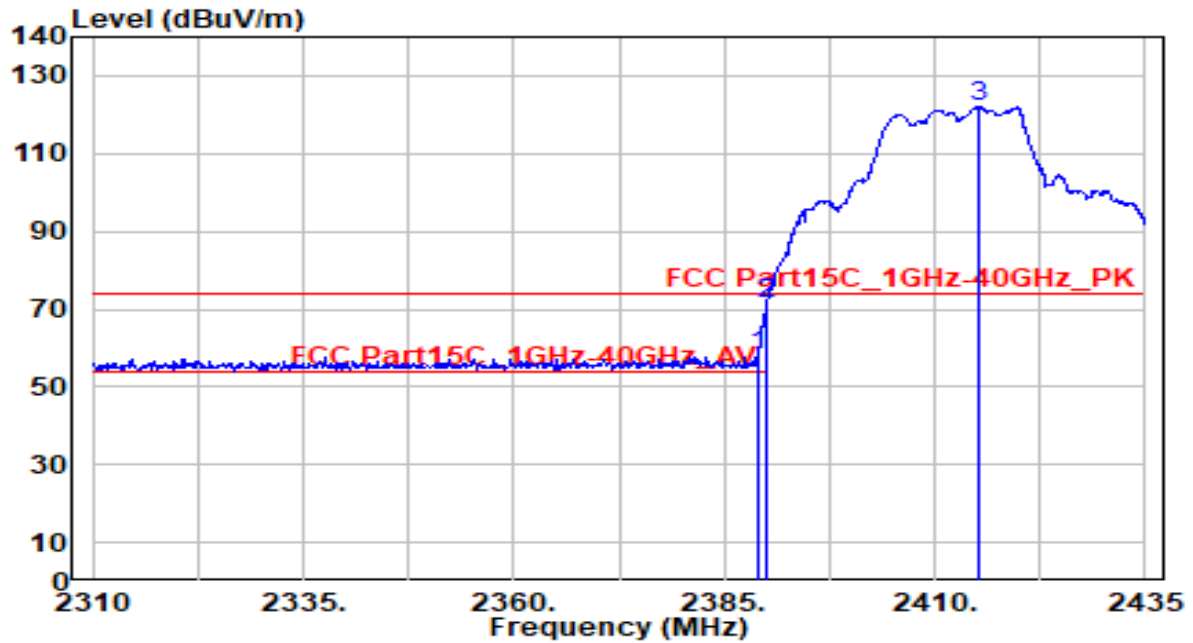


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.000	27.69	30.61	58.30	-15.70	74.00	245	45	Peak
2	* 2390.000	40.80	30.61	71.41	-2.59	74.00	245	45	Peak
3	2415.125	91.32	30.68	122.00	N/A	N/A	245	45	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

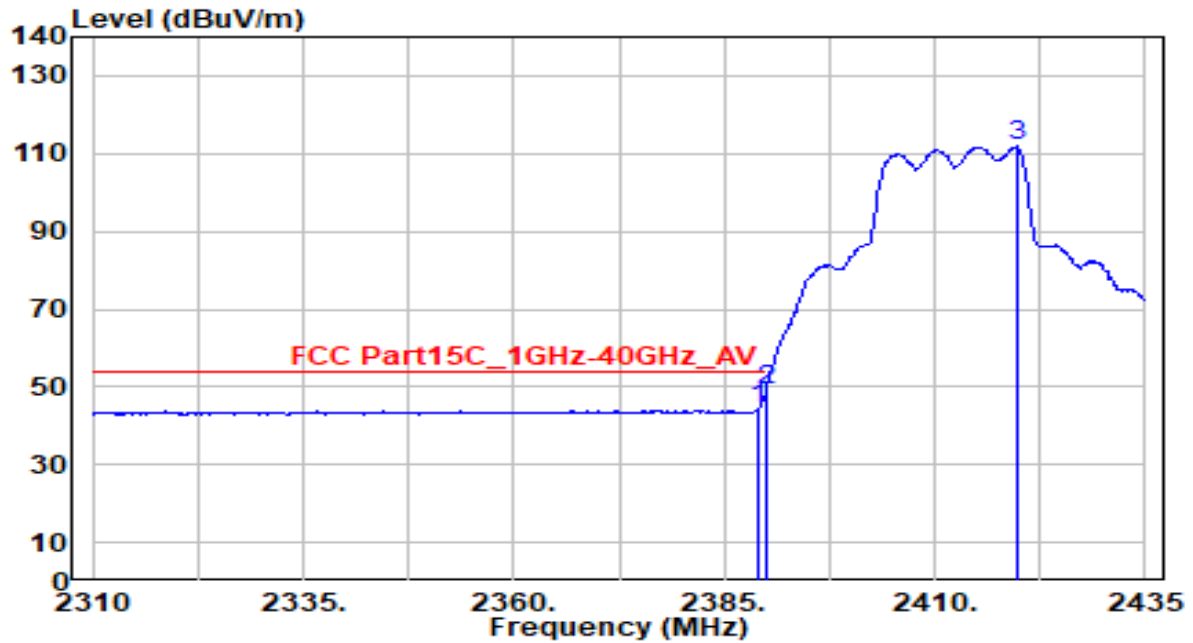


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.000	13.55	30.61	44.16	-9.84	54.00	245	45	Average
2	* 2390.000	18.71	30.61	49.32	-4.68	54.00	245	45	Average
3	2419.750	81.13	30.70	111.82	N/A	N/A	245	45	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

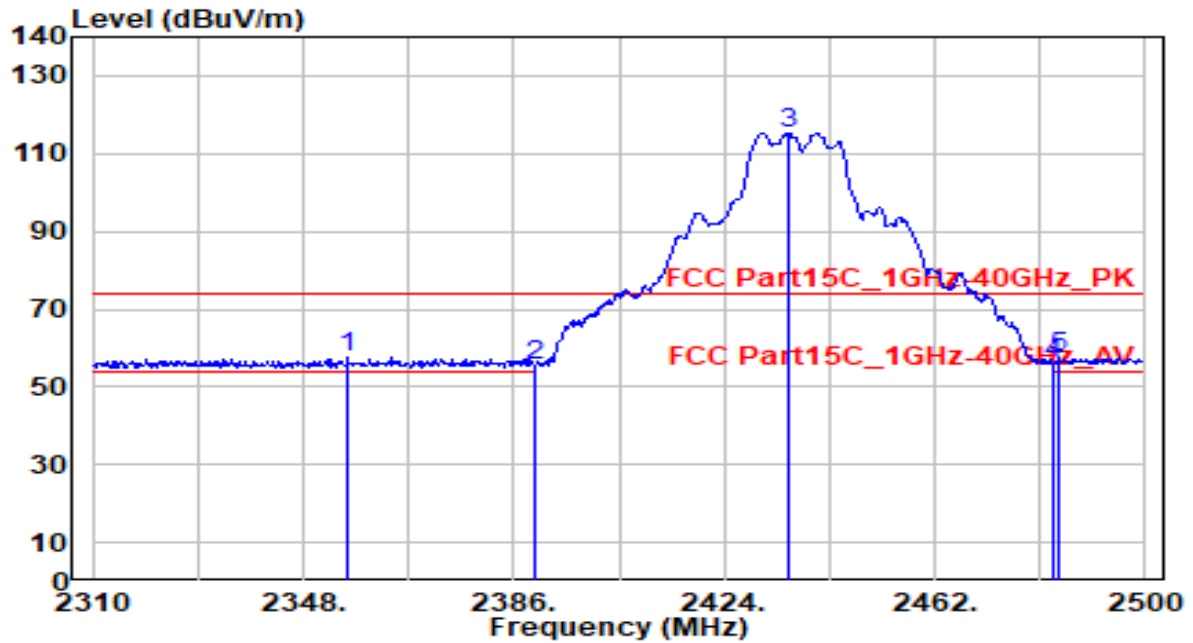


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2355.980	26.82	30.57	57.39	-16.61	74.00	105	350	Peak
2	2390.000	24.85	30.61	55.46	-18.54	74.00	105	350	Peak
3	2435.780	84.65	30.75	115.40	N/A	N/A	105	350	Peak
4	2483.500	25.16	30.91	56.07	-17.93	74.00	105	350	Peak
5	* 2484.420	26.52	30.92	57.43	-16.57	74.00	105	350	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

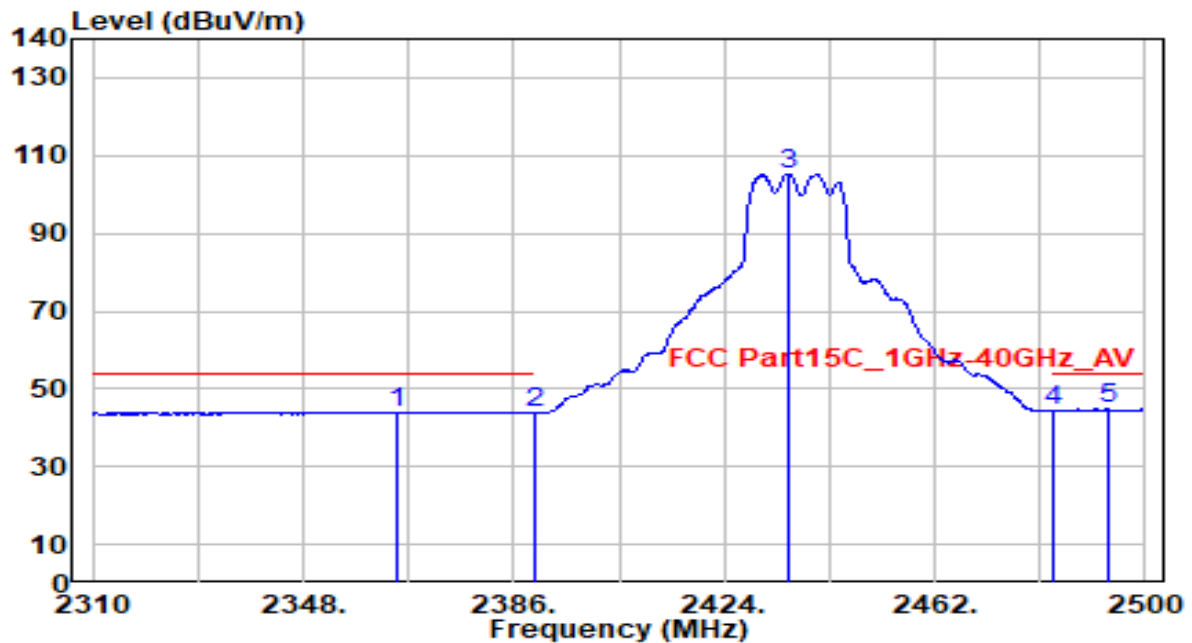


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2365.100	13.53	30.58	44.11	-9.89	54.00	105	350	Average
2	2390.000	13.19	30.61	43.81	-10.19	54.00	105	350	Average
3	2435.780	74.39	30.75	105.14	N/A	N/A	105	350	Average
4	2483.500	13.36	30.91	44.27	-9.73	54.00	105	350	Average
5	* 2493.160	13.84	30.95	44.79	-9.21	54.00	105	350	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

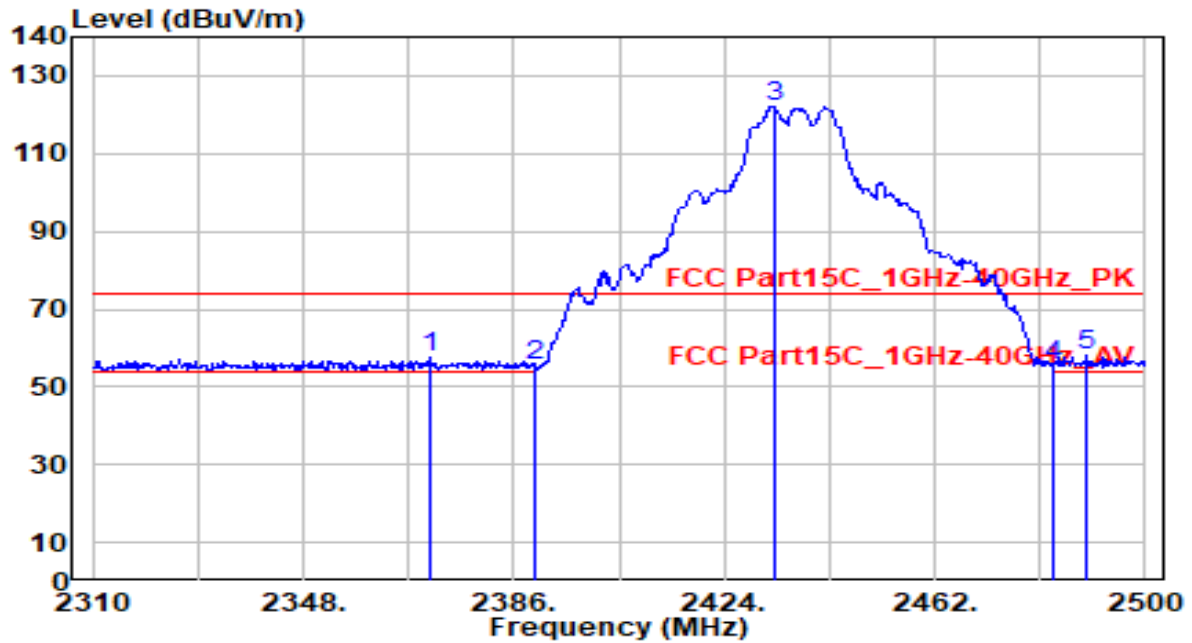


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2370.800	27.22	30.59	57.81	-16.19	74.00	175	45	Peak
2	2390.000	25.01	30.61	55.62	-18.38	74.00	175	45	Peak
3	2432.930	91.53	30.74	122.27	N/A	N/A	175	45	Peak
4	2483.500	24.62	30.91	55.54	-18.46	74.00	175	45	Peak
5	* 2489.550	26.95	30.93	57.89	-16.11	74.00	175	45	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

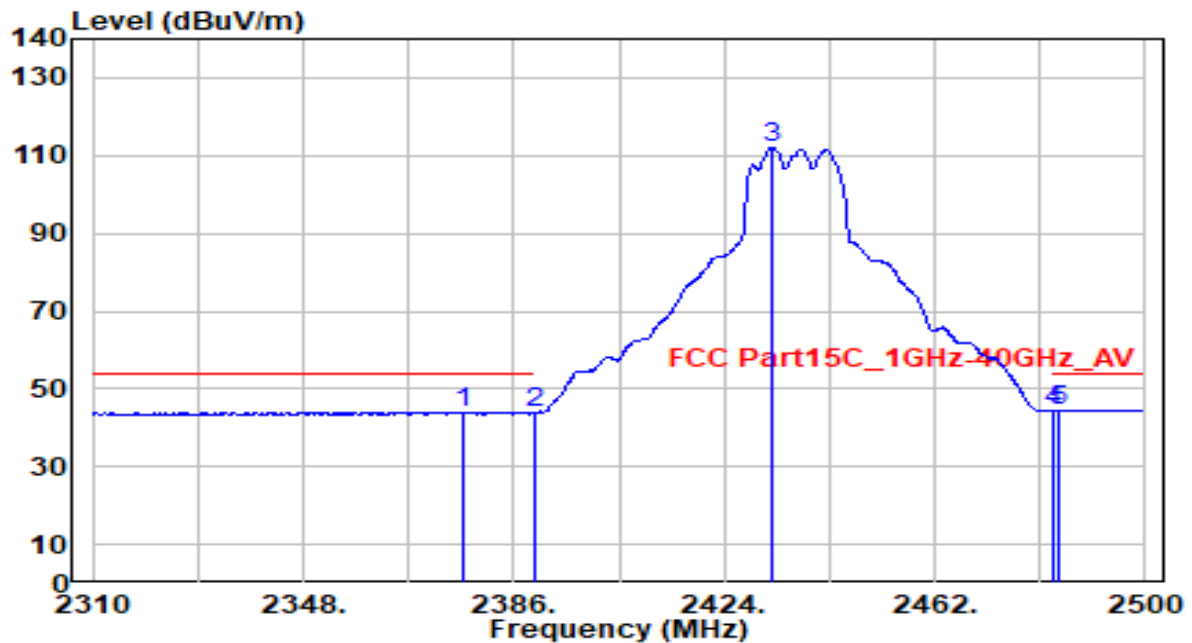


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2376.690	13.37	30.59	43.97	-10.03	54.00	175	45	Average
2	2390.000	13.26	30.61	43.88	-10.12	54.00	175	45	Average
3	2432.550	81.38	30.74	112.12	N/A	N/A	175	45	Average
4	2483.500	13.43	30.91	44.35	-9.65	54.00	175	45	Average
5	* 2484.420	13.68	30.92	44.60	-9.40	54.00	175	45	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

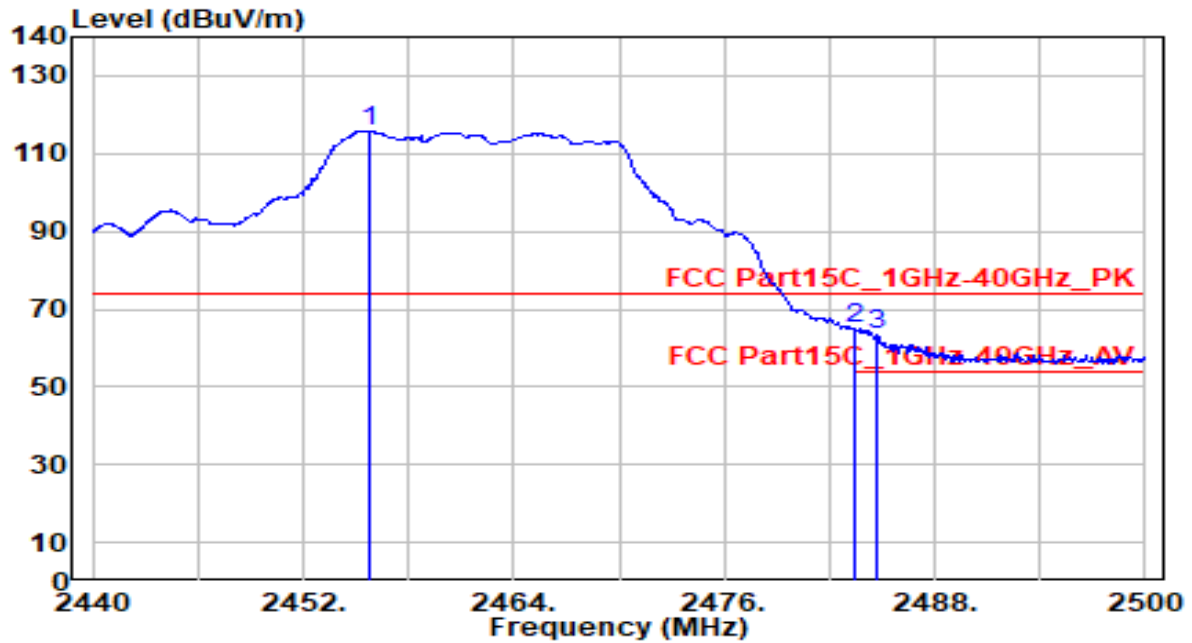


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.840	84.94	30.82	115.75	N/A	N/A	100	350	Peak
2	* 2483.500	34.11	30.91	65.02	-8.98	74.00	100	350	Peak
3	2484.640	32.70	30.92	63.62	-10.38	74.00	100	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

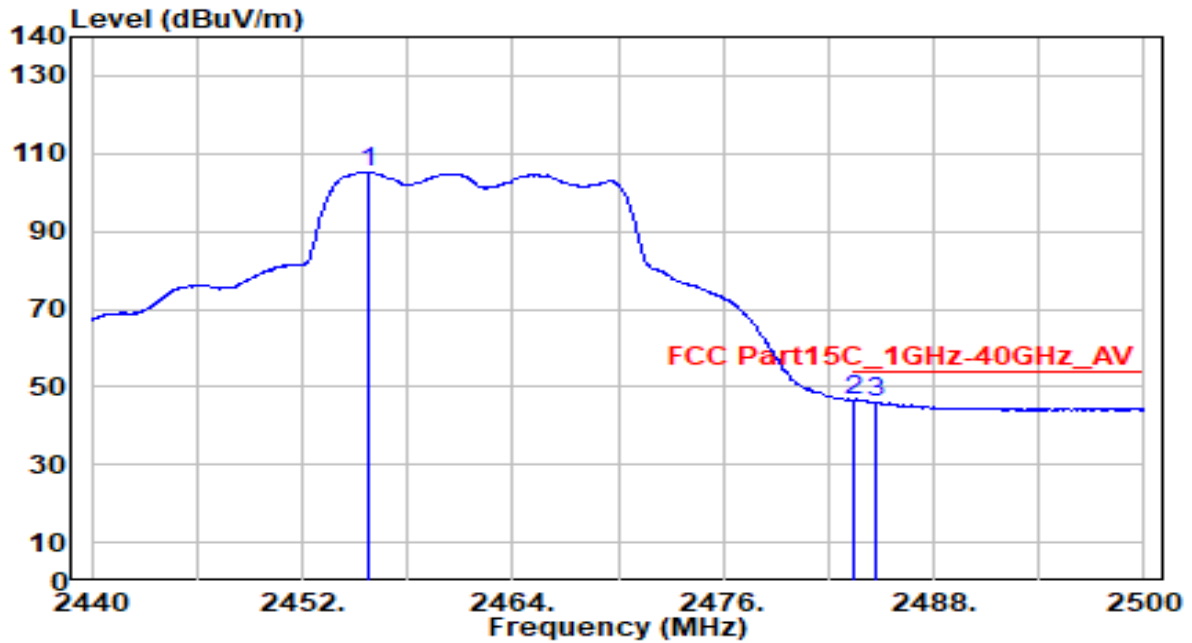


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2455.780	74.54	30.82	105.36	N/A	N/A	100	350	Average
2	*	2483.500	15.62	30.91	46.54	-7.46	54.00	100	350	Average
3		2484.640	15.13	30.92	46.05	-7.95	54.00	100	350	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

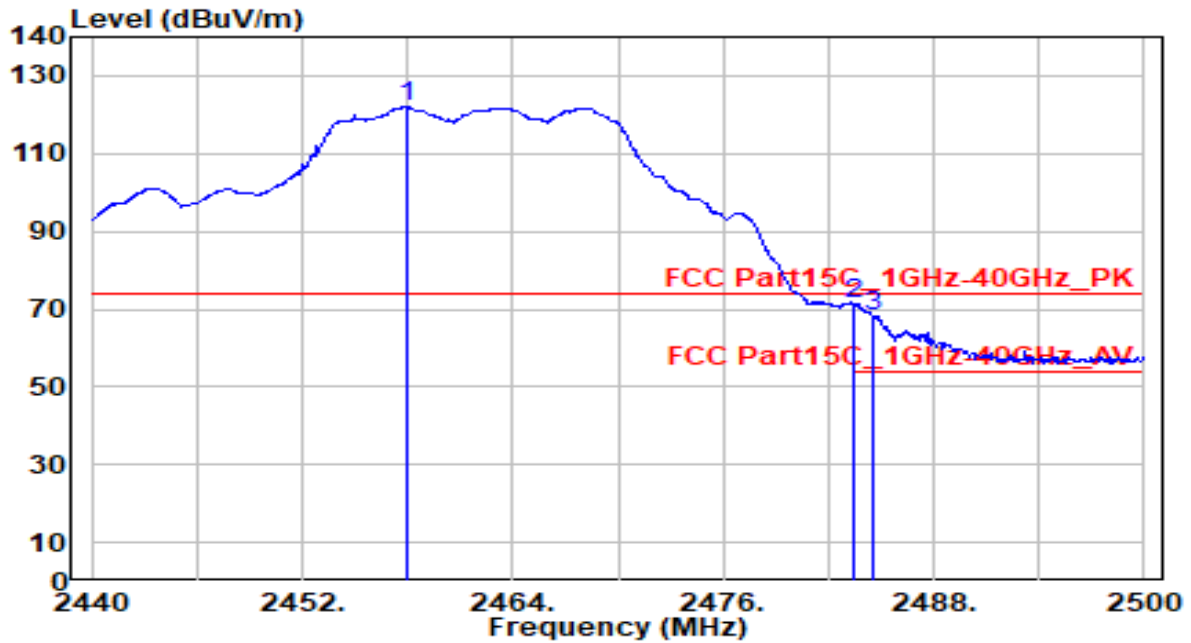


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2457.940	91.13	30.83	121.96	N/A	N/A	235	45	Peak
2	* 2483.500	40.25	30.91	71.16	-2.84	74.00	235	45	Peak
3	2484.580	37.30	30.92	68.22	-5.78	74.00	235	45	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

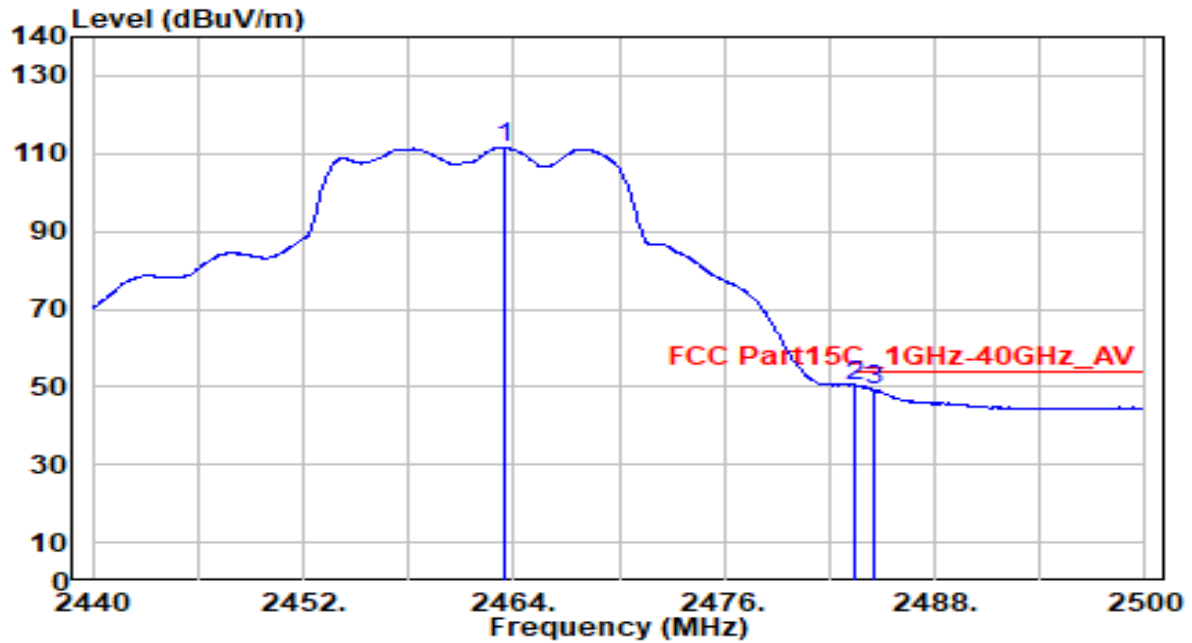


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.520	80.66	30.85	111.50	N/A	N/A	235	45	Average
2	* 2483.500	19.35	30.91	50.27	-3.73	54.00	235	45	Average
3	2484.520	18.42	30.92	49.33	-4.67	54.00	235	45	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

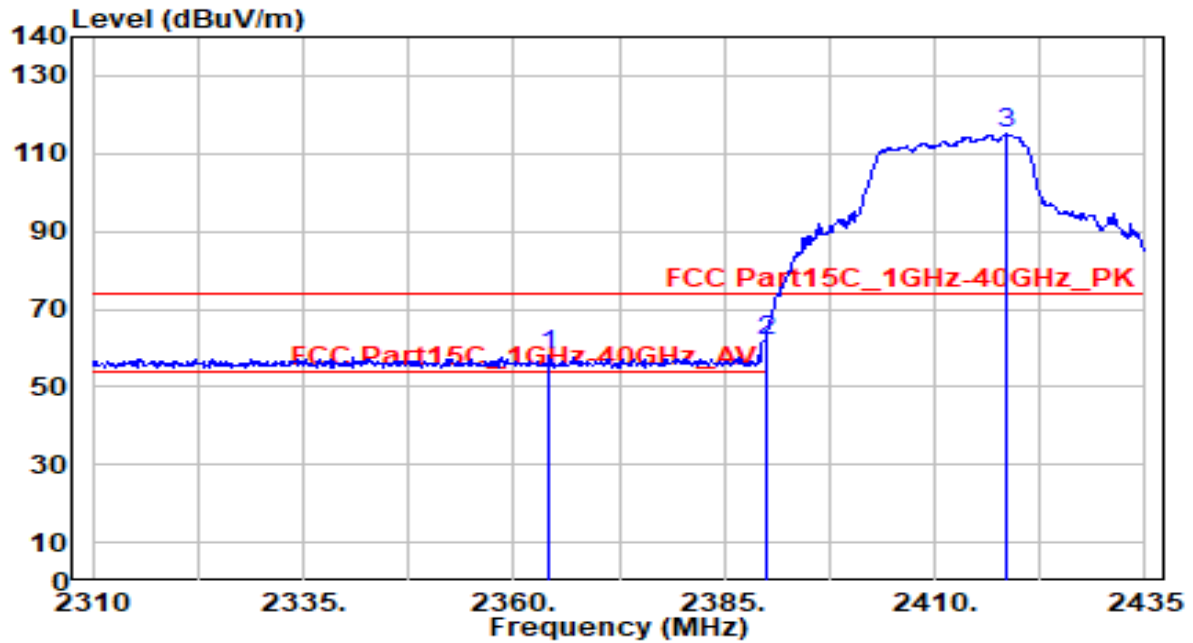


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2364.125	27.38	30.58	57.95	-16.05	74.00	100	355	Peak
2	* 2390.000	31.37	30.61	61.98	-12.02	74.00	100	355	Peak
3	2418.375	84.32	30.69	115.01	N/A	N/A	100	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

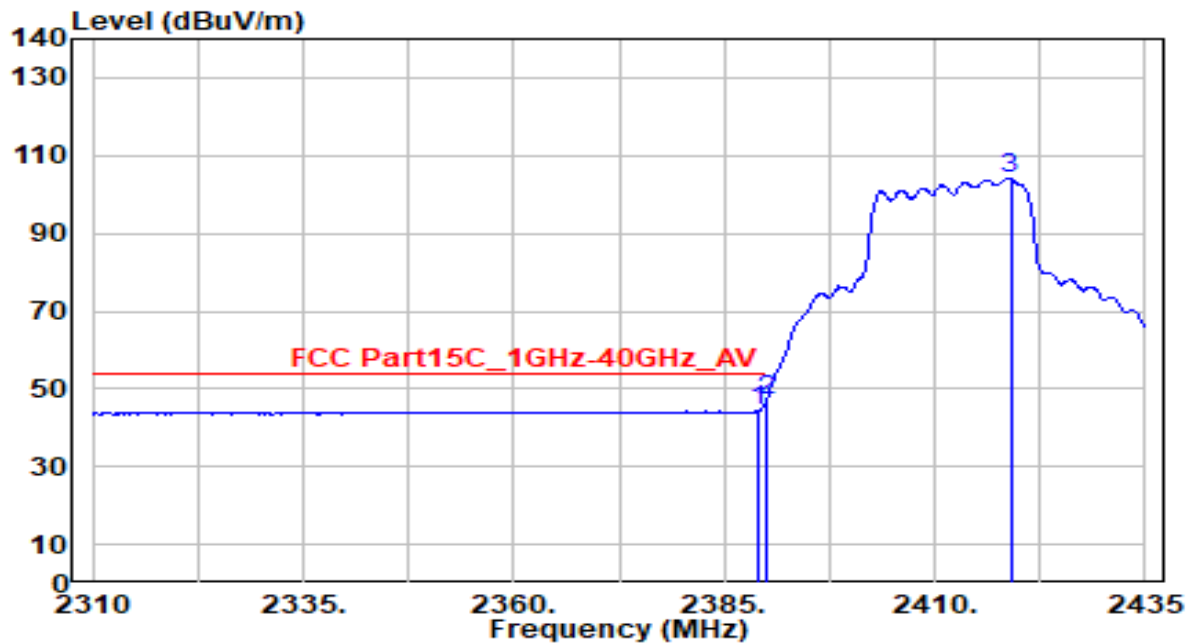


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.000	13.87	30.61	44.48	-9.52	54.00	100	355	Average
2	* 2390.000	16.20	30.61	46.81	-7.19	54.00	100	355	Average
3	2419.000	73.29	30.69	103.98	N/A	N/A	100	355	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

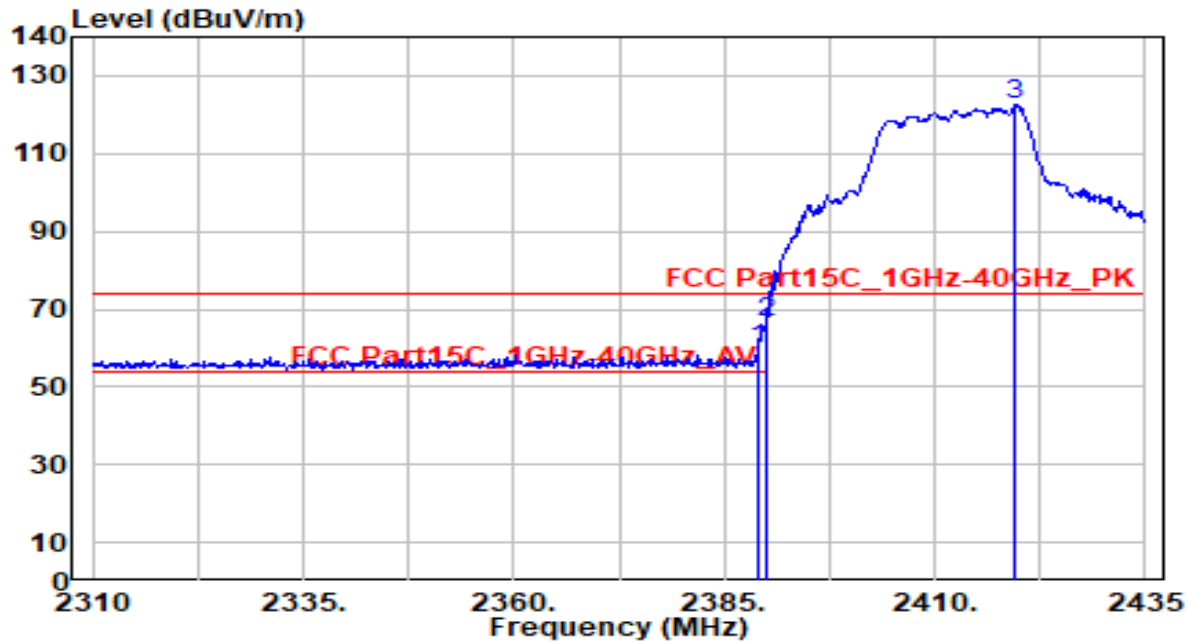


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.000	29.13	30.61	59.74	-14.26	74.00	250	45	Peak
2	* 2390.000	36.05	30.61	66.66	-7.34	74.00	250	45	Peak
3	2419.625	91.67	30.70	122.36	N/A	N/A	250	45	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

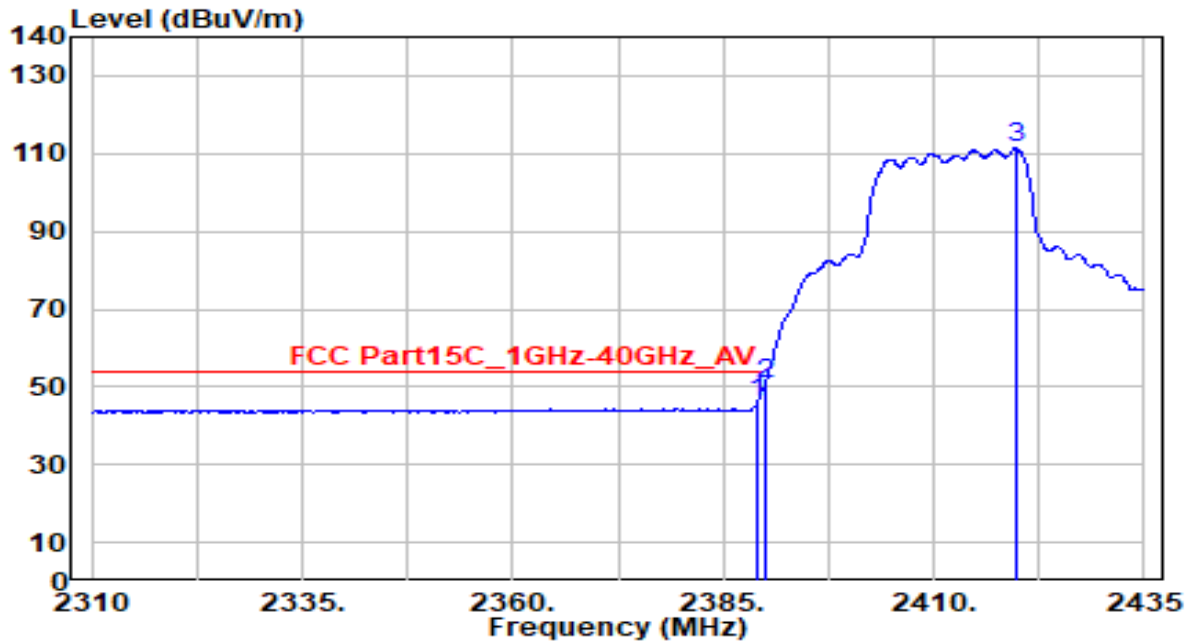


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.000	15.19	30.61	45.80	-8.20	54.00	250	45	Average
2	* 2390.000	20.09	30.61	50.70	-3.30	54.00	250	45	Average
3	2419.750	80.52	30.70	111.21	N/A	N/A	250	45	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

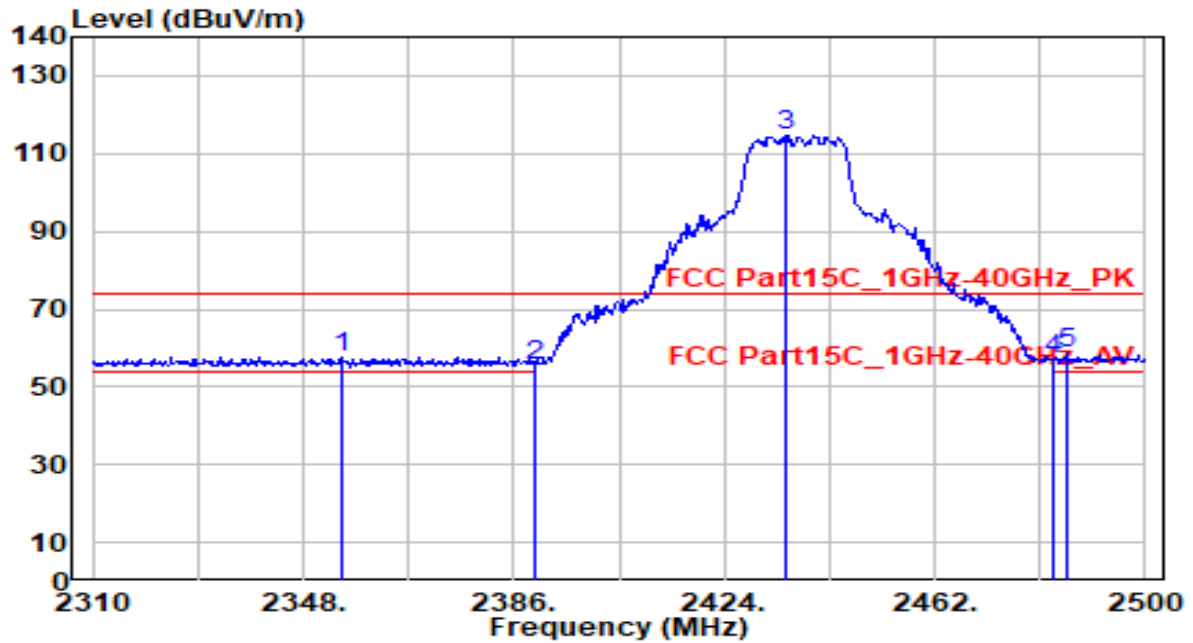


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2355.030	27.09	30.56	57.66	-16.34	74.00	105	350	Peak
2	2390.000	25.01	30.61	55.62	-18.38	74.00	105	350	Peak
3	2435.210	84.08	30.75	114.83	N/A	N/A	105	350	Peak
4	2483.500	26.11	30.91	57.02	-16.98	74.00	105	350	Peak
5	* 2485.940	27.72	30.92	58.64	-15.36	74.00	105	350	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

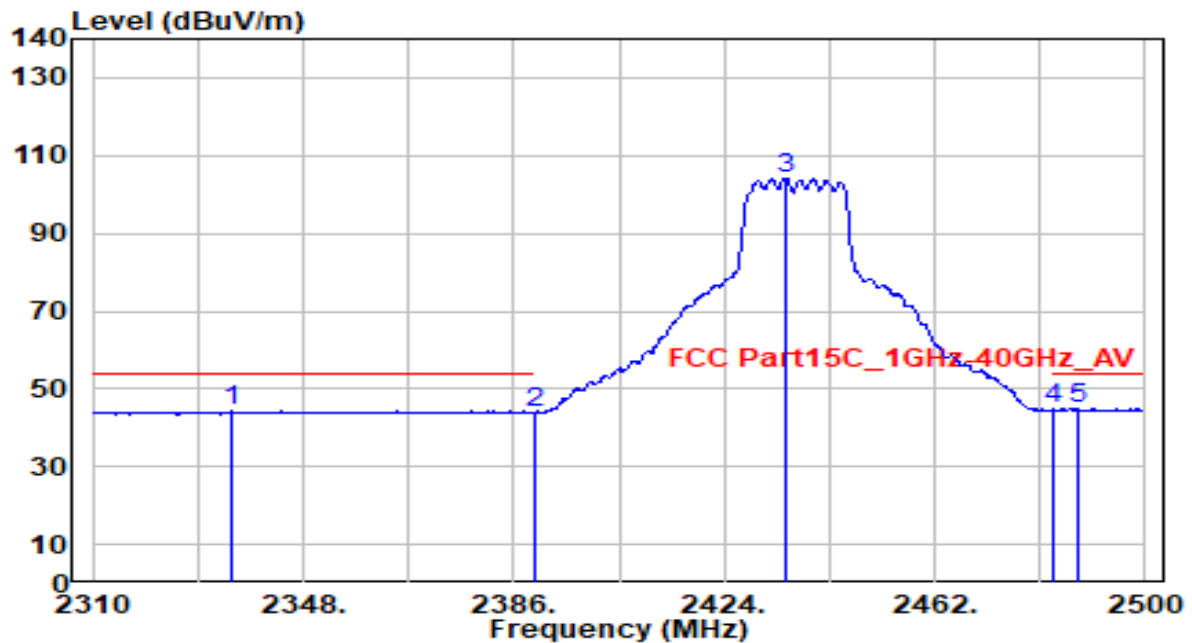


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2334.890	13.74	30.54	44.28	-9.72	54.00	105	350	Average
2	2390.000	13.24	30.61	43.86	-10.14	54.00	105	350	Average
3	2435.210	73.39	30.75	104.14	N/A	N/A	105	350	Average
4	2483.500	13.79	30.91	44.70	-9.30	54.00	105	350	Average
5	* 2487.650	13.90	30.93	44.83	-9.17	54.00	105	350	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

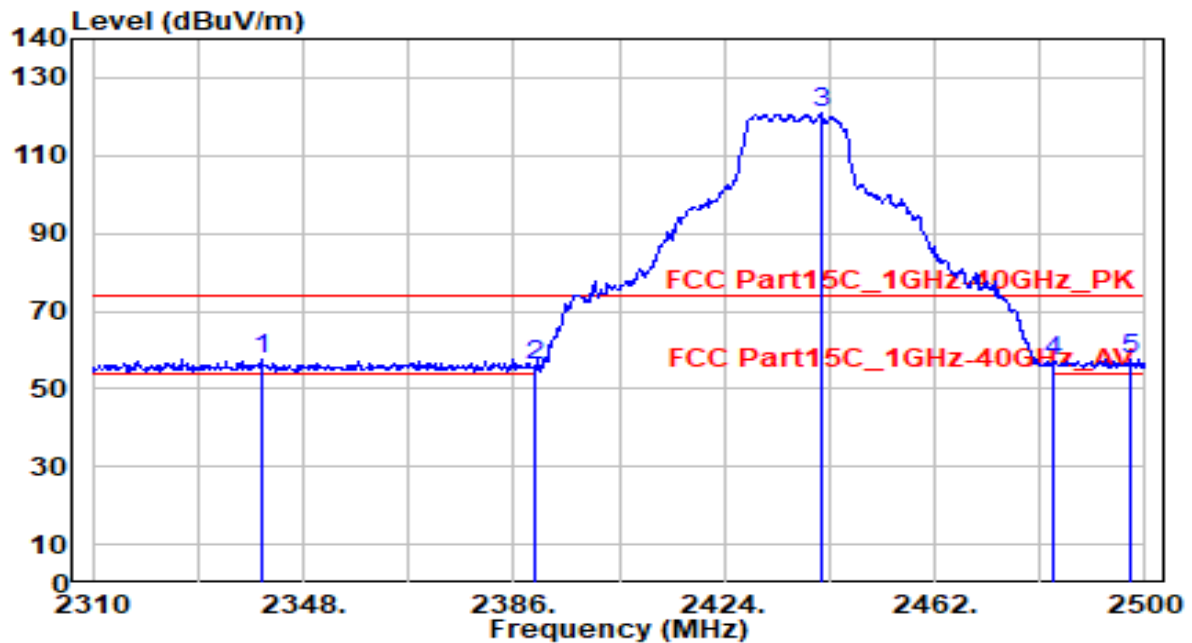


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2340.400	27.01	30.54	57.55	-16.45	74.00	245	45	Peak
2	2390.000	25.31	30.61	55.92	-18.08	74.00	245	45	Peak
3	2441.480	90.01	30.77	120.78	N/A	N/A	245	45	Peak
4	2483.500	26.29	30.91	57.20	-16.80	74.00	245	45	Peak
5	* 2497.150	26.67	30.96	57.63	-16.37	74.00	245	45	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

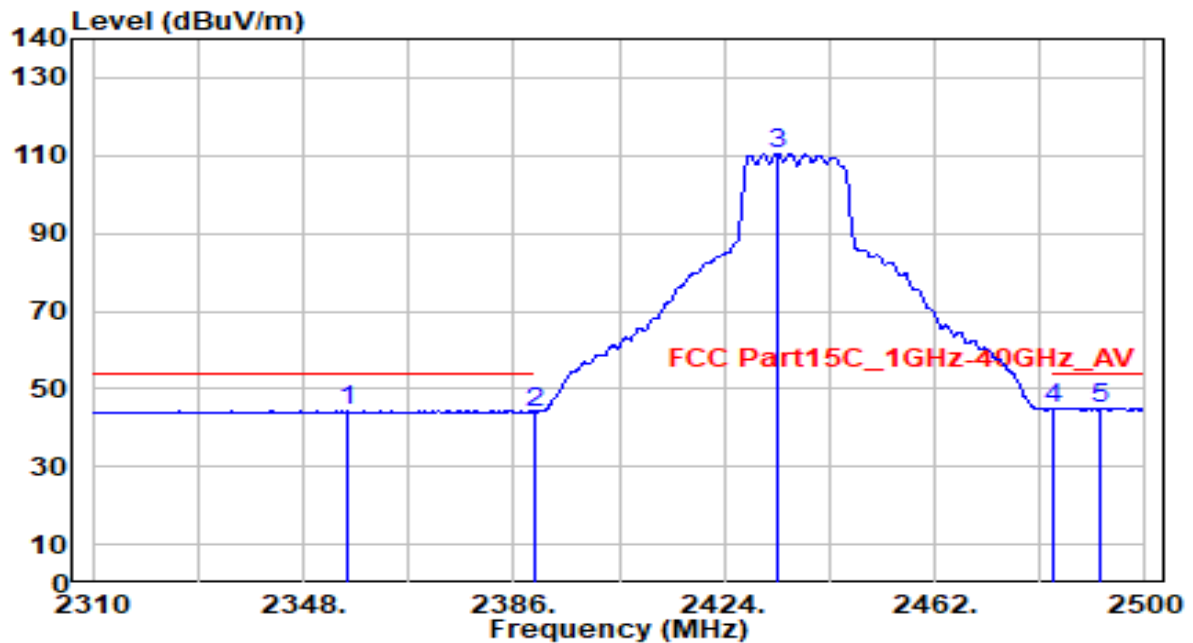


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2355.790	13.75	30.57	44.32	-9.68	54.00	245	45	Average
2	2390.000	13.41	30.61	44.03	-9.97	54.00	245	45	Average
3	2433.690	79.75	30.74	110.49	N/A	N/A	245	45	Average
4	2483.500	13.89	30.91	44.81	-9.19	54.00	245	45	Average
5	* 2491.830	14.01	30.94	44.95	-9.05	54.00	245	45	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

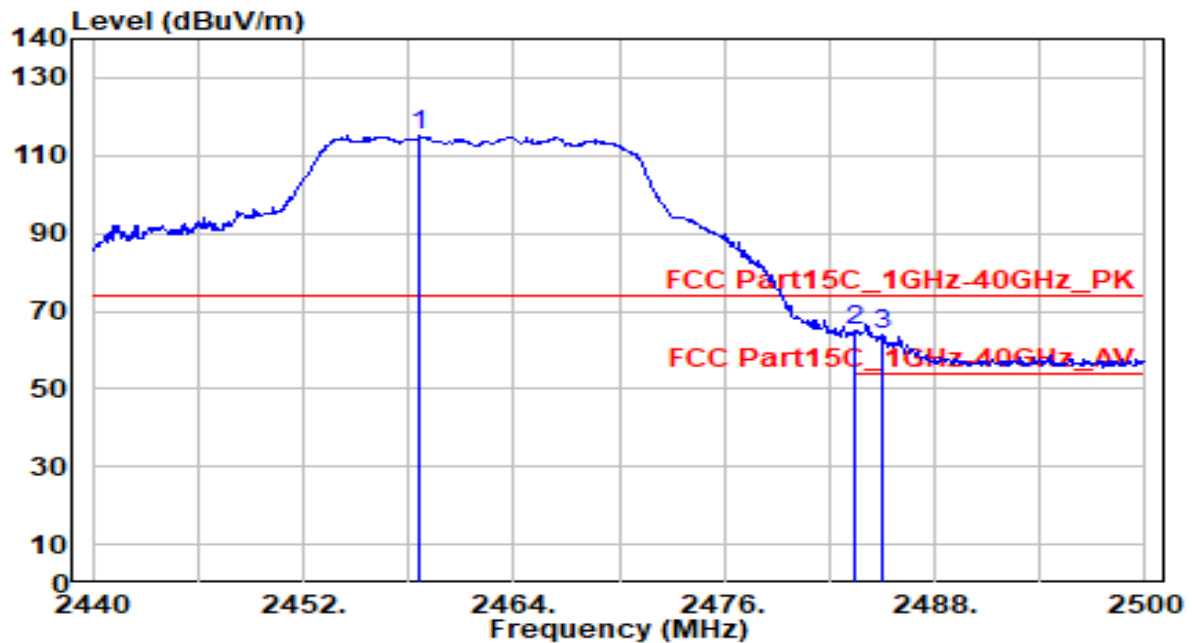


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2458.600	84.25	30.83	115.08	N/A	N/A	100	350	Peak
2	*	2483.500	33.94	30.91	64.85	-9.15	74.00	100	350	Peak
3		2485.060	33.03	30.92	63.95	-10.05	74.00	100	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

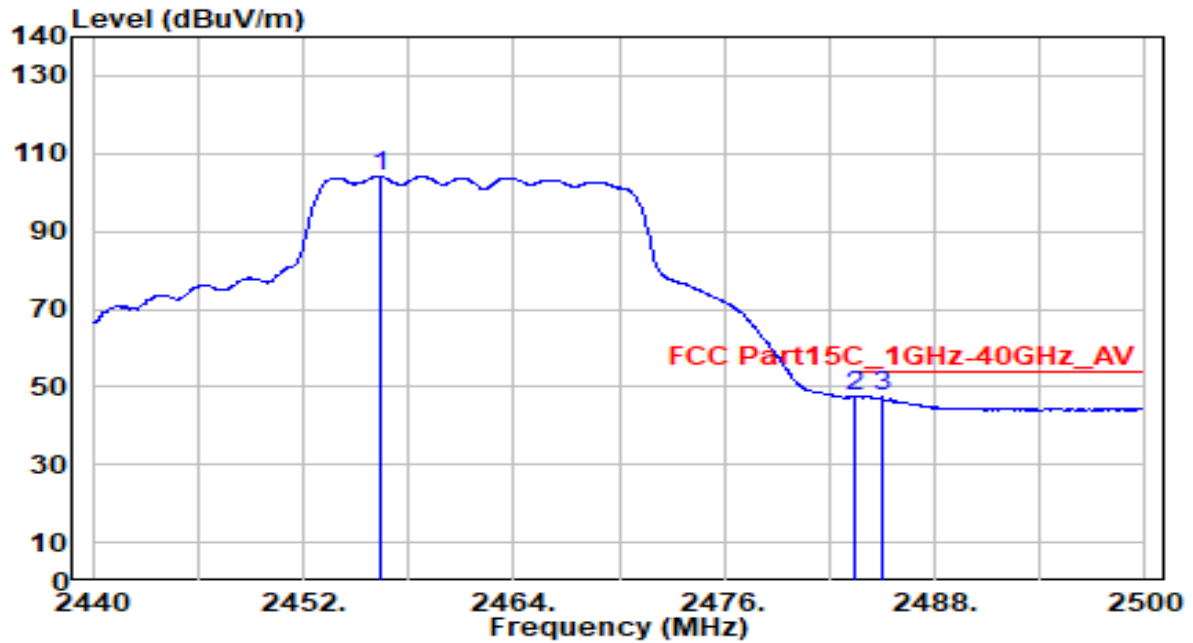


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2456.380	73.42	30.82	104.25	N/A	N/A	100	350	Average
2	*	2483.500	16.57	30.91	47.48	-6.52	54.00	100	350	Average
3		2484.940	16.43	30.92	47.35	-6.65	54.00	100	350	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

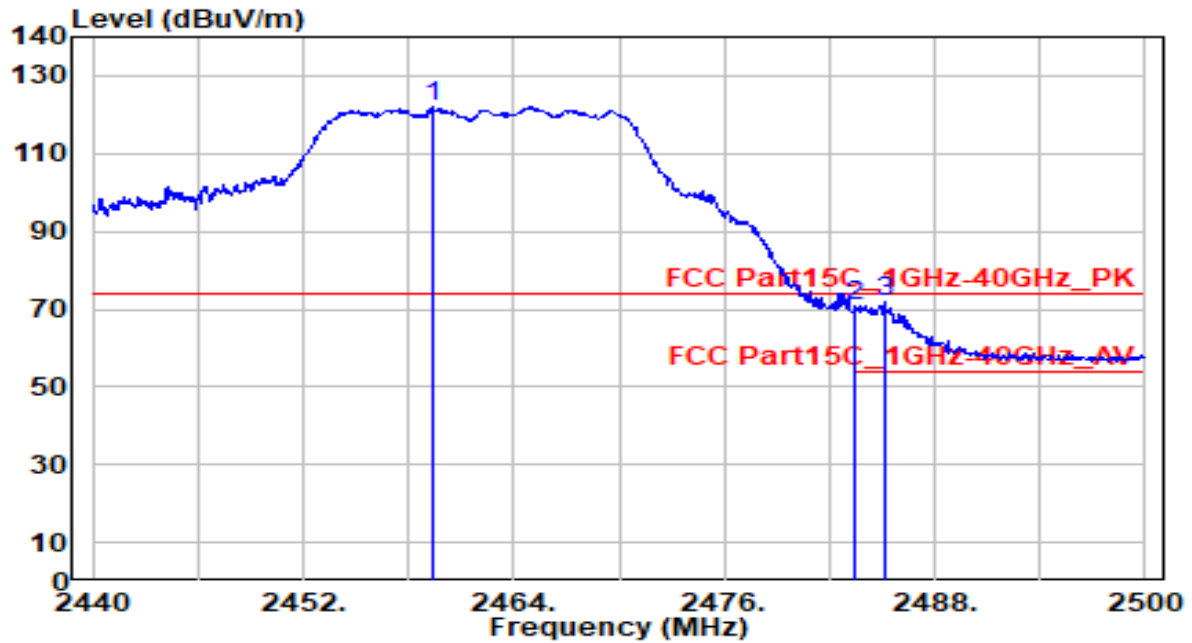


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.440	91.19	30.83	122.02	N/A	N/A	240	40	Peak
2	2483.500	39.70	30.91	70.62	-3.38	74.00	240	40	Peak
3	* 2485.180	41.03	30.92	71.95	-2.05	74.00	240	40	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

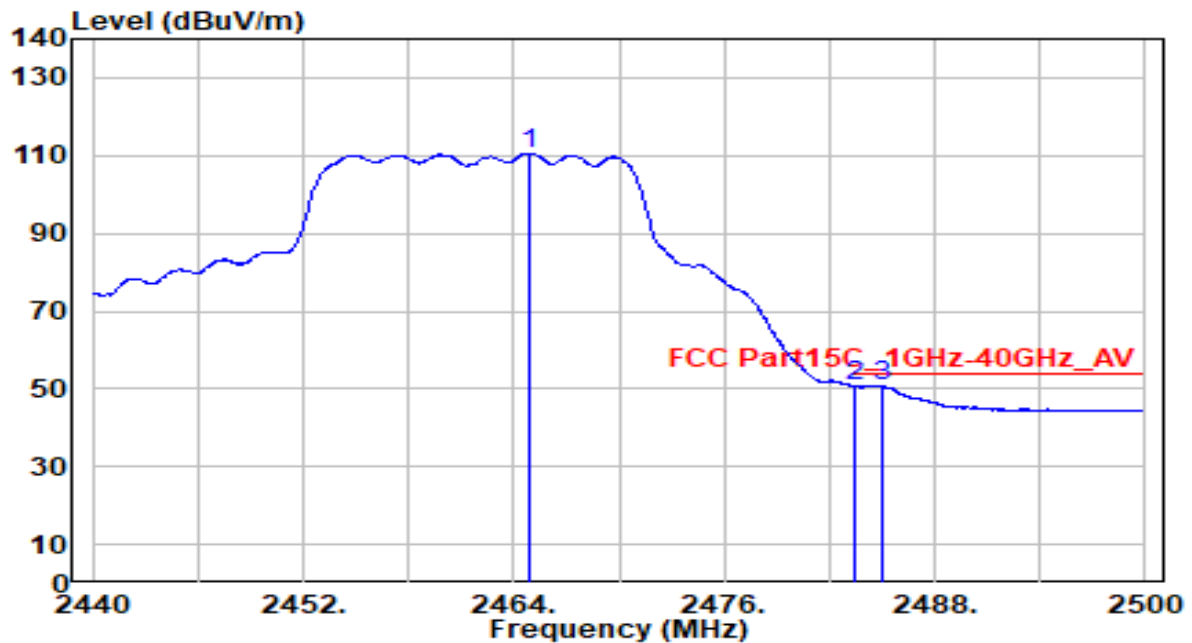


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2464.840	79.71	30.85	110.56	N/A	N/A	240	40	Average
2	2483.500	19.56	30.91	50.47	-3.53	54.00	240	40	Average
3	* 2485.000	20.05	30.92	50.97	-3.03	54.00	240	40	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

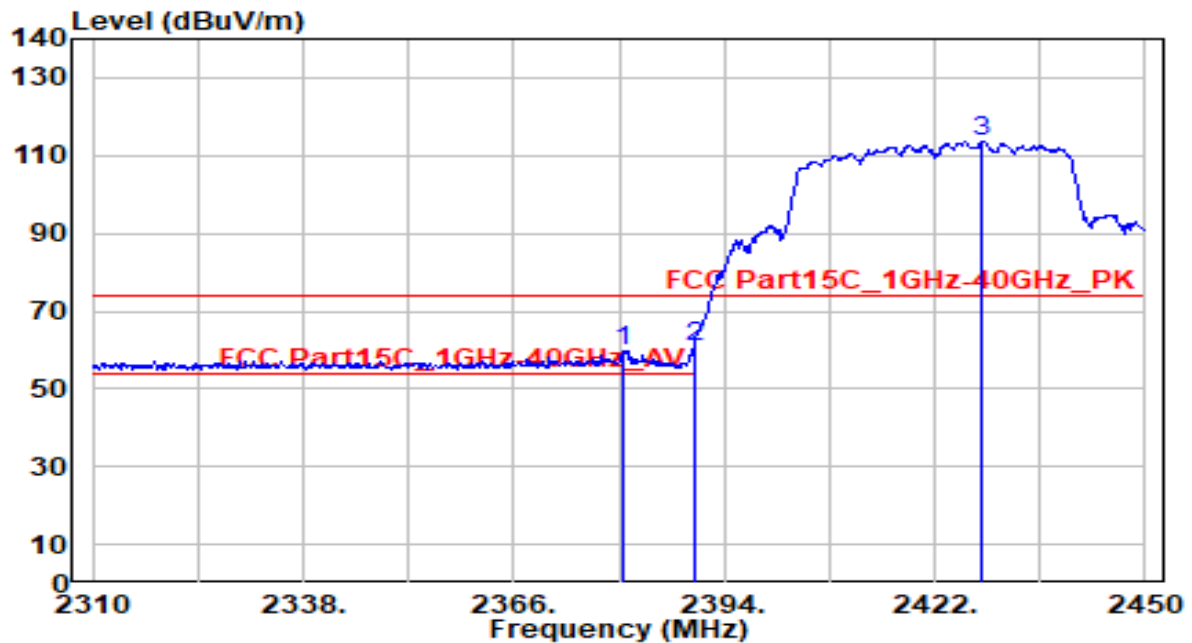


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2380.700	29.03	30.60	59.63	-14.37	74.00	150	350	Peak
2	* 2390.000	30.13	30.61	60.75	-13.25	74.00	150	350	Peak
3	2428.300	82.99	30.72	113.72	N/A	N/A	150	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

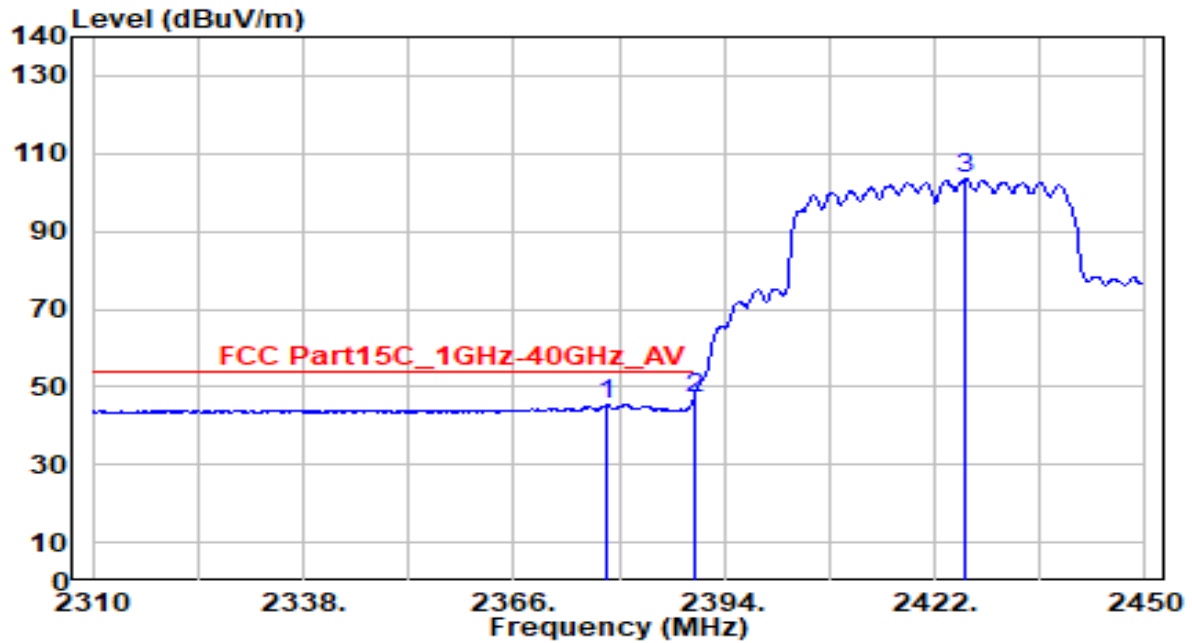


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2378.320	14.82	30.60	45.42	-8.58	54.00	150	350	Average
2	*	2390.000	16.22	30.61	46.83	-7.17	54.00	150	350	Average
3		2426.200	72.62	30.72	103.33	N/A	N/A	150	350	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

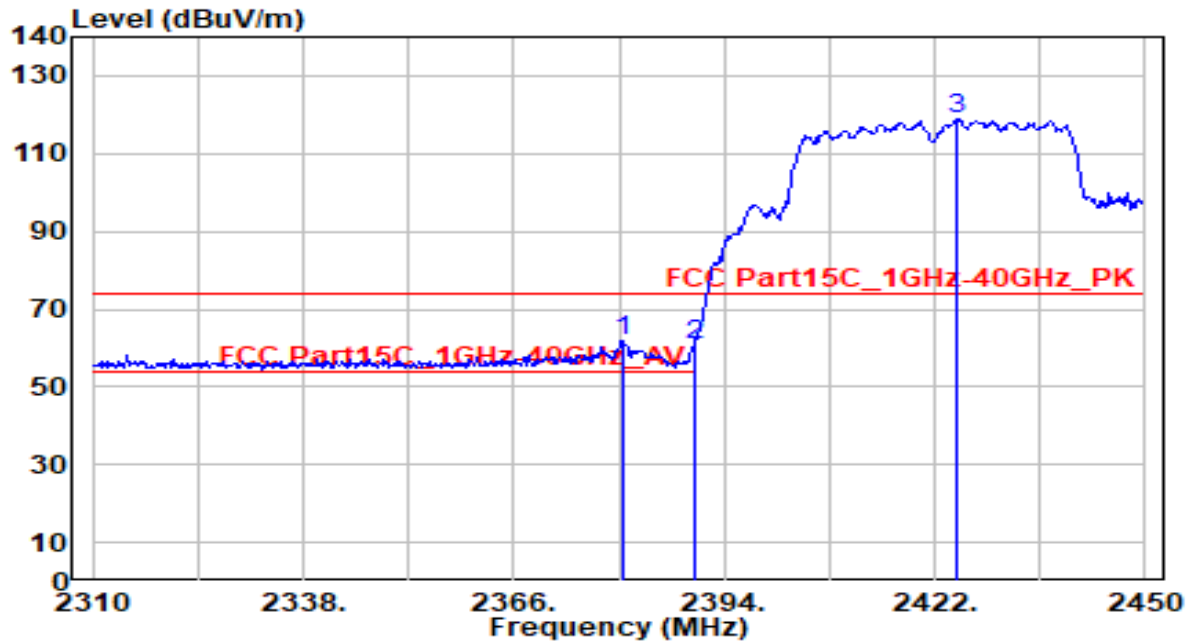


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2380.560	31.06	30.60	61.66	-12.34	74.00	250	45	Peak
2		2390.000	29.94	30.61	60.55	-13.45	74.00	250	45	Peak
3		2424.940	88.20	30.71	118.91	N/A	N/A	250	45	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

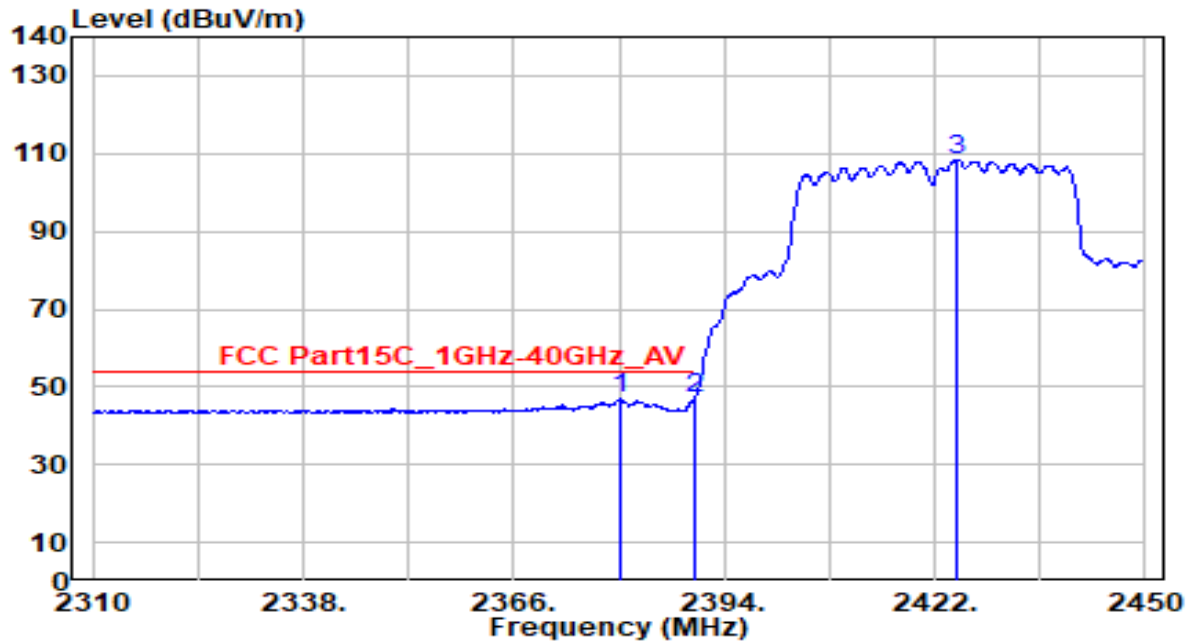


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2380.140	16.18	30.60	46.78	-7.22	54.00	250	45	Average
2	*	2390.000	16.26	30.61	46.88	-7.12	54.00	250	45	Average
3		2424.800	77.66	30.71	108.38	N/A	N/A	250	45	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

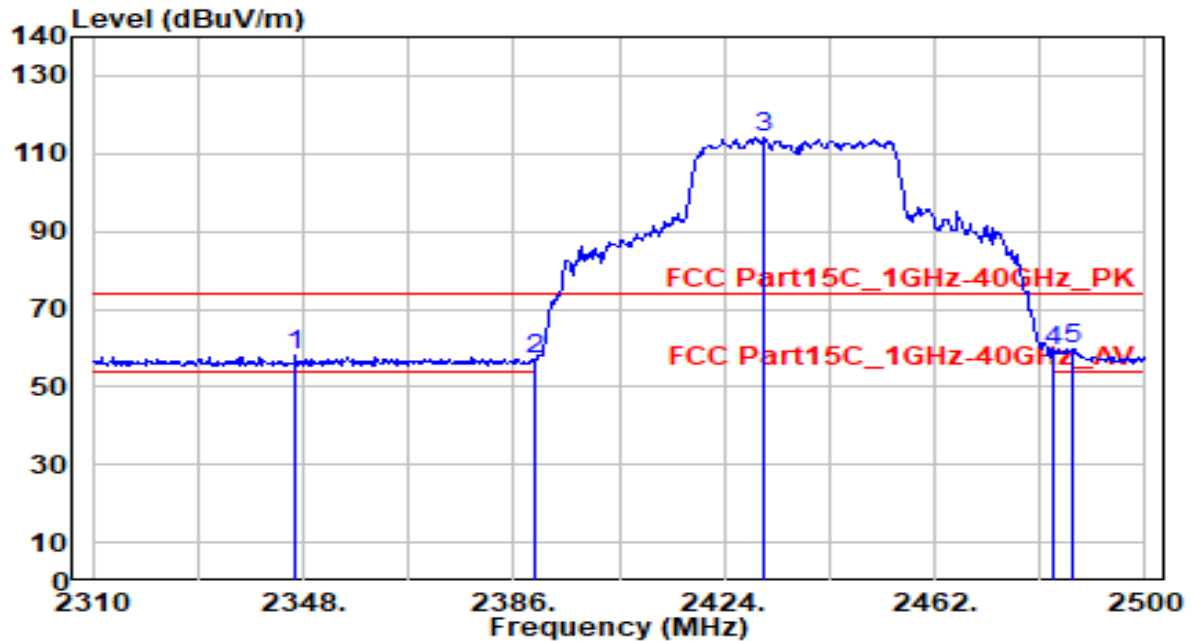


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2346.670	27.43	30.55	57.99	-16.01	74.00	150	345	Peak
2	2390.000	26.29	30.61	56.90	-17.10	74.00	150	345	Peak
3	2431.220	83.34	30.73	114.08	N/A	N/A	150	345	Peak
4	2483.500	28.36	30.91	59.27	-14.73	74.00	150	345	Peak
5	* 2487.080	28.85	30.93	59.77	-14.23	74.00	150	345	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

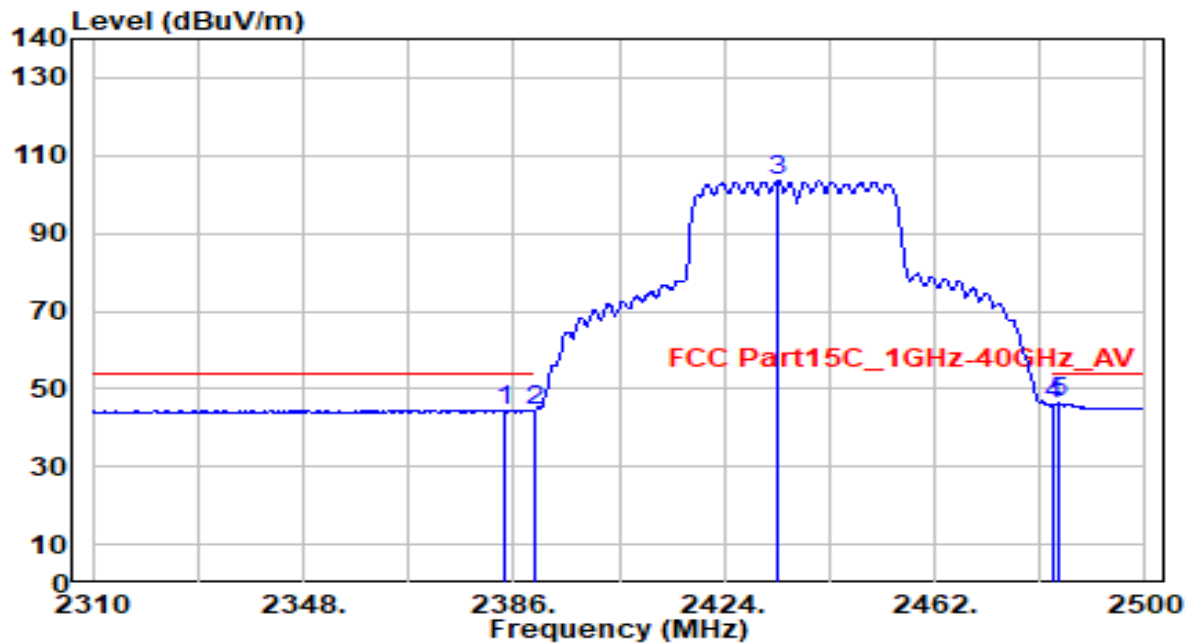


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2384.480	13.97	30.61	44.57	-9.43	54.00	150	345	Average
2	2390.000	13.83	30.61	44.44	-9.56	54.00	150	345	Average
3	2433.690	72.74	30.74	103.48	N/A	N/A	150	345	Average
4	2483.500	15.13	30.91	46.05	-7.95	54.00	150	345	Average
5	* 2484.420	15.33	30.92	46.24	-7.76	54.00	150	345	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

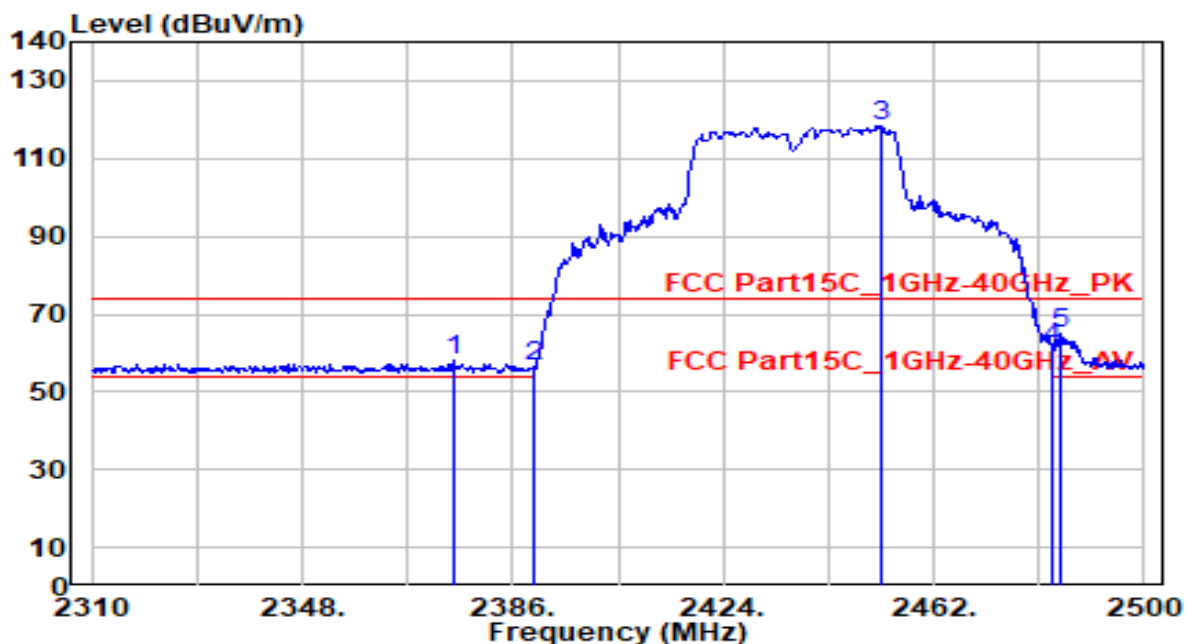


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2375.170	27.31	30.59	57.90	-16.10	74.00	200	40	Peak
2	2390.000	25.67	30.61	56.29	-17.71	74.00	200	40	Peak
3	2452.500	87.65	30.81	118.45	N/A	N/A	200	40	Peak
4	2483.500	30.23	30.91	61.15	-12.85	74.00	200	40	Peak
5	* 2484.990	33.88	30.92	64.80	-9.20	74.00	200	40	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

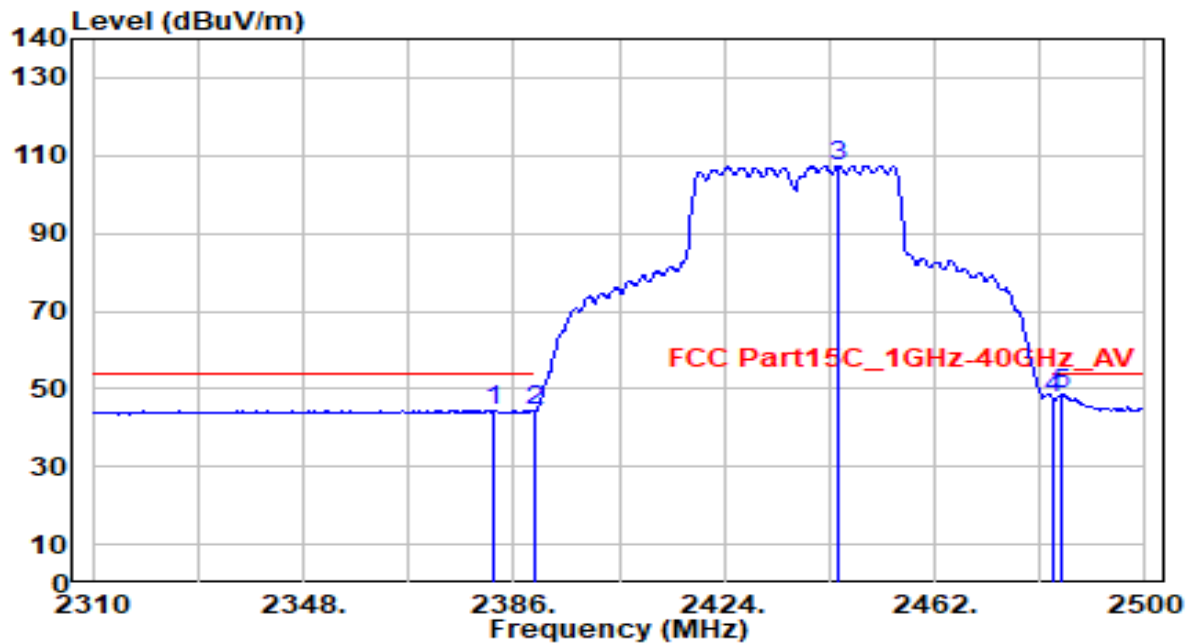


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2382.200	13.89	30.60	44.49	-9.51	54.00	200	40	Average
2	2390.000	13.63	30.61	44.24	-9.76	54.00	200	40	Average
3	2444.520	76.65	30.78	107.43	N/A	N/A	200	40	Average
4	2483.500	16.51	30.91	47.42	-6.58	54.00	200	40	Average
5	* 2484.990	17.55	30.92	48.47	-5.53	54.00	200	40	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

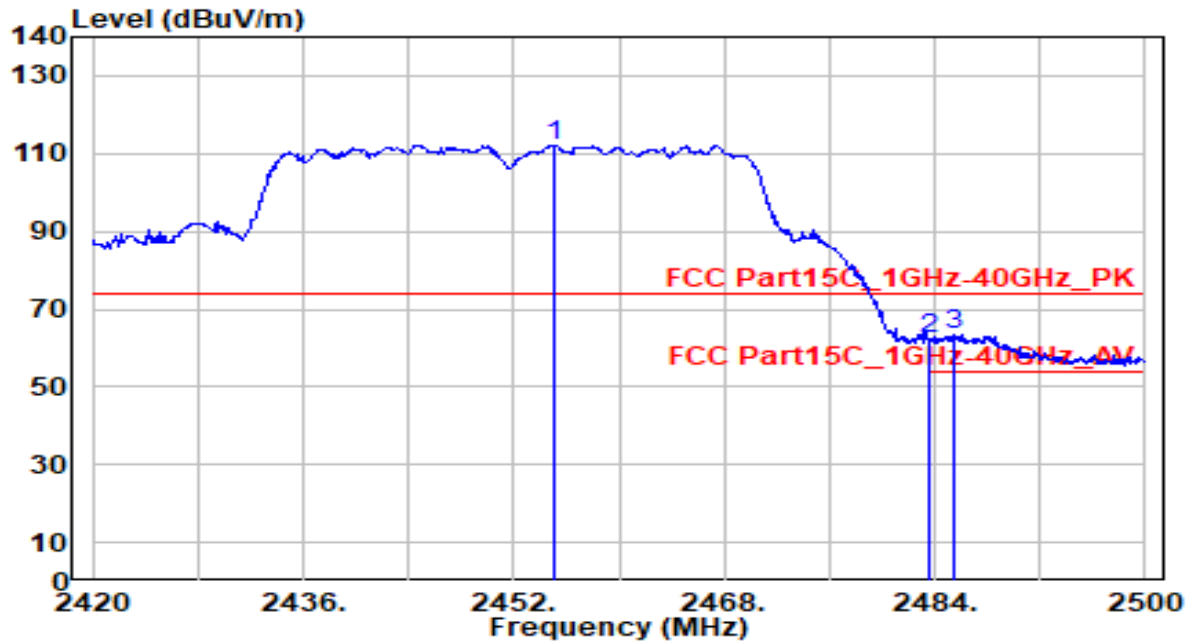


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.120	81.44	30.82	112.26	N/A	N/A	115	335	Peak
2	2483.500	31.44	30.91	62.35	-11.65	74.00	115	335	Peak
3	* 2485.520	32.51	30.92	63.43	-10.57	74.00	115	335	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

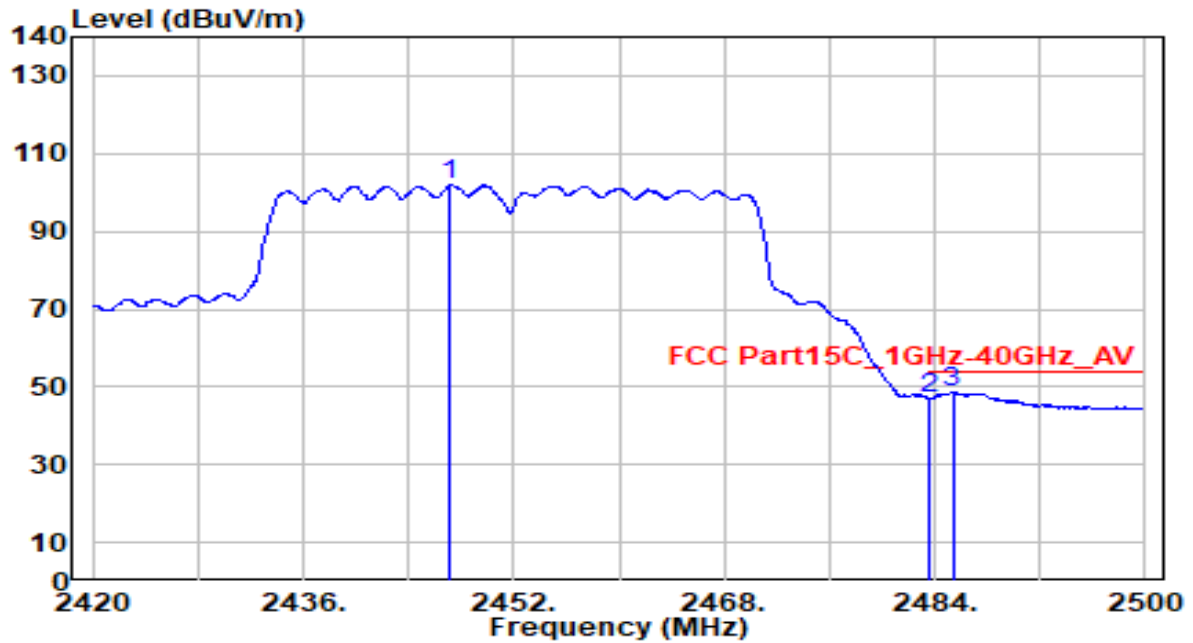


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2447.200	70.94	30.79	101.73	N/A	N/A	115	335	Average
2	2483.500	16.33	30.91	47.24	-6.76	54.00	115	335	Average
3	* 2485.360	17.65	30.92	48.57	-5.43	54.00	115	335	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

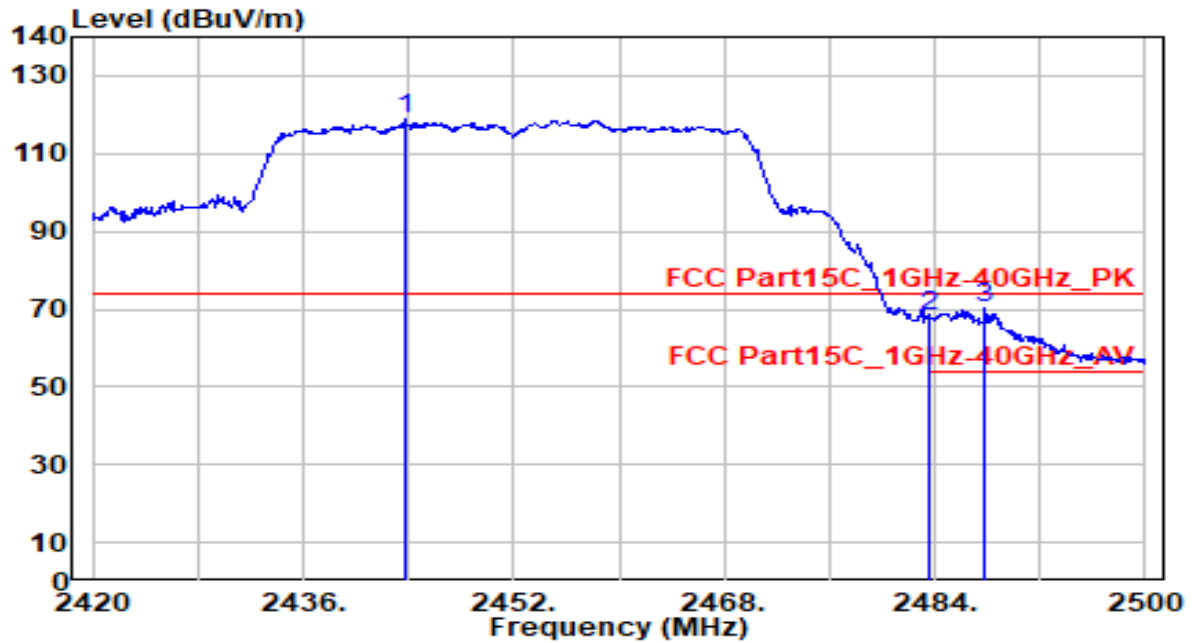


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2443.680	87.87	30.78	118.65	N/A	N/A	215	40	Peak
2	2483.500	37.07	30.91	67.98	-6.02	74.00	215	40	Peak
3	* 2487.840	39.11	30.93	70.03	-3.97	74.00	215	40	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

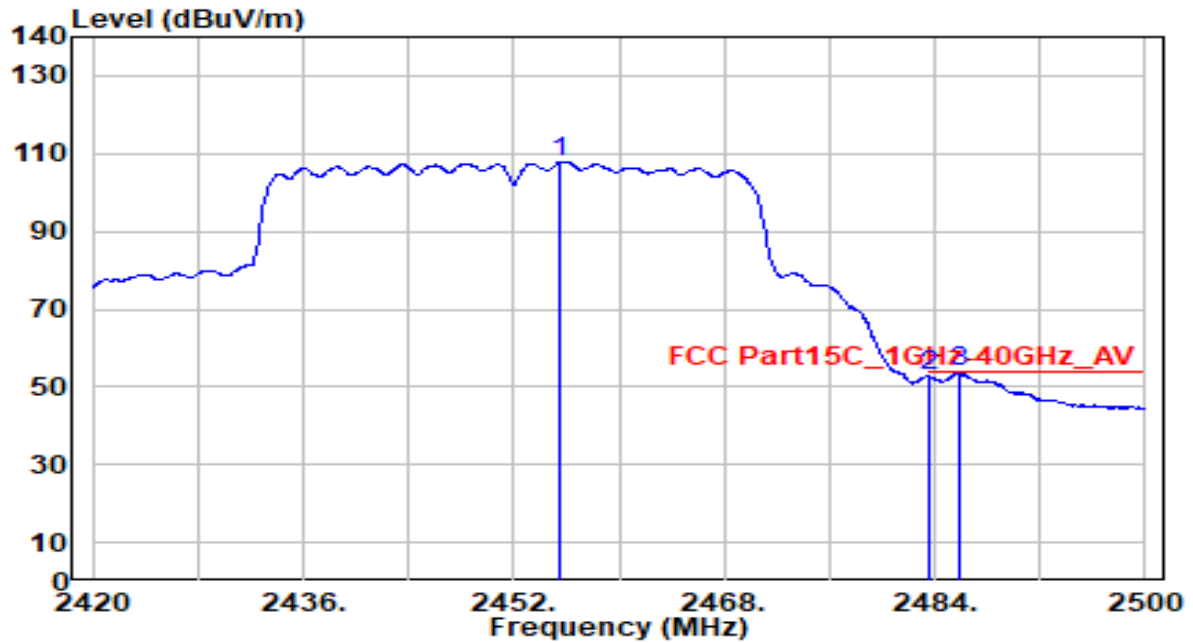


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.520	76.83	30.82	107.64	N/A	N/A	215	40	Average
2	2483.500	21.78	30.91	52.69	-1.31	54.00	215	40	Average
3	* 2485.840	22.89	30.92	53.81	-0.19	54.00	215	40	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

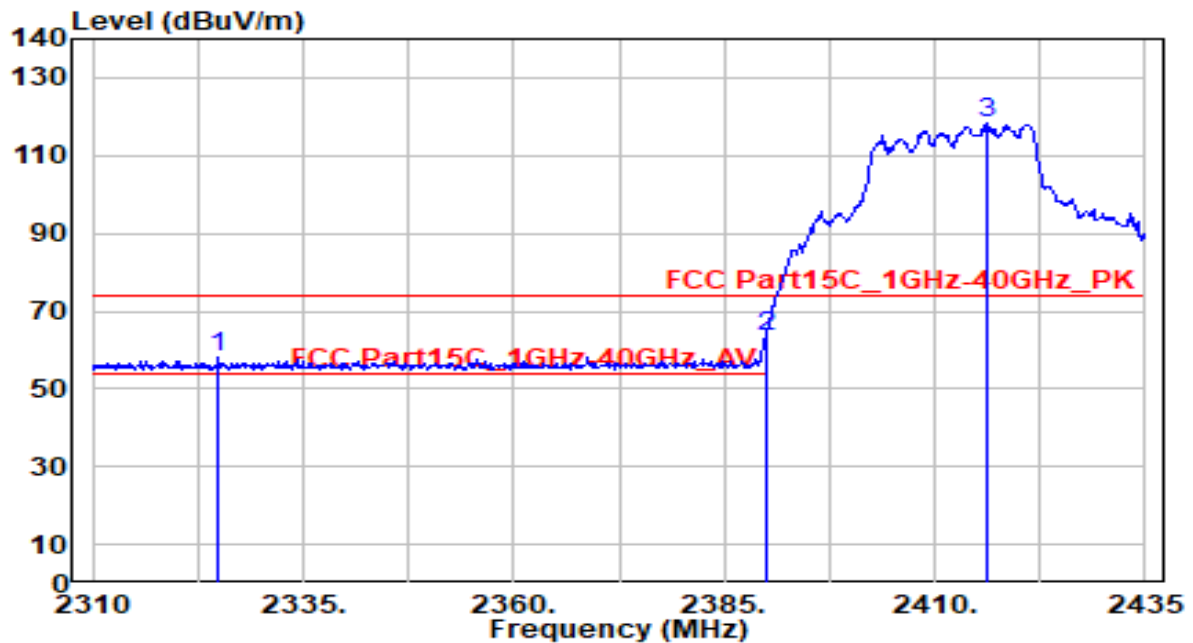


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2325.000	27.82	30.52	58.34	-15.66	74.00	150	350	Peak
2	* 2390.000	32.79	30.61	63.40	-10.60	74.00	150	350	Peak
3	2416.250	87.69	30.68	118.37	N/A	N/A	150	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

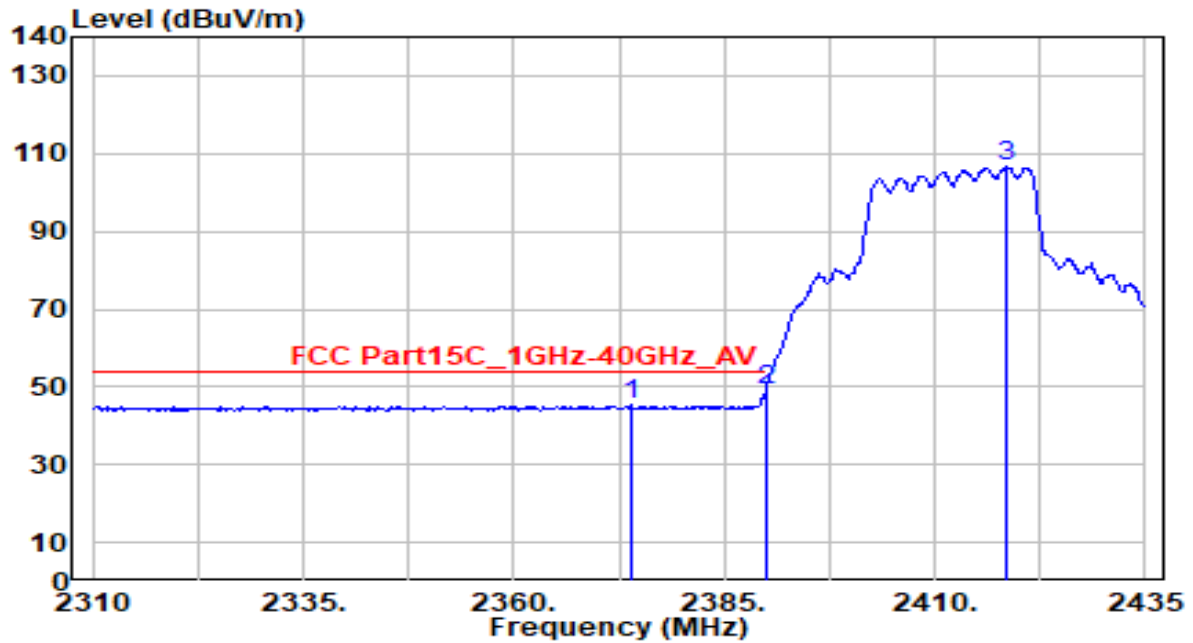


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2373.875	14.69	30.59	45.29	-8.71	54.00	150	350	Average
2	* 2390.000	18.64	30.61	49.25	-4.75	54.00	150	350	Average
3	2418.625	76.12	30.69	106.81	N/A	N/A	150	350	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

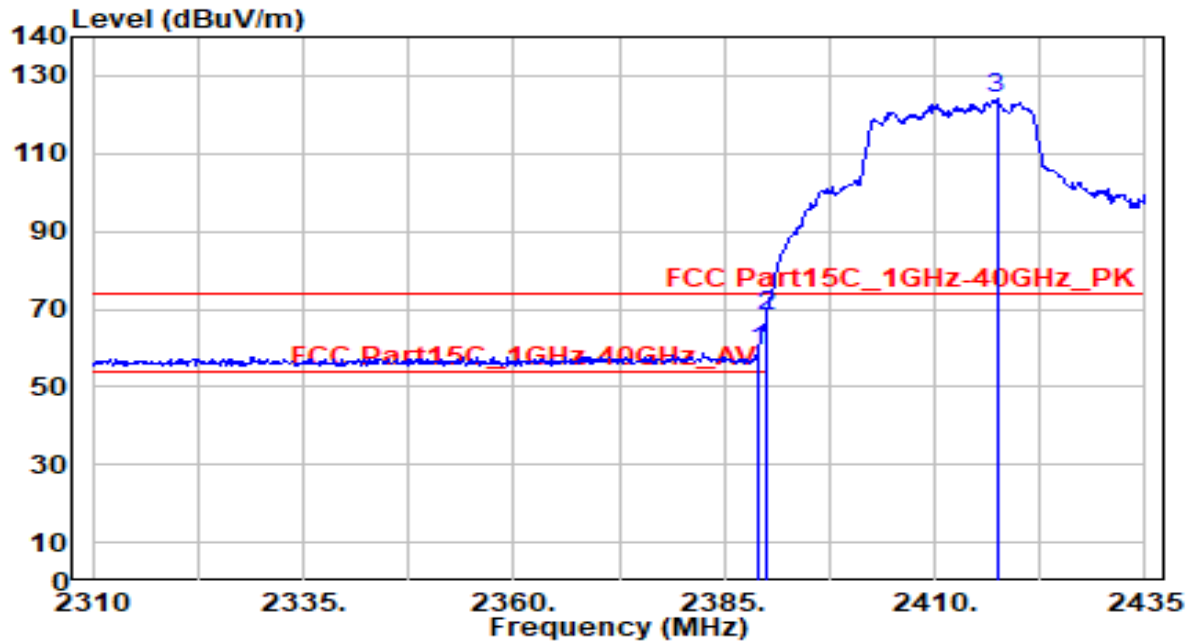


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.000	28.75	30.61	59.36	-14.64	74.00	245	40	Peak
2	* 2390.000	37.49	30.61	68.10	-5.90	74.00	245	40	Peak
3	2417.375	93.43	30.69	124.12	N/A	N/A	245	40	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

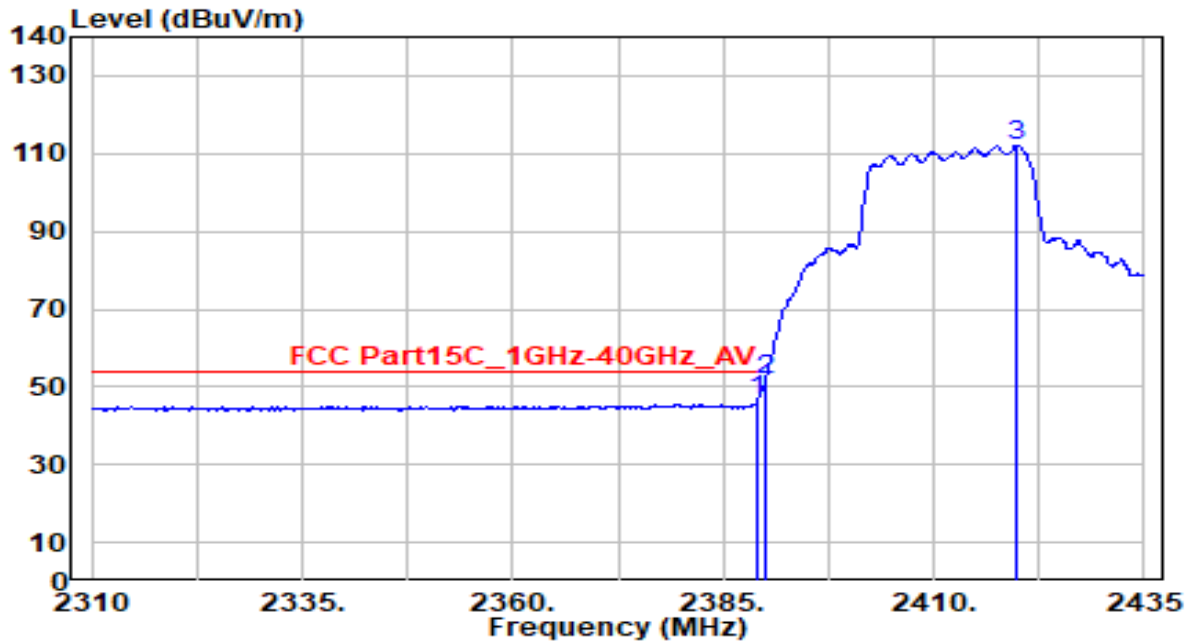


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.000	15.66	30.61	46.27	-7.73	54.00	245	40	Average
2	* 2390.000	21.39	30.61	52.01	-1.99	54.00	245	40	Average
3	2419.875	81.35	30.70	112.05	N/A	N/A	245	40	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

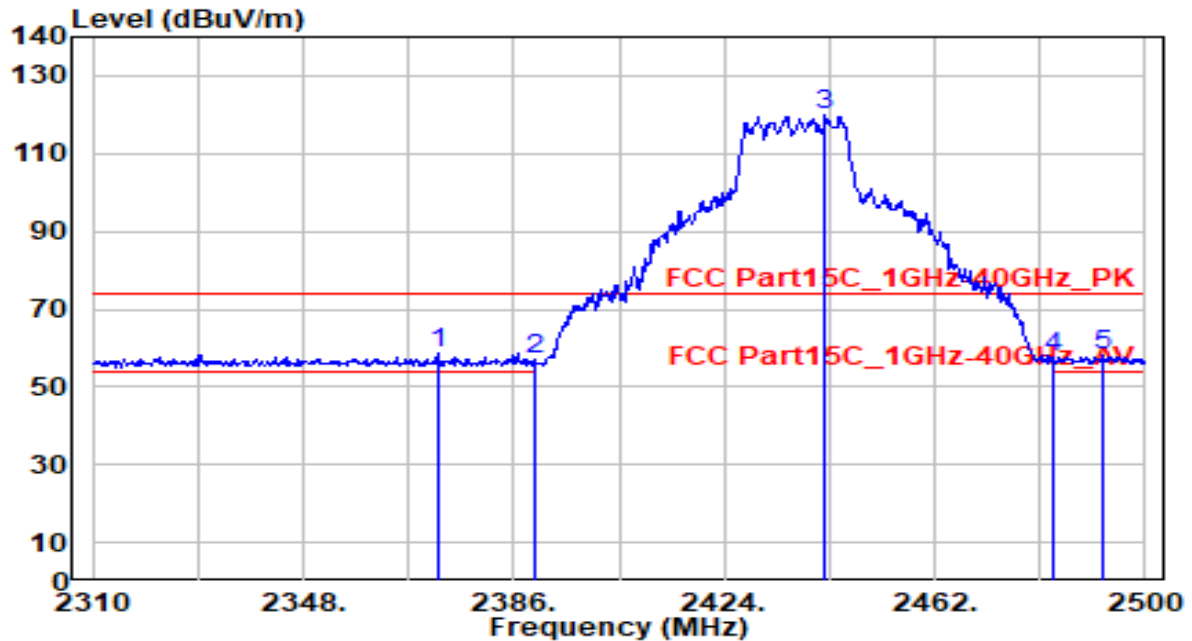


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2372.320	27.96	30.59	58.54	-15.46	74.00	145	345	Peak
2		2390.000	26.37	30.61	56.98	-17.02	74.00	145	345	Peak
3		2442.240	88.97	30.77	119.74	N/A	N/A	145	345	Peak
4		2483.500	26.59	30.91	57.50	-16.50	74.00	145	345	Peak
5		2492.400	27.23	30.94	58.17	-15.83	74.00	145	345	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

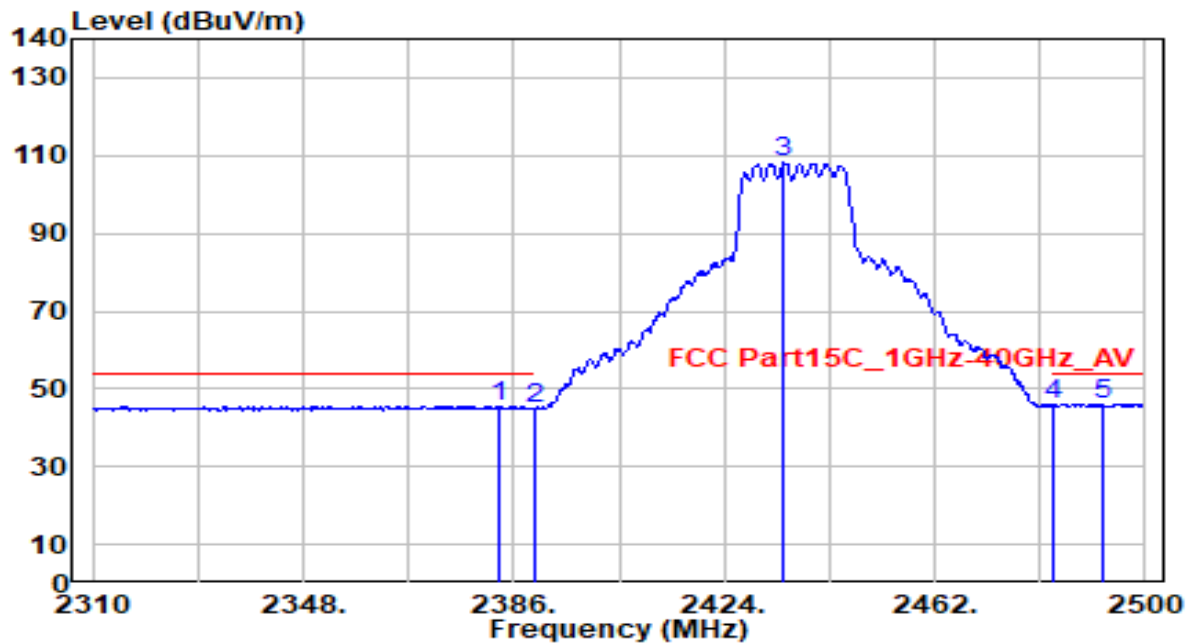


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2383.530	14.95	30.60	45.56	-8.44	54.00	145	345	Average
2	2390.000	14.35	30.61	44.97	-9.03	54.00	145	345	Average
3	2434.830	77.33	30.75	108.07	N/A	N/A	145	345	Average
4	2483.500	14.86	30.91	45.77	-8.23	54.00	145	345	Average
5	* 2492.590	15.26	30.94	46.21	-7.79	54.00	145	345	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

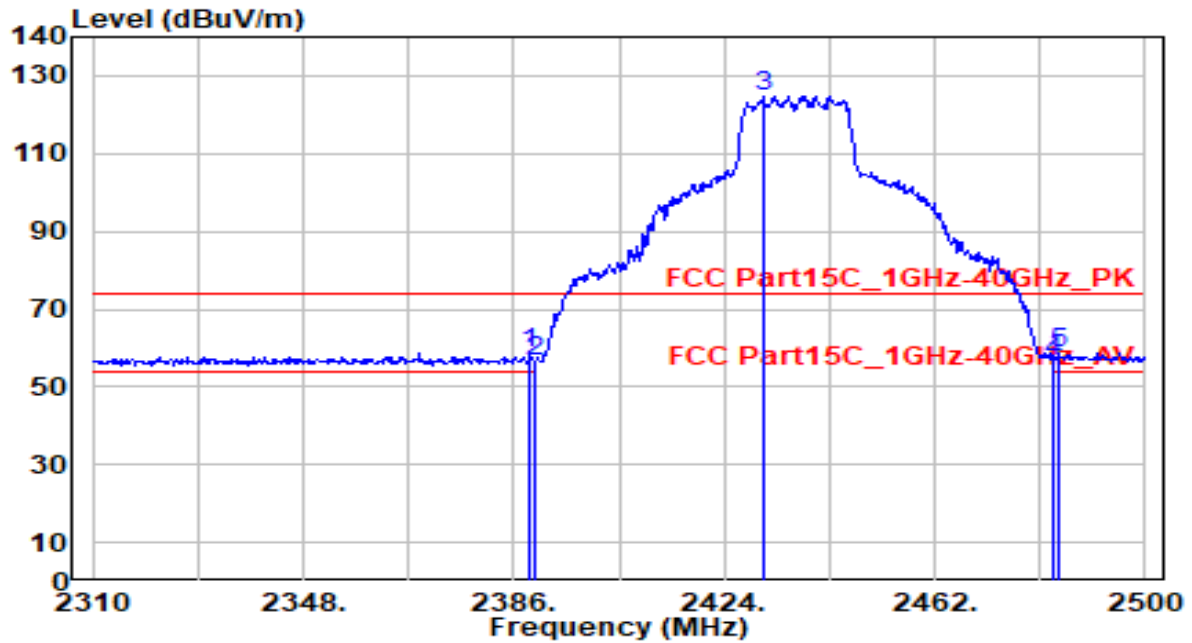


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.850	28.08	30.61	58.69	-15.31	74.00	140	35	Peak
2	2390.000	26.18	30.61	56.79	-17.21	74.00	140	35	Peak
3	2431.030	93.97	30.73	124.70	N/A	N/A	140	35	Peak
4	2483.500	25.70	30.91	56.62	-17.38	74.00	140	35	Peak
5	* 2484.610	27.96	30.92	58.88	-15.12	74.00	140	35	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

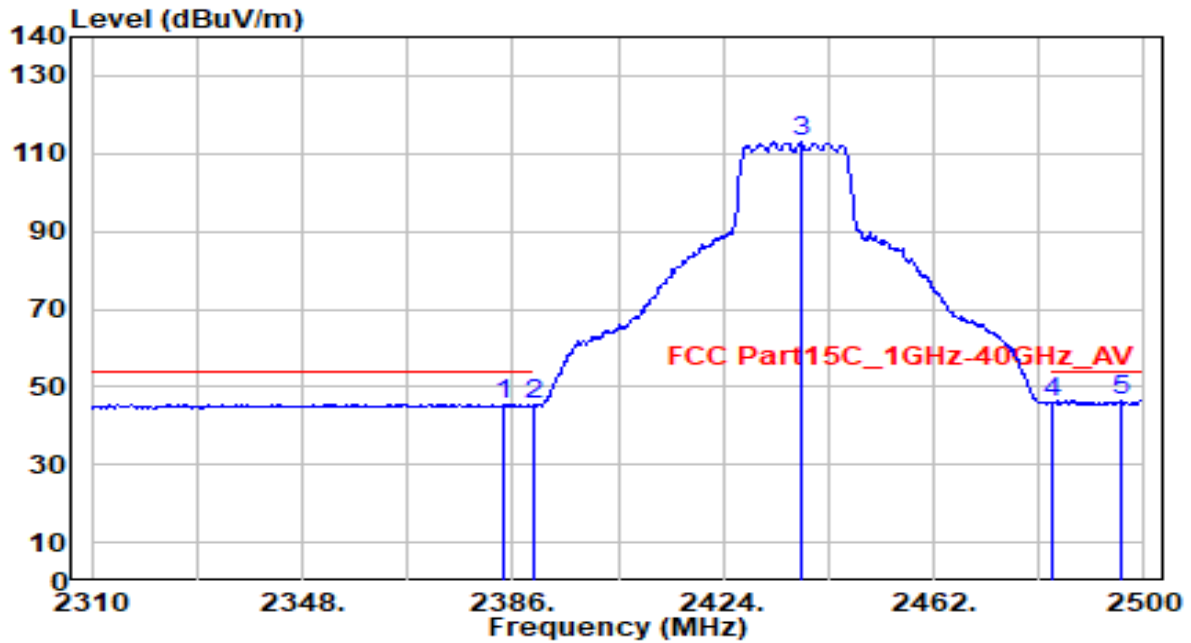


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2384.480	15.05	30.61	45.65	-8.35	54.00	140	35	Average
2	2390.000	14.76	30.61	45.37	-8.63	54.00	140	35	Average
3	2438.060	82.29	30.76	113.05	N/A	N/A	140	35	Average
4	2483.500	14.84	30.91	45.76	-8.24	54.00	140	35	Average
5	* 2495.820	15.48	30.96	46.44	-7.56	54.00	140	35	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

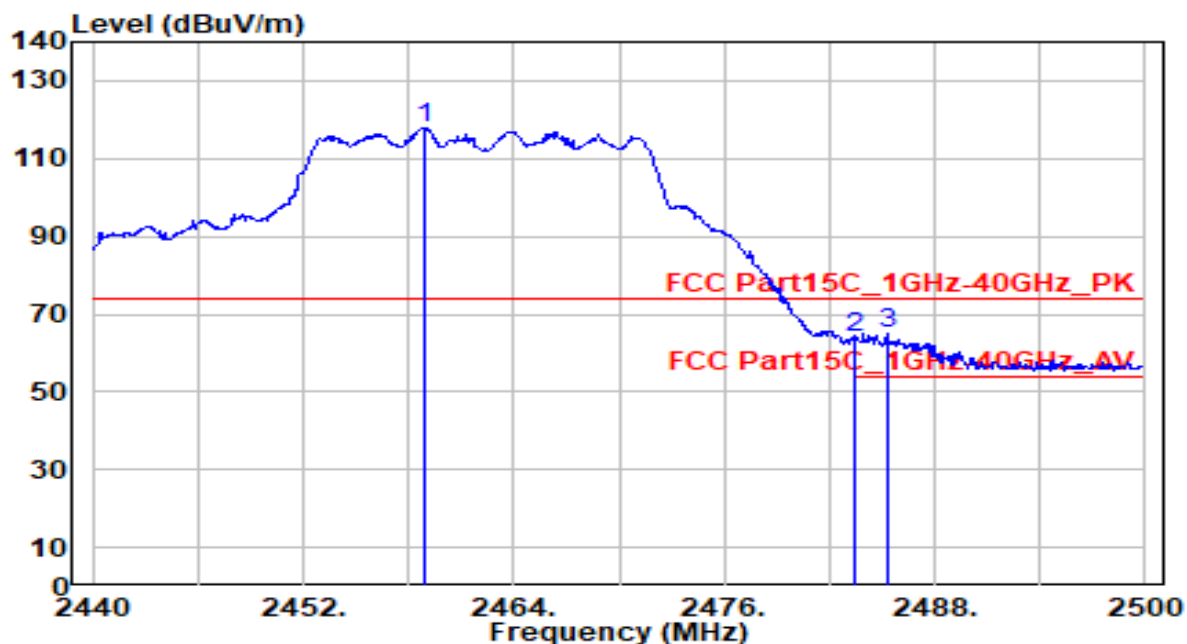


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.900	87.11	30.83	117.93	N/A	N/A	115	335	Peak
2	2483.500	32.90	30.91	63.81	-10.19	74.00	115	335	Peak
3	* 2485.300	34.01	30.92	64.93	-9.07	74.00	115	335	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

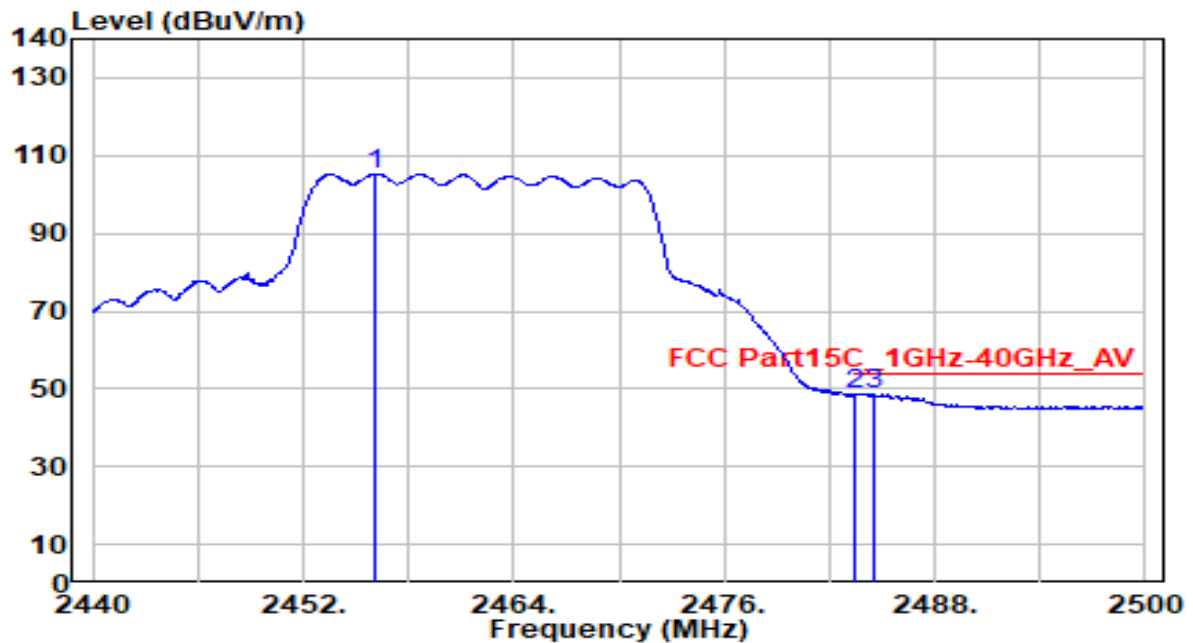


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2456.140	74.56	30.82	105.38	N/A	N/A	115	335	Average
2	2483.500	17.44	30.91	48.36	-5.64	54.00	115	335	Average
3	* 2484.580	17.61	30.92	48.53	-5.47	54.00	115	335	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

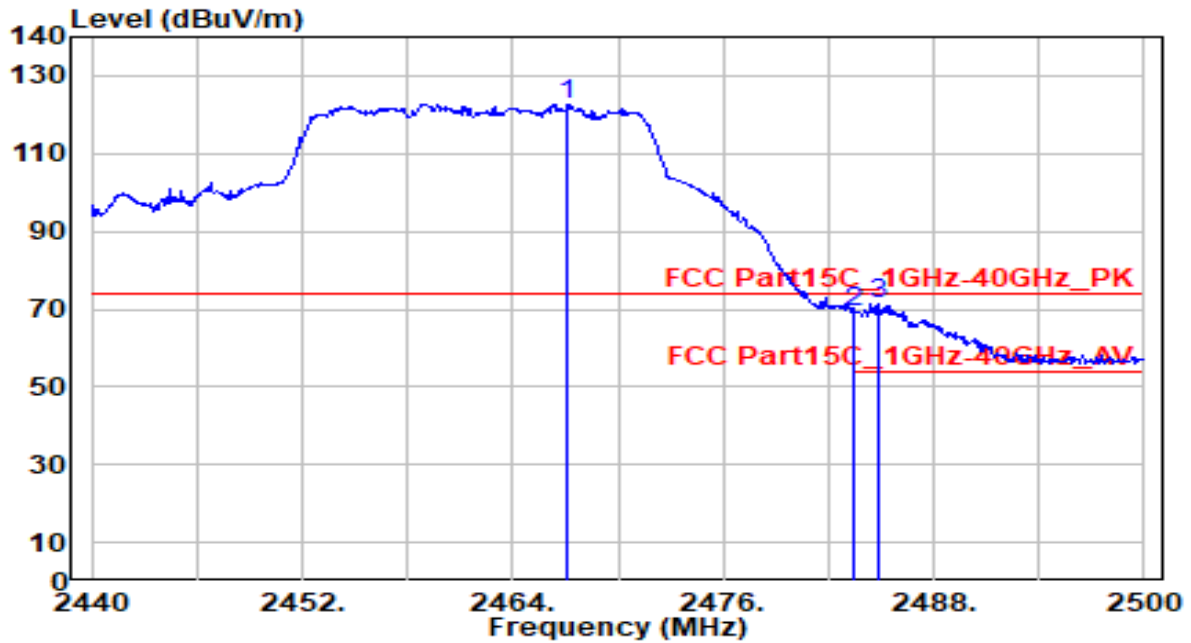


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2467.120	91.91	30.86	122.77	N/A	N/A	210	40	Peak
2		2483.500	38.43	30.91	69.34	-4.66	74.00	210	40	Peak
3	*	2484.820	40.31	30.92	71.23	-2.77	74.00	210	40	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

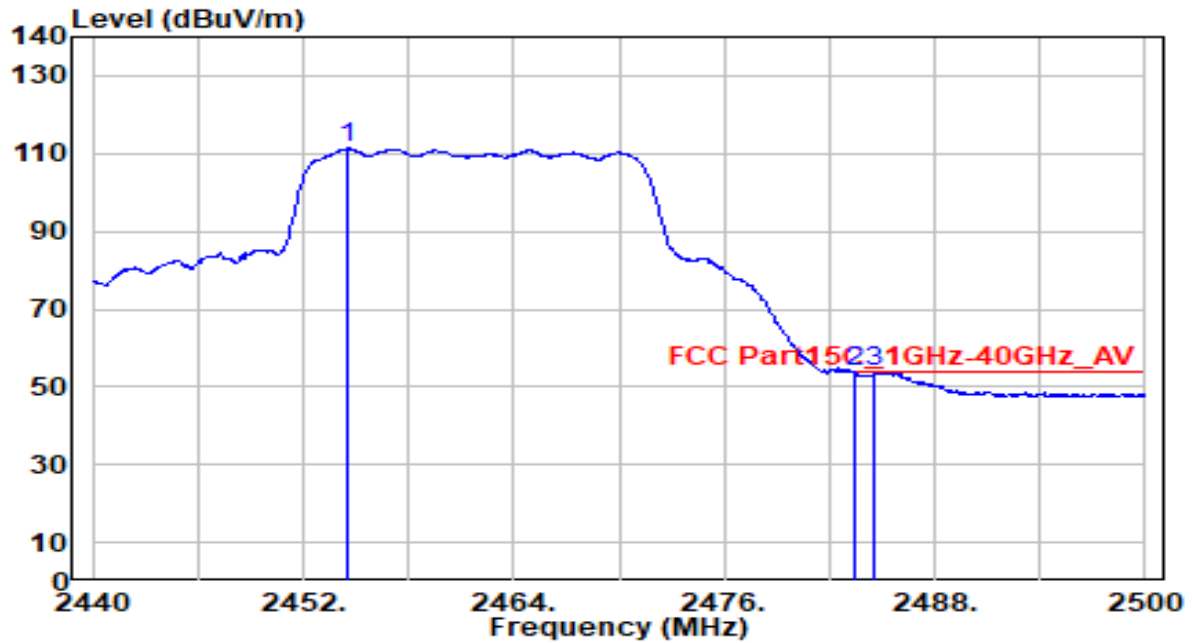


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2454.580	80.45	30.81	111.26	N/A	N/A	210	40	Average
2	2483.500	22.85	30.91	53.77	-0.23	54.00	210	40	Average
3	* 2484.580	22.98	30.92	53.90	-0.10	54.00	210	40	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

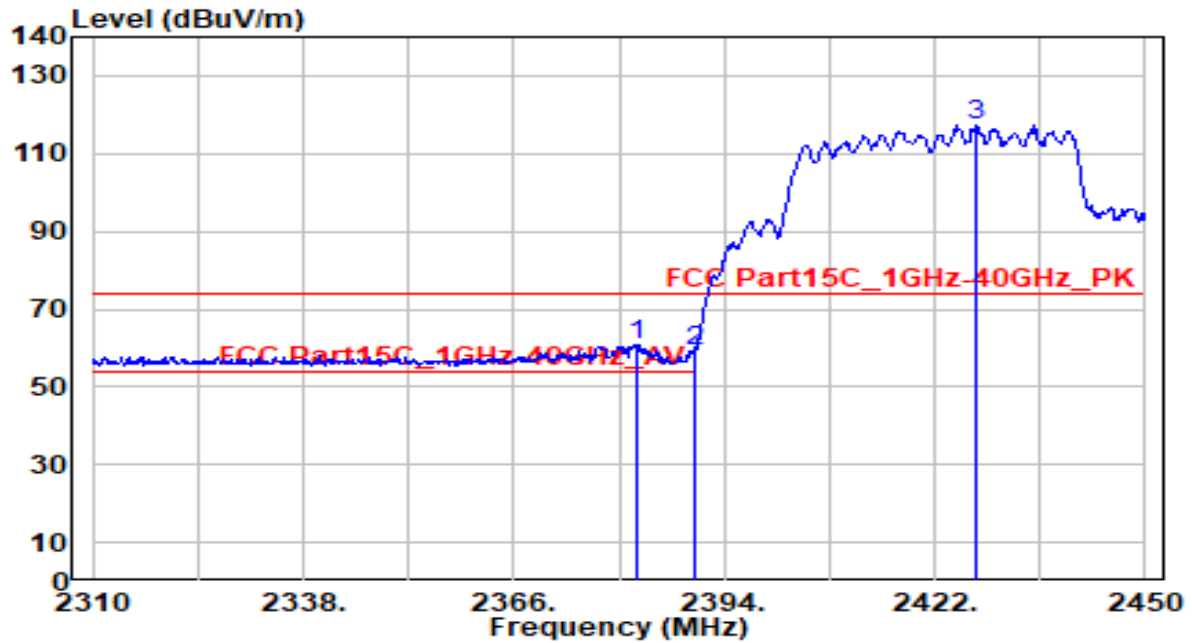


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2382.380	30.11	30.60	60.71	-13.29	74.00	155	345	Peak
2		2390.000	28.42	30.61	59.03	-14.97	74.00	155	345	Peak
3		2427.460	86.80	30.72	117.52	N/A	N/A	155	345	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

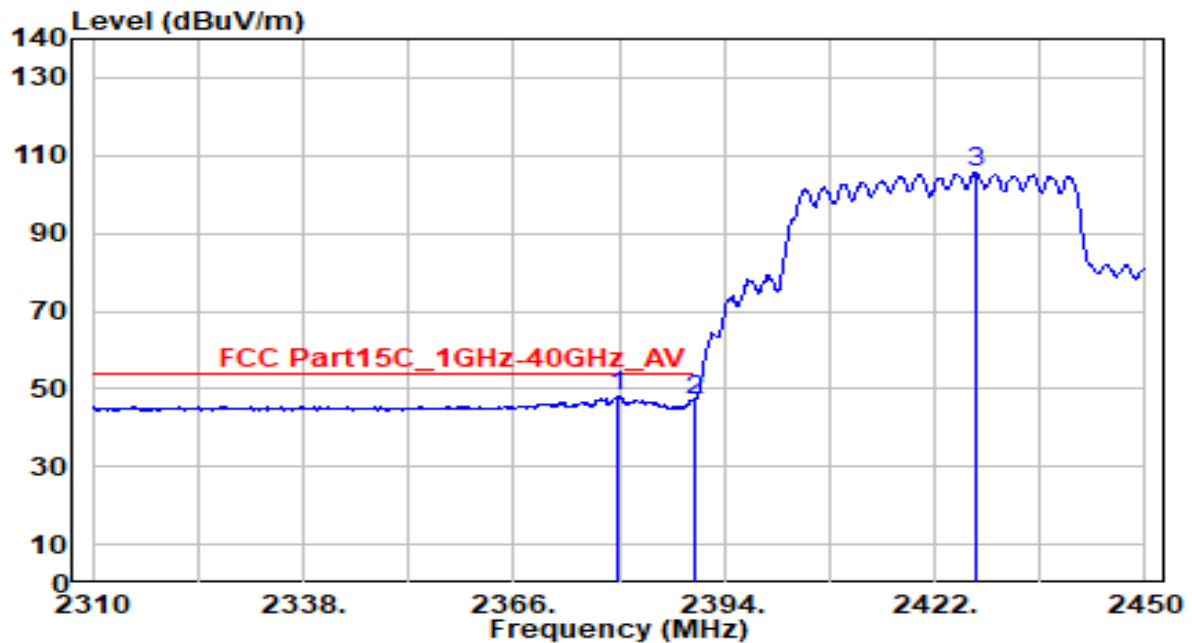


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2379.720	17.38	30.60	47.98	-6.02	54.00	155	345	Average
2		2390.000	16.62	30.61	47.23	-6.77	54.00	155	345	Average
3		2427.600	75.03	30.72	105.76	N/A	N/A	155	345	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

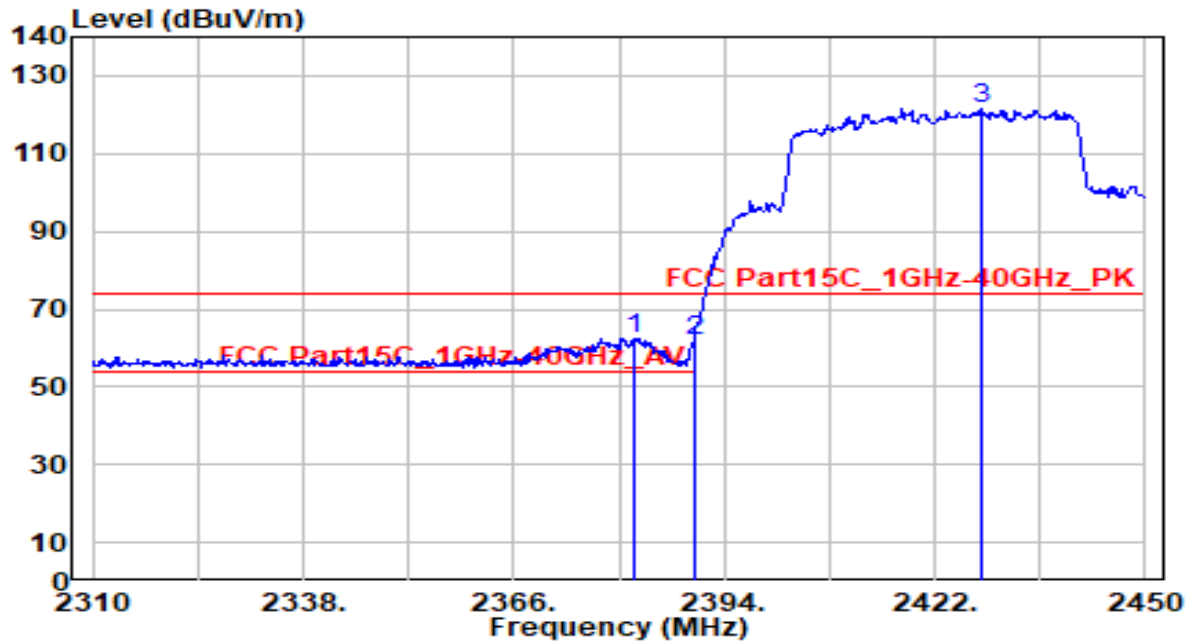


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2381.960	31.91	30.60	62.51	-11.49	74.00	125	35	Peak
2		2390.000	31.32	30.61	61.93	-12.07	74.00	125	35	Peak
3		2428.160	90.76	30.72	121.48	N/A	N/A	125	35	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

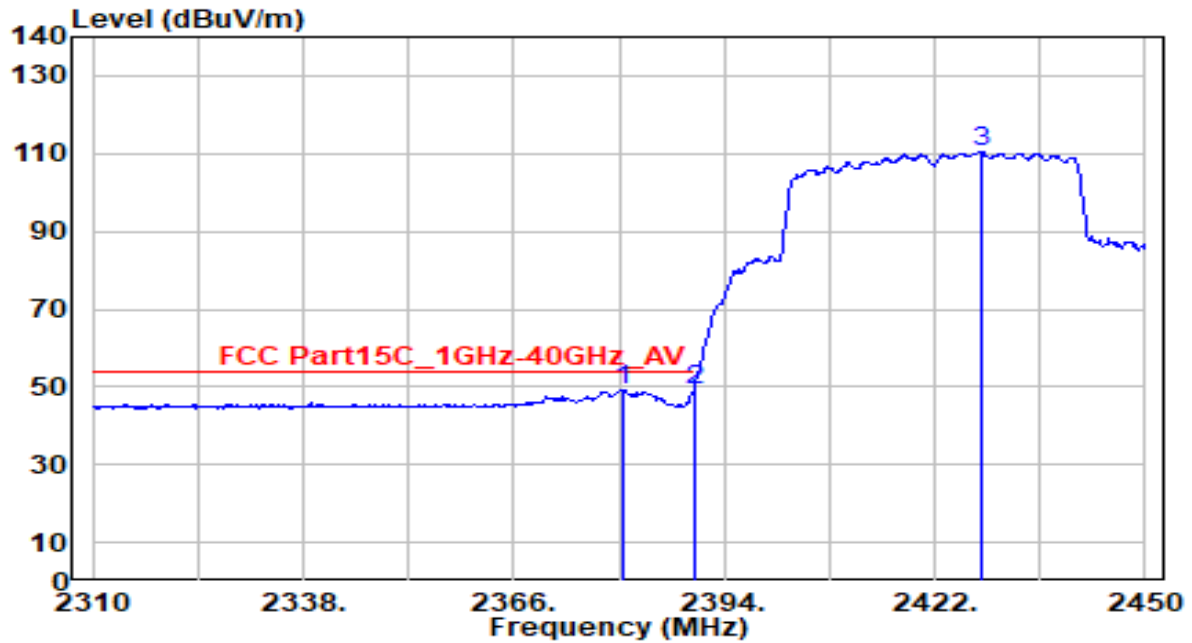


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2380.420	18.55	30.60	49.15	-4.85	54.00	125	35	Average
2	* 2390.000	18.57	30.61	49.18	-4.82	54.00	125	35	Average
3	2428.160	79.76	30.72	110.48	N/A	N/A	125	35	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

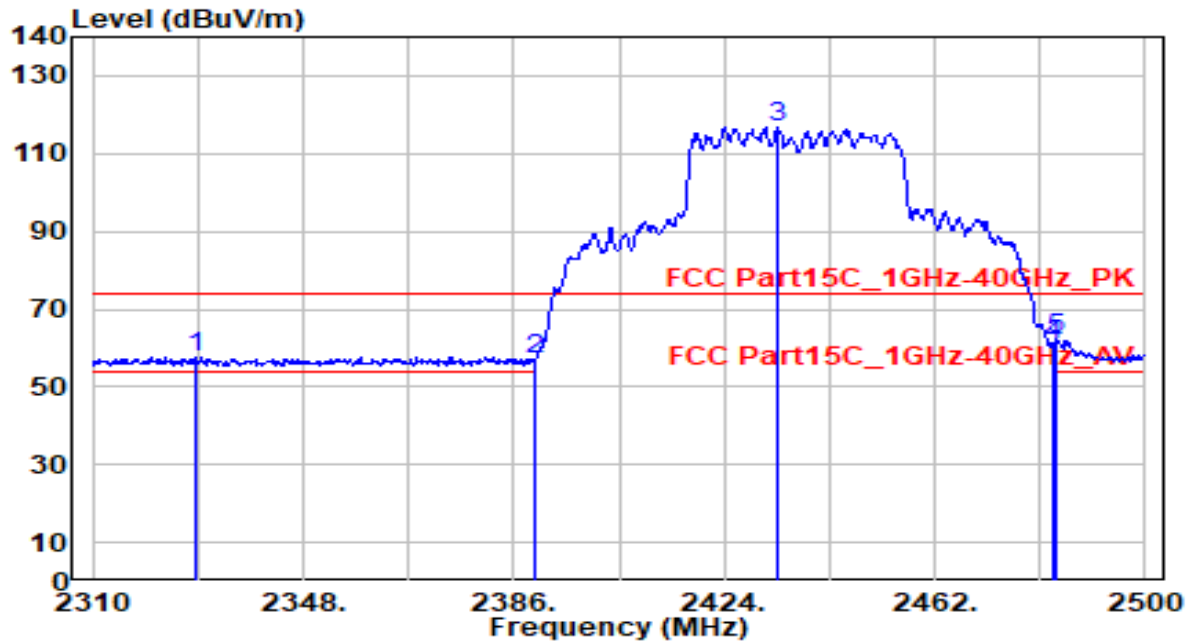


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2328.620	27.32	30.53	57.85	-16.15	74.00	160	345	Peak
2	2390.000	26.63	30.61	57.24	-16.76	74.00	160	345	Peak
3	2433.500	86.20	30.74	116.94	N/A	N/A	160	345	Peak
4	2483.500	30.10	30.91	61.02	-12.98	74.00	160	345	Peak
5	* 2483.850	31.19	30.91	62.11	-11.89	74.00	160	345	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

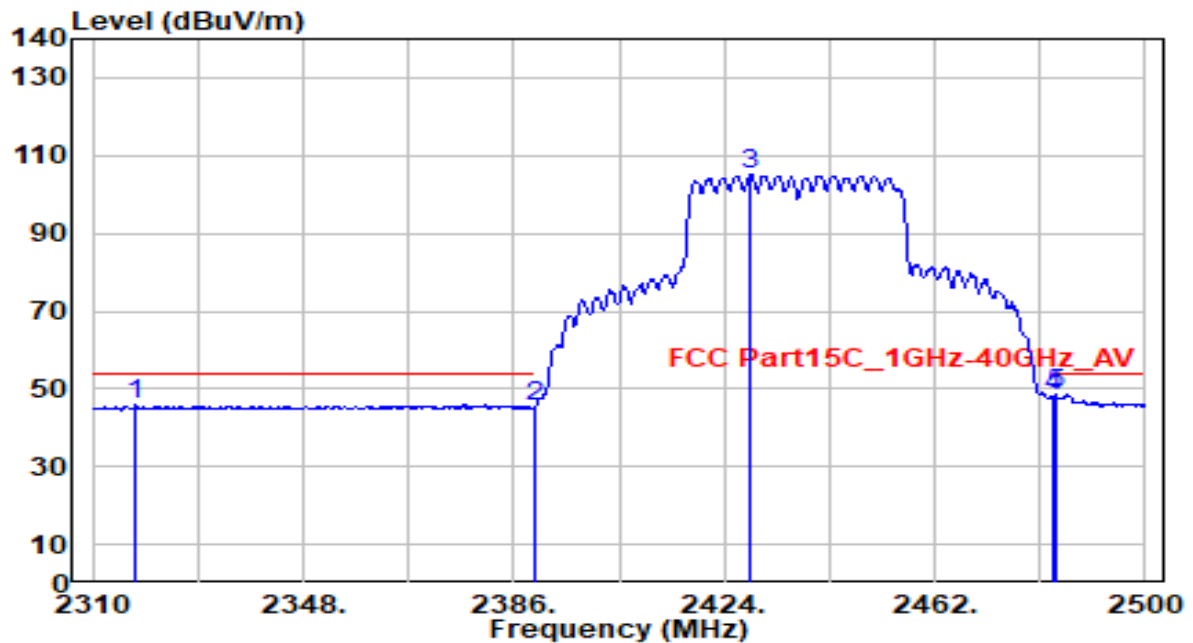


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2317.600	15.34	30.51	45.85	-8.15	54.00	160	345	Average
2	2390.000	14.89	30.61	45.50	-8.50	54.00	160	345	Average
3	2428.750	74.24	30.73	104.97	N/A	N/A	160	345	Average
4	2483.500	17.24	30.91	48.16	-5.84	54.00	160	345	Average
5	* 2483.850	17.61	30.91	48.52	-5.48	54.00	160	345	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

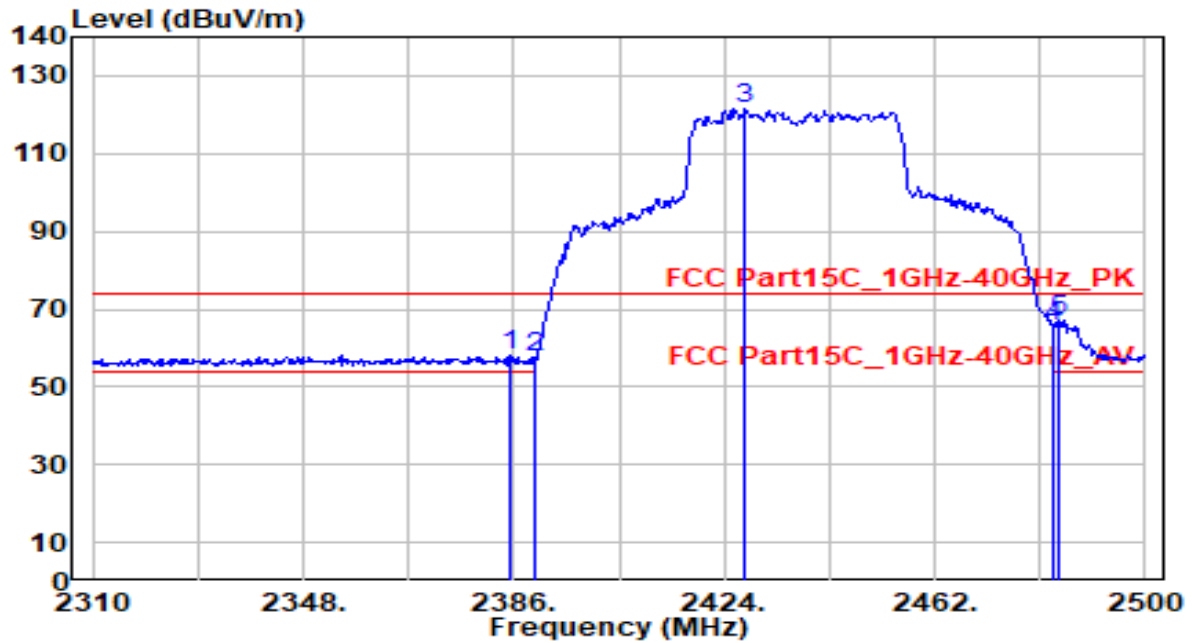


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.430	27.47	30.61	58.08	-15.92	74.00	125	40	Peak
2	2390.000	27.12	30.61	57.73	-16.27	74.00	125	40	Peak
3	2427.800	90.79	30.72	121.51	N/A	N/A	125	40	Peak
4	2483.500	34.33	30.91	65.25	-8.75	74.00	125	40	Peak
5	* 2484.420	36.12	30.92	67.04	-6.96	74.00	125	40	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

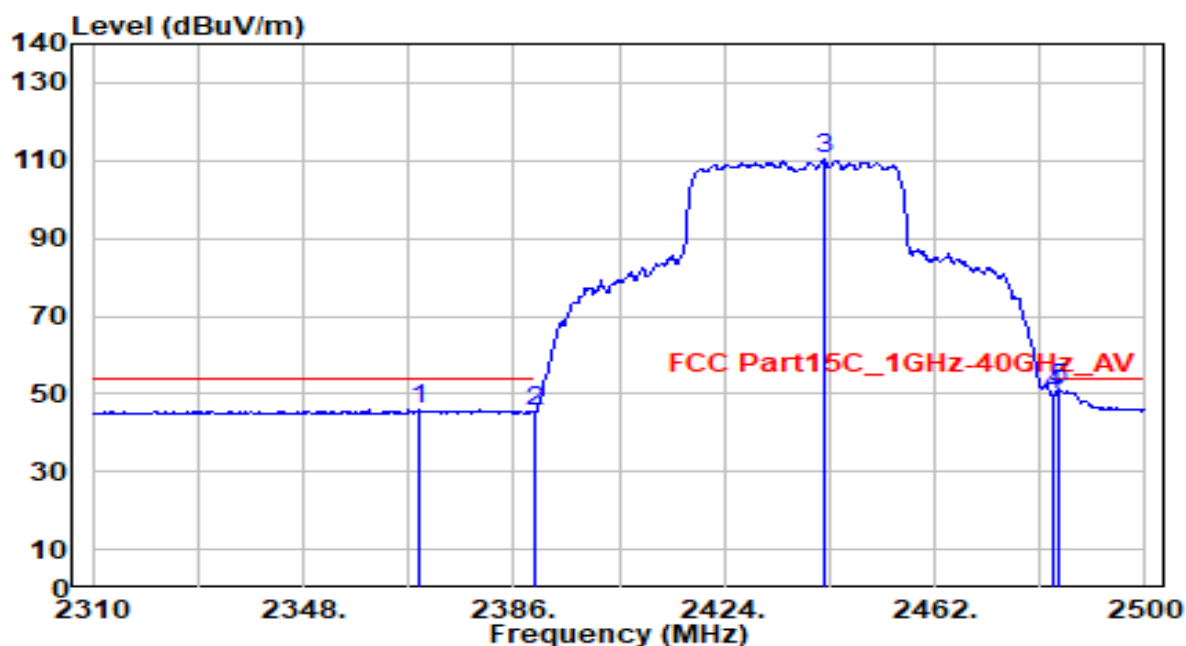


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2368.710	15.25	30.58	45.84	-8.16	54.00	125	40	Average
2	2390.000	14.81	30.61	45.43	-8.57	54.00	125	40	Average
3	2442.050	79.73	30.77	110.50	N/A	N/A	125	40	Average
4	2483.500	18.69	30.91	49.60	-4.40	54.00	125	40	Average
5	* 2484.230	20.09	30.92	51.01	-2.99	54.00	125	40	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

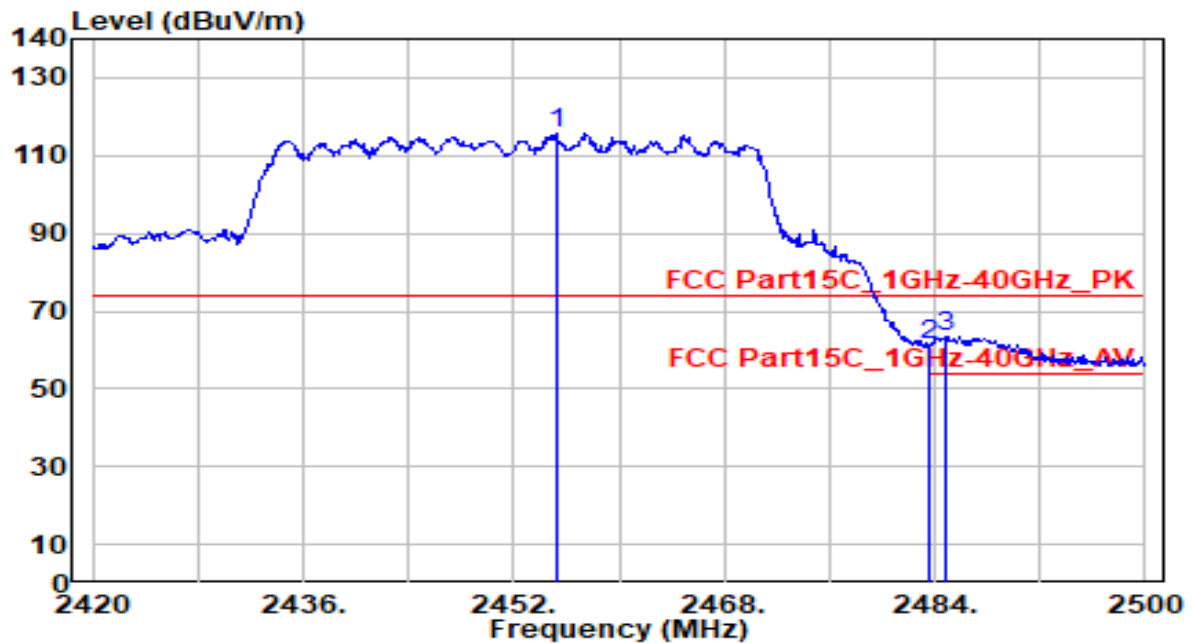


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.200	84.87	30.82	115.68	N/A	N/A	145	345	Peak
2	2483.500	30.39	30.91	61.31	-12.69	74.00	145	345	Peak
3	* 2484.800	32.49	30.92	63.41	-10.59	74.00	145	345	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

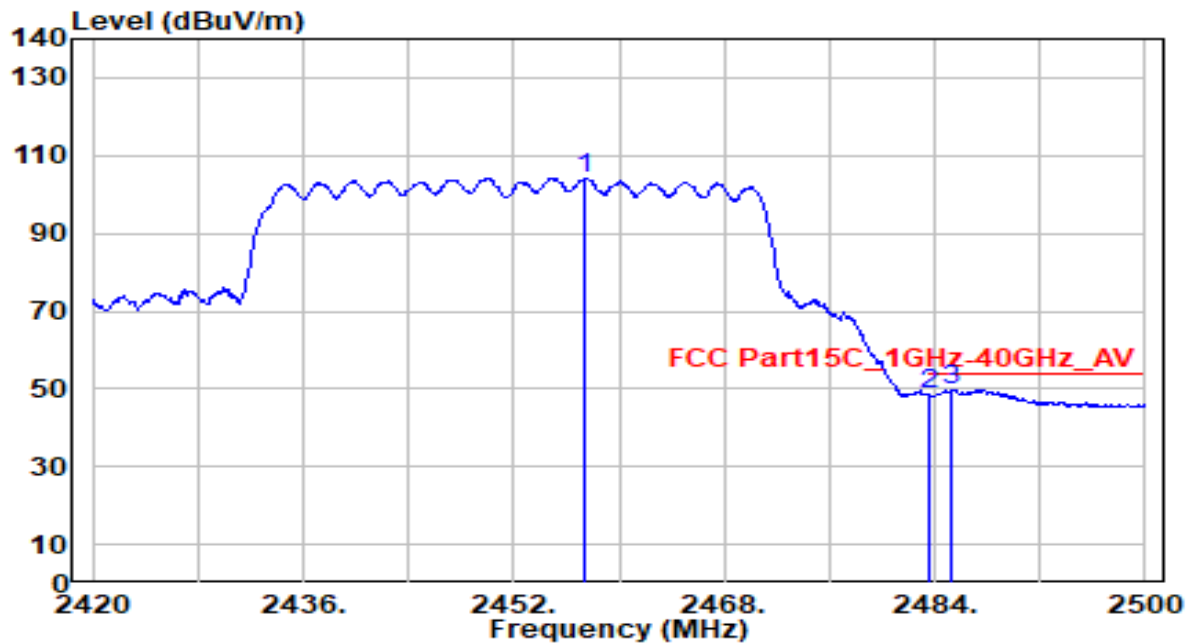


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2457.440	73.33	30.82	104.15	N/A	N/A	145	345	Average
2	2483.500	17.59	30.91	48.51	-5.49	54.00	145	345	Average
3	* 2485.200	18.93	30.92	49.85	-4.15	54.00	145	345	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

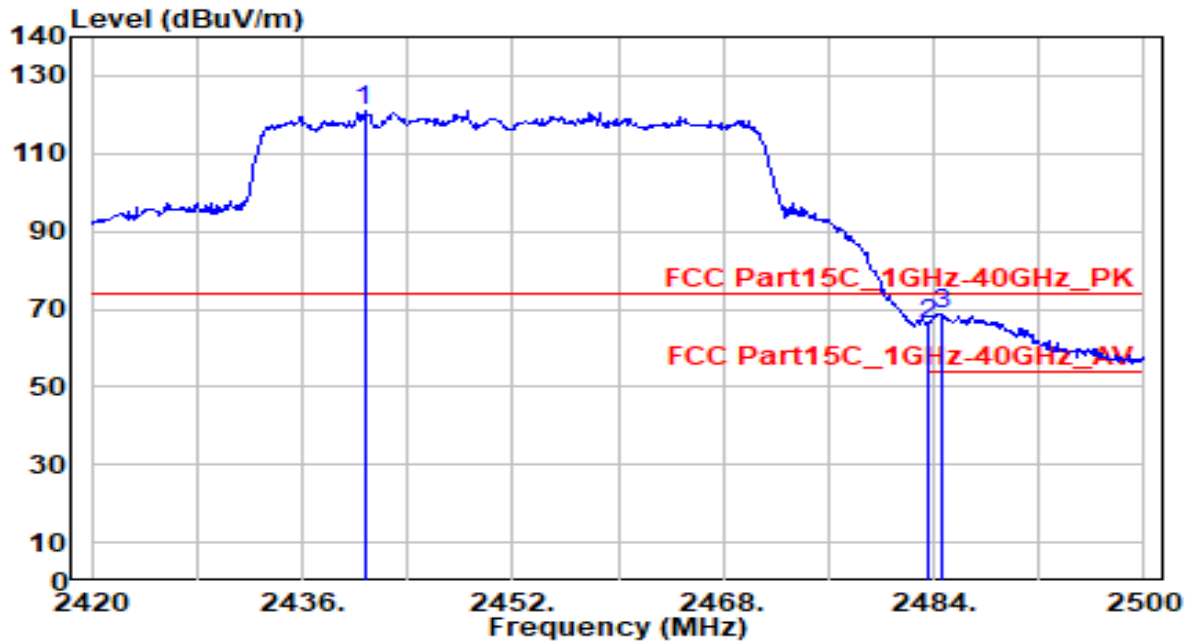


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2440.720	90.08	30.77	120.84	N/A	N/A	130	40	Peak
2		2483.500	35.06	30.91	65.97	-8.03	74.00	130	40	Peak
3		2484.560	37.75	30.92	68.67	-5.33	74.00	130	40	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-02
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

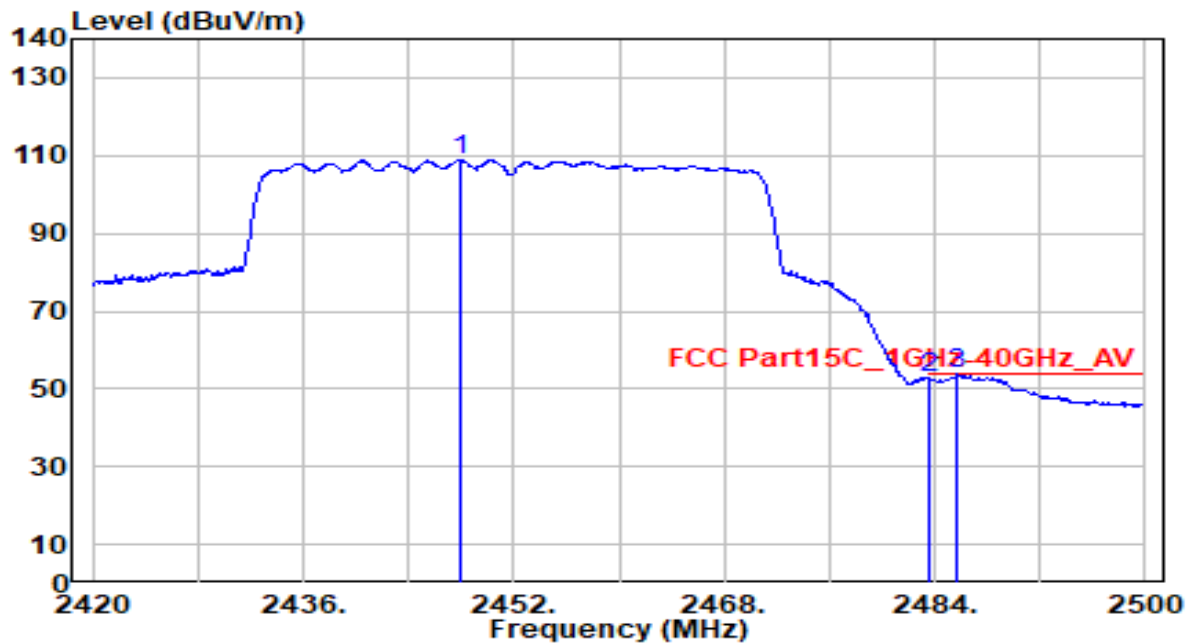

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2447.920	78.10	30.79	108.89	N/A	N/A	130	40	Average
2	2483.500	21.81	30.91	52.73	-1.27	54.00	130	40	Average
3	* 2485.760	22.93	30.92	53.85	-0.15	54.00	130	40	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

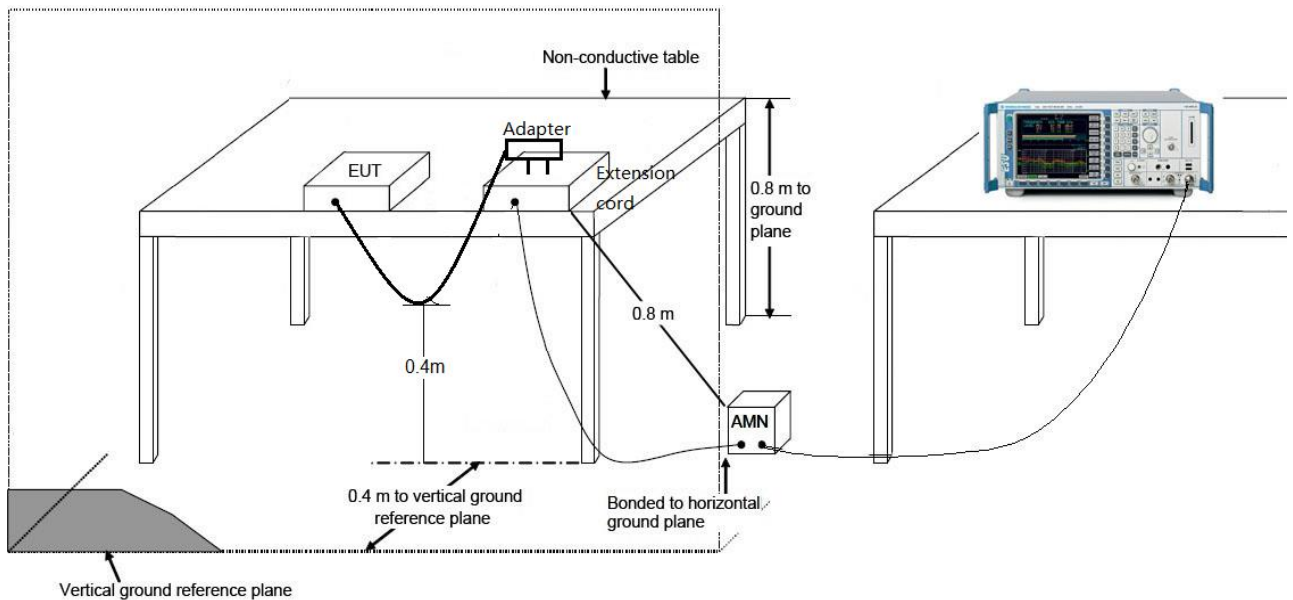

7.8.3.Test Result

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-08
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	27.3°C /51%
Polarity	Line1	Site / Test Engineer	SR2 / Amber
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

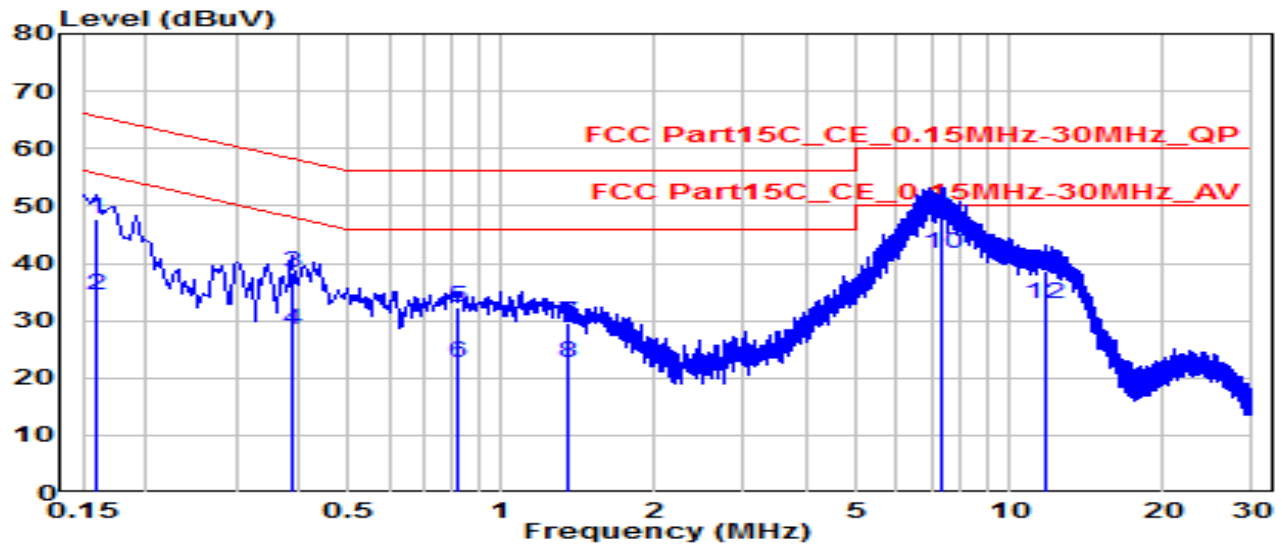


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	0.159	38.13	9.62	47.75	-17.77	65.52	QP
2	0.159	24.93	9.62	34.55	-20.97	55.52	Average
3	0.388	28.56	9.63	38.20	-19.90	58.10	QP
4	0.388	18.60	9.63	28.24	-19.86	48.10	Average
5	0.816	22.57	9.66	32.23	-23.77	56.00	QP
6	0.816	12.96	9.66	22.62	-23.38	46.00	Average
7	1.360	19.93	9.68	29.60	-26.40	56.00	QP
8	1.360	13.10	9.68	22.78	-23.22	46.00	Average
9	* 7.336	38.18	9.80	47.98	-12.02	60.00	QP
10	* 7.336	31.87	9.80	41.67	-8.33	50.00	Average
11	11.705	28.87	9.87	38.74	-21.26	60.00	QP
12	11.705	22.94	9.87	32.81	-17.19	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-08
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	27.3°C /51%
Polarity	Neutral	Site / Test Engineer	SR2 / Amber
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

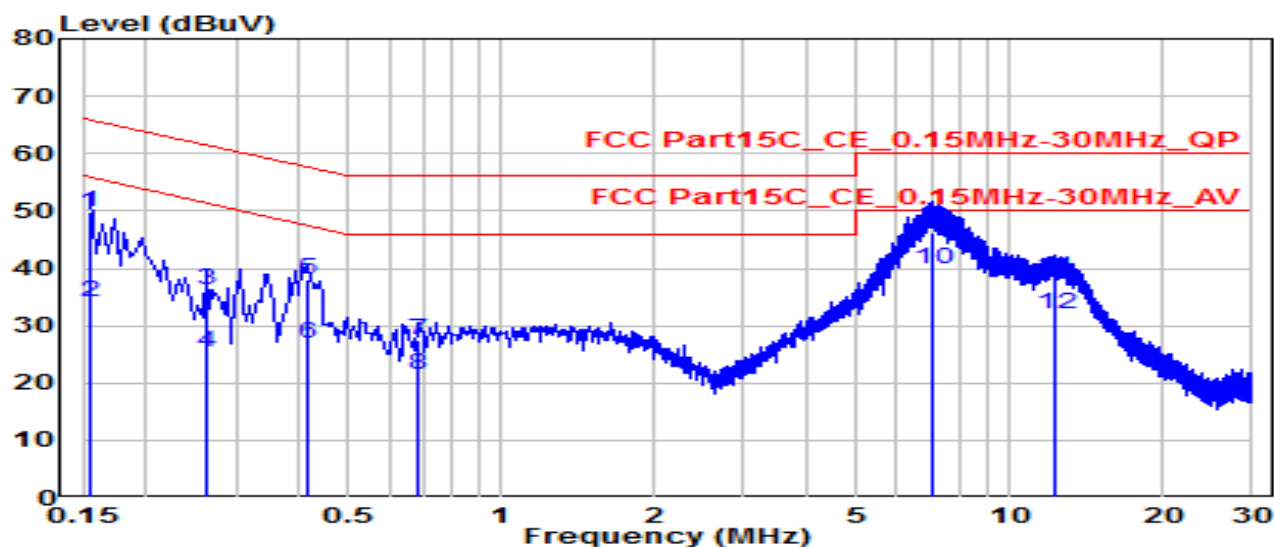


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	0.154	40.24	9.62	49.86	-15.89	65.75	QP
2	0.154	24.52	9.62	34.14	-21.62	55.75	Average
3	0.262	26.72	9.63	36.34	-25.01	61.35	QP
4	0.262	15.83	9.63	25.46	-25.89	51.35	Average
5	0.415	28.34	9.64	37.98	-19.56	57.54	QP
6	0.415	17.35	9.64	26.99	-20.55	47.54	Average
7	0.685	17.85	9.65	27.50	-28.50	56.00	QP
8	0.685	11.92	9.65	21.57	-24.43	46.00	Average
9	* 7.075	36.36	9.80	46.16	-13.84	60.00	QP
10	* 7.075	30.18	9.80	39.98	-10.02	50.00	Average
11	12.267	28.40	9.90	38.30	-21.70	60.00	QP
12	12.267	22.23	9.90	32.13	-17.87	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-08
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	27.3°C /51%
Polarity	Line1	Site / Test Engineer	SR2 / Amber
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 240V/60Hz

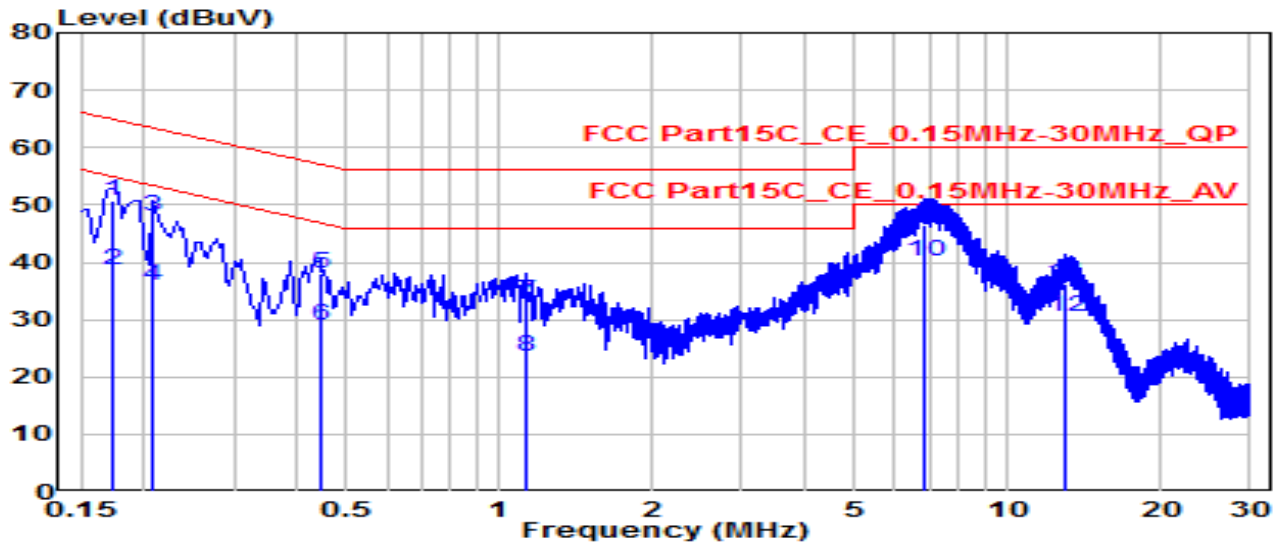


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	0.172	41.13	9.62	50.75	-14.09	64.84	QP
2	0.172	28.91	9.62	38.53	-16.31	54.84	Average
3	0.208	38.46	9.62	48.08	-15.18	63.27	QP
4	0.208	26.41	9.62	36.03	-17.23	53.27	Average
5	0.442	28.37	9.64	38.00	-19.01	57.02	QP
6	0.442	19.24	9.64	28.87	-18.14	47.02	Average
7	1.126	23.50	9.67	33.17	-22.83	56.00	QP
8	1.126	13.79	9.67	23.47	-22.53	46.00	Average
9	* 6.872	36.70	9.79	46.48	-13.52	60.00	QP
10	* 6.872	30.36	9.79	40.15	-9.85	50.00	Average
11	13.005	26.44	9.88	36.32	-23.68	60.00	QP
12	13.005	20.64	9.88	30.52	-19.48	50.00	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX7800 Whole Home Mesh Wi-Fi 6 System	Date of Test	2022-08-08
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	27.3°C /51%
Polarity	Neutral	Site / Test Engineer	SR2 / Amber
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 240V/60Hz

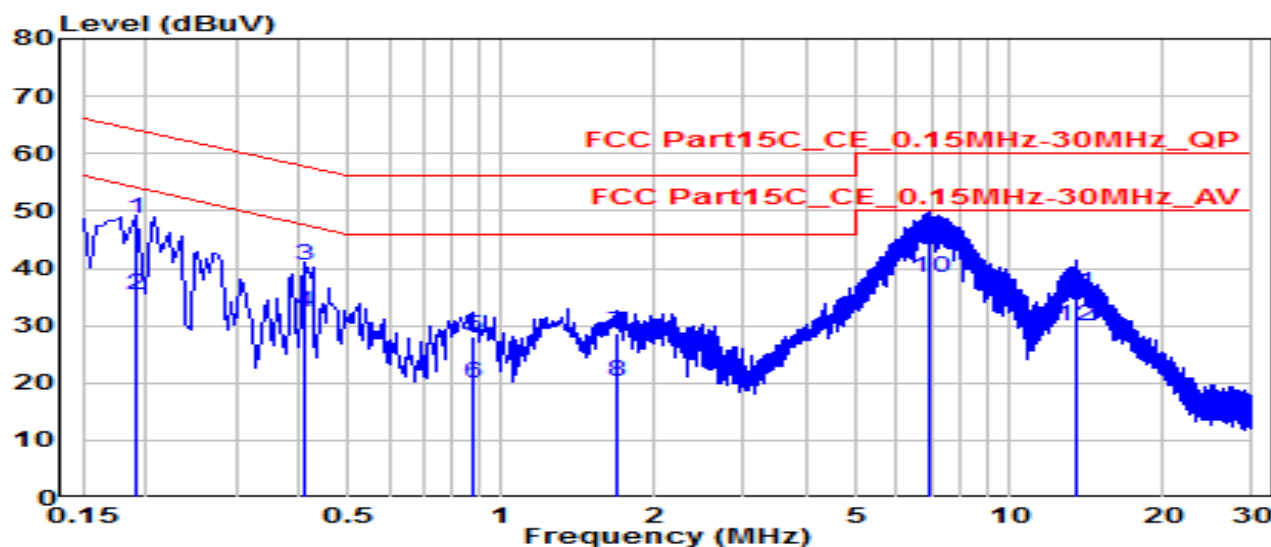

No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	0.190	38.97	9.62	48.59	-15.42	64.01	QP
2	0.190	25.69	9.62	35.31	-18.70	54.01	Average
3	0.411	30.67	9.64	40.30	-17.33	57.63	QP
4	0.411	22.76	9.64	32.39	-15.24	47.63	Average
5	0.879	18.37	9.66	28.04	-27.96	56.00	QP
6	0.879	10.22	9.66	19.88	-26.12	46.00	Average
7	1.693	18.93	9.68	28.62	-27.38	56.00	QP
8	1.693	10.68	9.68	20.36	-25.64	46.00	Average
9	* 6.980	35.42	9.80	45.21	-14.79	60.00	QP
10	* 6.980	28.68	9.80	38.47	-11.53	50.00	Average
11	13.451	25.74	9.91	35.66	-24.34	60.00	QP
12	13.451	20.07	9.91	29.98	-20.02	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is compliance with Part 15C of the FCC Rules.

The End

Appendix A : Test Setup Photograph

Refer to “2207TW0118-Setup Photo” file.

Appendix B : External Photograph

Refer to “2207TW0118-External Photo” file.

Appendix C : Internal Photograph

Refer to “2207TW0118-Internal Photo” file.