

## ANNEX D TEST DATA

For

|                |                                       |
|----------------|---------------------------------------|
| Project No.:   | 8234EU013102W                         |
| Client:        | SHENZHEN LIDACHENG TECHNOLOGY CO.,LTD |
| Product Name:  | Gaming Controller                     |
| Model No.:     | T2-TK8GCWL                            |
| FCC ID:        | 2AQOP-IX-SW234A                       |
| Technology:    | Bluetooth BDR&EDR                     |
| Test Engineer: | <i>Mikoy zhu</i>                      |
| Test Date:     | 2024-11-28                            |

## Test Summary

| Item                                                 | Result |
|------------------------------------------------------|--------|
| Duty Cycle                                           | Pass   |
| Bandwidth                                            | Pass   |
| Maximum Conducted Output Power                       | Pass   |
| Carrier Frequency Separation                         | Pass   |
| Number of Hopping Frequencies                        | Pass   |
| Time of Occupancy (Dwell Time)                       | Pass   |
| Unwanted Emissions In Non-restricted Frequency Bands | Pass   |

## 1. Duty Cycle


### 1.1 Test Result

#### 1.1.1 Ant1


| Ant1          |         |                 |             |           |             |                |                                   |                       |
|---------------|---------|-----------------|-------------|-----------|-------------|----------------|-----------------------------------|-----------------------|
| Mode          | TX Type | Frequency (MHz) | Packet Type | T_on (ms) | Period (ms) | Duty Cycle (%) | Duty Cycle Correction Factor (dB) | Max. DC Variation (%) |
| GFSK          | SISO    | 2402            | DH5         | 2.905     | 3.750       | 77.47          | 1.11                              | 0.03                  |
|               |         | 2441            | DH5         | 2.905     | 3.750       | 77.47          | 1.11                              | 0.03                  |
|               |         | 2480            | DH5         | 2.905     | 3.750       | 77.47          | 1.11                              | 0.03                  |
| $\pi/4$ DQPSK | SISO    | 2402            | 2DH5        | 2.912     | 3.751       | 77.63          | 1.10                              | 0.03                  |
|               |         | 2441            | 2DH5        | 2.911     | 3.749       | 77.65          | 1.10                              | 0.03                  |
|               |         | 2480            | 2DH5        | 2.912     | 3.751       | 77.63          | 1.10                              | 0.03                  |
| 8DPSK         | SISO    | 2402            | 3DH5        | 2.914     | 3.750       | 77.71          | 1.10                              | 0.04                  |
|               |         | 2441            | 3DH5        | 2.913     | 3.749       | 77.70          | 1.10                              | 0.01                  |
|               |         | 2480            | 3DH5        | 2.913     | 3.749       | 77.70          | 1.10                              | 0.01                  |

## 1.2 Test Graph


### 1.2.1 Ant1

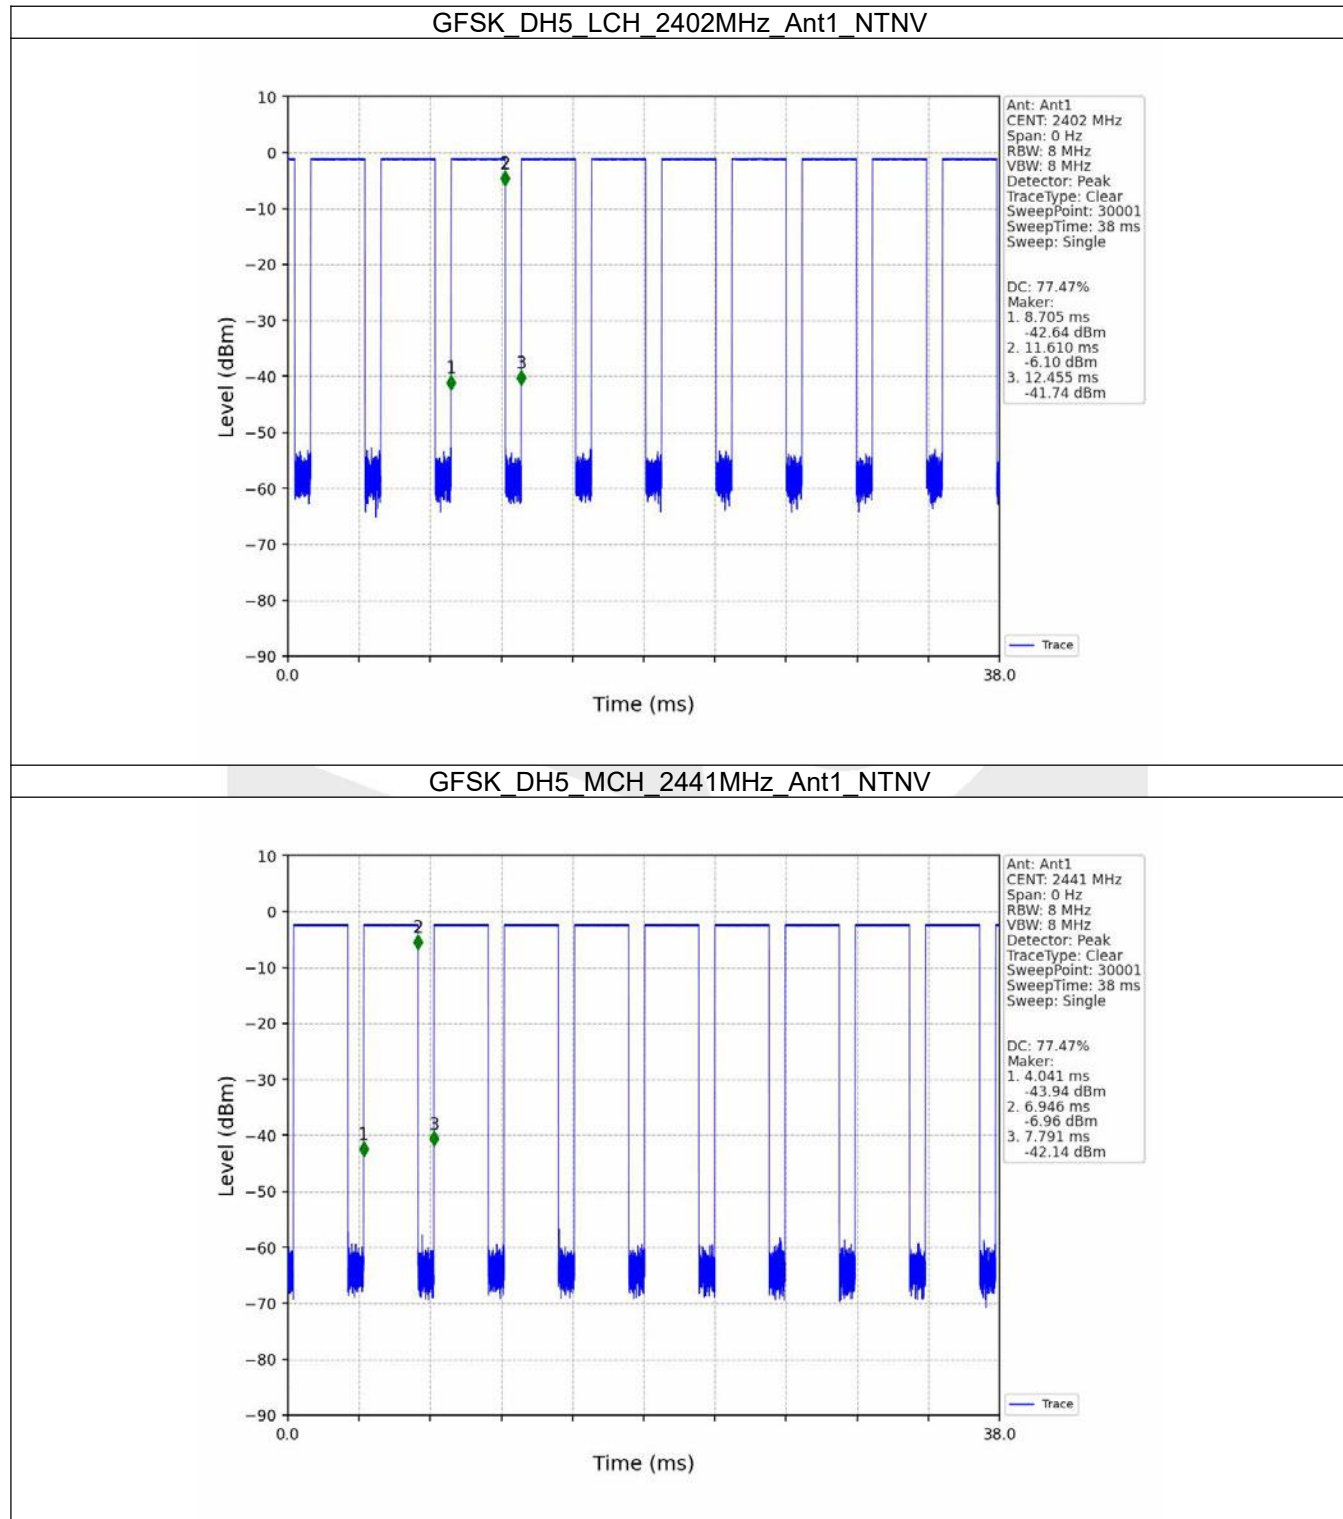


### GFSK\_DH5\_HCH\_2480MHz\_Ant1\_NTNV

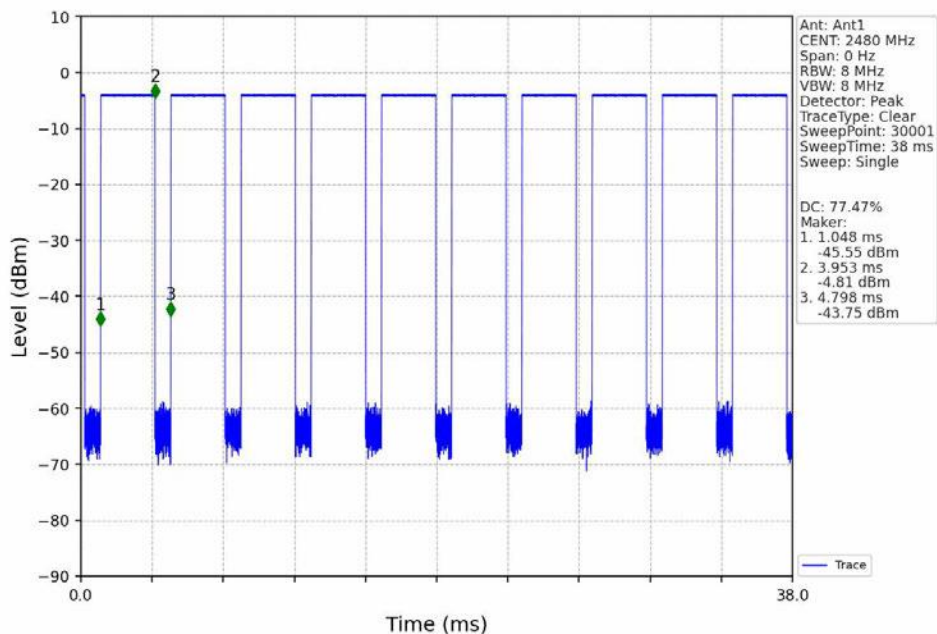


### $\pi/4$ DQPSK\_2DH5\_LCH\_2402MHz\_Ant1\_NTNV

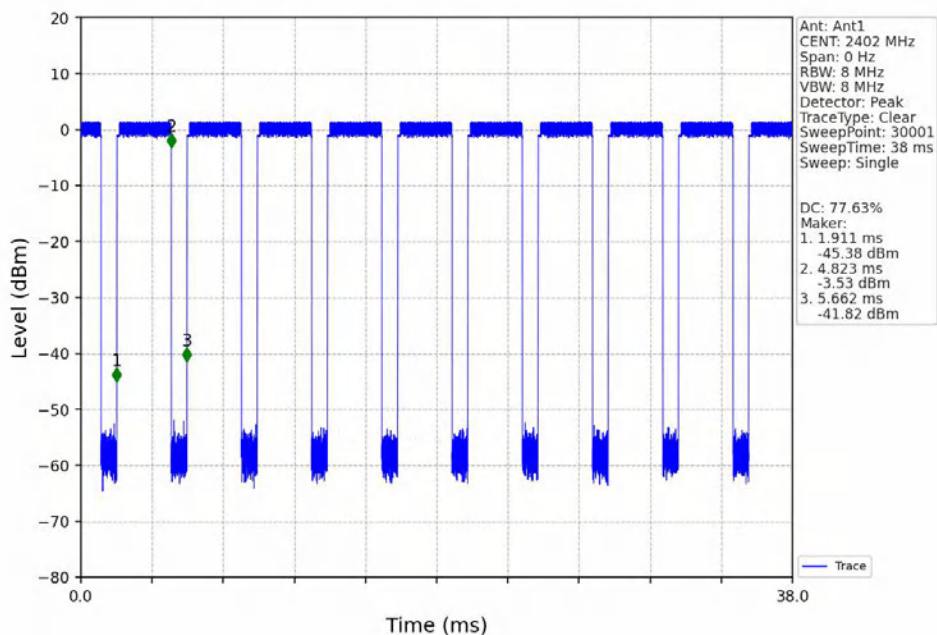

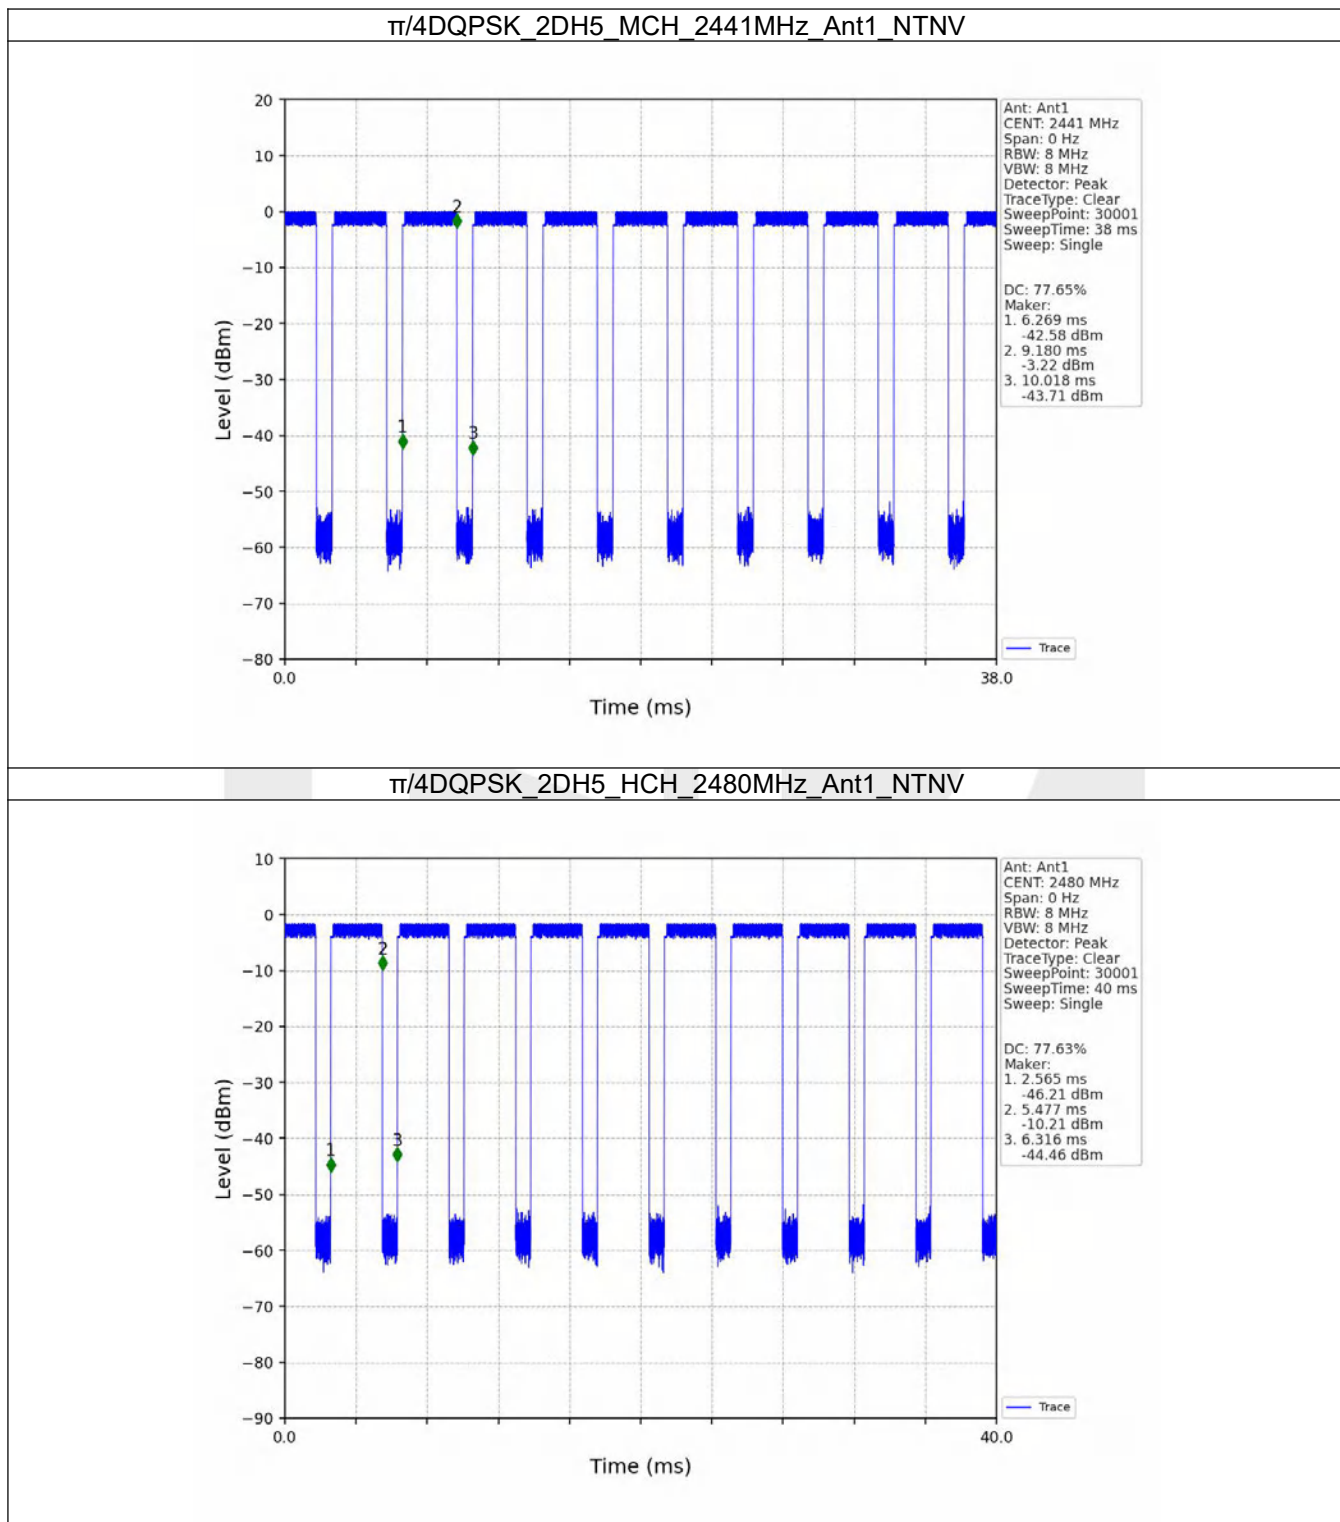





8DPSK\_3DH5\_LCH\_2402MHz\_Ant1\_NTNV

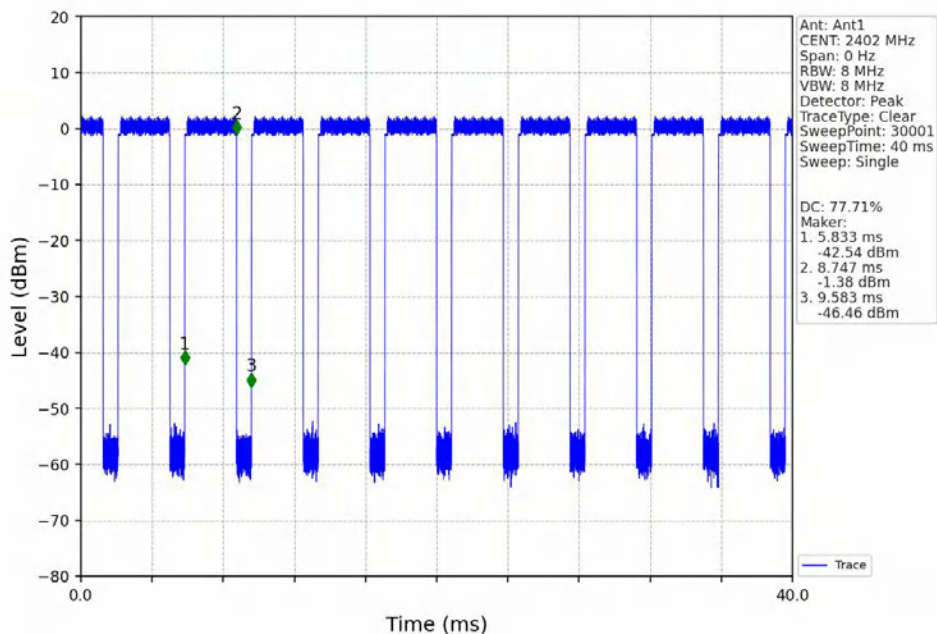

8DPSK\_3DH5\_MCH\_2441MHz\_Ant1\_NTNV

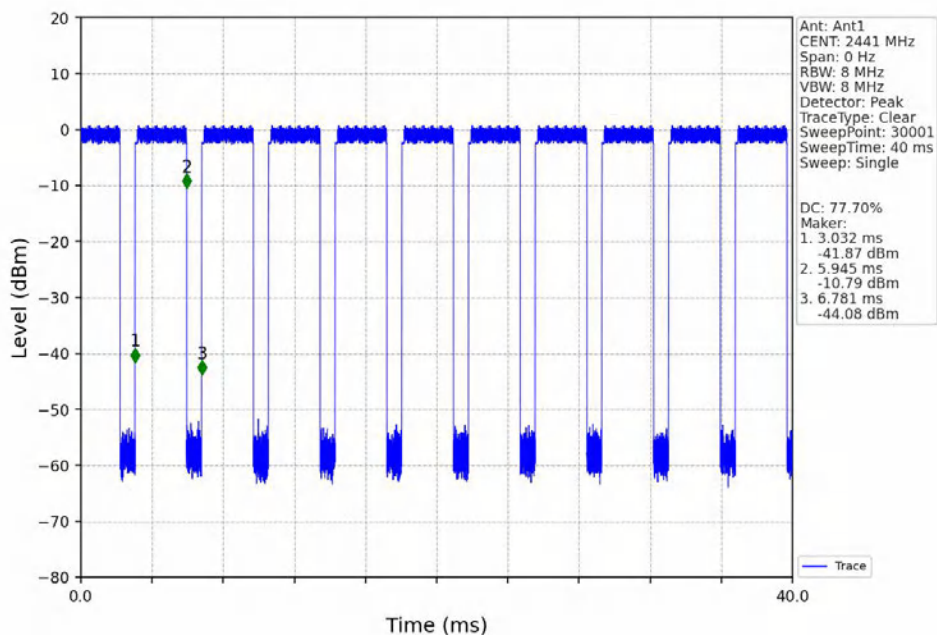

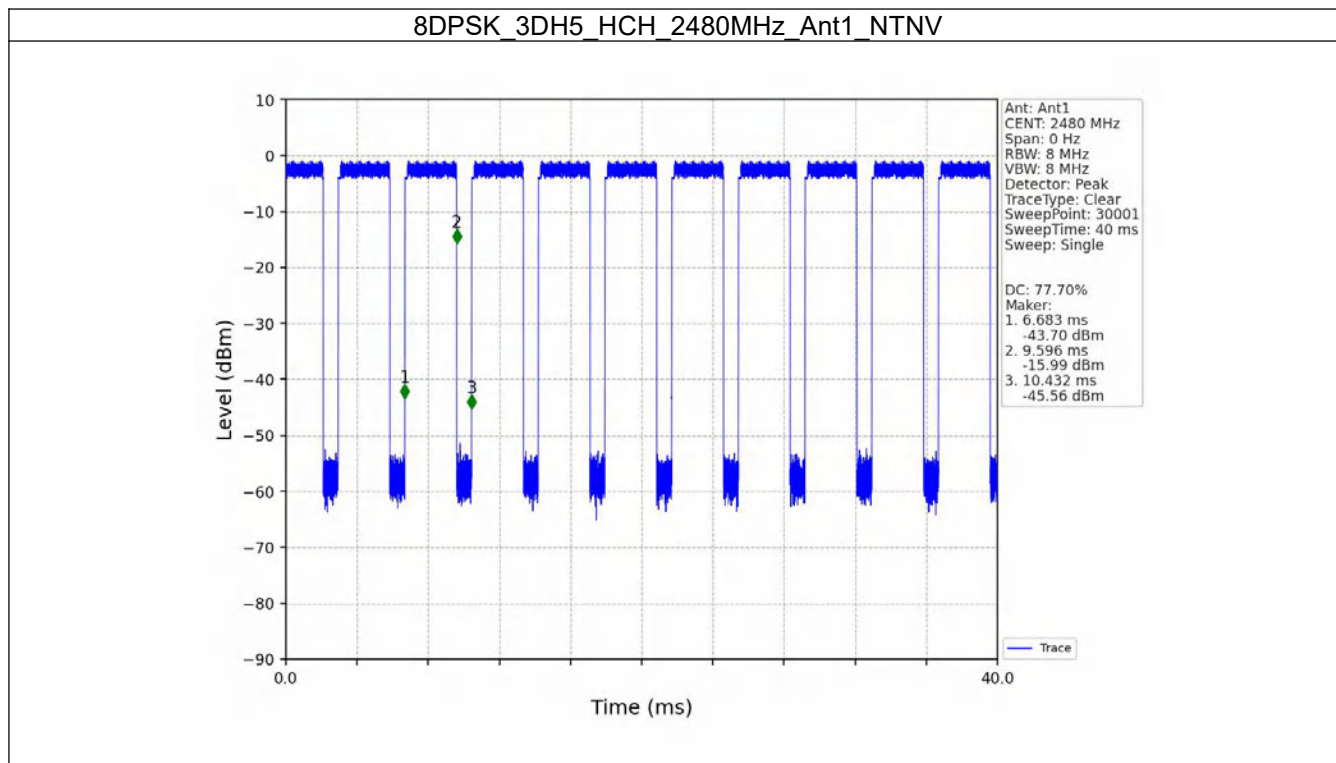



## 2. Bandwidth

### 2.1 Test Result

#### 2.1.1 OBW


| Mode          | TX Type | Frequency (MHz) | Packet Type | ANT | 99% Occupied Bandwidth (MHz) |       | Verdict |
|---------------|---------|-----------------|-------------|-----|------------------------------|-------|---------|
|               |         |                 |             |     | Result                       | Limit |         |
| GFSK          | SISO    | 2402            | DH5         | 1   | 0.830                        | /     | Pass    |
|               |         | 2441            | DH5         | 1   | 0.829                        | /     | Pass    |
|               |         | 2480            | DH5         | 1   | 0.829                        | /     | Pass    |
| $\pi/4$ DQPSK | SISO    | 2402            | 2DH5        | 1   | 1.172                        | /     | Pass    |
|               |         | 2441            | 2DH5        | 1   | 1.173                        | /     | Pass    |
|               |         | 2480            | 2DH5        | 1   | 1.172                        | /     | Pass    |
| 8DPSK         | SISO    | 2402            | 3DH5        | 1   | 1.179                        | /     | Pass    |
|               |         | 2441            | 3DH5        | 1   | 1.181                        | /     | Pass    |
|               |         | 2480            | 3DH5        | 1   | 1.180                        | /     | Pass    |


#### 2.1.2 20dB BW

| Mode          | TX Type | Frequency (MHz) | Packet Type | ANT | 20dB Bandwidth (MHz) |       | Verdict |
|---------------|---------|-----------------|-------------|-----|----------------------|-------|---------|
|               |         |                 |             |     | Result               | Limit |         |
| GFSK          | SISO    | 2402            | DH5         | 1   | 0.949                | /     | Pass    |
|               |         | 2441            | DH5         | 1   | 0.951                | /     | Pass    |
|               |         | 2480            | DH5         | 1   | 0.951                | /     | Pass    |
| $\pi/4$ DQPSK | SISO    | 2402            | 2DH5        | 1   | 1.322                | /     | Pass    |
|               |         | 2441            | 2DH5        | 1   | 1.325                | /     | Pass    |
|               |         | 2480            | 2DH5        | 1   | 1.322                | /     | Pass    |
| 8DPSK         | SISO    | 2402            | 3DH5        | 1   | 1.313                | /     | Pass    |
|               |         | 2441            | 3DH5        | 1   | 1.314                | /     | Pass    |
|               |         | 2480            | 3DH5        | 1   | 1.314                | /     | Pass    |


## 2.2 Test Graph

### 2.2.1 OBW

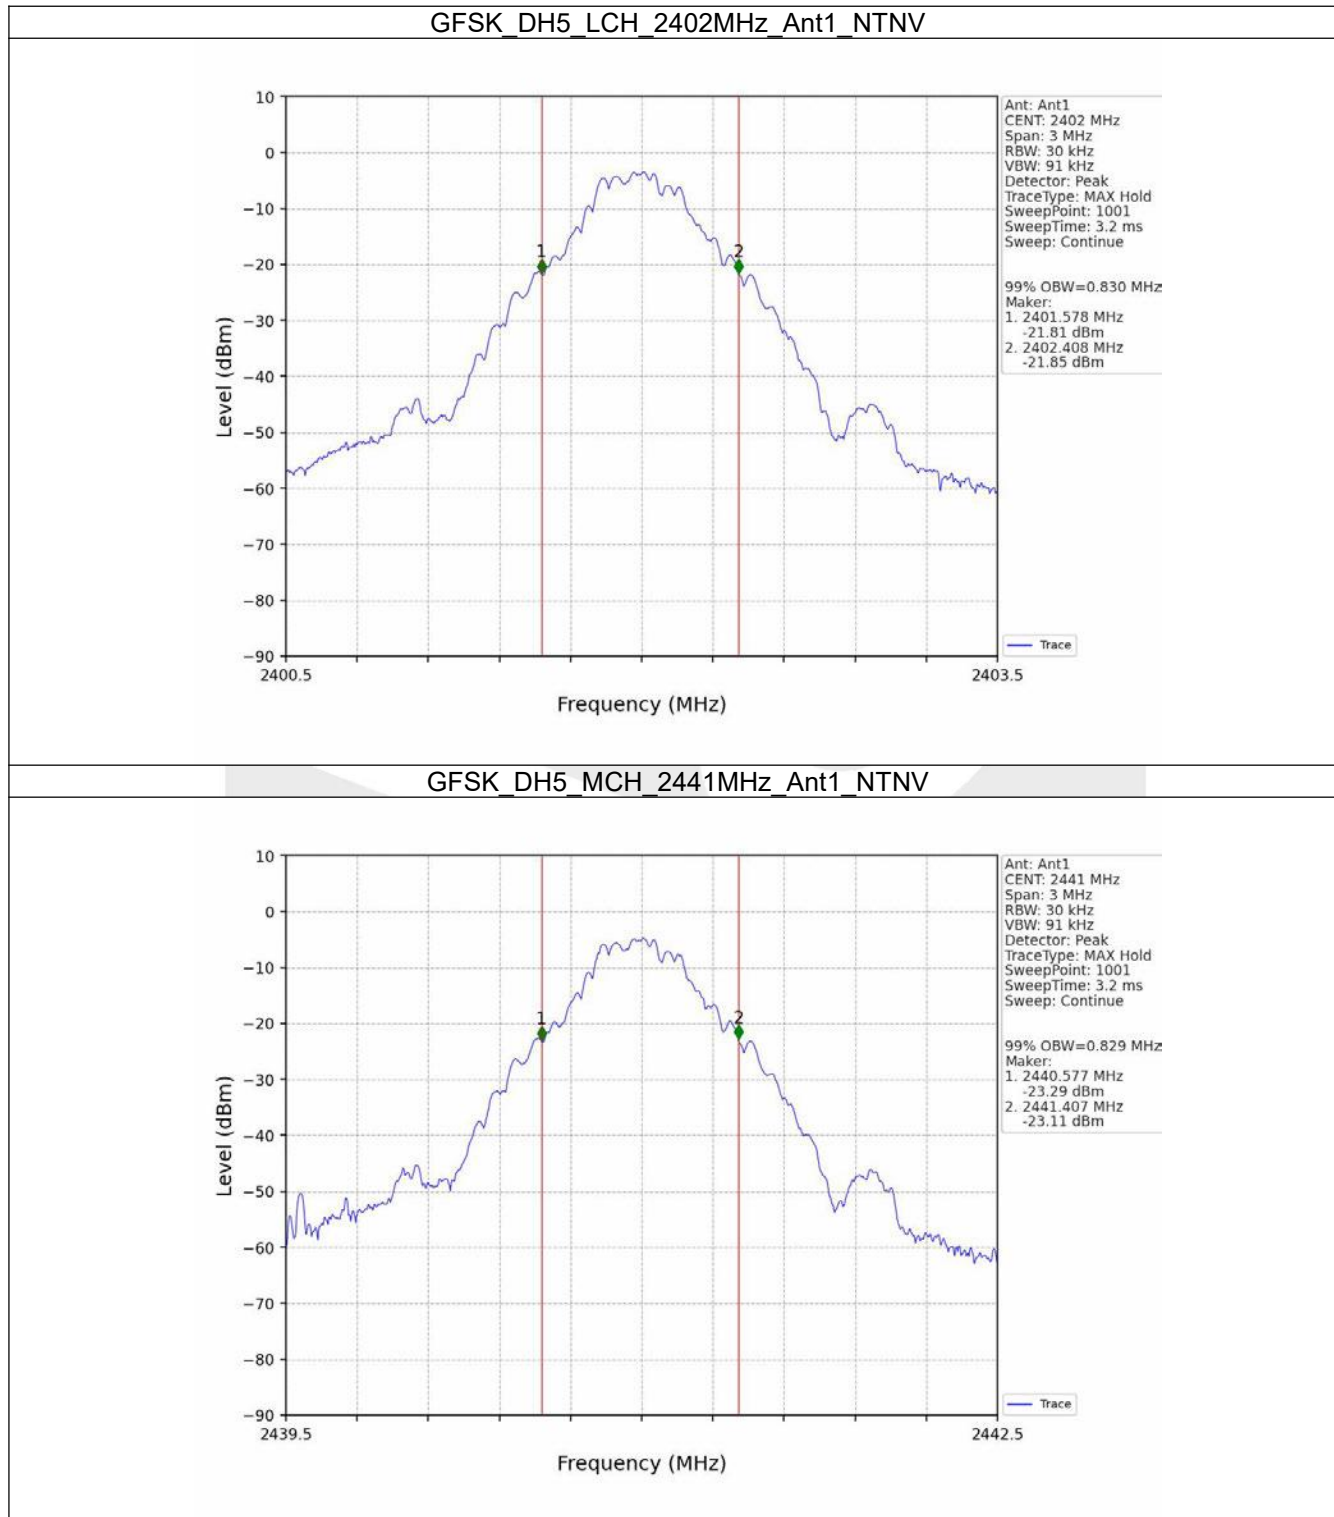


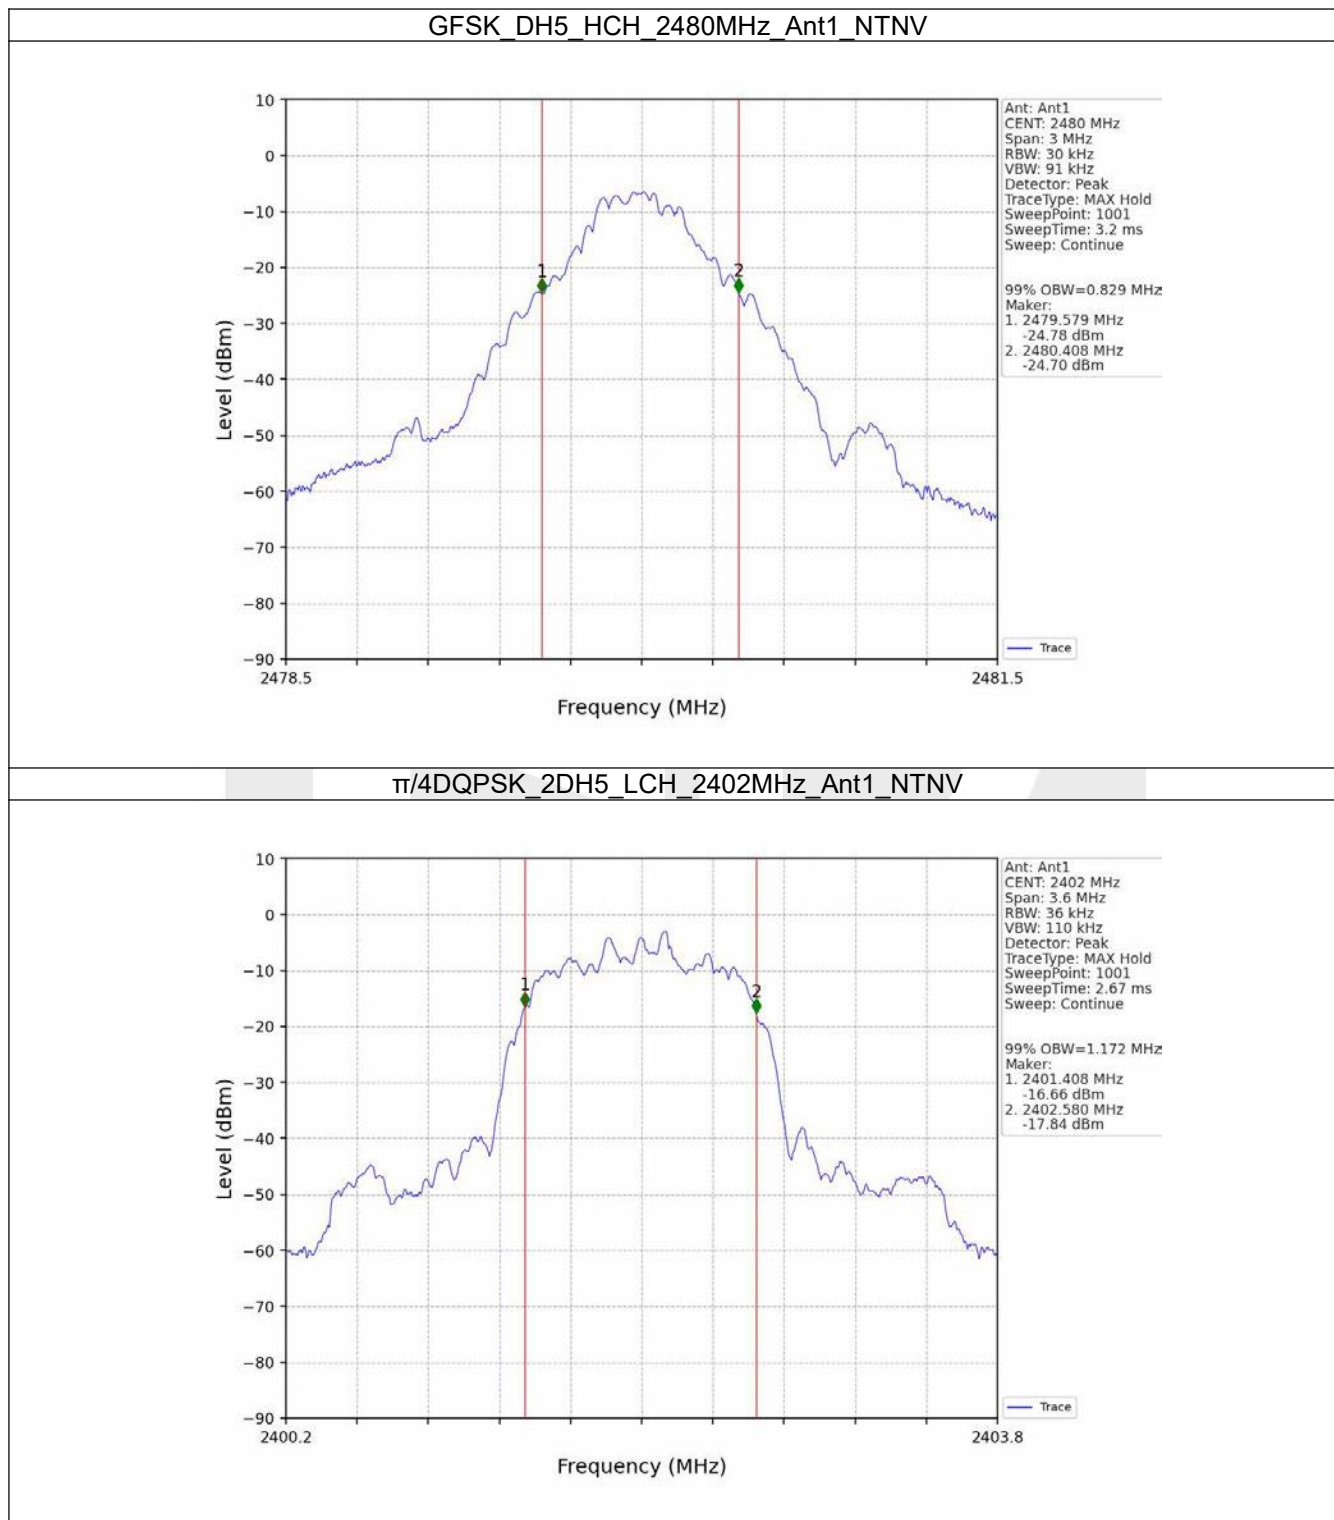


$\pi/4$ DQPSK\_2DH5\_MCH\_2441MHz\_Ant1\_NTNV

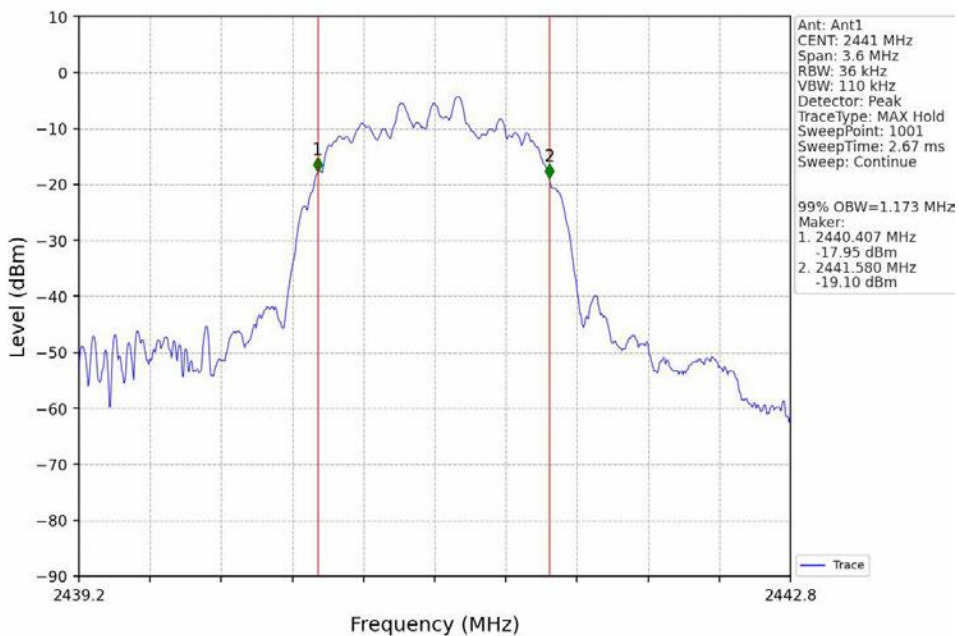


$\pi/4$ DQPSK\_2DH5\_HCH\_2480MHz\_Ant1\_NTNV

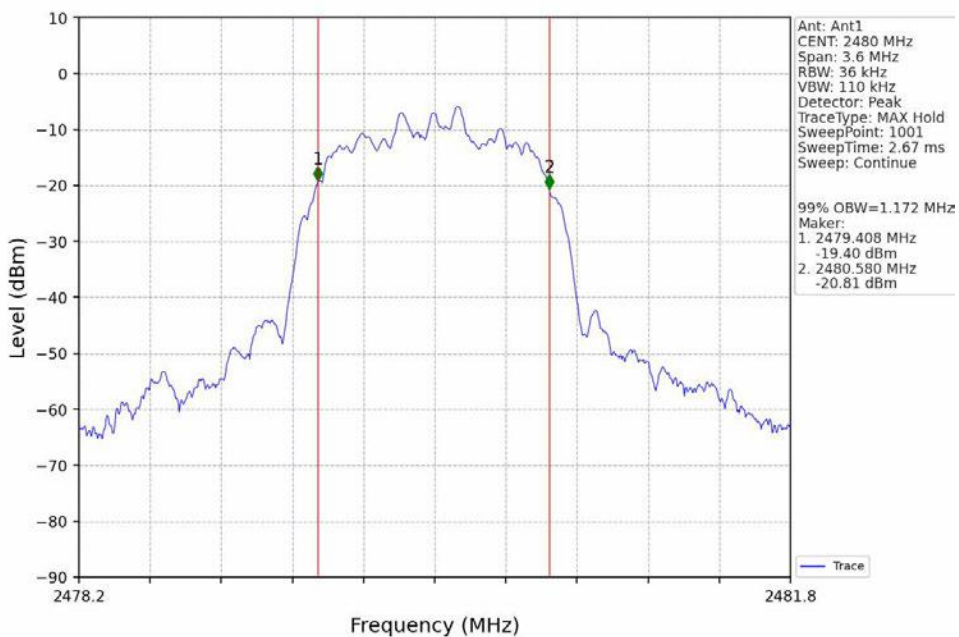

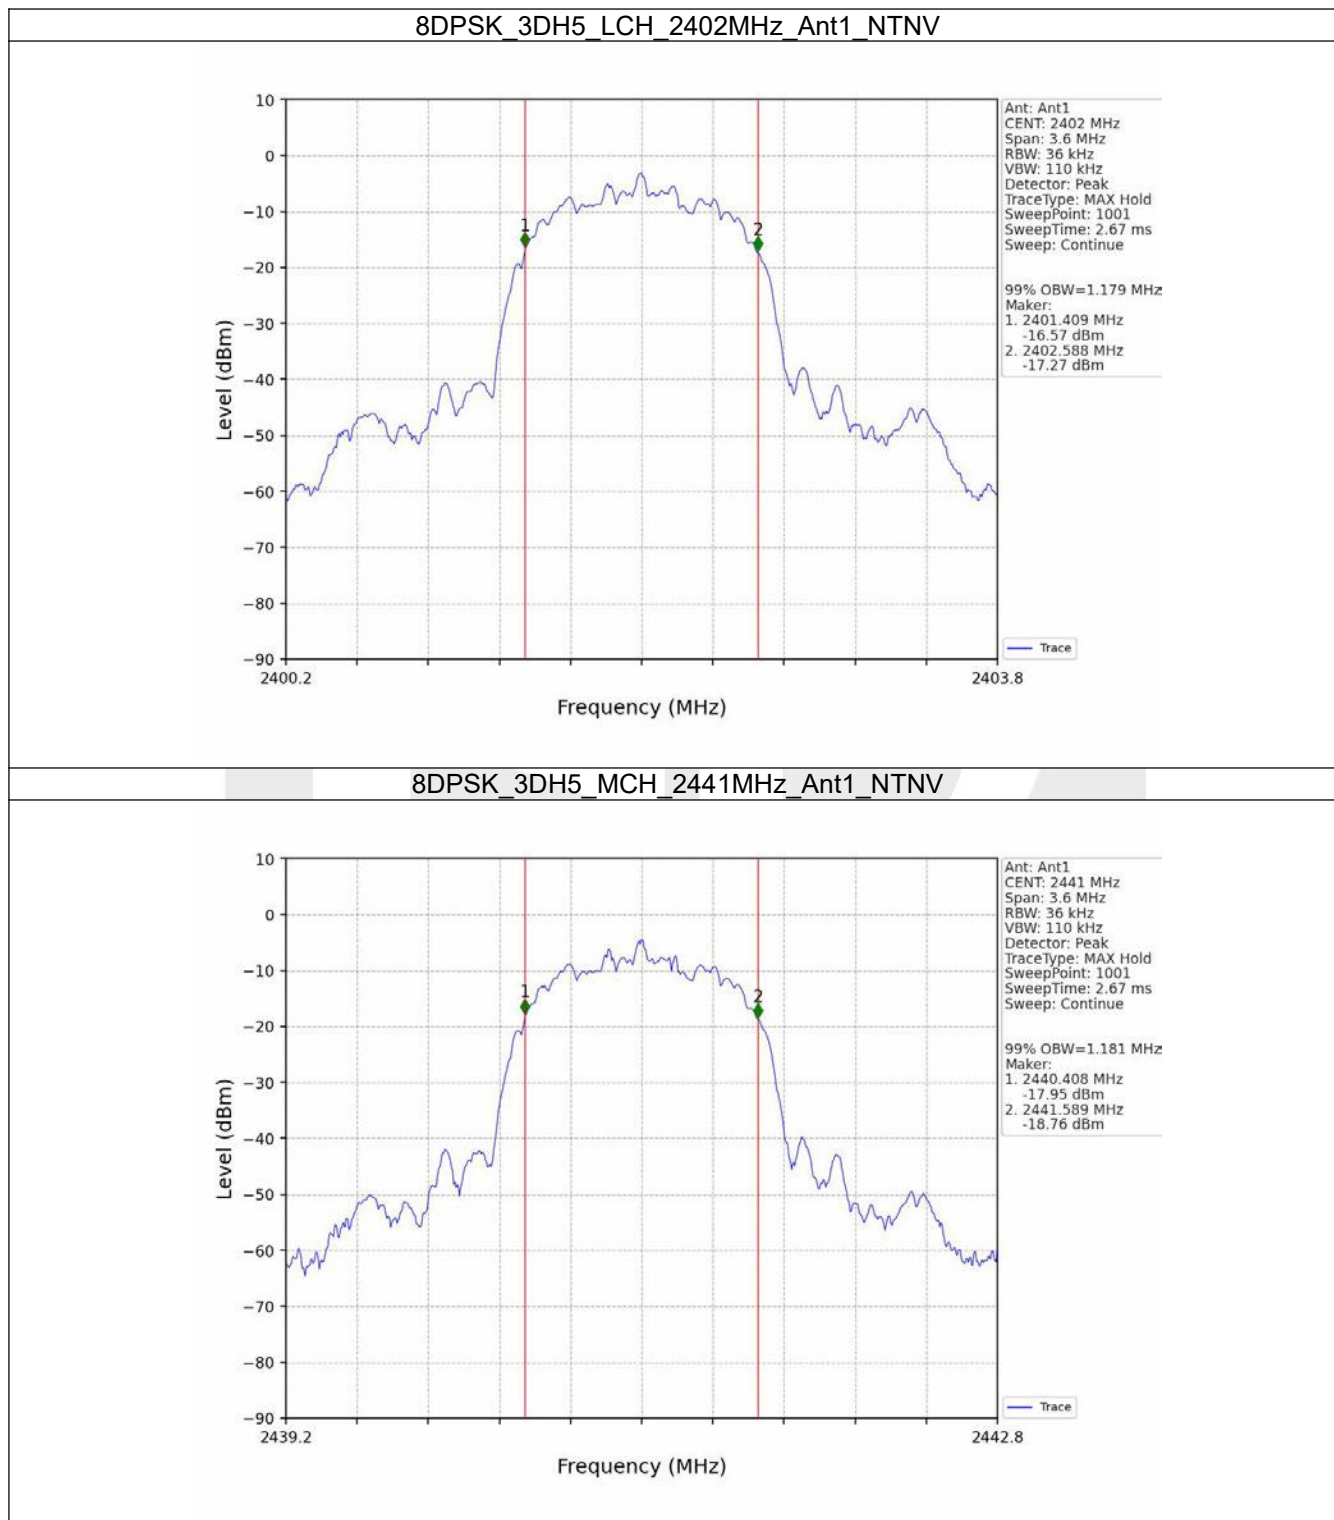





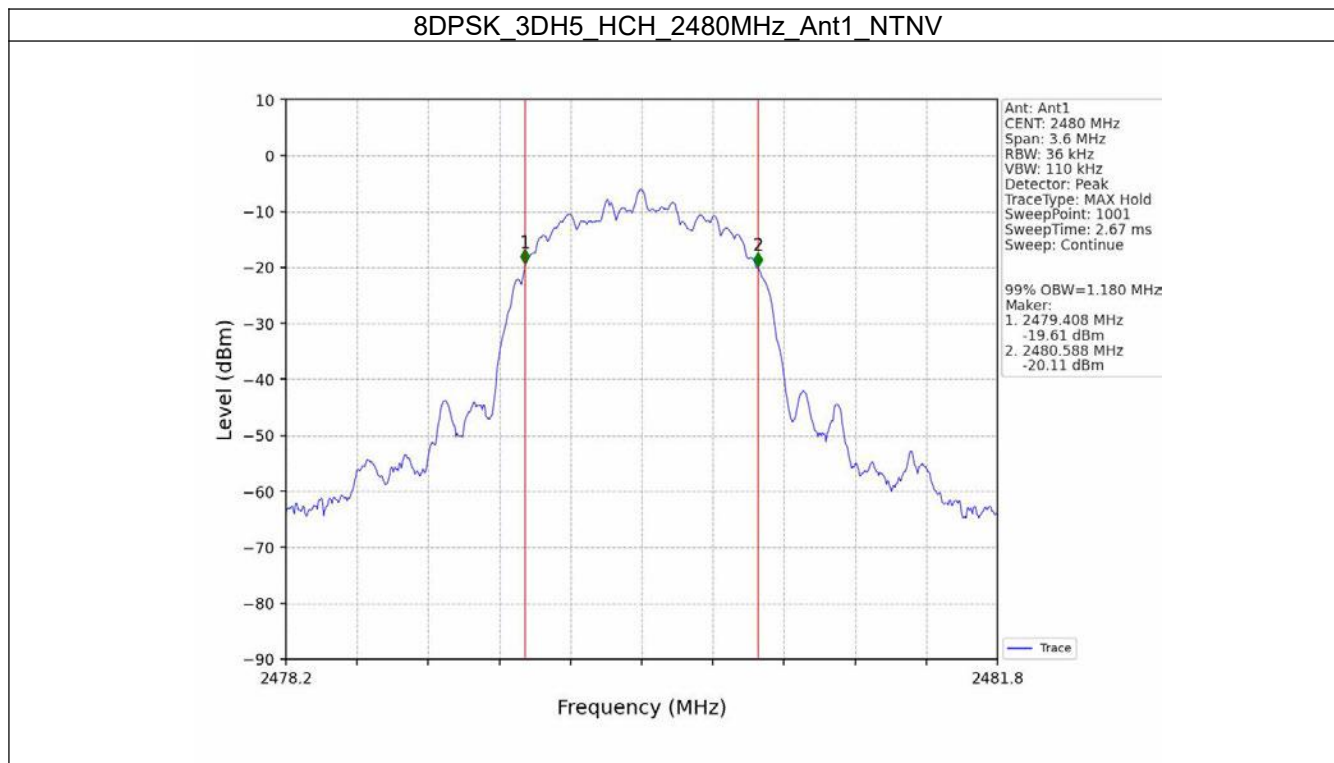




### 2.2.2 20dB BW

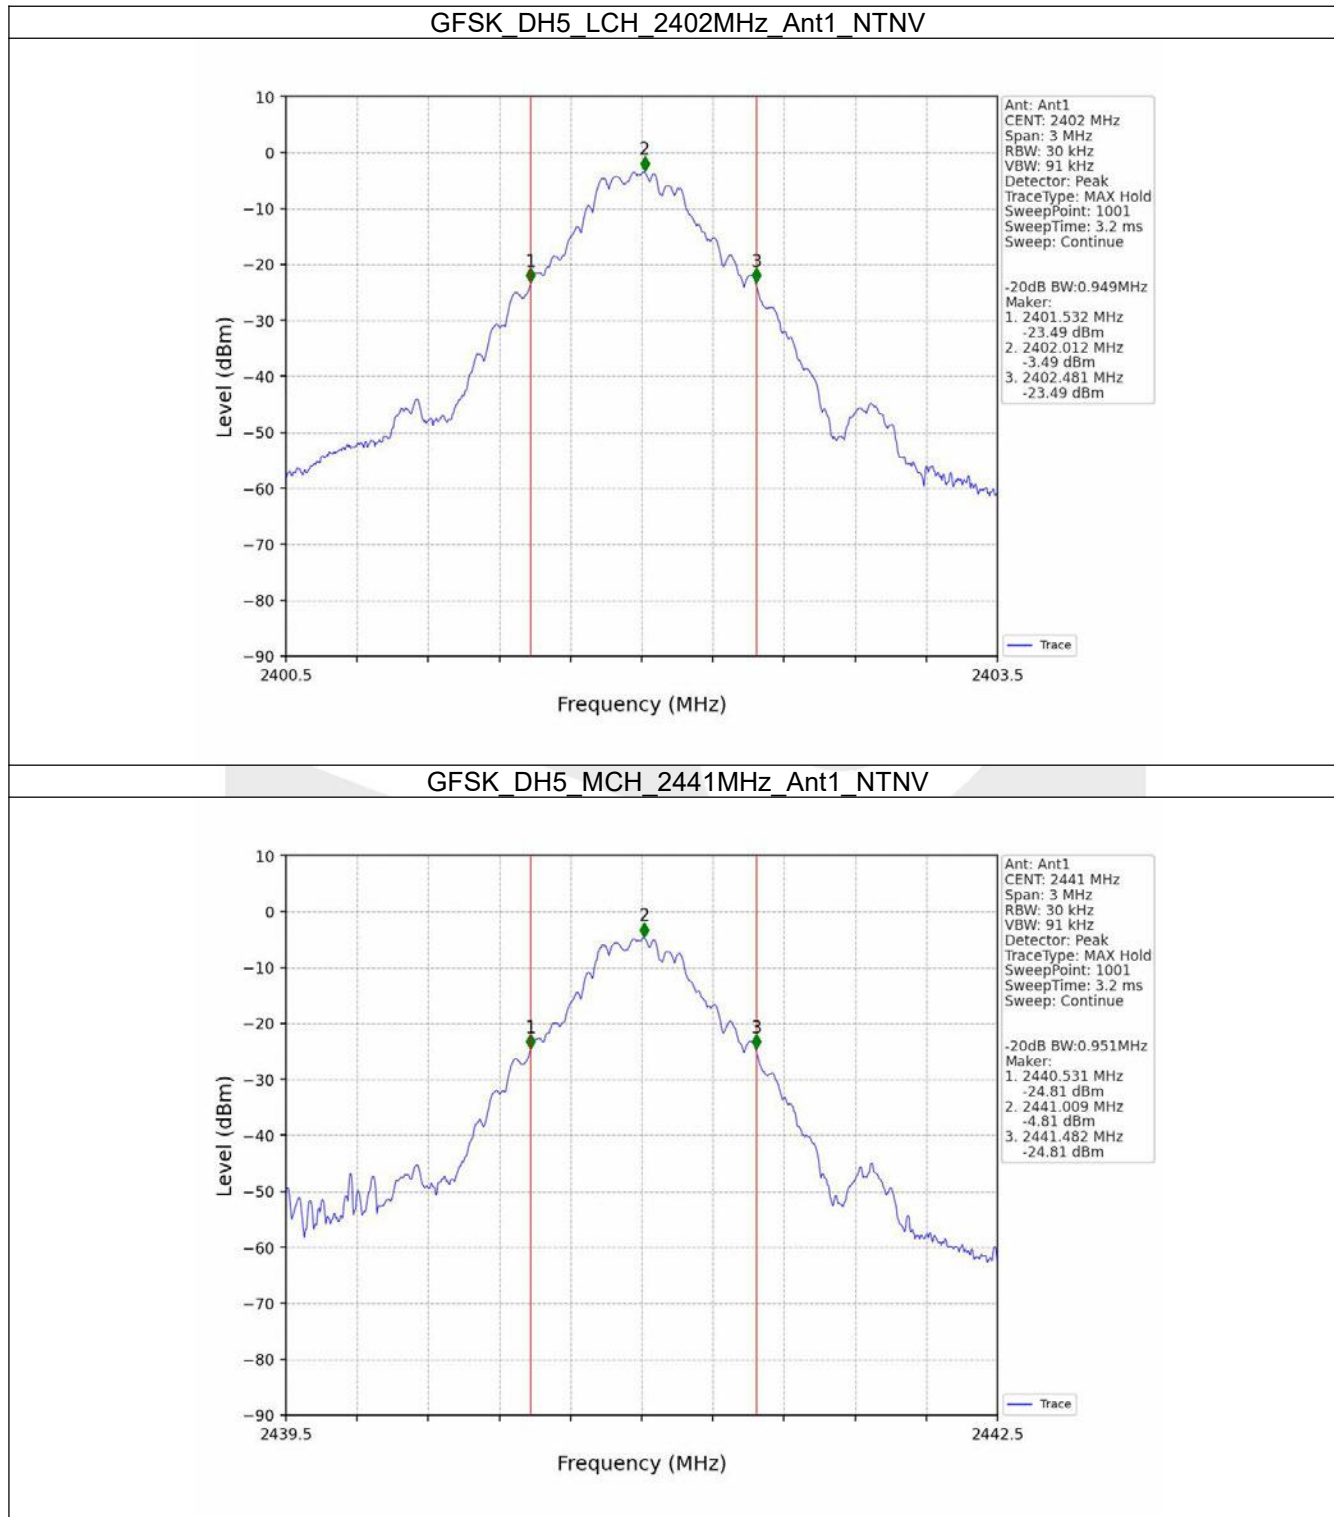


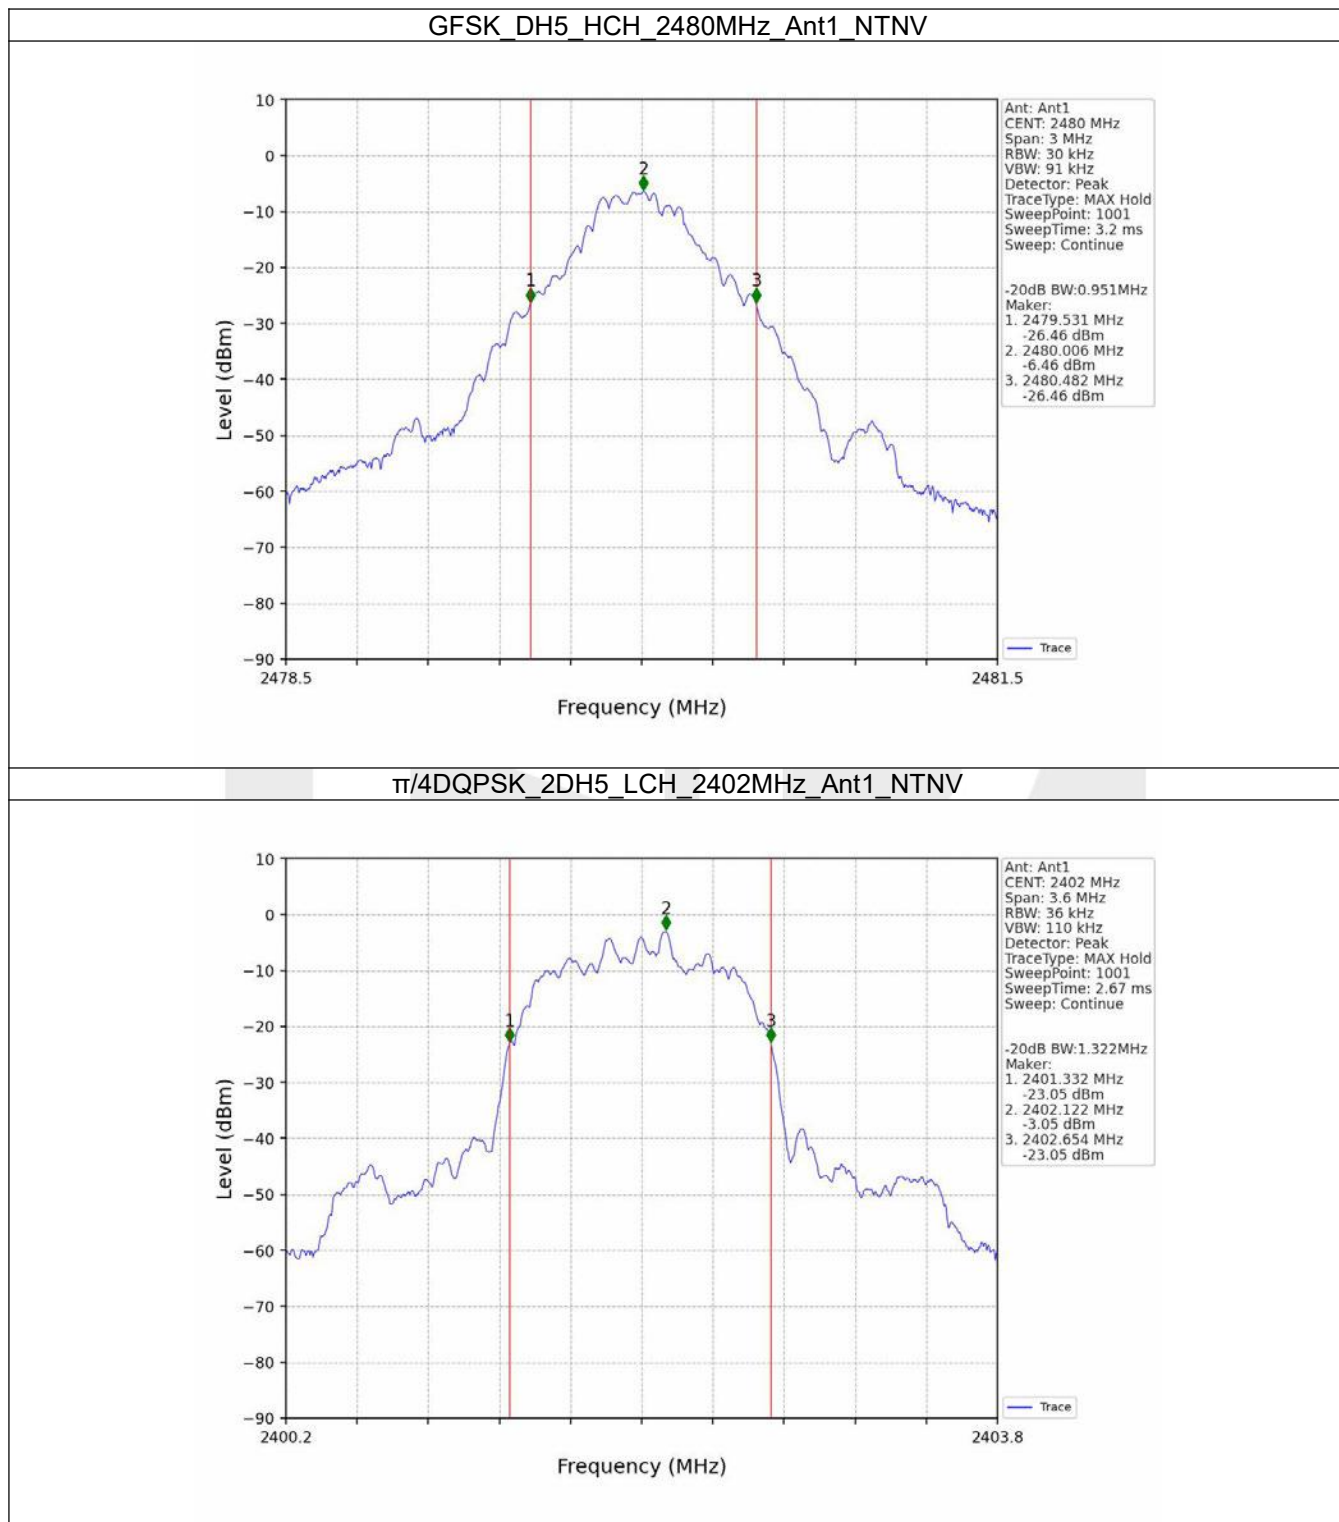


$\pi/4$ DQPSK\_2DH5\_MCH\_2441MHz\_Ant1\_NTNV

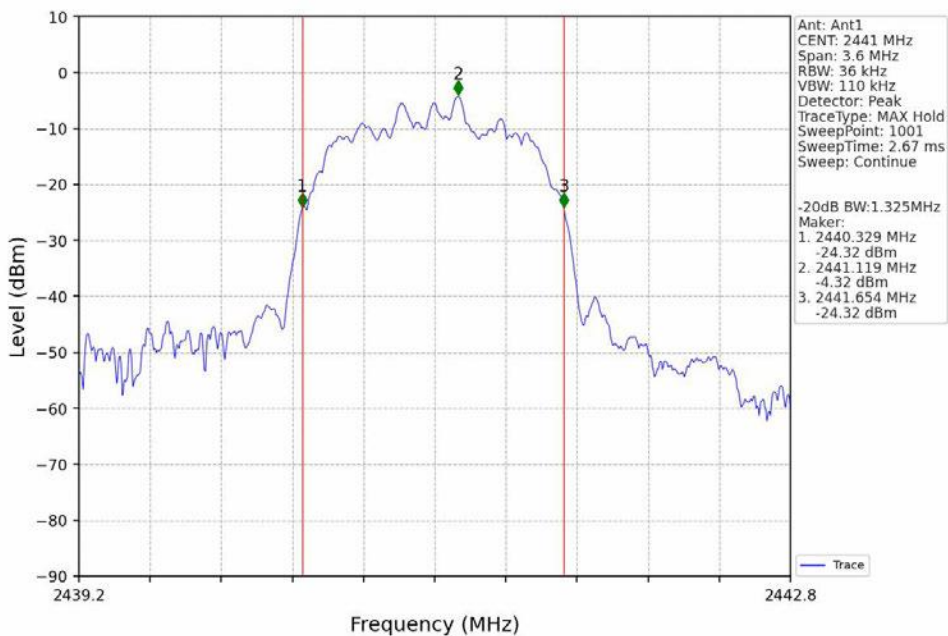


$\pi/4$ DQPSK\_2DH5\_HCH\_2480MHz\_Ant1\_NTNV

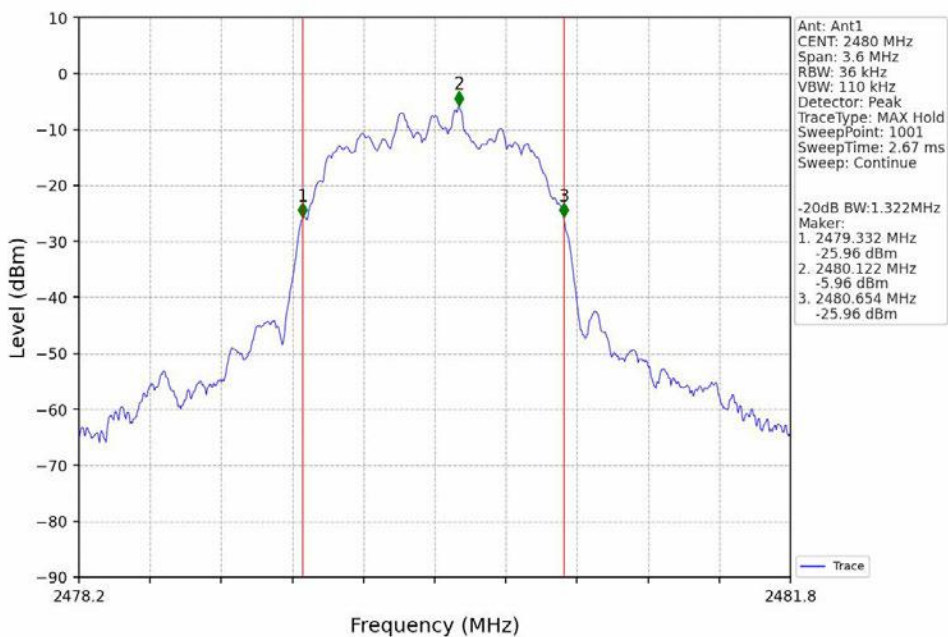


8DPSK\_3DH5\_LCH\_2402MHz\_Ant1\_NTNV

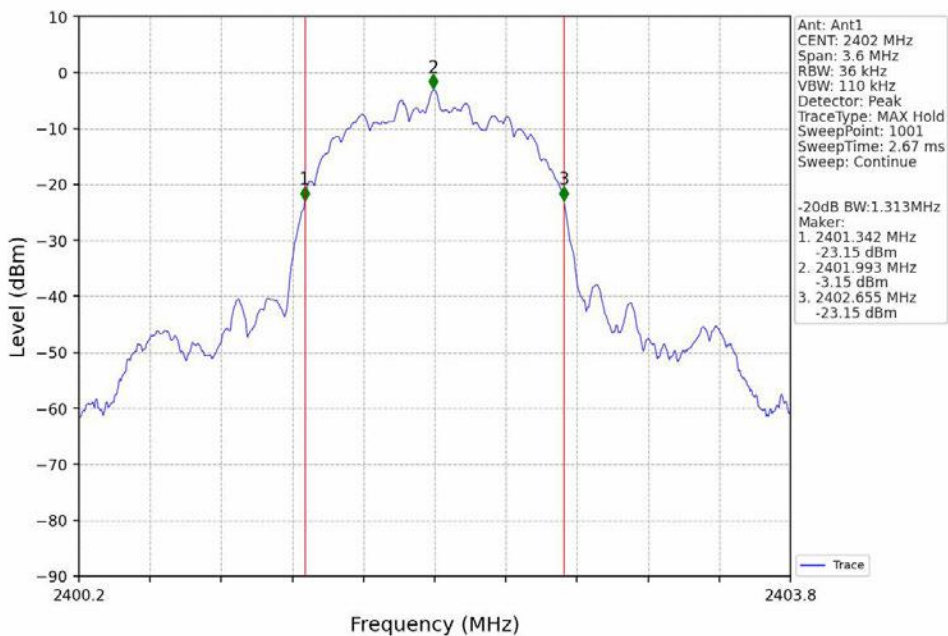

8DPSK\_3DH5\_MCH\_2441MHz\_Ant1\_NTNV

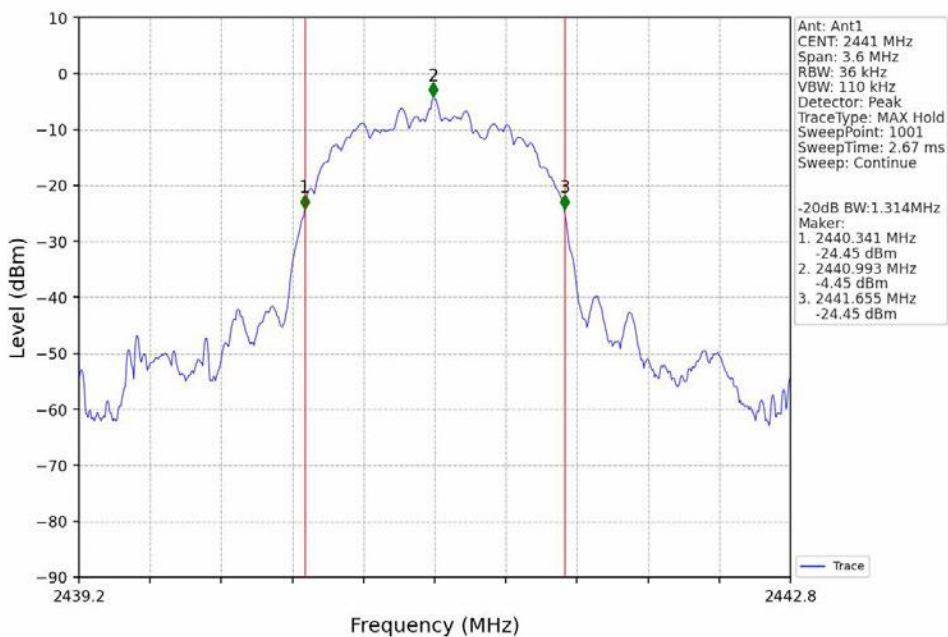

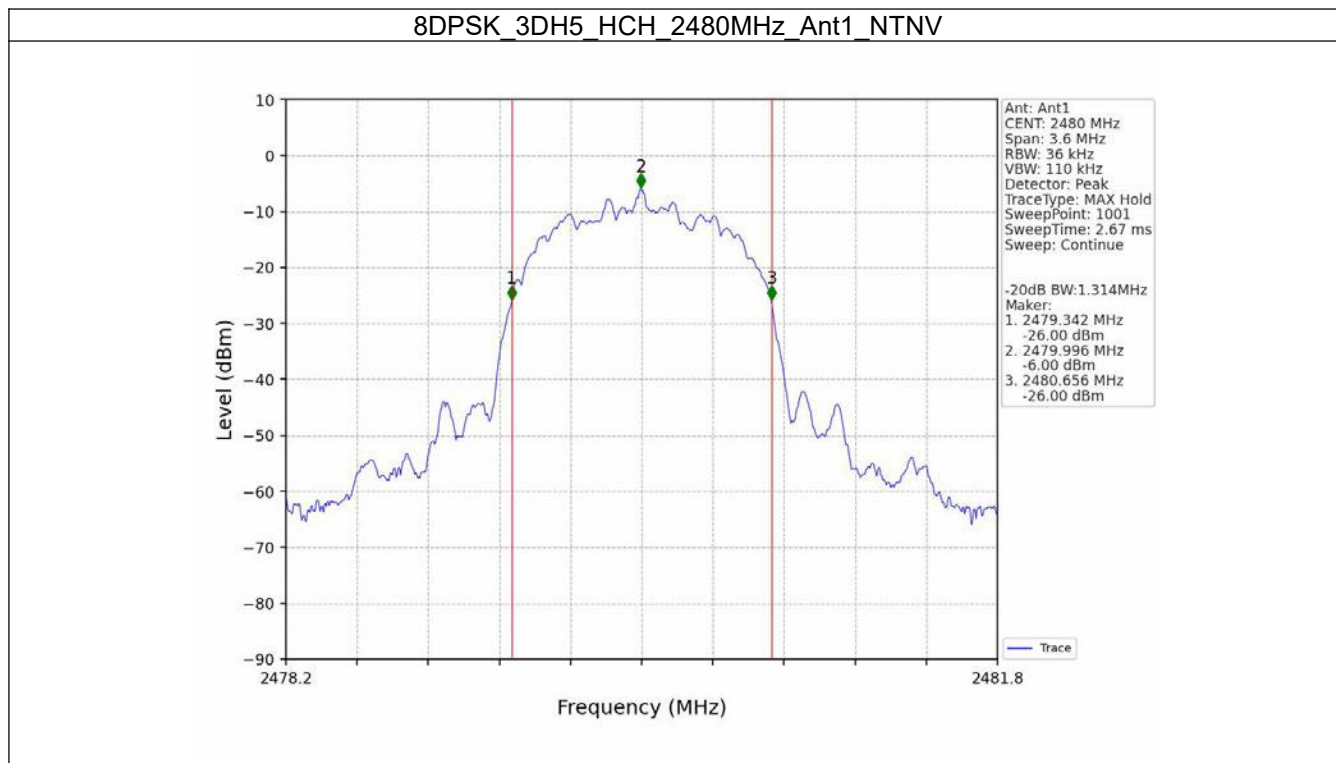



### 3. Maximum Conducted Output Power


#### 3.1 Test Result

##### 3.1.1 Power


| Mode          | TX Type | Frequency (MHz) | Packet Type | Maximum Peak Conducted Output Power (dBm) |              | Verdict |
|---------------|---------|-----------------|-------------|-------------------------------------------|--------------|---------|
|               |         |                 |             | ANT1                                      | Limit        |         |
| GFSK          | SISO    | 2402            | DH5         | -1.06                                     | $\leq 30$    | Pass    |
|               |         | 2441            | DH5         | -2.31                                     | $\leq 30$    | Pass    |
|               |         | 2480            | DH5         | -4.03                                     | $\leq 30$    | Pass    |
| $\pi/4$ DQPSK | SISO    | 2402            | 2DH5        | 1.35                                      | $\leq 20.97$ | Pass    |
|               |         | 2441            | 2DH5        | -0.03                                     | $\leq 20.97$ | Pass    |
|               |         | 2480            | 2DH5        | -1.65                                     | $\leq 20.97$ | Pass    |
| 8DPSK         | SISO    | 2402            | 3DH5        | 1.98                                      | $\leq 20.97$ | Pass    |
|               |         | 2441            | 3DH5        | 0.59                                      | $\leq 20.97$ | Pass    |
|               |         | 2480            | 3DH5        | -1.08                                     | $\leq 20.97$ | Pass    |

## 3.2 Test Graph


### 3.2.1 Power

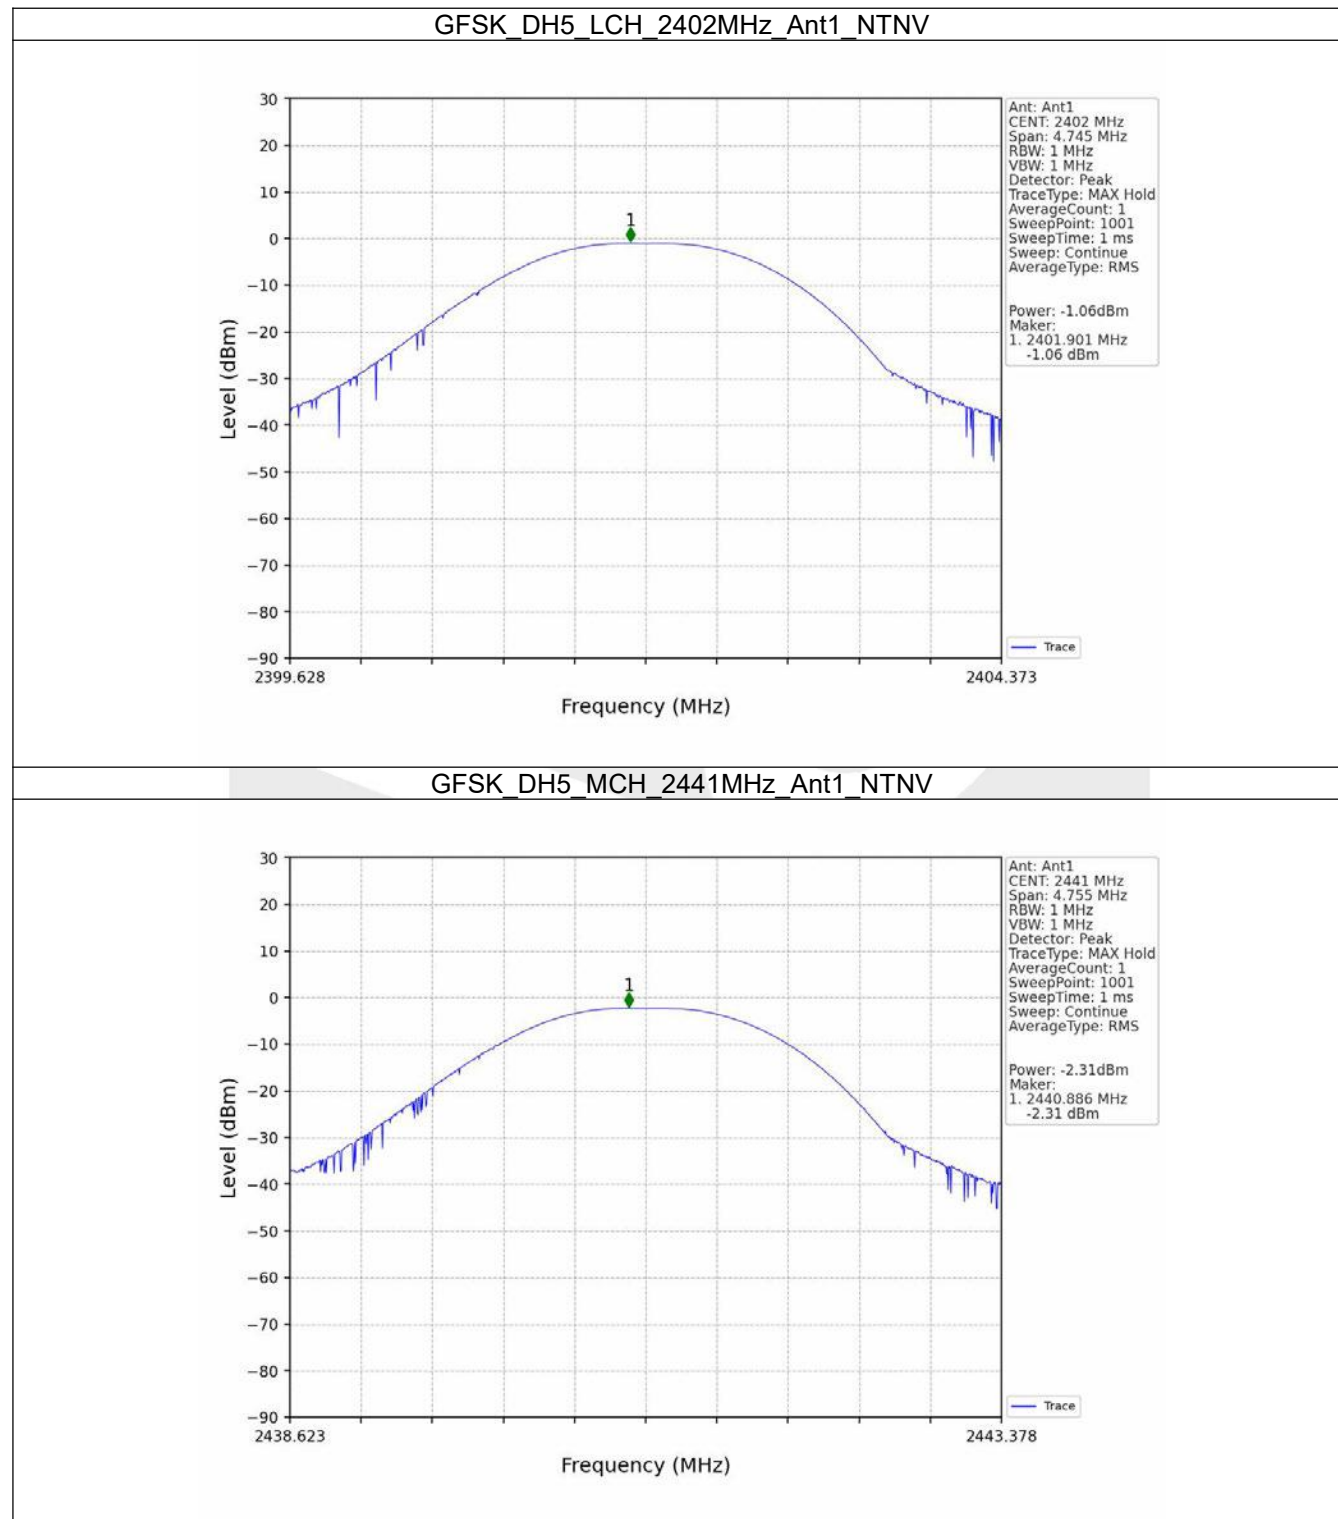


GFSK\_DH5\_HCH\_2480MHz\_Ant1\_NTNV

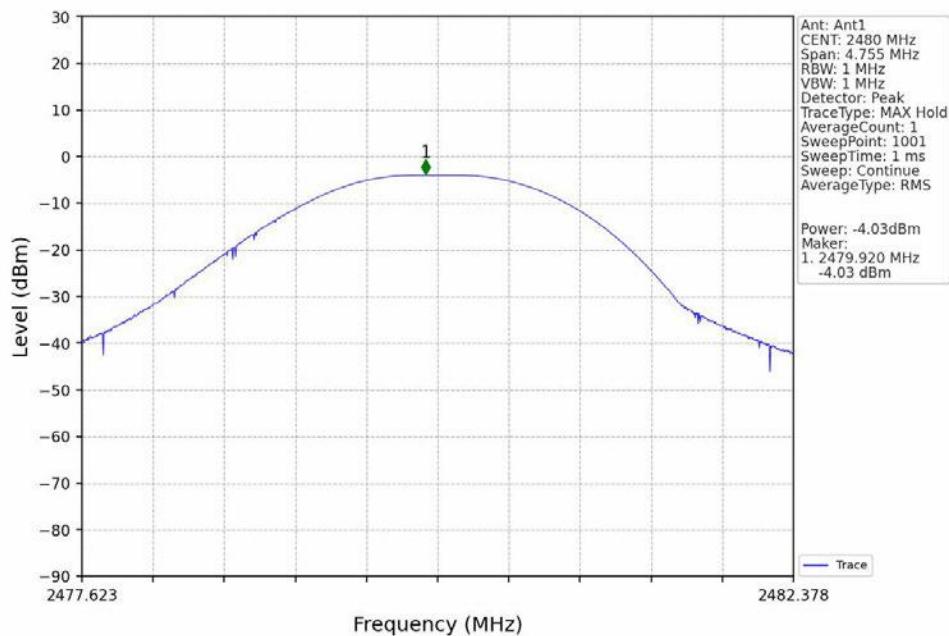


$\pi/4$ DQPSK\_2DH5\_LCH\_2402MHz\_Ant1\_NTNV

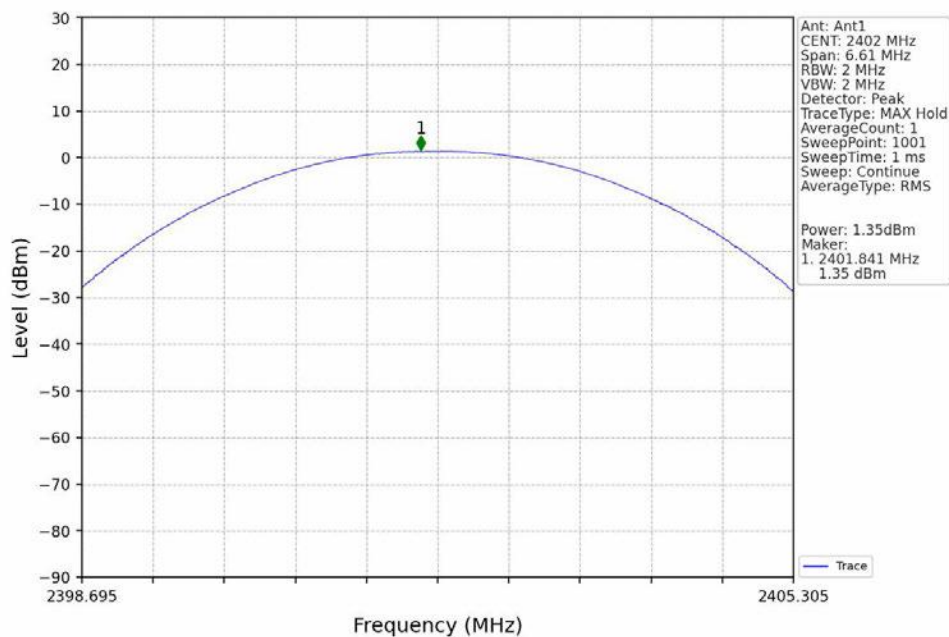


$\pi/4$ DQPSK\_2DH5\_MCH\_2441MHz\_Ant1\_NTNV

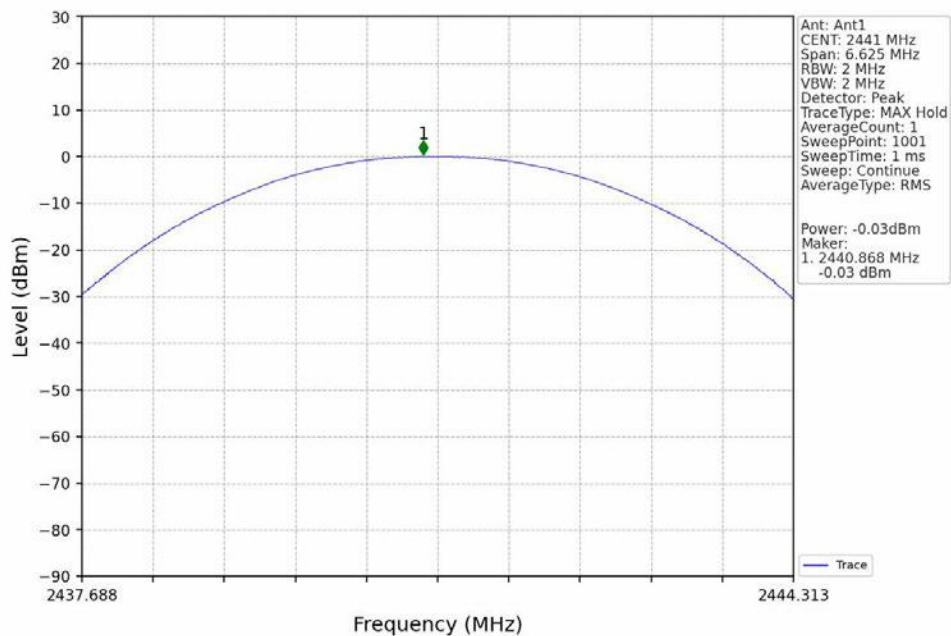


$\pi/4$ DQPSK\_2DH5\_HCH\_2480MHz\_Ant1\_NTNV

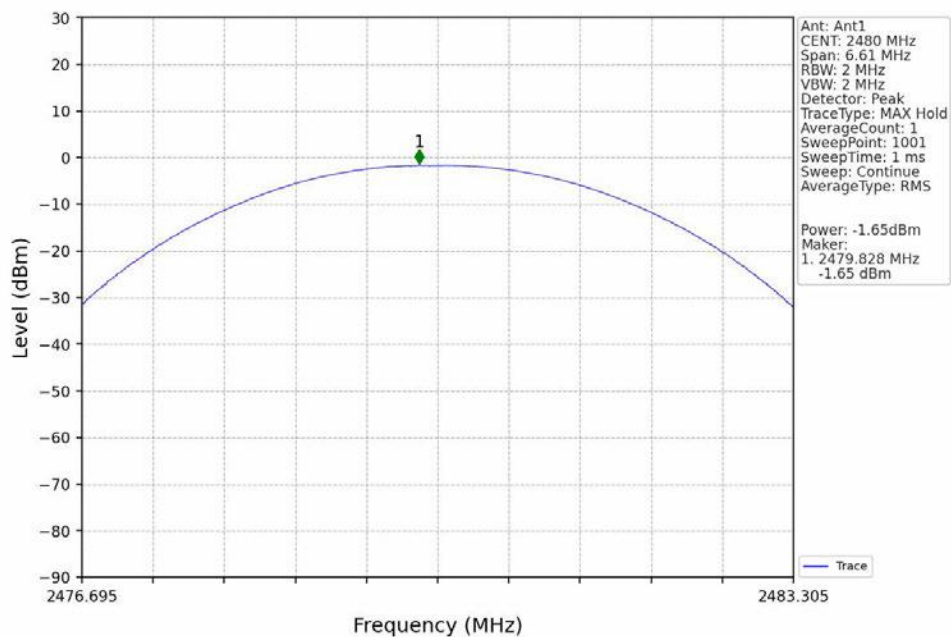

8DPSK\_3DH5\_LCH\_2402MHz\_Ant1\_NTNV

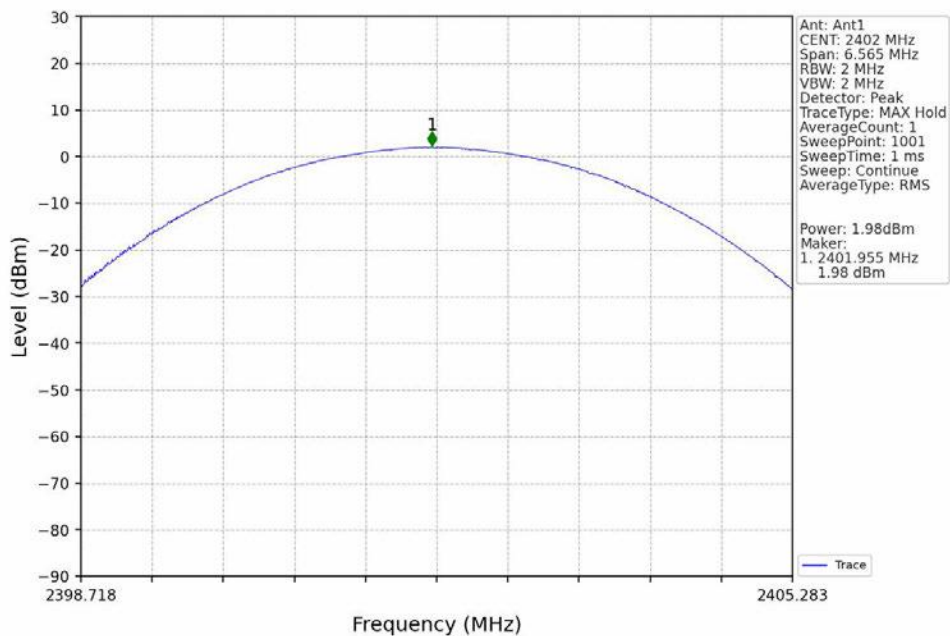

8DPSK\_3DH5\_MCH\_2441MHz\_Ant1\_NTNV

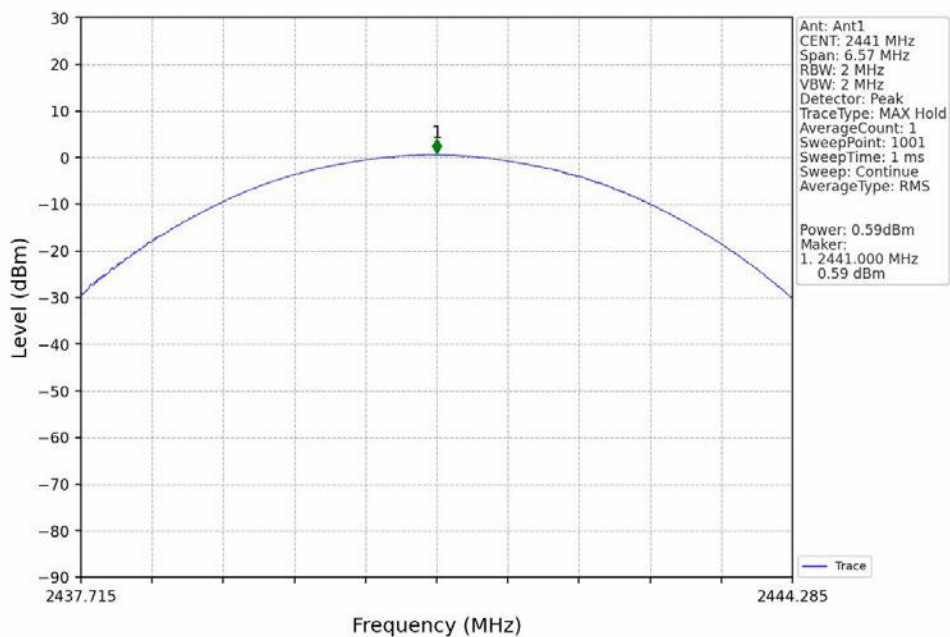





#### 4. Carrier Frequency Separation


##### 4.1 Test Result


###### 4.1.1 Ant1

| Ant1          |         |                 |             |                          |                      |              |         |
|---------------|---------|-----------------|-------------|--------------------------|----------------------|--------------|---------|
| Mode          | TX Type | Frequency (MHz) | Packet Type | Channel Separation (MHz) | 20dB Bandwidth (MHz) | Limit (MHz)  | Verdict |
| GFSK          | SISO    | HOPP            | DH5         | 0.996                    | 0.951                | $\geq 0.951$ | Pass    |
| $\pi/4$ DQPSK | SISO    | HOPP            | 2DH5        | 1.025                    | 1.325                | $\geq 0.883$ | Pass    |
| 8DPSK         | SISO    | HOPP            | 3DH5        | 1.001                    | 1.314                | $\geq 0.876$ | Pass    |

## 4.2 Test Graph

### 4.2.1 Ant1

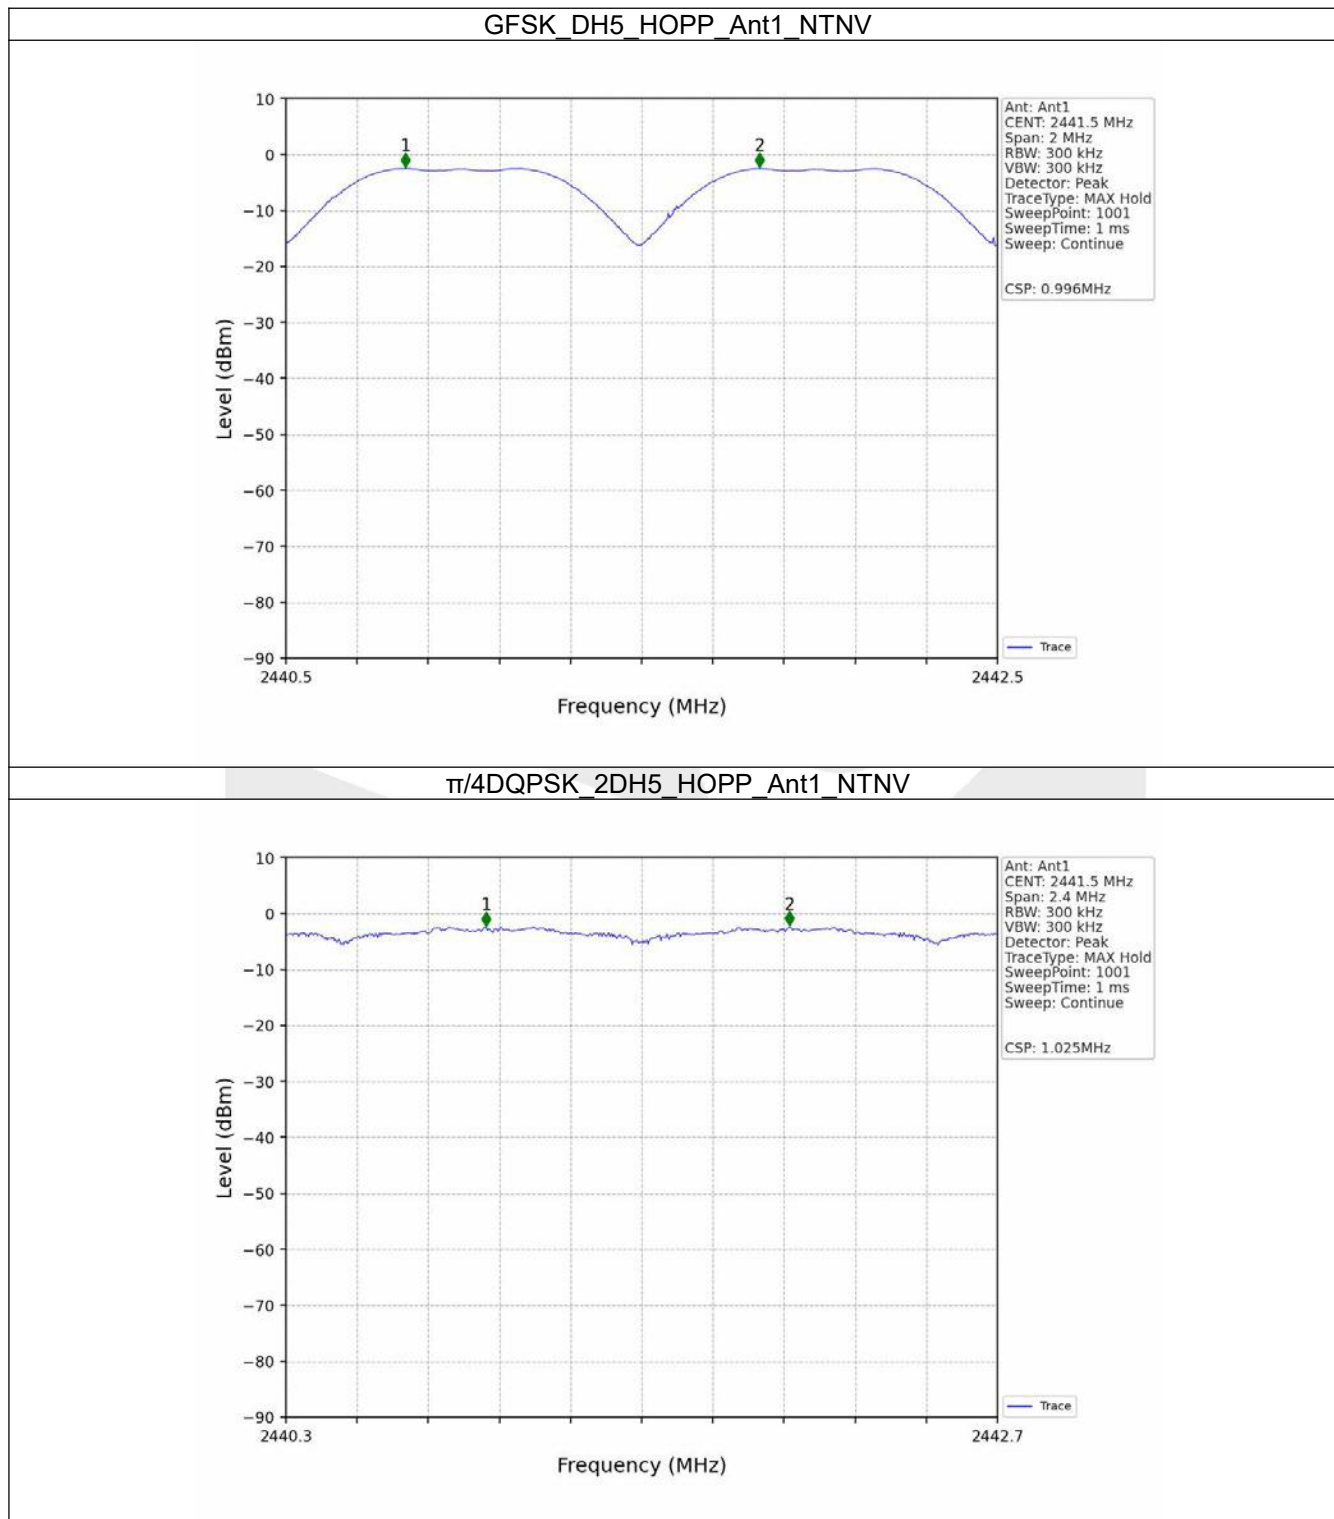

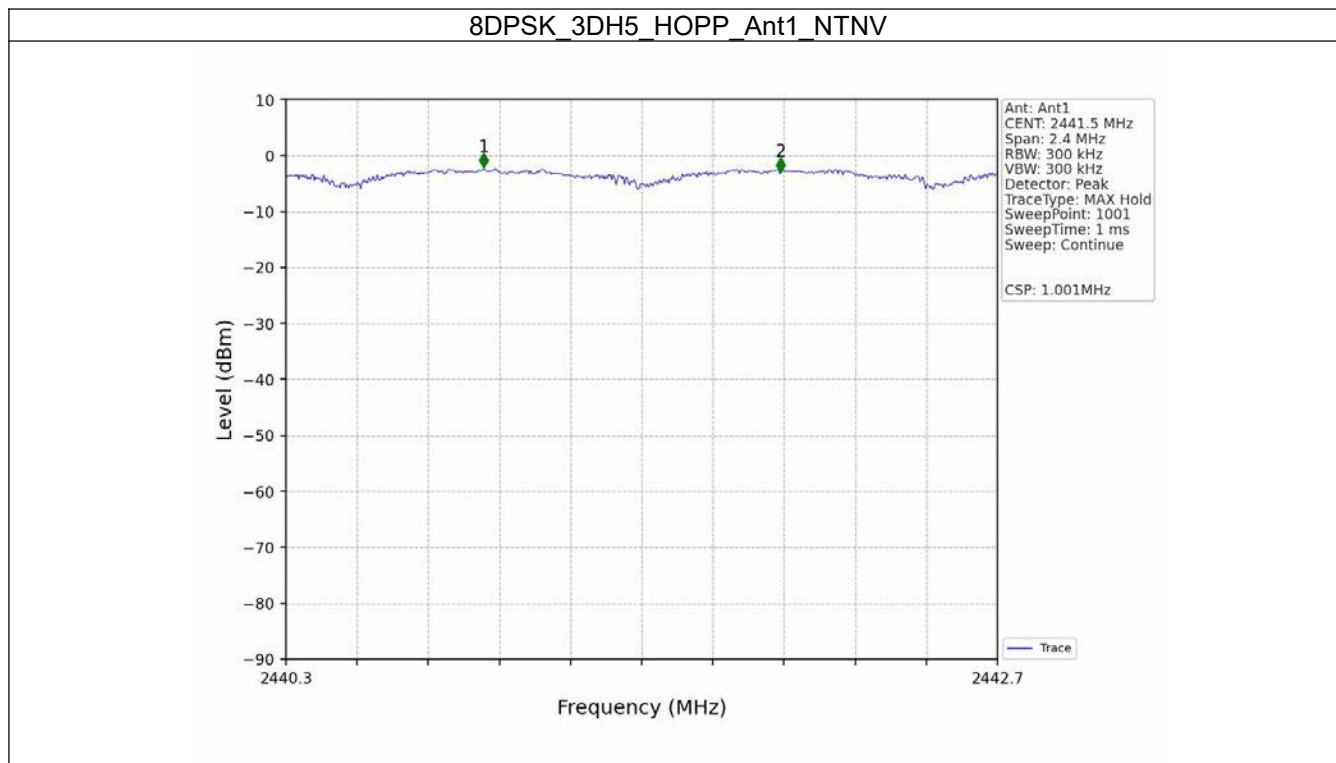

## 5. Number of Hopping Frequencies

### 5.1 Test Result


#### 5.1.1 HoppNum


| Mode          | TX Type | Frequency (MHz) | Packet Type | Num of Hopping Frequencies |           | Verdict |
|---------------|---------|-----------------|-------------|----------------------------|-----------|---------|
|               |         |                 |             | ANT1                       | Limit     |         |
| GFSK          | SISO    | HOPP            | DH5         | 79                         | $\geq 15$ | Pass    |
| $\pi/4$ DQPSK | SISO    | HOPP            | 2DH5        | 79                         | $\geq 15$ | Pass    |
| 8DPSK         | SISO    | HOPP            | 3DH5        | 79                         | $\geq 15$ | Pass    |



## 5.2 Test Graph

### 5.2.1 HoppNum

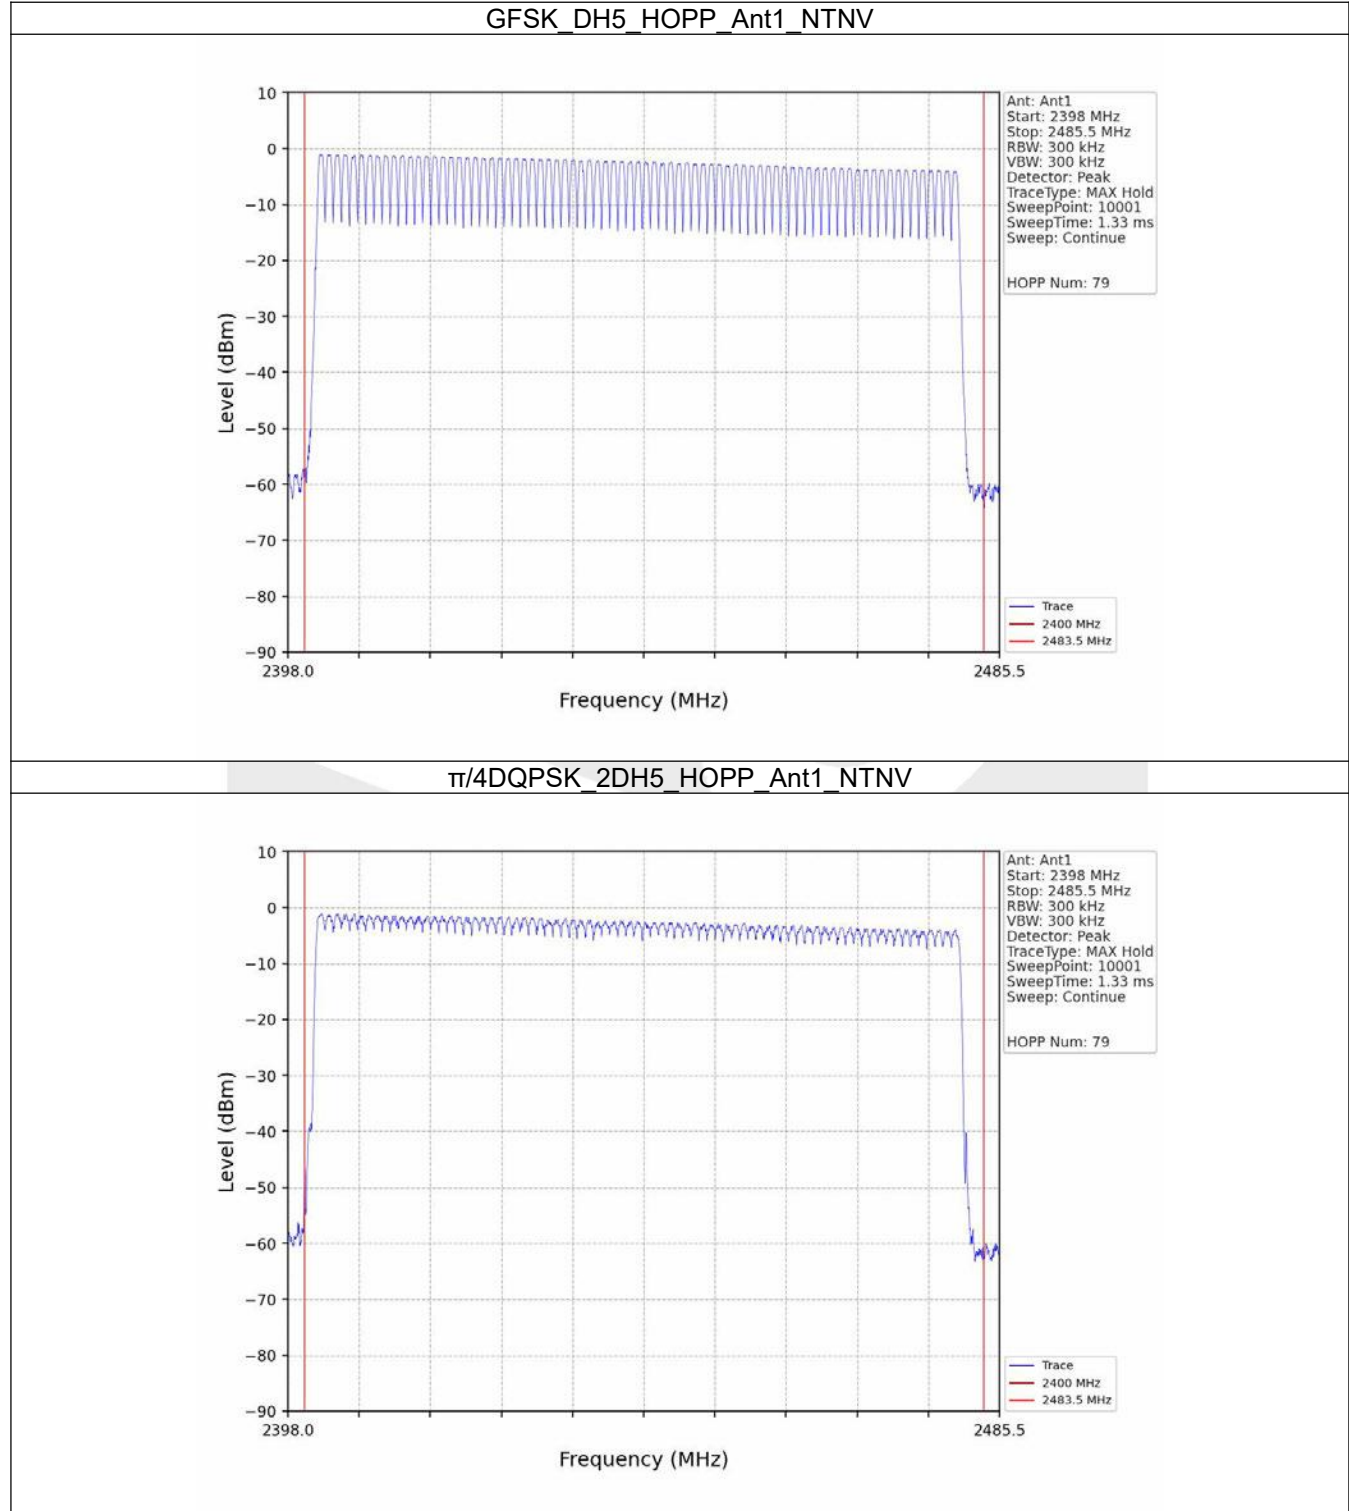

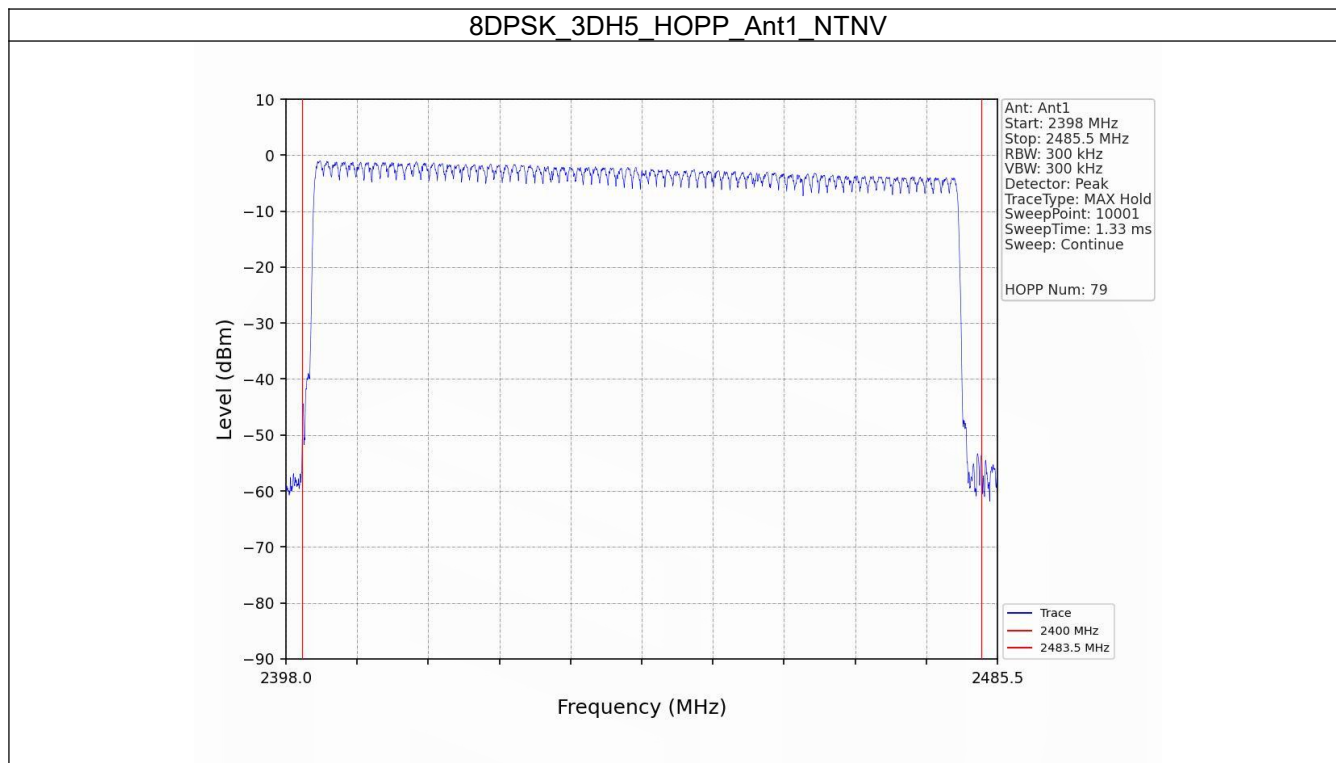

## 6. Time of Occupancy (Dwell Time)


### 6.1 Test Result


#### 6.1.1 Ant1

| Ant1          |         |                 |             |                               |                        |                                    |                 |            |         |
|---------------|---------|-----------------|-------------|-------------------------------|------------------------|------------------------------------|-----------------|------------|---------|
| Mode          | TX Type | Frequency (MHz) | Packet Type | Duration of Single Pulse (ms) | Observation Period (s) | Num of Pulse in Observation Period | Dwell Time (ms) | Limit (ms) | Verdict |
| GFSK          | SISO    | HOPP            | DH1         | 0.400                         | 31.600                 | 320                                | 128.000         | <=400      | Pass    |
|               |         |                 | DH3         | 1.662                         | 31.600                 | 171                                | 284.202         | <=400      | Pass    |
|               |         |                 | DH5         | 2.908                         | 31.600                 | 87                                 | 252.996         | <=400      | Pass    |
| $\pi/4$ DQPSK | SISO    | HOPP            | 2DH1        | 0.412                         | 31.600                 | 320                                | 131.840         | <=400      | Pass    |
|               |         |                 | 2DH3        | 1.662                         | 31.600                 | 171                                | 284.202         | <=400      | Pass    |
|               |         |                 | 2DH5        | 2.912                         | 31.600                 | 100                                | 291.200         | <=400      | Pass    |
| 8DPSK         | SISO    | HOPP            | 3DH1        | 0.412                         | 31.600                 | 320                                | 131.840         | <=400      | Pass    |
|               |         |                 | 3DH3        | 1.662                         | 31.600                 | 169                                | 280.878         | <=400      | Pass    |
|               |         |                 | 3DH5        | 2.912                         | 31.600                 | 100                                | 291.200         | <=400      | Pass    |


## 6.2 Test Graph

### 6.2.1 Ant1

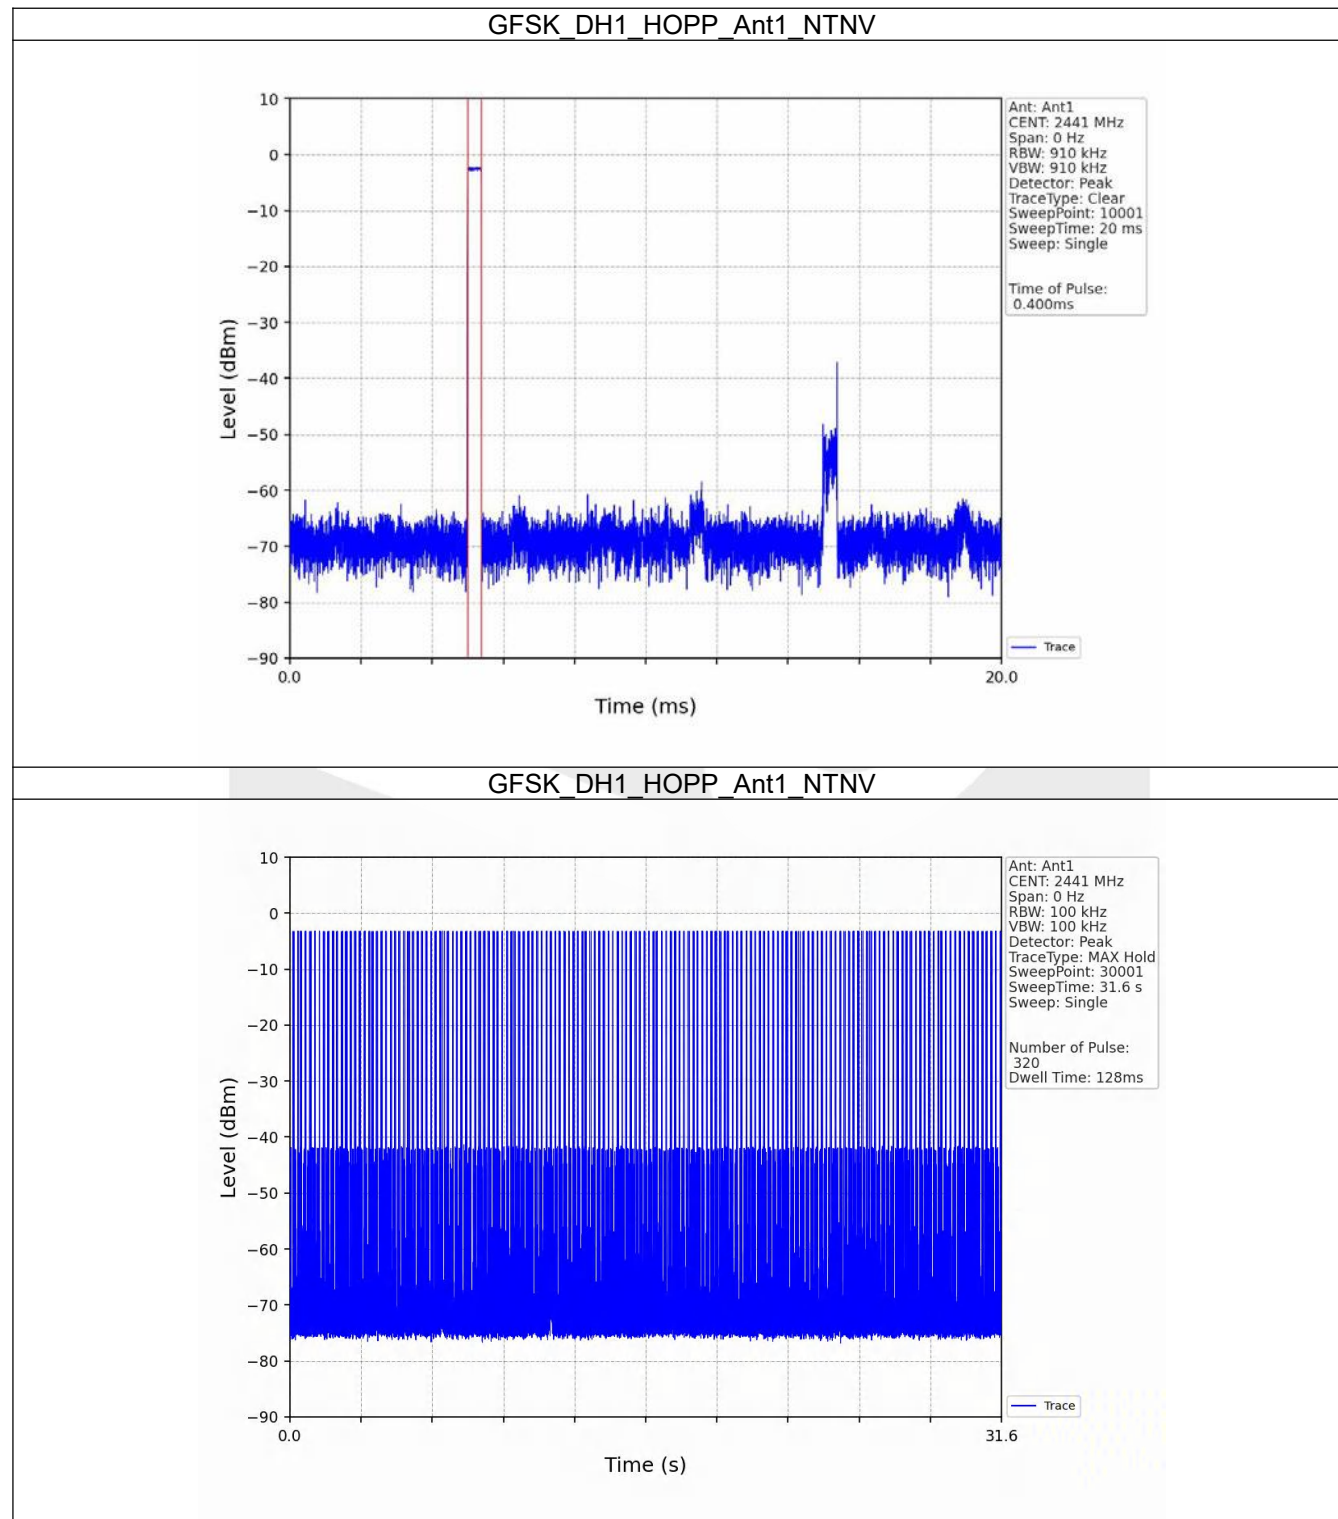


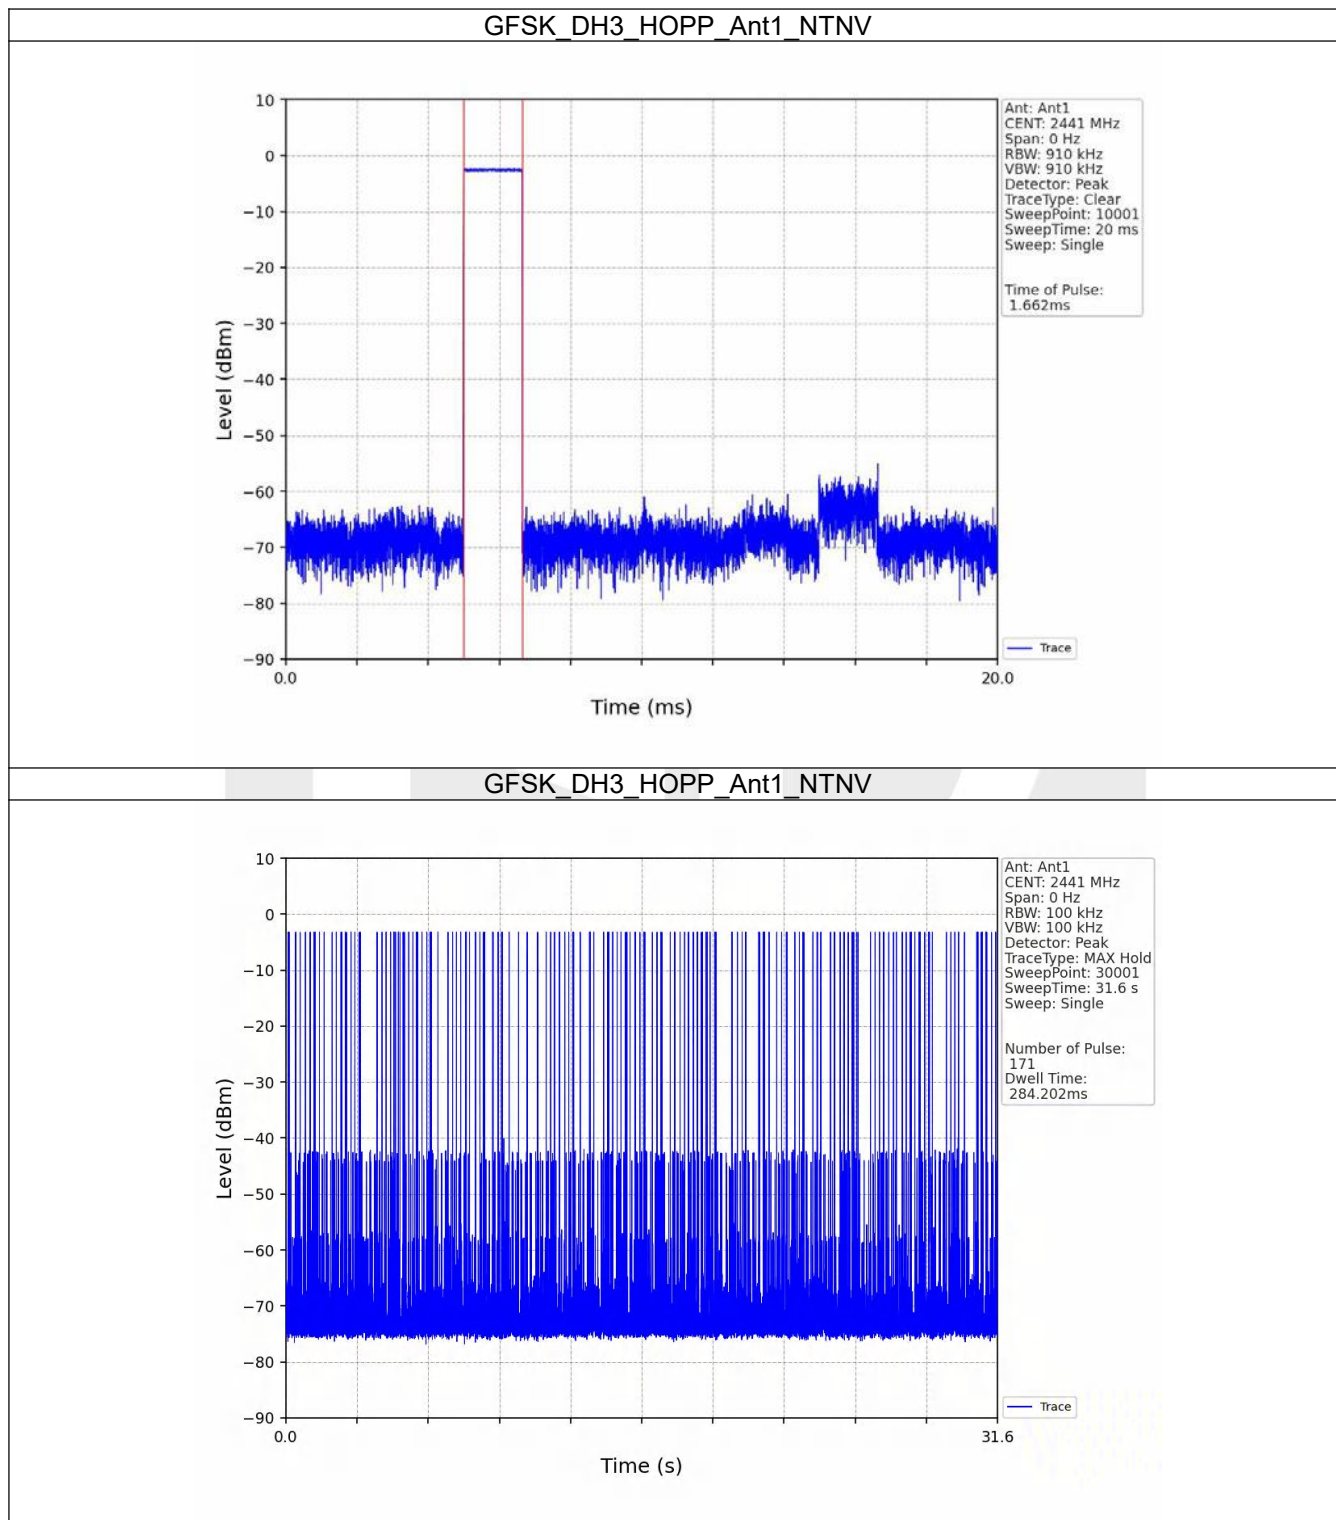





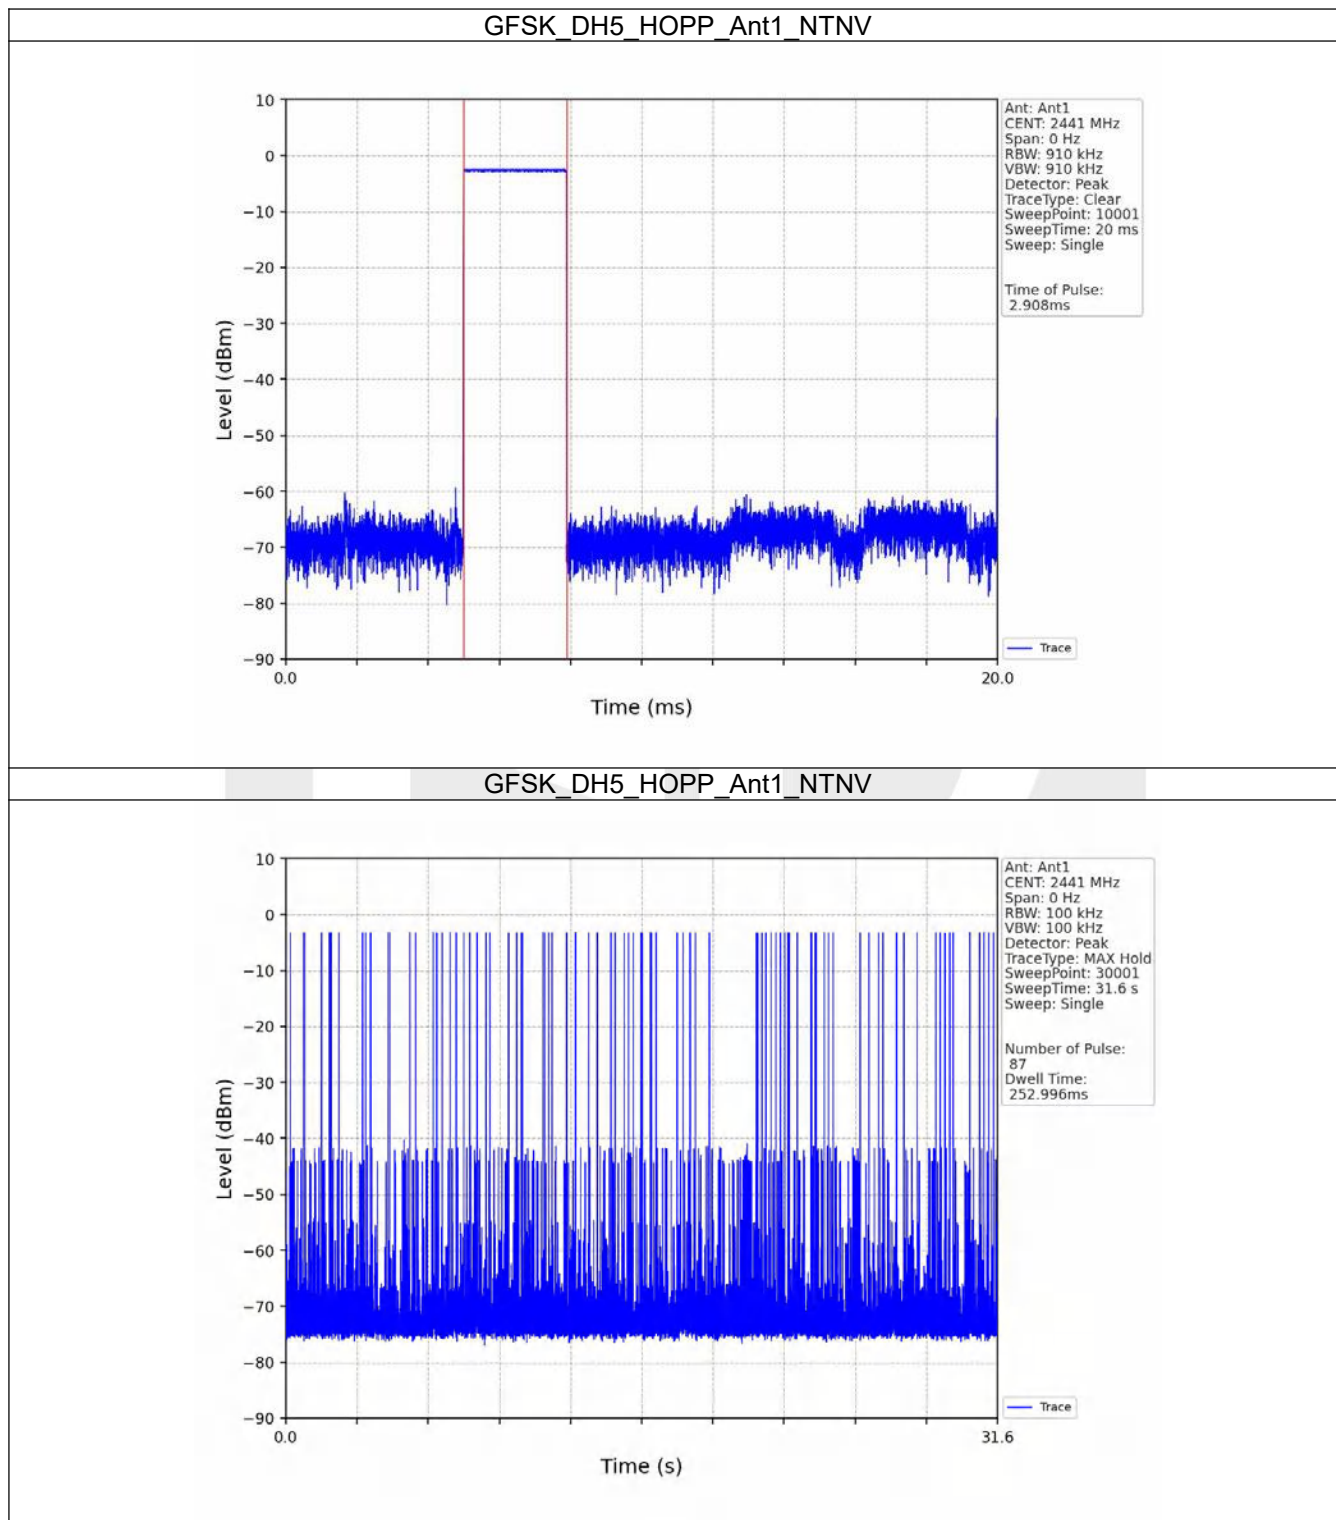




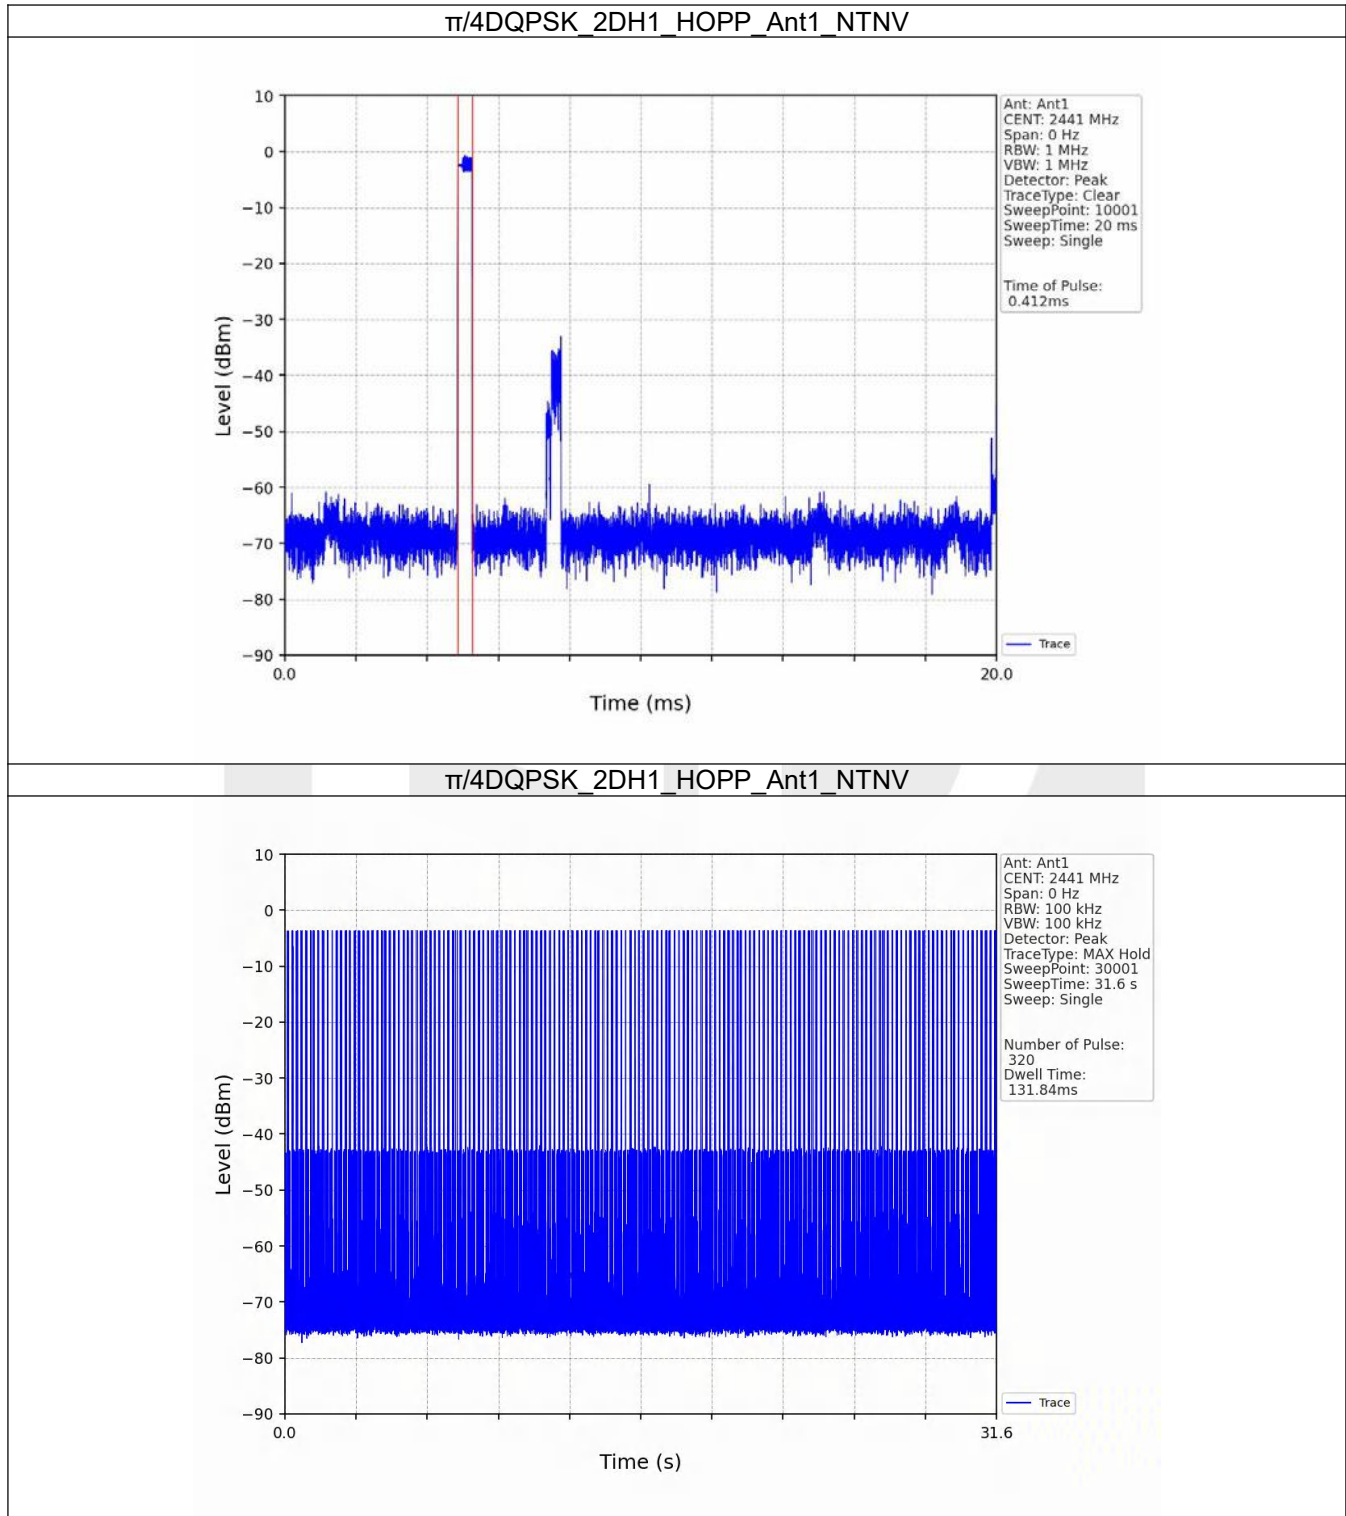


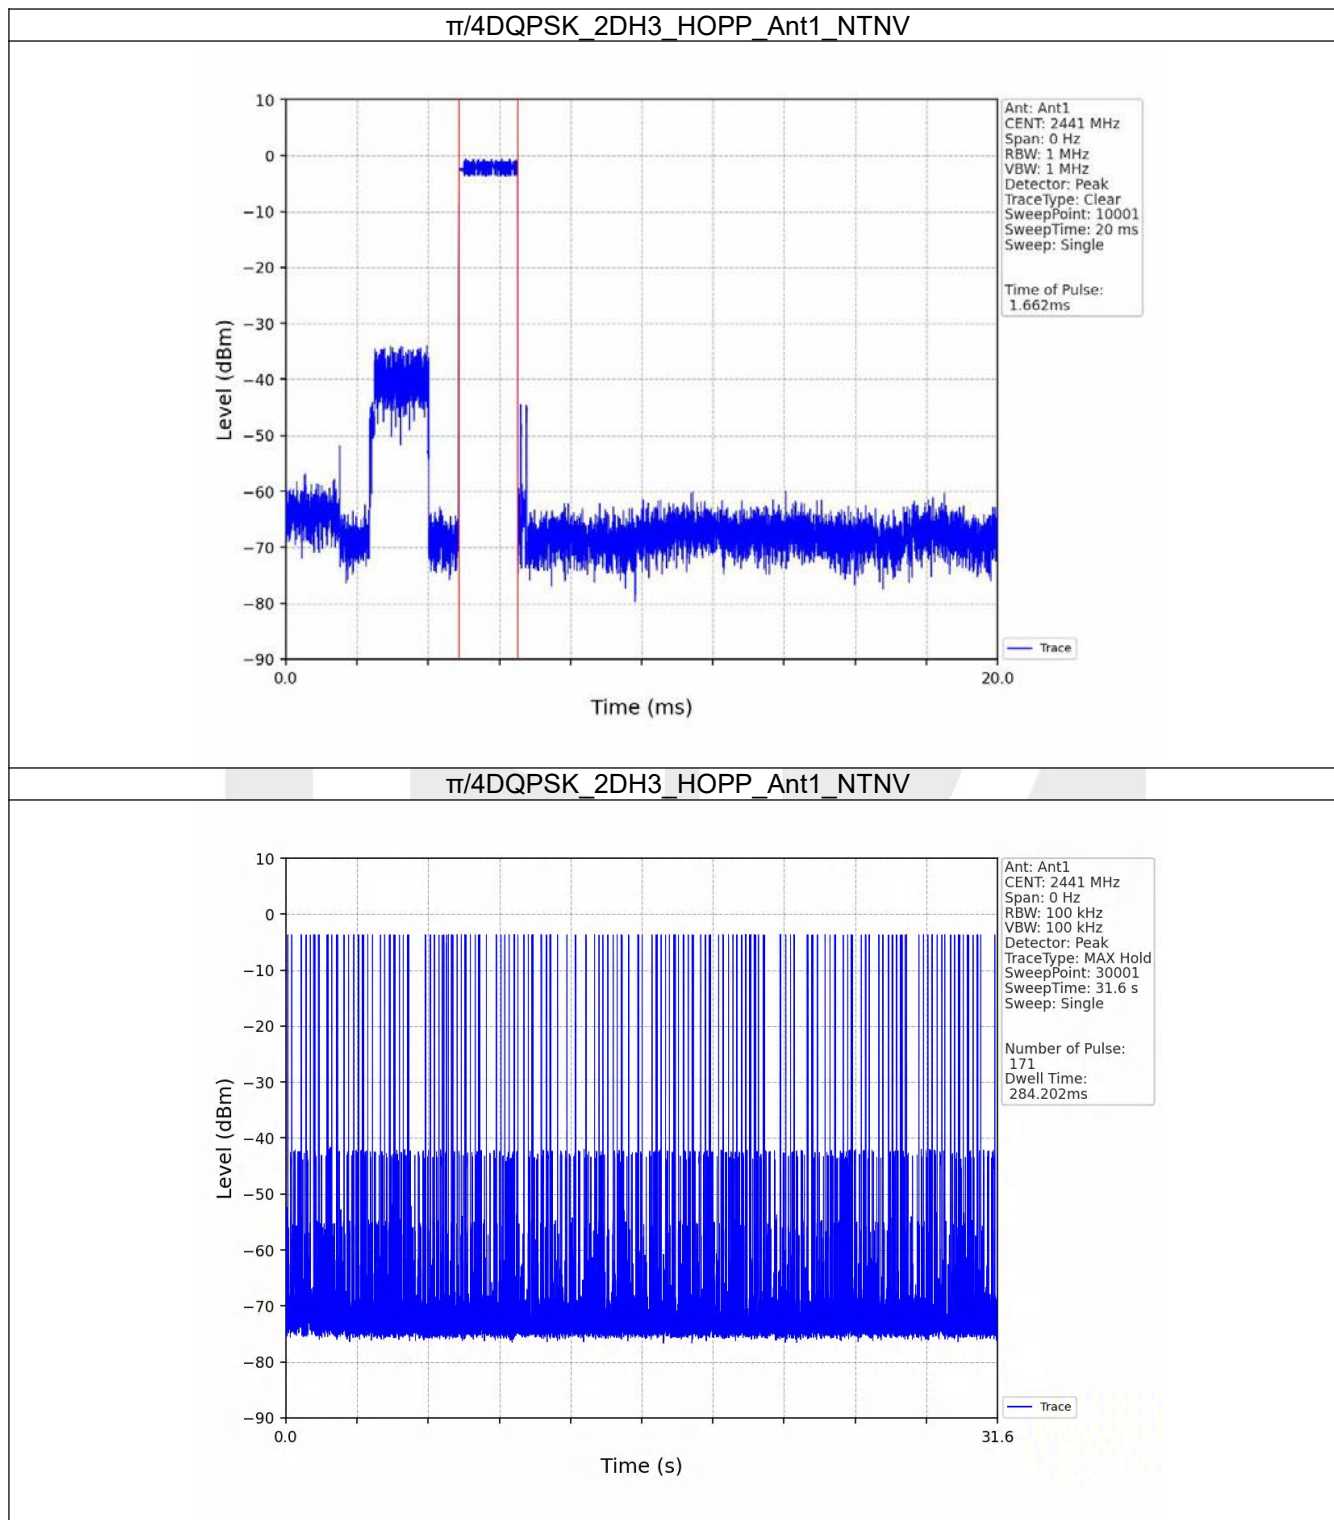

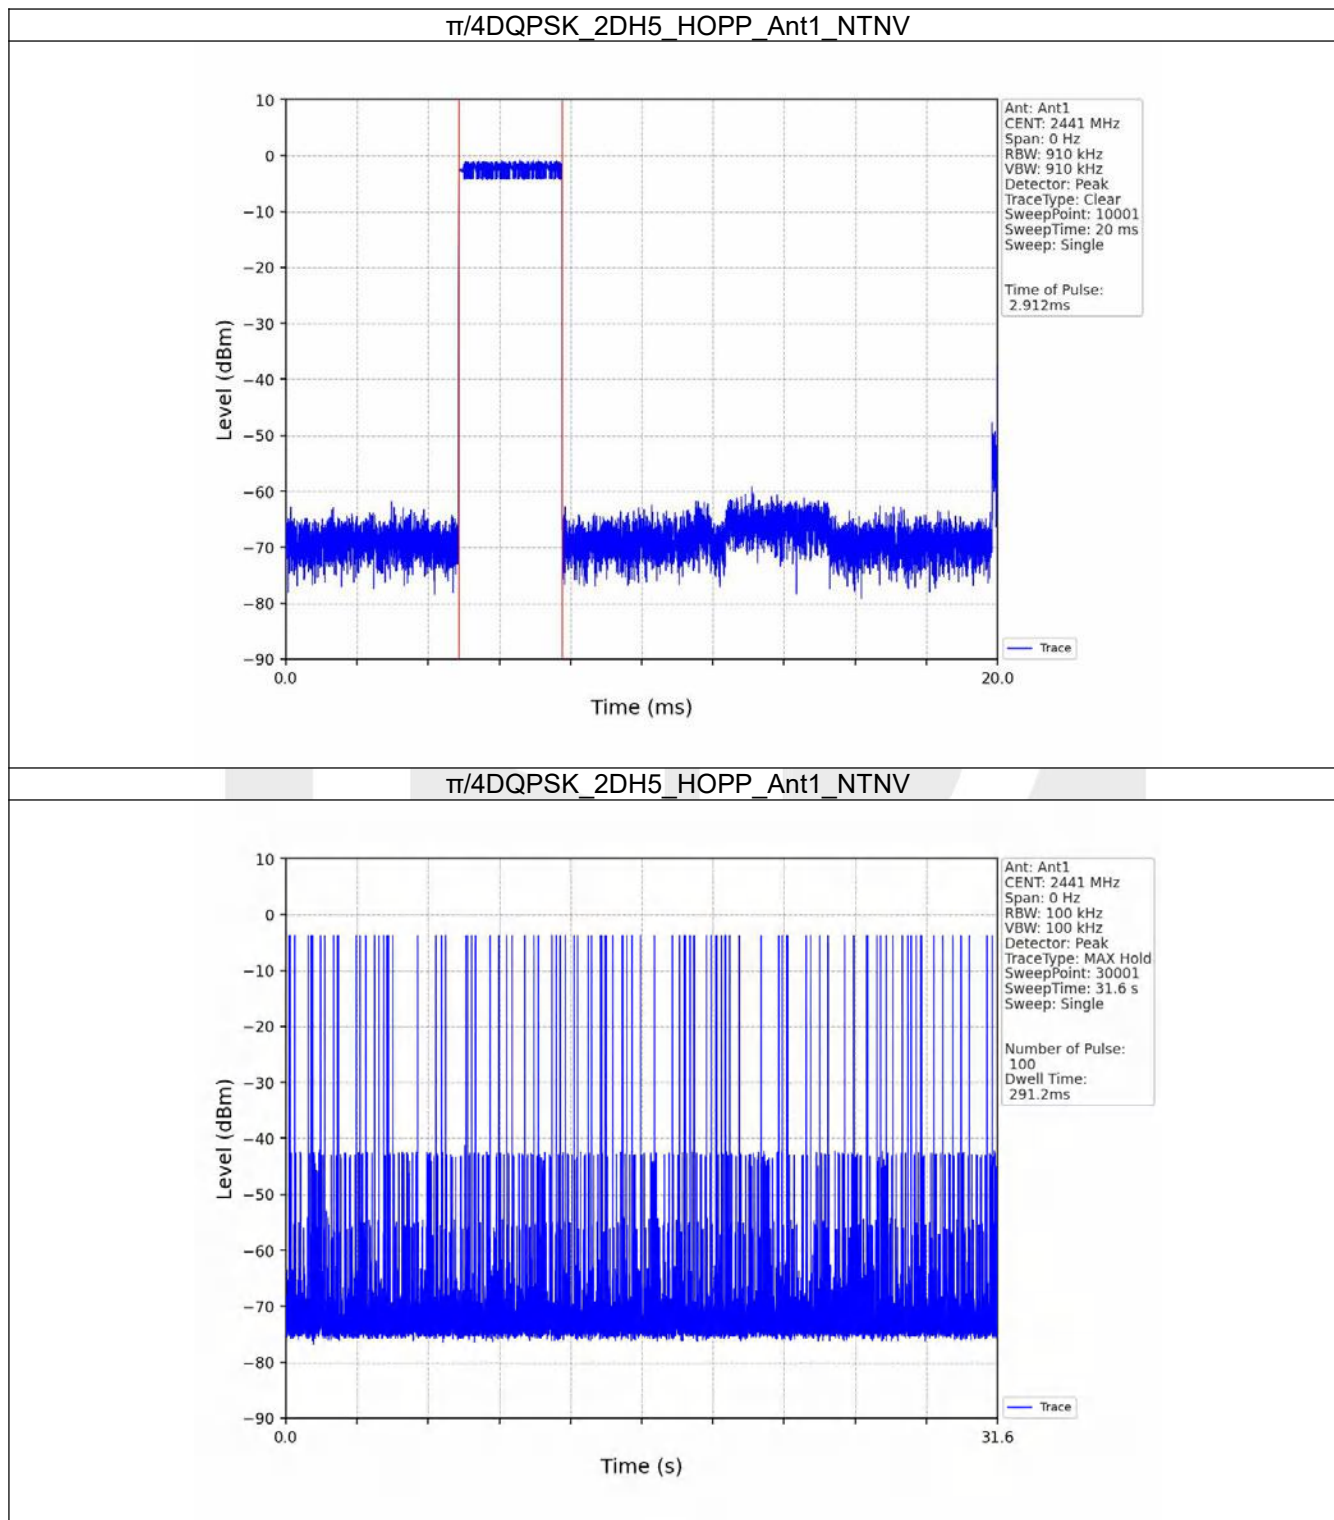


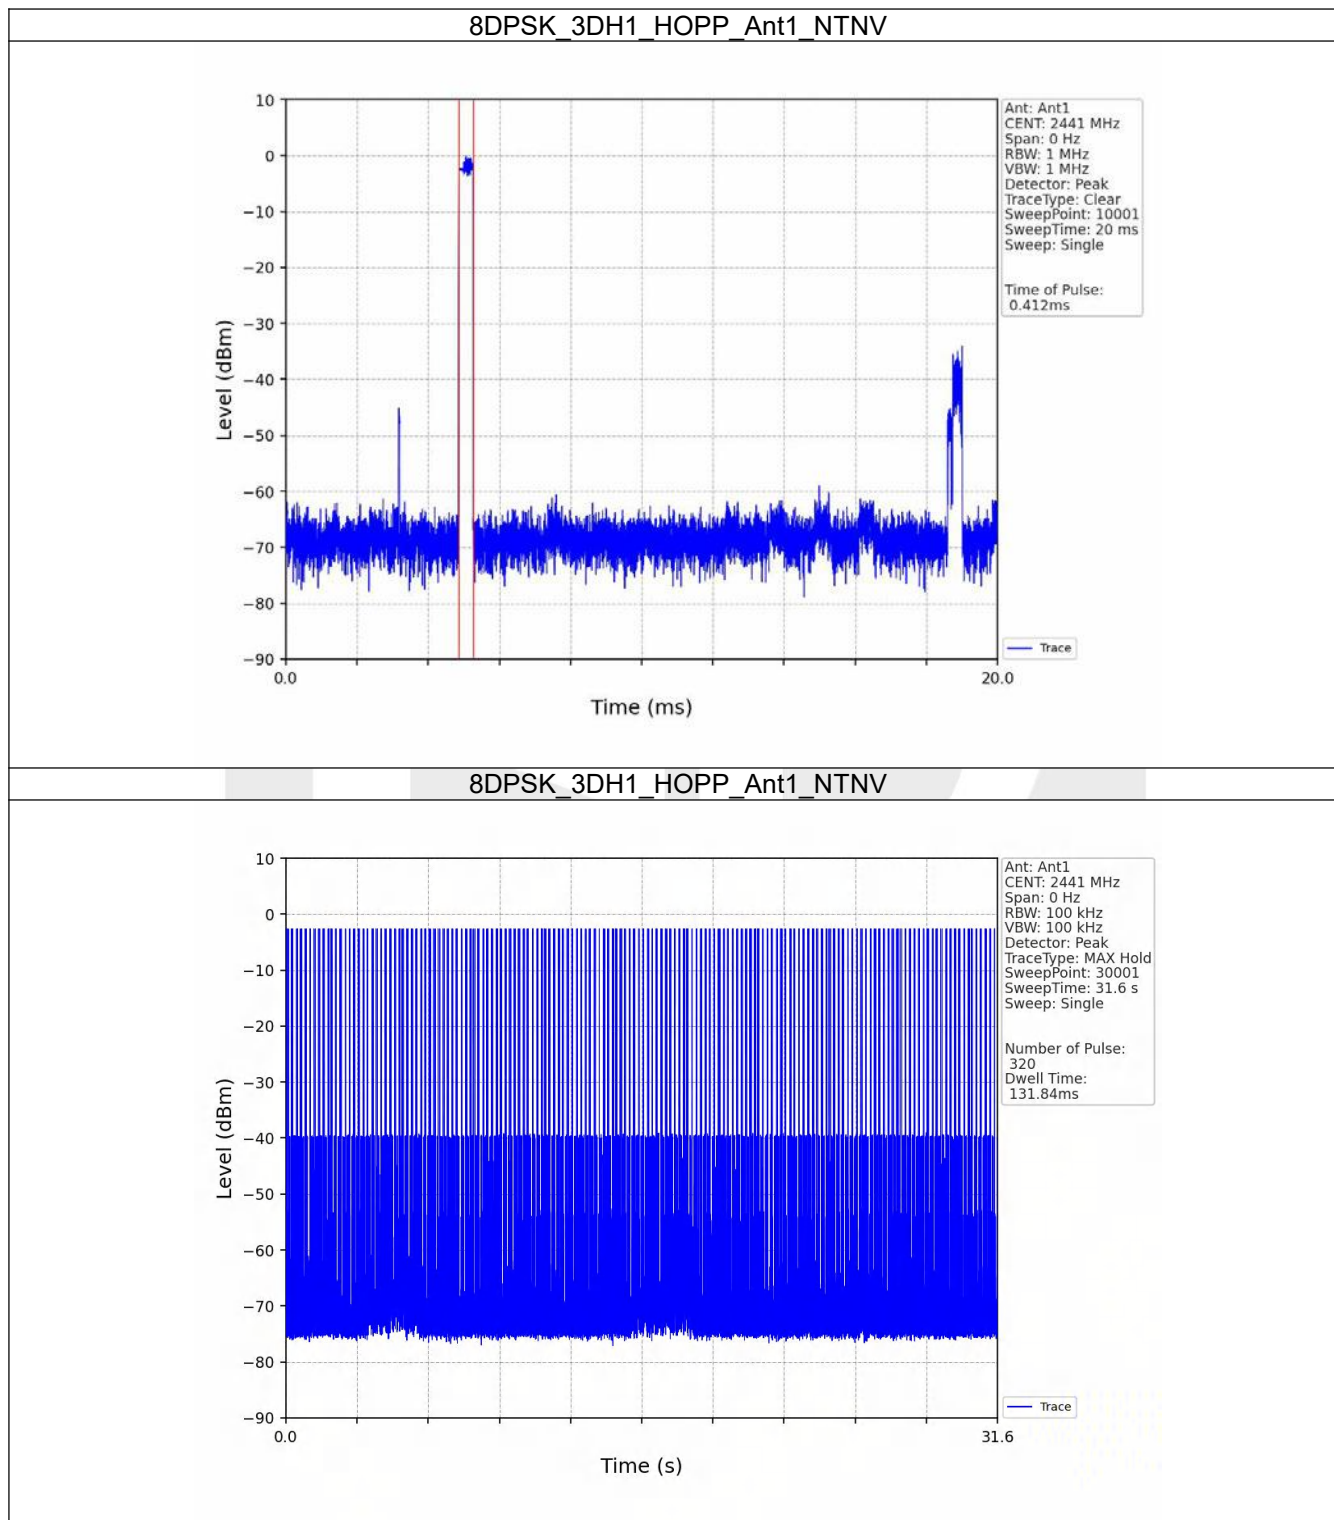



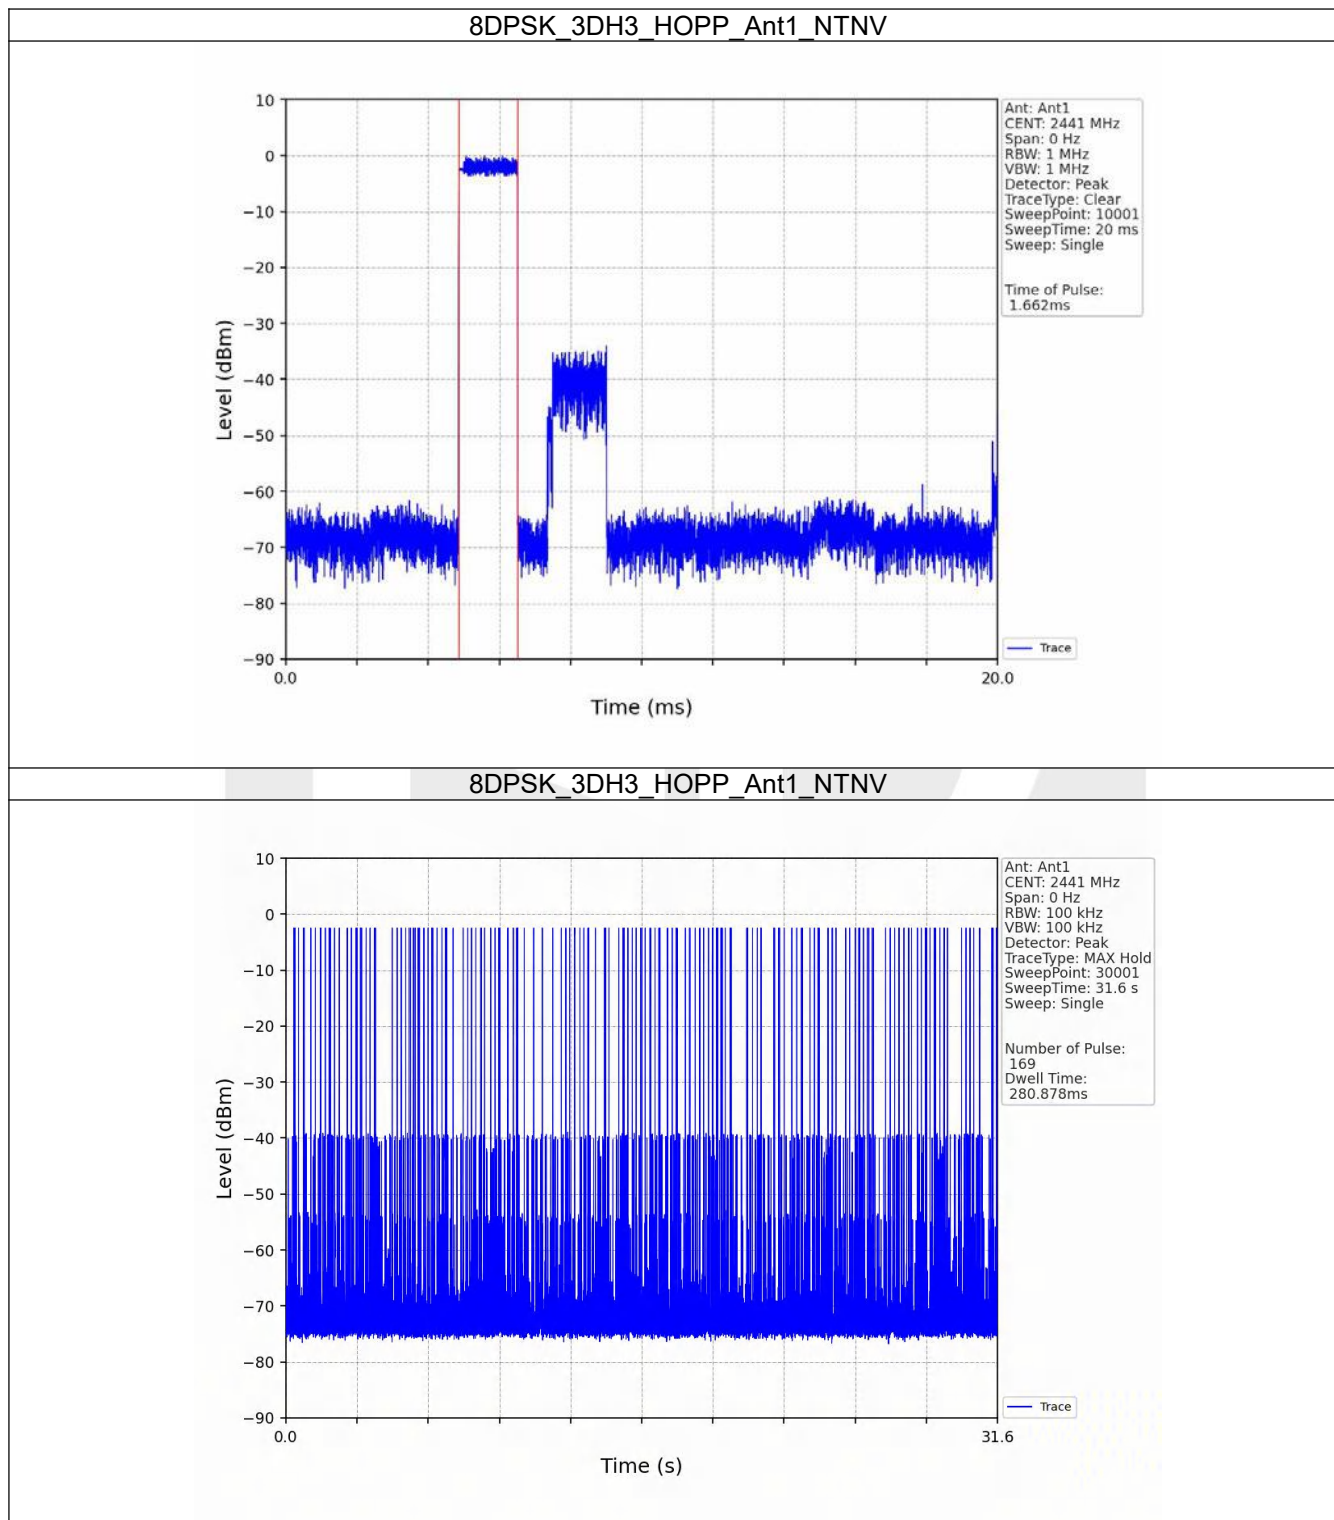



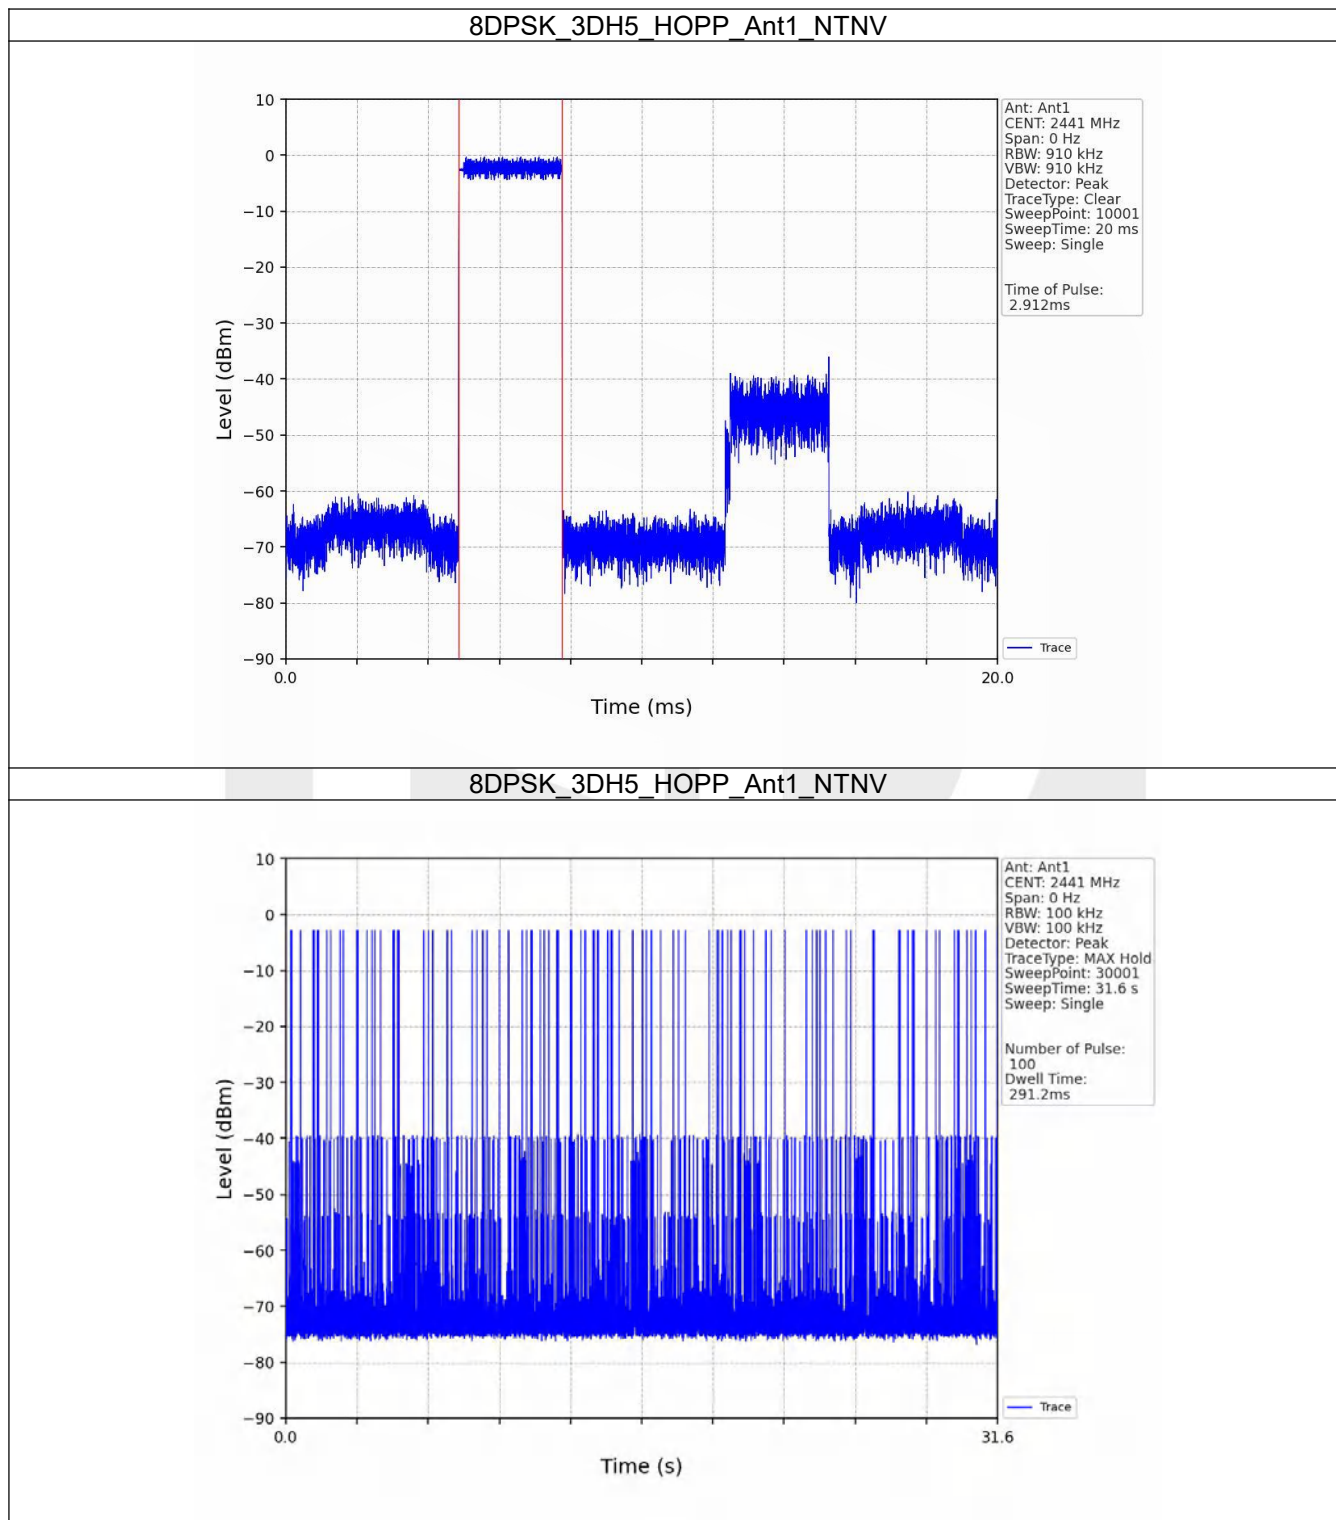

## 7. Unwanted Emissions In Non-restricted Frequency Bands

### 7.1 Test Result

#### 7.1.1 Ref

| Mode          | TX Type | Frequency (MHz) | Packet Type | ANT | Level of Reference (dBm) |
|---------------|---------|-----------------|-------------|-----|--------------------------|
| GFSK          | SISO    | 2402            | DH5         | 1   | -1.22                    |
|               |         | 2441            | DH5         | 1   | -2.52                    |
|               |         | 2480            | DH5         | 1   | -4.24                    |
|               |         | HOPP            | DH5         | 1   | -1.36                    |
|               |         |                 |             |     | -1.36                    |
| $\pi/4$ DQPSK | SISO    | 2402            | 2DH5        | 1   | -1.24                    |
|               |         | 2441            | 2DH5        | 1   | -2.53                    |
|               |         | 2480            | 2DH5        | 1   | -4.13                    |
|               |         | HOPP            | 2DH5        | 1   | -1.55                    |
|               |         |                 |             |     | -1.55                    |
| 8DPSK         | SISO    | 2402            | 3DH5        | 1   | -1.38                    |
|               |         | 2441            | 3DH5        | 1   | -2.68                    |
|               |         | 2480            | 3DH5        | 1   | -4.27                    |
|               |         | HOPP            | 3DH5        | 1   | -1.50                    |
|               |         |                 |             |     | -1.50                    |

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.


#### 7.1.2 CSE


| Mode          | TX Type | Frequency (MHz) | Packet Type | ANT | Level of Reference (dBm) | Limit (dBm) | Verdict |
|---------------|---------|-----------------|-------------|-----|--------------------------|-------------|---------|
| GFSK          | SISO    | 2402            | DH5         | 1   | -1.22                    | -21.22      | Pass    |
|               |         | 2441            | DH5         | 1   | -2.52                    | -22.52      | Pass    |
|               |         | 2480            | DH5         | 1   | -4.24                    | -24.24      | Pass    |
|               |         | HOPP            | DH5         | 1   | -1.36                    | -21.36      | Pass    |
|               |         |                 |             |     | -1.36                    | -21.36      | Pass    |
| $\pi/4$ DQPSK | SISO    | 2402            | 2DH5        | 1   | -1.24                    | -21.24      | Pass    |
|               |         | 2441            | 2DH5        | 1   | -2.53                    | -22.53      | Pass    |
|               |         | 2480            | 2DH5        | 1   | -4.13                    | -24.13      | Pass    |
|               |         | HOPP            | 2DH5        | 1   | -1.55                    | -21.55      | Pass    |
|               |         |                 |             |     | -1.55                    | -21.55      | Pass    |
| 8DPSK         | SISO    | 2402            | 3DH5        | 1   | -1.38                    | -21.38      | Pass    |
|               |         | 2441            | 3DH5        | 1   | -2.68                    | -22.68      | Pass    |
|               |         | 2480            | 3DH5        | 1   | -4.27                    | -24.27      | Pass    |
|               |         | HOPP            | 3DH5        | 1   | -1.50                    | -21.50      | Pass    |
|               |         |                 |             |     | -1.50                    | -21.50      | Pass    |


Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.

## 7.2 Test Graph

### 7.2.1 Ref

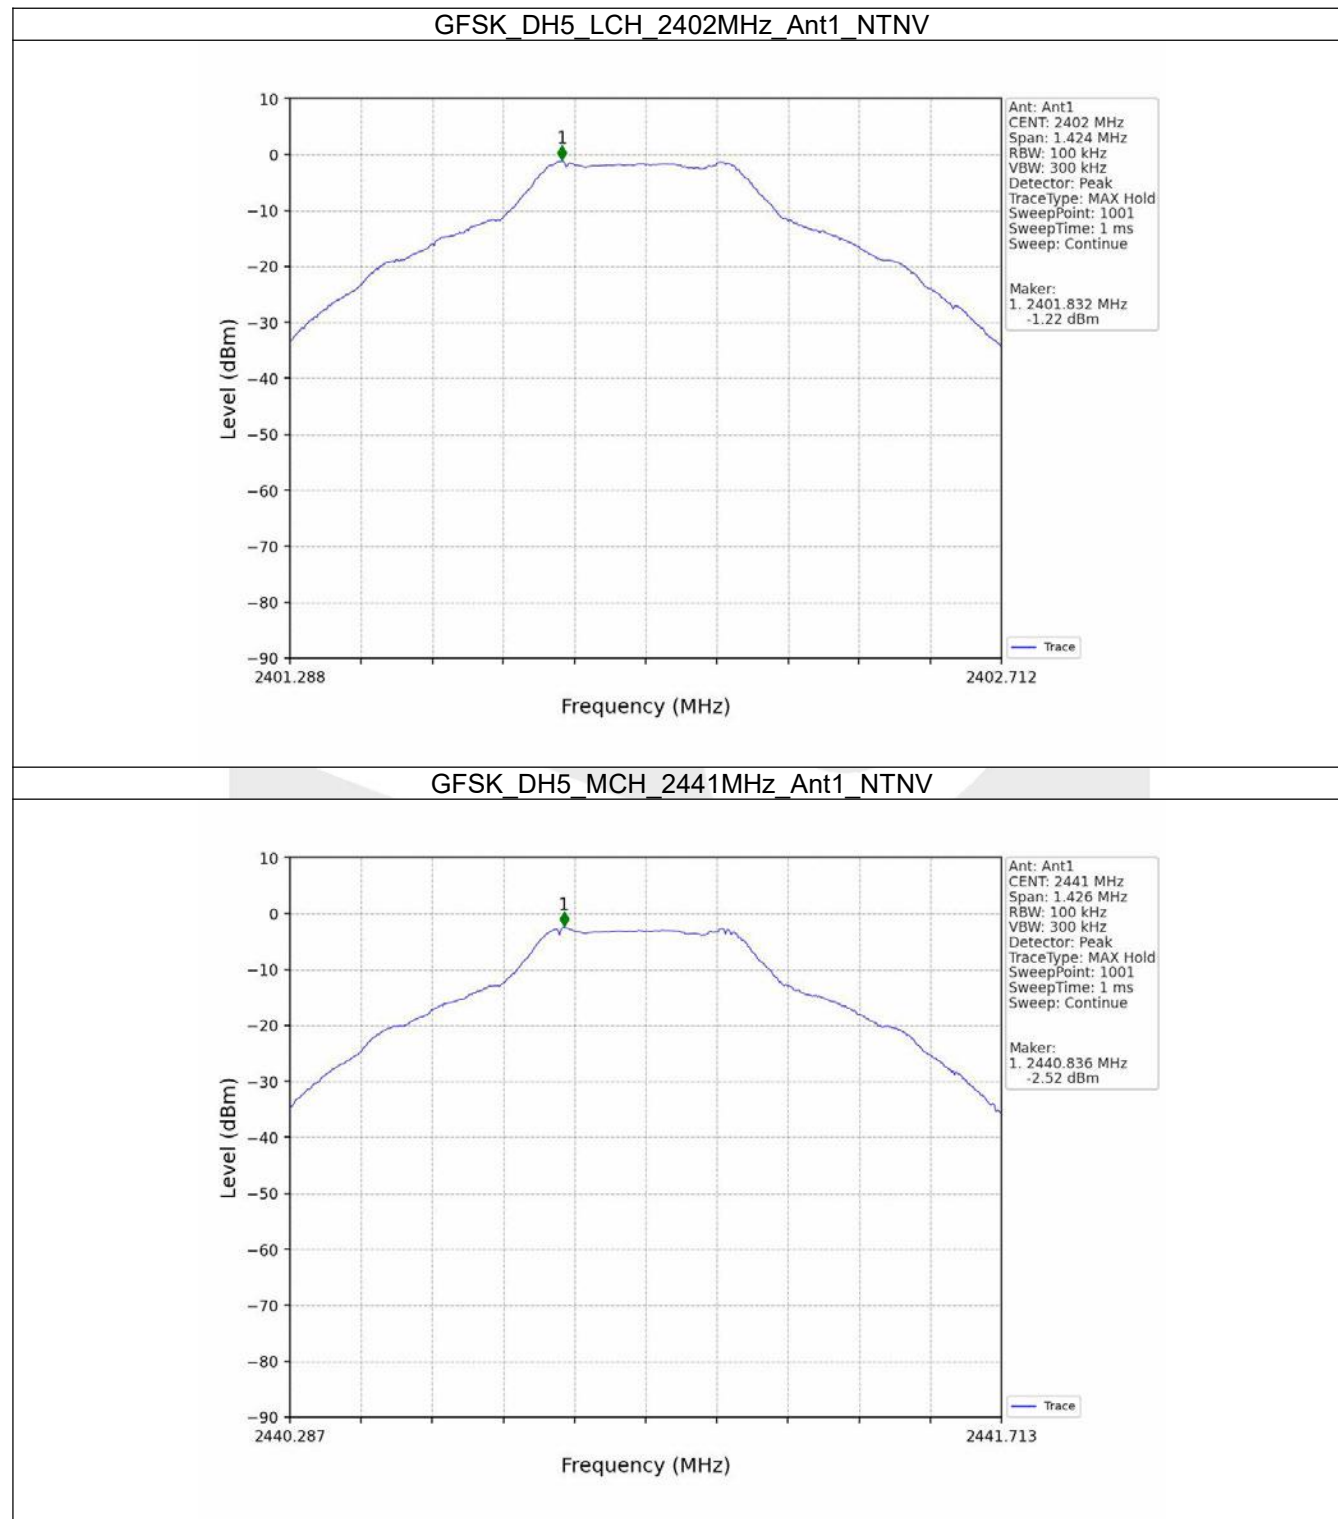


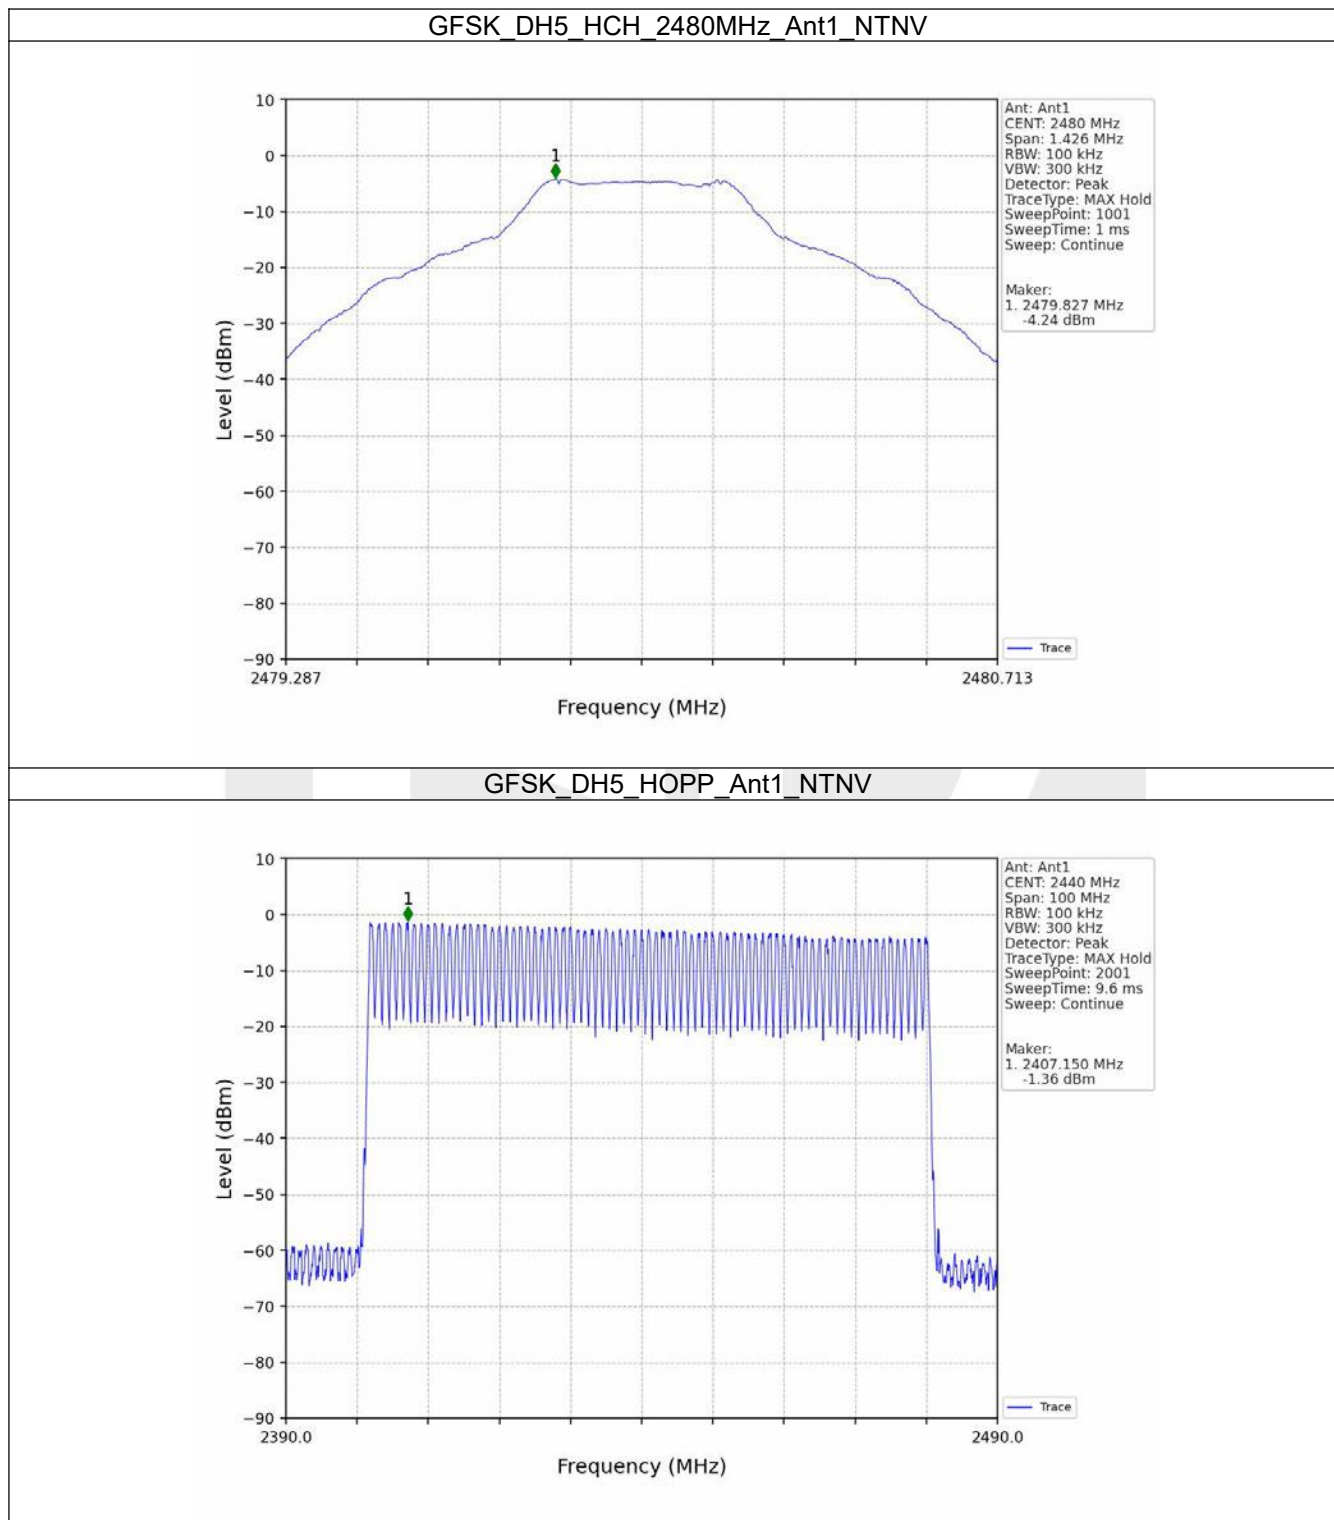

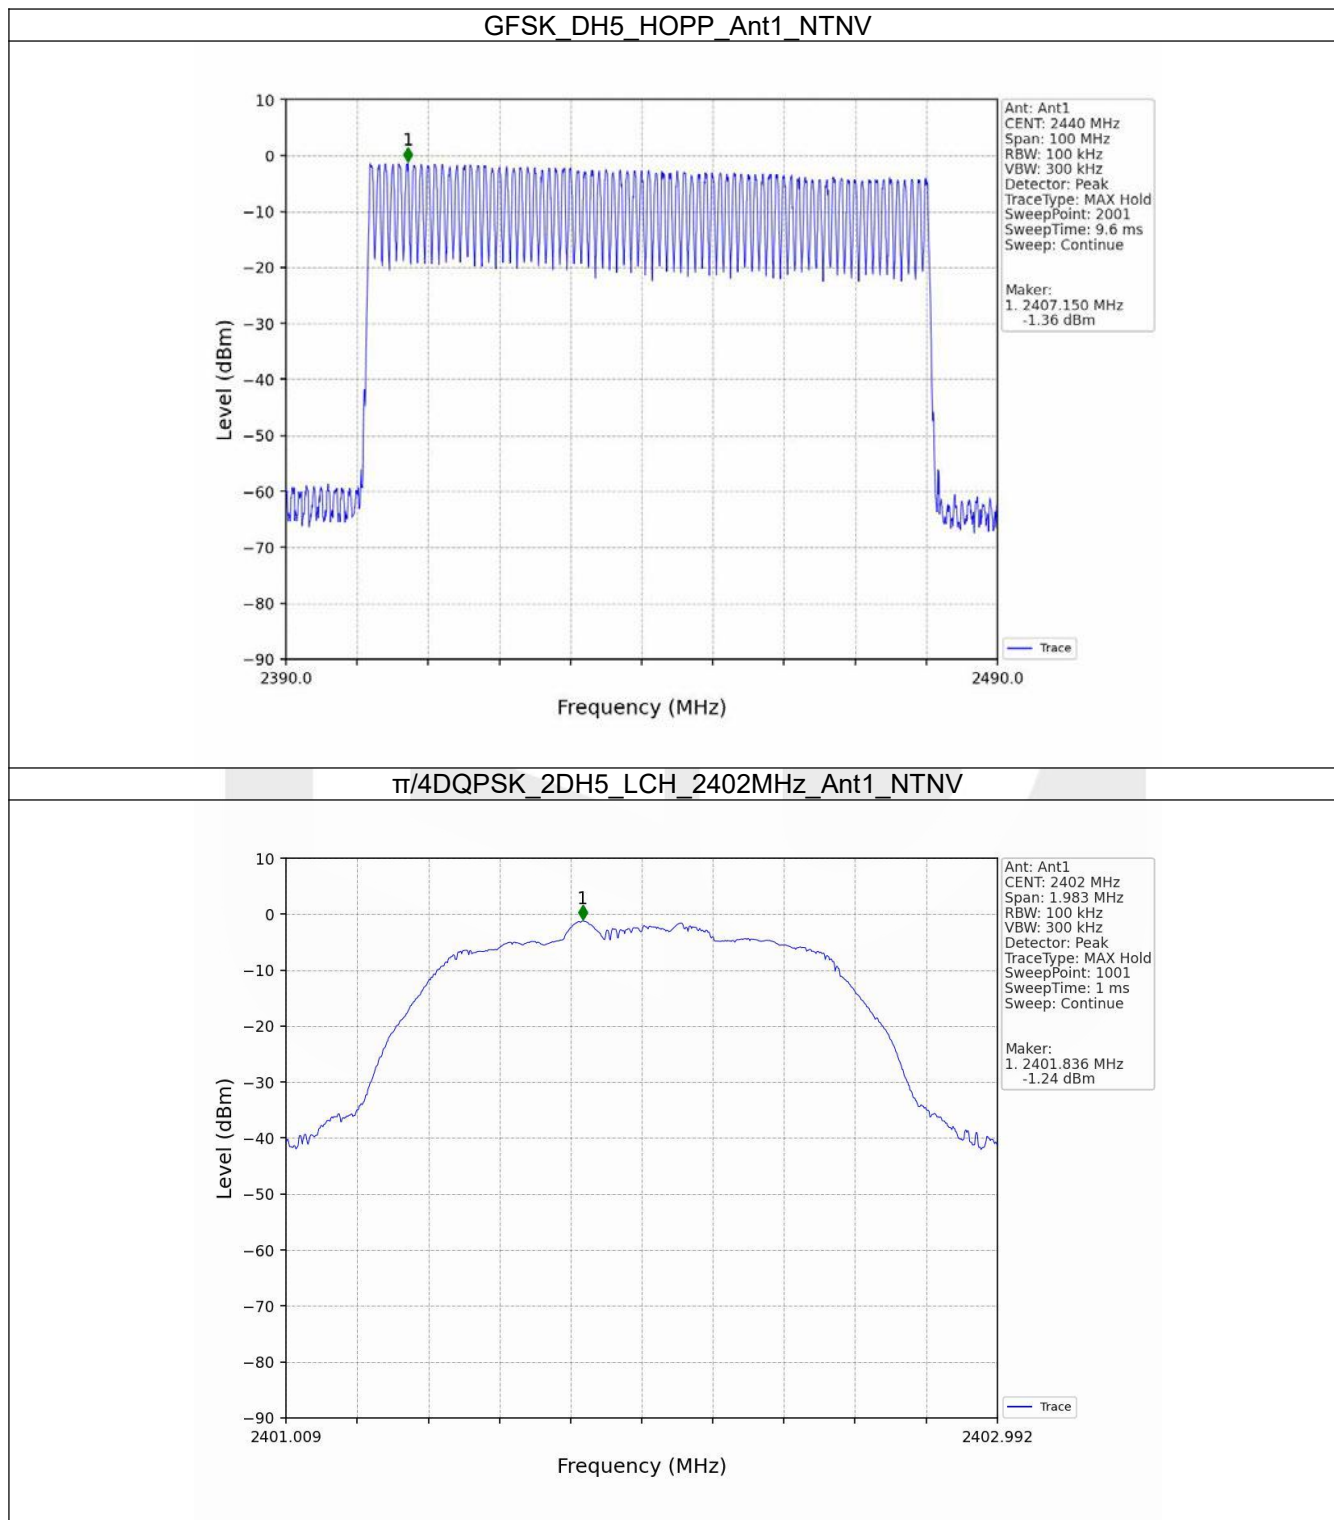





$\pi/4$ DQPSK\_2DH5\_MCH\_2441MHz\_Ant1\_NTNV

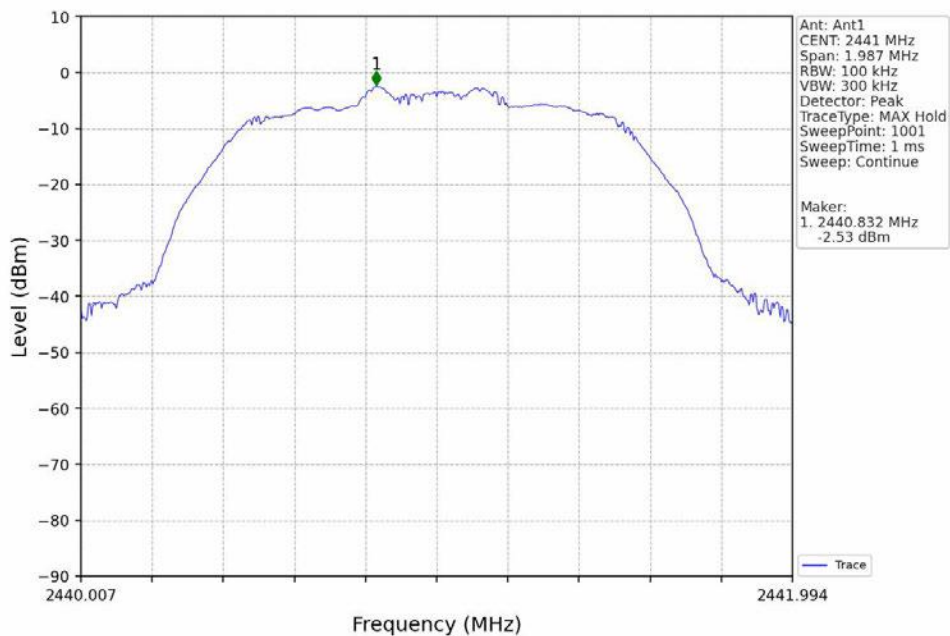


$\pi/4$ DQPSK\_2DH5\_HCH\_2480MHz\_Ant1\_NTNV

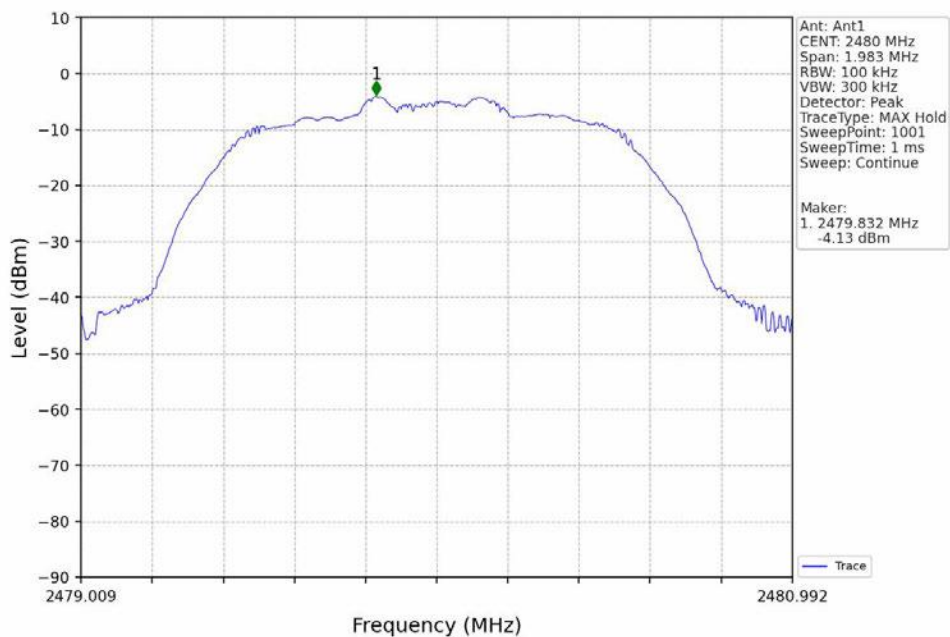


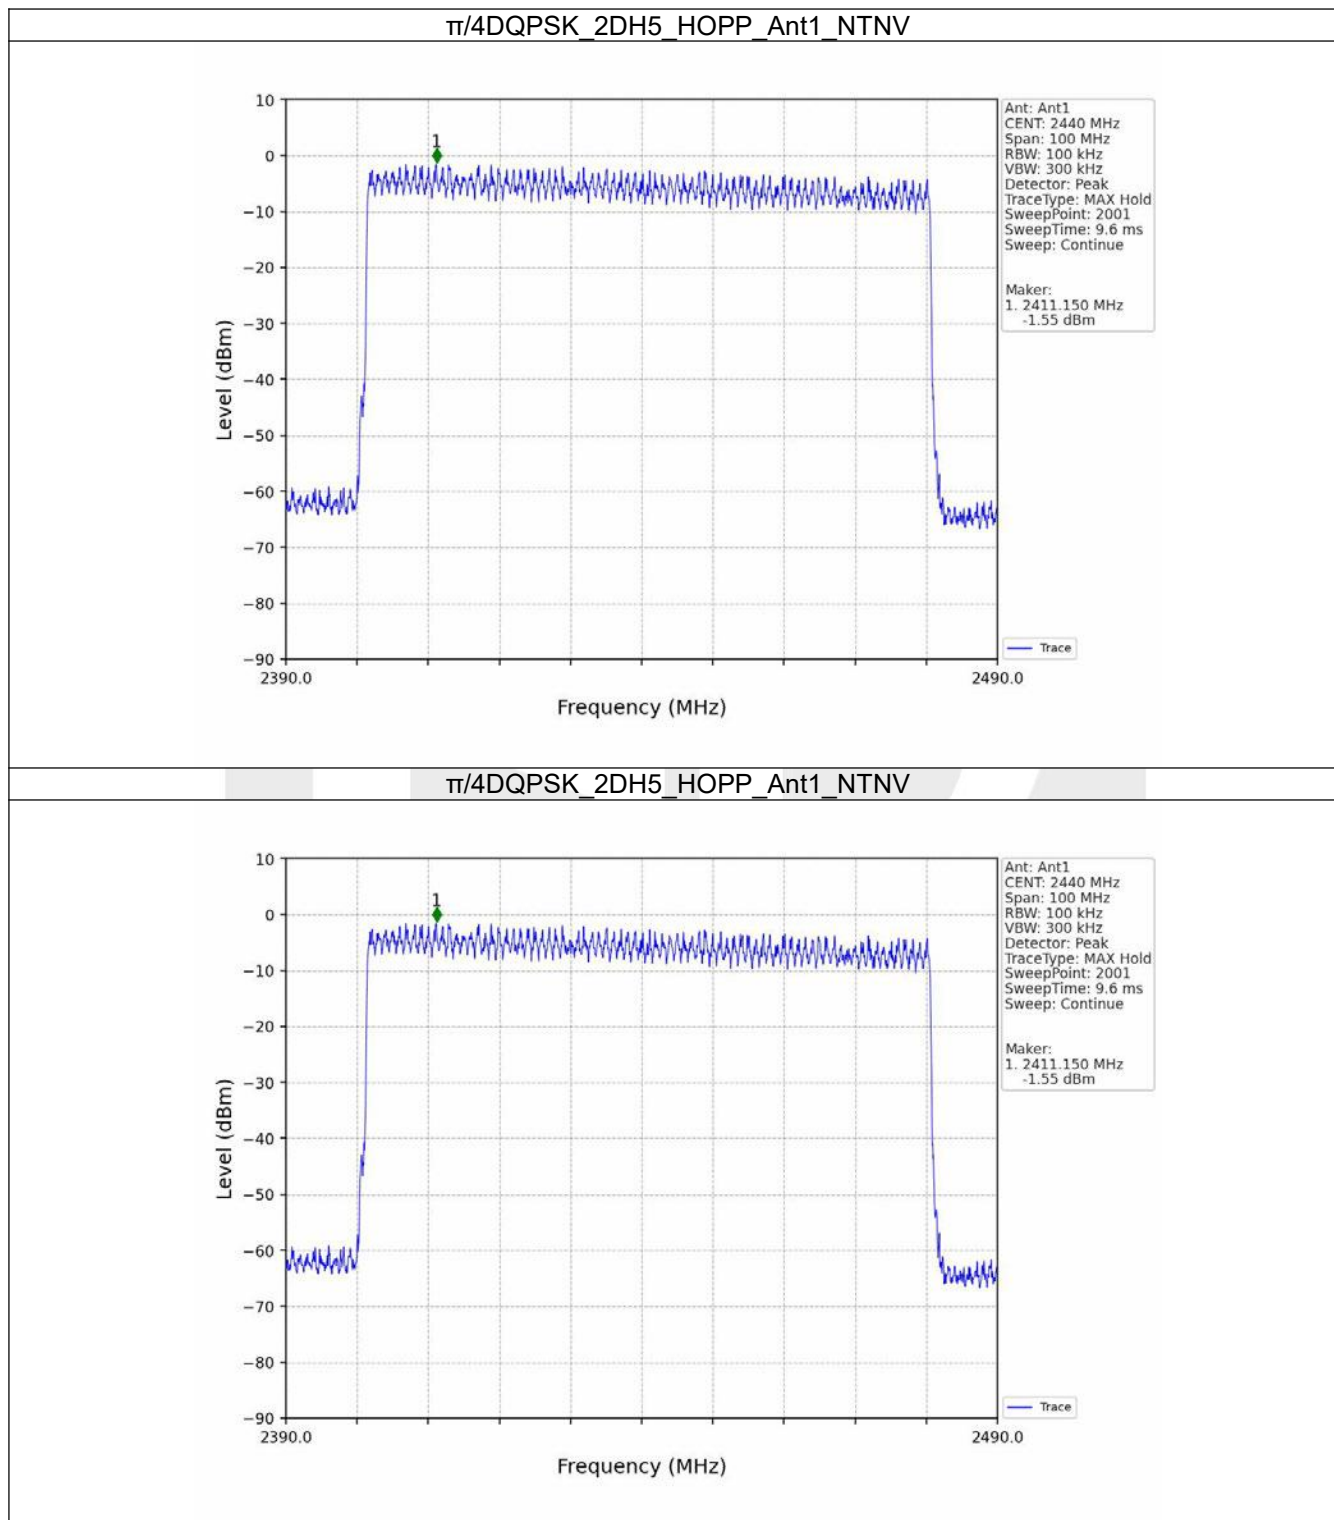


8DPSK\_3DH5\_LCH\_2402MHz\_Ant1\_NTNV

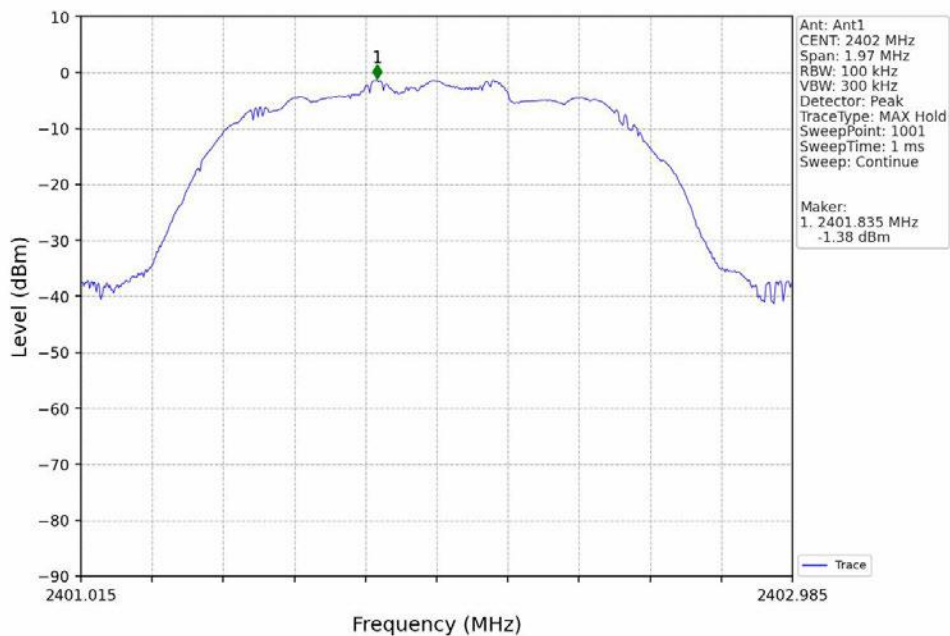


8DPSK\_3DH5\_MCH\_2441MHz\_Ant1\_NTNV

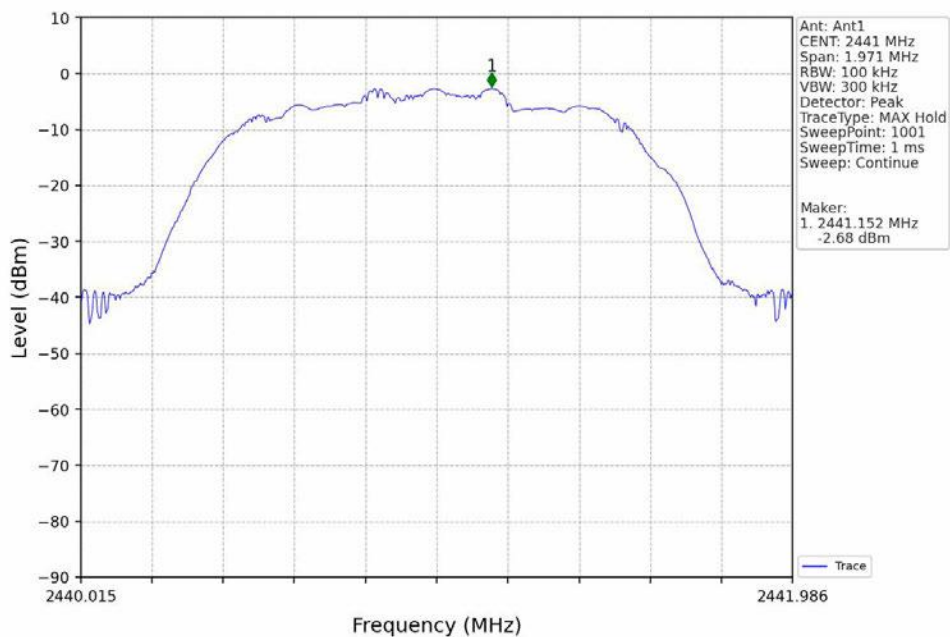


8DPSK\_3DH5\_HCH\_2480MHz\_Ant1\_NTNV

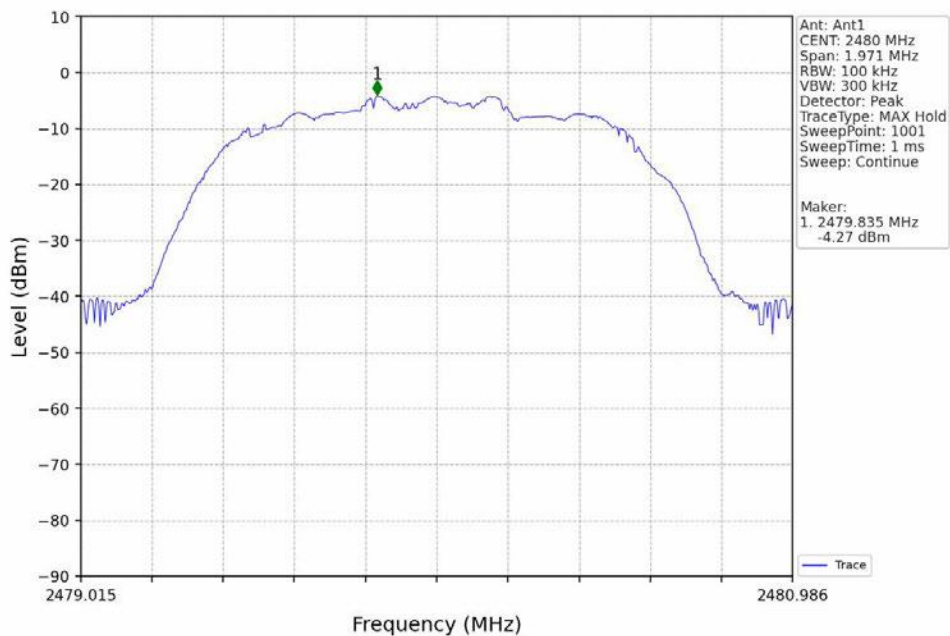


8DPSK\_3DH5\_HOPP\_Ant1\_NTNV

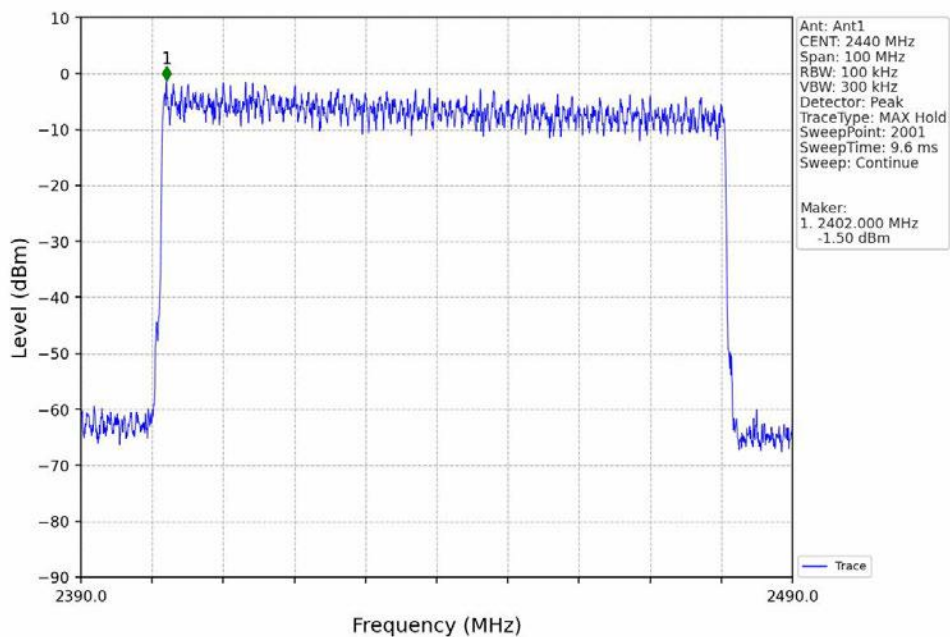

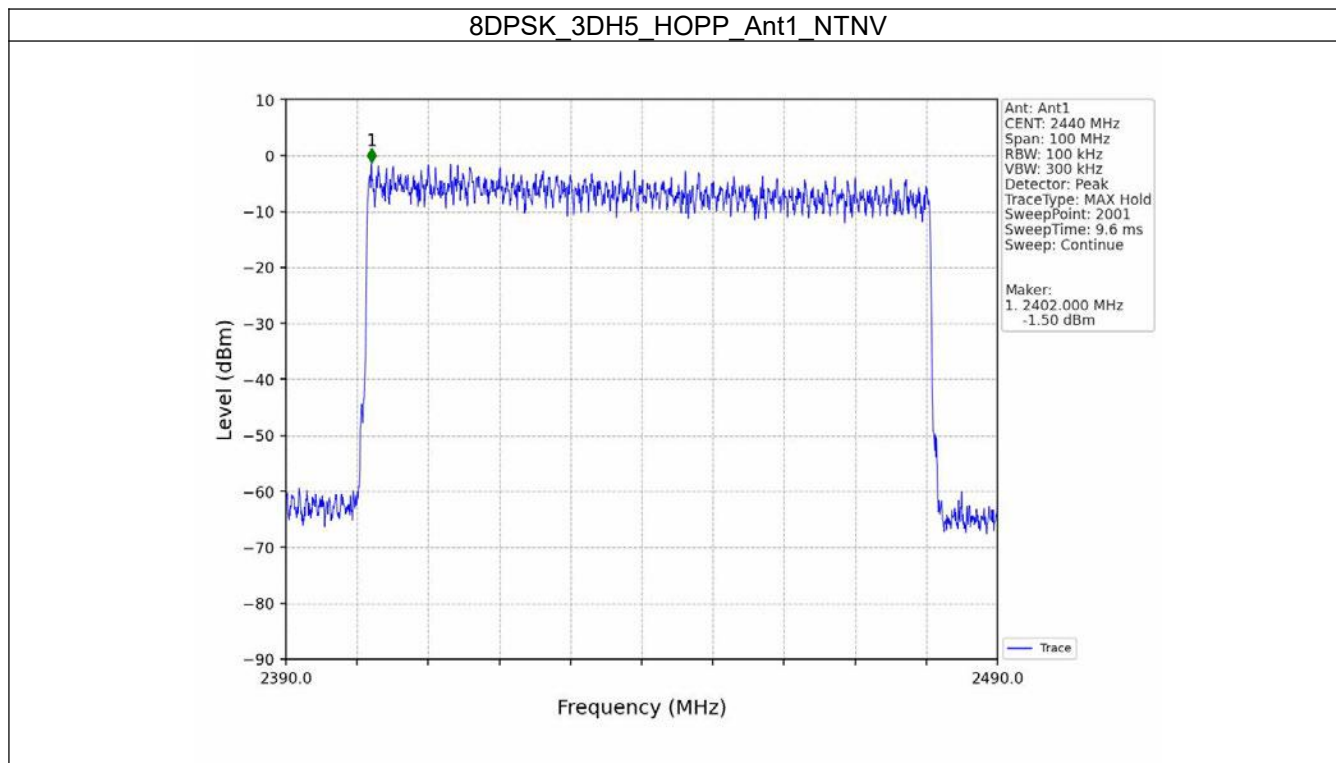





## 7.2.2 CSE

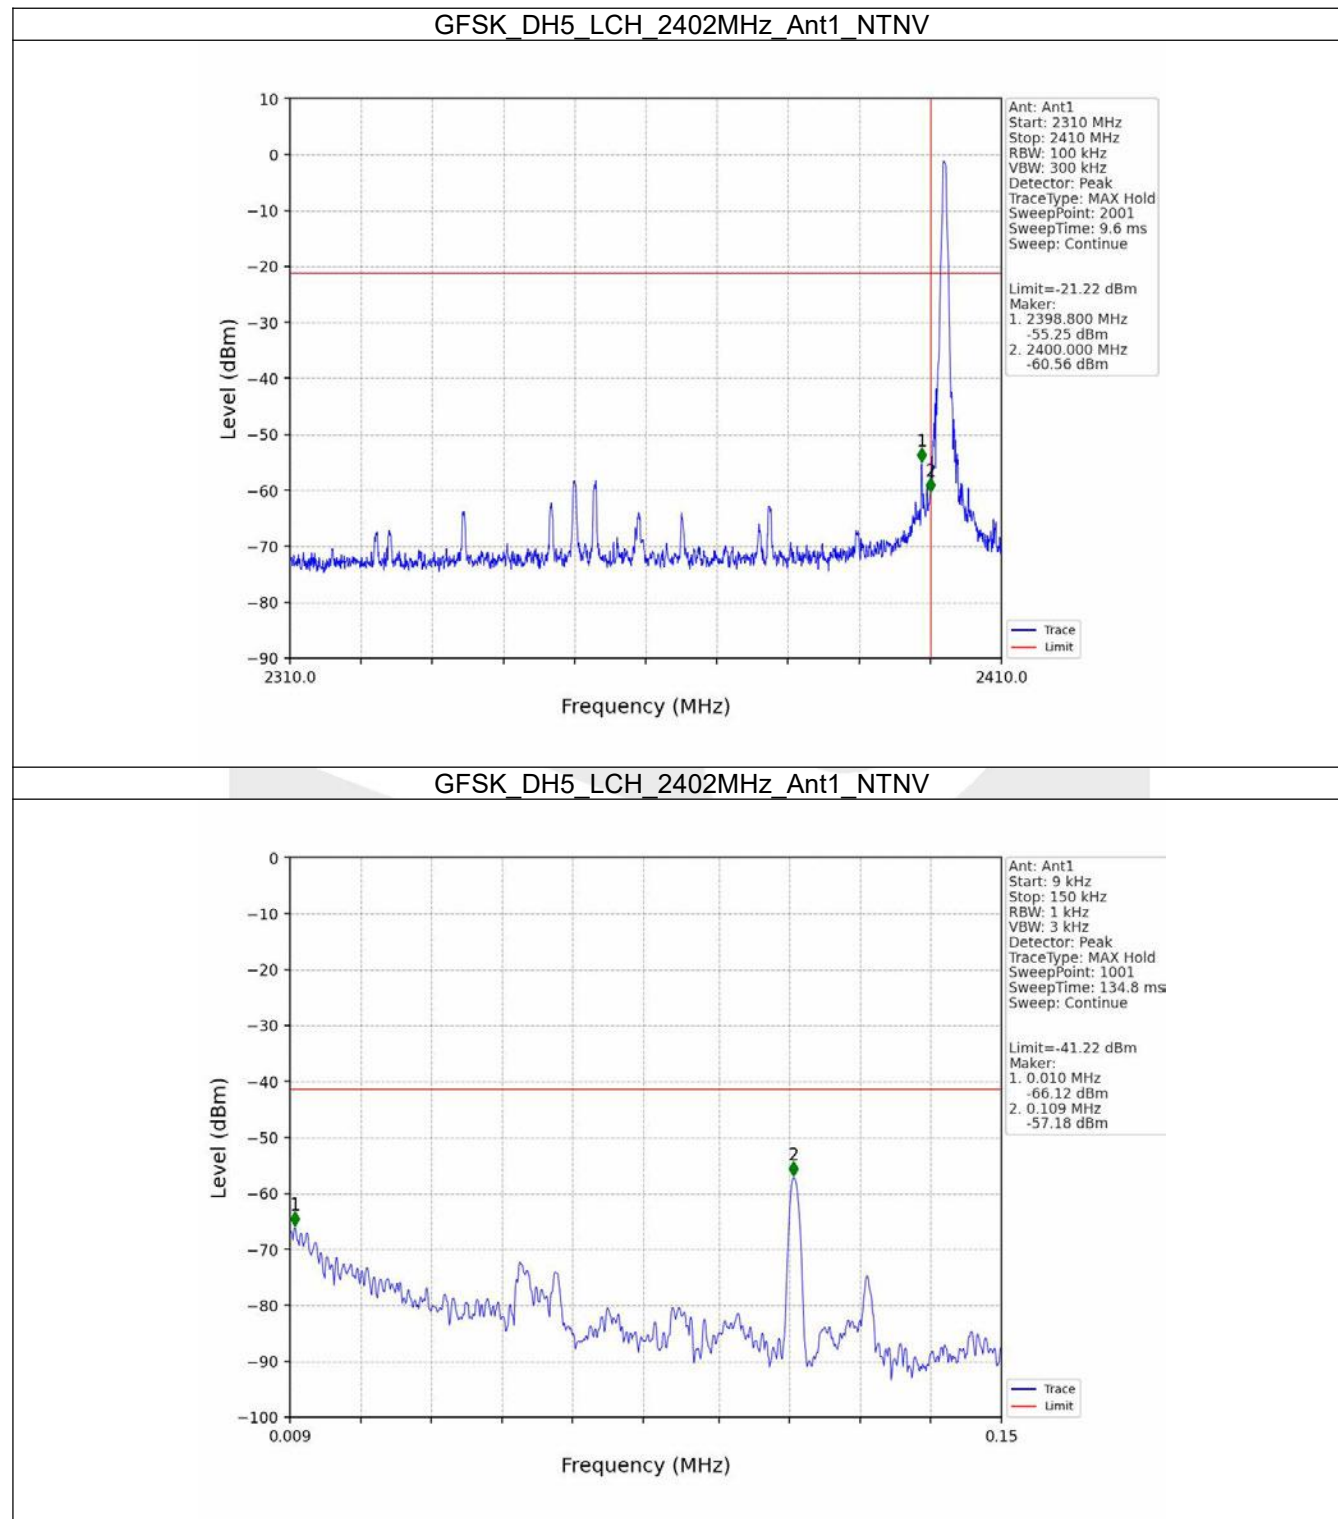


GFSK\_DH5\_LCH\_2402MHz\_Ant1\_NTNV

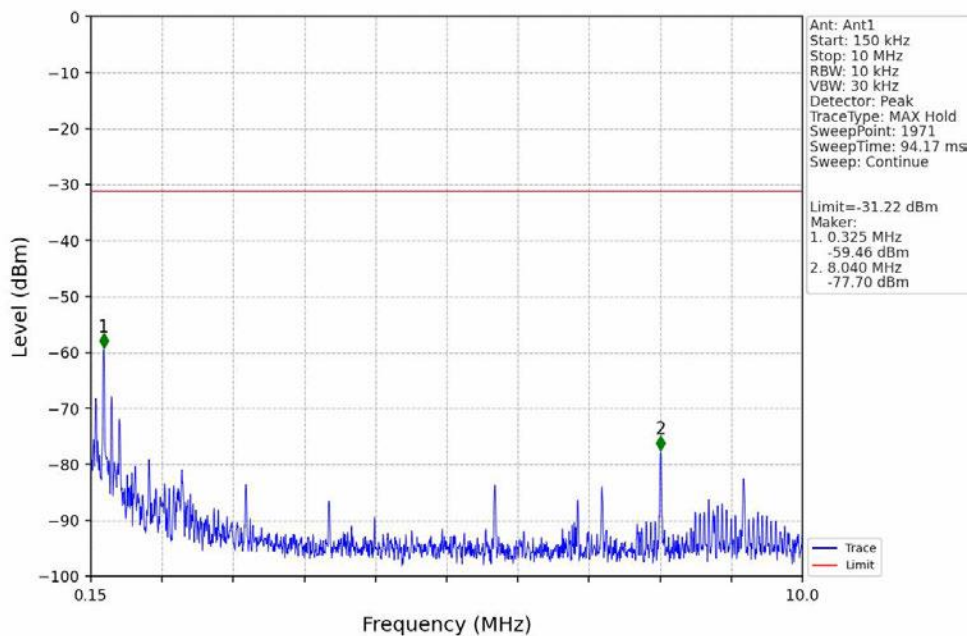


GFSK\_DH5\_LCH\_2402MHz\_Ant1\_NTNV

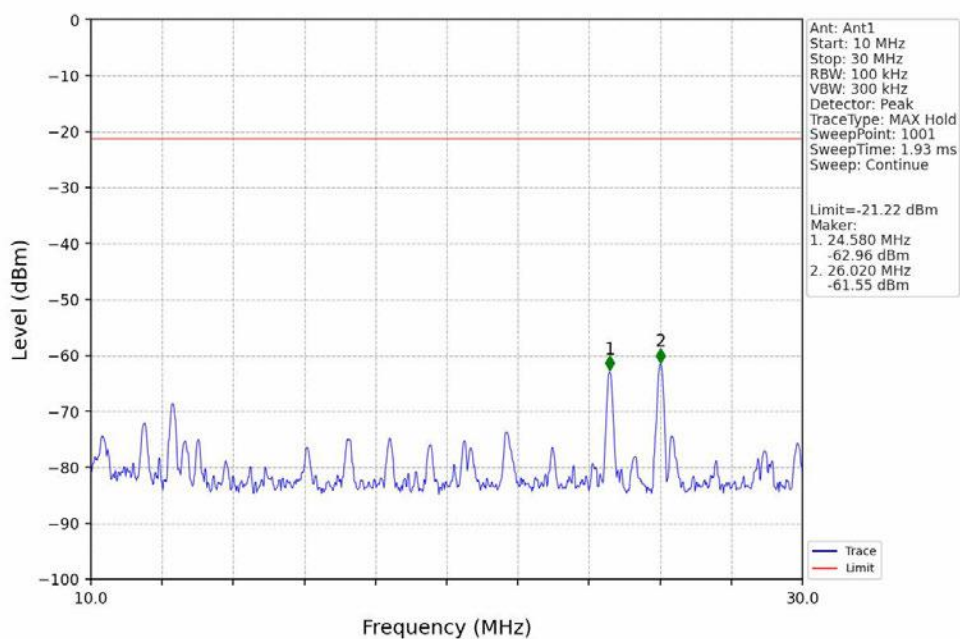


GFSK\_DH5\_LCH\_2402MHz\_Ant1\_NTNV

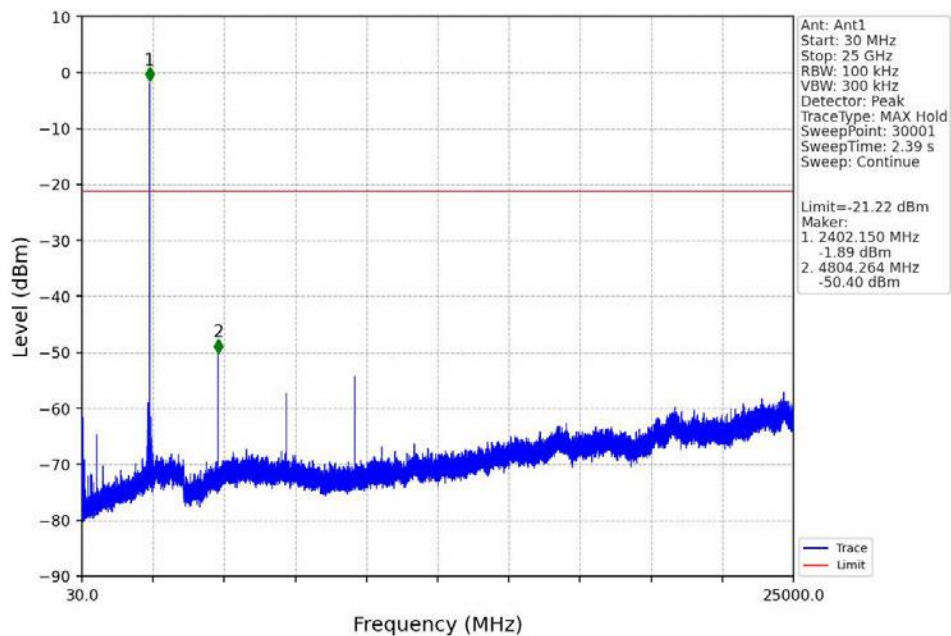


GFSK\_DH5\_MCH\_2441MHz\_Ant1\_NTNV

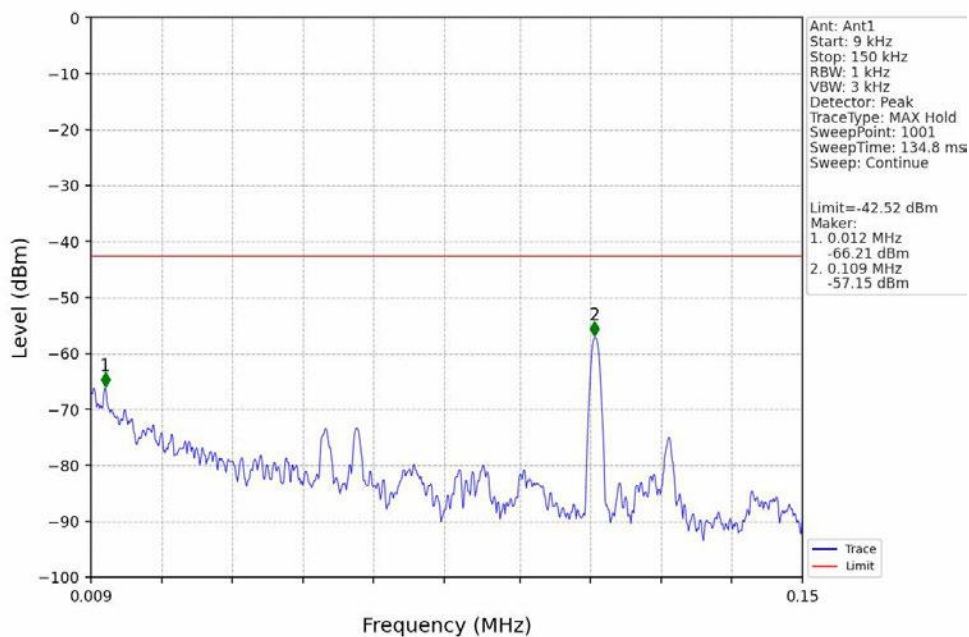

GFSK\_DH5\_MCH\_2441MHz\_Ant1\_NTNV

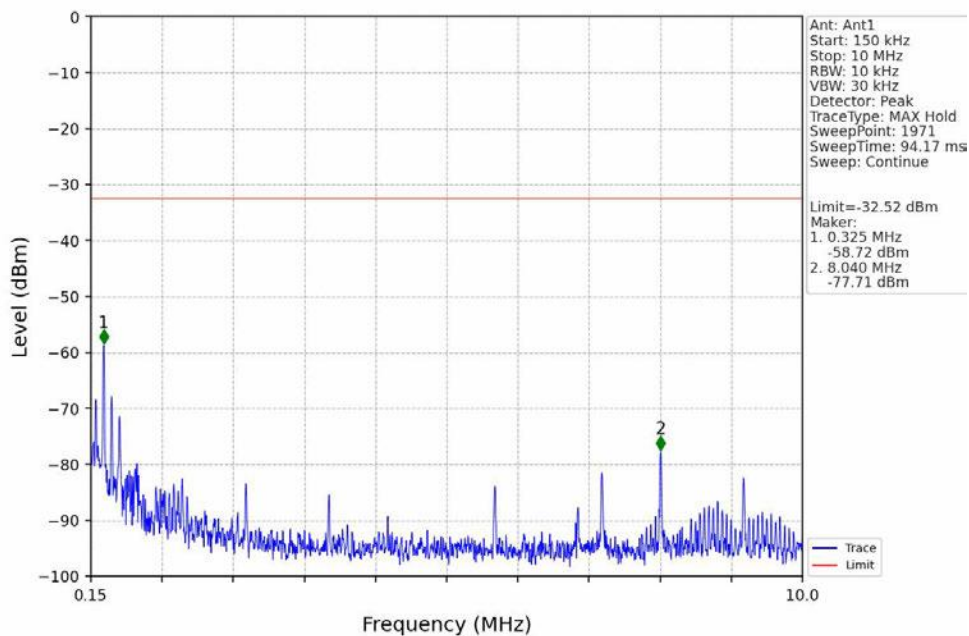


GFSK\_DH5\_MCH\_2441MHz\_Ant1\_NTNV

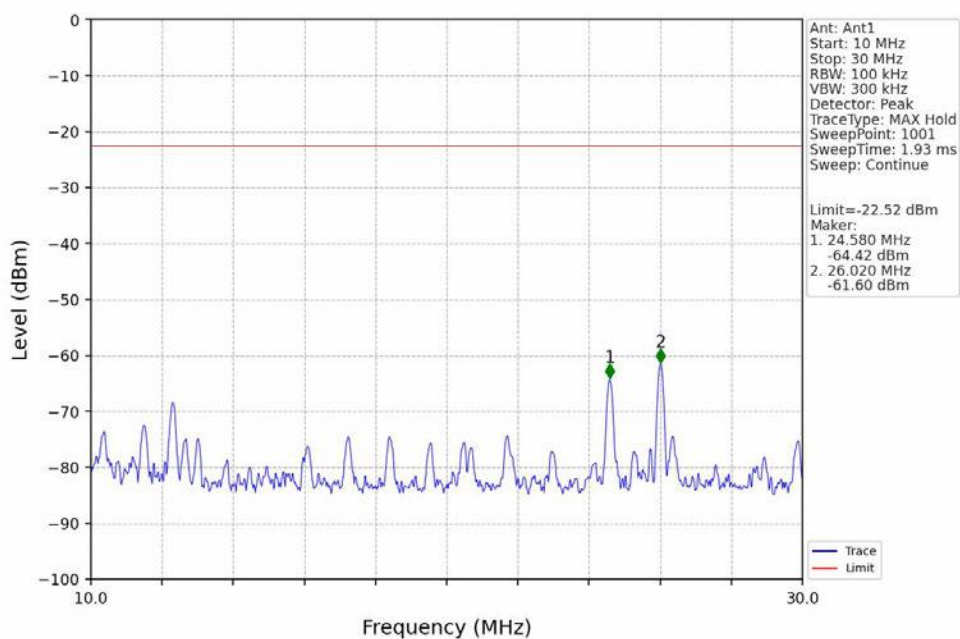





GFSK\_DH5\_MCH\_2441MHz\_Ant1\_NTNV

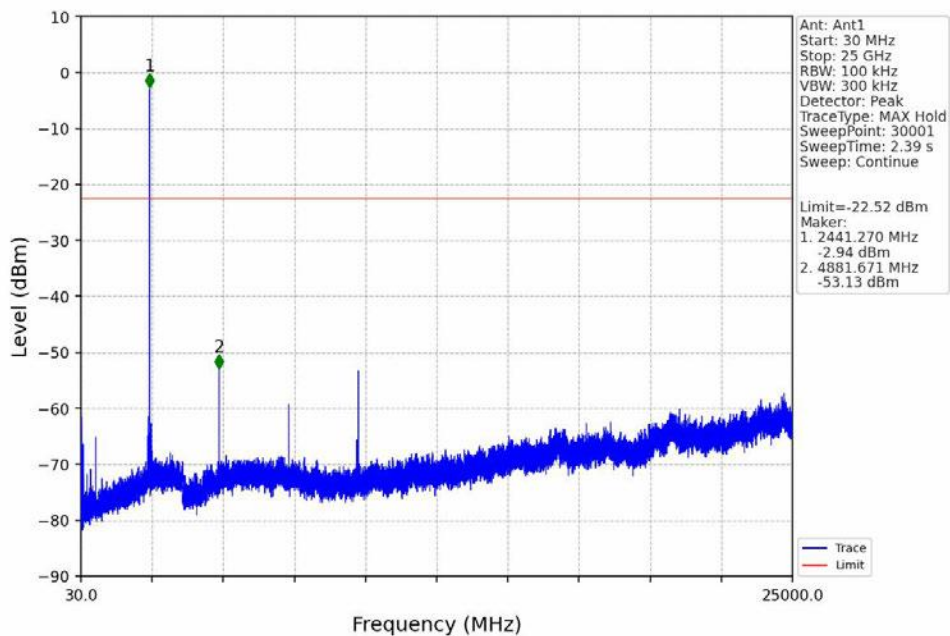



GFSK\_DH5\_HCH\_2480MHz\_Ant1\_NTNV

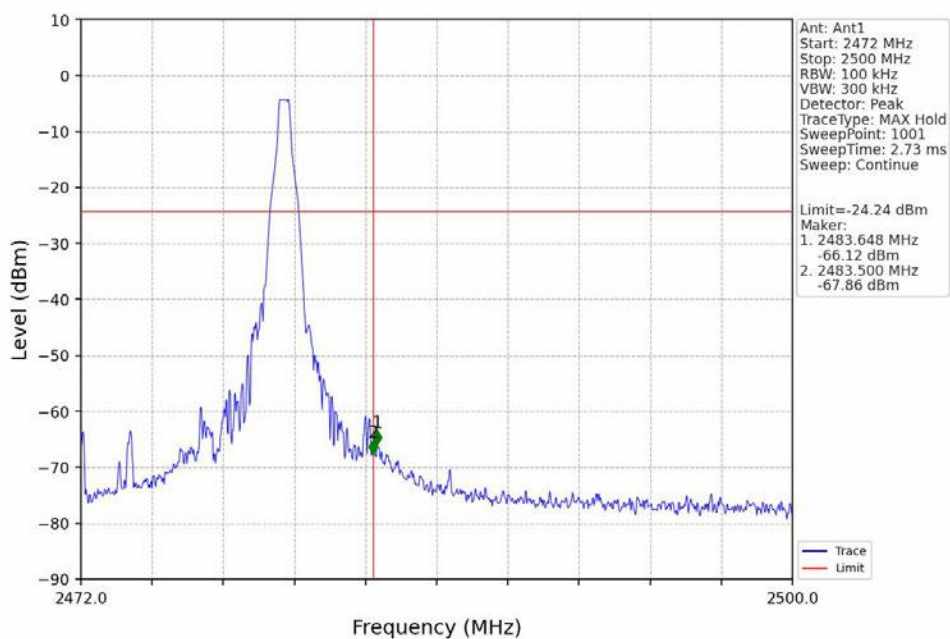




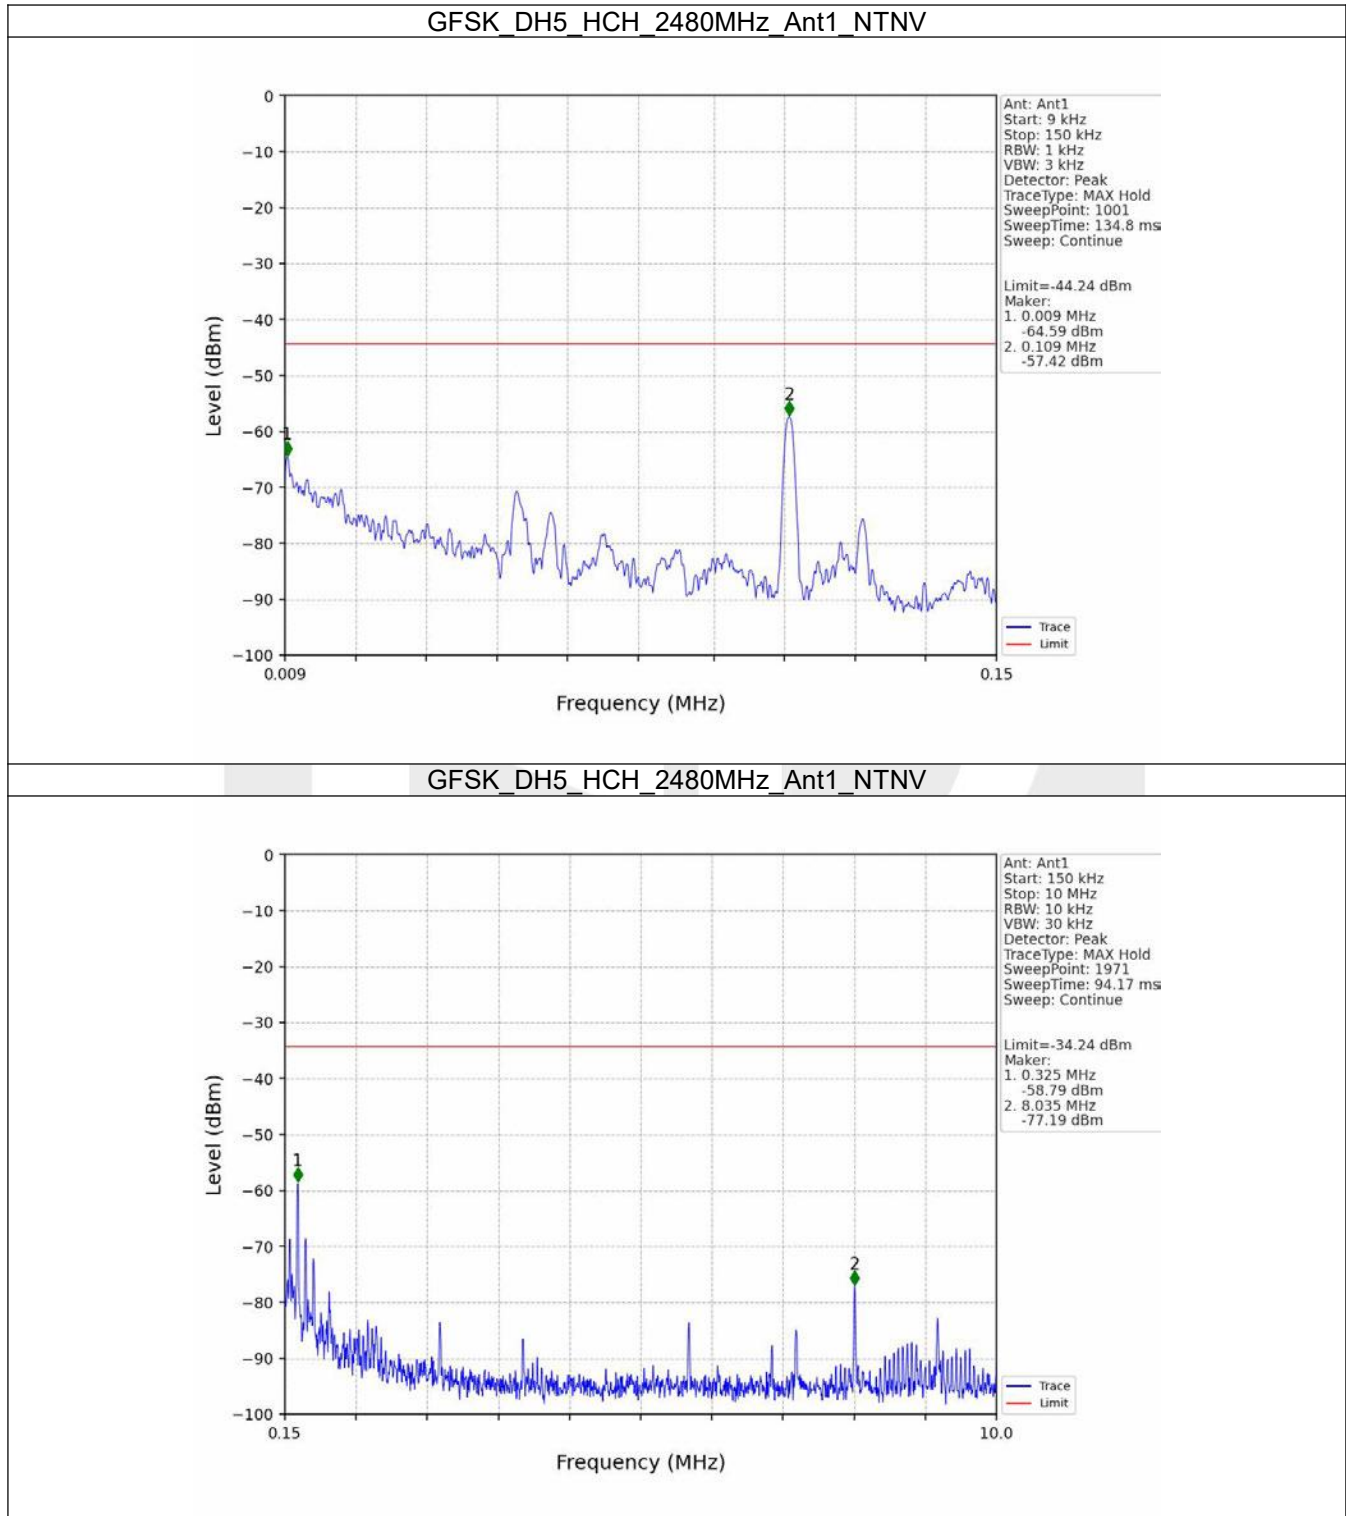


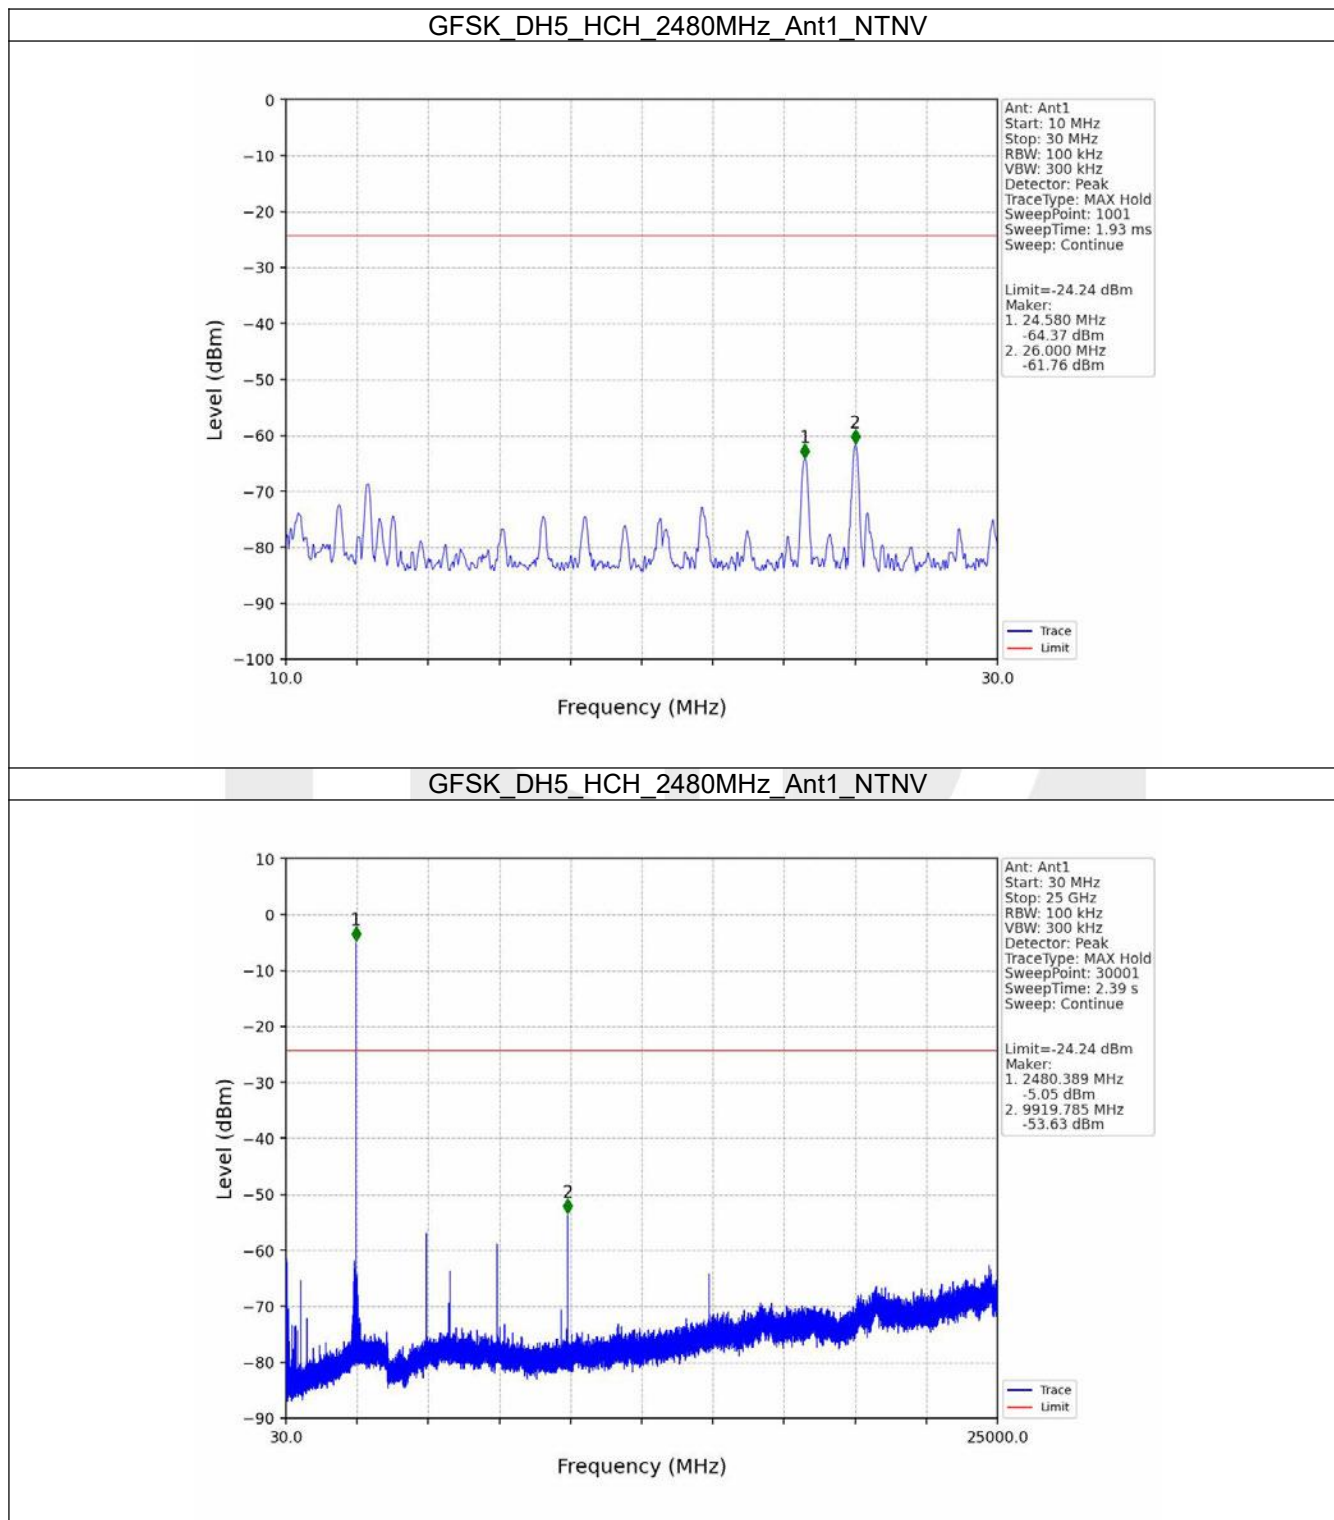

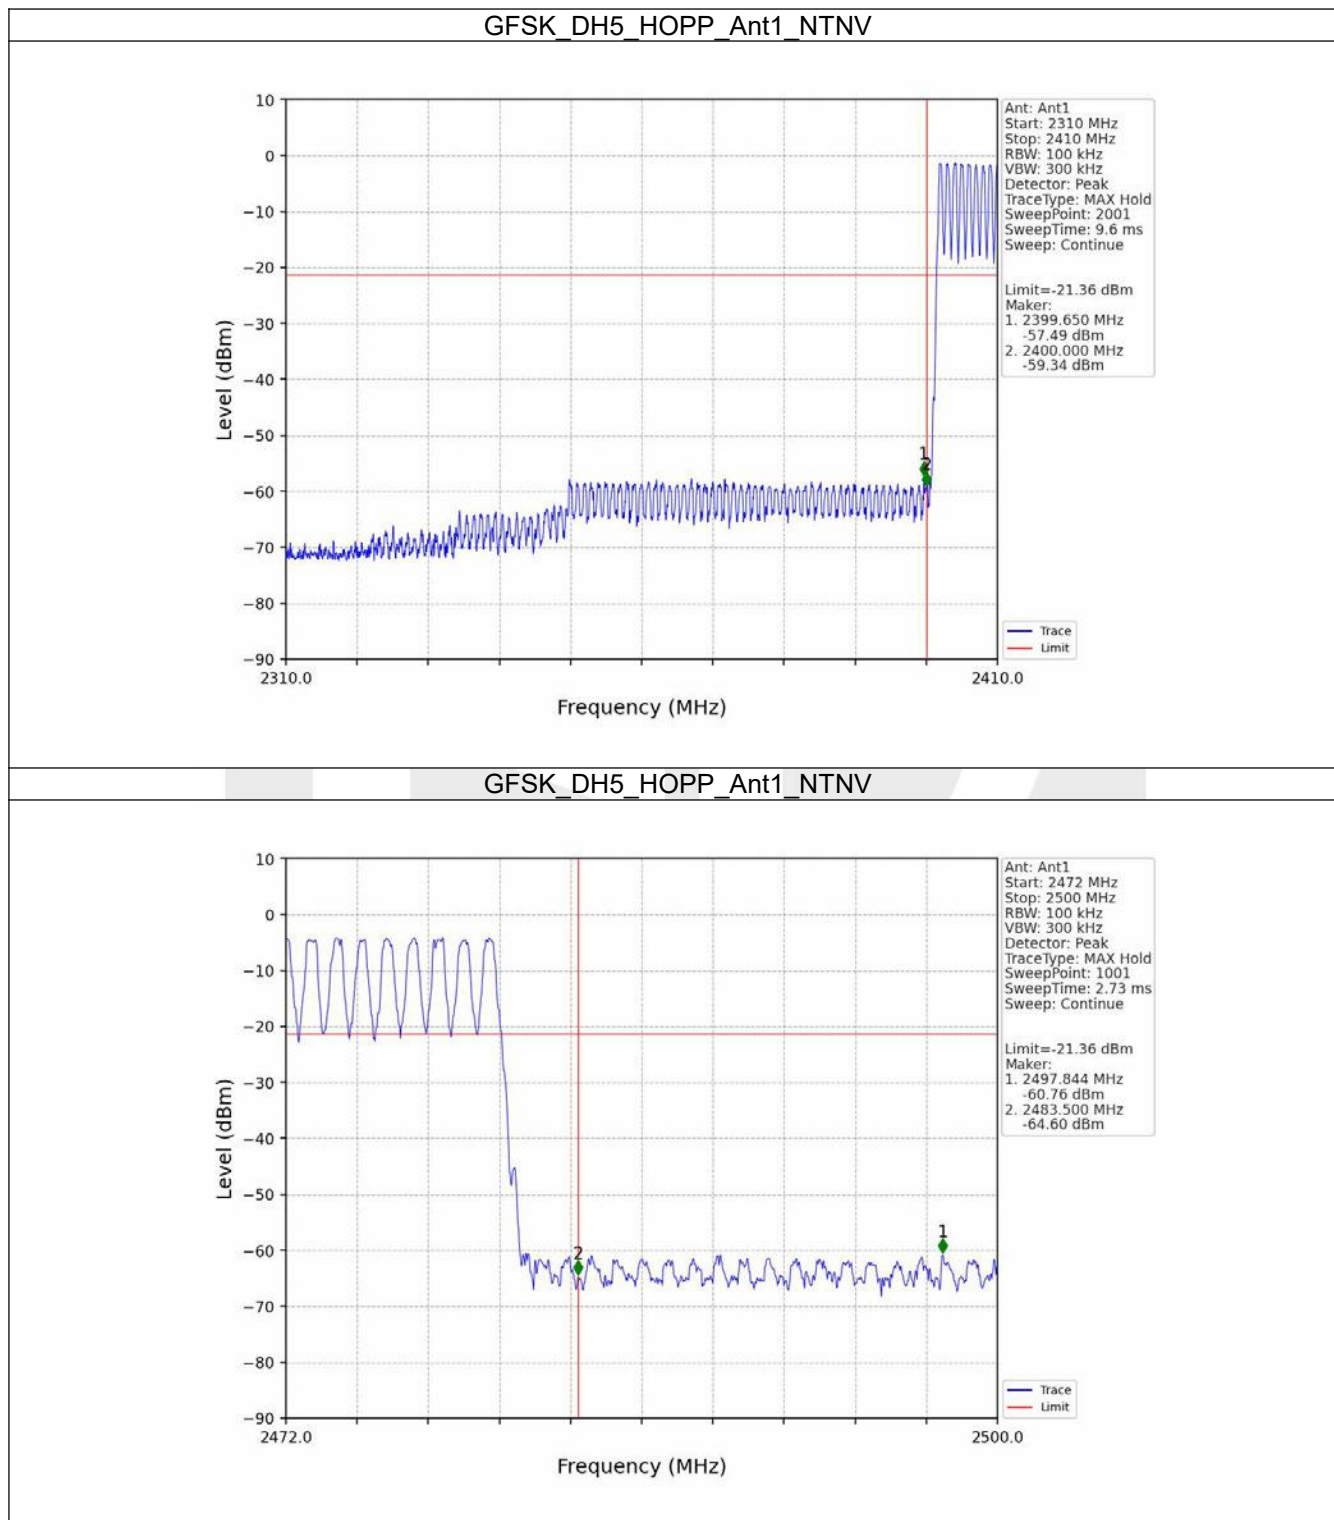


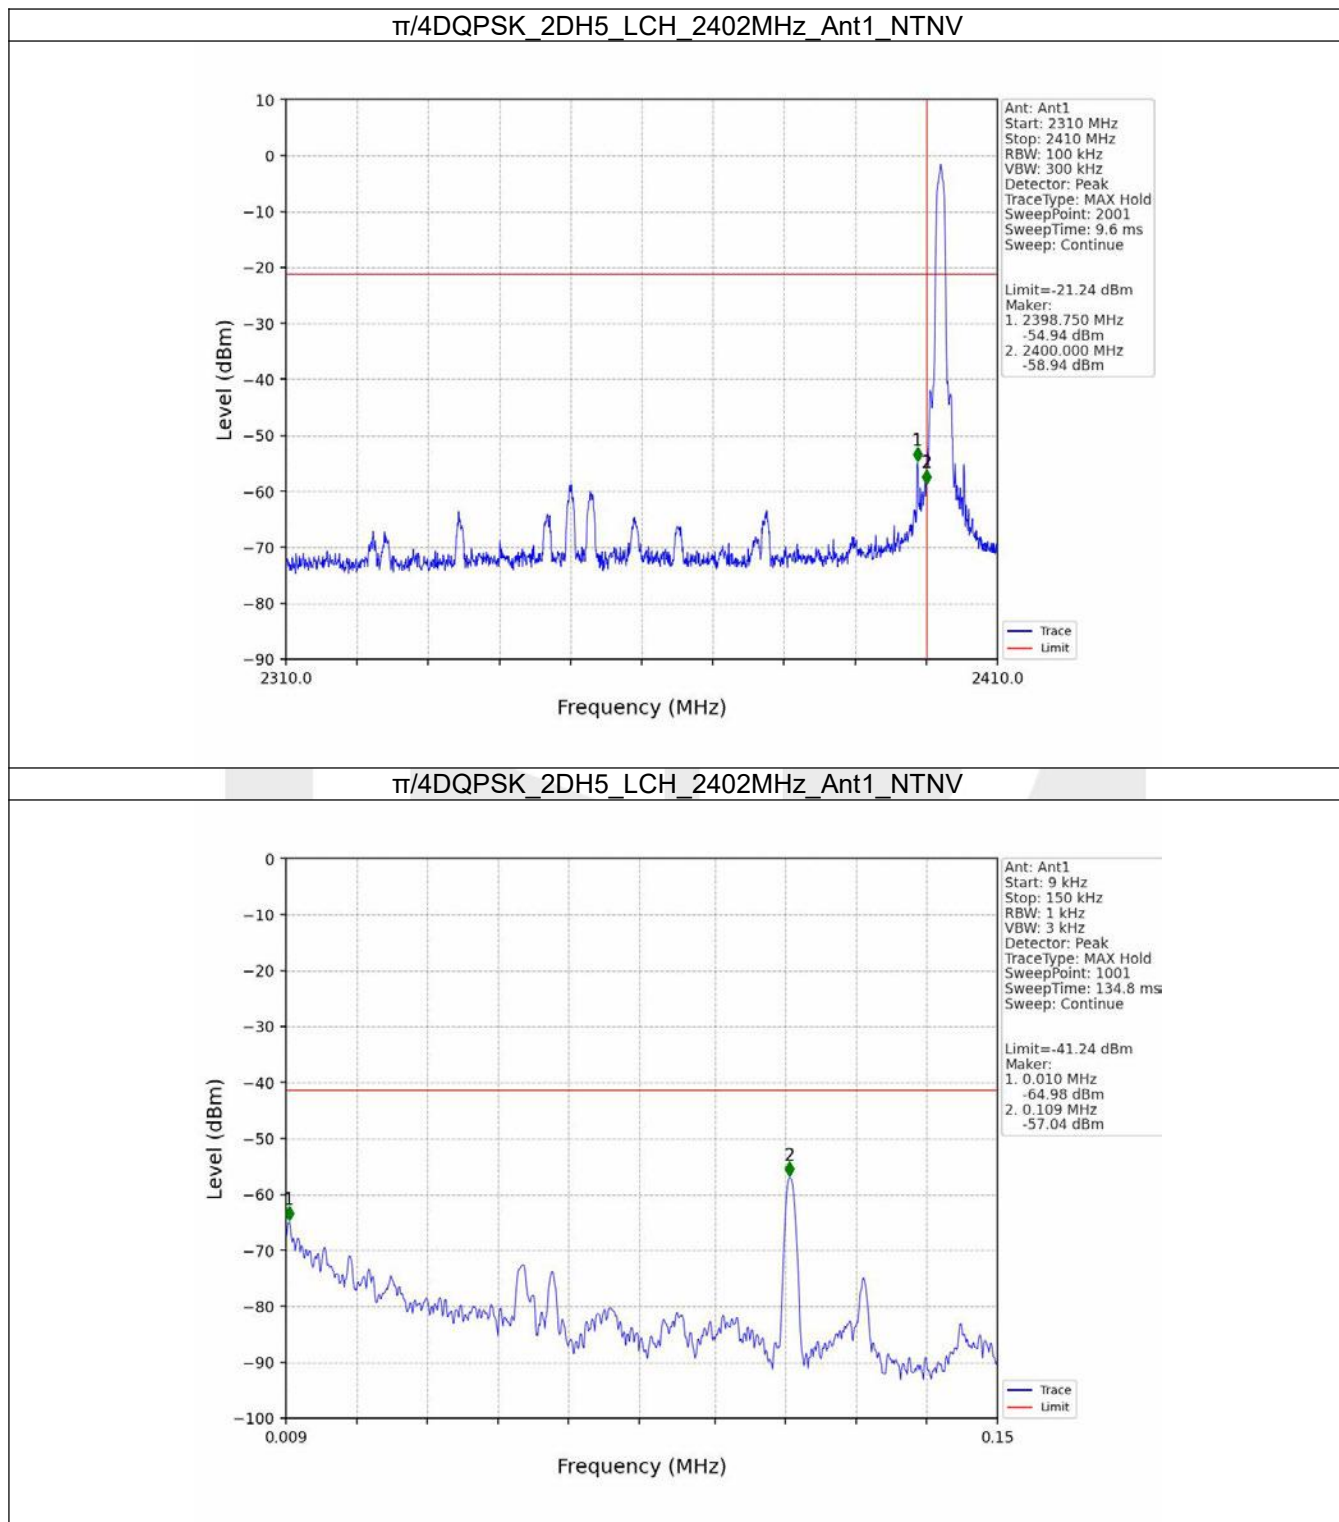




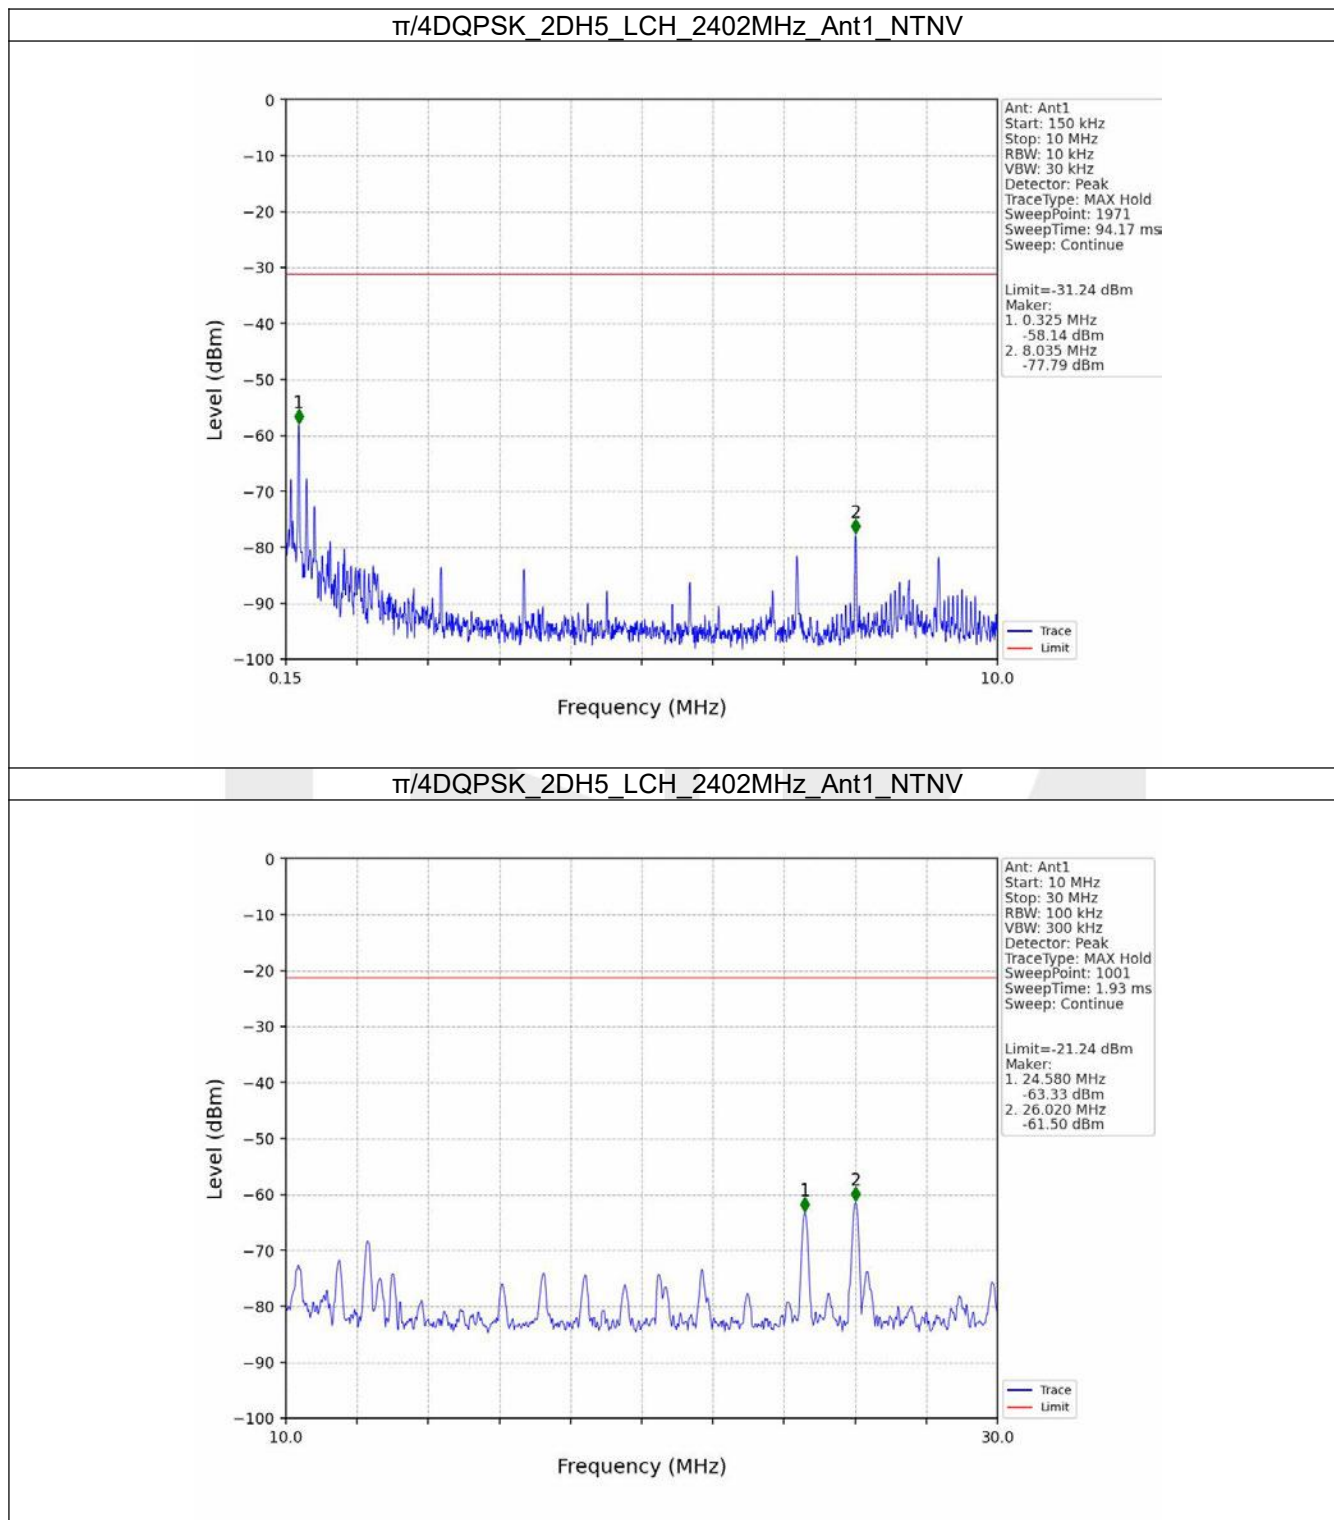




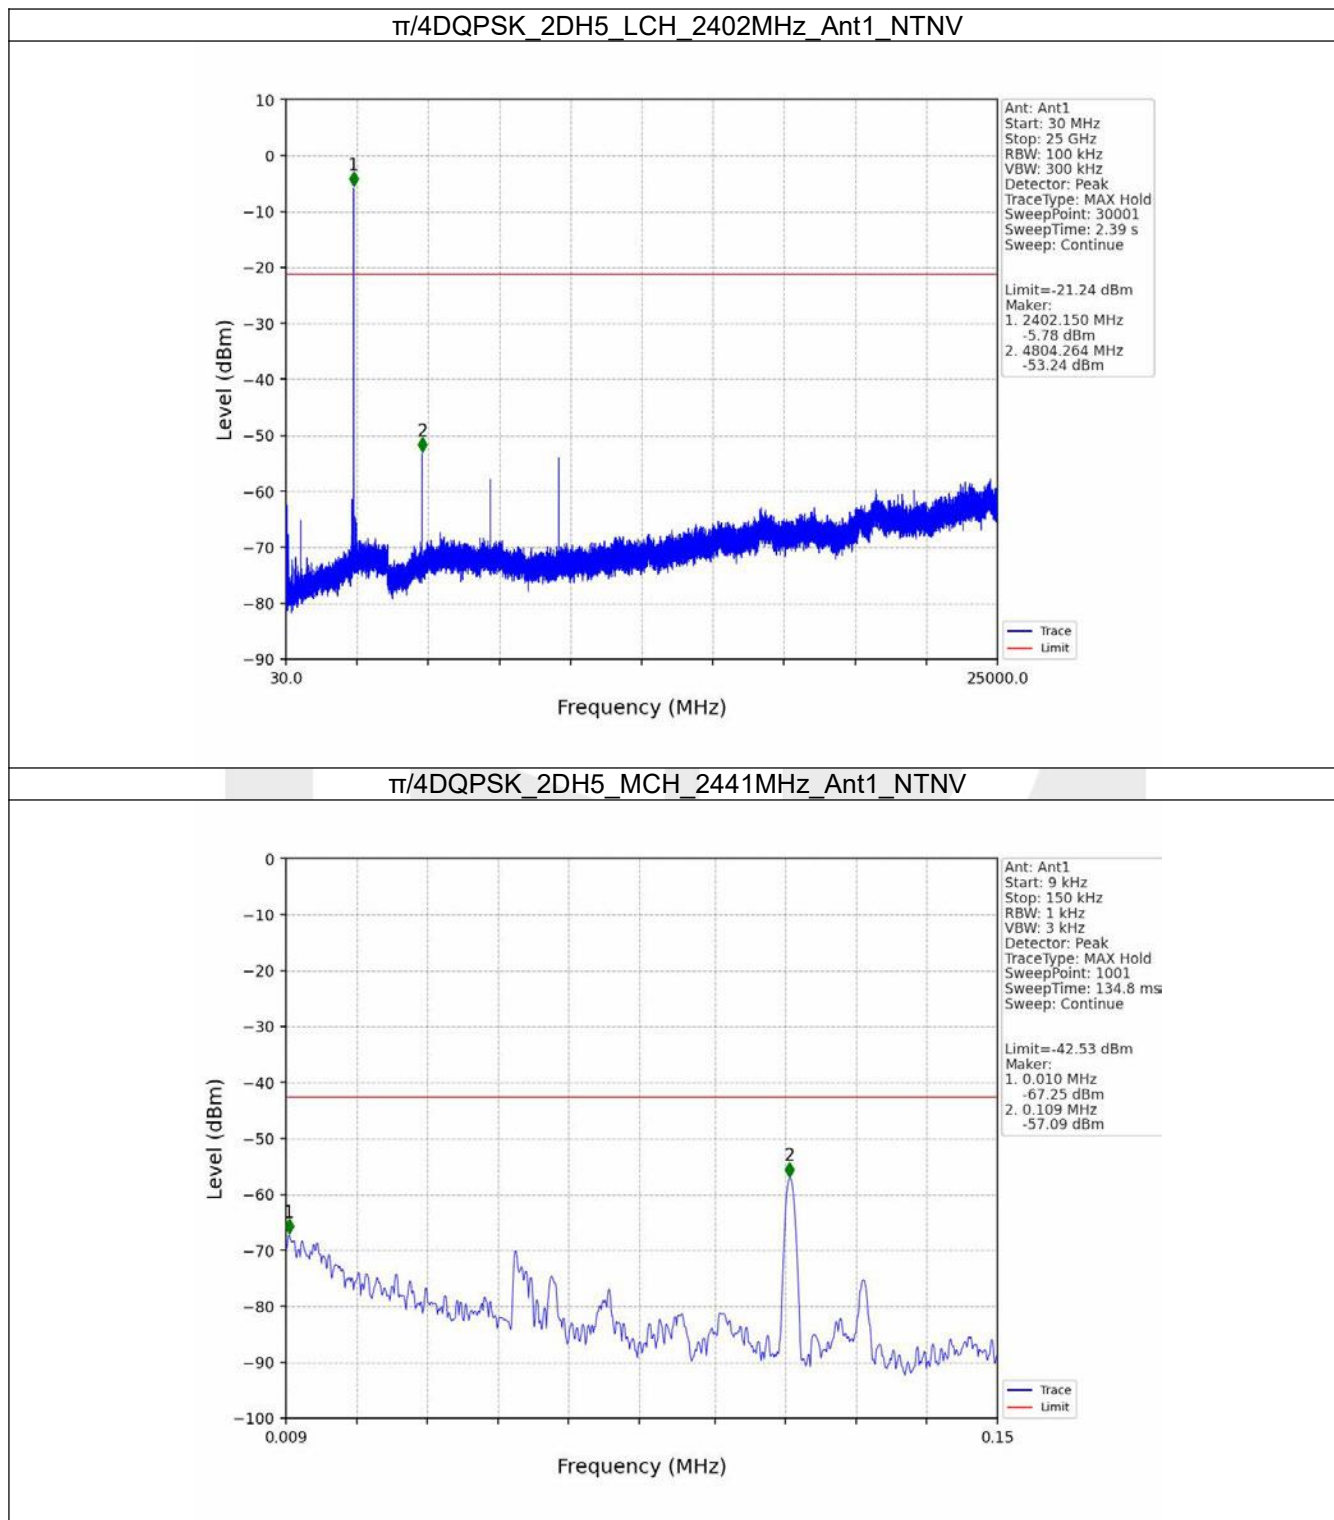


$\pi/4$ DQPSK\_2DH5\_MCH\_2441MHz\_Ant1\_NTNV

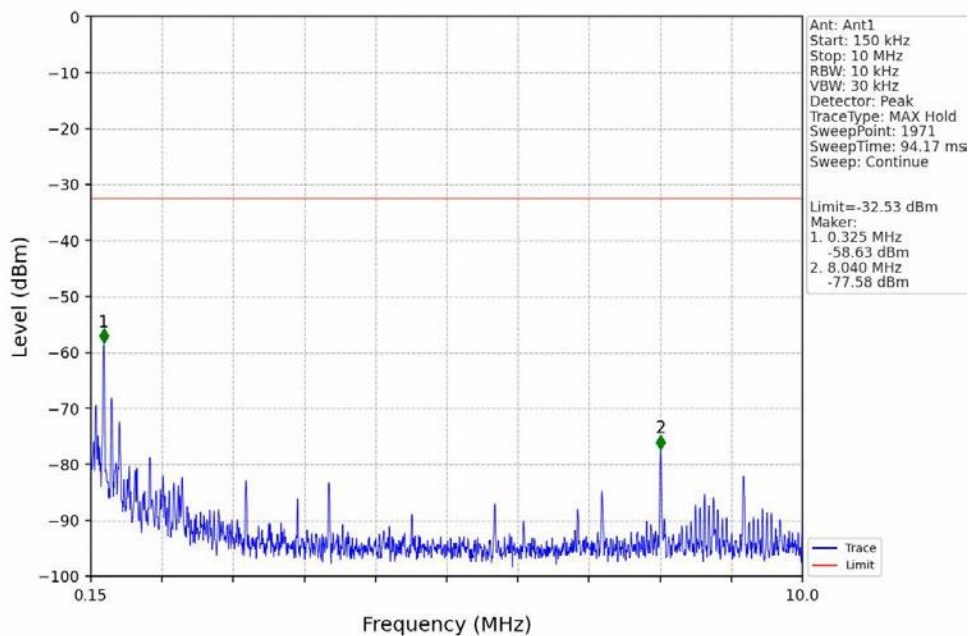


$\pi/4$ DQPSK\_2DH5\_MCH\_2441MHz\_Ant1\_NTNV

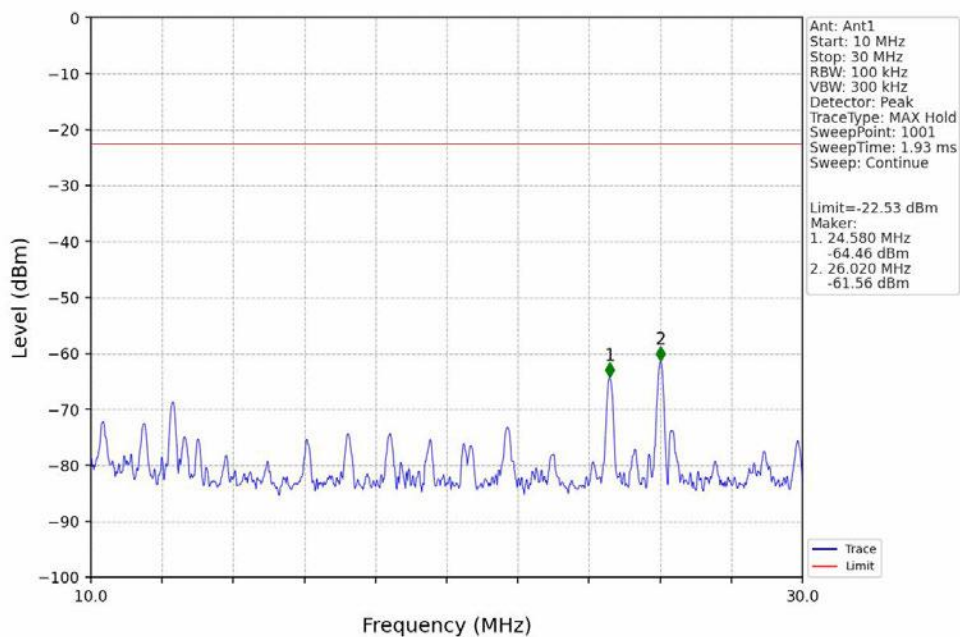


$\pi/4$ DQPSK\_2DH5\_MCH\_2441MHz\_Ant1\_NTNV

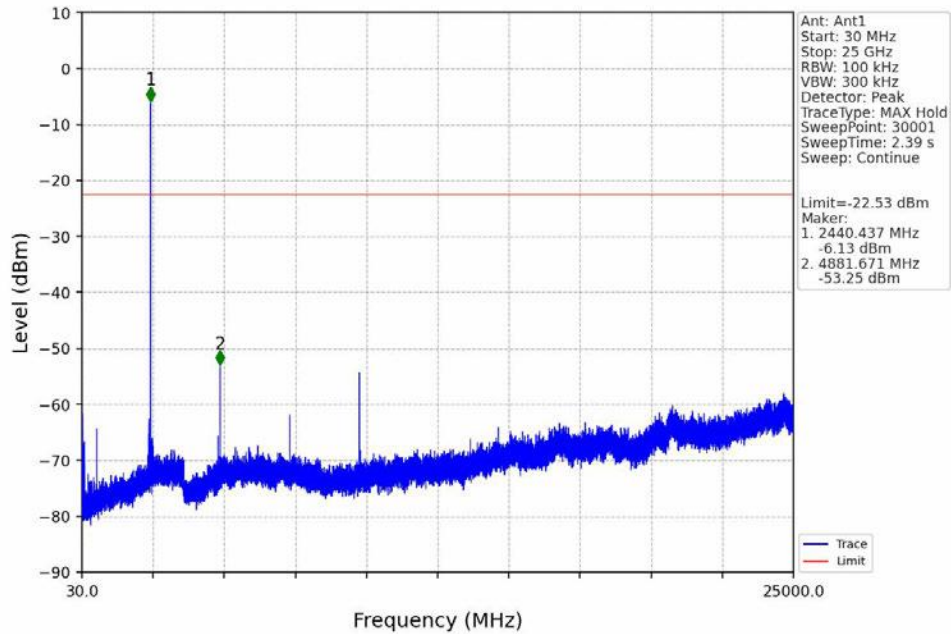


$\pi/4$ DQPSK\_2DH5\_HCH\_2480MHz\_Ant1\_NTNV

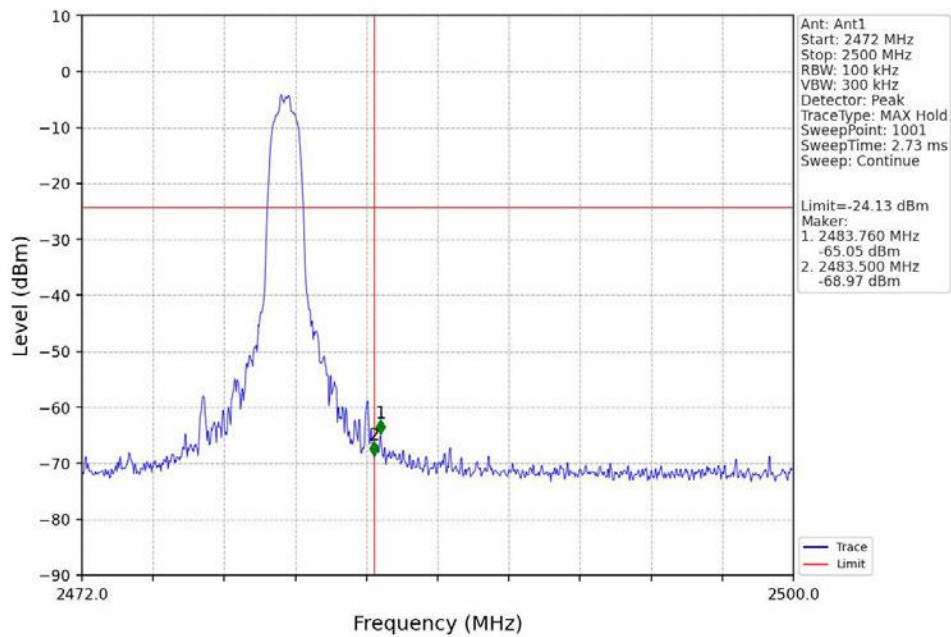

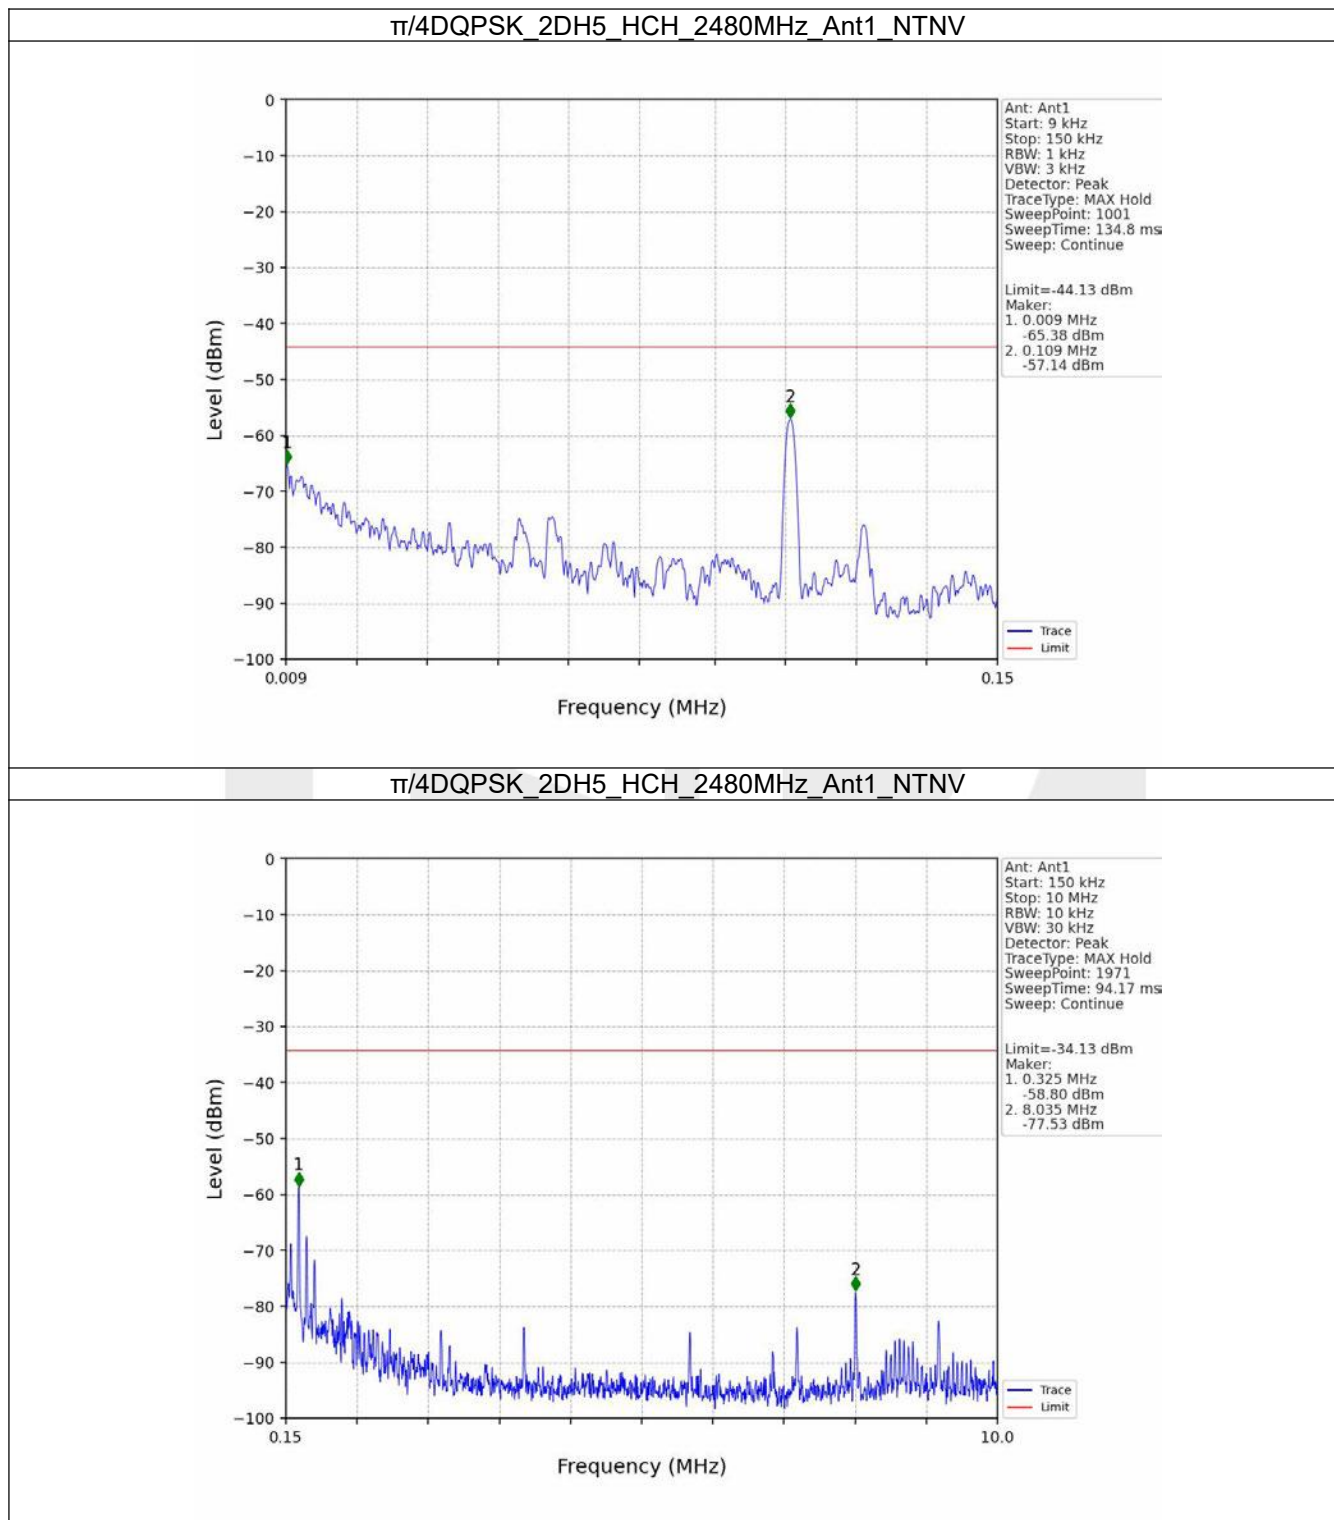




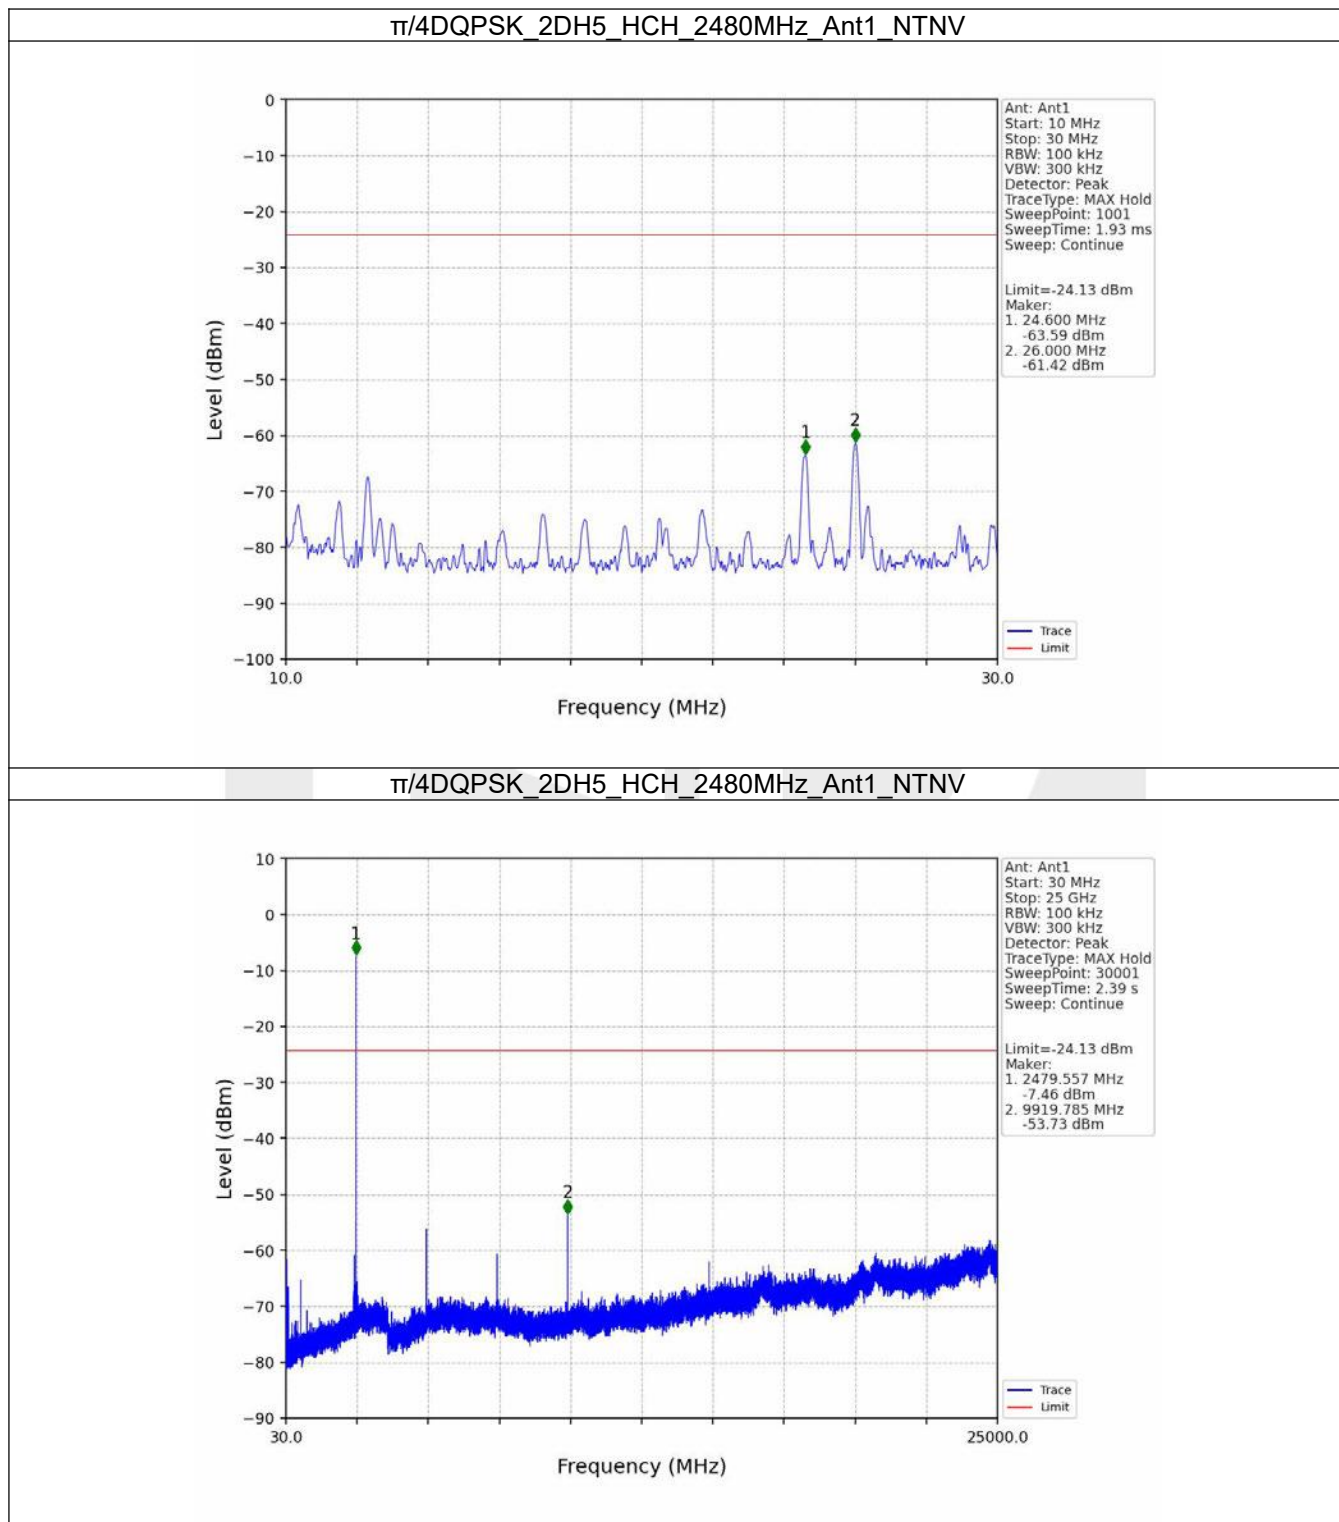





$\pi/4$ DQPSK\_2DH5\_HOPP\_Ant1\_NTNV

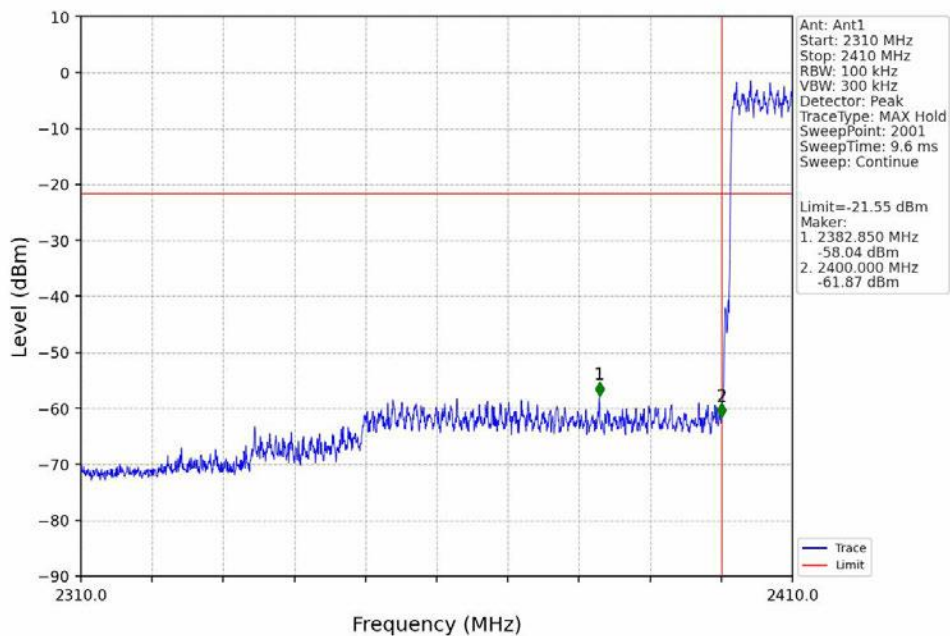


$\pi/4$ DQPSK\_2DH5\_HOPP\_Ant1\_NTNV

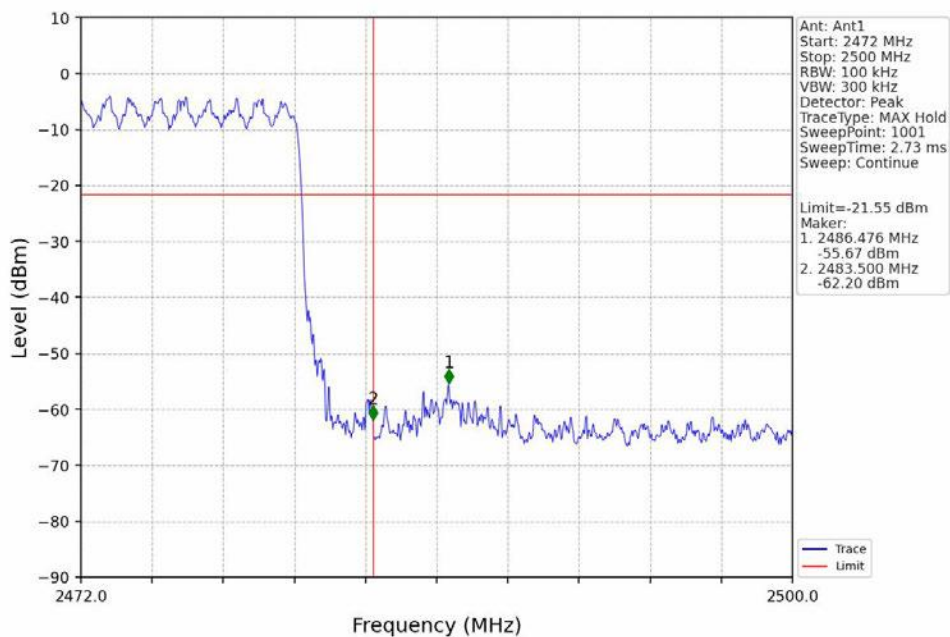


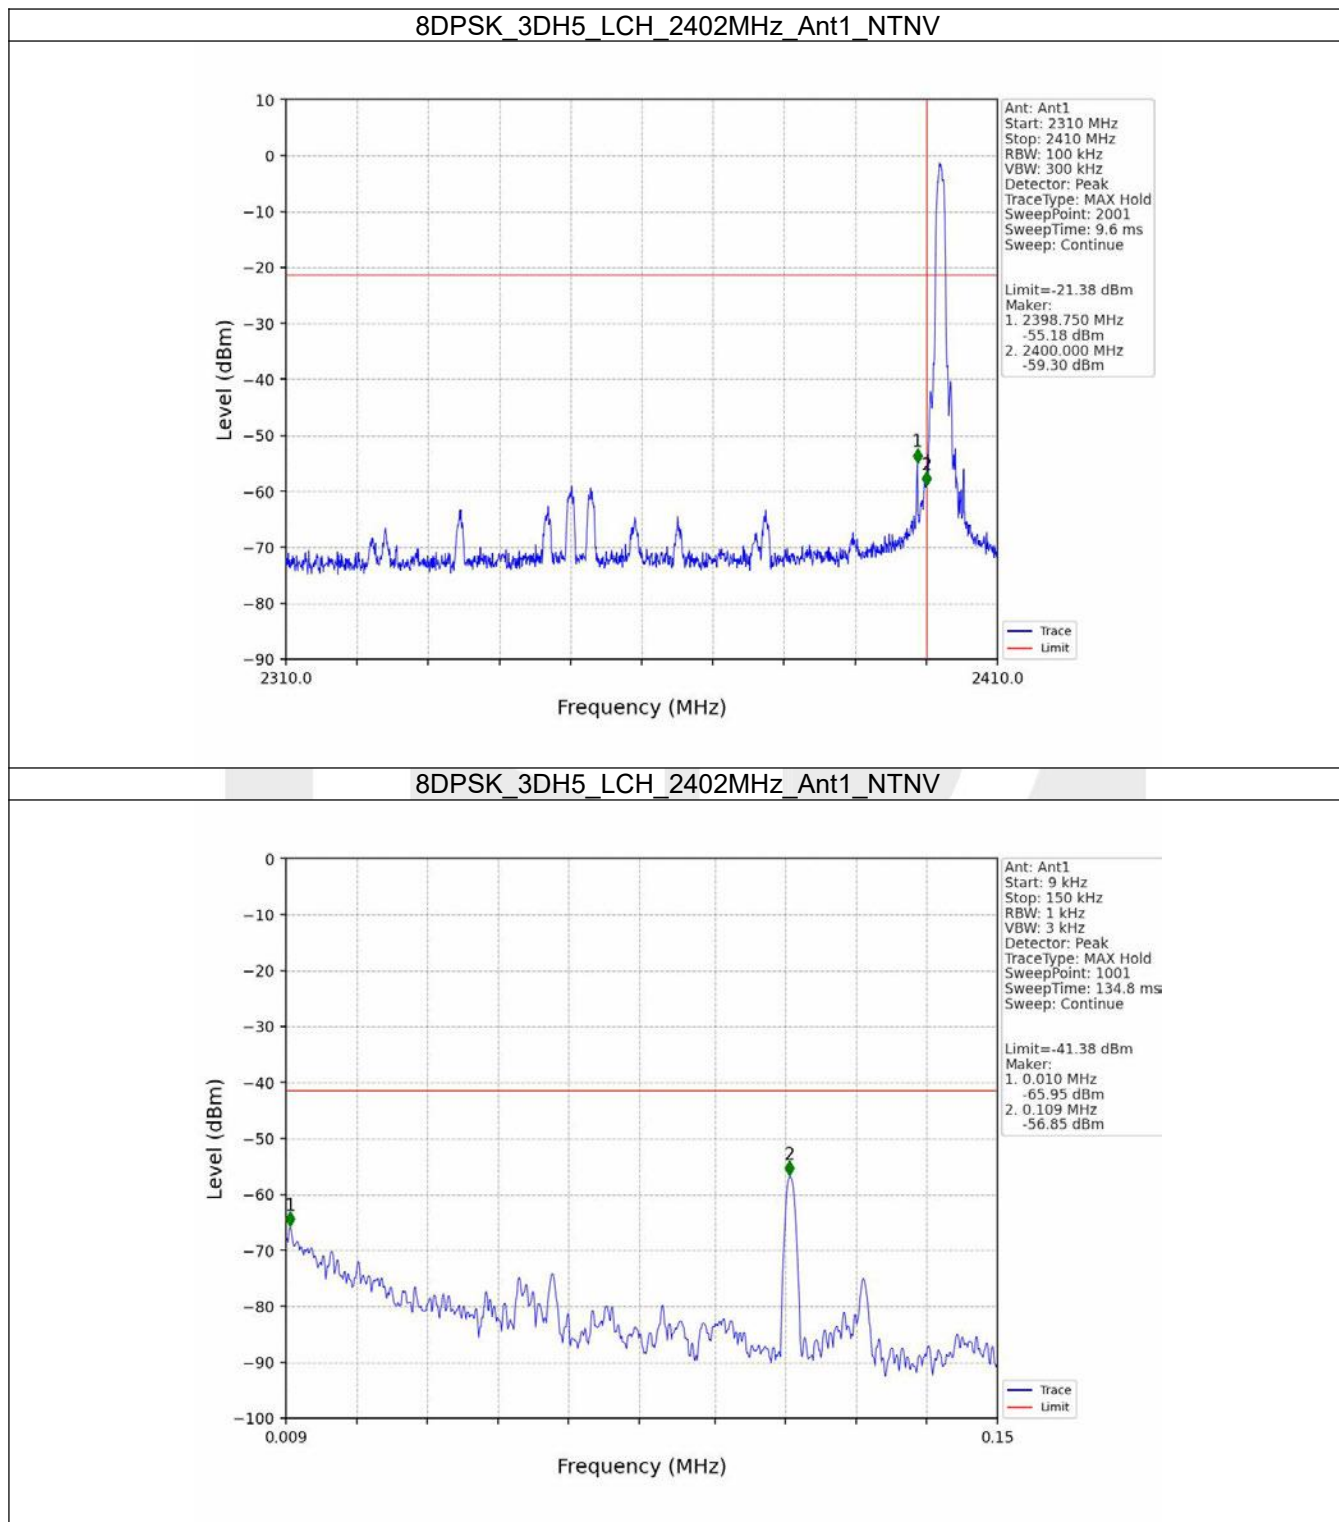


8DPSK\_3DH5\_LCH\_2402MHz\_Ant1\_NTNV

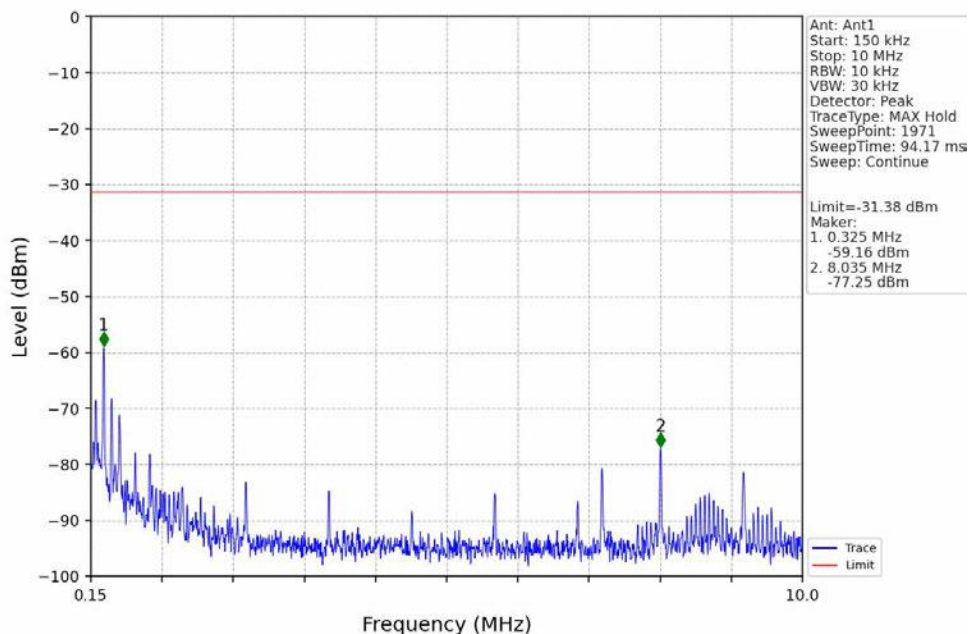


8DPSK\_3DH5\_LCH\_2402MHz\_Ant1\_NTNV

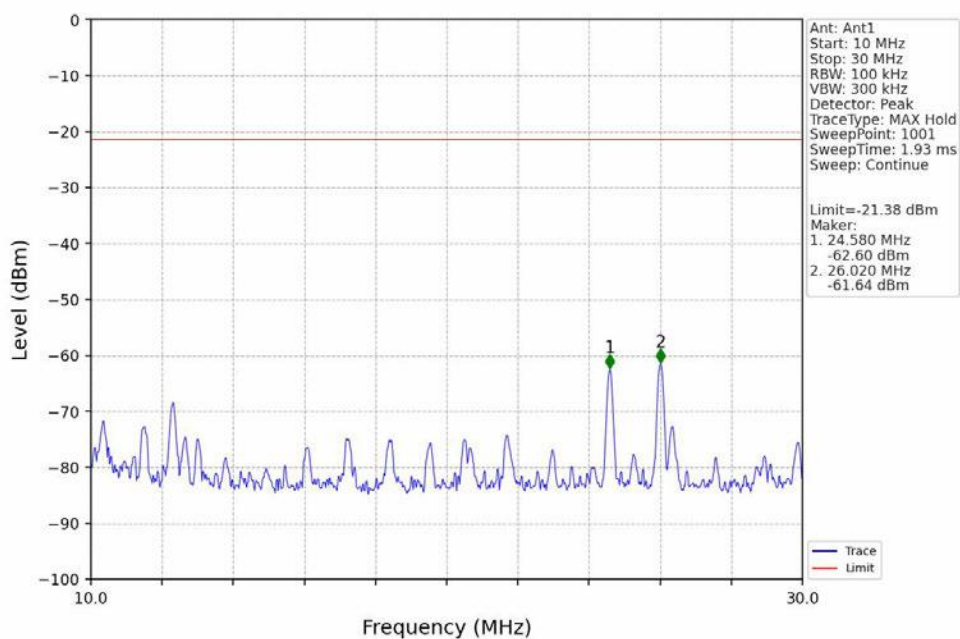

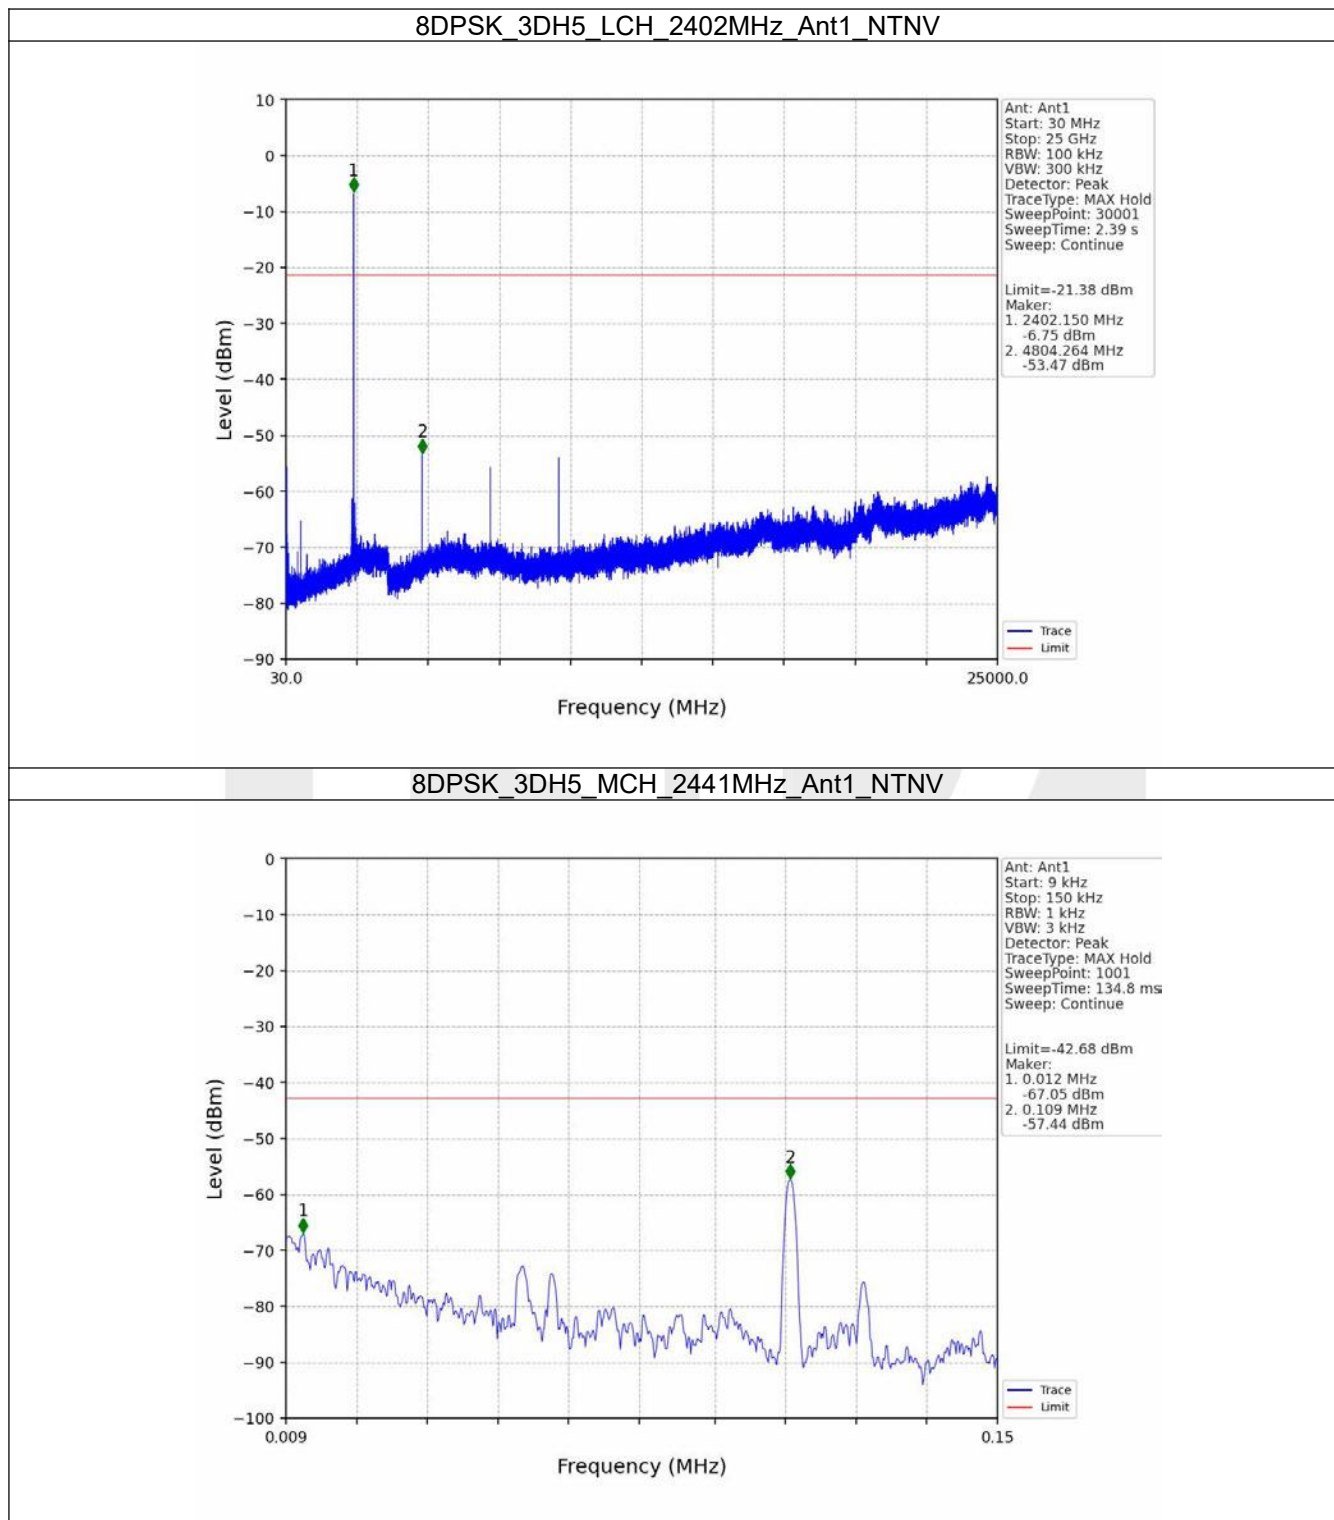




8DPSK\_3DH5\_MCH\_2441MHz\_Ant1\_NTNV

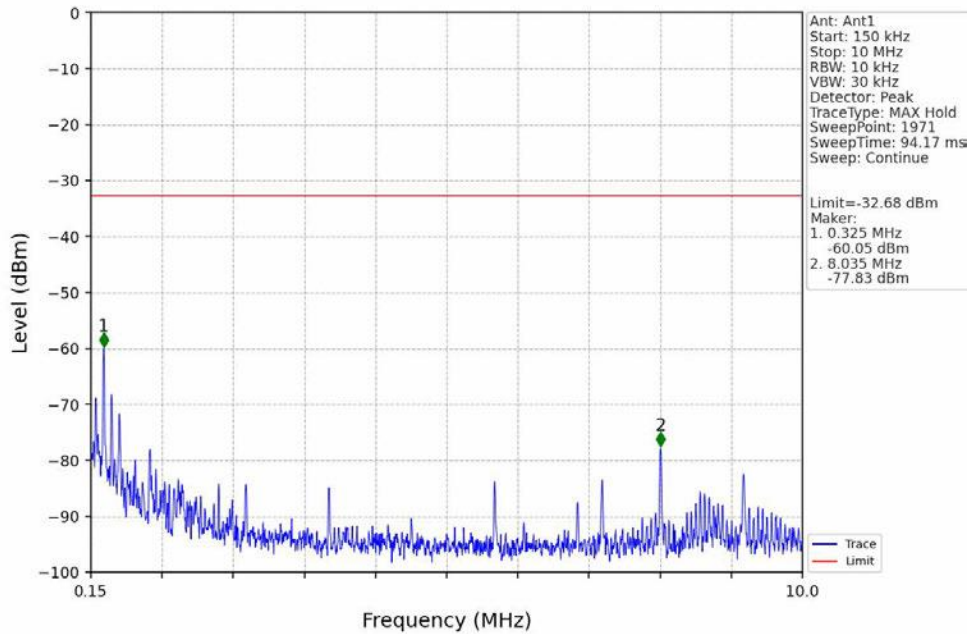


8DPSK\_3DH5\_MCH\_2441MHz\_Ant1\_NTNV

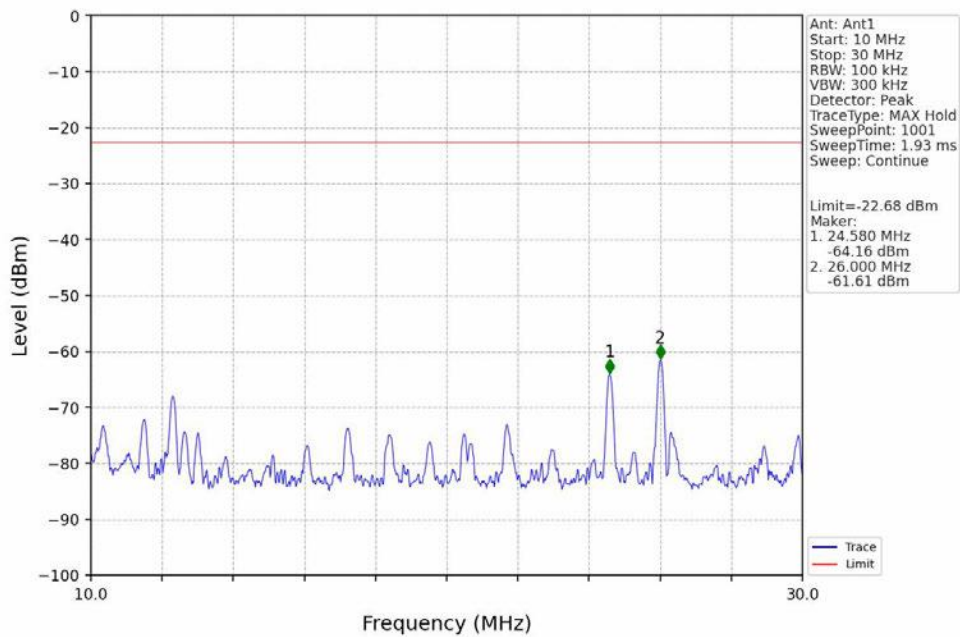





### 8DPSK\_3DH5\_MCH\_2441MHz\_Ant1\_NTNV

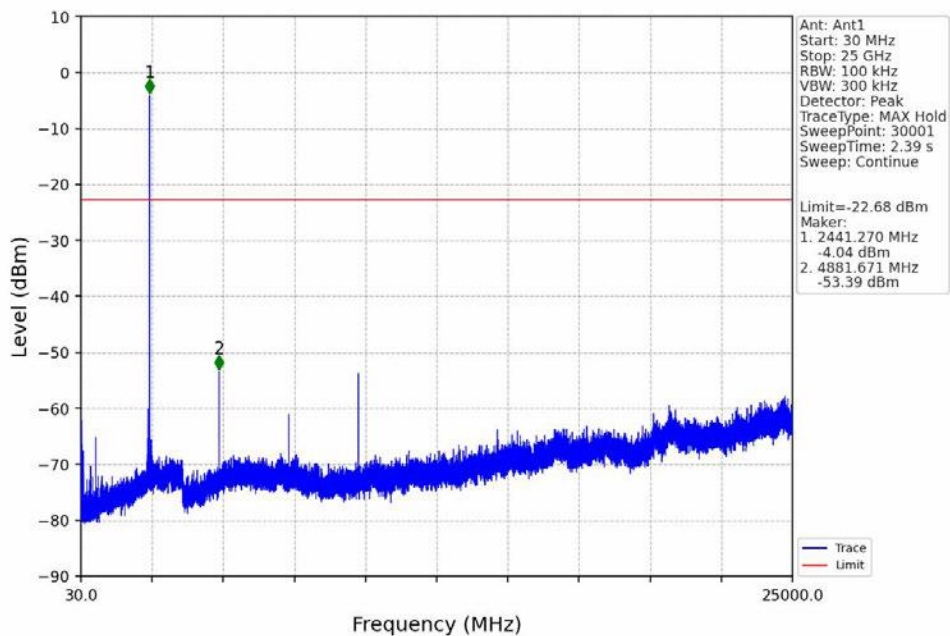


### 8DPSK\_3DH5\_HCH\_2480MHz\_Ant1\_NTNV

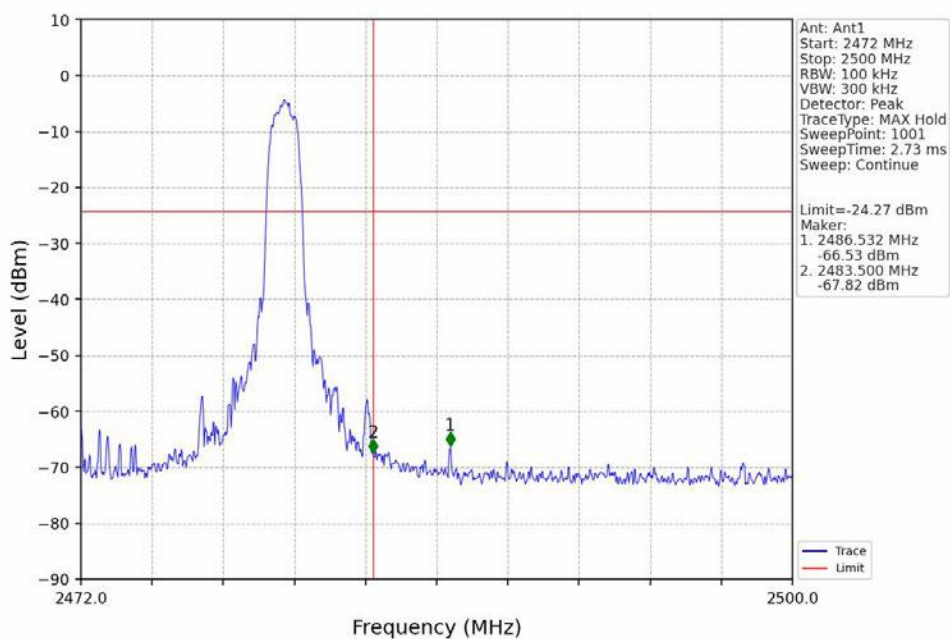



8DPSK\_3DH5\_HCH\_2480MHz\_Ant1\_NTNV

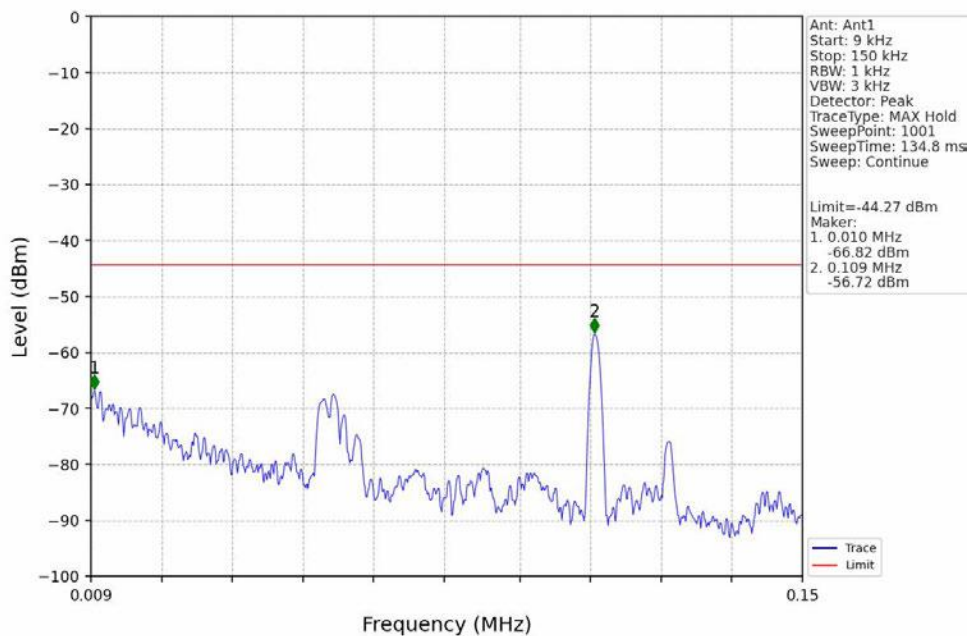

8DPSK\_3DH5\_HCH\_2480MHz\_Ant1\_NTNV

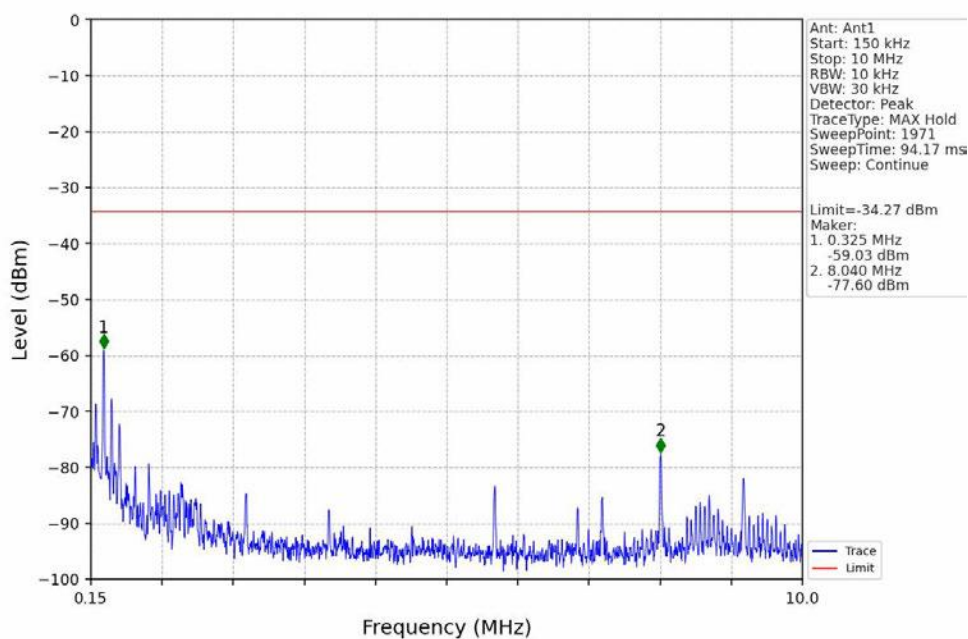

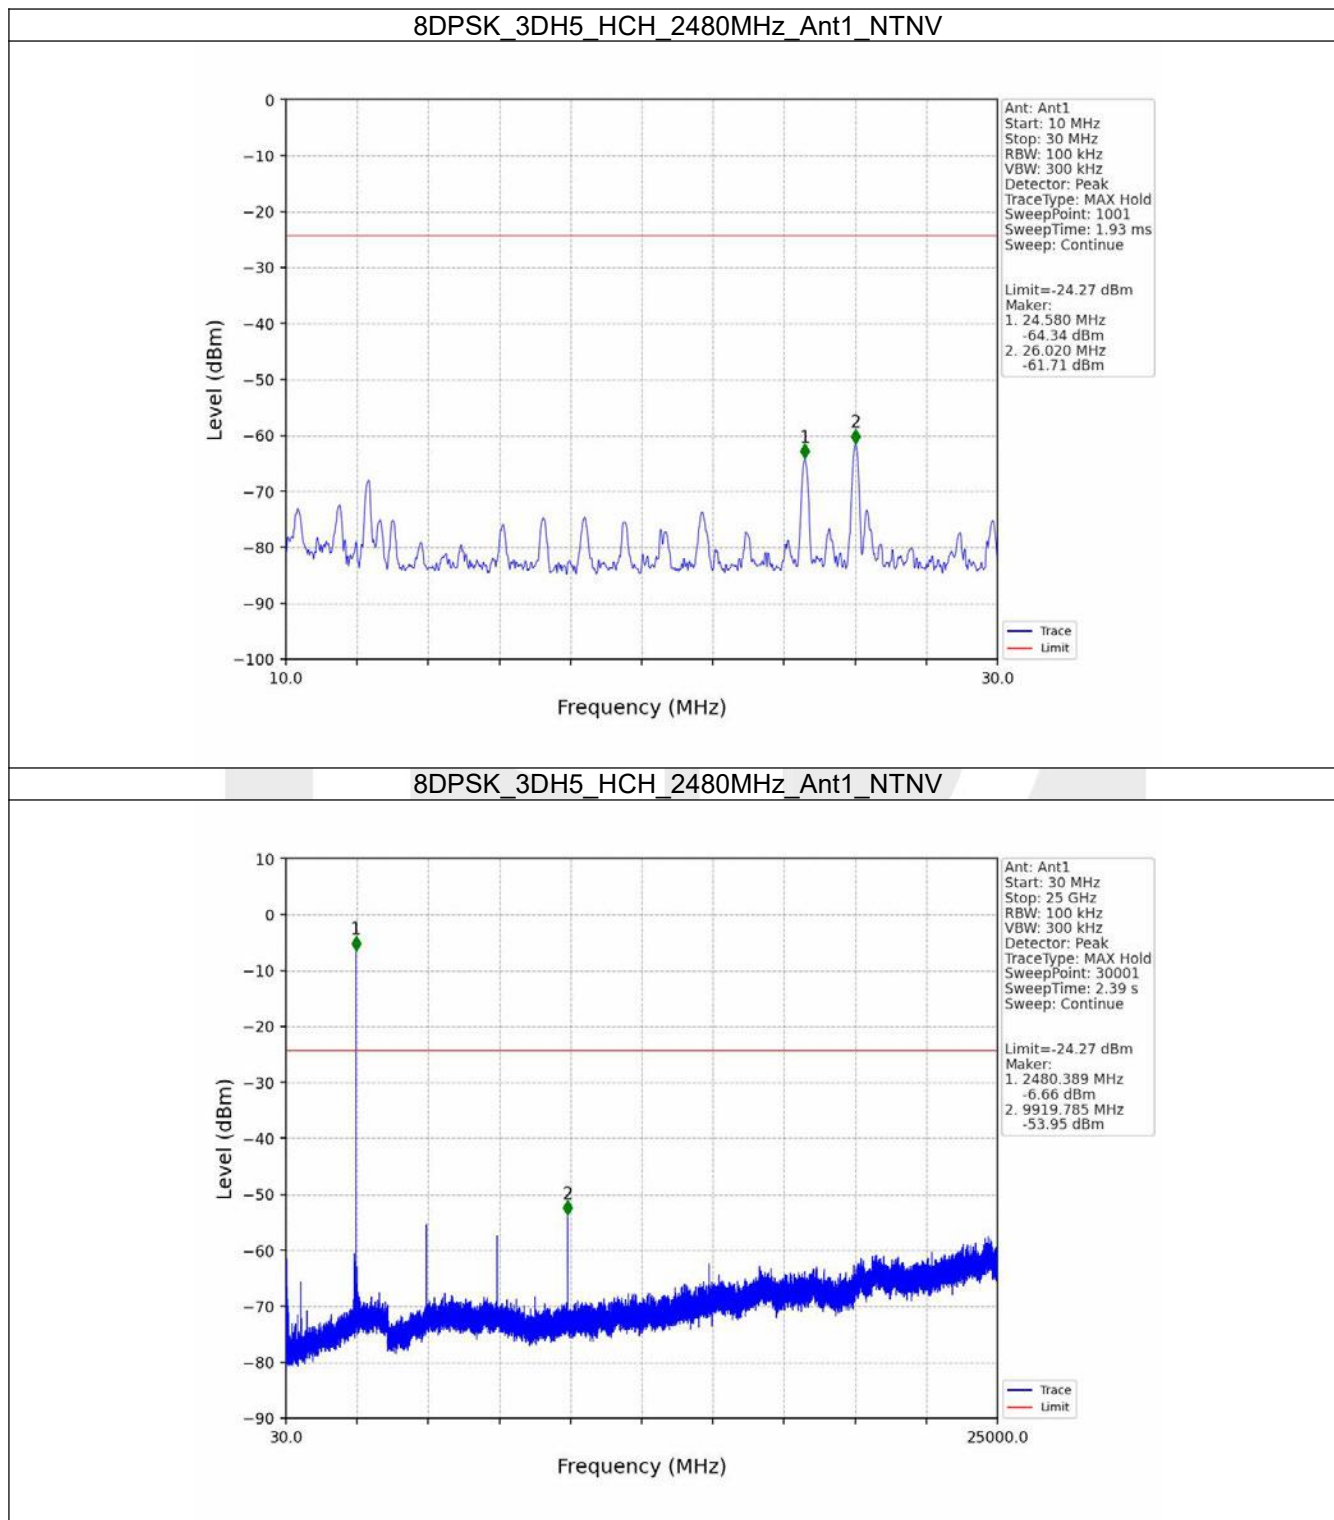

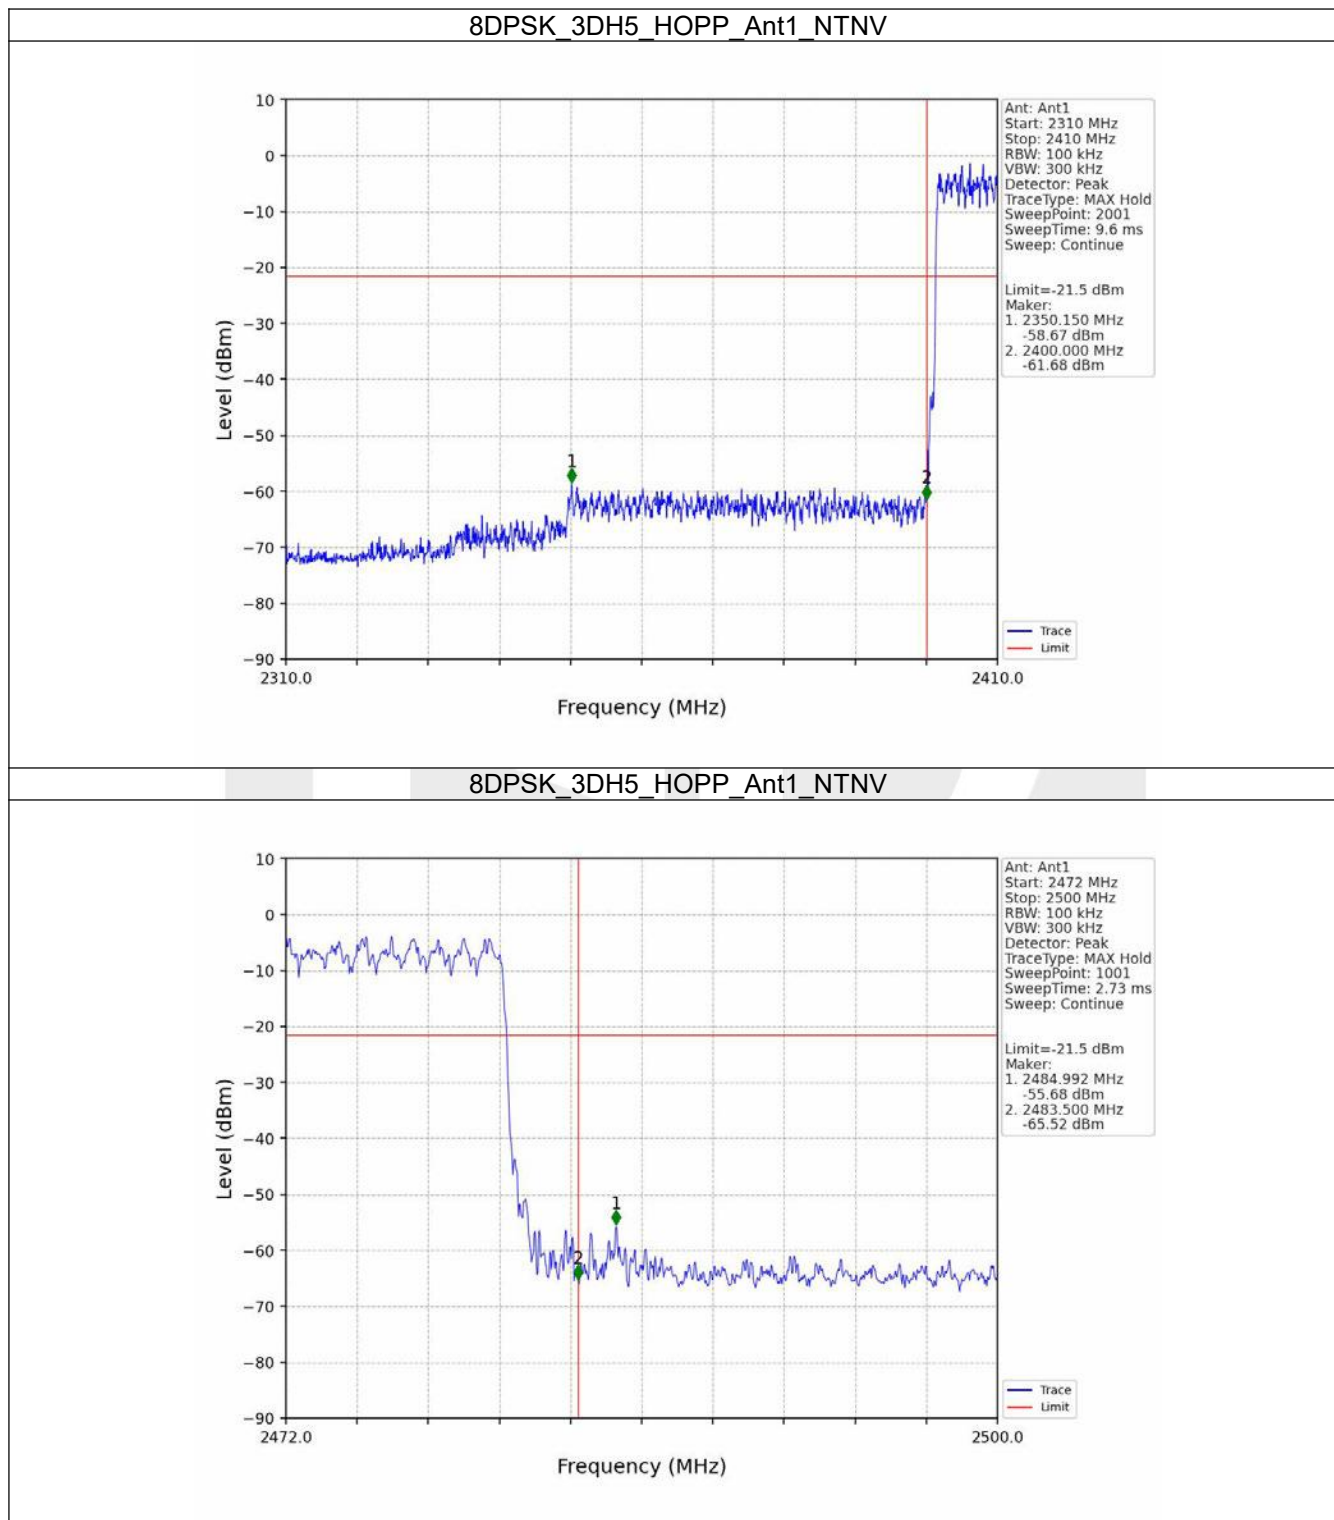

----- End of Report -----