





# Hearing Aid Compatibility (HAC) RF Emissions Test Report

**APPLICANT** : Nubia Technology Co.,Ltd.  
**PRODUCT NAME** : 5G Mobile Phone  
**MODEL NAME** : NX669J  
**BRAND NAME** : REDMAGIC  
**FCC ID** : 2AHJO-NX669J  
**STANDARD(S)** : FCC 47 CFR Part 20(20.19)  
ANSI C63.19-2011  
**RECEIPT DATE** : 2021-01-03  
**TEST DATE** : 2021-03-12  
**ISSUE DATE** : 2021-03-24

Edited by:

  
Liang Yumei (Rapporteur)

Approved by:

  
Peng Huarui (Supervisor)

**NOTE:** This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





# DIRECTORY

1. Attestation of Testing Summary .....	4
2. Technical Information .....	5
2.1. Applicant and Manufacturer Information .....	5
2.2. Equipment under Test (EUT) Description .....	5
2.3. Photographs of the EUT .....	4
2.4. Applied Reference Documents .....	4
3. RF Audio Interference Level .....	5
4. Air Interface and Operating Mode .....	6
5. HAC (RF) Measurement System .....	8
5.1. RF Measurement Setup .....	8
5.2. System Unit .....	9
6. RF Measurement Procedure .....	11
6.1. General Guidance .....	11
6.2. RF Test Instructions .....	12
7. Test Equipment List .....	14
8. System Validation .....	15
8.1. Test setup .....	15
8.2. Validation Result .....	16
9. Modulation Interference Factor .....	17
10. Conducted Power .....	19
10.1. Full Power .....	19
10.2. Reduced Power .....	21
11. Low-power Exemption .....	23
12. Summary Test Results .....	24
13. Uncertainty Assessment .....	26
Annex A General Information .....	27



REPORT No.: SZ20120168S02

**Annex B Test Setup Photos**

**Annex C Plots of Performance System Check**

**Annex D Plots of RF Emission Test Results**

**Annex E DASY Calibration Certificate**

Change History		
Version	Date	Reason for change
1.0	2021-03-24	First edition



## 1. Attestation of Testing Summary

Air Interface	Frequency Band	E-field M-Rating
GSM CMRS Voice	GSM850	M4
	GSM1900	M3
CDMA CMRS Voice	CDMA BC 0	M4
	CDMA BC 1	M4
LTE	LTE Band 38	M4
	LTE Band 40A	M4
	LTE Band 40B	M4

**Note:**

1. It is compliance with HAC limits for this device that specified in FCC 47 CFR Part 20.19 and ANSI C63.19.
2. When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% risk level.



## 2. Technical Information

**Note:** Provide by Applicant.

### 2.1. Applicant and Manufacturer Information

<b>Applicant:</b>	Nubia Technology Co.,Ltd.
<b>Applicant Address:</b>	Room 1801, Building 2, Chongwen Park, Nanshan Zhiyuan, No.3370, Liuxian Rd, Nanshan District, Shenzhen City,Guangdong Province, P. R. China
<b>Manufacturer:</b>	Nubia Technology Co.,Ltd.
<b>Manufacturer Address:</b>	Room 1801, Building 2, Chongwen Park, Nanshan Zhiyuan, No.3370, Liuxian Rd, Nanshan District, Shenzhen City, Guangdong Province, P. R. China

### 2.2. Equipment under Test (EUT) Description

<b>Product Name:</b>	5G Mobile Phone
<b>Hardware Version:</b>	NX669J_V1AMB
<b>Software Version:</b>	NX669J_EUCommon_V3.05
<b>Frequency Bands:</b>	GSM 850: 824 MHz ~ 849 MHz GSM 1900: 1850 MHz ~ 1910 MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz CDMA2000 BC0: 824 MHz ~ 849 MHz CDMA2000 BC1: 1850 MHz ~ 1910 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 18: 815 MHz ~ 830MHz LTE Band 19: 830 MHz ~ 845MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 40A: 2305 MHz ~ 2315 MHz LTE Band 40B: 2350 MHz ~ 2360 MHz LTE Band 66: 1710 MHz ~ 1780 MHz



	5G NR n41: 2496 MHz ~ 2690 MHz WLAN 2.4GHz: 2412 MHz ~ 2462 MHz WLAN 5.2GHz: 5180 MHz ~ 5240 MHz WLAN 5.3GHz: 5260 MHz ~ 5320 MHz WLAN 5.6GHz: 5500 MHz ~ 5720 MHz WLAN 5.8GHz: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC: 13.56MHz	
<b>Modulation Mode:</b>	GSM/GPRS: GMSK EDGE: 8PSK WCDMA: QPSK, 16QAM, 64QAM CDMA2000 1XRTT: QPSK CDMA2000 1XEV-DO: QPSK LTE: QPSK, 16QAM, 64QAM 5G NR: DFT-s-OFDM/CP-OFDM, PI/2 BPSK QPSK, 16QAM, 64QAM, 256QAM 802.11b: DSSS 802.11a/g/n-HT20/HT40/ac-VHT20/40/80: OFDM 802.11ax-HEW20/40/80/160: OFDMA BR+EDR: GFSK(1Mbps), $\pi/4$ -DQPSK(2Mbps), 8-DPSK(3Mbps) Bluetooth LE: GFSK(1Mbps) NFC : ASK	
<b>Multi-slot Class:</b>	GPRS: Multi-slot Class 33 EDGE: Multi-slot Class 33	
<b>Operation Class:</b>	Class B	
<b>Carrier Aggregation:</b>	Downlink Only	
<b>VoLTE Mode:</b>	Support	
<b>Hotspot Mode:</b>	WWAN/2.4G WLAN	
<b>WWAN MIMO:</b>	2 x 2	
<b>WLAN MIMO:</b>	2 x 2	
<b>Antenna Type:</b>	WWAN: PIFA Antenna WLAN: PIFA Antenna Bluetooth: PIFA Antenna NFC: Loop Antenna	
<b>Battery:</b>	Manufacturer:	Dongguan Ampere Technology Limited
	Model Name:	Li3945T44P8h906455
	Capacity:	4960mAh
	Rated Voltage:	3.87V
<b>SIM Cards Description:</b>	SIM 1	GSM+ WCDMA+CDMA+LTE+5G NR



REPORT No.: SZ20120168S02

	SIM 2	GSM+ WCDMA+CDMA+LTE+5G NR
	For dual SIM card version, both the SIM 1 and SIM 2 share the same chipset unit and tested as a single chipset, the SIM 1 was selected for testing.	

**Note:**

For more detailed description, please refer to specification or user manual supplied by the applicant and/or manufacturer.



## 2.3. Photographs of the EUT

**Note:** Please refer to the External Photos for the Photos of the EUT

## 2.4. Applied Reference Documents

**Leading reference documents for testing:**

No.	Identity	Document Title	Method determination /Remark
1	FCC 47 CFR Part 20 (20.19)	Hearing aid-compatible mobile handsets.	No deviation
2	ANSI C63.19-2011	American National Standard Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids	No deviation
3	KDB 285076 D01v05	HAC Guidance	No deviation

### 3. RF Audio Interference Level

FCC wireless hearing aid compatibility rules ensure that consumers with hearing loss are able to access wireless communications services through a wide selection of handsets without experiencing disabling radio frequency (RF) interference or other technical obstacles. To define and measure the hearing aid compatibility of handsets, in CFR47 part 20.19 ANSI C63.19 is referenced.

A handset is considered hearing aid-compatible for acoustic coupling if it meets a rating of at least M3 under ANSI C63.19, and A handset is considered hearing aid compatible for inductive coupling if it meets a rating of at least T3. According to ANSI C63.19 2011 version, for acoustic coupling, the RF electric field emissions of wireless communication devices should be measured and rated according to the emission level as below.

**Table 3.1 WD RF audio Interference level categories in logarithmic units**

Emission Categories	E-field Emissions	
	<960MHz	>960MHz
M1	50 to 55 dB (V/m)	45 to 50 dB (V/m)
M2	45 to 50 dB (V/m)	35 to 40 dB (V/m)
M3	40 to 45 dB (V/m)	30 to 35 dB (V/m)
M4	<40 dB (V/m)	<30 dB (V/m)

**Table 3.2 System performance classification table**

System classification	Category sum
	Hearing aid category + telephone category
Usable	Hearing aid category + telephone category = 4
Normal use	Hearing aid category + telephone category = 5
Excellent performance	Hearing aid category + telephone category = $\geq 6$

## 4. Air Interface and Operating Mode

Air Interface	Band	Transport Type	Simultaneous Transmitter	Name of Voice Service	Power Reduction
GSM	GSM850	VO	WLAN & BT	CMRS Voice	No
	GSM1900				No
	EDGE850	DT	WLAN & BT	N/A	No
	EDGE1900				No
WCDMA (UMTS)	Band II	VO	WLAN & BT	CMRS Voice	No
	Band IV				No
	Band V				No
	HSPA	DT	WLAN & BT	N/A	No
CDMA	BC0	VO	WLAN&BT	CMRS Voice	No
	EVDO	DT	WLAN&BT	N/A	No
	BC1	VO	WLAN&BT	CMRS Voice	No
	EVDO	DT	WLAN&BT	N/A	No
FDD-LTE & TDD-LTE	Band 2	VO	WLAN & BT	VoLTE	No
	Band 4				No
	Band 5				No
	Band 7				No
	Band 12				No
	Band 17				No
	Band 18				No
	Band 19				No
	Band 26				No
	Band 38				No
	Band 40				No
	Band 66				No
WiFi	2450	DT	GSM,UMTS, CDMA, LTE	N/A	No
	5200 (U-NII-1)				No
	5300 (U-NII-2A)				No
	5500 (U-NII-2C)				No
	5800 (U-NII-3)				No
BT	2450	DT	GSM,UMTS, CDMA, LTE	N/A	No

**Where:**

VO=Voice Only

DT=Digital Transport only



VD=CMRS and IP Voice Service over Digital Transport

BT=Bluetooth

\* Ref Lev in accordance with 7.4.2.1 of ANSI C63.19-2011 and the July 2012 VoLTE interpretation

\*\* Ref Lev -20 dBm0


\*\*\* Ref Lev XNet established by KDB Inquiry NNNNNN @ -16 dBm0

**Note:**

- 1) Air Interface/Band MHz: List of all air interfaces and bands supported by the handset.
- 2) Type: For each air interface, indicate the type of voice transport mode:
  - i. VO = legacy Cellular Voice Service, from Table 7.1 in 7.4.2.1 of ANSI C63.19-2011;
  - ii. DT = Digital Transport only (no voice);
  - iii. VD = IP Voice Service over Digital Transport.
- 3) Simultaneous Transmitter: Indicate any air interface/bands that operate in simultaneous or concurrent service transmission mode.
- 4) Name of Voice Service: See Q4 in 285076 D03 HAC FAQ for further clarification.
  - a) Ref Lev in accordance with 7.4.2.1 of ANSI C63.19-2011 and the July 2012 VoLTE interpretation
  - b) \*\* Ref Lev -20 dBm0
  - c) \*\*\* Ref Lev XNet established by KDB Inquiry NNNNNN @ -16 dBm0

## 5. HAC (RF) Measurement System

### 5.1. RF Measurement Setup

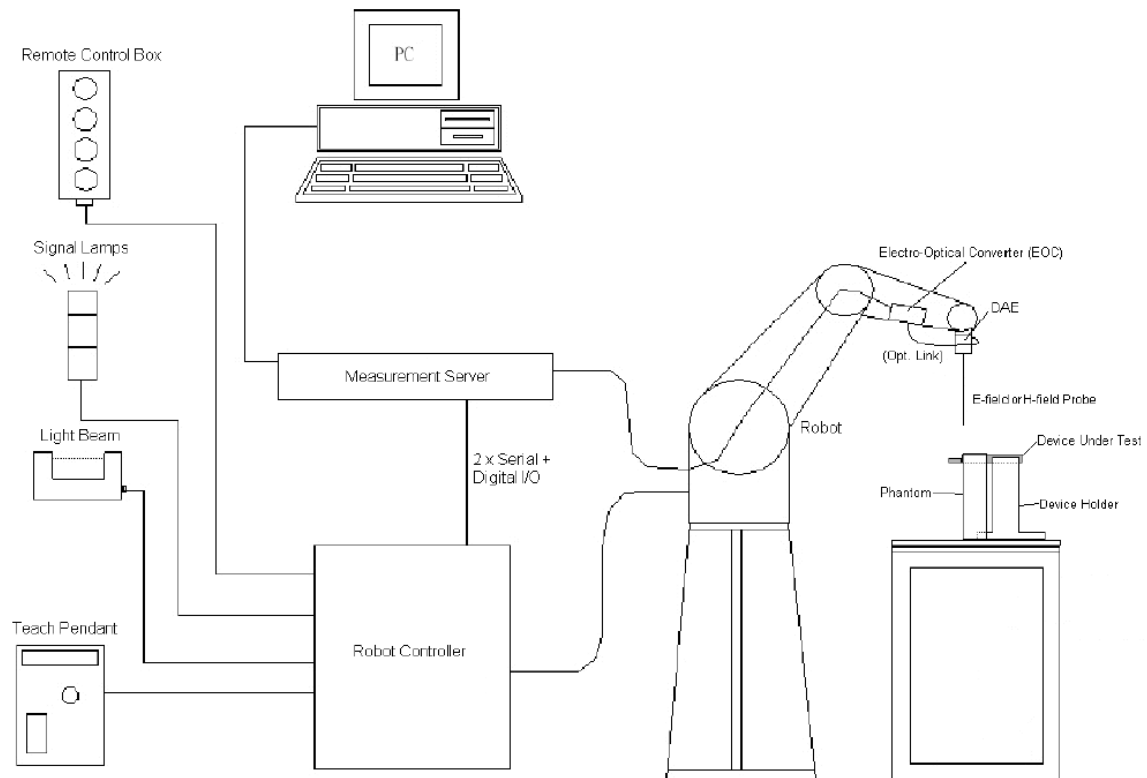

**Fig 5.1 SPEAG RF System Configurations**


## 5.2. System Unit

### ➤ E-Field Probe

The RF measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use with high permittivity. The dosimetric probe has special calibration at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

### E-Field Probe Specification

#### <ER3DV6>

Construction	One dipole parallel, two dipoles normal to probe axis Built-in shielding against static charges	
Calibration	In air from 100 MHz to 3.0 GHz (Absolute accuracy $\pm 6.0\%$ , $k=2$ )	
Frequency	10 MHz to 6 GHz; Linearity: $\pm 0.2$ dB	
Directivity	$\pm 0.2$ dB in HSL (rotation around probe axis) $\pm 0.4$ dB in HSL (rotation normal to probe axis)	
Dynamic Range	2 V/m to 1000 V/m (M3 or better device readings fall well below diode compression point)	
Linearity	$\pm 0.2$ dB	
Dimensions	Overall length: 330 mm (Tip: 16 mm) Tip diameter: 8 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.5 mm	

**Fig 5.2 Photo of ER3DV6**

**Probe Tip Description:**  
HAC field measurements take place in the close near field with high gradients. Increasing the measuring distance from the source will generally decrease the measured field values (in case of the validation dipole approx. 10% per mm).

Fig 5.2 Photo of ER3DV6

### ➤ Data Acquisition Electronics (DAE)


The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



**Fig 5.3 Photo of DAE**

### ➤ Test Arch
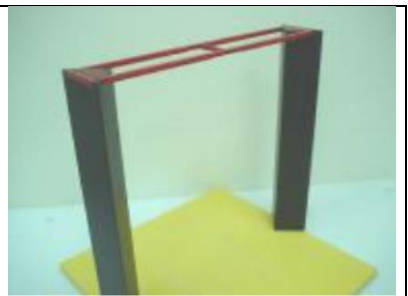
<b>Construction</b>	Active single sensor probe for both the axial and radial measurement scans – Fully RF shielded, compatible with DAE and adapted probe cup.	
<b>Dimensions</b>	Length: 370 mm Width: 370 mm Height: 370 mm	

**Fig 5.4 Photo of Arch**



## 6. RF Measurement Procedure

### 6.1. General Guidance

Referenced from ANSI C63.19 -2011 section 5.5.1:

1. Confirm the proper operation of the field probe, probe measurement system, and other instrumentation and the positioning system.
2. Position the WD in its intended test position.
3. Set the WD to transmit a fixed and repeatable combination of signal power and modulation characteristic that is representative of the worst case (highest interference potential) encountered in normal use. Transiently occurring start-up, changeover, or termination conditions, or other operations likely to occur less than 1% of the time during normal operation, may be excluded from consideration. Transiently occurring start-up, changeover, or termination conditions, or other operations likely to occur less than 1% of the time during normal operation, may be excluded from consideration.
4. The center sub-grid shall be centered on the T-Coil mode perpendicular measurement point or the acoustic output, as appropriate. Locate the field probe at the initial test position in the 50 mm by 50 mm grid, which is contained in the measurement plane, refer to illustrated in Figure 8.2. If the field alignment method is used, align the probe for maximum field reception.
5. Record the reading at the output of the measurement system.
6. Scan the entire 50 mm by 50 mm region in equality spaced increments and record the reading at each measurement point, the distance between measurement points shall be sufficient to assure the identification of the maximum reading.
7. Identify the five contiguous sub-grids around the center sub-grid whose maximum reading is the lowest of all available choices. This eliminates the three sub-grids with the maximum readings. Thus, the six areas to be used to determine the WD's highest emissions are identified.
8. Identify the maximum reading within the non-excluded sub-grids identified in step 7).
9. Convert the maximum reading identified in step 8) to RF audio interference level, in, V/m, by taking the square root of the reading and then dividing it by the measurement system transfer function, established in ANSI C63.19 -2011 section 5.5.1.1. Convert the result to dB(V/m) by taking the base-10 logarithm and multiplying it by 20. Expressed as a formula:

$$\text{RF audio interference level in dB(V/m)} = 20 \times \log(R_{\max}^{1/2}/TF),$$

where  $R_{\max}$  is the maximum reading.

10. The RF audio interference level in dB (V/m) is obtained by adding the MIF (in dB) to the maximum steady-state rms field-strength reading, in dB (V/m)
11. Compare this RF audio interference level with the categories in ANSI C63.19-2011 clause 8 and record the resulting WD category rating.

## 6.2. RF Test Instructions

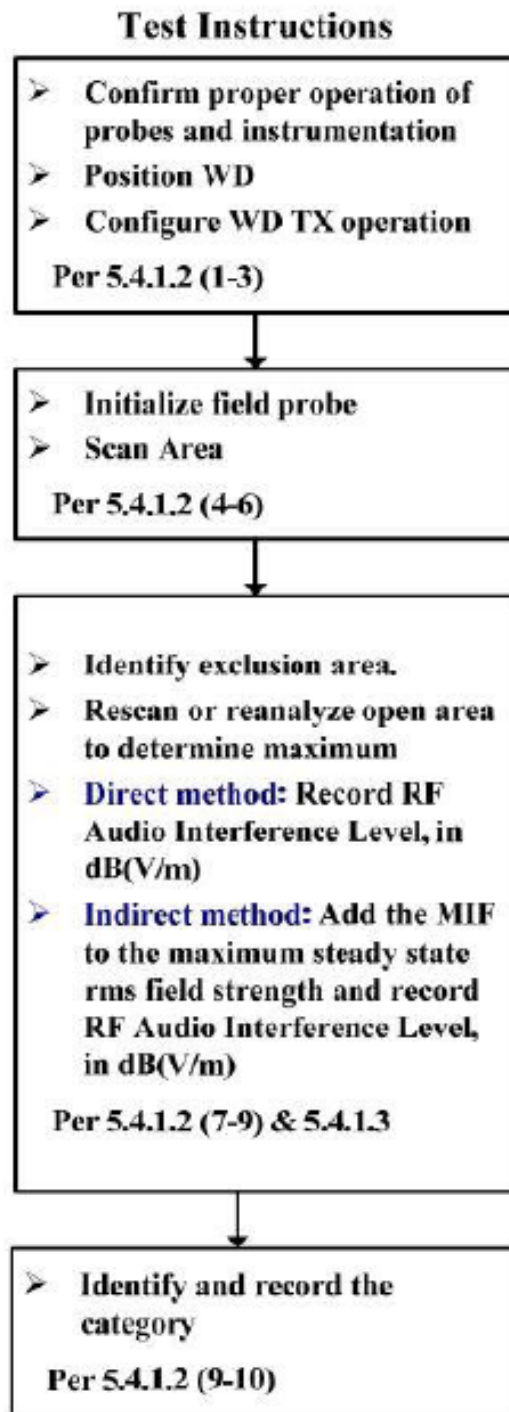


Fig 6.1 WD near-field emission scan flowchart



Fig 6.2 WD reference and plane for RF emission measurements

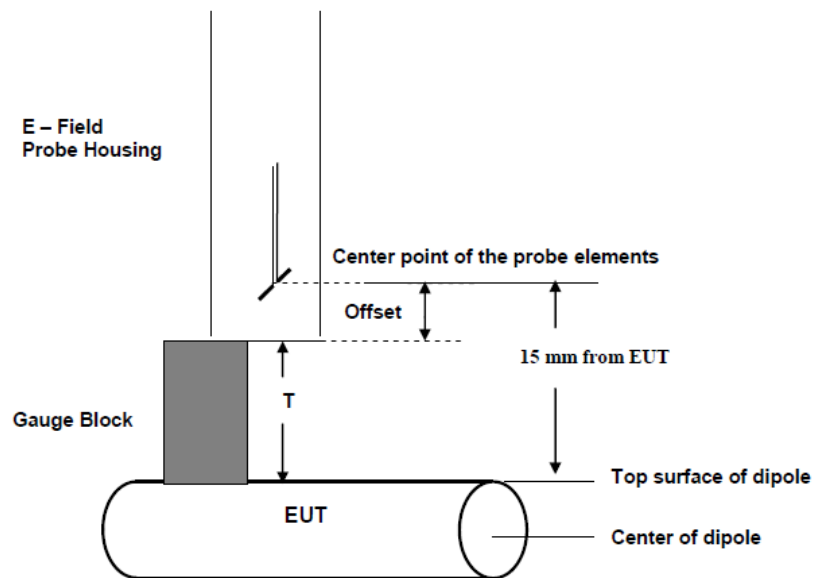


Fig 6.3 Gauge block with E-field probe



## 7. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	Isotropic E-Field Probe	ER3DV6	2344	2020.06.23	2021.06.22
SPEAG	Audio Holder	N/A	1094	NCR	NCR
SPEAG	835MHz Calibration Dipole	CD835V3	1113	2018.10.23	2021.10.22
SPEAG	1880MHz Calibration Dipole	CD1880V3	1111	2018.10.23	2021.10.22
SPEAG	2300MHz Calibration Dipole	CD2300V3	7483	2020.10.23	2023.10.22
SPEAG	2600MHz Calibration Dipole	CD2600V3	1010	2018.10.23	2021.10.22
SPEAG	Data Acquisition Electronics	DAE4	480	2020.06.03	2021.06.02
R&S	Base Station	CMU200	107082	2020.10.19	2021.10.18
R&S	Network Emulator	CMW500	124534	2020.10.28	2021.10.27
Agilent	Signal Generator	N5182B	MY53050509	2020.10.19	2021.10.18
Agilent	Power Sensor	N8482A	MY41090849	2020.10.20	2021.10.19
Agilent	Power Meter	E4416A	MY45102093	2020.10.20	2021.10.19
Anritsu	Power Sensor	MA2411B	N/A	2020.10.20	2021.10.19
Anritsu	Power Meter	NRVD	101066	2020.10.20	2021.10.19
mini-circuits	Amplifier	ZHL-42W+	608501717	NCR	NCR
Agilent	Dual Directional Coupler	778D	50422	NA	NA

## 8. System Validation

According to ANSI C63.19, before hearing aid testing commences, the experimental setup shall be validated. Sub clauses 6.3.1 through 6.3.5 include a set of pretest procedures designed to validate the experimental setup to ensure the accuracy of the results. To verify that the hearing aid performs per the manufacturer's specifications, 6.3.5 advises that the hearing aid be pretested per ANSI S3.22.

### 8.1. Test setup

1. In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator.
2. Position the E-field probe at a 15 mm distance from the top surface of the dipole, which is also fixed in an appropriate fixture.
3. Make sure that the desired measuring channel of the probe is aligned for maximum reception of the E-field generated by the dipole. This may be accomplished by rotating the probe until the maximum value is located. The E-field probe shall have been calibrated over the frequency range to be measured using standard calibration techniques.
4. Adjust the power level (20dBm  $\rightarrow$  100mW) of the signal generator at the initial starting frequency such that the desired E-field strength at the 15 mm distance from the tip of the dipole is achieved. Setting the field strength to be in the range of category M2 is advised.
5. Step the frequency in increments of  $\leq 1\%$ , adjusting the power fed into the dipole such that the desired E-field strength is maintained.

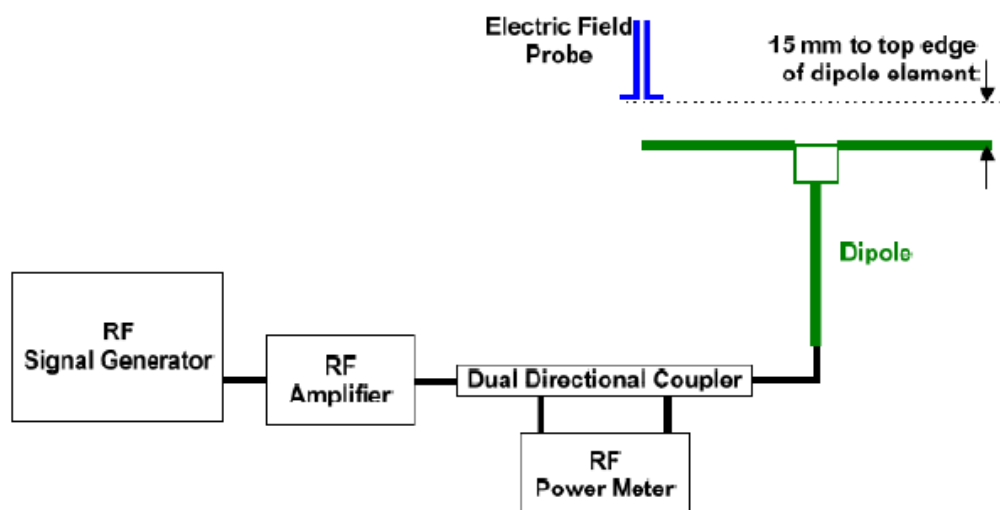


Fig 8.1 WD dipole calibration procedure

## 8.2. Validation Result

After testing, record the frequency and signal generator setting at each frequency for use during the actual immunity test. Comparing to the original E-field value provided by SPEAG, the verification data should be within its specification of 25 %. Table 6.1 shows the target value and measured value. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to annex A of this report. Deviation = ((Average E-field Value) - (Target value)) / (Target value) \* 100%

Fre. (MHz)	Input Power (mW)	Target Value (V/m)	E-Field above high end (V/m)	E-Field above low end (V/m)	Average Value (V/m)	Deviation (%)	Limit (%)	Date
835	100	110.8	120.92	120.5	120.71	8.94	±12.8	2021.03.12
1880	100	89.5	97.05	95.83	96.44	7.75	±12.8	2021.03.12
2300	100	72.7	81.7	78.7	80.2	10.32	±12.8	2021.03.12
2600	100	86.8	94.51	91.94	93.225	7.40	±12.8	2021.03.12

## 9. Modulation Interference Factor

The HAC Standard ANSI C63.19-2011 defines a new scaling using the Modulation Interference Factor (MIF). For any specific fixed and repeatable modulated signal, a modulation interference factor (MIF, expressed in dB) may be developed that relates its interference potential to its steady-state rms signal level or average power level.

This factor is a function only of the audio-frequency amplitude modulation characteristics of the signal and is the same for field-strength and conducted power measurements. It is important to emphasize that the MIF is valid only for a specific repeatable audio-frequency amplitude modulation characteristic. Any change in modulation characteristic requires determination and application of a new MIF.

The Modulation Interference factor (MIF, in dB) is added to the measured average E-field (in dBV/m) and converts it to the RF Audio Interference level (in dBV/m). This level considers the audible amplitude modulation components in the RF E-field. CW fields without amplitude modulation are assumed to not interfere with the hearing aid electronics. Modulations without time slots and low fluctuations at low frequencies have low MIF values, TDMA modulations with narrow transmission and repetition rates of few 100 Hz have high MIF values and give similar classifications as ANSI C63.19-2011. ER3D, EF3D and EU2D E-field probes have a bandwidth <10 kHz and can therefore not evaluate the RF envelope in the full audio band. DASY52 is therefore using the indirect measurement method according to ANSI C63.19-2011 which is the primary method. These near field probes read the averaged E-field measurement. Especially for the new high peak-to-average (PAR) signal types, the probes shall be linearized by PMR calibration in order to not overestimate the field reading. Probe Modulation Response (PMR) calibration linearizes the probe response over its dynamic range for specific modulations which are characterized by their UID and result in an uncertainty specified in the probe calibration certificate. The MIF is characteristic for a given waveform envelope and can be used as a constant conversion factor if the probe has been PMR calibrated. The evaluation method for the MIF is defined in ANSI C63.19-2011 section D.7. An RMS demodulated RF signal is fed to a spectral filter (similar to an A weighting filter) and forwarded to a temporal filter acting as a quasi-peak detector. The averaged output of these filtering is scaled to a 1 kHz 80% AM signal as reference. MIF measurement requires additional instrumentation and is not well suited for evaluation by the end user with reasonable uncertainty. It may alternatively be determined through analysis and simulation, because it is constant and characteristic for a communication signal. DASY52 uses well-defined signals for PMR calibration. The MIF of these signals has been determined by simulation and it is automatically applied. The MIF measurement uncertainty is estimated as follows, declared by HAC equipment provider SPEAG, for modulation frequencies from slotted waveforms with fundamental frequency and at least 2 harmonics within 10 kHz:



0.2 dB for MIF	0.5 dB for MIF	1 dB for MIF
-7dB to +5 dB	-13dB to +11 dB	> -20 dB

MIF values applied in this test report were provided by the HAC equipment provider of SPEAG, and the worst values for all air interface are listed below to be determine the Low-power Exemption.

UID	Communication System Name	MIF(dB)
10021	GSM-FDD(TDMA,GMSK)	3.63
10025	EDGE-FDD (TDMA, 8PSK, TN 0)	3.75
10460	UMTS-FDD(WCDMA, AMR)	-25.43
10225	UMTS-FDD (HSPA+)	-20.39
10081	CDMA2000 (1xRTT, RC3 Full Rate)	-19.71
10295	CDMA2000 (1xRTT, RC1 SO3, 1/8th Rate 25 fr.)	3.26
10403	CDMA2000 (1xEV-DO)	-17.67
10169	LTE-FDD(SC-FDMA,1RB,20MHz,QPSK)	-15.63
10170	LTE-FDD(SC-FDMA,1RB,20MHz,16-QAM)	-9.76
10179	LTE-FDD(SC-FDMA,1RB,20MHz,64-QAM)	-9.93
10181	LTE-FDD(SC-FDMA,1RB,15MHz,QPSK)	-15.63
10175	LTE-FDD(SC-FDMA,1RB,10MHz,QPSK)	-15.63
10177	LTE-FDD(SC-FDMA,1RB,5MHz,QPSK)	-15.63
10184	LTE-FDD(SC-FDMA,1RB,3MHz,QPSK)	-15.62
10187	LTE-FDD(SC-FDMA,1RB,1.4MHz,QPSK)	-15.62
10172	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	-1.62
10173	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	-1.44
10174	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	-1.54
10240	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	-1.62
10237	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	-1.62
10234	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	-1.62
10231	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	-1.62
10228	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	-1.62
10061	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)	-2.02
10077	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps)	0.12
10427	IEEE 802.11n (HT Greeneld, 150 Mbps, 64-QAM)	-13.44
10069	IEEE 802.11a/n WiFi 5 GHz (OFDM, 54 Mbps)	-3.15
10616	IEEE 802.11ac WiFi (40MHz, MCS0, 90pc duty cycle)	-5.57



## 10. Conducted Power

### 10.1. Full Power

#### ➤ GSM Conducted Power

GSM850	Burst Average Power (dBm)			Frame-Average Power (dBm)		
TX Channel	128	189	251	128	189	251
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8
GSM (GMSK, 1 Tx slot)	32.71	32.83	32.77	23.71	23.83	23.77

GSM1900	Burst Average Power (dBm)			Frame-Average Power (dBm)		
TX Channel	512	661	810	512	661	810
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8
GSM (GMSK, 1 Tx slot)	30.32	30.51	30.42	21.32	21.51	21.42

#### ➤ CDMA Conducted Power

Band	CDMA2000 BC0			Tune-up Limit (dBm)
TX Channel	1013	384	777	
Frequency (MHz)	824.7	836.52	848.31	
1xRTT RC1 SO3, 1/8th Rate	23.02	23.01	23.12	23.50

Band	CDMA2000 BC1			Tune-up Limit (dBm)
TX Channel	25	600	1175	
Frequency (MHz)	1851.25	1880	1908.75	
1xRTT RC1 SO3, 1/8th Rate	22.88	22.95	22.85	23.50

#### ➤ LTE Conducted Power

##### <TDD-LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Low channel	Middle channel	High channel	Tune-up limit (dBm)
Channel				37850	38000	38150	
Frequency (MHz)				2580	2595	2610	
20	QPSK	1	0	22.61	22.77	22.72	23.50
20	QPSK	1	49	22.60	22.67	22.65	
20	QPSK	1	99	22.56	22.54	22.54	
20	QPSK	50	0	21.48	21.54	21.41	22.50



20	QPSK	50	24	21.44	21.51	21.51	
20	QPSK	50	50	21.51	21.36	21.35	
20	QPSK	100	0	21.48	21.58	21.54	

**<TDD-LTE Band 40A>**

BW [MHz]	Modulation	RB Size	RB Offset	Low channel	Middle channel	High channel	Tune-up limit (dBm)
Channel				38750			
Frequency (MHz)				2310			
10	QPSK	1	0	22.79			23.50
10	QPSK	1	25	22.73			
10	QPSK	1	49	22.55			
10	QPSK	25	0	21.91			22.50
10	QPSK	25	12	21.81			
10	QPSK	25	25	21.82			
10	QPSK	50	0	21.84			

**<TDD-LTE Band 40B>**

BW [MHz]	Modulation	RB Size	RB Offset	Low channel	Middle channel	High channel	Tune-up limit (dBm)
Channel				39200			
Frequency (MHz)				2355			
10	QPSK	1	0	22.75			23.50
10	QPSK	1	25	22.66			
10	QPSK	1	49	22.69			
10	QPSK	25	0	21.88			22.50
10	QPSK	25	12	21.85			
10	QPSK	25	25	21.77			
10	QPSK	50	0	21.85			



## 10.2. Reduced Power

### ➤ GSM Conducted Power

GSM850	Burst Average Power (dBm)			Frame-Average Power (dBm)		
TX Channel	128	189	251	128	189	251
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8
GSM (GMSK, 1 Tx slot)	25.66	25.20	25.60	16.66	16.20	16.60

GSM1900	Burst Average Power (dBm)			Frame-Average Power (dBm)		
TX Channel	512	661	810	512	661	810
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8
GSM (GMSK, 1 Tx slot)	23.87	23.81	23.76	14.87	14.81	14.76

### ➤ CDMA Conducted Power

Band	CDMA2000 BC0			Tune-up Limit (dBm)
TX Channel	1013	384	777	
Frequency (MHz)	824.7	836.52	848.31	
1xRTT RC1 SO3, 1/8th Rate	17.79	17.81	17.51	

Band	CDMA2000 BC1			Tune-up Limit (dBm)
TX Channel	25	600	1175	
Frequency (MHz)	1851.25	1880	1908.75	
1xRTT RC1 SO3, 1/8th Rate	15.35	15.76	15.39	

### ➤ LTE Conducted Power

#### <TDD-LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Low channel	Middle channel	High channel	Tune-up limit (dBm)
Channel				37850	38000	38150	
Frequency (MHz)				2580	2595	2610	
20	QPSK	1	0	15.57	15.58	15.36	16.00
20	QPSK	1	49	15.54	15.48	15.44	
20	QPSK	1	99	15.43	15.38	15.51	
20	QPSK	50	0	14.64	14.75	14.59	15.00
20	QPSK	50	24	14.71	14.65	14.65	
20	QPSK	50	50	14.73	14.66	14.63	
20	QPSK	100	0	14.75	14.71	14.68	

**<TDD-LTE Band 40A>**

BW [MHz]	Modulation	RB Size	RB Offset	Low channel	Middle channel	High channel	Tune-up limit (dBm)
Channel				38750			
Frequency (MHz)				2310			
10	QPSK	1	0	15.62			16.00
10	QPSK	1	25	15.40			
10	QPSK	1	49	15.27			
10	QPSK	25	0	14.78			15.00
10	QPSK	25	12	14.69			
10	QPSK	25	25	14.66			
10	QPSK	50	0	14.76			

**<TDD-LTE Band 40B>**

BW [MHz]	Modulation	RB Size	RB Offset	Low channel	Middle channel	High channel	Tune-up limit (dBm)
Channel				39200			
Frequency (MHz)				2355			
10	QPSK	1	0	15.58			16.00
10	QPSK	1	25	15.49			
10	QPSK	1	49	15.49			
10	QPSK	25	0	14.77			15.00
10	QPSK	25	12	14.74			
10	QPSK	25	25	14.62			
10	QPSK	50	0	14.69			

**Note:**

The EUT respectively defined the top and bottom antenna maximum output power in the software and the default antenna including TX & RX is the bottom antenna. The top and bottom antenna will switch automatically according to the receiver signal strength and maximum transmission power level.

## 11. Low-power Exemption

Air Interface	Max Tune-up Limit (dBm)	Worst Case MIF (dB)	Power + MIF(dB)	C63.19 Test Required
GSM 850	33.50	3.63	37.13	Yes
GSM 1900	31.50	3.63	35.13	Yes
EDGE 850	26.50	3.75	30.25	Yes
EDGE 1900	22.50	3.75	26.25	Yes
WCDMA II	24.00	-25.43	-1.43	No
WCDMA IV	24.00	-25.43	-1.43	No
WCDMA V	24.00	-25.43	-1.43	No
CDMA BC0 Full Rate	24.00	-19.71	4.29	No
CDMA BC0 1/8th Frame Rate	23.50	3.26	26.76	Yes
BC0 EVDO	24.00	-17.67	6.33	No
CDMA BC1 Full Rate	24.00	-19.71	4.29	No
CDMA BC1 1/8th Frame Rate	23.50	3.26	26.76	Yes
BC0 EVDO	24.00	-17.67	6.33	No
LTE Band 2	23.50	-15.63	7.87	No
LTE Band 4	23.00	-15.63	7.37	No
LTE Band 5	24.00	-15.63	8.37	No
LTE Band 7	23.00	-15.63	7.37	No
LTE Band 12	24.00	-15.63	8.37	No
LTE Band 17	24.00	-15.63	8.37	No
LTE Band 18	24.00	-15.63	8.37	No
LTE Band 19	24.00	-15.63	8.37	No
LTE Band 26	23.50	-15.63	7.87	No
LTE Band 38	23.50	-1.62	21.88	Yes
LTE Band 40A	23.50	-1.62	21.88	Yes
LTE Band 40B	23.50	-1.62	21.88	Yes
LTE Band 66	23.50	-15.63	7.87	No

### Note:

1. According to ANSI C63.19 2011-version, for the air interface technology of a device is exempt from testing when its average antenna input power plus its MIF is  $\leq 17$  dBm for any of its operating modes.
2. For all of bands, the worst case of maximum tune-up limit will be test RF emission, therefore WCDMA and FDD-LTE mode is not necessary for testing.
3. For GSM mode, only GSM voice will be tested for the low power exemption of EDGE is less than Voice mode.



4. HAC RF rating is M4 for the air interface which meets the low power exemption.
5. The power reduction is lower than the full power, so please use the full power for the exemption evaluation.

## 12. Summary Test Results

### ➤ Top Antenna

Plot No.	Air Interface	Mode	Channel	MIF	E-Field (dBV/m)	Margin to FCC M3 limit (dB)	E-Field M Rating
1	GSM850	GSM Voice	128	3.63	37.75	7.25	M4
2	GSM850	GSM Voice	189	3.63	38.08	6.92	M4
3	GSM850	GSM Voice	251	3.63	37.96	7.04	M4
4	GSM1900	GSM Voice	512	3.63	31.41	3.59	M3
5	GSM1900	GSM Voice	661	3.63	31.81	3.19	M3
6	GSM1900	GSM Voice	810	3.63	31.64	3.36	M3
7	CDMA BC0	1xRTT, RC1 SO3, 1/8th Rate	1013	3.63	15.33	29.67	M4
8	CDMA BC0	1xRTT, RC1 SO3, 1/8th Rate	384	3.63	14.87	30.13	M4
9	CDMA BC0	1xRTT, RC1 SO3, 1/8th Rate	777	3.63	14.87	30.13	M4
10	CDMA BC1	1xRTT, RC1 SO3, 1/8th Rate	25	3.63	14.73	20.27	M4
11	CDMA BC1	1xRTT, RC1 SO3, 1/8th Rate	600	3.63	14.85	20.15	M4
12	CDMA BC1	1xRTT, RC1 SO3, 1/8th Rate	1175	3.63	15.15	19.85	M4
13	LTE Band 38	QPSK/1RB#0/20MHz	37850	-1.62	27.22	7.78	M4
14	LTE Band 38	QPSK/1RB#0/20MHz	38000	-1.62	27.12	7.88	M4
15	LTE Band 38	QPSK/1RB#0/20MHz	38150	-1.62	26.95	8.05	M4
16	LTE Band 40A	QPSK/1RB#0/10MHz	38750	-1.62	26.94	8.06	M4
17	LTE Band 40B	QPSK/1RB#0/10MHz	39200	-1.62	27.36	7.64	M4

➤ **Bottom Antenna**

Plot No.	Air Interface	Mode	Channel	MIF	E-Field (dBV/m)	Margin to FCC M3 limit (dB)	E-Field M Rating
1	GSM850	GSM Voice	128	3.63	33.03	11.97	M4
2	GSM850	GSM Voice	189	3.63	34.26	10.74	M4
3	GSM850	GSM Voice	251	3.63	34.29	10.71	M4
4	GSM1900	GSM Voice	512	3.63	28.24	6.76	M4
5	GSM1900	GSM Voice	661	3.63	28.77	6.23	M4
6	GSM1900	GSM Voice	810	3.63	27.96	7.04	M4
7	CDMA BC0	1xRTT, RC1 SO3, 1/8th Rate	1013	3.63	14.77	30.23	M4
8	CDMA BC0	1xRTT, RC1 SO3, 1/8th Rate	384	3.63	14.72	30.28	M4
9	CDMA BC0	1xRTT, RC1 SO3, 1/8th Rate	777	3.63	14.81	30.19	M4
10	CDMA BC1	1xRTT, RC1 SO3, 1/8th Rate	25	3.63	14.92	20.08	M4
11	CDMA BC1	1xRTT, RC1 SO3, 1/8th Rate	600	3.63	15.52	19.48	M4
12	CDMA BC1	1xRTT, RC1 SO3, 1/8th Rate	1175	3.63	15.83	19.17	M4
13	LTE Band 38	QPSK/1RB#0/20MHz	37850	-1.62	18.23	16.77	M4
14	LTE Band 38	QPSK/1RB#0/20MHz	38000	-1.62	19.08	15.92	M4
15	LTE Band 38	QPSK/1RB#0/20MHz	38150	-1.62	19.73	15.27	M4
16	LTE Band 40A	QPSK/1RB#0/10MHz	38750	-1.62	17.18	17.82	M4
17	LTE Band 40B	QPSK/1RB#0/10MHz	39200	-1.62	17.66	17.34	M4

**Remark:**

1. Phone condition: HAC Air on, Backlight off, maximum volume.
2. Test Engineer: Liang Yumei

## 13. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observations is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances. Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is showed in Table 12.1.



## Annex A General Information

### 1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

### 2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China

**Note:**

The main report is end here and the other annex (B,C,D,E) will be submitted separately.

\*\*\*\*\* END OF MAIN REPORT \*\*\*\*\*