

Antenna Specification

Customer Name:	EARLY LIGHT INDUSTRIAL CO., LTD
Project Name:	a786
New Material Model:	M04-0100230ROA
Old Material Model:	M2M.0081-ROA
Product Name:	SMA male to SMA female connector
Customer Number:	
Entry Category:	Mold Sample
FileVersion:	B

supplier		customer	
PREPARED BY		Purchase	
CHECKED BY		engineering	
APPROVED BY		quality	
☒ The new material ☐ recycle (The number to be recycled)			
cachet : 2022-07-05		Cachet:	

ShenZhen MyAntenna RF Technology Co.,Ltd

Address: Room 405, building r3-a, South District, Nanshan Science Park, Shenzhen

Telephone: 0755-86503881 Fax:0755-27801677

Mailbox: nfc@imyantenna.com Zip code:518057

Contents

1. Cover.....	1
2. Contents.....	2
3. Engineering Drawing.....	3
4. Performance characteristics.....	4
5. Inspection Report.....	5
6. ROHS Test Report.....	6


ShenZhen MyAntenna RF Technology Co.,Ltd

Address: Room 405, building r3-a, South District, Nanshan Science Park, Shenzhen

Telephone: 0755-86503881 Fax:0755-27801677

Mailbox: nfc@imyantenna.com Zip code:518057

3. Engineering Drawing

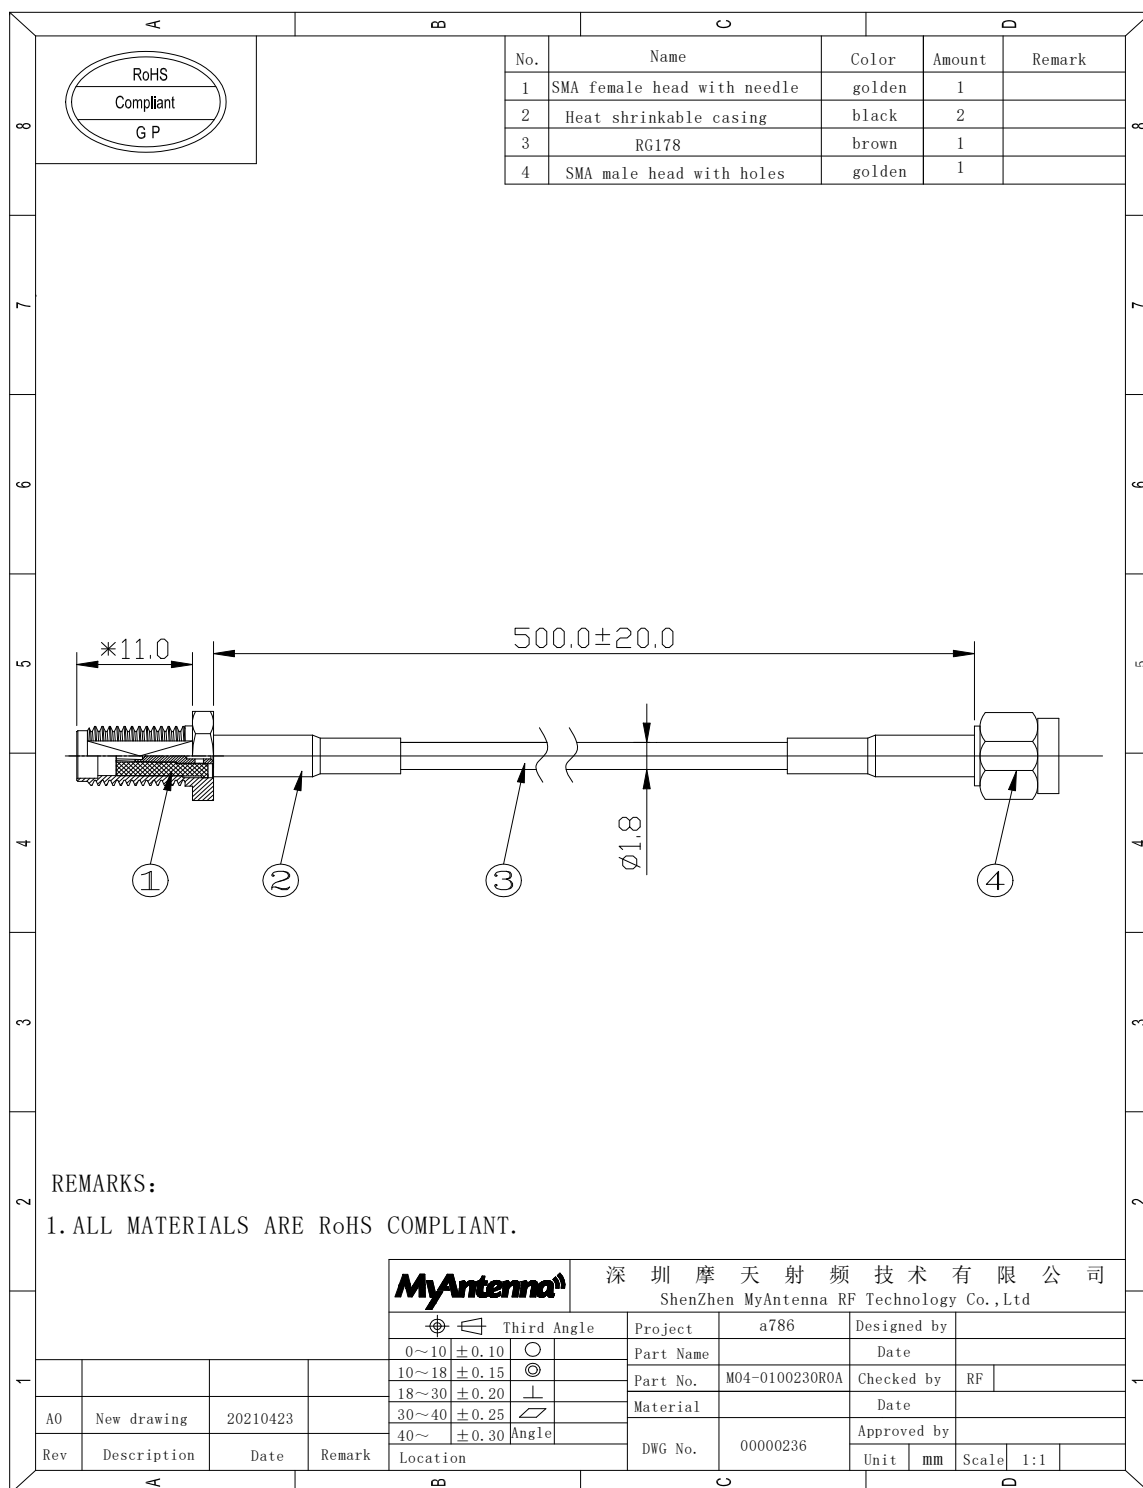

ShenZhen MyAntenna RF Technology Co.,Ltd

Address: Room 405, building r3-a, South District, Nanshan Science Park, Shenzhen

Telephone: 0755-86503881 Fax:0755-27801677

Mailbox: nfc@imyantenna.com Zip code:518057

4. Performance characteristics

project	Detailed information on	
attenuation	frequency	dB
	2. 4GHZ	-1. 42
	5. 5GHZ	-2. 16

5. Inspection Report

Project Name		a786		Product Name	SMA male to SMA female connector		Inspection Date	2022-07-05	
Appearance Standard				1、No abnormality on the antenna surface					
Dimension Standard				2、Within the required tolerances based on the drawing					
No	Inspection subject	Standard	Inspection tool	Sampling number	Result	Remark			
1	Appearance	As Above	Visually	6PCS	OK	1			
2	Dimension	As Below Chart	Vernier Caliper	6PCS	OK	2			
No	Inspection Subject	Dimension	Tool	Test Results (Recorded six groups of testing data includes the highest & lowest values)					
				1	2	3	4	5	6
1	Dimension	500±20	Caliper	505	500	508	500	502	505
2									
3									
Remark									
Supervisor: SAM		Audit: CHEN			Inspector: DONG				

6. ROHS Test Report

Project material name	material code	Report the name of the test sample	<u>testing organization</u>	testing time	Test report number	<u>test conclusion</u>	remark
a786	M04-0100230R0A	Coaxial line	SGS	2022/1/12	SZXEC2104050402	OK	
		SMA Pick up head	SGS	2021/10/21	CANEC2118965605	OK	
Legal fiction: JOYCE		verifier: chen		date: 2022-07-05	Stamp service:		