

EXHIBIT A- RADIATED SPURIOUS EMISSION DATA

report number :SHE19090021-01GE

Note : Transmit frequency is ignore ,mark →

30M-1G


BLE-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2019-11-25_20.53.56

EUT Name:	N.A	Test Engineer:	LYT
Manufacturer:	N.A	Test Standard:	FCC
Model:	N.A	Work Addition:	Normal
Temp.(oC):	21.9	Load:	Full load
Hum.:	45	Remark:	DR-RSE01-E19090021-01#05

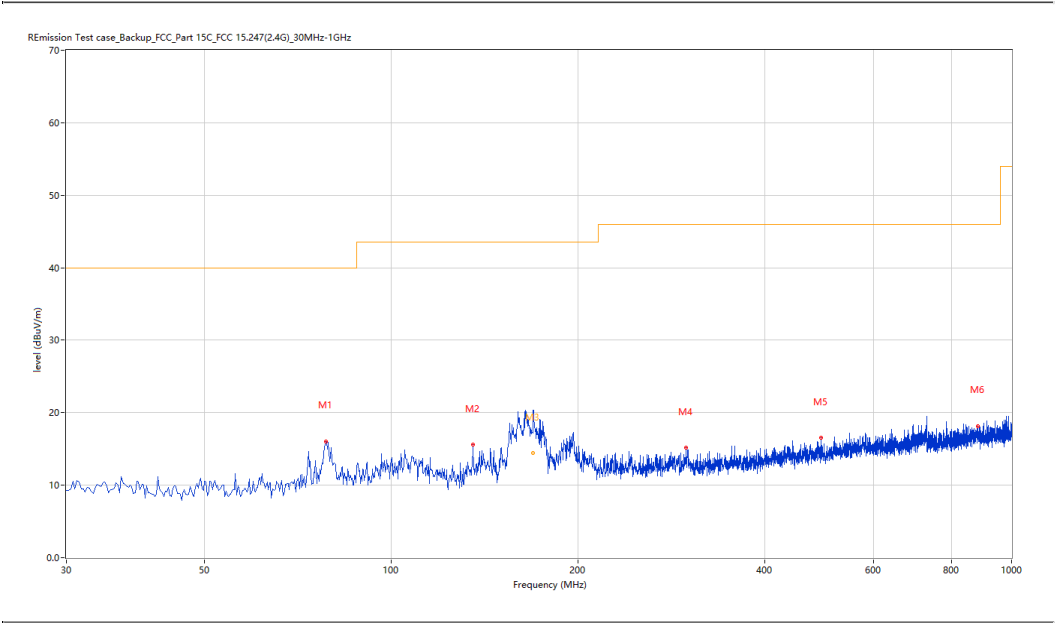

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	78.488	16.06	2.38	40.0	-23.94	Peak	269.70	100	Horizontal	Pass
2	135.704	15.58	3.13	43.5	-27.92	Peak	150.00	100	Horizontal	Pass
3	169.571	26.44	3.46	43.5	-17.06	Peak	158.70	194	Horizontal	Pass
3*	169.571	14.42	3.46	43.5	-29.08	QP	158.70	194	Horizontal	Pass
4	299.108	15.13	4.70	46.0	-30.87	Peak	171.00	100	Horizontal	Pass
5	492.817	16.51	5.95	46.0	-29.49	Peak	102.10	100	Horizontal	Pass
6	882.902	18.15	8.03	46.0	-27.85	Peak	205.60	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2019-11-26_10.34.51

EUT Name: N.A

Test Engineer: LYT

Manufacture: N.A

Test Standard: FCC

Model Name: N.A


Work Additon: Normal

Templ.(oC): 21.9

Load: Full load

Hum: 45

Remark: DR-RSE01-E19090021-01#05

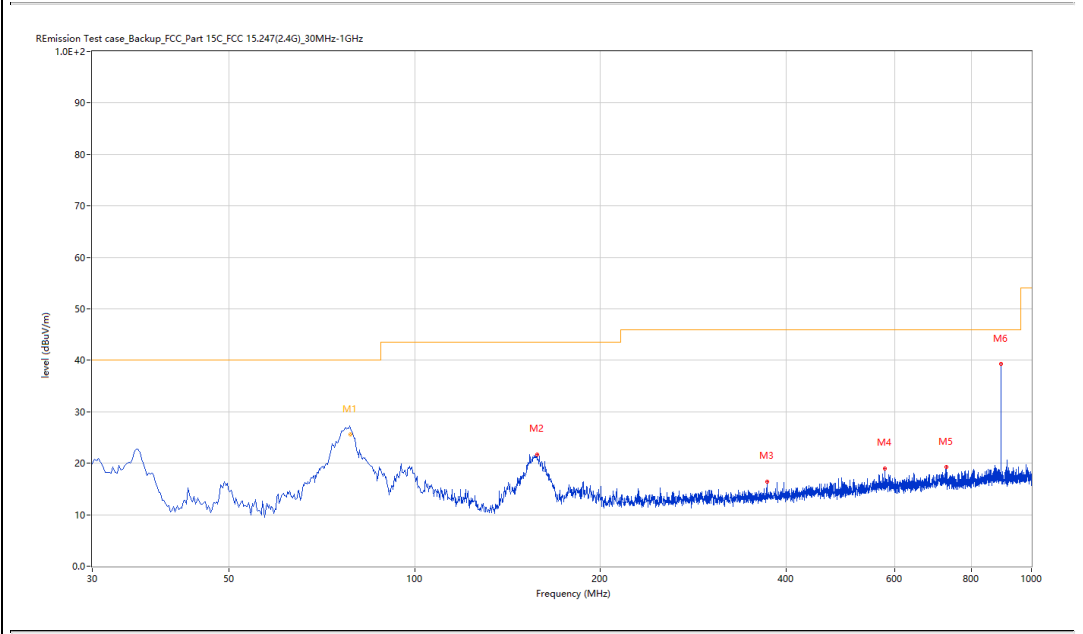

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	78.579	28.88	2.38	40.0	-11.12	Peak	306.60	151	Vertical	Pass
1*	78.579	25.65	2.38	40.0	-14.35	QP	306.60	151	Vertical	Pass
2	157.766	21.75	3.35	43.5	-21.75	Peak	42.70	100	Vertical	Pass
3	372.809	16.48	5.18	46.0	-29.52	Peak	3.90	100	Vertical	Pass
4	579.125	19.04	6.46	46.0	-26.96	Peak	158.90	100	Vertical	Pass
5	728.468	19.28	7.29	46.0	-26.72	Peak	359.50	100	Vertical	Pass
6	892.599	39.24	8.10	46.0	-6.76	Peak	176.30	100	Vertical	Pass

1-18G

BLE-Low channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2019-11-26_11.42.47

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 21.2

Hum.: 53

Test Engineer: LYT


Test Standard: FCC

Work Addition: Normal

Load: Full load

Remark: DR-RSE01-E19090021-01#05

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

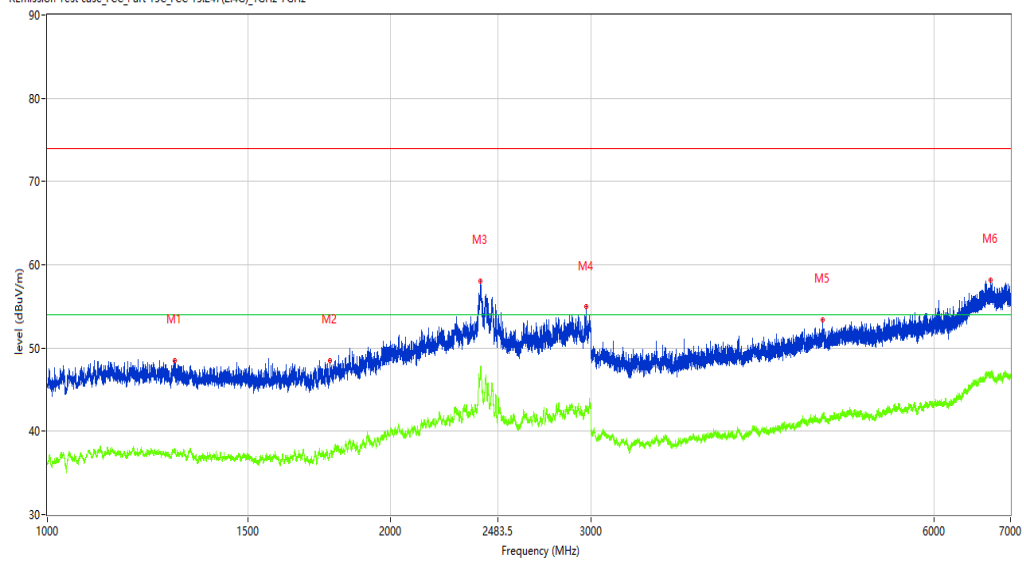

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1293.713	48.46	-4.32	74.0	-25.54	Peak	105.10	100	Horizontal	Pass
1**	1293.713	37.66	-4.32	54.0	-16.34	AV	105.10	100	Horizontal	Pass
2	1769.654	48.54	-4.67	74.0	-25.46	Peak	105.10	100	Horizontal	Pass
2**	1769.654	36.88	-4.67	54.0	-17.12	AV	105.10	100	Horizontal	Pass
3	2399.825	58.00	5.38	74.0	-16.00	Peak	76.90	100	Horizontal	Pass
3**	2399.825	47.51	5.38	54.0	-6.49	AV	76.90	100	Horizontal	Pass
4	2971.004	55.01	2.70	74.0	-18.99	Peak	170.60	100	Horizontal	Pass
4**	2971.004	42.57	2.70	54.0	-11.43	AV	170.60	100	Horizontal	Pass
5	4792.776	53.37	1.05	74.0	-20.63	Peak	155.20	100	Horizontal	Pass
5**	4792.776	41.85	1.05	54.0	-12.15	AV	155.20	100	Horizontal	Pass
6	6719.035	58.15	5.86	74.0	-15.85	Peak	0.00	100	Horizontal	Pass
6**	6719.035	46.94	5.86	54.0	-7.06	AV	0.00	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2019-11-04_20.07.58

EUT Name: N.A

Test Engineer: Xcj

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: Normal

Temp.(oC): 22.6

Load: Full load

Hum.: 53%

Remark: DR-RE01-E19090021-01#05

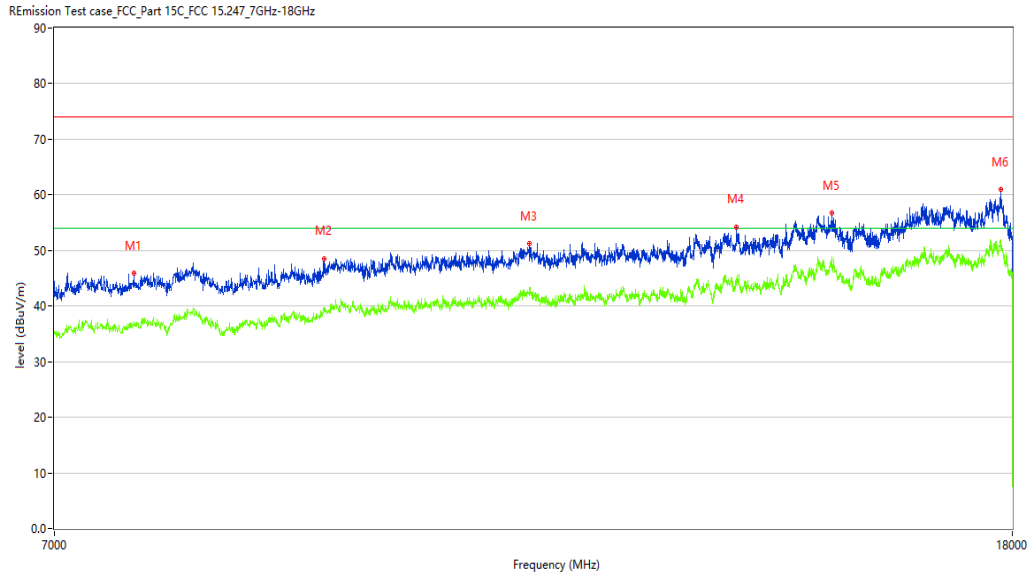

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7571.857	45.87	3.31	74.0	-28.13	Peak	113.90	150	Horizontal	Pass
1**	7571.857	36.64	3.31	54.0	-17.36	AV	113.90	150	Horizontal	Pass
2	9130.717	48.56	7.47	74.0	-25.44	Peak	186.60	150	Horizontal	Pass
2**	9130.717	38.97	7.47	54.0	-15.03	AV	186.60	150	Horizontal	Pass
3	11181.705	51.22	10.75	74.0	-22.78	Peak	81.90	150	Horizontal	Pass
3**	11181.705	42.50	10.75	54.0	-11.50	AV	81.90	150	Horizontal	Pass
4	13716.571	54.24	13.50	74.0	-19.76	Peak	349.90	150	Horizontal	Pass
4**	13716.571	44.52	13.50	54.0	-9.48	AV	349.90	150	Horizontal	Pass
5	15066.483	56.72	16.26	74.0	-17.28	Peak	4.50	150	Horizontal	Pass
5**	15066.483	48.88	16.26	54.0	-5.12	AV	4.50	150	Horizontal	Pass
6	17802.049	60.90	22.02	74.0	-13.10	Peak	249.50	150	Horizontal	Pass
6**	17802.049	51.89	22.02	54.0	-2.11	AV	249.50	150	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2019-11-26_11:50.10

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 21.2

Load: Full load

Hum.: 53

Remark: DR-RSE01-E19090021-01#05

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

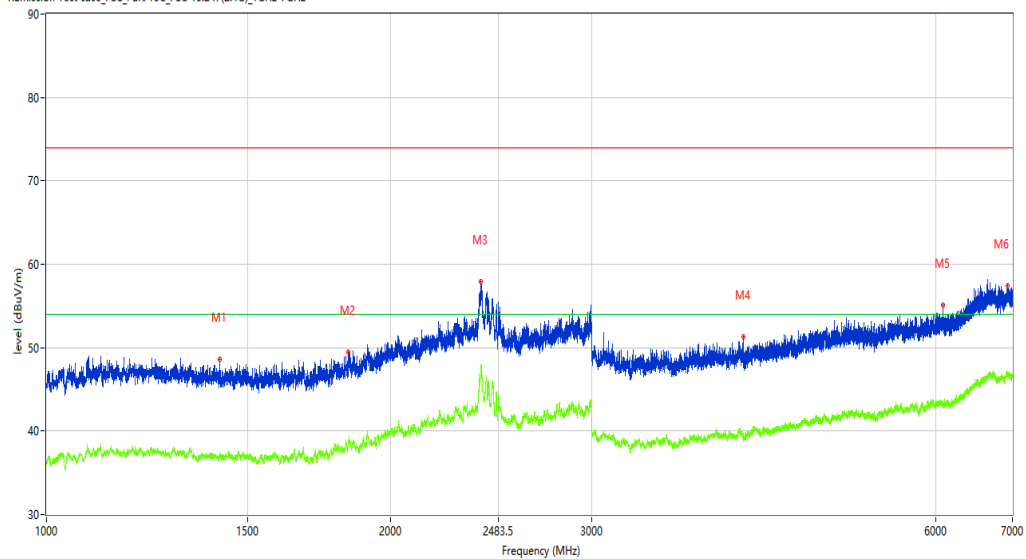

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1417.448	48.62	-5.14	74.0	-25.38	Peak	115.30	100	Vertical	Pass
1**	1417.448	37.20	-5.14	54.0	-16.80	AV	115.30	100	Vertical	Pass
2	1837.645	49.44	-3.79	74.0	-24.56	Peak	189.40	100	Vertical	Pass
2**	1837.645	38.63	-3.79	54.0	-15.37	AV	189.40	100	Vertical	Pass
3	2400.075	57.98	5.37	74.0	-16.02	Peak	184.90	100	Vertical	Pass
3**	2400.075	48.03	5.37	54.0	-5.97	AV	184.90	100	Vertical	Pass
4	4068.866	51.31	-0.07	74.0	-22.69	Peak	183.70	100	Vertical	Pass
4**	4068.866	39.80	-0.07	54.0	-14.20	AV	183.70	100	Vertical	Pass
5	6087.114	55.07	2.68	74.0	-18.93	Peak	0.00	100	Vertical	Pass
5**	6087.114	43.29	2.68	54.0	-10.71	AV	0.00	100	Vertical	Pass
6	6929.509	57.45	5.72	74.0	-16.55	Peak	215.70	100	Vertical	Pass
6**	6929.509	46.82	5.72	54.0	-7.18	AV	215.70	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2019-11-04_19:57:35

EUT Name: N.A

Test Engineer: Xcj

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: Normal

Temp.(oC): 22.6

Load: Full load

Hum.: 53%

Remark: DR-RE01-E19090021-01#05

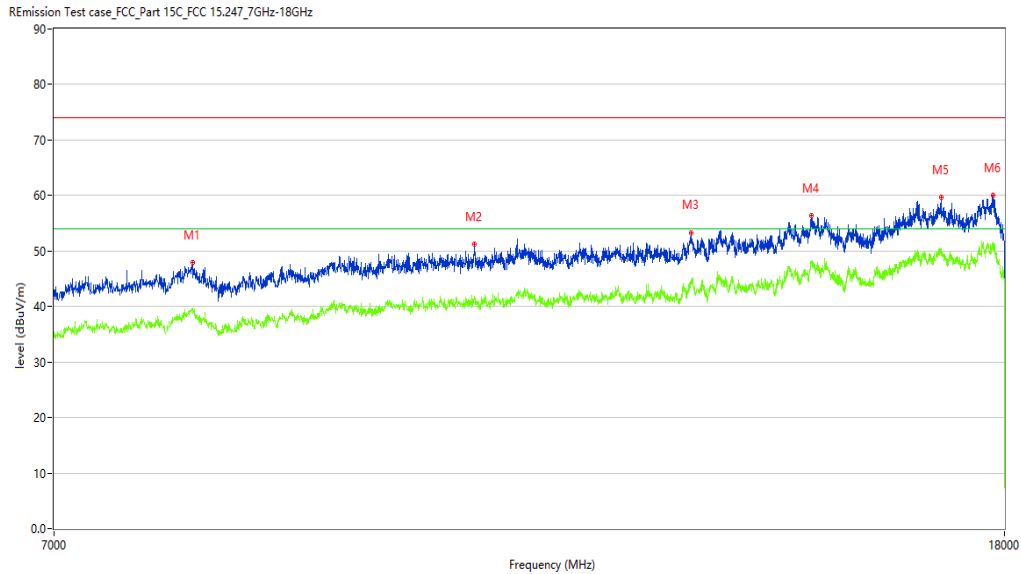

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8030.992	47.87	5.41	74.0	-26.13	Peak	132.50	150	Vertical	Pass
1**	8030.992	39.67	5.41	54.0	-14.33	AV	132.50	150	Vertical	Pass
2	10631.842	51.28	10.02	74.0	-22.72	Peak	173.50	150	Vertical	Pass
2**	10631.842	41.57	10.02	54.0	-12.43	AV	173.50	150	Vertical	Pass
3	13180.455	53.35	12.27	74.0	-20.65	Peak	330.90	150	Vertical	Pass
3**	13180.455	44.27	12.27	54.0	-9.73	AV	330.90	150	Vertical	Pass
4	14863.034	56.39	17.96	74.0	-17.61	Peak	281.70	150	Vertical	Pass
4**	14863.034	48.17	17.96	54.0	-5.83	AV	281.70	150	Vertical	Pass
5	16897.526	59.66	20.01	74.0	-14.34	Peak	0.90	150	Vertical	Pass
5**	16897.526	50.47	20.01	54.0	-3.53	AV	0.90	150	Vertical	Pass
6	17791.052	60.00	22.14	74.0	-14.00	Peak	128.10	150	Vertical	Pass
6**	17791.052	51.61	22.14	54.0	-2.39	AV	128.10	150	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2019-11-26_11.44.55

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 21.2

Load: Full load

Hum.: 53

Remark: DR-RSE01-E19090021-01#05

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

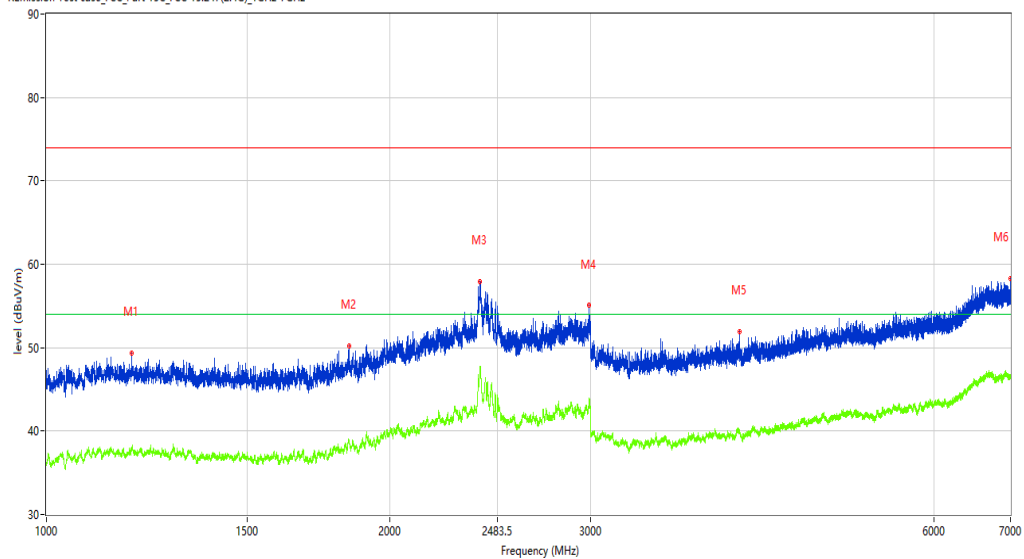

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1187.477	49.39	-3.93	74.0	-24.61	Peak	244.90	100	Horizontal	Pass
1**	1187.477	37.72	-3.93	54.0	-16.28	AV	244.90	100	Horizontal	Pass
2	1841.145	50.18	-3.51	74.0	-23.82	Peak	156.20	100	Horizontal	Pass
2**	1841.145	38.83	-3.51	54.0	-15.17	AV	156.20	100	Horizontal	Pass
3	2398.825	57.94	5.42	74.0	-16.06	Peak	240.40	100	Horizontal	Pass
3**	2398.825	47.08	5.42	54.0	-6.92	AV	240.40	100	Horizontal	Pass
4	2990.001	55.05	3.08	74.0	-18.95	Peak	193.40	100	Horizontal	Pass
4**	2990.001	43.02	3.08	54.0	-10.98	AV	193.40	100	Horizontal	Pass
5	4052.868	51.92	-0.09	74.0	-22.08	Peak	292.40	100	Horizontal	Pass
5**	4052.868	39.72	-0.09	54.0	-14.28	AV	292.40	100	Horizontal	Pass
6	6996.500	58.26	5.62	74.0	-15.74	Peak	247.00	100	Horizontal	Pass
6**	6996.500	46.69	5.62	54.0	-7.31	AV	247.00	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2019-11-04_20.06.35

EUT Name: N.A

Test Engineer: Xcj

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: Normal

Temp.(oC): 22.6

Load: Full load

Hum.: 53%

Remark: DR-RE01-E19090021-01#05

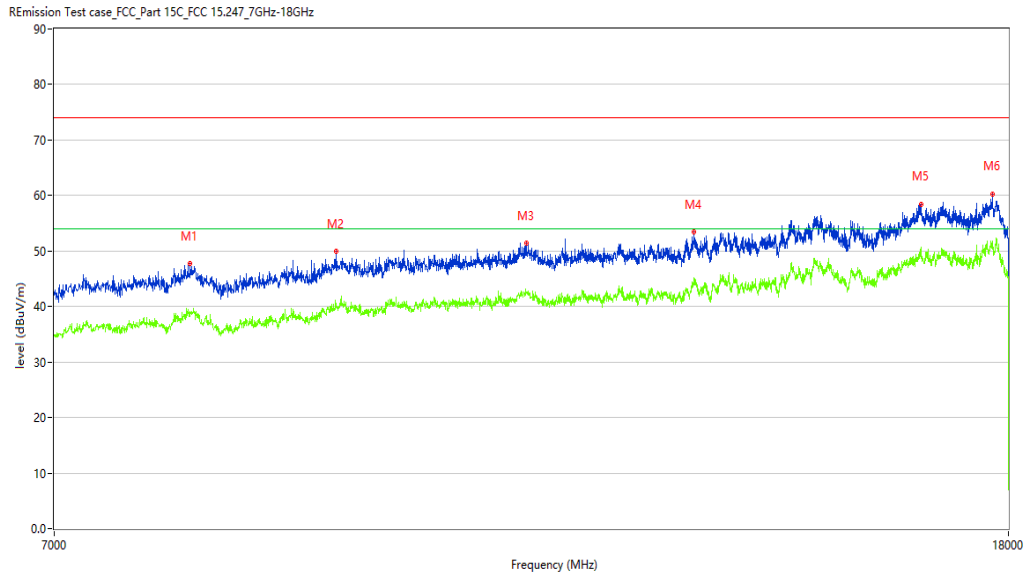

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8006.248	47.71	5.67	74.0	-26.29	Peak	300.10	150	Horizontal	Pass
1**	8006.248	39.18	5.67	54.0	-14.82	AV	300.10	150	Horizontal	Pass
2	9257.186	49.94	8.68	74.0	-24.06	Peak	0.00	150	Horizontal	Pass
2**	9257.186	39.86	8.68	54.0	-14.14	AV	0.00	150	Horizontal	Pass
3	11167.958	51.47	10.79	74.0	-22.53	Peak	168.40	150	Horizontal	Pass
3**	11167.958	42.67	10.79	54.0	-11.33	AV	168.40	150	Horizontal	Pass
4	13188.703	53.45	12.31	74.0	-20.55	Peak	277.00	150	Horizontal	Pass
4**	13188.703	45.27	12.31	54.0	-8.73	AV	277.00	150	Horizontal	Pass
5	16507.123	58.46	20.53	74.0	-15.54	Peak	140.80	150	Horizontal	Pass
5**	16507.123	49.74	20.53	54.0	-4.26	AV	140.80	150	Horizontal	Pass
6	17722.319	60.32	23.42	74.0	-13.68	Peak	1.70	150	Horizontal	Pass
6**	17722.319	51.85	23.42	54.0	-2.15	AV	1.70	150	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2019-11-26_11.51.48

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 21.2

Load: Full load

Hum.: 53

Remark: DR-RSE01-E19090021-01#05

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

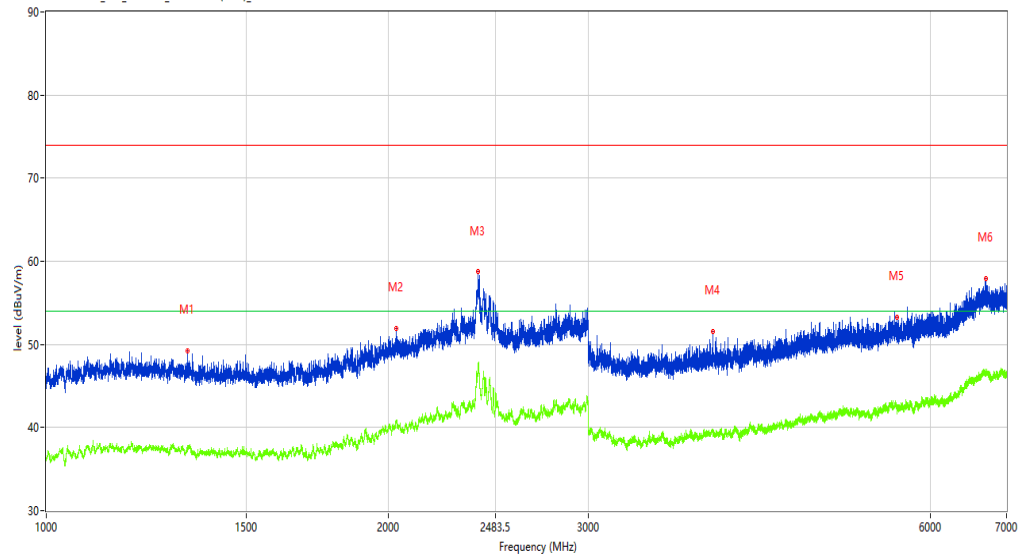

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1332.208	49.23	-4.50	74.0	-24.77	Peak	192.80	100	Vertical	Pass
1**	1332.208	37.45	-4.50	54.0	-16.55	AV	192.80	100	Vertical	Pass
2	2033.871	51.88	-1.56	74.0	-22.12	Peak	306.40	100	Vertical	Pass
2**	2033.871	40.70	-1.56	54.0	-13.30	AV	306.40	100	Vertical	Pass
3	2398.825	58.72	5.42	74.0	-15.28	Peak	360.00	100	Vertical	Pass
3**	2398.825	47.48	5.42	54.0	-6.52	AV	360.00	100	Vertical	Pass
4	3860.392	51.55	-0.50	74.0	-22.45	Peak	0.50	100	Vertical	Pass
4**	3860.392	39.68	-0.50	54.0	-14.32	AV	0.50	100	Vertical	Pass
5	5603.675	53.25	2.06	74.0	-20.75	Peak	59.80	100	Vertical	Pass
5**	5603.675	42.45	2.06	54.0	-11.55	AV	59.80	100	Vertical	Pass
6	6715.036	57.95	5.88	74.0	-16.05	Peak	41.20	100	Vertical	Pass
6**	6715.036	46.51	5.88	54.0	-7.49	AV	41.20	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2019-11-04_19.59.14

EUT Name: N.A

Test Engineer: Xcj

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: Normal

Temp.(oC): 22.6

Load: Full load

Hum.: 53%

Remark: DR-RE01-E19090021-01#05

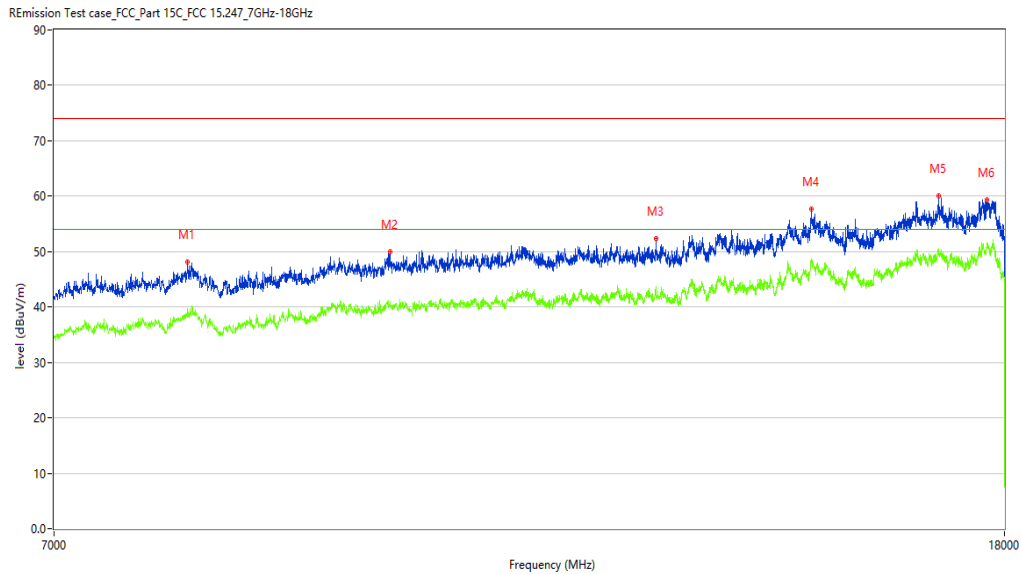

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7995.251	48.08	5.63	74.0	-25.92	Peak	91.60	150	Vertical	Pass
1**	7995.251	39.65	5.63	54.0	-14.35	AV	91.60	150	Vertical	Pass
2	9774.056	49.98	9.67	74.0	-24.02	Peak	82.30	150	Vertical	Pass
2**	9774.056	40.29	9.67	54.0	-13.71	AV	82.30	150	Vertical	Pass
3	12735.066	52.30	11.24	74.0	-21.70	Peak	359.20	150	Vertical	Pass
3**	12735.066	42.98	11.24	54.0	-11.02	AV	359.20	150	Vertical	Pass
4	14852.037	57.66	18.20	74.0	-16.34	Peak	6.00	150	Vertical	Pass
4**	14852.037	48.61	18.20	54.0	-5.39	AV	6.00	150	Vertical	Pass
5	16853.537	60.02	20.46	74.0	-13.98	Peak	355.10	150	Vertical	Pass
5**	16853.537	50.42	20.46	54.0	-3.58	AV	355.10	150	Vertical	Pass
6	17694.826	59.33	24.16	74.0	-14.67	Peak	251.30	150	Vertical	Pass
6**	17694.826	51.47	24.16	54.0	-2.53	AV	251.30	150	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2019-11-26_11.46.56

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 21.2

Load: Full load

Hum.: 53

Remark: DR-RSE01-E19090021-01#05

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

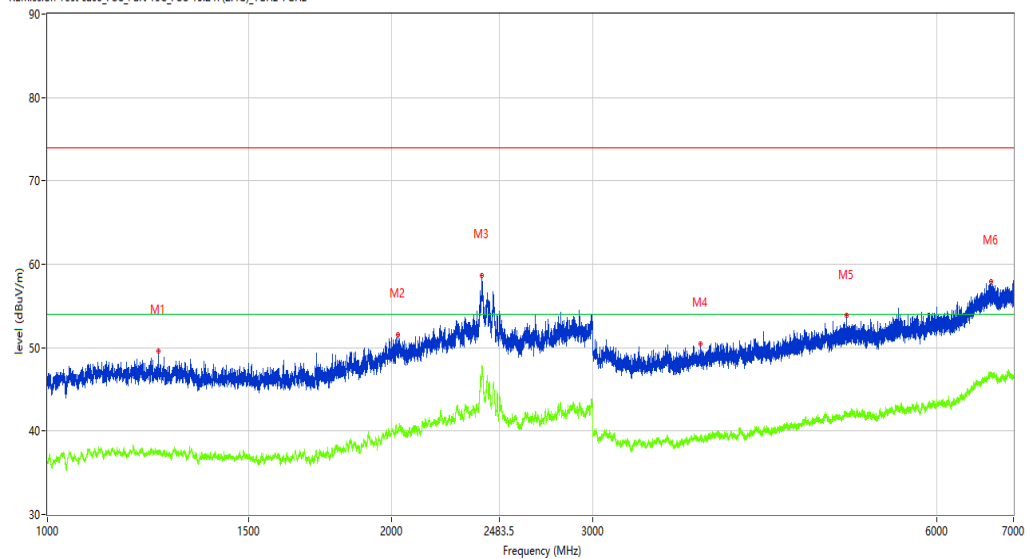

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1249.719	49.61	-4.38	74.0	-24.39	Peak	268.40	100	Horizontal	Pass
1**	1249.719	37.72	-4.38	54.0	-16.28	AV	268.40	100	Horizontal	Pass
2	2025.872	51.57	-2.20	74.0	-22.43	Peak	348.00	100	Horizontal	Pass
2**	2025.872	39.89	-2.20	54.0	-14.11	AV	348.00	100	Horizontal	Pass
3	2398.575	58.61	5.43	74.0	-15.39	Peak	46.20	100	Horizontal	Pass
3**	2398.575	47.20	5.43	54.0	-6.80	AV	46.20	100	Horizontal	Pass
4	3729.409	50.47	-0.74	74.0	-23.53	Peak	23.00	100	Horizontal	Pass
4**	3729.409	39.15	-0.74	54.0	-14.85	AV	23.00	100	Horizontal	Pass
5	5003.750	53.82	1.66	74.0	-20.18	Peak	340.40	100	Horizontal	Pass
5**	5003.750	42.15	1.66	54.0	-11.85	AV	340.40	100	Horizontal	Pass
6	6690.539	57.89	5.86	74.0	-16.11	Peak	248.80	100	Horizontal	Pass
6**	6690.539	46.61	5.86	54.0	-7.39	AV	248.80	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2019-11-04_20.05.05

EUT Name: N.A

Test Engineer: Xcj

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.6

Load: Full load

Hum.: 53%

Remark: DR-RE01-E19090021-01#05

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

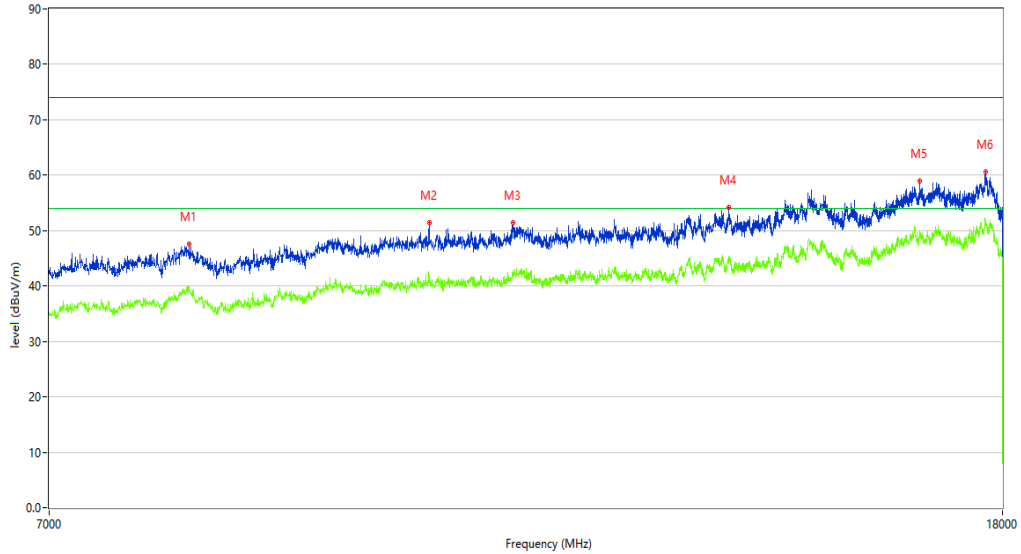

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8039.240	47.53	5.33	74.0	-26.47	Peak	300.80	150	Horizontal	Pass
1**	8039.240	39.95	5.33	54.0	-14.05	AV	300.80	150	Horizontal	Pass
2	10200.200	51.46	10.51	74.0	-22.54	Peak	186.10	150	Horizontal	Pass
2**	10200.200	41.71	10.51	54.0	-12.29	AV	186.10	150	Horizontal	Pass
3	11079.980	51.35	10.74	74.0	-22.65	Peak	195.50	150	Horizontal	Pass
3**	11079.980	42.04	10.74	54.0	-11.96	AV	195.50	150	Horizontal	Pass
4	13719.320	54.18	13.51	74.0	-19.82	Peak	232.30	150	Horizontal	Pass
4**	13719.320	45.40	13.51	54.0	-8.60	AV	232.30	150	Horizontal	Pass
5	16586.853	58.91	19.08	74.0	-15.09	Peak	282.50	150	Horizontal	Pass
5**	16586.853	49.77	19.08	54.0	-4.23	AV	282.50	150	Horizontal	Pass
6	17697.576	60.64	24.24	74.0	-13.36	Peak	136.30	150	Horizontal	Pass
6**	17697.576	51.80	24.24	54.0	-2.20	AV	136.30	150	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2019-11-26_11.53.32

EUT Name: N.A

Test Engineer: LYT

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 21.2

Load: Full load

Hum.: 53

Remark: DR-RSE01-E19090021-01#05

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

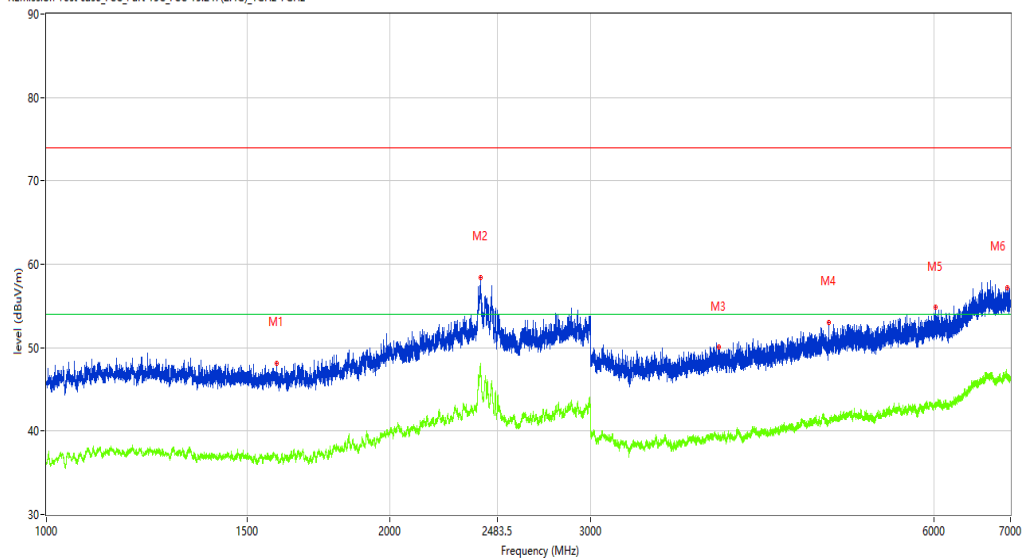

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1592.426	48.11	-5.32	74.0	-25.89	Peak	306.70	100	Vertical	Pass
1**	1592.426	36.94	-5.32	54.0	-17.06	AV	306.70	100	Vertical	Pass
2	2401.575	58.46	5.31	74.0	-15.54	Peak	58.10	100	Vertical	Pass
2**	2401.575	47.82	5.31	54.0	-6.18	AV	58.10	100	Vertical	Pass
3	3882.890	50.02	-0.41	74.0	-23.98	Peak	0.60	100	Vertical	Pass
3**	3882.890	39.53	-0.41	54.0	-14.47	AV	0.60	100	Vertical	Pass
4	4849.769	52.97	1.16	74.0	-21.03	Peak	0.50	100	Vertical	Pass
4**	4849.769	40.85	1.16	54.0	-13.15	AV	0.50	100	Vertical	Pass
5	6015.623	54.81	2.58	74.0	-19.19	Peak	95.40	100	Vertical	Pass
5**	6015.623	43.19	2.58	54.0	-10.81	AV	95.40	100	Vertical	Pass
6	6950.506	57.16	5.68	74.0	-16.84	Peak	0.60	100	Vertical	Pass
6**	6950.506	46.36	5.68	54.0	-7.64	AV	0.60	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2019-11-04_20.00.54

EUT Name: N.A

Test Engineer: Xcj

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: Normal

Temp.(oC): 22.6

Load: Full load

Hum.: 53%

Remark: DR-RE01-E19090021-01#05

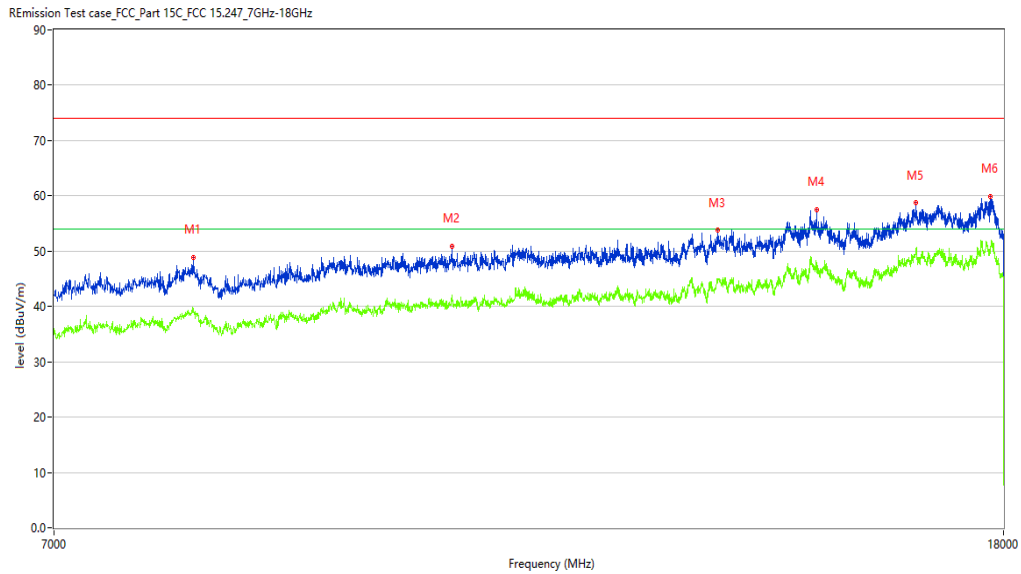

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8039.240	48.95	5.33	74.0	-25.05	Peak	99.90	150	Vertical	Pass
1**	8039.240	39.59	5.33	54.0	-14.41	AV	99.90	150	Vertical	Pass
2	10398.150	50.96	10.85	74.0	-23.04	Peak	359.90	150	Vertical	Pass
2**	10398.150	42.09	10.85	54.0	-11.91	AV	359.90	150	Vertical	Pass
3	13551.612	53.75	14.16	74.0	-20.25	Peak	271.00	150	Vertical	Pass
3**	13551.612	44.78	14.16	54.0	-9.22	AV	271.00	150	Vertical	Pass
4	14942.764	57.54	17.13	74.0	-16.46	Peak	149.30	150	Vertical	Pass
4**	14942.764	47.92	17.13	54.0	-6.08	AV	149.30	150	Vertical	Pass
5	16498.875	58.81	20.80	74.0	-15.19	Peak	230.50	150	Vertical	Pass
5**	16498.875	50.33	20.80	54.0	-3.67	AV	230.50	150	Vertical	Pass
6	17769.058	59.93	22.24	74.0	-14.07	Peak	252.80	150	Vertical	Pass
6**	17769.058	50.89	22.24	54.0	-3.11	AV	252.80	150	Vertical	Pass

BLE-Bandedge -Low channel- Horizontal –TX

Test result

Project Number: Certification

Test Time: 2019-11-27_18.53.42

EUT Name: N.A

Test Engineer: Xcj

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.6

Load: Full load

Hum.: 53%

Remark: DR-RE01-E19090021-01#05

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

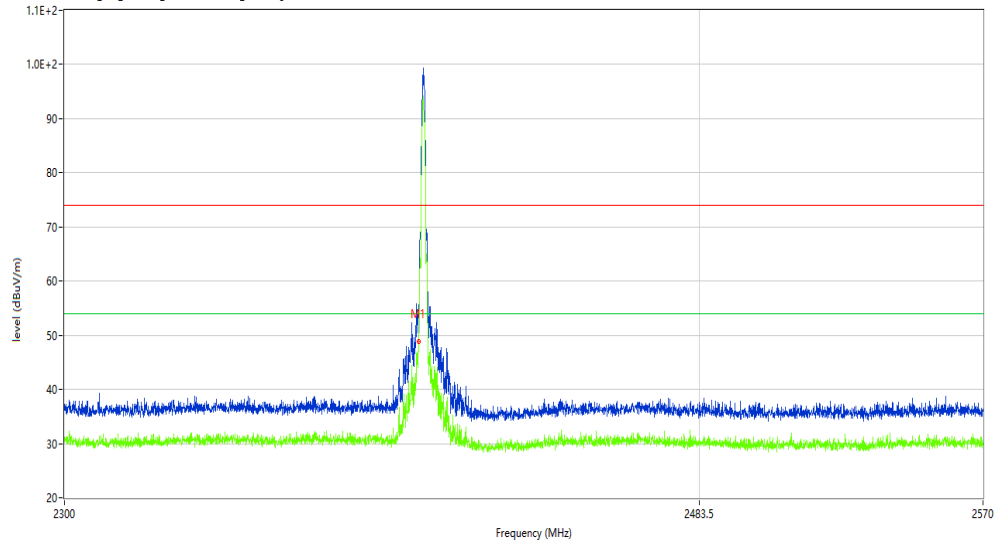

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2400.000	45.03	-4.18	74.0	-28.97	Peak	344.74	100	H	Pass
1**	2400.000	37.29	-4.18	54.0	-16.71	AV	344.74	100	H	Pass

Test result

Project Number: Certification

Test Time: 2019-11-27_18.55.50

EUT Name: N.A

Test Engineer: Xcj

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: Normal

Temp.(oC): 22.6

Load: Full load

Hum.: 53%

Remark: DR-RE01-E19090021-01#05

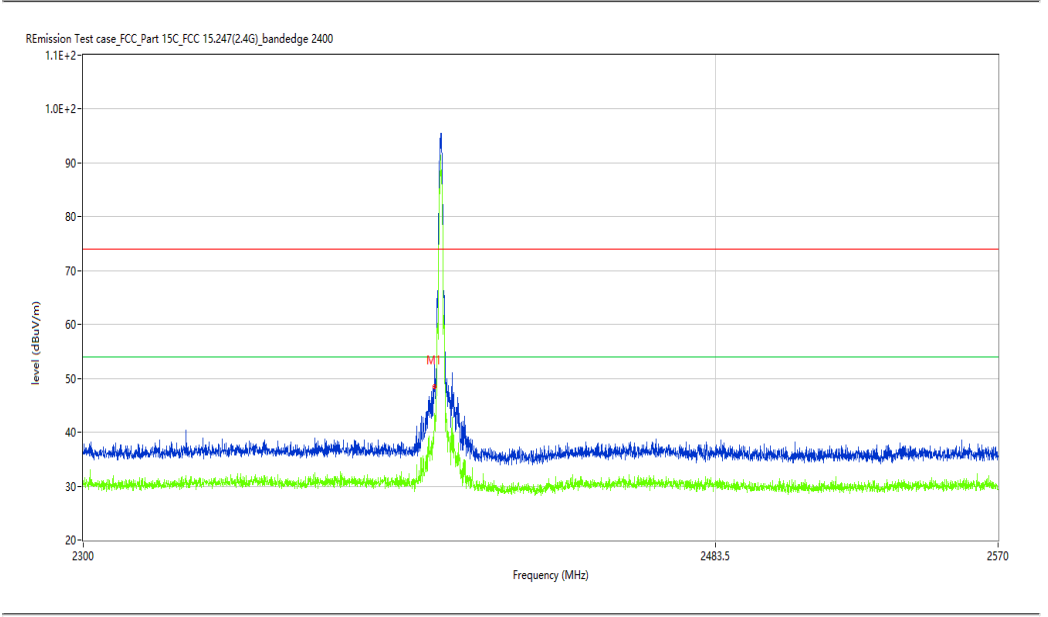

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2400.000	44.62	-4.18	74.0	-29.38	Peak	38.93	100	V	Pass
1**	2400.000	36.86	-4.18	54.0	-17.14	AV	38.93	100	V	Pass

BLE-Bandedge -High channel- Horizontal –TX

Test result

Project Number: Certification

Test Time: 2019-11-27_18.59.38

EUT Name: N.A

Test Engineer: Xcj

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.6

Load: Full load

Hum.: 53%

Remark: DR-RE01-E19090021-01#05

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

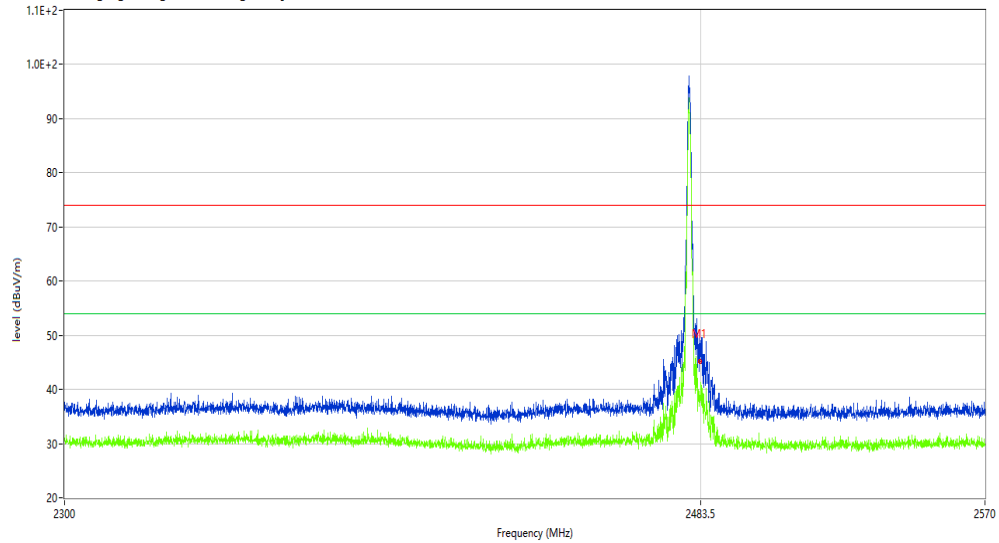


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	45.04	-3.87	74.0	-28.96	Peak	34.77	100	H	Pass
1**	2483.500	37.85	-3.87	54.0	-16.15	AV	34.77	100	H	Pass

Test result

Project Number: Certification

Test Time: 2019-11-27_18.57.47

EUT Name:	N.A	Test Engineer:	Xcj
Manufacturer:	N.A	Test Standard:	FCC
Model:	N.A	Work Addition:	Normal
Temp.(oC):	22.6	Load:	Full load
Hum.:	53%	Remark:	DR-RE01-E19090021-01#05

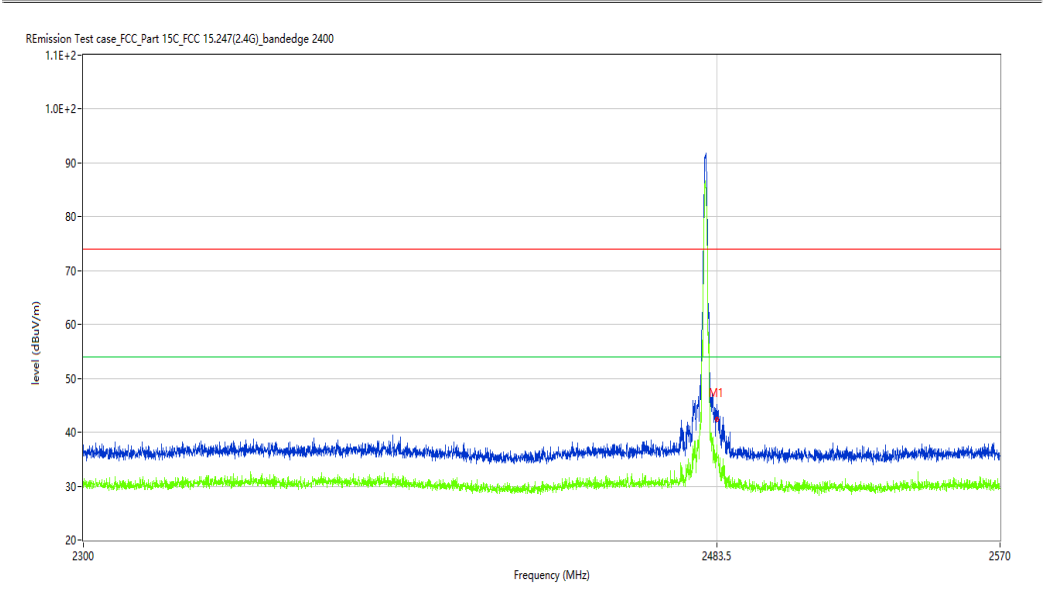

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	41.60	-3.87	74.0	-32.40	Peak	338.75	100	V	Pass
1**	2483.500	34.88	-3.87	54.0	-19.12	AV	338.75	100	V	Pass