

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

OF **Product Name:** 2.4GHz Wireless Mouse **Brand Name:** N/A Model No.: B219, B219 3+1B **Model Difference:** B219 with 2 side buttons B219 3+1B without 2 side buttons FCC ID: P5A-CB0024 **Report No.:** E2/2016/C0042 **Issue Date:** Jan. 11, 2017 FCC Rule Part: §15.249 **Prepared for: ARESON Technology Corp.** 11F., No.646, Sec.5, Chongxin Rd., SanChong Dist., New Taipei City 241, Taiwan(R.O.C.) Prepared by: SGS Taiwan Ltd. Electronics & Communication Laboratory No.2, Keji 1st Rd., Guishan Township, Taoyuan County, Taiwan 333 Note: This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Testing Laboratory Taiwan Ltd. personnel only, and shall be noted in the 0513 revision section of the document.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

でいたいでは、 除非另有就明,此根告結果僅對測試之樣品負責,同時此樣品僅保留知天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



VERIFICATION OF COMPLIANCE

Applicant:	ARESON Technology Corp. 11F., No.646, Sec.5, Chongxin Rd., SanChong Dist., New Taipei City 241, Taiwan(R.O.C.)				
Product Name:	2.4GHz Wireless Mouse				
Brand Name:	N/A				
Model No.:	B219, B219 3+1B				
Model Difference:	B219 with 2 side buttons				
Model Billerenee.	B219 3+1B without 2 side buttons				
FCC ID:	P5A-CB0024				
File Number:	E2/2016/C0042				
Date of test:	Dec. 20, 2016 ~ Jan. 04, 2017				
Date of EUT Received:	Dec. 20, 2016				

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits.

The test results of this report relate only to the tested sample identified in this report.

Test By:	Aken Huang	Date	Jan. 11, 2017
Prepared By:	Aken Huang / Engineer	Date	Jan. 11, 2017
- Approved By: _	Yuri Tsai / Clerk Jim Chang Jim Chang / Asst. Manager	Date	Jan. 11, 2017

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

でいたいでは、 除非另有就明,此根告結果僅對測試之樣品負責,同時此樣品僅保留知天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd.



Revision History


Report Number	Revision	Description	Issue Date
E2/2016/C0042	Rev.00	Initial creation of document	Jan. 11, 2017

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Contents

1	GENERAL INFORMATION	5
2	SYSTEM TEST CONFIGURATION	7
3	SUMMARY OF TEST RESULTS	11
4	DESCRIPTION OF TEST MODES	11
5	MEASUREMENT UNCERTAINTY	13
6	CONDUCTED EMISSION TEST	14
7	Radiated Emission Test	16
8	20 dB Bandwidth Measurement	34
9	Antenna Requirement	37





GENERAL INFORMATION 1

1.1 Product Description

General:

Product Name:	2.4GHz Wireless Mouse
Brand Name:	N/A
Model No.:	B219, B219 3+1B
Model Difference:	B219 with 2 side buttons B219 3+1B without 2 side buttons
Product SW/HW version:	N/A/ N/A
Operation Frequency:	2405~2477MHz
Channel number:	16 channels
Channel Spacing:	1MHz
Modulation Type:	GFSK
Power Supply:	1.5Vdc from AA batteries*2.
Antenna Designation:	Internal Antenna, Antenna Gain: 2.62dBi Model No.: Meadline type antenna 8 Supplier: ARESON Technology Corp.

Report No.: E2/2016/C0042 Page: 6 of 37



1.2 **Test Methodology of Applied Standards**

FCC Part 15, Subpart C §15.249 ANSI C63.10:2013

Note:

All test items have been performed and record as per the above standards.

Test Facility 1.3

SGS Taiwan Ltd. Electronics & Communication Laboratory No.2, Keji 1st Rd., Guishan Township, Taoyuan County, Taiwan 333 (TAF code 0513)

FCC Registration Numbers are: 735305

Canada Registration Number: 4260A-5.

1.4 **Special Accessories**

There are no special accessories used while test was conducted.

Equipment Modifications 1.5

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



SYSTEM TEST CONFIGURATION 2

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 **Test Procedure**

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz,. The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table. For emissions testing at or below 1 GHz, the table height shall be 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

でためのです。 除非另有就明,此根告結果僅對測試之樣品負責,同時此樣品僅保留知天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



2.5 Limitation

(1) Conducted Emission

Conducted Emission Limits is as following.

Frequency	Conducted Limit (dBuV)			
(MHz)	Quasi-Peak Average			
0.15 – 0.5	66 - 56	56 - 46		
0.5 – 5	56	46		
5 - 30	60	50		

(2) Radiated Emission

The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following.

Frequency	Field strength of Field strengt		Distance (m)
(MHz)	Fundamental	Harmonics	
902 – 928	50 mV/m	500 uV/m	3
	(94dBuV/m)	(54dBuV/m)	
2400 - 2483.5	50 mV/m	500 uV/m	3
	(94dBuV/m)	(54dBuV/m)	
5725 – 5875	50 mV/m	500 uV/m	3
	(94dBuV/m)	(54dBuV/m)	
24.0 – 24.25 GHz	250 mV/m	2500 uV/m	3
	(107.95dBuV/m)	(67.95dBuV/m)	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



(3) Radiated Emission

Emission Radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits as below, whichever is the lesser attenuation.

Frequency (MHz)	Field strength µV/m	•	
1.705-30	30	30	3m dBμV/m 69.54
30-88	100	3	40
88-216	150	3	43.5
216-960	200	3	46
Above 960	500	3	54

(4) Radiated Emission

For frequencies above 1000MHz, the above field strength limits are based on average limits. The peak filed strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20dB under any condition of modulation.

Re-1. Emission level in dBuV/m=20 log (uV/m)

- 2. Measurement was performed at an antenna to the closed point of EUT mark: distance of meters.
 - Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of ξ 15.205 and RSS-Gen § 8.10
 - 4. Emission spurious frequency which appearing within the Restricted Bands specified in provision of £15.205 and RSS-Gen § 8.10, then the general radiated emission limits in ξ 15.209 and RSS-Gen § 8.9 apply.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

でためのです。 除非另有就明,此根告結果僅對測試之樣品負責,同時此樣品僅保留知天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



2.6 Configuration of Tested System

Fig. 2-1 Radiated Emission & Conducted (Antenna Port) Configuration



Table 2-1 Equipment Used in Tested System

ltem	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	2.4GHz Wireless Test Software	N/A	N/A	N/A	N/A	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is enproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-presence of this document is unlawful and offenders may be prosecuted to the fullest extent of the law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



SUMMARY OF TEST RESULTS 3

FCC Rules	Description Of Test	Result	
§15.207(a)	AC Power Line Conducted Emission	Compliant	
§15.249(a)(d)(e)	Radiated Emission	Compliant	
§15.215(c)	20dB bandwidth Measurement	Compliant	

DESCRIPTION OF TEST MODES 4

4.1 Operated in 2405 ~ 2477MHz Band

16 channels are provided.

Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2405MHz	8	2437MHz	15	2468MHz
2	2407MHz	9	2440MHz	16	2477MHz
3	2410MHz	10	2441MHz		
4	2414MHz	11	2442MHz		
5	2421MHz	12	2449MHz		
6	2428MHz	13	2455MHz		
7	2435MHz	14	2467MHz		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



4.2 The Worst Test Modes and Channel Details

- 1. The EUT has been tested under operating condition.
- 2. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

RADIATED EMISSION TEST:

RADIATED EMISSION TEST (BELOW 1 GHz)						
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)	ANTENNA PORT	
2.4G	1 to 16	1,11,16	GFSK	2	MAIN	
	RADIATED	EMISSION TES	ST (ABOVE 1 GH	z)		
MODE AVAILABLE TESTED MODULATION					ANTENNA PORT	
2.4G	1 to 16	1,11,16	GFSK	2	MAIN	

Note:

The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for Bluetooth LE Transmitter for channel Low, Mid and High, the worst case E2 position was reported.

ANTENNA PORT CONDUCTED MEASUREMENT:

		CONDUCTED	TEST		
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)	ANTENNA PORT
2.4G	1 to 16	1,11,16	GFSK	2	MAIN

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



MEASUREMENT UNCERTAINTY 5

Test Items	Uncertainty
AC Power Line Conducted Emission	+/- 2.586 dB
20dB & 99% Bandwidth	+/- 51.33 Hz
100 kHz Bandwidth Of Frequency Band Edges	+/- 0.84 dB
Temperature	+/- 0.65 °C
Humidity	+/- 4.6 %
DC / AC Power Source	DC= +/- 0.13%, AC= +/- 0.2%

Radiated Spurious Emission:

	9kHz-30MHz: +/-2.87dB
	30MHz - 180MHz: +/- 3.37dB
Measurement uncertainty	180MHz -417MHz: +/- 3.19dB
(Polarization : Vertical)	0.417GHz-1GHz: +/- 3.19dB
	1GHz - 18GHz: +/- 4.04dB
	18GHz - 40GHz: +/- 4.04dB

	9kHz-30MHz: +/-2.87dB
	30MHz - 167MHz: +/- 4.22dB
Measurement uncertainty (Polarization : Horizontal)	167MHz -500MHz: +/- 3.44dB
	0.5GHz-1GHz: +/- 3.39dB
	1GHz - 18GHz: +/- 4.08dB
	18GHz - 40GHz: +/- 4.08dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is enproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-presence of this document is unlawful and offenders may be prosecuted to the fullest extent of the law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



CONDUCTED EMISSION TEST 6

6.1 Standard Applicable:

Frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

	Lin	nits
Frequency range	dB(uV)
MHz	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Note

1. The lower limit shall apply at the transition frequencies

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

6.2 Measurement Equipment Used:

Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
TYPE		NUMBER	NUMBER	CAL.			
EMI Test Receiver	R&S	ESCI 7	100950	12/08/2016	12/07/2017		
Coaxial Cables	N/A	N30N30-1042-1 50cm	N/A	02/07/2016	02/06/2017		
LISN	Schwarzbeck	NSLK 8127	8127-648	03/11/2016	03/10/2017		
LISN	Rolf-Heine	NNB-2/16Z	99012	03/04/2016	03/03/2017		

6.3 EUT Setup:


- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

でためのです。 除非另有就明,此根告結果僅對測試之樣品負責,同時此樣品僅保留知天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



6.4 Test SET-UP (Block Diagram of Configuration)

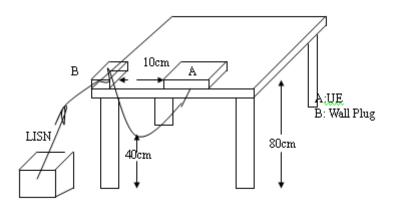

6.5 Measurement Procedure:

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all phases of power being supplied by given UE are completed

6.6 Measurement Result:

N/A, the EUT is powered by AA batteries.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

でためのです。 除非另有就明,此根告結果僅對測試之樣品負責,同時此樣品僅保留知天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law




Radiated Emission Test 7

7.1. Measurement Procedure

- 1. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 1.5m for frequency> 1GHz above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 4. Repeat above procedures until all frequency measured were complete.

7.2. Test SET-UP (Block Diagram of Configuration)

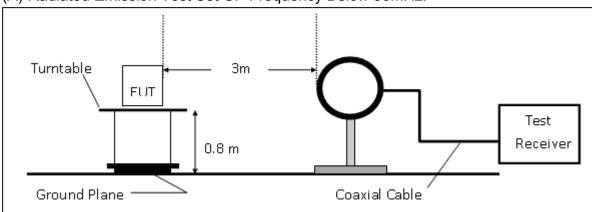



(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only


でためのです。 除非另有就明,此根告結果僅對測試之樣品負責,同時此樣品僅保留知天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law





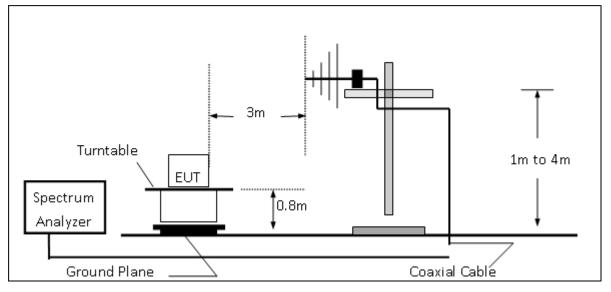

(C) Radiated Emission Test Set-UP Frequency Over 1 GHz

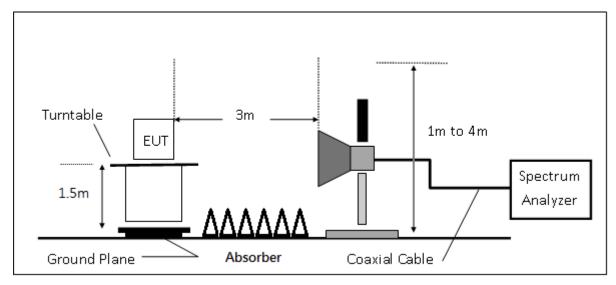

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此根告结果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-paragrace of this document is unavial and offenders may be prosecuted to the fullest extent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



7.3. Measurement Equipment Used:

966 Chamber							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
TYPE		NUMBER	NUMBER	CAL.			
EMI Test Receiver	R&S	ESU 40	100363	04/12/2016	04/11/2017		
Loop Antenna	ETS-Lindgren	6502	00143303	12/23/2016	12/22/2017		
Broadband Antenna	TESEQ	CBL 6112D	35240	11/03/2016	11/02/2017		
Horn Antenna	ETS-Lindgren	3117	00143272	12/15/2016	12/16/2017		
Horn Antenna	Schwarzbeck	BBHA9170	185	07/24/2016	07/23/2017		
Pre Amplifier	EMC Instruments	EMC330	980096	12/12/2016	12/11/2017		
Pre Amplifier	EMC Instruments	EMC0011830	980199	12/12/2016	12/11/2017		
Pre Amplifier	R&S	SCU-18	10204	12/12/2016	12/11/2017		
Pre Amplifier	R&S	SCU-26	100780	12/12/2016	12/11/2017		
Coaxial Cable	Huber+Suhner	RG 214/U	966Rx 9K-30M	12/12/2016	12/11/2017		
Coaxial Cable	Huber+Suhner	RG 214/U SUCOFLEX 104	966Rx 30M-3G	12/12/2016	12/11/2017		
Coaxial Cable	Huber+Suhner	SUCOFLEX 104	966Rx 1G-18G	12/12/2016	12/11/2017		
Coaxial Cable	Huber+Suhner	mini 141-12 SUCOFLEX 104	966Rx 18G-40G	12/12/2016	12/11/2017		
Coaxial Cable	Huber+Suhner	SUCOFLEX 104	966Tx 30M-18G	12/12/2016	12/11/2017		
Coaxial Cable	Huber+Suhner	SUCOFLEX 102	966Tx 18G-40G	12/12/2016	12/11/2017		
Attenuator	WOKEN	218FS-10	RF27	12/12/2016	12/11/2017		
Site NSA	SGS	966 Chamber C	SAC-C	03/04/2016	03/03/2017		
Site VSWR	SGS	966 Chamber C	SAC-C	03/04/2016	03/03/2017		
DC Power Supply	HOLA	DP-3003	D7070035	05/04/2016	05/03/2017		
Controller	MF	MF-7802	N/A	N.C.R.	N.C.R.		
Antenna Master	MF	N/A	N/A	N.C.R.	N.C.R.		
Turn Table	MF	N/A	N/A	N.C.R.	N.C.R.		
Test Software	World-Pallas	Dr. E	V 3.0 Lite	N.C.R.	N.C.R.		

Note: N.C.R refers to Not Calibrated Required



7.4. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	6	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

Actual FS(dB μ V/m) = SPA. Reading level(dB μ V) + Factor(dB)

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

でためのです。 除非另有就明,此根告結果僅對測試之樣品負責,同時此樣品僅保留知天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



7.5. Measurement Result

Radiated Spurious Emission Measurement Result (Main)


Operation M Fundamenta Operation B EUT Pol. :	I Frequency	2.4GTest Date :2405 MHzTemp. / Humi. :Main CH LowTest Engineer :E2Measurement Anten		nna Pol. :	2017/1/3 22.7deg_0 Ashton Vertical	C/57RH	
Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2405.42	F	Peak	84.69	1.03	85.72	114	-28.28
2405.42	F	Average	49.66	1.03	50.69	94	-43.31
Operation M	ode :	2.4G	Test Dat	e:		2017/1/3	
	I Frequency		-Iz Temp. /	Humi. :		22.7deg_	C/57RH
Operation B		Main CH	•			Ashton	
EUT Pol. :		E2		ment Anter	nna Pol. :	Horizonta	I
Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2405.39	F	Peak	87.07	1.03	88.10	114	-25.90
2405.39	F	Average	50.93	1.03	51.96	94	-42.04
Operation N	lode :	2.4G	Test Date	e :		2017/1/3	
	lode: al Frequency					2017/1/3 22.7deg_0	C/57RH
	al Frequency		Hz Temp. / ł	Humi. :			C/57RH
Fundamenta	al Frequency	: 2442 MI	Hz Temp. / ł ł Mid Test Eng	Humi. :	ina Pol. :	22.7deg_0	C/57RH
Fundamenta Operation B	al Frequency	: 2442 MI Main CH E2 Detector	Hz Temp. / H H Mid Test Eng Measure Spectum	Humi. : ineer :	Actual	22.7deg_0 Ashton Vertical Limit	C/57RH Margin
Fundamenta Operation B EUT Pol. : Freq.	al Frequency and : Note	: 2442 MI Main CH E2 Detector Mode	Hz Temp. / H H Mid Test Eng Measure Spectum Reading Level	Humi. : ineer : ment Anter Factor	Actual FS	22.7deg_0 Ashton Vertical Limit @3m	Margin
Fundamenta Operation B EUT Pol. : Freq. <u>MHz</u>	al Frequency and : Note <u>F/H/E/S</u>	: 2442 MI Main CH E2 Detector Mode PK/QP/AV	Hz Temp. / H H Mid Test Eng Measure Spectum Reading Level dBµV	Humi. : ineer : ment Anter Factor dB	Actual FS dBµV/m	22.7deg_0 Ashton Vertical Limit @3m dBµV/m	Margin dB
Fundamenta Operation B EUT Pol. : Freq. <u>MHz</u> 2441.93	al Frequency and : Note <u>F/H/E/S</u> F	: 2442 MI Main CH E2 Detector Mode PK/QP/AV Peak	Hz Temp. / H H Mid Test Eng Measure Spectum Reading Level <u>dBµV</u> 110.53	Humi. : ineer : ment Anter Factor <u>dB</u> 0.83	Actual FS dBµV/m 111.35	22.7deg_0 Ashton Vertical Limit @3m dBµV/m 114	Margin dB -2.65
Fundamenta Operation B EUT Pol. : Freq. <u>MHz</u>	al Frequency and : Note <u>F/H/E/S</u>	: 2442 MI Main CH E2 Detector Mode PK/QP/AV	Hz Temp. / H H Mid Test Eng Measure Spectum Reading Level dBµV	Humi. : ineer : ment Anter Factor dB	Actual FS dBµV/m	22.7deg_0 Ashton Vertical Limit @3m dBµV/m	Margin dB
Fundamenta Operation B EUT Pol. : Freq. <u>MHz</u> 2441.93	al Frequency and : Note <u>F/H/E/S</u> F F	: 2442 MI Main CH E2 Detector Mode PK/QP/AV Peak	Hz Temp. / H H Mid Test Eng Measure Spectum Reading Level <u>dBµV</u> 110.53	Humi. : ineer : ment Anter Factor dB 0.83 0.83	Actual FS dBµV/m 111.35	22.7deg_0 Ashton Vertical Limit @3m dBµV/m 114	Margin dB -2.65
Fundamenta Operation B EUT Pol. : Freq. <u>MHz</u> 2441.93 2441.93 Operation M	al Frequency and : Note <u>F/H/E/S</u> F F	: 2442 MI Main CH E2 Detector Mode PK/QP/AV Peak Average 2.4G	Hz Temp. / H H Mid Test Eng Measure Spectum Reading Level <u>dBµV</u> 110.53 58.38 Test Date	Humi. : ineer : ment Anter Factor <u>dB</u> 0.83 0.83	Actual FS dBµV/m 111.35	22.7deg_0 Ashton Vertical Limit @3m dBµV/m 114 94	Margin dB -2.65 -34.79
Fundamenta Operation B EUT Pol. : Freq. <u>MHz</u> 2441.93 2441.93 Operation M	al Frequency and : Note <u>F/H/E/S</u> F F Iode : al Frequency	: 2442 MI Main CH E2 Detector Mode PK/QP/AV Peak Average 2.4G	Hz Temp. / H H Mid Test Eng Measure Spectum Reading Level <u>dBµV</u> 110.53 58.38 Test Date Hz Temp. / H	Humi. : ineer : ment Anter Factor <u>dB</u> 0.83 0.83 e : Humi. :	Actual FS dBµV/m 111.35	22.7deg_0 Ashton Vertical Limit @3m dBµV/m 114 94 2017/1/3	Margin dB -2.65 -34.79
Fundamenta Operation B EUT Pol. : Freq. <u>MHz</u> 2441.93 2441.93 Operation M Fundamenta	al Frequency and : Note <u>F/H/E/S</u> F F Iode : al Frequency	: 2442 MI Main CH E2 Detector Mode PK/QP/AV Peak Average 2.4G : 2442 MI	Hz Temp. / H H Mid Test Eng Measure Spectum Reading Level dBµV 110.53 58.38 Test Date Hz Temp. / H H Mid Test Eng	Humi. : ineer : ment Anter Factor <u>dB</u> 0.83 0.83 e : Humi. :	Actual FS dBμV/m 111.35 59.21	22.7deg_0 Ashton Vertical Limit @3m dBµV/m 114 94 2017/1/3 22.7deg_0	Margin <u>dB</u> -2.65 -34.79 C/57RH
Fundamenta Operation B EUT Pol. : Freq. <u>MHz</u> 2441.93 2441.93 Operation M Fundamenta Operation B	al Frequency and : Note <u>F/H/E/S</u> F F Iode : al Frequency	: 2442 MI Main CH E2 Detector Mode PK/QP/AV Peak Average 2.4G : 2442 MI Main CH E2 Detector	Hz Temp. / H H Mid Test Eng Measure Spectum Reading Level <u>dBµV</u> 110.53 58.38 Test Date Hz Temp. / H H Mid Test Eng Measure Spectum	Humi. : ineer : ment Anter Factor dB 0.83 0.83 e : Humi. : ineer :	Actual FS <u>dBµV/m</u> 111.35 59.21 nna Pol. : Actual	22.7deg_0 Ashton Vertical Limit @3m dBµV/m 114 94 2017/1/3 22.7deg_0 Ashton Horizontal Limit	Margin <u>dB</u> -2.65 -34.79 C/57RH
Fundamenta Operation B EUT Pol. : Freq. <u>MHz</u> 2441.93 2441.93 Operation M Fundamenta Operation B EUT Pol. : Freq.	al Frequency and : Note F/H/E/S F F Node : al Frequency and : Note	: 2442 Mi Main CH E2 Detector Mode PK/QP/AV Peak Average 2.4G : 2442 Mi Main CH E2 Detector Mode	Hz Temp. / H H Mid Test Eng Measured Spectum Reading Level <u>dBµV</u> 110.53 58.38 Test Date Hz Temp. / H H Mid Test Eng Measured Spectum Reading Level	Humi. : ineer : ment Anter Factor dB 0.83 0.83 e : Humi. : ineer : ment Anter Factor	Actual FS dBµV/m 111.35 59.21 nna Pol. : Actual FS	22.7deg_0 Ashton Vertical Limit @3m dBµV/m 114 94 2017/1/3 22.7deg_0 Ashton Horizontal Limit @3m	Margin <u>dB</u> -2.65 -34.79 C/57RH Margin
Fundamenta Operation B EUT Pol. : Freq. <u>MHz</u> 2441.93 2441.93 Operation M Fundamenta Operation B EUT Pol. : Freq. <u>MHz</u>	al Frequency and : Note F/H/E/S F fode : al Frequency and : Note F/H/E/S	: 2442 Mi Main CH E2 Detector Mode PK/QP/AV Peak Average 2.4G : 2442 Mi Main CH E2 Detector Mode PK/QP/AV	Hz Temp. / H Hid Test Eng Measure Spectum Reading Level <u>dBμV</u> 110.53 58.38 Test Date Hz Temp. / H Hid Test Eng Measure Spectum Reading Level <u>dBμV</u>	Humi. : ineer : ment Anter Factor dB 0.83 0.83 e : Humi. : ineer : ment Anter Factor dB	Actual FS <u>dBµV/m</u> 111.35 59.21 nna Pol. : Actual FS dBµV/m	22.7deg_0 Ashton Vertical Limit @3m dBµV/m 114 94 2017/1/3 22.7deg_0 Ashton Horizontal Limit @3m dBµV/m	Margin dB -2.65 -34.79 C/57RH Margin dB
Fundamenta Operation B EUT Pol. : Freq. <u>MHz</u> 2441.93 2441.93 Operation M Fundamenta Operation B EUT Pol. : Freq.	al Frequency and : Note F/H/E/S F F Node : al Frequency and : Note	: 2442 Mi Main CH E2 Detector Mode PK/QP/AV Peak Average 2.4G : 2442 Mi Main CH E2 Detector Mode	Hz Temp. / H H Mid Test Eng Measured Spectum Reading Level <u>dBµV</u> 110.53 58.38 Test Date Hz Temp. / H H Mid Test Eng Measured Spectum Reading Level	Humi. : ineer : ment Anter Factor dB 0.83 0.83 e : Humi. : ineer : ment Anter Factor	Actual FS dBµV/m 111.35 59.21 nna Pol. : Actual FS	22.7deg_0 Ashton Vertical Limit @3m dBµV/m 114 94 2017/1/3 22.7deg_0 Ashton Horizontal Limit @3m	Margin <u>dB</u> -2.65 -34.79 C/57RH Margin




Operation M Fundamenta Operation B EUT Pol. :	I Frequency :					2017/1/3 22.7deg_0 Ashton Vertical	C/57RH		
Freq.	Note	Detector	Spe	ectum	Factor	Actual	Limit	Margin	
		Mode	Readir	ng Level		FS	@3m		
MHz	F/H/E/S	PK/QP/AV	dE	BμV	dB	dBµV/m	dBµV/m	dB	
2476.63	F	Peak	79	9.11	1.16	80.27	114	-33.73	
2476.63	F	Average	48	3.23	1.16	49.39	94	-44.61	
Operation M	ode :	2.4G		Test Date	е:		2017/1/3		
Fundamenta	I Frequency :	2477 MF	Ιz	Temp. / ł	Humi. :		22.7deg_C/57RH		
Operation Ba	and ·			Test Engineer :			Ashton		
operation B.	anu.	Main CH	l High	Test Eng	ineer :		Ashton		
EUT Pol. :	anu .	Main CH E2	l High	0	ineer : ment Antei	nna Pol. :	Ashton Horizontal		
•	Note		Ū	0		nna Pol. : Actual		Margin	
EUT Pol. :		E2	Spe	Measure	ment Ante		Horizontal		
EUT Pol. :		E2 Detector	Spe Readir	Measure ectum	ment Ante	Actual	Horizontal Limit		
EUT Pol. : Freq.	Note	E2 Detector Mode	Spe Readir dE	Measure ectum ng Level	ment Anter Factor	Actual FS	Horizontal Limit @3m	Margin	



Radiated Spurious Emission Measurement Result



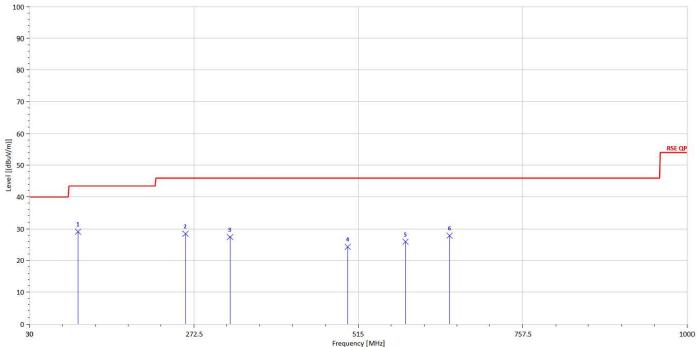


			requerey [mine	1				
Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	
101.78	S	Peak	46.61	-17.52	29.08	43.5	-14.42	
259.89	S	Peak	42.10	-13.64	28.45	46	-17.55	
325.85	S	Peak	39.43	-12.05	27.38	46	-18.62	
499.48	S	Peak	31.94	-7.66	24.27	46	-21.73	
584.84	S	Peak	32.01	-6.09	25.92	46	-20.08	
649.83	S	Peak	33.08	-5.24	27.85	46	-18.15	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Operation Mode :	2.4G	Test Date :	2017/1/3
Fundamental Frequency :	2405 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH Low	Test Engineer :	Ashton
EUT Pol. :	E2	Measurement Antenna Pol. :	Horizontal

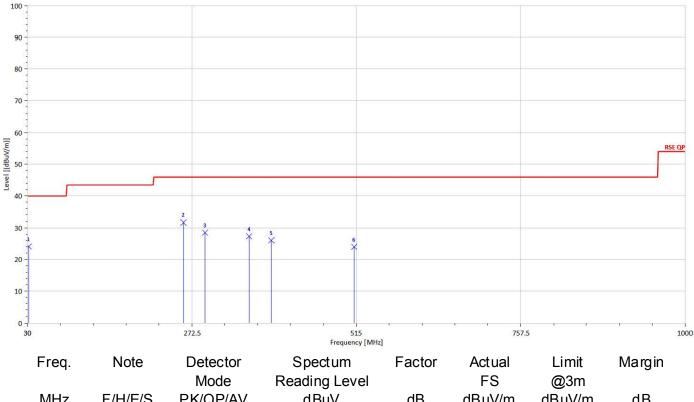

MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
31.94	S	Peak	32.29	-8.22	24.07	40	-15.93
259.89	S	Peak	45.27	-13.64	31.62	46	-14.38
291.90	S	Peak	41.75	-13.26	28.49	46	-17.51
356.89	S	Peak	38.58	-11.27	27.31	46	-18.69
389.87	S	Peak	36.06	-10.03	26.03	46	-19.97
512.09	S	Peak	31.47	-7.51	23.96	46	-22.04




Operation Mode :	2.4G	Test Date :	2017/1/3
Fundamental Frequency :	2442 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH Mid	Test Engineer :	Ashton
EUT Pol. :	E2	Measurement Antenna Pol.:	Vertical

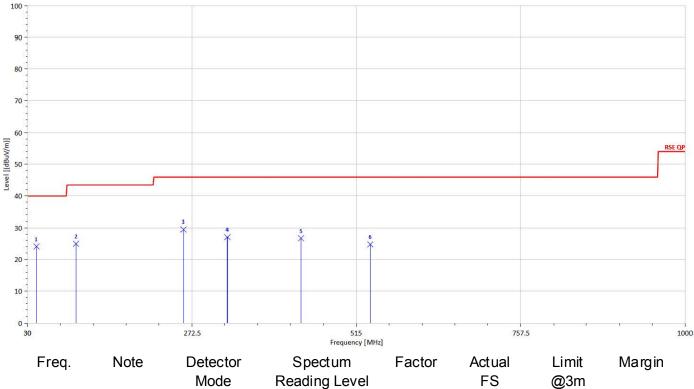

		wode	Reading Level		го	@SIII		
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	
43.58	S	Peak	39.43	-15.35	24.08	40	-15.92	
101.78	S	Peak	42.47	-17.52	24.94	43.5	-18.56	
259.89	S	Peak	43.13	-13.64	29.49	46	-16.51	
324.88	S	Peak	39.00	-11.95	27.05	46	-18.95	
433.52	S	Peak	36.26	-9.55	26.71	46	-19.29	
535.37	S	Peak	32.16	-7.43	24.74	46	-21.26	





Operation Mode :	2.4G	Test Date :	2017/1/3
Fundamental Frequency :	2442 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH Mid	Test Engineer :	Ashton
EUT Pol. :	E2	Measurement Antenna Pol.:	Horizontal

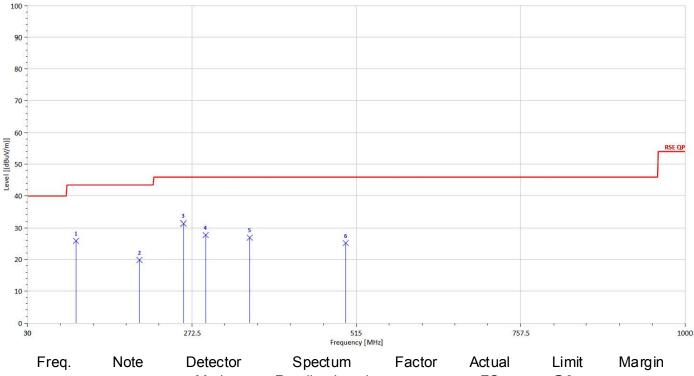

			Mode	Reading Level		FS	@3m	
_	MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
	101.78	S	Peak	43.40	-17.52	25.87	43.5	-17.63
	194.90	S	Peak	37.63	-17.85	19.78	43.5	-23.72
	259.89	S	Peak	44.97	-13.64	31.33	46	-14.67
	292.87	S	Peak	40.95	-13.23	27.71	46	-18.29
	357.86	S	Peak	38.19	-11.29	26.89	46	-19.11
	499.48	S	Peak	32.83	-7.66	25.17	46	-20.83







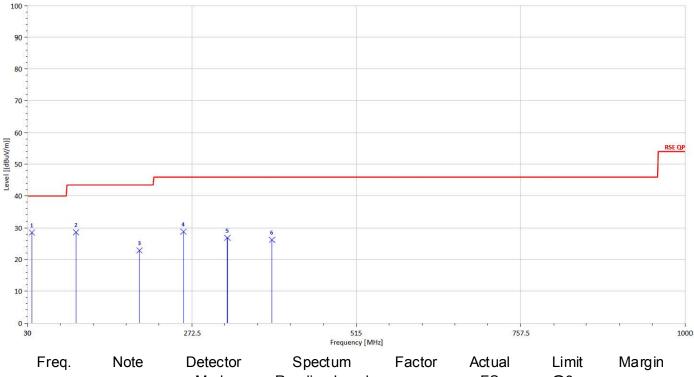

			Mode	Reading Level		FS	@3m	
	MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
-	36.79	S	Peak	39.44	-10.93	28.51	40	-11.49
	101.78	S	Peak	46.11	-17.52	28.59	43.5	-14.91
	194.90	S	Peak	40.66	-17.85	22.81	43.5	-20.69
	259.89	S	Peak	42.43	-13.64	28.79	46	-17.21
	324.88	S	Peak	38.79	-11.95	26.84	46	-19.16
	390.84	S	Peak	36.26	-10.07	26.19	46	-19.81





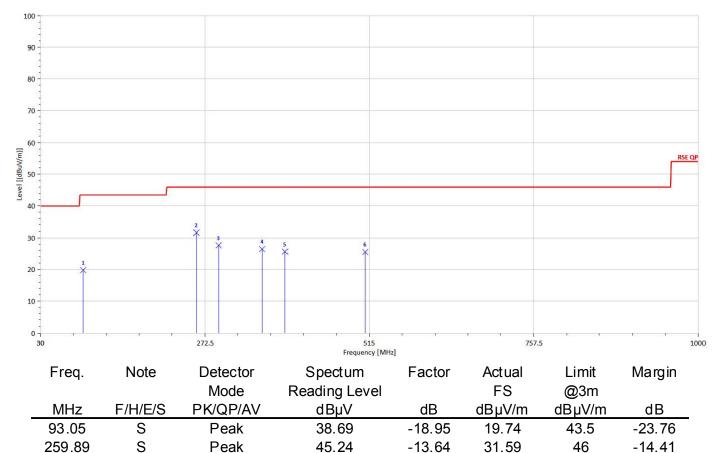

40.85

37.69

35.70

33.25

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Peak

Peak

Peak

Peak

S

S

S

S

292.87

356.89

390.84

509.18

Unless outletwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

-13.23

-11.27

-10.07

-7.75

27.62

26.42

25.64

25.51

-18.38

-19.58

-20.36

-20.49


46

46

46




Operation Mode :	2.4G	Test Date :	2017/1/4
Fundamental Frequency :	2405 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH Low	Test Engineer :	Ashton
EUT Pol. :	E2	Measurement Antenna Pol. :	Vertical

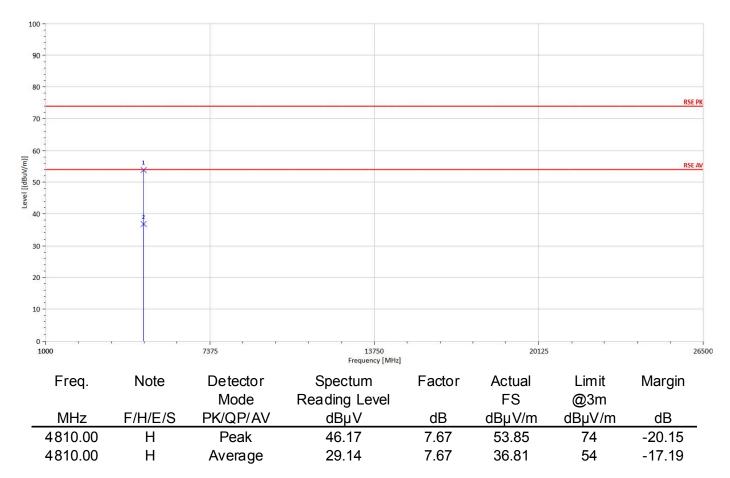




Operation Mode :	2.4G	Test Date :	2017/1/4
Fundamental Frequency :	2405 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH Low	Test Engineer :	Ashton
EUT Pol. :	E2	Measurement Antenna Pol. :	Horizontal

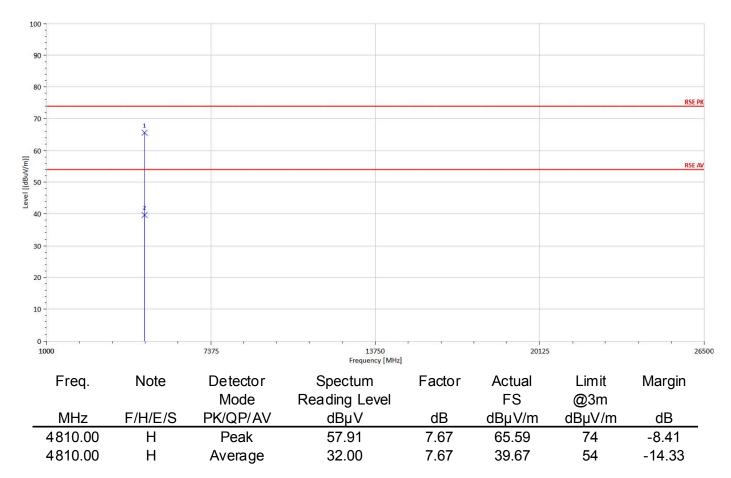




Operation Mode :	2.4G	Test Date :	2017/1/4
Fundamental Frequency:	2442 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH Mid	Test Engineer :	Ashton
EUT Pol. :	E2	Measurement Antenna Pol. :	Vertical

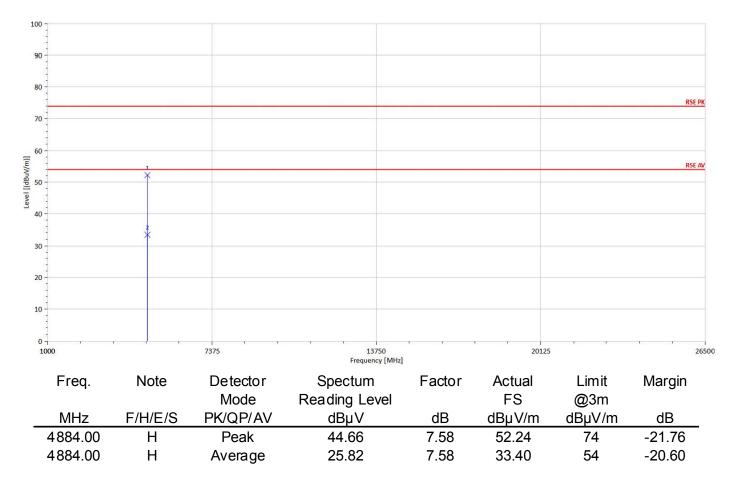




Operation Mode :	2.4G	Test Date :	2017/1/4
Fundamental Frequency:	2442 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH Mid	Test Engineer :	Ashton
EUT Pol. :	E2	Measurement Antenna Pol. :	Horizontal

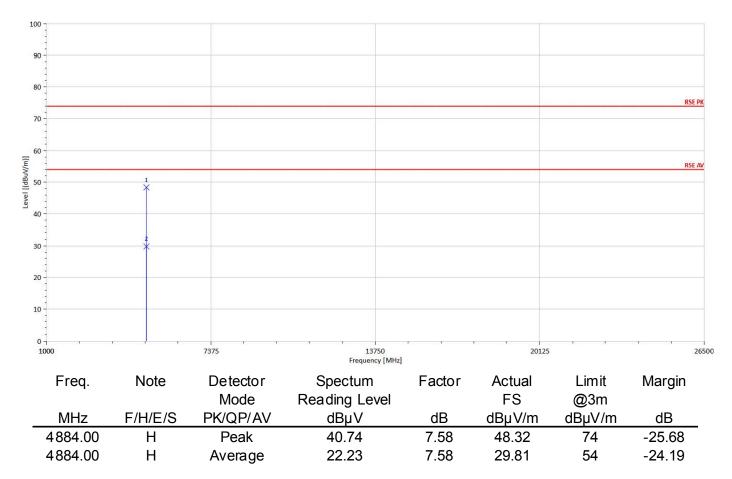




Operation Mode :	2.4G	Test Date :	2017/1/4
Fundamental Frequency :	2477 MHz	Temp. / Humi. :	22.7 deg_C/57 RH
Operation Band :	Tx CH High	Test Engineer :	Ashton
EUT Pol. :	E2	Measurement Antenna Pol. :	Vertical

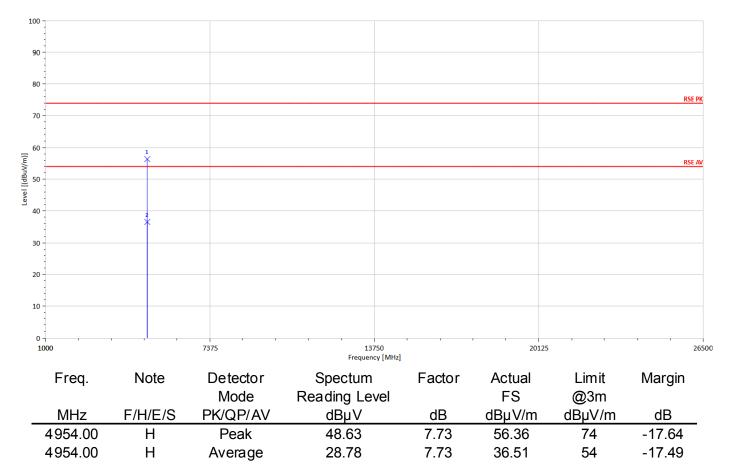



RH

Operation Mode :	2.4G	Test Date :	2017/1/4
Fundamental Frequency :	2477 MHz	Temp. / Humi. :	22.7 deg_C/57
Operation Band :	Tx CH High	Test Engineer :	Ashton
EUT Pol.:	E2	Measurement Antenna Pol.:	Horizontal

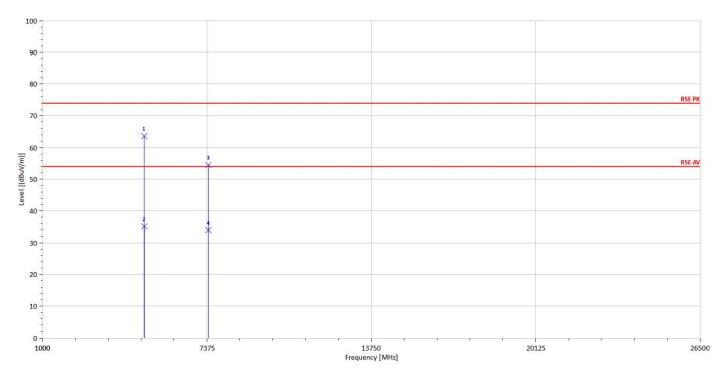

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4954.00	Н	Peak	55.77	7.73	63.51	74	-10.49
4954.00	Н	Average	27.39	7.73	35.12	54	-18.88
7431.00	Н	Peak	38.78	15.69	54.47	74	-19.53
7431.00	Н	Average	18.23	15.69	33.92	54	-20.08

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



20 dB Bandwidth Measurement 8

8.1 Measurement Procedure

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- Set ETU normal operating mode. 2.
- 3. Set SPA Center Frequency = fundamental frequency, RBW = 100kHz, VBW = 300kHz, Span = 5MHz.
- 4. Set SPA Max hold. Mark peak, -20dB.

8.2 Test SET-UP (Block Diagram of Configuration)

Refer to section 7.2 for the plot.

8.3 I	Measurement	Equi	pment	Used:
-------	-------------	------	-------	-------


Conducted Emission Test Site					
EQUIPMENT	MFR MODEL SERIAL		LAST	CAL DUE.	
TYPE		NUMBER	NUMBER	CAL.	
Spectrum Analyzer	KEYSIGHT	N9010A	MY54510568	04/14/2016	04/13/2017
Power Meter	Anritsu	ML2496A	1326001	06/22/2016	06/23/2017
Power Sensor	Anritsu	MA2411B	1315048	06/22/2016	06/23/2017
Power Sensor	Anritsu	MA2411B	1315049	06/22/2016	06/23/2017
Coaxial Cable 30cm	WOKEN	00100A1F1A19 5C	RF01	12/12/2016	12/11/2017
DC Block	PASTERNACK	PE8210	RF29	12/12/2016	12/11/2017
Splitter	RF-LAMBAD	RFLT2W1G18 G	RF35	12/12/2016	12/11/2017
Attenuator	WOKEN	218FS-10	RF23	12/12/2016	12/11/2017
DC Power Supply	Agilent	E3640A	MY53140006	05/04/2016	05/03/2017

8.4 Measurement Results:

Frequency (MHz)	20dB Bandwidth (kHz)		
2405	2191		
2442	2201		
2477	2140		

Refer to attached data chart.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





2405MHz




2442MHz




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



2477MHz

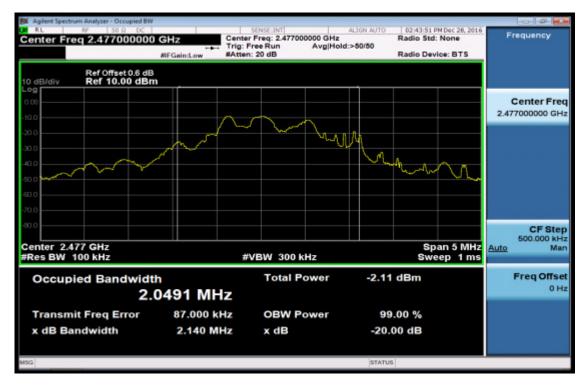

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





9 Antenna Requirement

9.1 Standard Applicable:

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

If the transmitting antenna is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

In case of point-to-point operation, the power shall be reduced by the one dB for every 3 dB that the directional gain of antenna exceeds 6dBi.

9.2 Antenna Connected Construction:

embedded-in antenna design is used.

The antenna is designed as permanently attached and no consideration of replacement. Please see EUT photo and antenna spec. for details.

The antenna gain is less than 6dBi. Therefore, it is not necessary to reduce maximum output power limit.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

でためのです。 除非另有就明,此根告結果僅對測試之樣品負責,同時此樣品僅保留知天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law