

产品规格承认书

Product specifications
acknowledgment

承认厂商: _____

(Recognized manufacturers)

制造厂商: _____ shenzhen bat wireless technology co.,ltd

(Manufacturer)

产品名称: _____ 2.4G Flexible plate antenna

(Description)

地址: _____ 1409, Building A, Zhiyun One Industrial Park, No. 13 Huaxing Road, Henglang
(Address)

Community, Dalang Street, Longhua District, Shenzhen.

产品选型表: _____

(Product Type)

型号 model	说明 explain	备注 comment
BW2.4FNX26-10B1L40	IPEX1 Interface length 40mm	Parameters can be customized

供应商承认签栏

The supplier recognizes the TAB

制表者 tabulat or	审核者 auditor	核准者 approver

客户承认栏 Customer
recognition field

审核者 auditor	核准者 approver

--	--

1.1 Specifications

天线型号 Antennas Type	BW2.4FNX26-10B1L40
频率范围 Frequenc Range (MHz)	2400-2500MHz
输入阻抗 Input Impendence (Ω)	50 Ω
电压驻波比 V. S. W. R	<2
增益 Gain (dBi)	3.02dBi
极化形式 Polarization Type	垂直 Vertical
功率容量 Power Capacity (w)	50
雷电保护 Lingtning Protection	None
工作电压 DC Voltage (V)	None
天线尺寸 Dimension (mm)	26x10
接口形式/Connector Type:	IPEX-1
电缆型号 Cable type (mm)	Φ 1.13
电缆长度 Cable length (mm)	40
辐射体 Radiator	None
天线颜色 Color	黑色 Black
重量 Weight (g)	None
工作温度 Operating Temperature ($^{\circ}\text{C}$)	-40~80
储藏温度 Storage Temperature ($^{\circ}\text{C}$)	-20~85

注意：以上数据仅供参考；因天线功能较为敏感，主体周边机构有变更请通知我们评估

attention: The above data is for reference only; Because the antenna function is more sensitive, please inform us of any changes in the surrounding institutions.

1.2 Antenna Picture



上图型号：BW2.4FNX26-10B1，图片仅供参考

(Custom customer middle connection line length customization, antenna shape customization)

*注：因天线功能较为敏感，主体周边机构有变更请通知我们评估。

attention : Because the antenna function is more sensitive, please inform us of any changes in the surrounding institutions

2. Electrical Specification

2.1 Test Equipment

- A. VSWR and input impedance: Agilent 8753/E5071 Network Analyzer
- B. Antenna gain and efficiency: ETS three-dimensional anechoic chamber

2.2 Test Setup

2.2.1 Frequency Range

2.2.2 VSWR

Step 1: The antenna is arranged on the customer provided test fixture.

Step 2: The VSWR of the antenna is measured via Agilent 8720/8753 Network Analyzer (see figure. 1).



Figure.1

2.2.3 Radiation pattern and Gain

- A. The 3D chamber provides less than -40dB reflectivity from 800MHz to 6GHz and a 40cm diameter spherical quiet zone. The measurement results are calibrated using both dipoles and standard gain horns (see figure. 2).
- B. The antenna under tested is arranged in the turned table and a decoupling sleeve is used to reduce feed line radiation (see figure. 3).
- C. The measured results of the radiation patterns and antenna gain are obtained from the control system and showed on the monitor (see figure. 4 and 5).

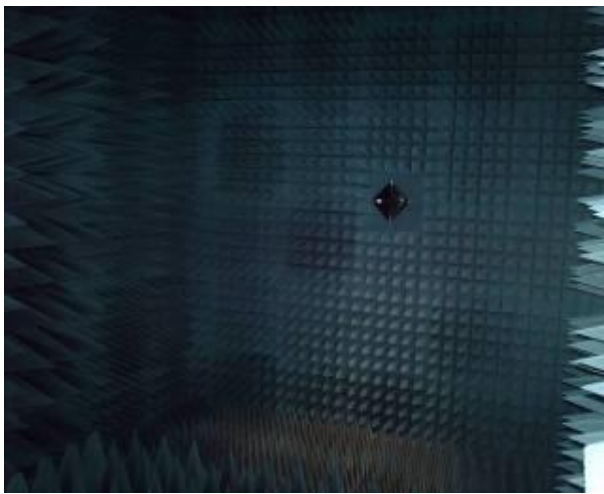


Figure.2



Figure.3



Figure.4



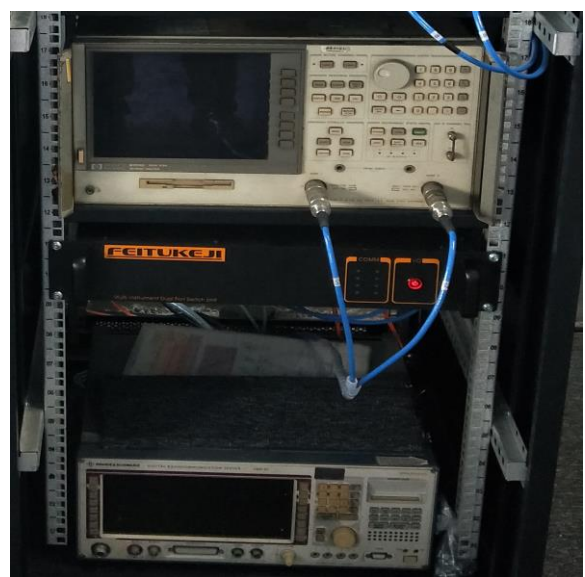


Figure.5

3. Performance Data

3.1 Passive data

VSWR (电压驻波比) / Return Loss (回波损耗) / Smith Chart (史密斯圆图)

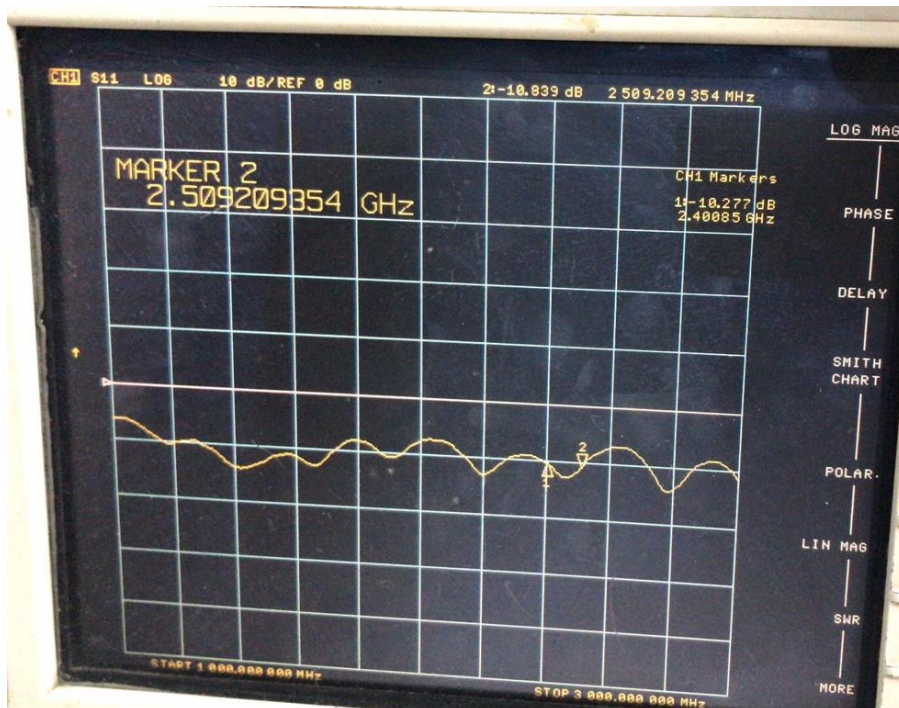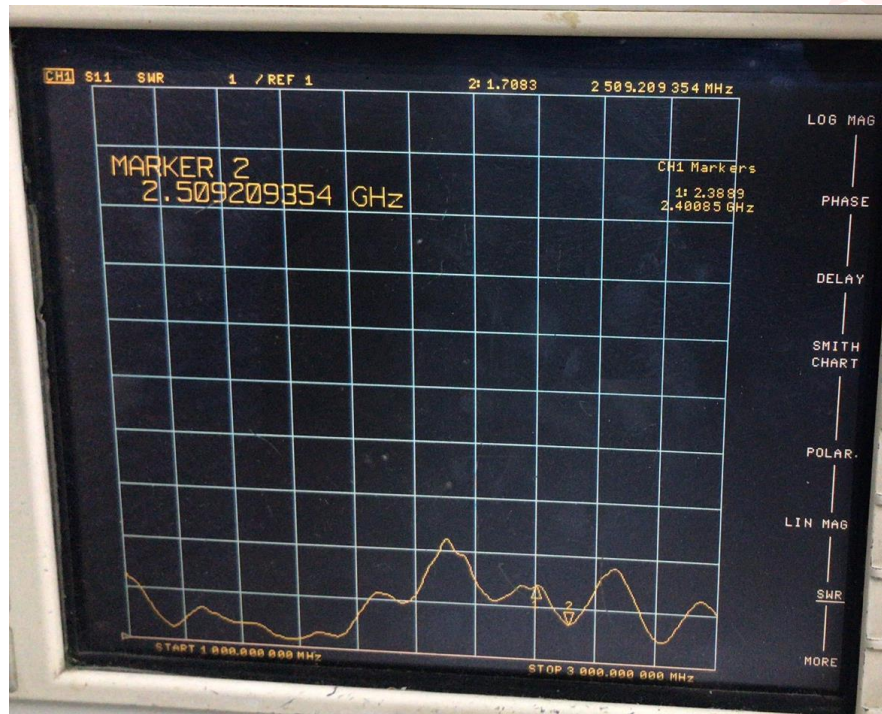


*注：以上为实测数据，仅供参考；因天线功能较为敏感，主体周边机构有变更请通知我们评估

Attention: The above is measured data, for reference only; Because the antenna function is more sensitive, please inform us if the surrounding institutions have changed.

gain


Passive Test For WIFI										
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Gain (dBd)	UHS (%)	DHIS (%)	Max (dB)	Min (dB)	Attenut Hor	Attenut Ver
2400	65.99	-1.8	2.99	0.84	35.629	30.365	2.99	-8.28	48.09	47.94
2410	61.32	-2.12	2.62	0.47	32.762	28.557	2.62	-8.32	48.07	47.87
2420	60.58	-2.18	2.52	0.37	32.121	28.457	2.52	-8.49	48.18	48
2430	61.75	-2.09	2.58	0.43	32.561	29.188	2.58	-9.08	48.17	47.99
2440	64.63	-1.9	2.73	0.58	34.122	30.503	2.73	-9.66	48.33	48.11
2450	66.86	-1.75	2.86	0.71	35.326	31.534	2.86	-9.93	48.44	48.14
2460	67.45	-1.71	2.92	0.77	35.514	31.938	2.92	-9.82	48.41	48.06
2470	68.53	-1.64	3.02	0.87	35.718	32.817	3.02	-9.44	48.49	48.11
2480	67.12	-1.73	2.94	0.79	34.493	32.624	2.94	-11.1	48.63	48.18
2490	64.57	-1.9	2.74	0.59	32.811	31.763	2.74	-12.94	48.76	48.29
2500	63.95	-1.94	2.7	0.55	32.027	31.926	2.7	-14.21	48.69	48.16

Apple chart

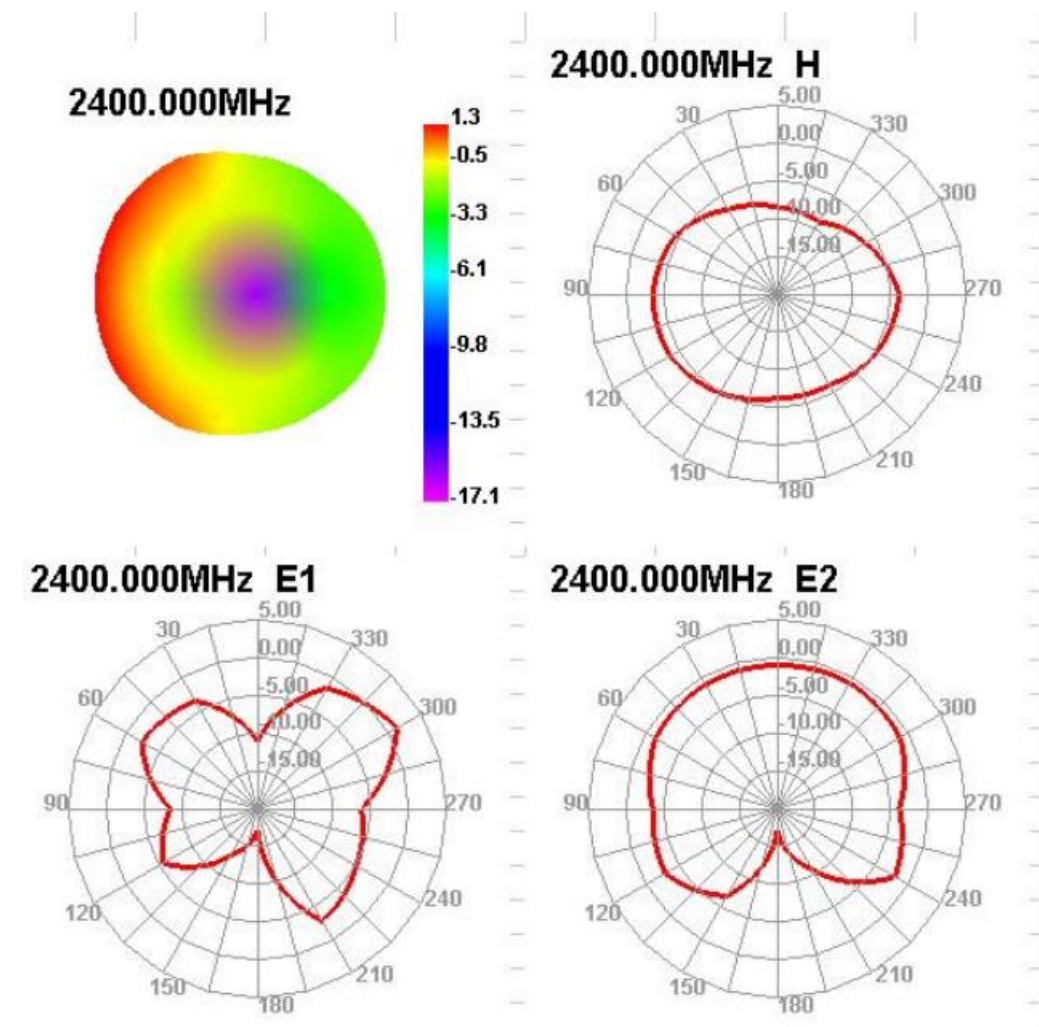

4. Mechanical Specification

4.1 Assembly Drawing

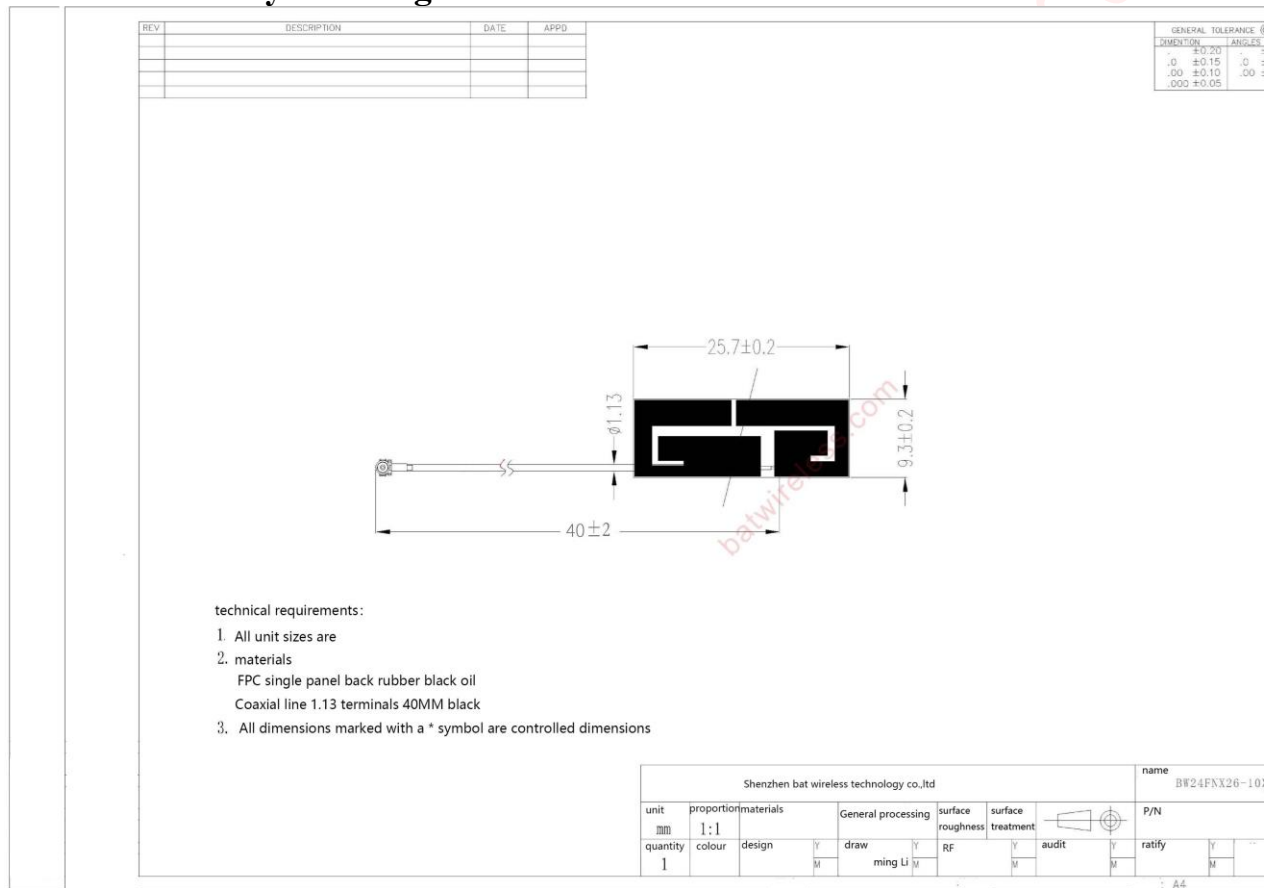

5. RF113

1. 适用范围

本规格书制定了电线的结构和电气特性

同轴线
AWG 32

1. Scope

This specification covers the construction and the electrical properties of wire.

Coaxial Wire
AWG 32

2. 结构/Construction

单位/Unit: mm


项目/Item		单位/Unit	详细资料/Details
Conductor 导体	材料/Material	-	绞合镀银铜丝 Silver-coated copper wire
	构成/Composition	(No./mm)	7/0.08
	外径/OD.	mm	0.24
	绞向/Orientation	-	S
Insulation 绝缘层	材料/Material	-	FEP(进口料)
	绝缘颜色/Insulation color	-	本色/Natural
	标称绝缘厚度/ Nom. Thickness	mm	0.22
	绝缘线径/OD.	mm	0.69
Braid Shield 编织	材料/Material	-	镀锡铜丝 Tinned copper wire
	构成/Composition	(No./mm)	16/4/0.05
	编织密度/Coverage	(%)	≥90
Jacket 外被	材料/Material	-	FEP
	标称绝缘厚度/ Nom. Thickness	mm	0.12
	外径/OD.	mm	1.13±0.10

3. Electrical Properties (at 20℃) /电气特性(20℃时)

项目/Item	单位/Unit	详细资料/Details
导体电阻/Conductor Resistance	Ω/km	571 (Max.)
绝缘电阻/Insulation Resistance	MΩ • km	100 (Min.)
耐压强度(AC)/Dielectric Strength(AC)	V/ 1 Min	500
特性阻抗/Impedance	Ω	50±3
耐温等级/ Temperature	℃	200
额定电压/rated voltage	V	30

4. 电线截面图示如下:

The cross-section of
the wire is shown below



6.免责声明(Disclaimer)：

本着为用户提供更好服务的原则，深圳市蝙蝠无线技术有限公司（下称“蝙蝠无线”）在本手册中将尽可能地为用户呈现详实、准确的产品信息。但鉴于本手册的内容具有一定的时效性，蝙蝠无线不能完全保证该文档在任何时段的时效性与适用性。蝙蝠无线有权在没有通知的情况下对本手册上的内容进行更新，恕不另行通知。为了得到最新版本的信息，请尊敬的用户定时访问蝙蝠无线官方网站或者与蝙蝠无线工作人员联系。感谢您的包容与支持！

In order to provide our users with better service, Shenzhen Bat Wireless Technology Co.,Ltd (hereinafter referred to as Bat Wireless) will try to present as detailed and accurate product information as possible in this manual. However, due to the timeliness of the manual content, Bat Wireless shall not absolutely guarantee the unlimited timeliness and applicability of the file. Bat Wireless has the right to update the manual content without further notice. To get the latest edition information, pls visit the official website of Bat Wireless or contact our customer service staff. Thanks for your trust and support!