



Test Report - FCC Part 90 Booster Class A (B9A)

Applicant: Fiplex Communications Inc.

Approved for Release By:

Signature: Bruno Clavier

Name & Title: Bruno Clavier, General Manager

Date of Signature 12/15/2023

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA). This test report relates only to the items tested as identified and is not valid for any subsequent changes or modifications made to the equipment under test.

Table of Contents

1. APPLICANT INFORMATION.....	4
1.1 TEST RESULT SUMMARY	4
2. LOCATION OF TESTING.....	8
2.1 TEST LABORATORY.....	8
2.2 TESTING WAS PERFORMED, REVIEWED BY	8
3. TEST SAMPLE(S) (EUT/DUT).....	9
3.1 DEFINITIONS.....	9
3.2 DESCRIPTION OF THE EUT	10
3.3 CONFIGURATION OF EUT	11
3.4 TEST SETUP OF EUT	11
4. TEST METHODS & APPLICABLE REGULATORY LIMITS.....	12
4.1 TEST METHODS/STANDARDS/GUIDANCE:	12
4.2 APPLIED LIMITS AND REGULATORY LIMITS:	12
5. MEASUREMENT UNCERTAINTY	12
6. ENVIRONMENTAL CONDITIONS.....	12
6.1 TEMPERATURE & HUMIDITY.....	12
7. LIST OF TEST EQUIPMENT AND TEST FACILITY	13
7.1 LIST OF TEST EQUIPMENT	13
8. TEST RESULTS.....	15
8.1 POWER AT THE FINAL AMPLIFIER.....	16
8.2 RF OUTPUT POWER & GAIN	17
8.3 OUT-OF-BAND REJECTION	18
8.3.1 <i>Test Plot, Class A.</i>	19
8.4 BANDWIDTH & EMISSION	20
8.5 INPUT VS OUTPUT SIGNAL COMPARISON	21
8.5.1 <i>6.25 kHz FM, Input Signal</i>	23
8.5.2 <i>12.5 kHz FM, Input Signal</i>	24
8.5.3 <i>25 kHz FM, Input Signal</i>	25
8.5.4 <i>C4FM, Input Signal</i>	26
8.5.5 <i>H-CPM, Input Signal</i>	27
8.5.6 <i>H-DQPSK, Input Signal</i>	28
8.5.7 <i>6.25 kHz, FM, Mask H & IC, AGC, 851 MHz</i>	29
8.5.8 <i>12.5 kHz, FM, Mask H, AGC, 851 MHz</i>	30
8.5.9 <i>25 kHz FM, Mask G & H, AGC, 851 MHz</i>	31
8.5.10 <i>C4FM, Mask H, AGC, 851 MHz</i>	32
8.5.11 <i>H-CPM, Mask H, AGC, 851 MHz</i>	33
8.5.12 <i>H-DQPSK, Mask H, AGC, 851 MHz</i>	34
8.5.13 <i>6.25 kHz, FM, Mask G & IC, AGC, 860 MHz</i>	35
8.5.14 <i>12.5 kHz, FM, Mask D, AGC, 860 MHz</i>	36



8.5.15	25 kHz FM, Mask G & D, AGC, 860 MHz	37
8.5.16	C4FM, Mask D, AGC, 860 MHz	38
8.5.17	H-CPM, Mask D, AGC, 860 MHz	39
8.5.18	H-DQPSK, Mask D, AGC, 860 MHz	40
8.5.19	6.25 kHz, FM, Mask G & IC, AGC, 869 MHz	41
8.5.20	12.5 kHz, FM, Mask D, AGC, 869 MHz	42
8.5.21	25 kHz FM, Mask G & D, AGC, 869 MHz	43
8.5.22	C4FM, Mask D, AGC, 869 MHz	44
8.5.23	H-CPM, Mask D, AGC, 869 MHz	45
8.5.24	H-DQPSK, Mask D, AGC, 869 MHz	46
8.6	NOISE FIGURE	47
8.7	OUT-OF-BAND/OUT-OF-BLOCK EMISSIONS (INTERMODULATION PRODUCTS)	48
8.7.1	6.25 kHz Signal, Test Plot, AGC, 851 MHz	49
8.7.2	12.5 kHz Signal, Test Plot, AGC, 851 MHz	50
8.7.3	25 kHz Signal, Test Plot, AGC, 851 MHz	51
8.7.4	6.25 kHz Signal, Test Plot, AGC, 860 MHz	52
8.7.5	12.5 kHz Signal, Test Plot, AGC, 860 MHz	53
8.7.6	25 kHz Signal, Test Plot, AGC, 860 MHz	54
8.7.7	6.25 kHz Signal, Test Plot, AGC, 869 MHz	55
8.7.8	12.5 kHz Signal, Test Plot, AGC, 869 MHz	56
8.7.9	25 kHz Signal, Test Plot, AGC, 869 MHz	57
8.8	EMISSION MASK, OUT-OF-BAND	58
8.8.1	30 MHz to 1 GHz, 851 MHz	59
8.8.2	1 GHz to 10 th Harmonic, 851 MHz	60
8.8.3	30 MHz to 1 GHz, 860 MHz	61
8.8.4	1 GHz to 10 th Harmonic, 860 MHz	62
8.8.5	30 MHz to 1 GHz, 869 MHz	63
8.8.6	1 GHz to 10 th Harmonic, 869 MHz	64
8.9	SPURIOUS RADIATED EMISSIONS	65
8.9.1	Test Plot, 851 MHz	66
8.9.2	Test Plot, 860 MHz	67
8.9.3	Test Plot, 869 MHz	68
8.10	ADJACENT CHANNEL POWER LIMITS	69
8.10.1	ACP, Test Plot, 860 MHz	70
8.10.2	ACP, Test Plot, 869 MHz	71
9.	ANNEX-B – TEST SETUP PHOTOGRAPHS	72
10.	HISTORY OF TEST REPORT CHANGES	72



Industrial Inspection & Analysis
13146 NW 86th Drive, Suite 400, Alachua, Florida 32615
(352) 472-5500 / testing@industrial-ia.com

1. Applicant Information

Applicant: Fiplex Communications Inc.
Address: 2101 NW 79th Avenue
Miami, Florida, 33122, United States

1.1 Test Result Summary

The following test procedure and guidance were used for measuring FCC PART 90 (PRIVATE LAND MOBILE RADIO SERVICES) known as Licensed Land Mobile; ANSI C63.26-2015 and FCC KDB 935210 D05 v01r04 Industrial Signal Boosters. Full test results are available in this report.

No additions to the test methods were needed. There were no deviations, or exclusions from the test methods. No test results are from external providers or from the customer. The test results relate only to the items tested. Timco does not offer opinions and interpretations, only a pass/fail statement.

Applicable Clauses from Part 2		
FCC Part 2 Clauses	Description of the requirements	Result: (Pass, Fail, N/A)
2.202	Bandwidth & Emission	Pass
2.1033 (c)(8)	Power at the Final Amplifier	Pass
2.1046 (a)	RF Output Power	Pass
2.1047	Modulation characteristics	n/a
2.1049	Occupied Bandwidth	Pass
2.1051	Spurious emissions at antenna terminals	Pass
2.1053	Field strength of spurious radiation	Pass
2.1055	Frequency stability	n/a

Applicable Clauses from Part 90 Subpart I		
FCC Part 90 Clauses	Description of the requirements	Result: (Pass, Fail, N/A)
90.205	Transmitter Power	Pass
90.207	Types of Emissions	Pass
90.209	Bandwidth limitations	Pass
90.210	Emission masks, In-band	Pass
90.210	Emission masks, Out-of-band	Pass
90.213	Frequency stability	n/a
90.214	Transient Frequency Behavior	n/a
90.219 (d)(6)(i)	ERP of intermodulation products	n/a ¹
90.219 (d)(6)(ii)	ERP of noise within the passband	n/a ¹
90.219 (d)(6)(iii)	ERP of noise on spectrum < 1 MHz outside of the passband	n/a ¹
90.219 (d)(3)(i), (e)(1)	ERP of Radiated Power	n/a ¹
90.219 (e)(2)	Noise figure	Pass
90.219 (e)(3)	Spurious emissions	Pass
90.219 (e)(4)(i)(ii)(iii)	Retransmitted Signals	Pass
90.221	Adjacent channel power limits	Pass

Note 1: Requirements in Part 90.219 (d) apply at deployment of this EUT, therefore are not applicable at certification.

KDB 935210 D05 v01r04		
FCC KDB 935210 D05 Clauses	Description of the requirements	Result: (Pass, Fail, N/A)
4.1	Test Signals for PLMRS (Input Signals)	Pass
4.2	AGC Threshold	Reported
4.3	Out-of-Band Rejection	Reported
4.4	Input-versus-Output Signal Comparison	Pass
4.5	Output Power	Pass
4.5	Amplifier/Booster Gain (optional)	Reported
4.6	Noise Figure	Pass
4.7.2	Out-of-band/Out-of-block Conducted Emissions (Intermodulation Products)	Pass



Industrial Inspection & Analysis
13146 NW 86th Drive, Suite 400, Alachua, Florida 32615
(352) 472-5500 / testing@industrial-ia.com

4.7.3	EUT Spurious Conducted Emissions	Pass
4.8	Frequency Stability	n/a
4.9	Spurious Radiated Emissions	Pass



KDB 484596 D01 v01		
FCC KDB 935210 D05 Clauses	Description of the requirements	Result: (Pass, Fail, N/A)
3 a	Introduction	Reported
3 b	Explain the Differences	Reported
3 c	Spot-check Verification Data	Pass
3 d	Reference Section	Reported

Introduction

Equipment classes B9A and B9B are not allowed to be filed under the same FCC ID. However, FCC ID P3TDHS40-1A is electrically identical to FCC ID P3TDHS40-1B. The EUT uses software to limit the passband, converting the EUT from a Class B Industrial Signal Booster into a Class A Industrial Signal Booster. The test data is valid to be re-used due to the Class B operation of the EUT being worst-case in all aspects. The Class A operation represented in this filing was equal or more compliant with FCC Part 90 in all respects. Therefore all testing is to be considered identical, and has been re-used following the guidelines of KDB 484596.

Explain the Differences

FCC ID P3TDHS40-1A is electrically identical to FCC ID P3TDHS40-1B and has no difference in hardware. The EUT uses software to limit the passband from widths equal to or greater than 75 kHz to widths less than 75 kHz.

Spot-Check Verification Data

Please see sections Out-of-Band Rejection and Spurious Radiated Emissions in this report for Spot-Check data.

Reference Section

All original test data is from FCC ID P3TDHS40-HG-B, test report "TR_10341-23_FCC_PT90_Booster Class B_1.docx".



Industrial Inspection & Analysis
13146 NW 86th Drive, Suite 400, Alachua, Florida 32615
(352) 472-5500 / testing@industrial-ia.com

2. Location of Testing

2.1 Test Laboratory

Timco Engineering Inc. is a subsidiary of Industrial Inspection & Analysis, Inc. ("IIA"). Testing was performed at IIA's permanent laboratory located at 13146 NW 86th Drive, Suite 400, Alachua, Florida 32615.

FCC test firm # 578780

FCC Designation # US1070

FCC site registration is under A2LA certificate # 0955.01

ISED Canada test site registration # 2056A

EU Notified Body # 1177

For all designations see A2LA scope # 0955.01

2.2 Testing was performed, reviewed by

Dates of Testing: 10/15/2023 – 11/9/2023

Signature:

A handwritten signature of Tim Royer.

Sr. EMC Engineer
EMC-003838-NE
The logo for iMARIE Certified Engineer, featuring the text "CERTIFIED" at the top and "iMARIE" in a stylized font with "CERTIFIED ENGINEER" below it, all contained within a circular border.

Name & Title: Tim Royer, EMC Engineer

Date of Signature 12/15/2023

Signature:

A handwritten signature of Kristoffer Costa.

Name & Title: Kristoffer Costa, EMC Technician

Date of Signature 12/15/2023



Industrial Inspection & Analysis
13146 NW 86th Drive, Suite 400, Alachua, Florida 32615
(352) 472-5500 / testing@industrial-ia.com

3. Test Sample(s) (EUT/DUT)

The test sample was received: 9/29/2023

3.1 Definitions

Signal booster: A device or system that automatically receives, amplifies, and retransmits signals from wireless stations into and out of building interiors, tunnels, shielded outdoor areas and other locations where these signals would otherwise be too weak for reliable communications. Signal booster systems may contain both Class A and Class B signal boosters as components.

Class A signal booster: A signal booster designed to retransmit signals on one or more specific channels. A signal booster is deemed to be a Class A signal booster if none of its passbands exceed 75 kHz.

Class B signal booster: A signal booster designed to retransmit any signals within a wide frequency band. A signal booster is deemed to be a Class B signal booster if it has a passband that exceeds 75 kHz.



3.2 Description of the EUT

A description as well as unambiguous identification of the EUT(s) tested. Where more than one sample is required for technical reasons (such as the use of connected units for the purpose of conducted output power testing where the product units will have integral antennas), each specific test shall identify which unit was tested.

Identification	
FCC ID:	P3TDHS40-HG-A
Brief Description	800 MHz Single Carrier Amplifier (SCA) Class A
Model(s) #	DHS40
Firmware version	N/A
Software version	V1.5
Serial Number	N/A

Technical Characteristics	
Frequency Range	851 MHz- 869 MHz
RF O/P Power (Max.)	37.79 dBm/ 6.011 W
Modulation	FM
Bandwidth & Emission Class	12K3F3E, 7K85F3E, 4K02F3E, 8K18F1D, 8K18F1E, 7K96F1W, 9K60F1D, 9K60F1E, 9K60D7W
Number of Channels	N/A
Duty Cycle	100 %
Antenna Connector	N Type
Voltage Rating (AC or Batt.)	110 VAC

Antenna Characteristics			
Antenna	Frequency Range	Mode / BW	Antenna Gain
1	n/a	n/a	0 dBi

- Note: Information such as antenna gain, firmware/software numbers are provided by the manufacturer and cannot be validated by the test lab.



3.3 Configuration of EUT

Test Modes		
Band (MHz)	Link Direction	Test Frequencies (MHz)
851- 869 MHz	N/A	851 MHz
		860 MHz
		869 MHz

Operating conditions during Testing:

No other modifications of the device under test (including firmware, specific software settings, and input/output signal levels to the EUT) were made.

Peripherals used during Testing:

A laptop was used to program the EUT.

3.4 Test Setup of EUT

Equipment, antenna, and cable arrangement. The setup of the equipment and cable or wire placement on the test site that produces the highest radiated and the highest ac power line conducted emissions shall be shown clearly and described. Information on the orientation of portable equipment during testing shall be included. Drawings or photographs may be used for this purpose.

Test Setups are included in the test report.



Industrial Inspection & Analysis
13146 NW 86th Drive, Suite 400, Alachua, Florida 32615
(352) 472-5500 / testing@industrial-ia.com

4. Test methods & Applicable Regulatory Limits

4.1 Test methods/Standards/Guidance:

Test procedures and guidance for measuring Licensed Part 90 Licensed device:

- 1) ANSI C63.26-2015
- 2) FCC KDB 935210 D05 v01r04 Industrial Signal Boosters

4.2 Applied Limits and Regulatory Limits:

- 1) FCC CFR 47 Part 90 Subpart I, 90.219

5. Measurement Uncertainty

Parameter	Uncertainty (dB)
Conducted Emissions	± 3.14 dB
Radiated Emissions (9kHz – 30 MHz)	± 3.08 dB
Radiated Emissions (30 – 200 MHz)	± 2.16 dB
Radiated Emissions (200 – 1000 MHz)	± 2.15 dB
Radiated Emissions (1 GHz – 18 GHz)	± 2.14 dB
Radiated Emissions (18 GHz – 40 GHz)	± 2.31 dB

Note: The uncertainties provided in this table represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of K=2.

6. Environmental Conditions

6.1 Temperature & Humidity

Measurements performed at the test site did not exceed the following:

Parameter	Measurement
Temperature	23 C +/- 5%
Humidity	55% +/- 5%
Barometric Pressure	30.05 in Hg

Note: Specific environmental conditions that are applicable to a specific test are available in the test result section.



7. List of Test Equipment and Test Facility

The test equipment used identified by type, manufacturer, serial number, or other identification and the date on which the next calibration or service check is due.

Description of the firmware or software used to operate EUT for testing purposes.

A complete list of all test equipment used shall be included with the test report. The manufacturer's model and serial numbers, and date of last calibration, and calibration interval shall be included. Measurement cable loss, measuring instrument bandwidth and detector function, video bandwidth, if appropriate, and antenna factors shall also be included where applicable.

7.1 List of Test Equipment

Test Equipment						
Type	Device	Manufacturer	Model	SN#	Current Cal	Cal Due
Antenna	Biconical 1057	Eaton	94455-1	1057	10/16/20	10/16/2023
Antenna, NSA	Log-Periodic 1243	Eaton	96005	1243	5/4/21	5/3/2024
Antenna	Double- Ridged Horn/ETS Horn 1	ETS-Lindgren	3117	00035923	5/31/23	5/30/2026
CHAMBER	CHAMBER	Panashield	3M	N/A	3/12/19	12/21/2023
Pre-amp	Pre-amp	RF-LAMBDA	RLNA00M45GA	NA	2/27/19	7/26/2025
Receiver	EMI Test Receiver R&S ESU 40	Rohde & Schwarz	ESU 40	100320	5/27/21	5/26/2024
Receiver	EMI Test Receiver R&S ESW44	Rohde & Schwarz	ESW44	103049	10/13/21	10/12/2024
Signal Generator	Signal Generator HP 8648C	HP	8648C	35537A01679	3/29/19	8/03/2025



Industrial Inspection & Analysis
13146 NW 86th Drive, Suite 400, Alachua, Florida 32615
(352) 472-5500 / testing@industrial-ia.com

Software			
Software	Author	Version	Validation on
ESU Firmware	Rohde & Schwarz	4.43 SP3; BIOS v5.1-24-3	2018
RSCommander	Rohde & Schwarz	1.6.4	2014
ScopeExplorer	LeCroy	v2.25.0.0	2009
Field Strength	Timco	v4.10.7.0	2016



Industrial Inspection & Analysis
13146 NW 86th Drive, Suite 400, Alachua, Florida 32615
(352) 472-5500 / testing@industrial-ia.com

8. Test Results

The results of the test are usually indicated in the form of tables, spectrum analyzer plots, charts, sample calculations, as appropriate for each test procedure.

A description and/or a block diagram of the test setup is usually provided.

The measurement results, along with the appropriate limits for comparison, may be presented in tabular or graphical form. In addition, any variation in the measurement environment may be reported if applicable (e.g., a significant change of temperature that could affect the cable loss and amplifier response).

Unless noted otherwise in the referenced standard, the measurements of **ac power-line conducted emissions and conducted power output** will be reported in units of dB μ V. Unless noted otherwise in the referenced standard, the measurements of **radiated emissions** will be reported in units of decibels, referenced to one microvolt per meter (dB μ V/m) for electric fields, or to one ampere per meter (dBA/m) for magnetic fields, at the distance specified in the appropriate standards or requirements. The measurements of antenna-conducted power for receivers may be reported in units of dB μ V if the impedance of the measuring instrument is also reported. Otherwise, antenna-conducted power will be reported in units of decibels referenced to one milliwatt (dBm). All formulas for data conversions and conversion factors, if used, will be included in this measurement report.

Example:

Freq (MHz)	Meter Reading	+ ACF	+CL	= FS
33	20 dB μ V	+ 10.36 dB/m	+0.40 dB	= 30.36 dB μ V/m @ 3m

$$\text{EIRP} = \text{Pcond (dBm)} + \text{dBi}$$



Industrial Inspection & Analysis
13146 NW 86th Drive, Suite 400, Alachua, Florida 32615
(352) 472-5500 / testing@industrial-ia.com

8.1 Power at the Final Amplifier

Referenced from test report "TR_10341-23_FCC_PT90_Booster Class B_1.docx".

Limits from FCC Part 2.1033 (c)(8).


No method of measurement is specified. The result has been calculated based on all available information.

Test Results		
EUT Operating Voltage (V)	EUT Current (A)	Power at the Final Amplifier (W)
24	3.33	79.92

8.2 RF Output Power & Gain

Referenced from test report "TR_10341-23_FCC_PT90_Booster Class B_1.docx".

Limits from FCC Parts 2.1046(a), and 90.205 and test procedure from ANSI C63.26-2015 and FCC KDB 935210 D05 v01r04 Industrial Signal Boosters.

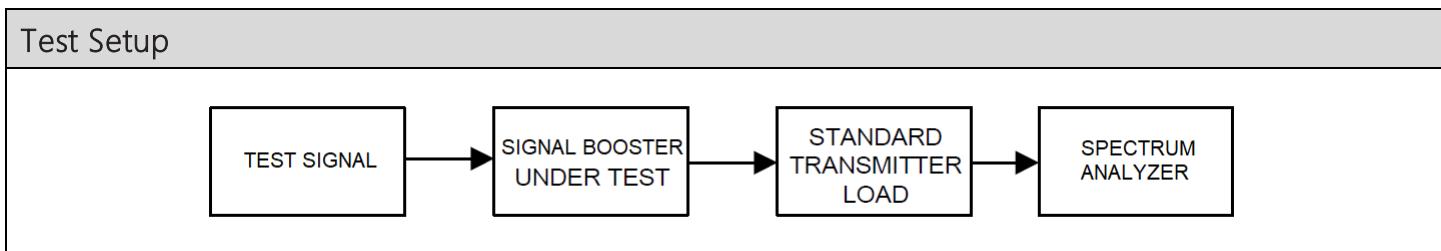

Test Results, Power Output

Link Direction	Max Power Output (dBm)	Max Power Output (W)
N/A	37.79	6.011

Gain


Test Results, Gain

Link Direction	Tuned Frequency (MHz)	Input Level	Power Input (dBm)	Power Output (dBm)	Gain (dB)
N/A	851	AGC	-60	37.79	97.79
	860	AGC	-60	37.13	97.13
	869	AGC	-60	37.3	97.3

6dB adjustment from splitter included in calculation

8.3 Out-of-band Rejection

Limits and test method from FCC KDB 935210 D05 v01r04 Industrial Signal Boosters.

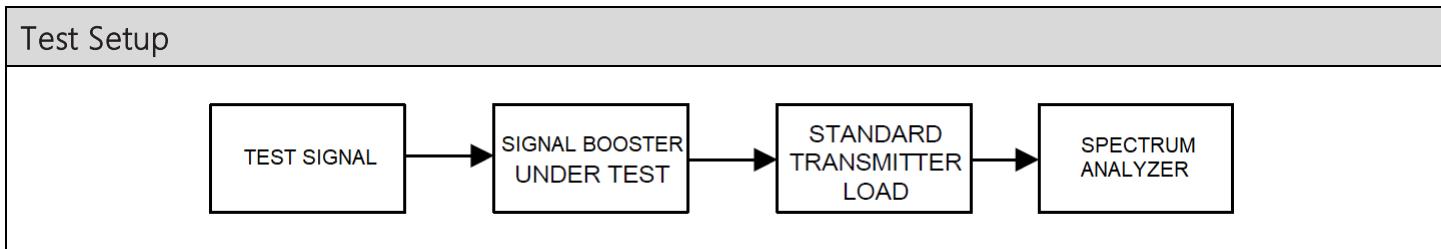


Test Results, Out-of-band Rejection and Class of Operation

Operating Band (MHz)	Link Direction	Passband (kHz)	Class of Operation
851- 869 MHz	N/A	< 75 kHz	Class A

Out-of-band Rejection, Spectrum Plots

8.3.1 Test Plot, Class A

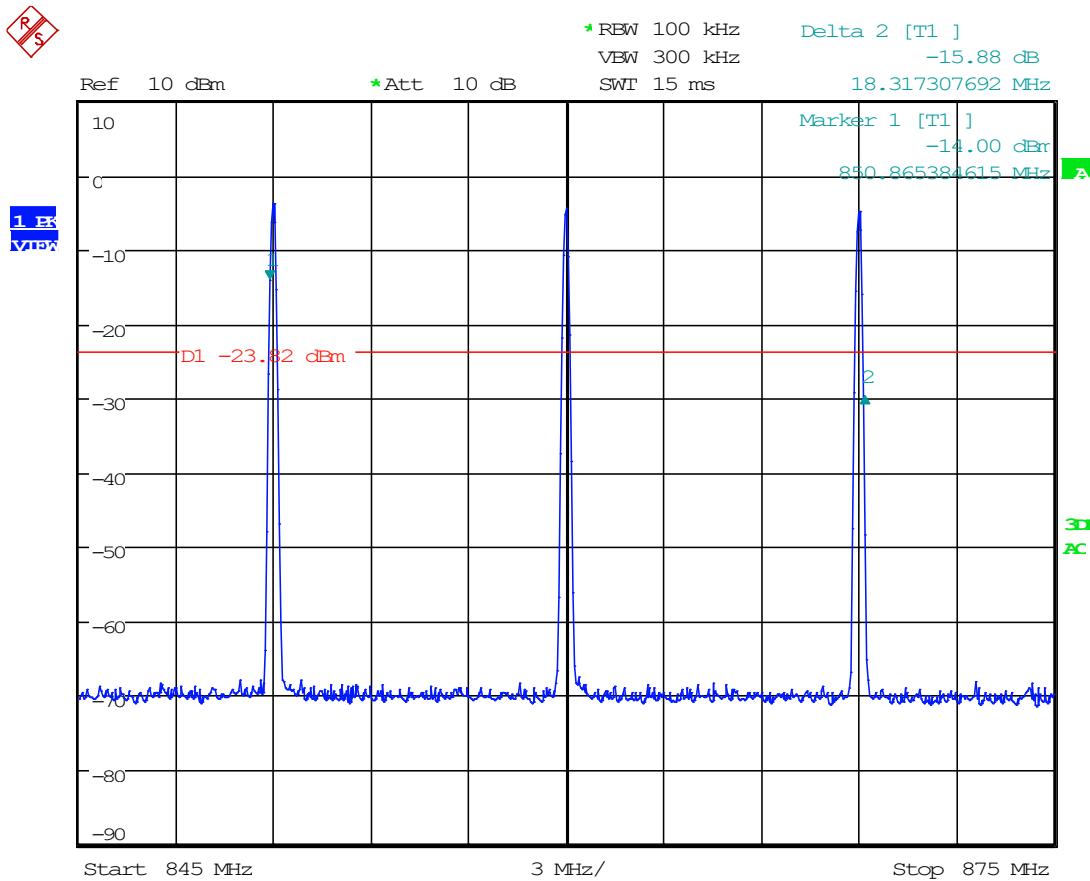

Date: 25.OCT.2023 17:43:05



Industrial Inspection & Analysis
13146 NW 86th Drive, Suite 400, Alachua, Florida 32615
(352) 472-5500 / testing@industrial-ia.com

8.4 Bandwidth & Emission

Referenced from test report "TR_10341-23_FCC_PT90_Booster Class B_1.docx".

Limits from FCC Parts 90.209 and FCC KDB 935210 D05 v01r04 Industrial Signal Boosters.


Authorized Bandwidth		
Rule Part	Operating Range (MHz)	Authorized Bandwidth (kHz)
Part 90	851- 869 MHz	6/11.25/20

Applicable Input Signals		
Signal	Occupied Bandwidth (kHz)	Representative Emission Designator(s)
CW	N/A	N/A
6.25 kHz FM	12.36	12K3F3E
12.5 kHz FM	7.85	7K85F3E
25 kHz FM	4.02	4K02F3E
C4FM (P25 Phase I)	8.18	8K18F1D, 8K18F1E
HCPM (P25 Phase II SU)	7.96	7K96F1W
HDQPSK (P25 Phase II BS)	9.6	9K60F1D, 9K60F1E, 9K60D7W

8.5 Input VS Output Signal Comparison

Referenced from test report "TR_10341-23_FCC_PT90_Booster Class B_1.docx".

Limits from FCC Parts 90.210 and test procedure from ANSI C63.26-2015 and FCC KDB 935210 D05 v01r04 Industrial Signal Boosters.

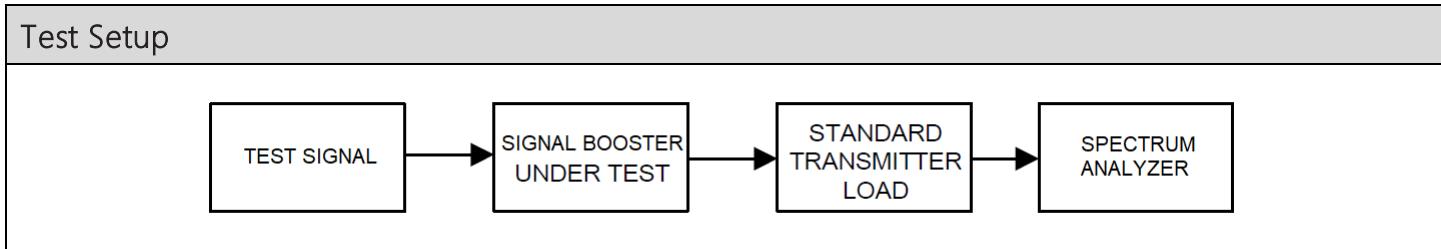


VHF Band Input VS Output Comparison

Test Results, Input VS Output Comparison						
Link Direction	Tuned Frequency (MHz)	Input Signal	AGC Level	99% OBW of Input (kHz)	99% OBW of Output (kHz)	Change (%)
N/A	851 MHz	6.25 kHz FM	@ AGC	4.038	4.04	0.002
		12.5 kHz FM	@ AGC	6.21	7.81	1.6
		25 kHz FM	@ AGC	10.21	12.35	2.14
		C4FM	@ AGC	7.71	8.08	0.37
		HCPM	@ AGC	7.71	8.08	0.37
		HDQPSK	@ AGC	9.91	9.84	0.07
N/A	860 MHz	6.25 kHz FM	@ AGC	4.038	4.04	0.002
		12.5 kHz FM	@ AGC	6.21	7.81	1.6
		25 kHz FM	@ AGC	10.21	12.35	2.14
		C4FM	@ AGC	7.71	8.54	0.83
		HCPM	@ AGC	7.71	7.85	0.14
		HDQPSK	@ AGC	9.91	9.76	0.15
N/A	869 MHz	6.25 kHz FM	@ AGC	4.038	4.04	0.002
		12.5 kHz FM	@ AGC	6.21	7.85	1.64
		25 kHz FM	@ AGC	10.21	12.35	2.14
		C4FM	@ AGC	7.71	7.85	0.14
		HCPM	@ AGC	7.71	7.96	0.25
		HDQPSK	@ AGC	9.91	9.72	0.19


Input VS Output, Input Spectrum Plots

8.5.1 6.25 kHz FM, Input Signal

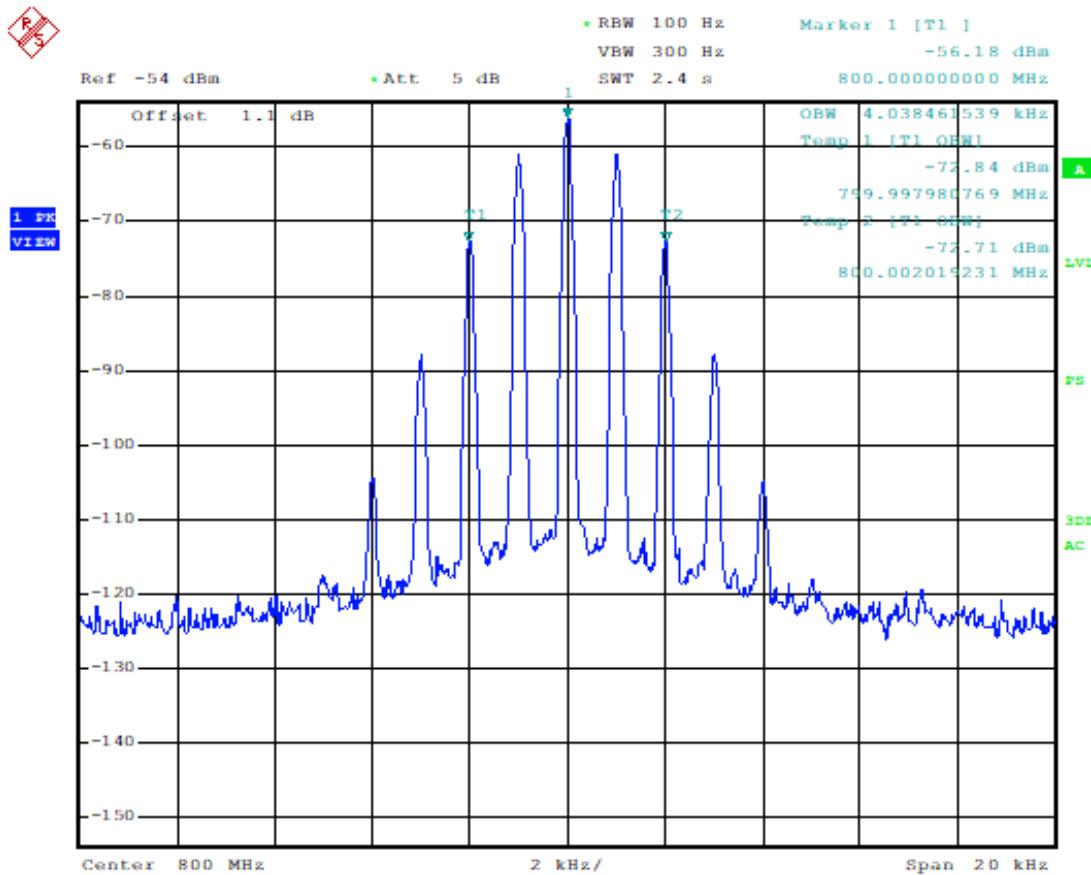


Date: 30.JAN.2019 13:10:11

8.5.2 12.5 kHz FM, Input Signal

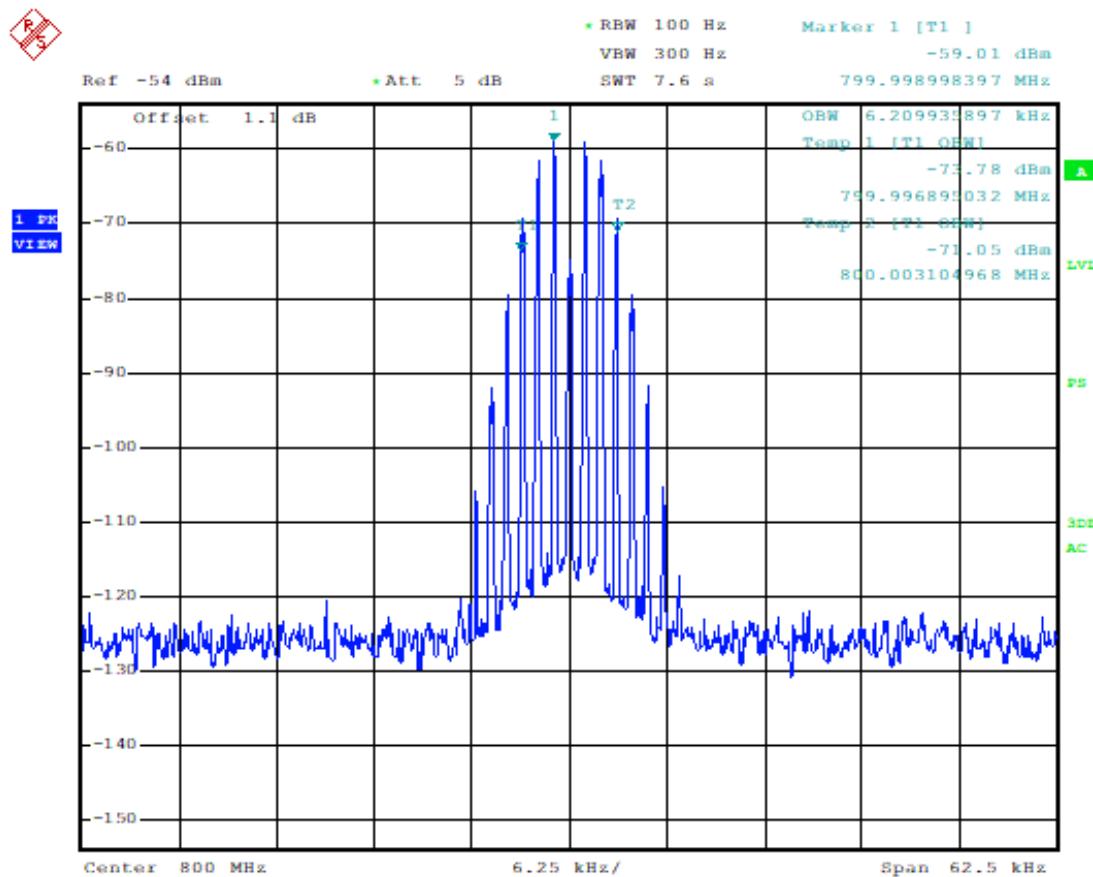


Date: 30.JAN.2019 14:19:45

8.5.3 25 kHz FM, Input Signal

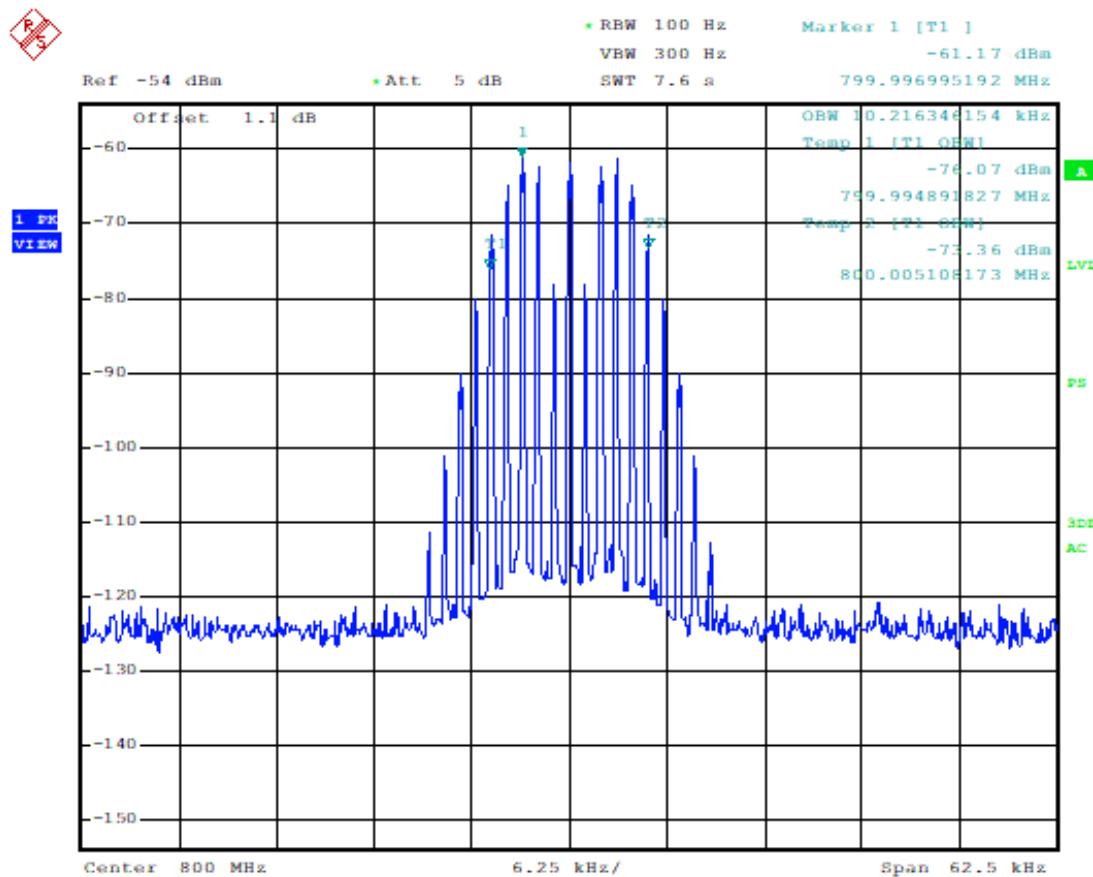


Date: 30.JAN.2019 14:23:14

8.5.4 C4FM, Input Signal

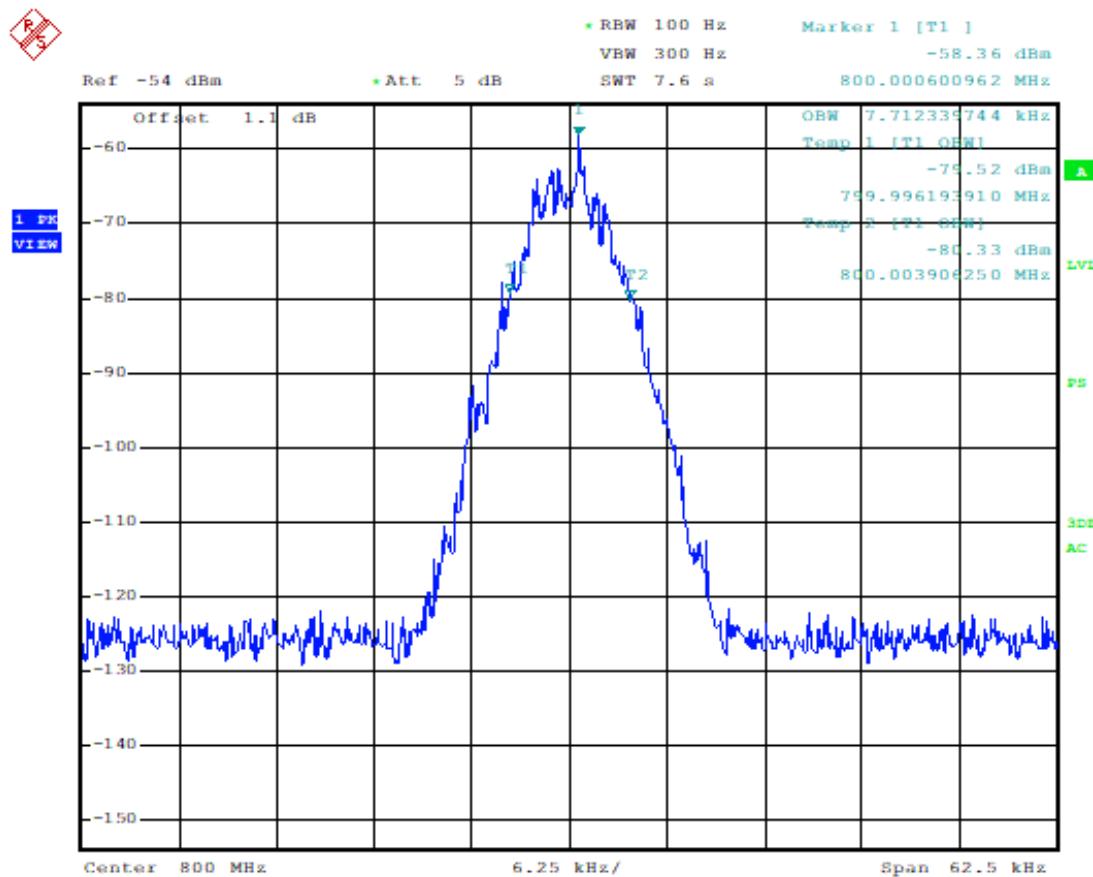


Date: 30.JAN.2019 14:28:58

8.5.5 H-CPM, Input Signal

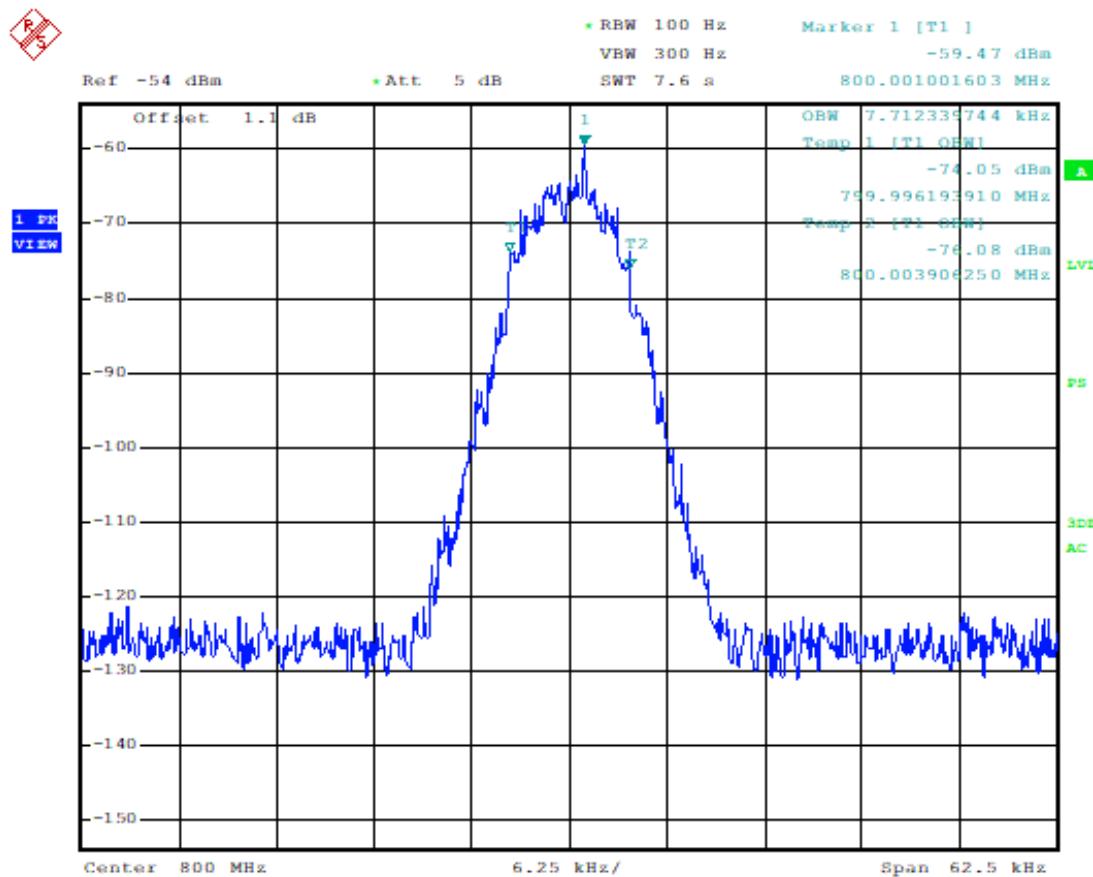


Date: 30.JAN.2019 14:30:47

8.5.6 H-DQPSK, Input Signal

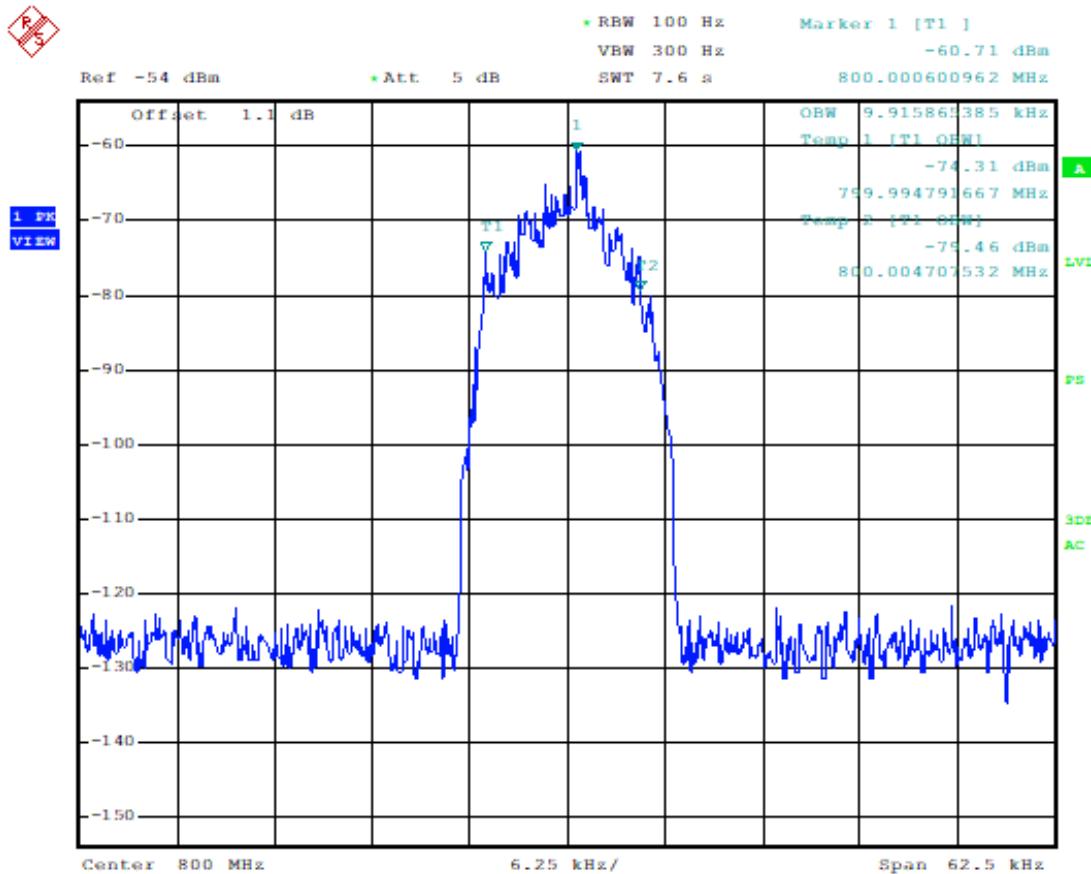


Date: 30.JAN.2019 14:32:35

8.5.7 6.25 kHz, FM, Mask H & IC, AGC, 851 MHz

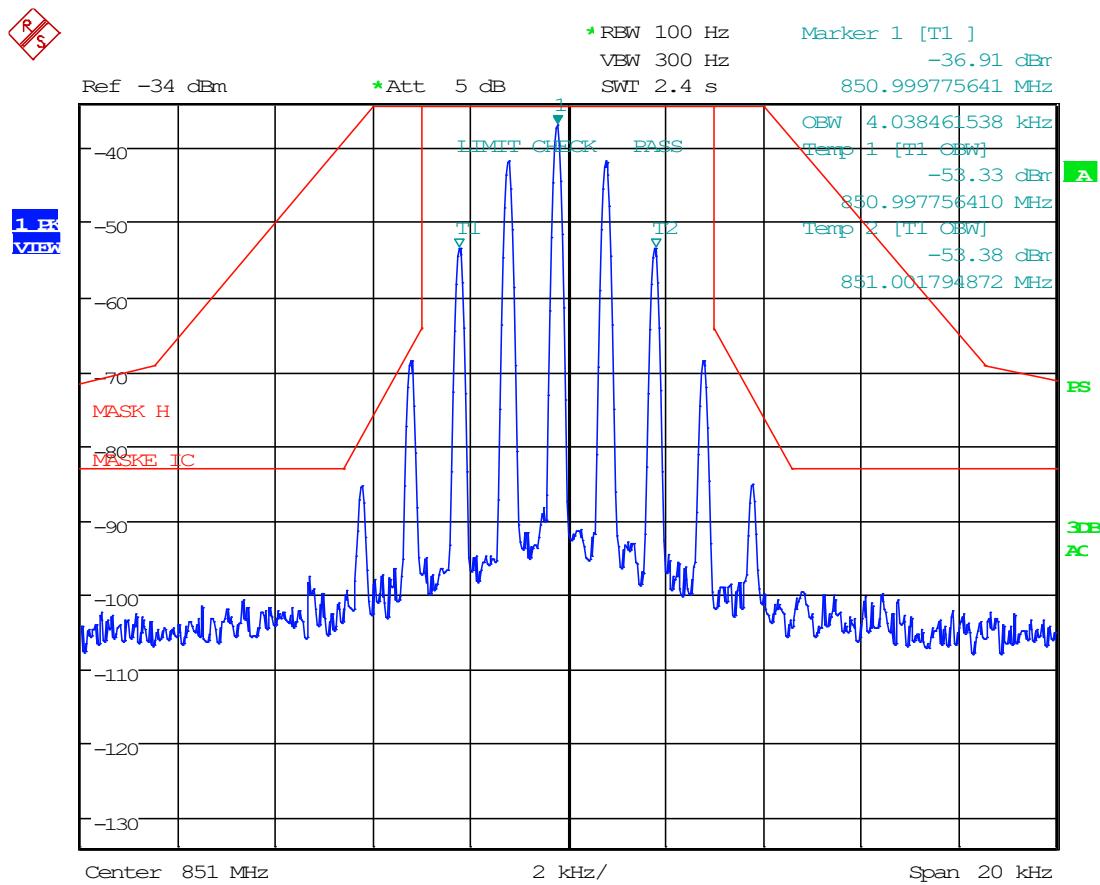


Date: 20.OCT.2023 11:01:27

8.5.8 12.5 kHz, FM, Mask H, AGC, 851 MHz

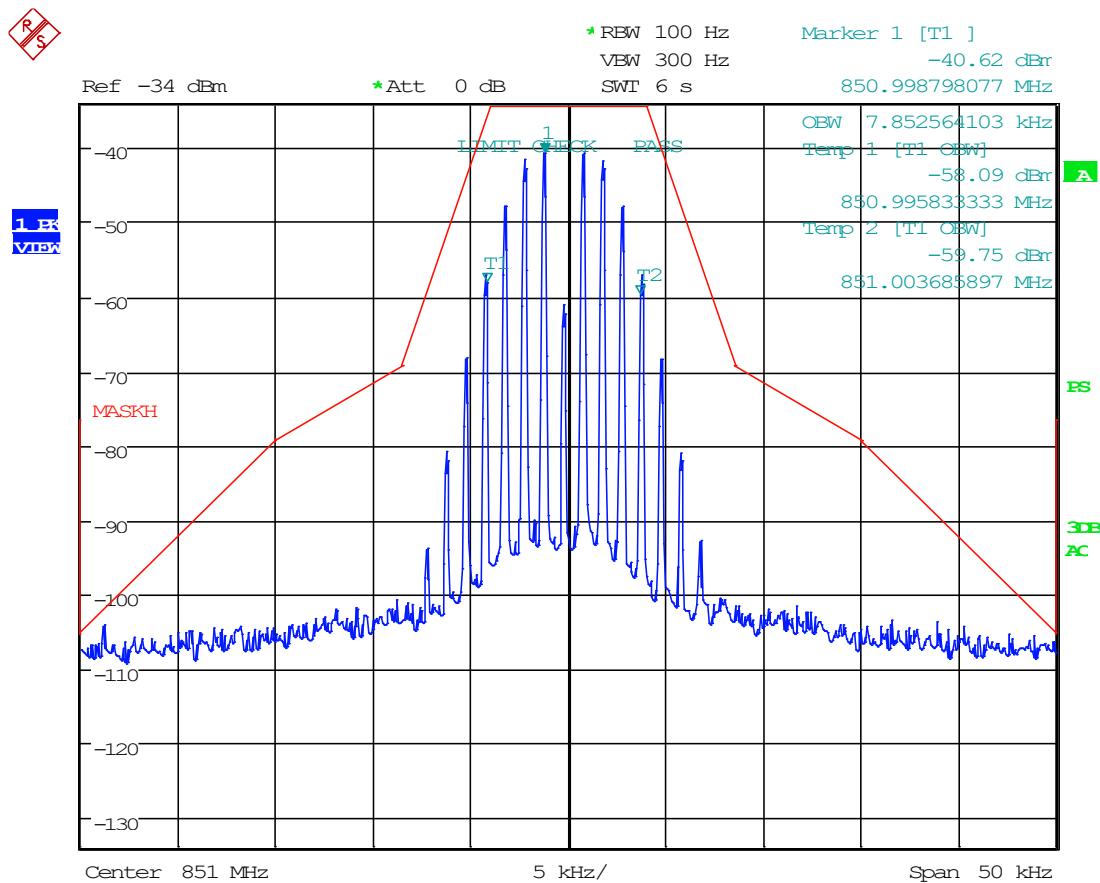


Date: 20.OCT.2023 10:42:56

8.5.9 25 kHz FM, Mask G & H, AGC, 851 MHz

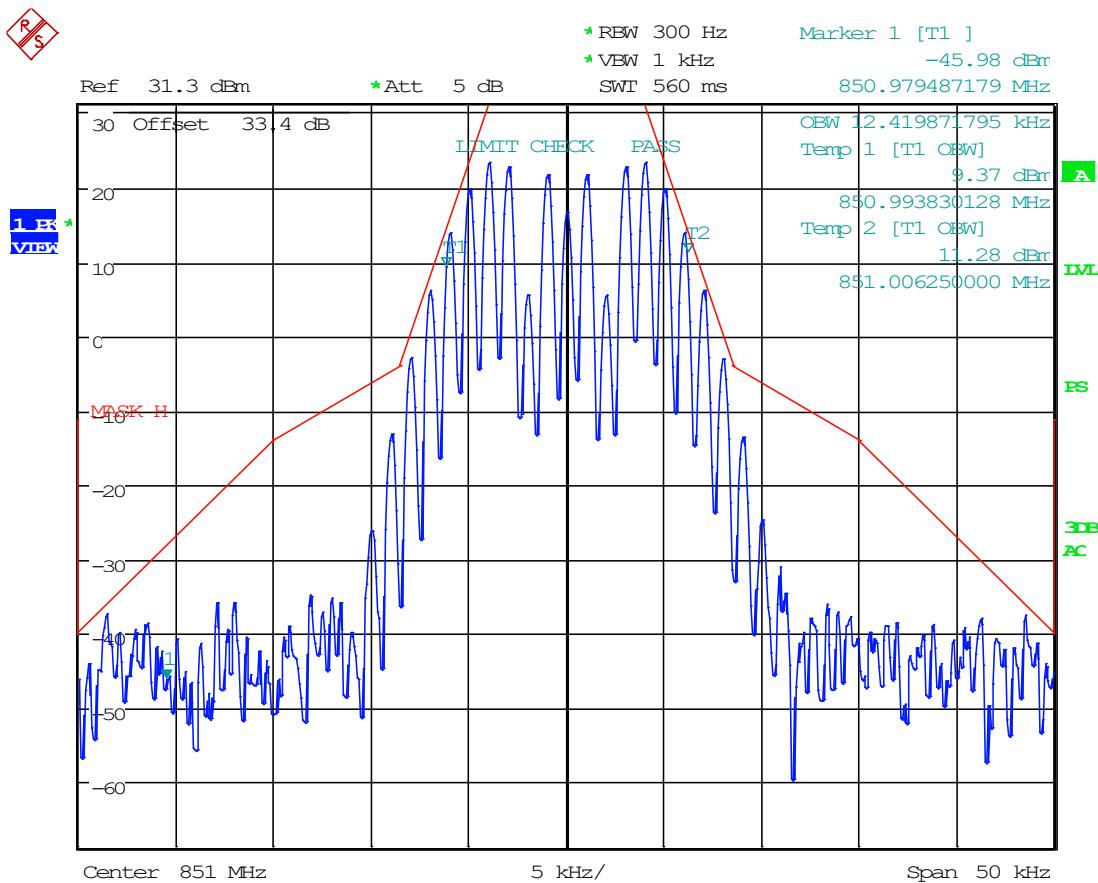


Date: 9.NOV.2023 12:24:32

8.5.10 C4FM, Mask H, AGC, 851 MHz

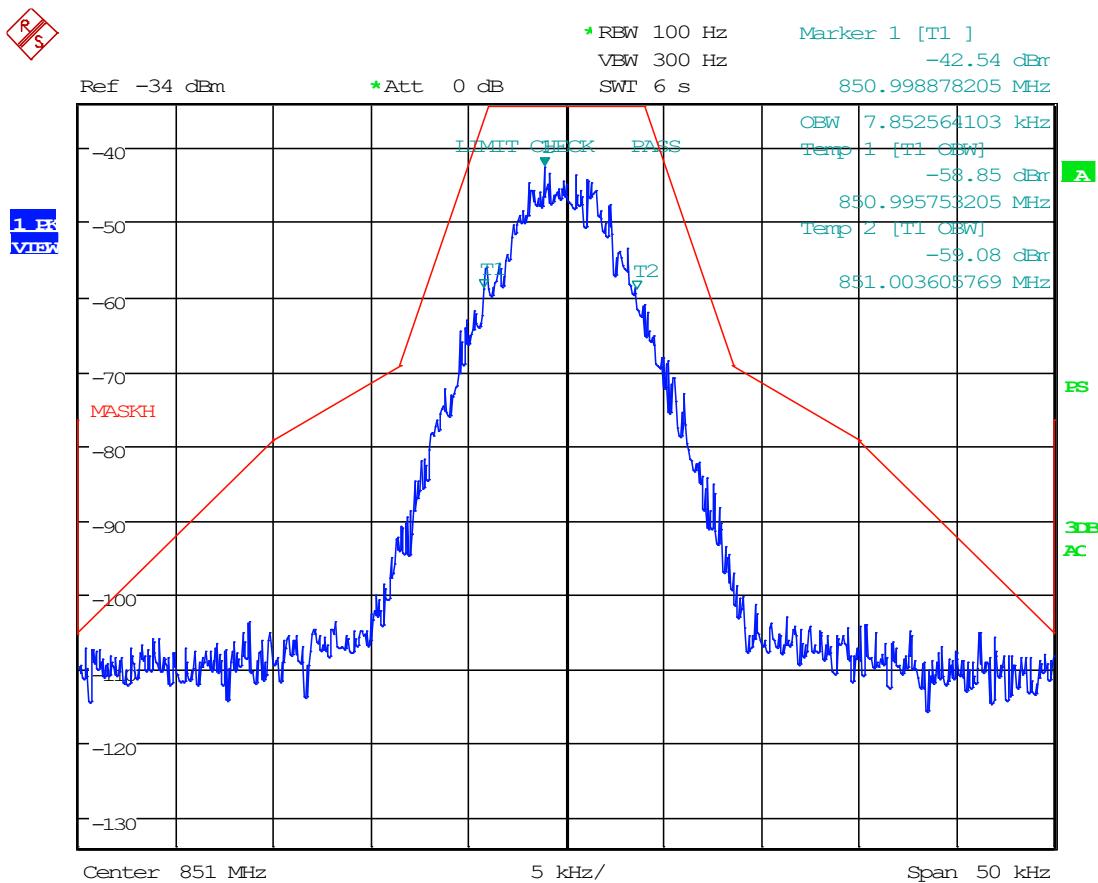


Date: 20.OCT.2023 10:51:51

8.5.11 H-CPM, Mask H, AGC, 851 MHz

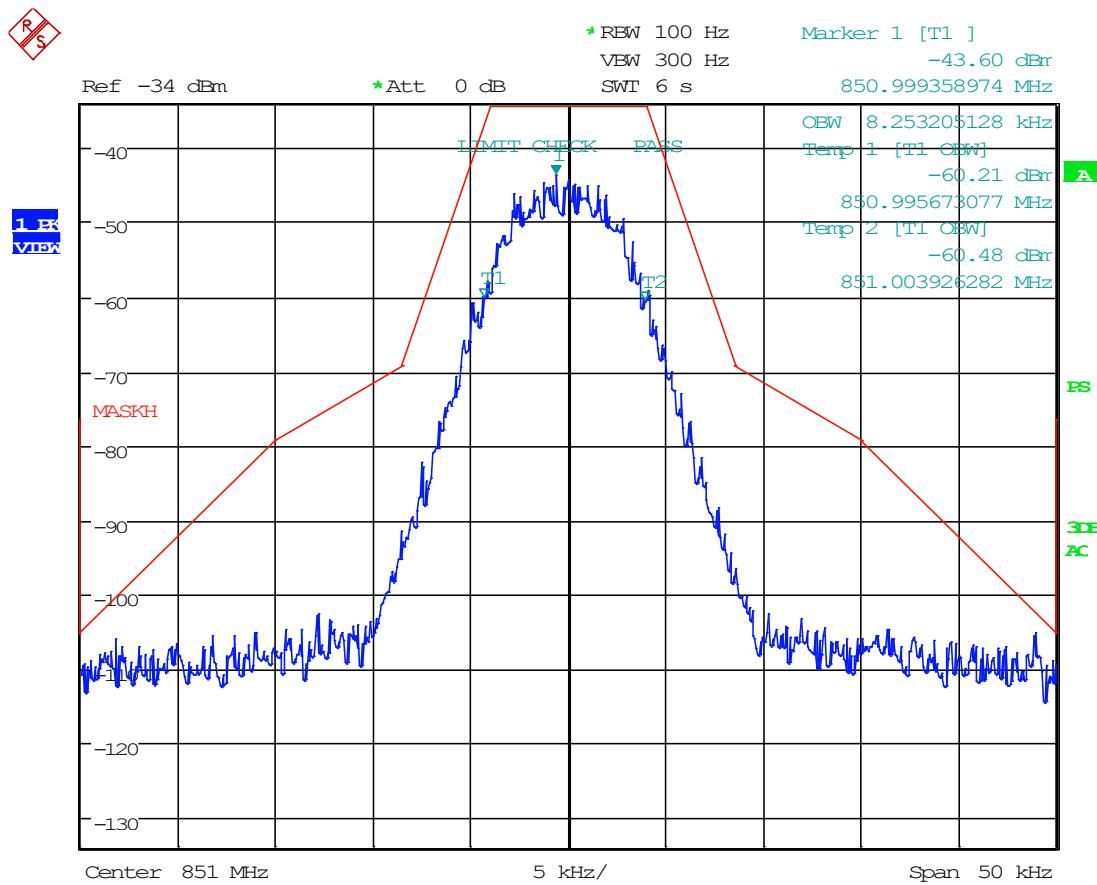


Date: 20.OCT.2023 10:52:53

8.5.12 H-DQPSK, Mask H, AGC, 851 MHz

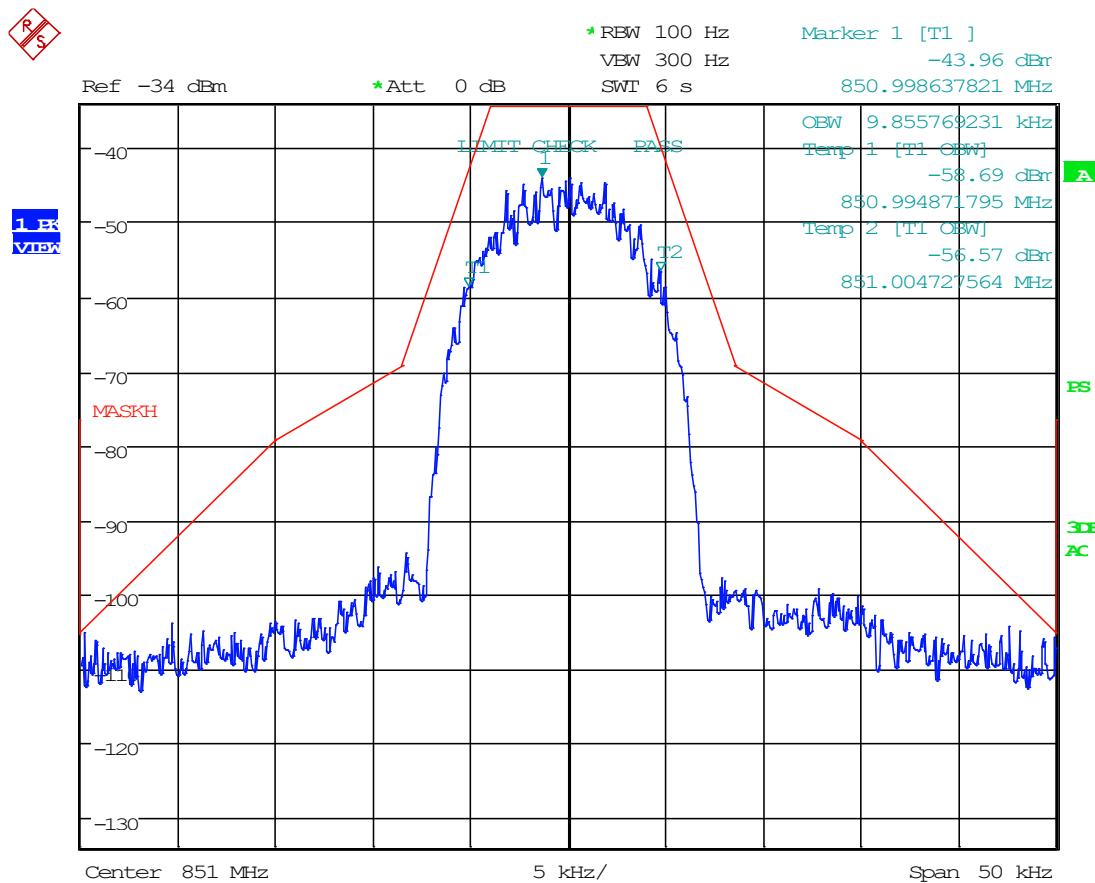


Date: 20.OCT.2023 10:53:56

8.5.13 6.25 kHz, FM, Mask G & IC, AGC, 860 MHz

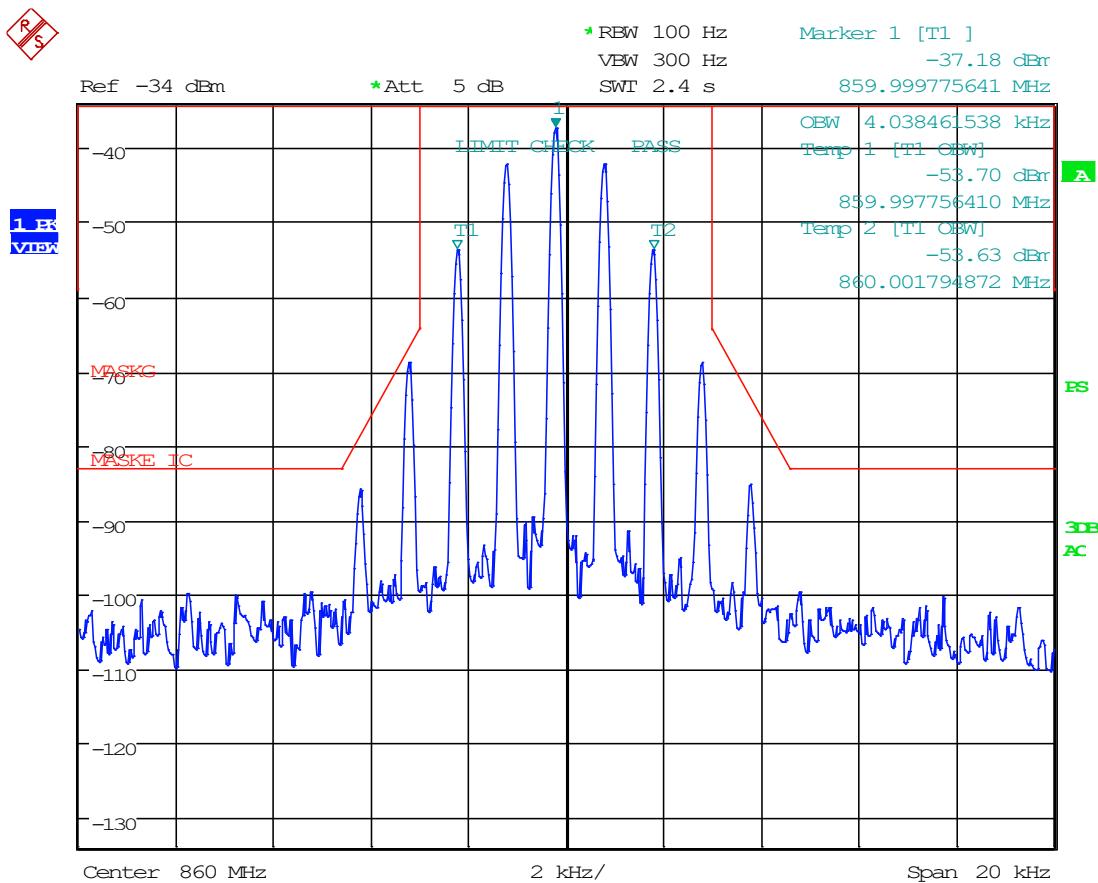

Date: 20.OCT.2023 11:39:04

8.5.14 12.5 kHz, FM, Mask D, AGC, 860 MHz

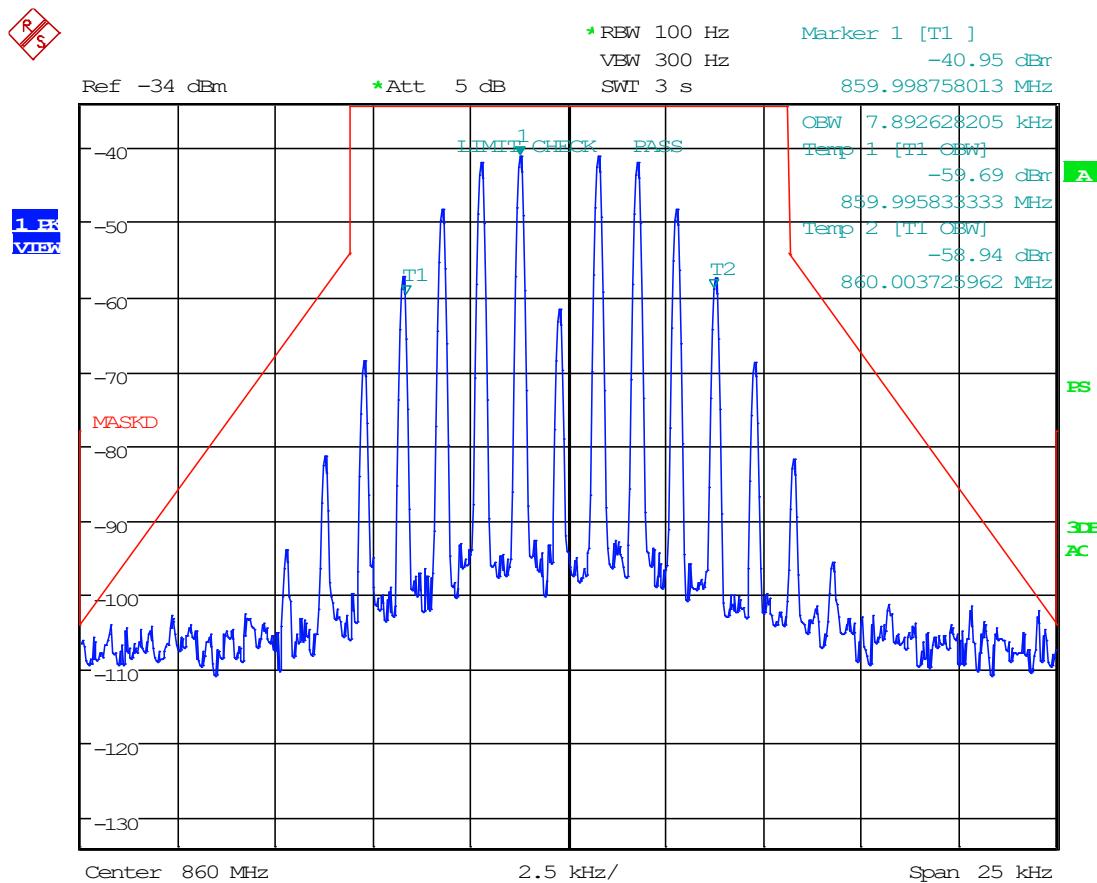

Date: 20.OCT.2023 11:12:49




Industrial Inspection & Analysis
13146 NW 86th Drive, Suite 400, Alachua, Florida 32615
(352) 472-5500 / testing@industrial-ia.com

8.5.15 25 kHz FM, Mask G & D, AGC, 860 MHz


Not Needed: See Adjacent Power Limits Section 8.10.2

8.5.16 C4FM, Mask D, AGC, 860 MHz

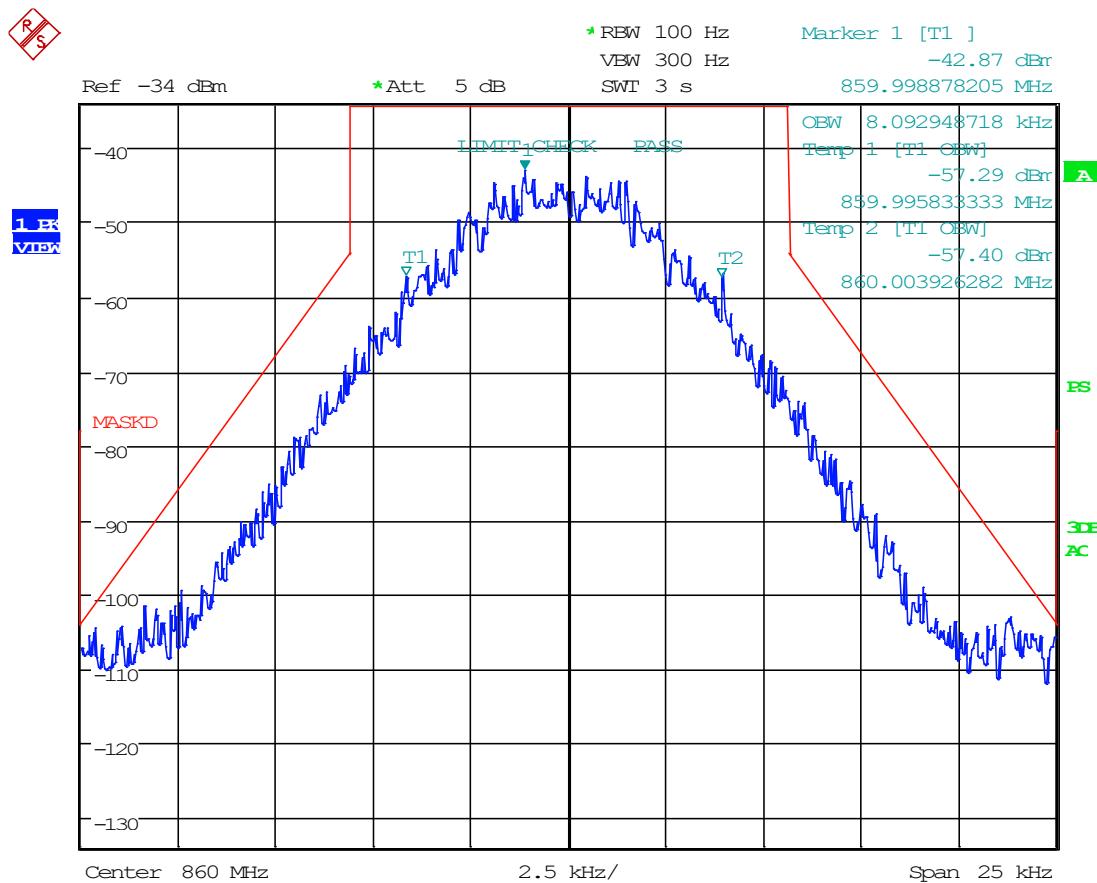


Date: 20.OCT.2023 11:15:12

8.5.17 H-CPM, Mask D, AGC, 860 MHz

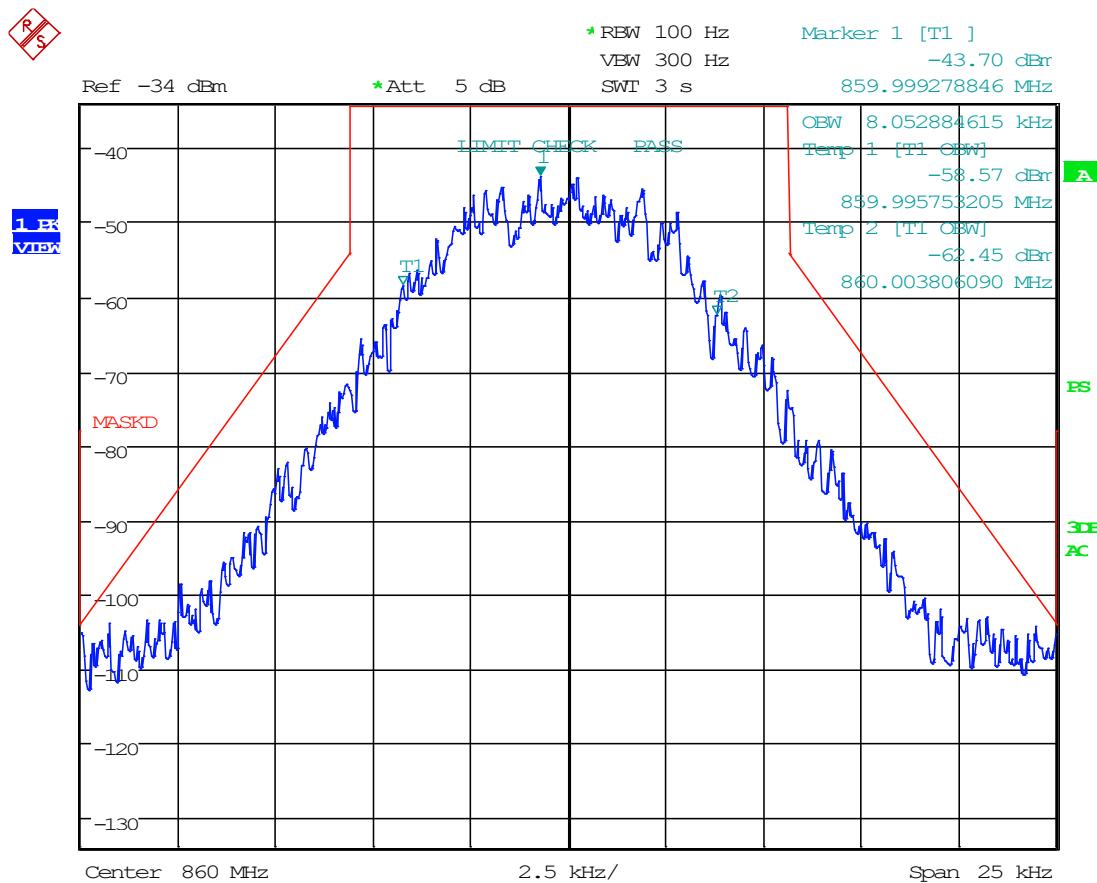


Date: 20.OCT.2023 11:16:39

8.5.18 H-DQPSK, Mask D, AGC, 860 MHz

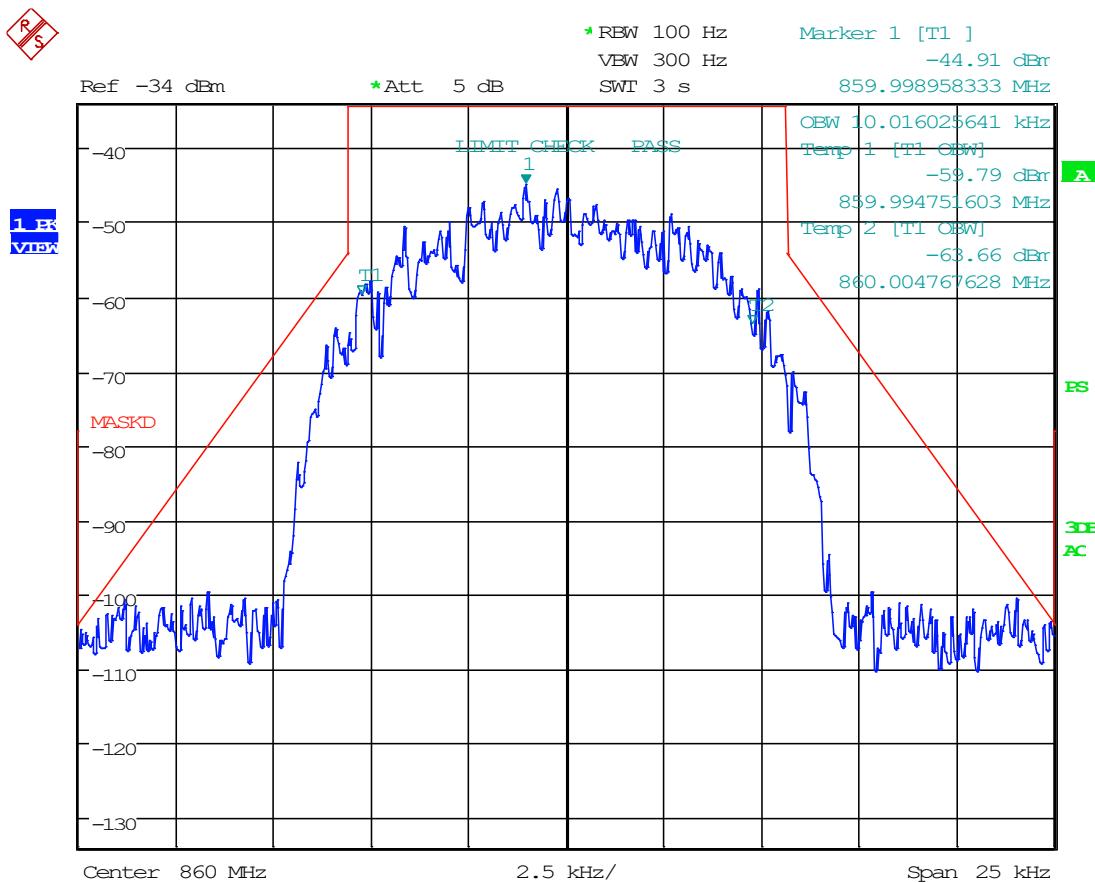


Date: 20.OCT.2023 11:18:05

8.5.19 6.25 kHz, FM, Mask G & IC, AGC, 869 MHz

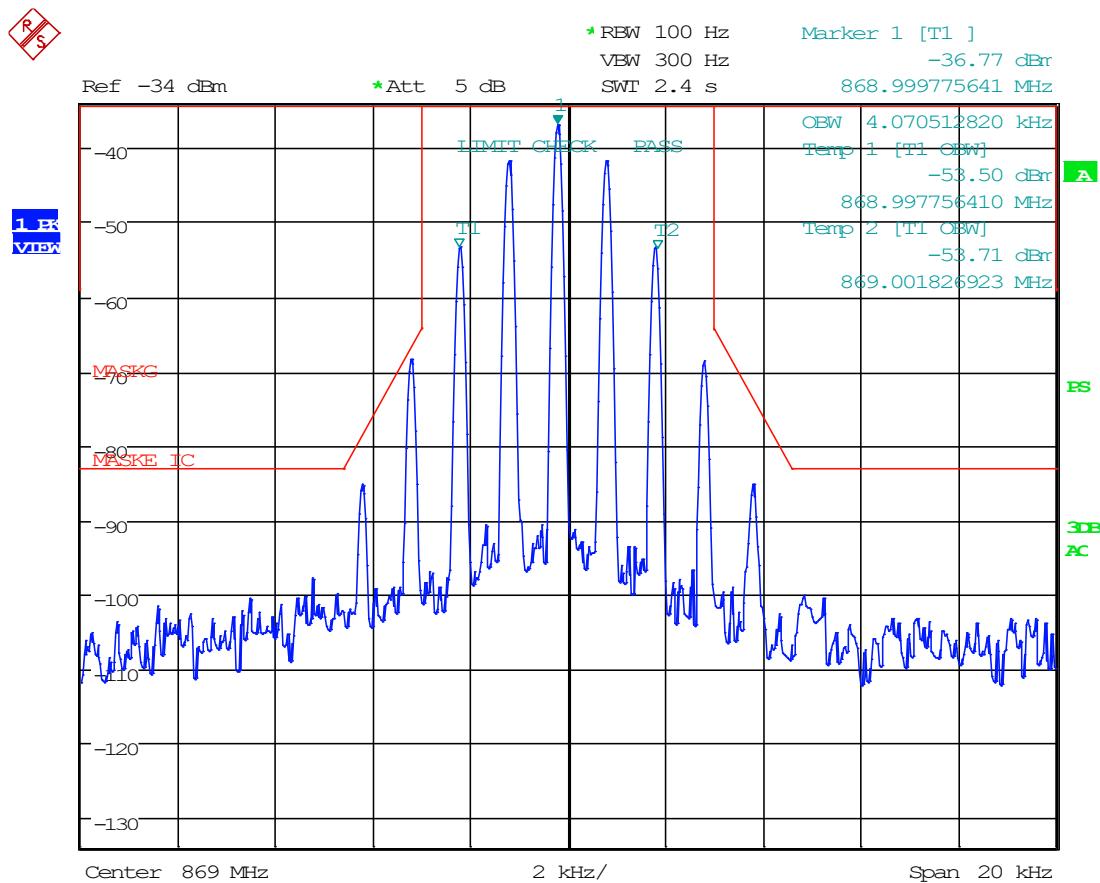

Date: 20.OCT.2023 11:44:18

8.5.20 12.5 kHz, FM, Mask D, AGC, 869 MHz

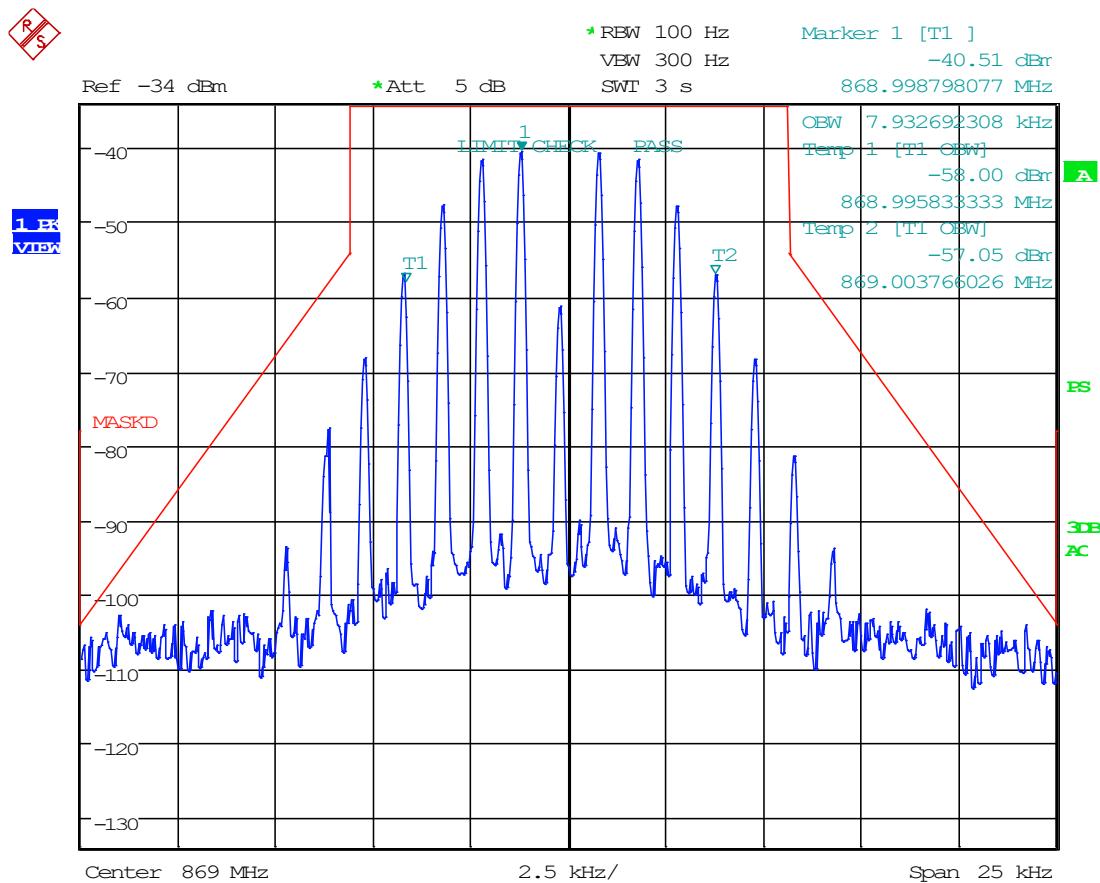

Date: 20.OCT.2023 11:46:04




Industrial Inspection & Analysis
13146 NW 86th Drive, Suite 400, Alachua, Florida 32615
(352) 472-5500 / testing@industrial-ia.com

8.5.21 25 kHz FM, Mask G & D, AGC, 869 MHz


Not Needed: See Adjacent Power Limits Section 8.10.3

8.5.22 C4FM, Mask D, AGC, 869 MHz

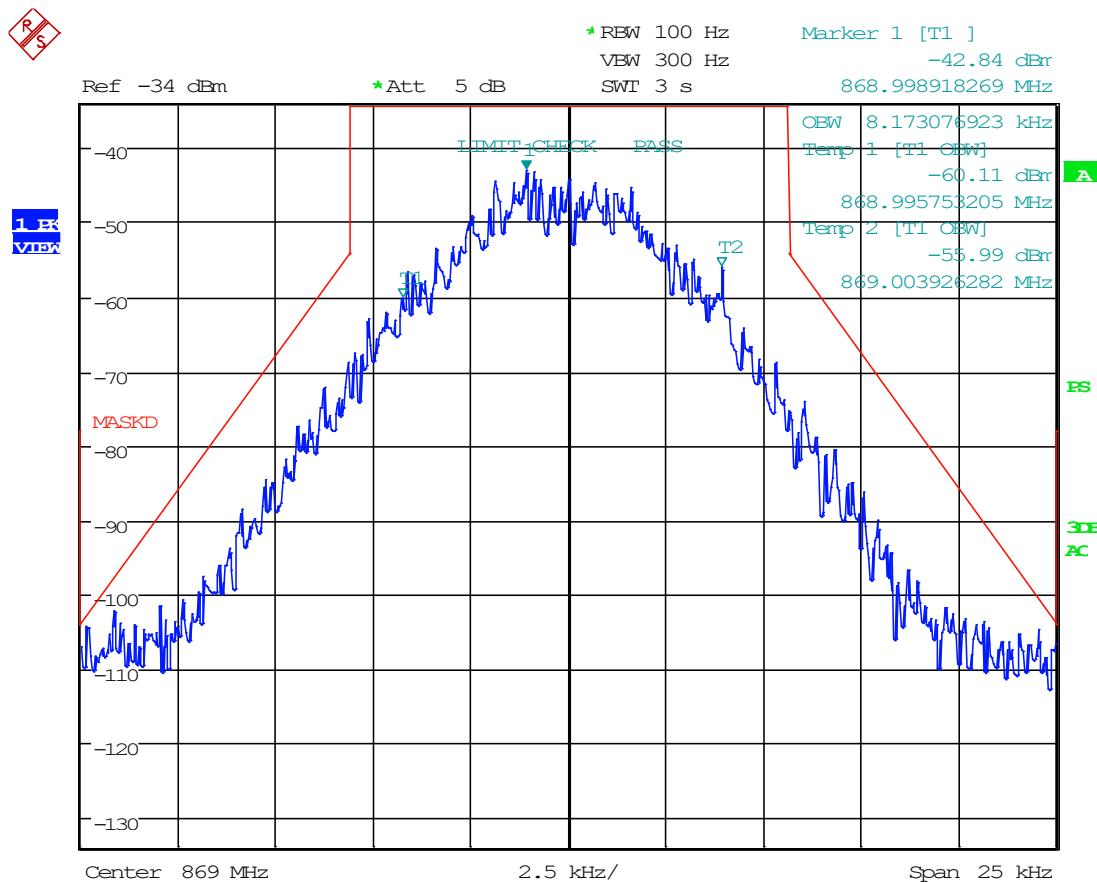


Date: 20.OCT.2023 11:47:11

8.5.23 H-CPM, Mask D, AGC, 869 MHz

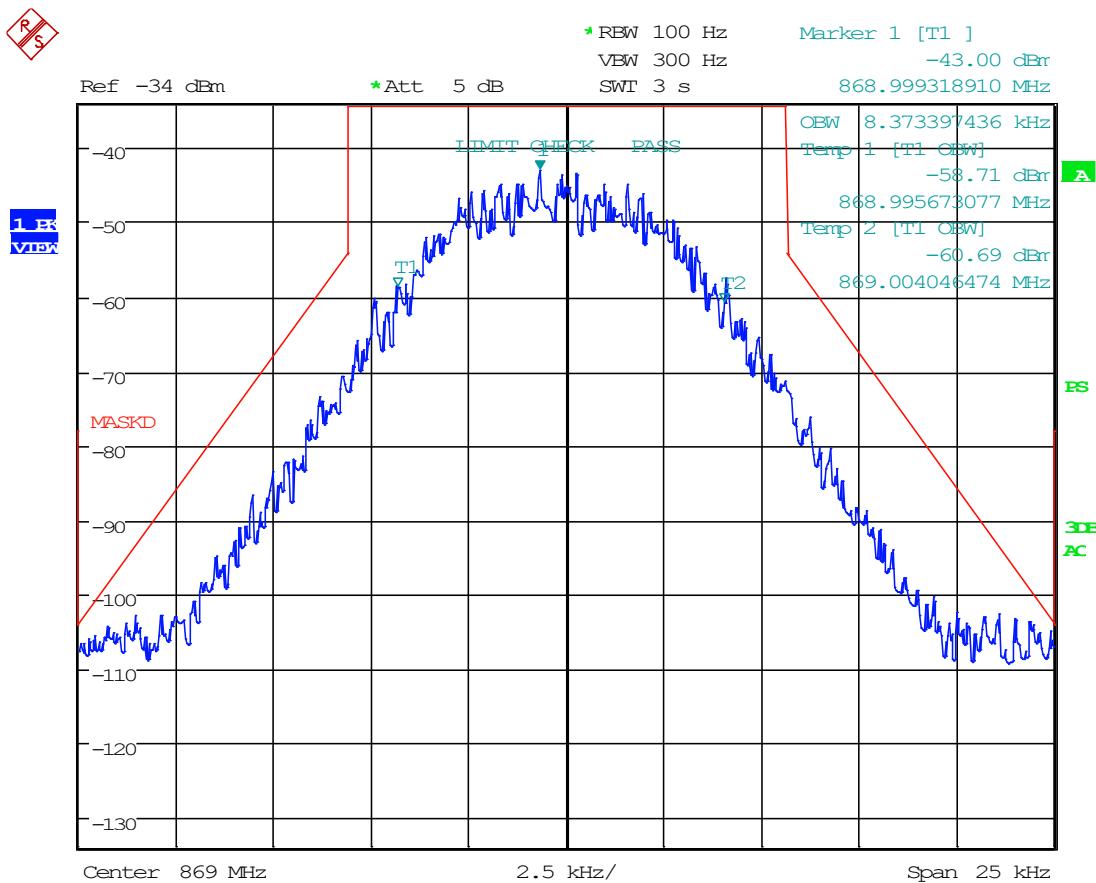

Date: 20.OCT.2023 11:51:01

8.5.24 H-DQPSK, Mask D, AGC, 869 MHz

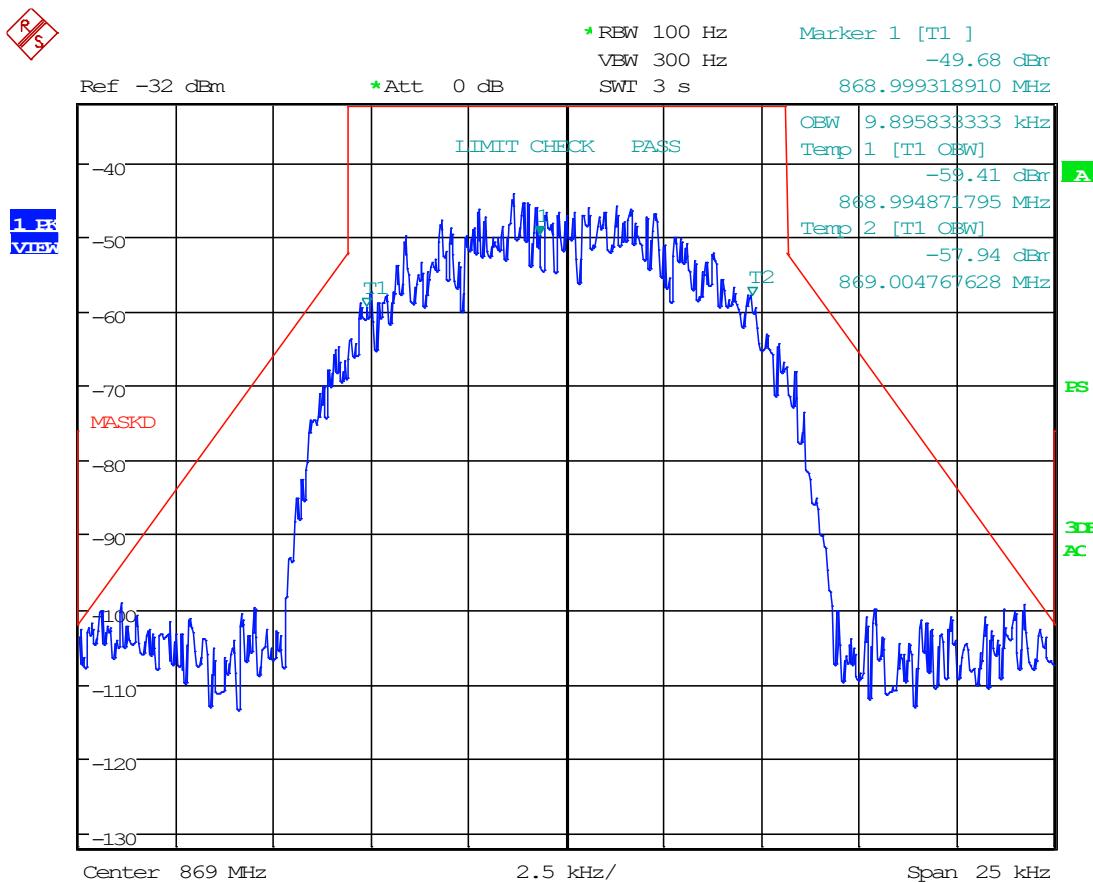


Date: 20.OCT.2023 11:57:03

8.6 Noise Figure

Referenced from test report "TR_10341-23_FCC_PT90_Booster Class B_1.docx".

Limits from FCC 90.219 (e)(2) and KDB 935210 D05 v01r04 Industrial Signal Boosters. Test method from "Noise Figure Measurement Accuracy: The Y-Factor Method" by Keysight Technologies.

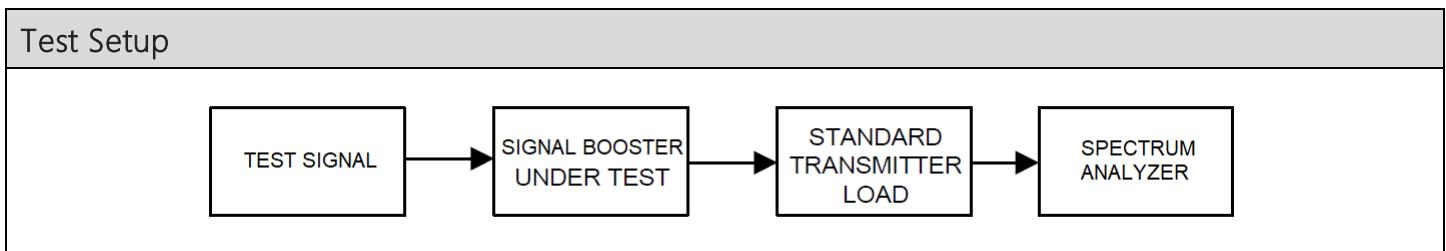


Test Results, Out-of-band Rejection and Class of Operation

Operating Band (MHz)	Link Direction	Noise Figure (dB)	Limit (dB)
851 MHz	N/A	-1.53	< 9 dB
860 MHz	N/A	2.78	< 9 dB
869 MHz	N/A	4.12	< 9 dB

8.7 Out-of-Band/Out-of-Block Emissions (Intermodulation Products)


Referenced from test report "TR_10341-23_FCC_PT90_Booster Class B_1.docx".

Limits from FCC Parts 2.1051, FCC Pt. 90.219(d)(6) and test procedure from ANSI C63.26-2015 and FCC KDB 935210 D05 v01r04 Industrial Signal Boosters.

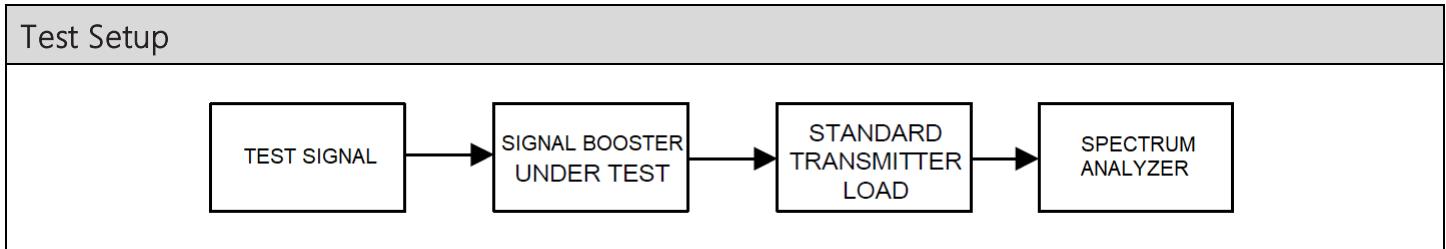


Intermodulation Products Spectrum Plots

8.7.1 6.25 kHz Signal, Test Plot, AGC, 851 MHz

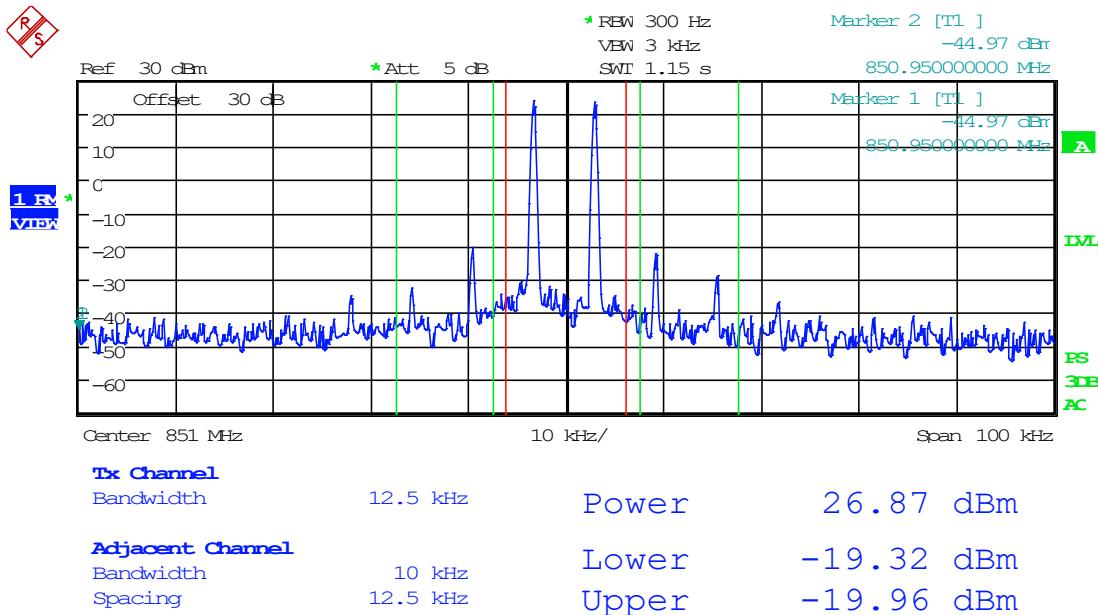


Date: 23.OCT.2023 15:05:16

8.7.2 12.5 kHz Signal, Test Plot, AGC, 851 MHz

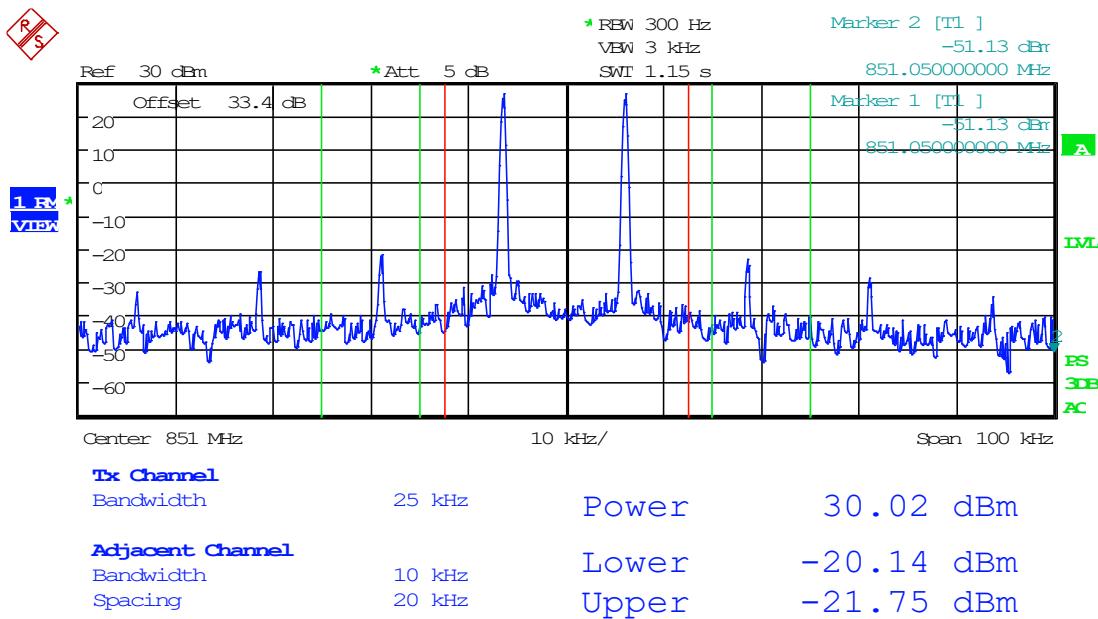


Date: 23.OCT.2023 16:27:06

8.7.3 25 kHz Signal, Test Plot, AGC, 851 MHz

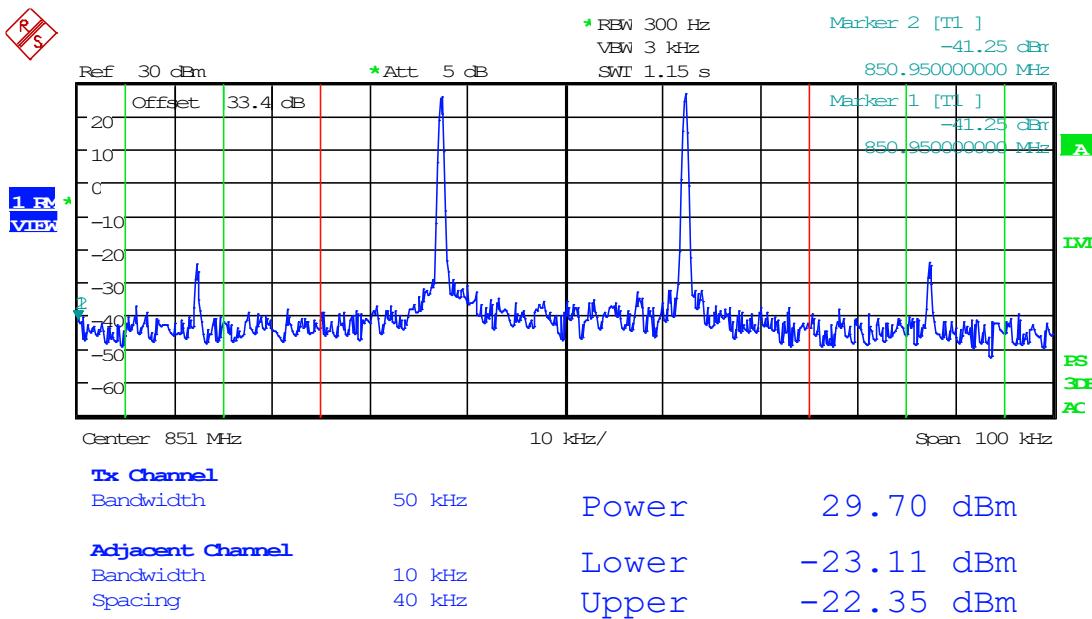


Date: 23.OCT.2023 16:27:48

8.7.4 6.25 kHz Signal, Test Plot, AGC, 860 MHz

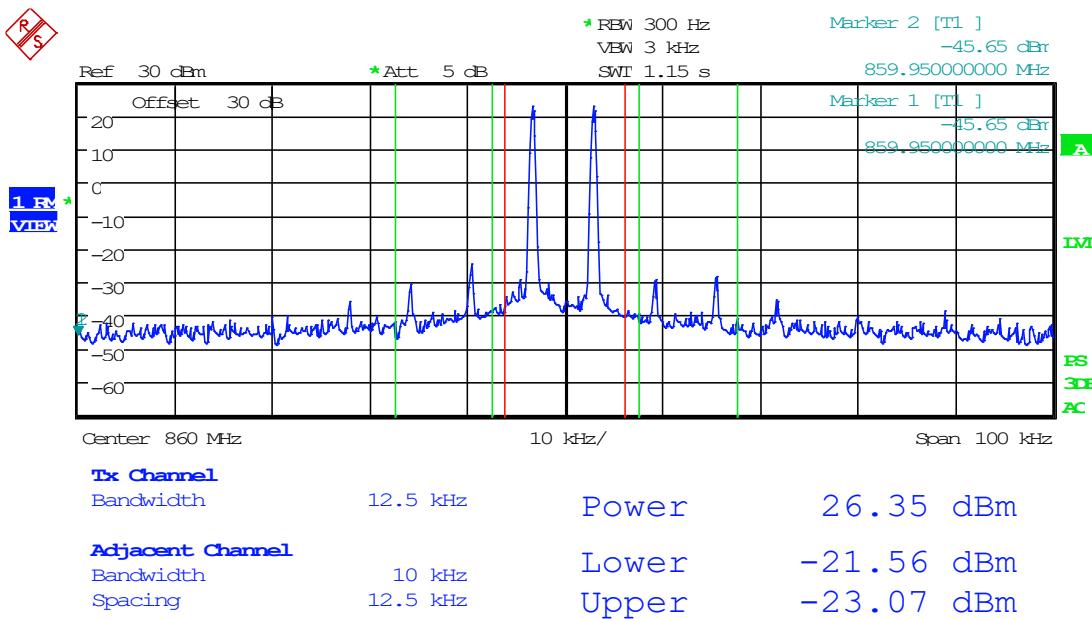


Date: 23.OCT.2023 15:06:40

8.7.5 12.5 kHz Signal, Test Plot, AGC, 860 MHz

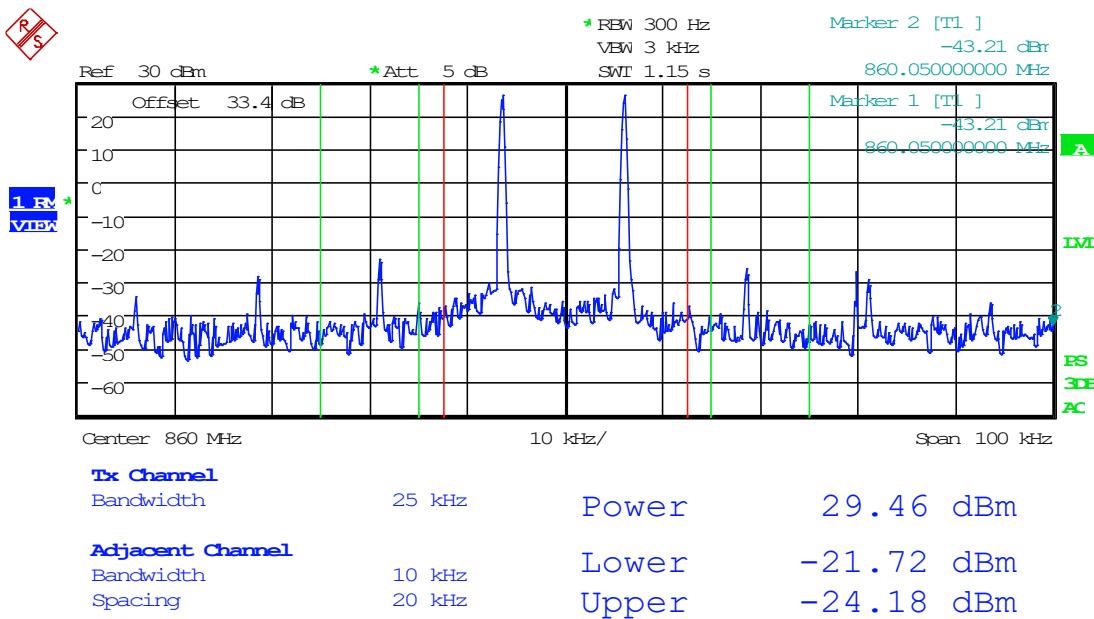


Date: 23.OCT.2023 16:25:50

8.7.6 25 kHz Signal, Test Plot, AGC, 860 MHz

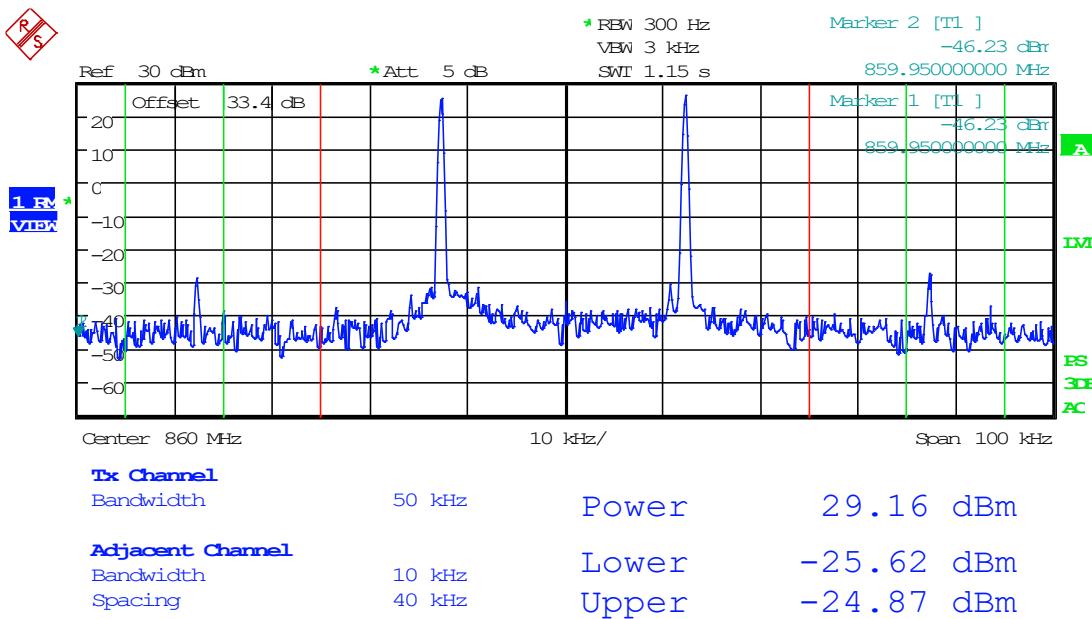


Date: 23.OCT.2023 16:29:10

8.7.7 6.25 kHz Signal, Test Plot, AGC, 869 MHz

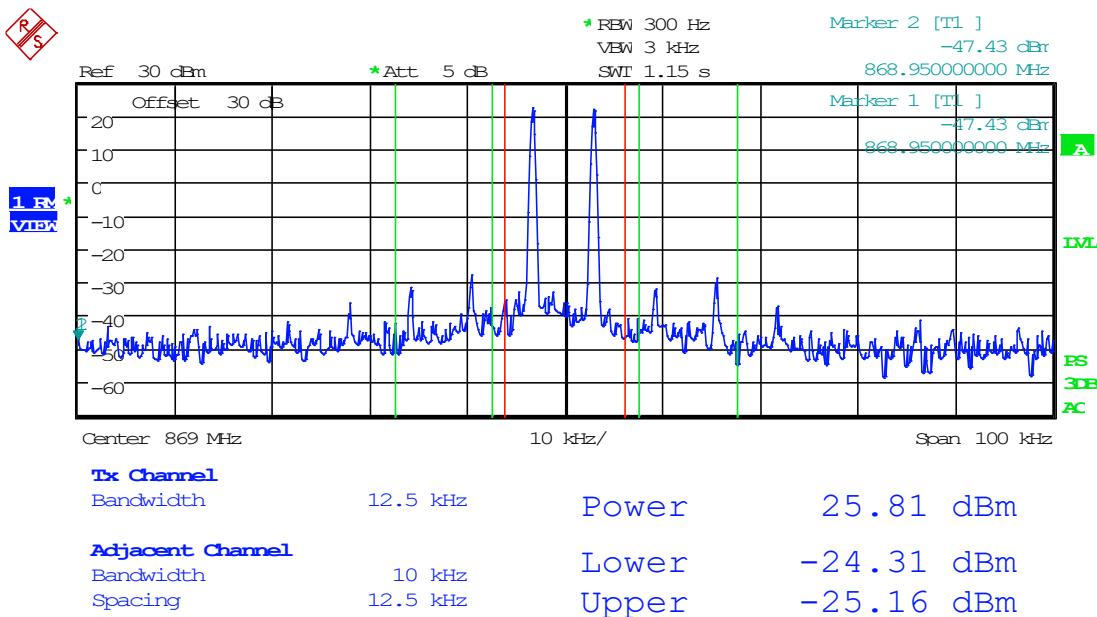


Date: 23.OCT.2023 15:45:14

8.7.8 12.5 kHz Signal, Test Plot, AGC, 869 MHz

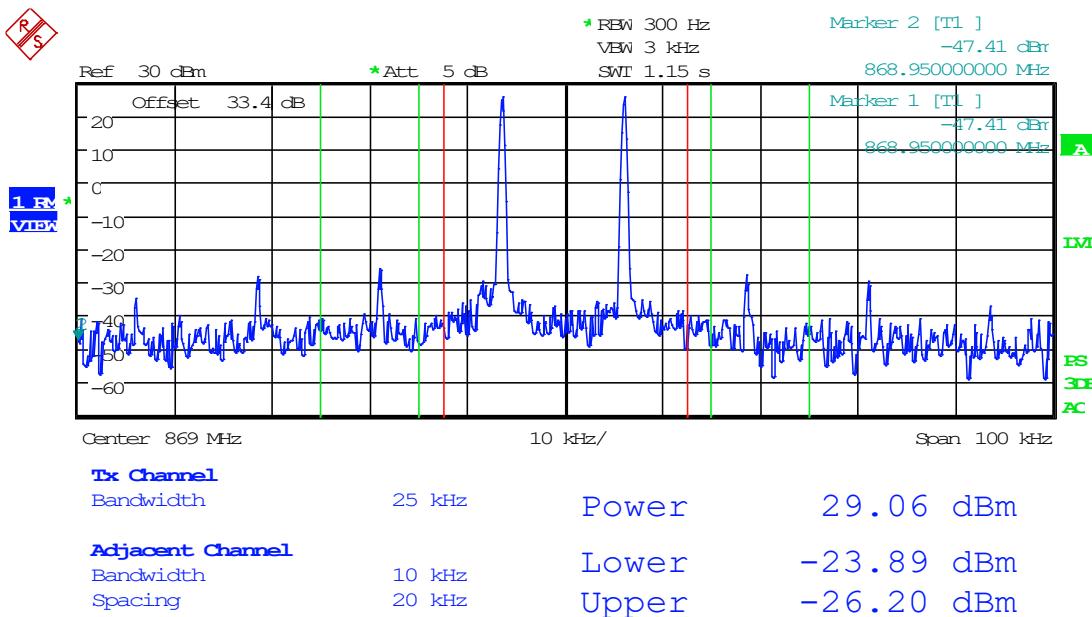

Date: 23.OCT.2023 15:49:06

8.7.9 25 kHz Signal, Test Plot, AGC, 869 MHz

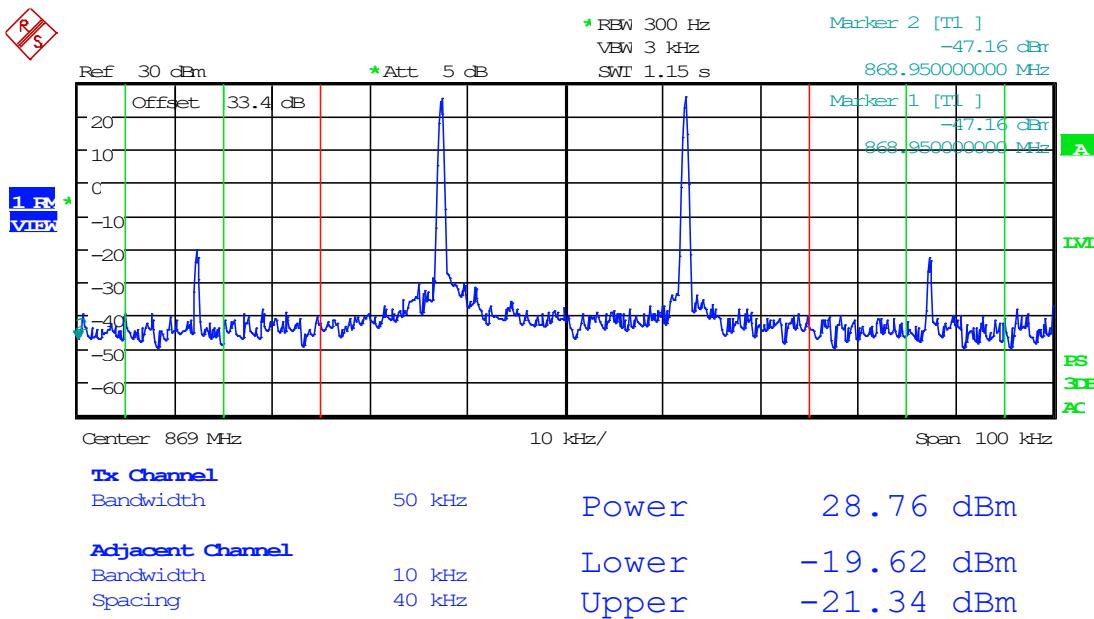


Date: 23.OCT.2023 16:31:47

8.8 Emission Mask, Out-of-Band

Referenced from test report "TR_10341-23_FCC_PT90_Booster Class B_1.docx".


Limits from FCC Parts 2.1051, FCC Pt. 90.219(e)(3) and test procedure from ANSI C63.26-2015 and FCC KDB 935210 D05 v01r04 Industrial Signal Boosters.

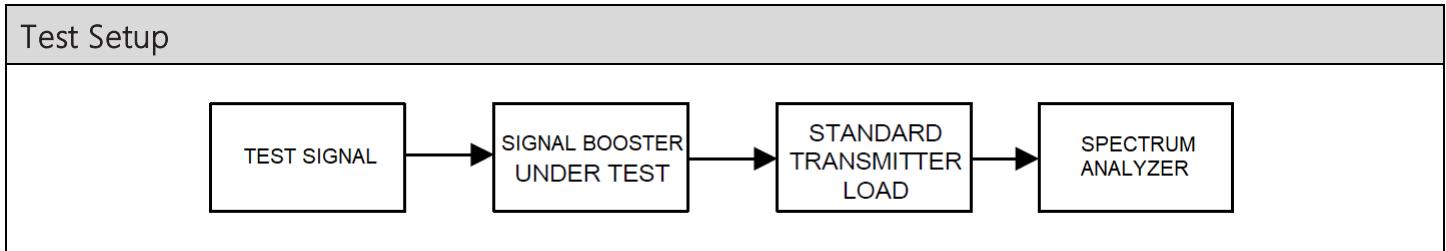

Note: Testing was done simultaneously on all combinations of Uplinks and Downlinks to address co-location of signals.


Conducted Emissions Spectrum Plots

8.8.1 30 MHz to 1 GHz, 851 MHz

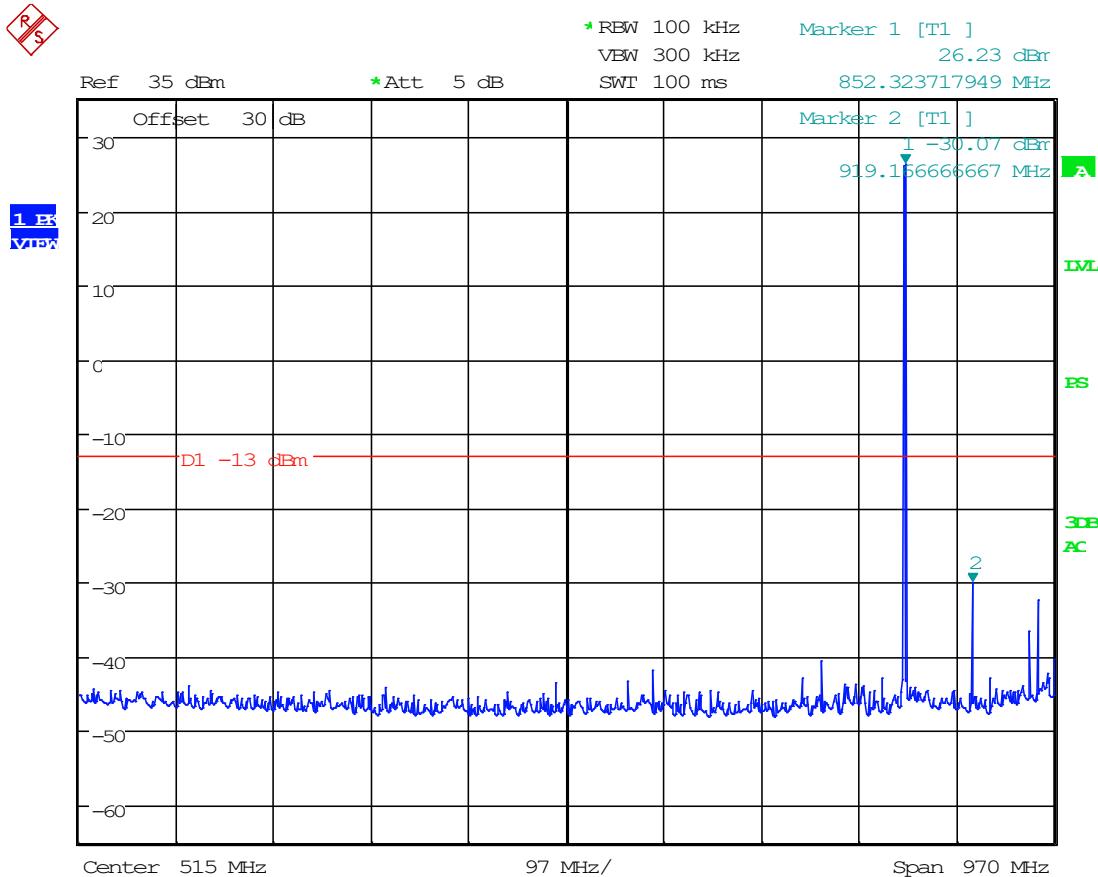


Date: 23.OCT.2023 15:02:59

8.8.2 1 GHz to 10th Harmonic, 851 MHz

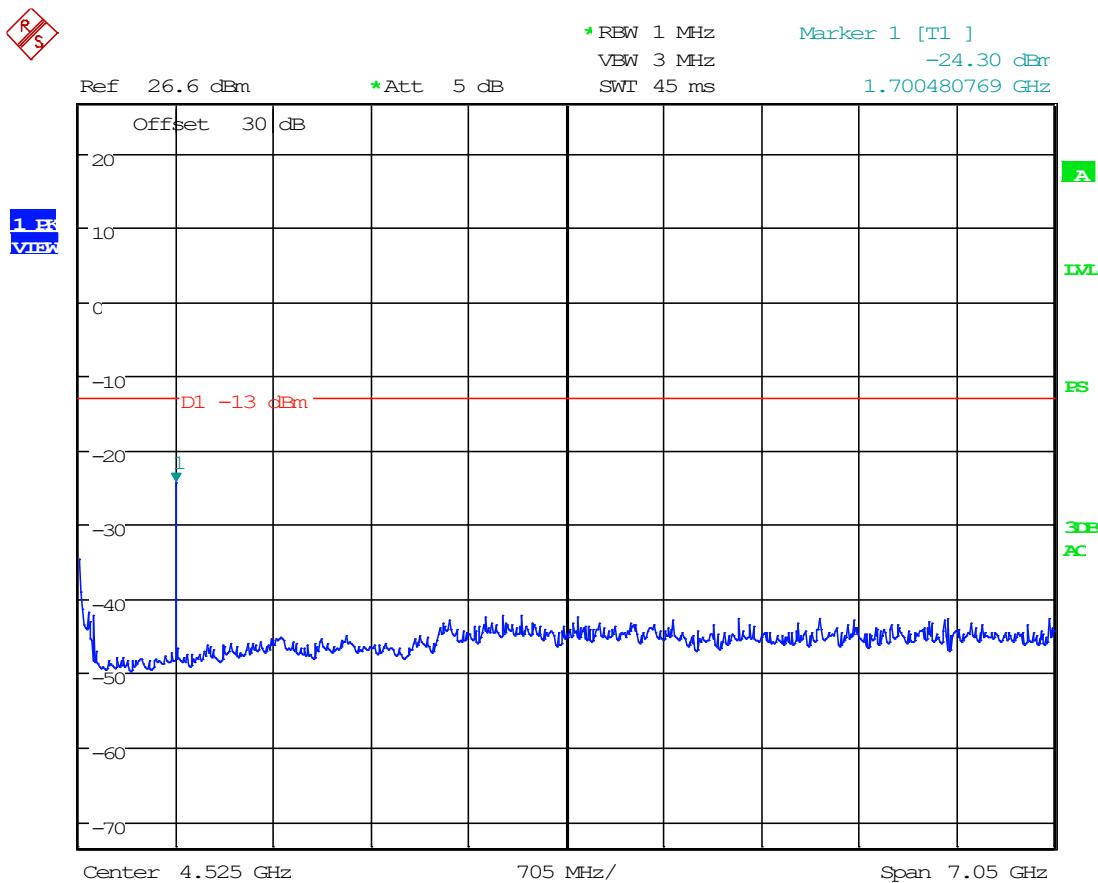


Date: 23.OCT.2023 14:46:49

8.8.3 30 MHz to 1 GHz, 860 MHz

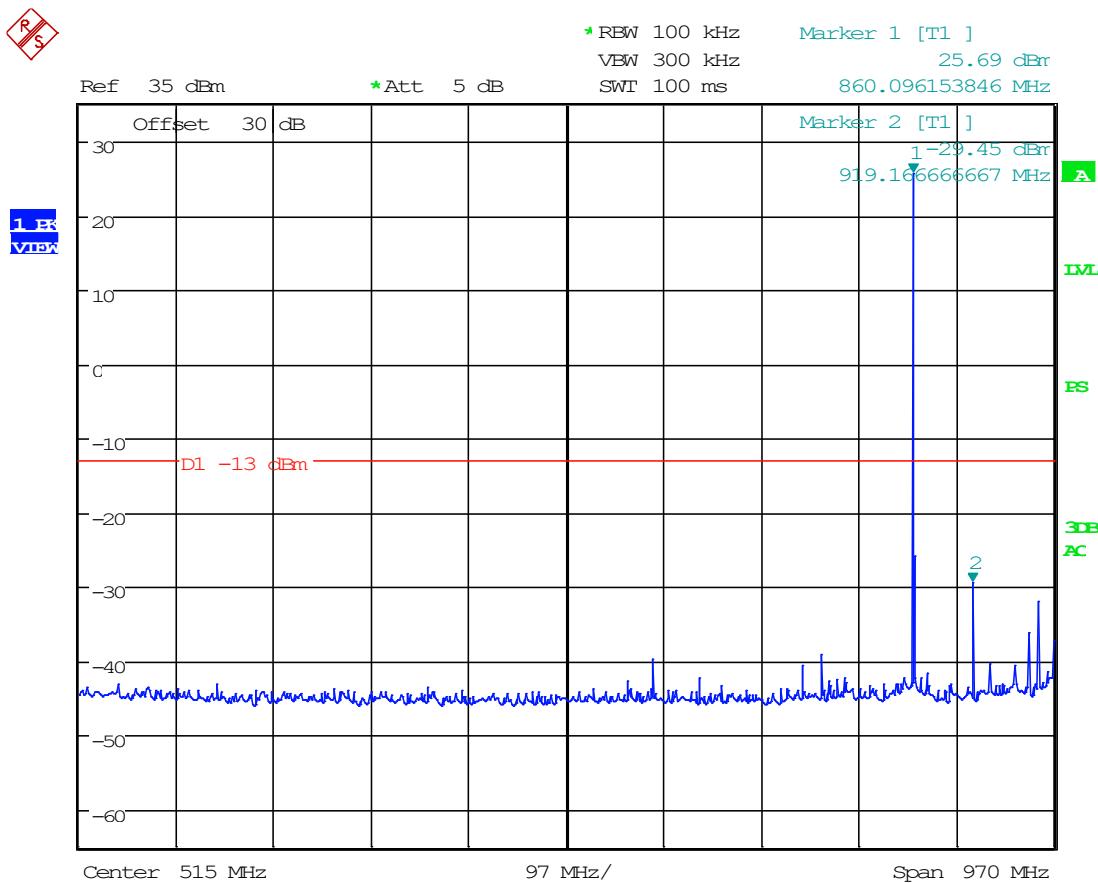


Date: 23.OCT.2023 15:02:08

8.8.4 1 GHz to 10th Harmonic, 860 MHz

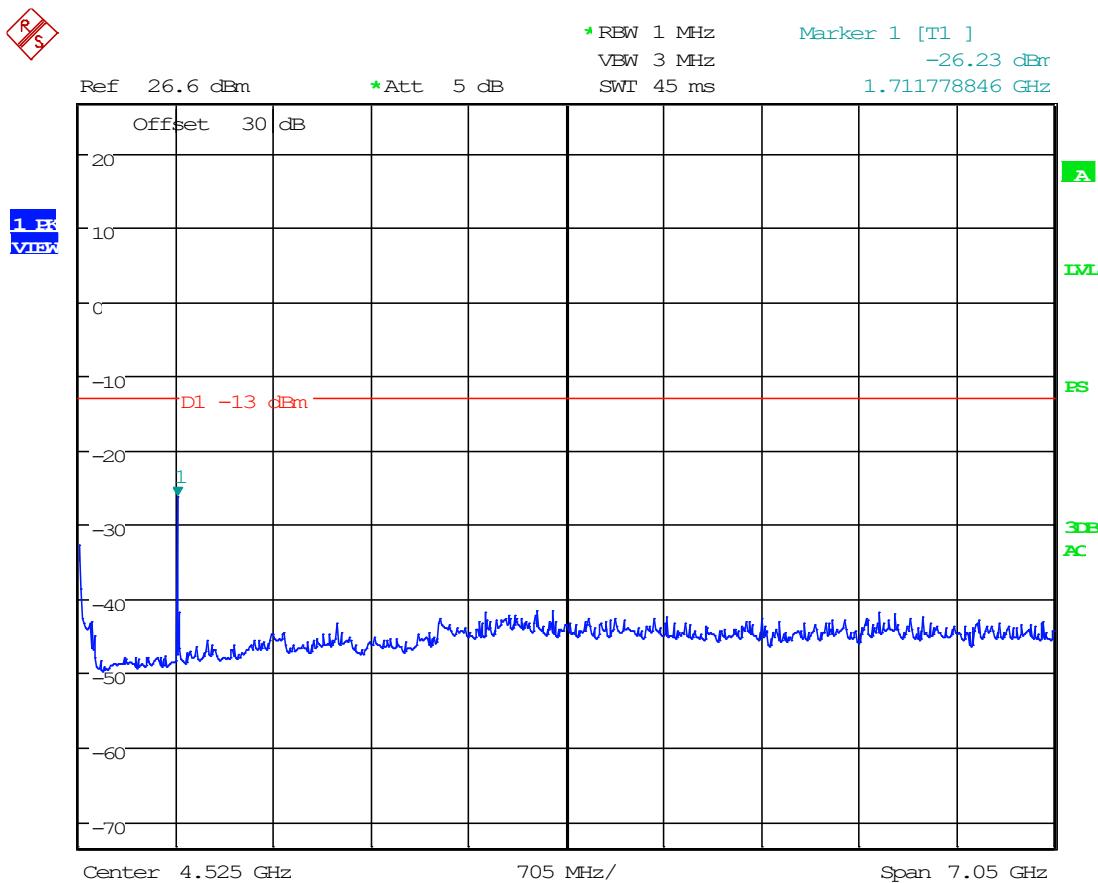


Date: 23.OCT.2023 14:45:46

8.8.5 30 MHz to 1 GHz, 869 MHz

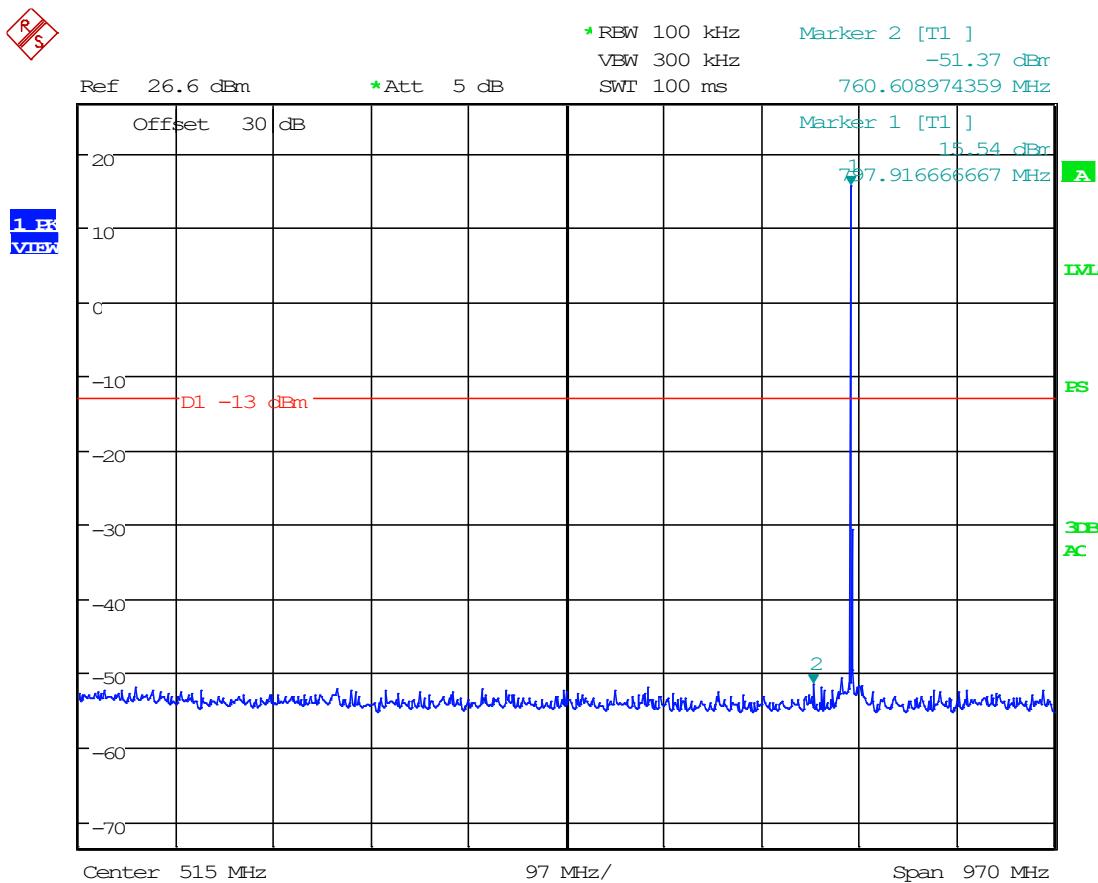

Date: 23.OCT.2023 14:48:07

8.8.6 1 GHz to 10th Harmonic, 869 MHz

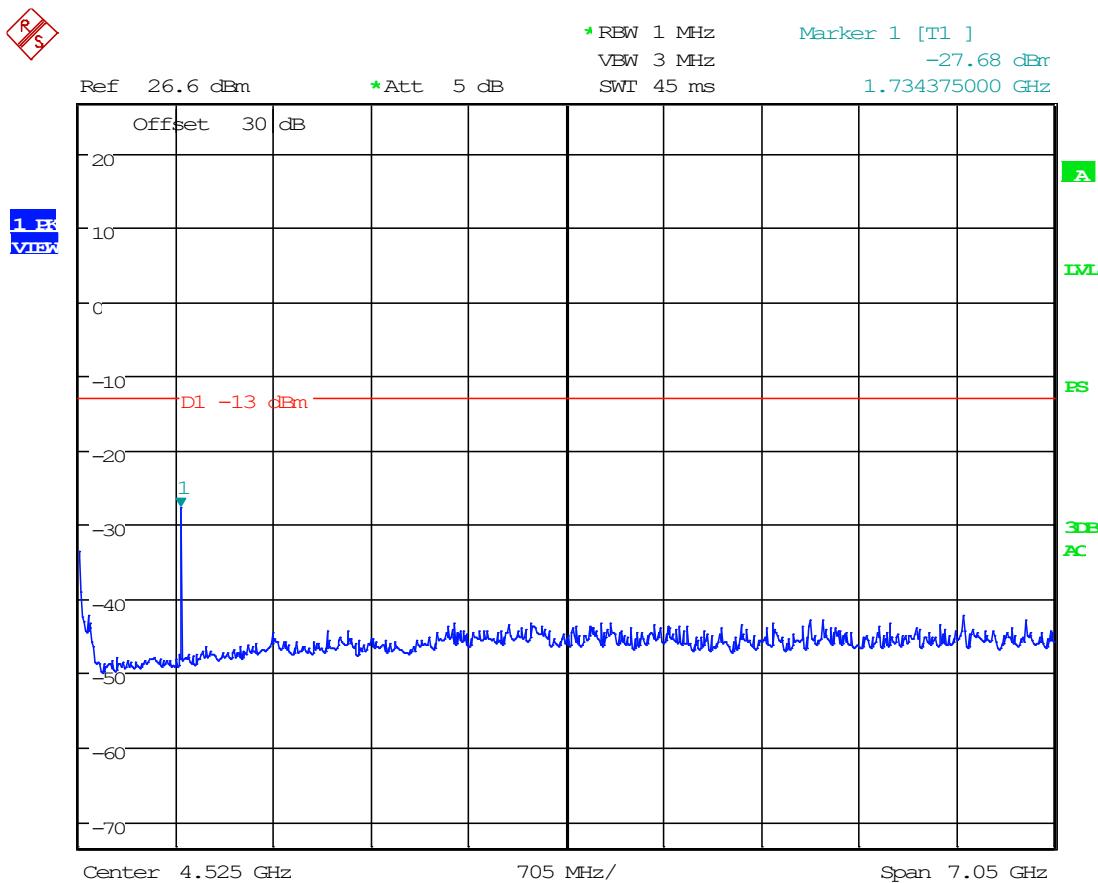


Date: 23.OCT.2023 14:47:22


8.9 Spurious Radiated Emissions

Limits from FCC Parts 2.1053, 90.210 and test procedure from ANSI C63.26-2015 and FCC KDB 935210 D05 v01r04 Industrial Signal Boosters.

Radiated Test Setup, 30 – 1000 MHz

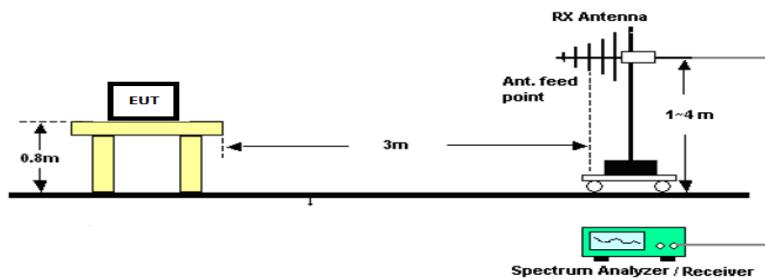

Radiated Test Setup, Above 1000 MHz

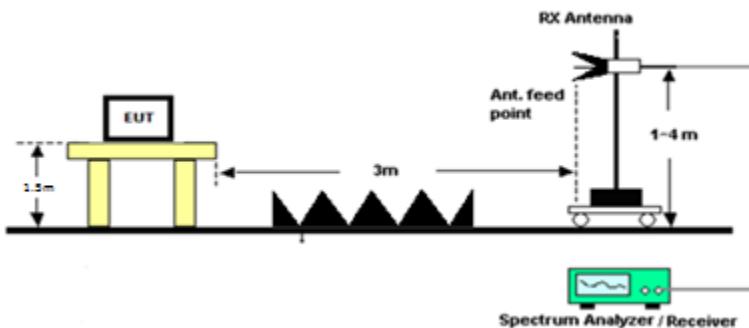



Industrial Inspection & Analysis
13146 NW 86th Drive, Suite 400, Alachua, Florida 32615
(352) 472-5500 / testing@industrial-ia.com

Radiated Emissions, Tabular Data

8.9.1 Test Plot, 851 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dB μ V/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
851.00	1702.00	PK	11.00	H	-4.72	12.19	3.00	18.47	-78.91	-13.00	65.91
851.00	1702.00	PK	11.60	V	-4.72	12.19	3.00	19.07	-78.31	-13.00	65.31
851.00	2553.00	PK	12.40	H	-6.03	12.20	3.00	18.56	-78.81	-13.00	65.81
851.00	2553.00	PK	12.20	V	-6.03	12.20	3.00	18.36	-79.01	-13.00	66.01
851.00	3404.00	PK	13.50	H	-6.95	12.21	3.00	18.76	-78.62	-13.00	65.62
851.00	3404.00	PK	13.10	V	-6.95	12.21	3.00	18.36	-79.02	-13.00	66.02
851.00	4255.00	PK	13.30	H	-7.79	12.71	3.00	18.22	-79.15	-13.00	66.15
851.00	4255.00	PK	14.70	V	-7.79	12.71	3.00	19.62	-77.75	-13.00	64.75
851.00	5106.00	PK	13.60	H	-8.55	13.45	3.00	18.49	-78.88	-13.00	65.88
851.00	5106.00	PK	13.60	V	-8.55	13.45	3.00	18.49	-78.88	-13.00	65.88
851.00	5957.00	PK	14.20	H	-9.26	14.08	3.00	19.02	-78.36	-13.00	65.36
851.00	5957.00	PK	14.10	V	-9.26	14.08	3.00	18.92	-78.46	-13.00	65.46
851.00	6808.00	PK	14.40	H	-9.92	14.68	3.00	19.15	-78.22	-13.00	65.22
851.00	6808.00	PK	14.10	V	-9.92	14.68	3.00	18.85	-78.52	-13.00	65.52
851.00	7659.00	PK	14.10	H	-10.46	14.24	3.00	17.88	-79.50	-13.00	66.50
851.00	7659.00	PK	13.70	V	-10.46	14.24	3.00	17.48	-79.90	-13.00	66.90
851.00	8510.00	PK	15.20	H	-11.04	14.76	3.00	18.92	-78.46	-13.00	65.46
851.00	8510.00	PK	14.90	V	-11.04	14.76	3.00	18.62	-78.76	-13.00	65.76



Industrial Inspection & Analysis
13146 NW 86th Drive, Suite 400, Alachua, Florida 32615
(352) 472-5500 / testing@industrial-ia.com

8.9.2 Test Plot, 860 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dB μ V/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
860.00	1720.00	PK	11.30	H	-4.79	12.19	3.00	18.70	-78.68	-13.00	65.68
860.00	1720.00	PK	12.00	V	-4.79	12.19	3.00	19.40	-77.98	-13.00	64.98
860.00	2580.00	PK	12.50	H	-6.07	12.20	3.00	18.63	-78.75	-13.00	65.75
860.00	2580.00	PK	12.00	V	-6.07	12.20	3.00	18.13	-79.25	-13.00	66.25
860.00	3440.00	PK	13.90	H	-6.99	12.24	3.00	19.15	-78.23	-13.00	65.23
860.00	3440.00	PK	13.40	V	-6.99	12.24	3.00	18.65	-78.73	-13.00	65.73
860.00	4300.00	PK	14.20	H	-7.83	12.76	3.00	19.13	-78.25	-13.00	65.25
860.00	4300.00	PK	13.80	V	-7.83	12.76	3.00	18.73	-78.65	-13.00	65.65
860.00	5160.00	PK	13.90	H	-8.60	13.47	3.00	18.77	-78.60	-13.00	65.60
860.00	5160.00	PK	13.80	V	-8.60	13.47	3.00	18.67	-78.70	-13.00	65.70
860.00	6020.00	PK	14.40	H	-9.34	14.17	3.00	19.23	-78.15	-13.00	65.15
860.00	6020.00	PK	14.90	V	-9.34	14.17	3.00	19.73	-77.65	-13.00	64.65
860.00	6880.00	PK	14.10	H	-9.95	14.61	3.00	18.76	-78.62	-13.00	65.62
860.00	6880.00	PK	14.20	V	-9.95	14.61	3.00	18.86	-78.52	-13.00	65.52
860.00	7740.00	PK	14.70	H	-10.51	14.26	3.00	18.45	-78.93	-13.00	65.93
860.00	7740.00	PK	14.60	V	-10.51	14.26	3.00	18.35	-79.03	-13.00	66.03
860.00	8600.00	PK	15.30	H	-11.08	14.84	3.00	19.06	-78.32	-13.00	65.32
860.00	8600.00	PK	15.10	V	-11.08	14.84	3.00	18.86	-78.52	-13.00	65.52



Industrial Inspection & Analysis
13146 NW 86th Drive, Suite 400, Alachua, Florida 32615
(352) 472-5500 / testing@industrial-ia.com


8.9.3 Test Plot, 869 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dB μ V/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
869.00	1738.00	PK	11.20	H	-4.86	12.19	3.00	18.52	-78.85	-13.00	65.85
869.00	1738.00	PK	11.60	V	-4.86	12.19	3.00	18.92	-78.45	-13.00	65.45
869.00	2607.00	PK	11.70	H	-6.10	12.20	3.00	17.80	-79.58	-13.00	66.58
869.00	2607.00	PK	11.70	V	-6.10	12.20	3.00	17.80	-79.58	-13.00	66.58
869.00	3476.00	PK	13.60	H	-7.03	12.25	3.00	18.83	-78.55	-13.00	65.55
869.00	3476.00	PK	12.70	V	-7.03	12.25	3.00	17.93	-79.45	-13.00	66.45
869.00	4345.00	PK	14.20	H	-7.88	12.79	3.00	19.11	-78.27	-13.00	65.27
869.00	4345.00	PK	14.10	V	-7.88	12.79	3.00	19.01	-78.37	-13.00	65.37
869.00	5214.00	PK	14.10	H	-8.64	13.51	3.00	18.96	-78.42	-13.00	65.42
869.00	5214.00	PK	14.20	V	-8.64	13.51	3.00	19.06	-78.32	-13.00	65.32
869.00	6083.00	PK	14.00	H	-9.40	14.27	3.00	18.86	-78.51	-13.00	65.51
869.00	6083.00	PK	14.30	V	-9.40	14.27	3.00	19.16	-78.21	-13.00	65.21
869.00	6952.00	PK	14.10	H	-9.99	14.54	3.00	18.66	-78.72	-13.00	65.72
869.00	6952.00	PK	13.60	V	-9.99	14.54	3.00	18.16	-79.22	-13.00	66.22
869.00	7821.00	PK	14.70	H	-10.57	14.29	3.00	18.42	-78.96	-13.00	65.96
869.00	7821.00	PK	14.20	V	-10.57	14.29	3.00	17.92	-79.46	-13.00	66.46
869.00	8690.00	PK	15.70	H	-11.18	14.90	3.00	19.42	-77.95	-13.00	64.95
869.00	8690.00	PK	14.80	V	-11.18	14.90	3.00	18.52	-78.85	-13.00	65.85


8.10 Adjacent channel power limits

Referenced from test report "TR_10341-23_FCC_PT90_Booster Class B_1.docx".

Limits from FCC Part 90.221, and test procedure from ANSI C63.26-2015.

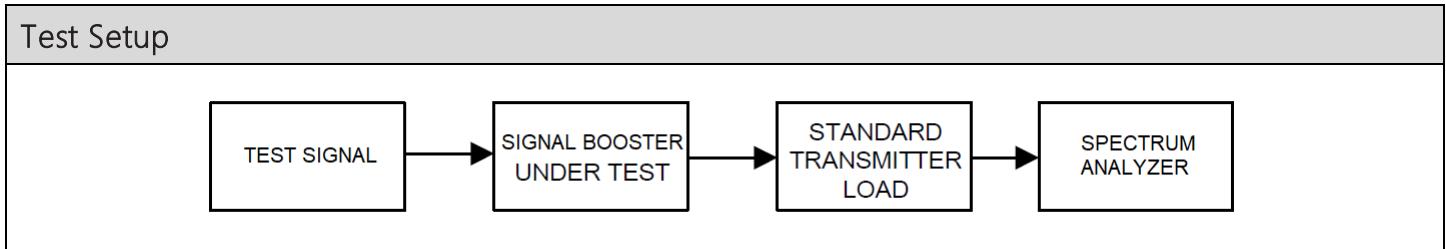


8.10.1 ACP, Test Plot, 860 MHz

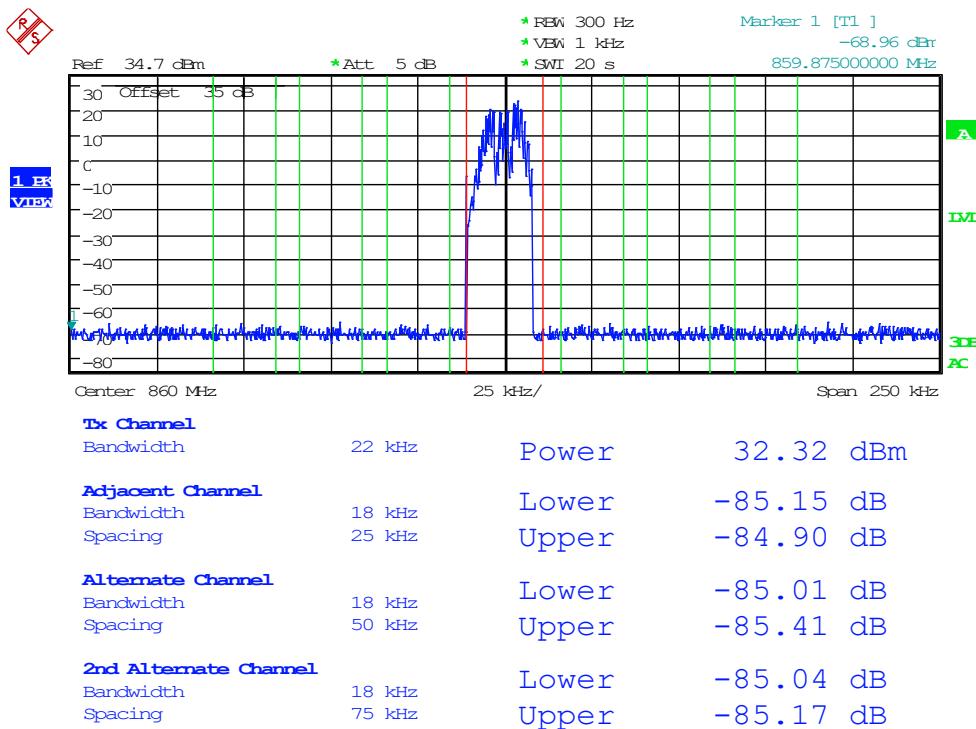

Date: 30.OCT.2023 11:38:33

8.10.2 ACP, Test Plot, 869 MHz

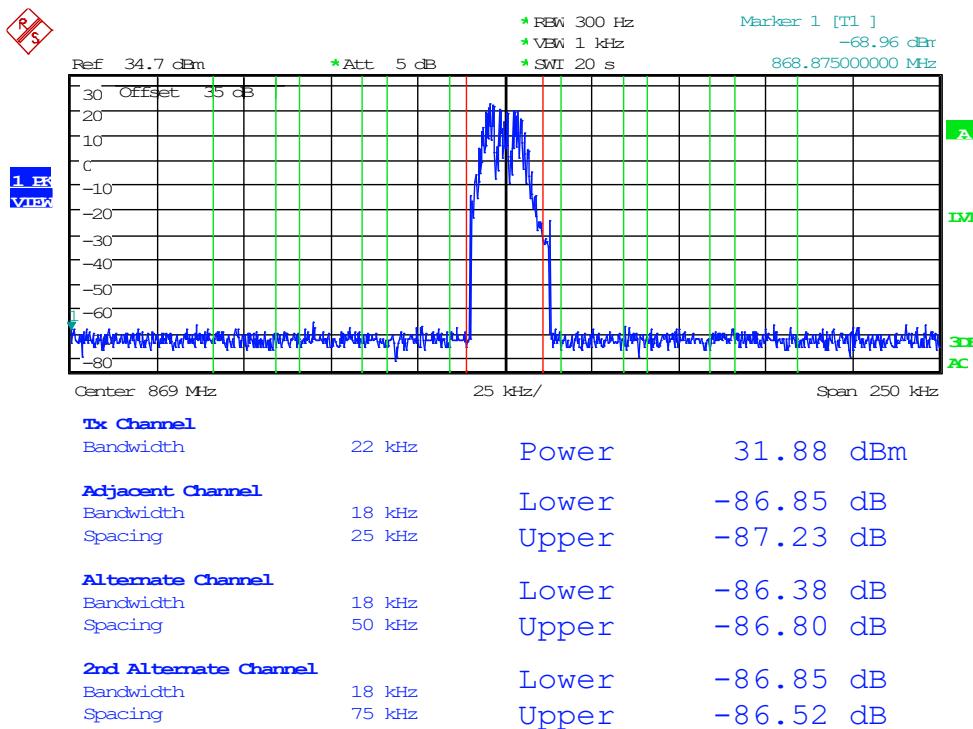

Date: 30.OCT.2023 11:39:20



Industrial Inspection & Analysis
13146 NW 86th Drive, Suite 400, Alachua, Florida 32615
(352) 472-5500 / testing@industrial-ia.com

9. ANNEX-B – Test Setup Photographs

Test setup photographs are located in a separate supplementary ANNEX-B document.

10. History of Test Report Changes

Test Report #	Revision #	Description	Date of Issue
TR_11435-23_FCC 90_Booster Class A_	1	Initial release	11/10/2023



Industrial Inspection & Analysis
13146 NW 86th Drive, Suite 400, Alachua, Florida 32615
(352) 472-5500 / testing@industrial-ia.com

END OF TEST REPORT
