

SKU	LA-BC55M032US-DW01B&DW01W
型号+产品名称+文件名称	M55摄像头壁灯 说明书 Olafus
尺寸(长x宽x高)mm	展开尺寸: 660 X 260mm 折后尺寸110 X 130mm
材质	105G铜版纸, 四色双面印刷, 风琴折
料号	PSBD00SX003Z01
版本号	Z01

包装	电子	结构	确认人	审核人
林利诚				
日期: 2023.5.6	日期:	日期:	日期:	日期:

<div><div><div>Olafus®</div><div><div><div><div><div></div><div></div><div></div></div><div></div></div></div><div>SMART WIRELESS FLOODLIGHT CAMERA</div><div>Product Manual</div></div></div><div>MODEL: 3-LBC55M</div></div>	<div><div>COMPONENTS AND STRUCTURE</div><div><div><div>3-LBC55M</div><div><div><div><div></div><div></div><div></div></div><div></div></div></div><div><div><div>LED Light</div><div>Camera Lock Collar</div><div>Reset</div><div>USB Interface</div><div>Micro SD Card Slot</div><div>LED Indicator</div><div>Microphone Lens</div><div>PIR Motion Detector</div><div>Speaker</div></div></div></div></div><div>2</div><div>CE</div></div>	<div><div>PARTS LIST</div><div><div><div><div><div><div></div></div><div>Machine Screw</div><div>QTY: 3</div></div><div><div><div></div></div><div>Expansion Rubber Plug</div><div>QTY: 3</div></div><div><div><div></div></div><div>EVA Gasket</div><div>QTY: 1</div></div><div><div><div></div></div><div>Mounting Bracket</div><div>QTY: 1</div></div></div><div><div><div></div></div><div>Wire Nuts</div><div>QTY: 3</div></div><div><div><div></div></div><div>Long Machine Screw</div><div>QTY: 1</div></div><div><div><div></div></div><div>Silicone Gasket</div><div>QTY: 1</div></div><div><div><div></div></div><div>Machine Screw</div><div>QTY: 2</div></div></div><div><div><div></div></div><div>Machine Screw</div><div>QTY: 2</div></div></div></div>
--	---	--

3

CE

PAIRING LED LIGHT WITH "Smart Life" APP

Step 1: "Smart Life" App Download.
There are 2 options for obtaining and downloading the "Smart Life" App on your smart device.
1. Scan the QR code on the right.
2. Search for "Smart Life" in the App Store or Google Play.



Step 2: Enter the "Smart Life" App. Register an account and log in. If you already have an account for Smart Life App, Please select "Log in with existing account".

Note: You will need your "Smart Life" App username and password to pair with Amazon Alexa and/or Google Assistant.



Step 3: Please turn on the Wi-Fi and Bluetooth before connecting LED lights to the "Smart Life" App.

13

PAIRING LED LIGHT WITH "Smart Life" APP

Connect the App



1. Connect the floodlight camera to the power supply, the light will be on for 1 second (It means the light can work normally). And then the light will turn off.
2. The weak blue LED indicator on the camera will light up for 10-15s; Then blue LED indicator will be off for 5-10s.
3. The red LED indicator will be on, and you can hear a "deng deng deng" short sound (It means the camera work). The red indicator will be on for 5-10s, then the red LED indicator will flash. When red indicator is flashing (It means the camera is waiting for pairing), you can pairing your phone with "Smart Life" app on your phone.

Note: Only when the red indicator flashing, we can pair the phone and camera. Otherwise, the pairing will fail.

Note: What if I can't connect to the camera?

Try to reset the camera; The reset step is refer to page 16th.

If it still can not be solve, contact our seller and provide the number posted on the camera, please.

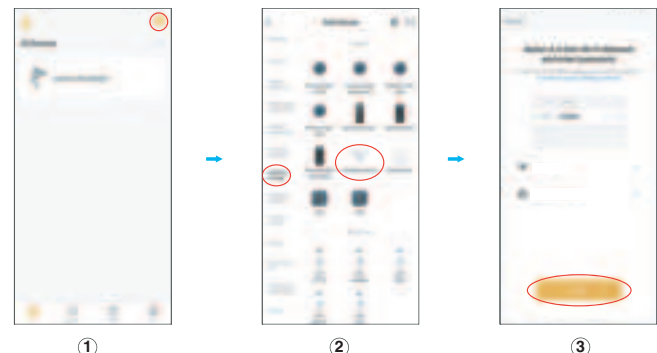

14

PAIRING LED LIGHT WITH "Smart Life" APP



① Tap "+" button on top right corner and tap "Add Device" to add device.
② Tap "Camera&Lock" and then "Floodlight Camera" to enter next page.

③ Enter Wi-Fi password to join your network.
Please Note: a. This smart LED Light can only support 2.4 GHz network and cannot work with 5.0 GHz network.
b. Please check if your home network is 2.4 GHz and make sure that your phone has been connected to your Wi-Fi network.
Please ensure your network is not hidden.

④ Tap the "Next" button to pair the LED Light

⑤ Put the QR code that appears on the APP in front of the Camera at a distance of 15-20cm (5.9-7.87in). Let the Camera scan the code.

When the LED indicator becomes blue and flashing, and you can hear a "deng deng deng" short sound, it means the camera is already scan the QR code.
Press the "I hear prompt" button on your phone. Then you will hear the camera emitting "deng deng deng" short sound. (It means the camera already found the device, and it is connecting the network.) The blue indicator will continuously flashing.

⑥ Wait for the device to register (about 40-60s).

When the blue LED indicator stop flashing and the light is always on, It means the connected is finished.

⑦ Tap "Done" to complete the light pairing

Note: The blue light is on, camera is ready for viewing.


15

CAMERA LED INDICATOR

NO.	LED Status	Camera Status
1	Red indicator always on	System starting up
2	Red indicator flashing	Waiting for pairing to network
3	Blue indicator flashing	Network pairing
4	Blue indicator always on	Camera connecting to network successful

Reset

Note: If the pairing is failed, please long press the resetting key for 3-5s until you see the red indicator flashing and hear "deng deng deng" sounds (means the resetting succeed). The red indicator will flash for 3s, and turn off. Then the blue indicator will be on for 10-15s, and then off for 5-10s. Red indicator is on, and you will hear "deng deng deng" again, also, the red indicator is flashing. At this time, you can connect your phone to the camera by scanning the QR code. And continue the next step that is shown on page 15th.




Reset

16


Micro SD Card

- To ensure Micro SD Card video recording works steady, we recommend to use a Class 10 or higher speed Micro SD Card.
- To make sure the device works normally, please format the Micro SD Card to FAT32 before the first time use.
- Before insert or pull out the Micro SD Card, please power off the device.
- Insert the Micro SD Card properly into the slot as below.
- It only support Micro SD Card up to 128GB (not included).

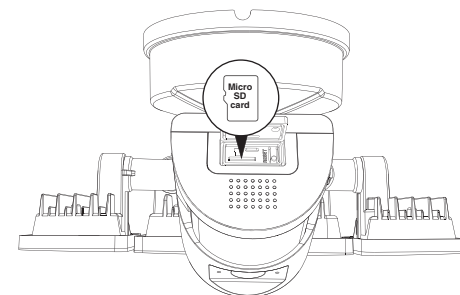

17

HOW TO OPERATE THE APP

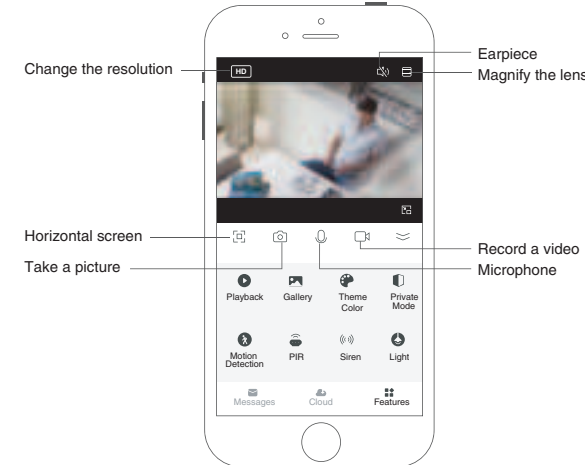


Playback	You can watch back the previous video recordings here. Note: Micro SD Card is required to watch back.
Microphone & Earpiece	If two way audio is needed, please set in "Settings" -> "Basic function settings" -> "Talk Mode" -> turn on "Two-way talk".
Motion Detection	Switch for motion detection.
PIR	Activate the PIR and adjust its sensitivity.
Motion Detection&PIR	To activate the motion detection and monitoring functions, you need to turn on "Motion Detection" and "PIR" at the same time. With these functions, you can receive photos and alert notifications that the camera automatically captures when detecting a motion.
Siren	Press "Siren" to start the alarm.
Light	Manually switch on/off the lamp, adjust the brightness and set a timer.
Message	Check the monitored information.

18


HOW TO OPERATE THE APP

Motion detection and monitoring functions

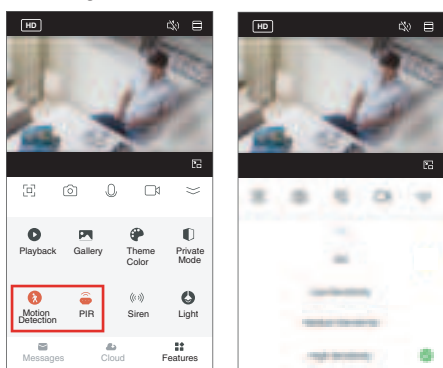

Note:
To activate the motion detection and monitoring functions, you need to turn on "Motion Detection" and "PIR" at the same time. With these functions, you can receive photos and alert notifications that the camera automatically captures when detecting a motion.
After setting Motion Detection and PIR, lamp can be triggered by moving people or animals to turn on automatically. When the camera is in the darkness.

Two-way talking is supported

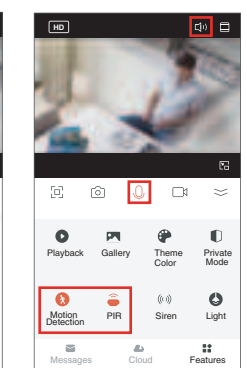


Note:
To activate the communication mode, be sure to remove the slash on the "Earpiece" and turn on the "Microphone".

19


HOW TO OPERATE THE APP

Disable pushing of motion monitoring notifications

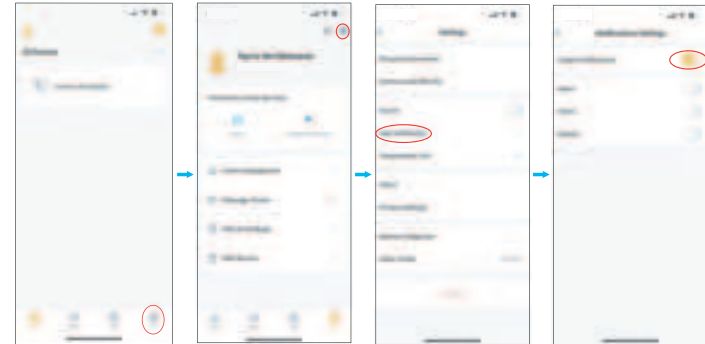


If you want to activate the motion monitoring function, but do not want to frequently receive notifications, you can disable the notification push feature.

One-way/two-way communication mode settings

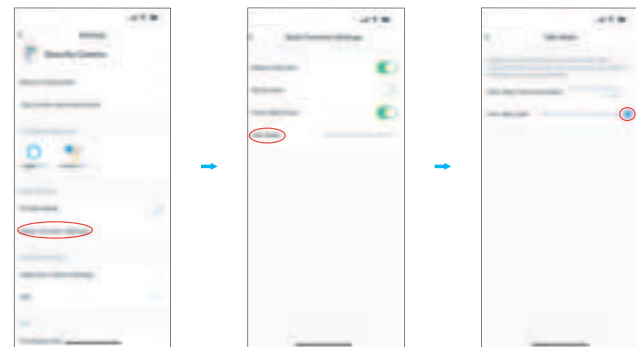

20

Share the device

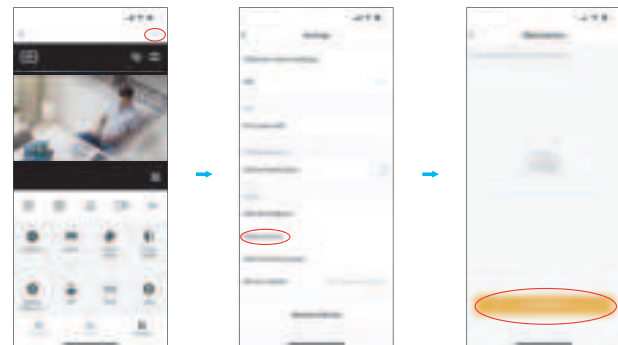

You can choose to share the device to other members of the family.

Note: Shared family members can only view monitoring and notifications, but cannot set up the monitor.

Remove the device



When you replace your phone, or someone else wants to connect to the device, be sure to remove the device from your old phone first.

Note: For security reasons, the device can only be connected by one person at a time. If someone else wants to see the camera information at the same time, you can refer to "Share the device".

21

HOW TO CONNECT WITH ALEXA SHOW AND GOOGLE ASSISTANT APP



Tap "Z" and find the third-party voice device you want to connect to and tap it, then follow the steps to connect.

22

FCC ID: 2AT7E-3-LBC55M

FCC Warning:

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
-Reorient or relocate the receiving antenna.
-Increase the separation between the equipment and receiver.
-Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
-Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

23

FAQ

1. What if I can't connect to the camera?
Try to reset the camera; The reset step is refer to page 16th.
If it still can not be solve, contact our seller and provide the number posted on the camera, please.

2. Can't find an Micro SD Card?
Firstly we suggest using these famous brands card, like Samsung, SanDisk, Kingston etc. with at least class 10.
Secondly, please format it to FAT32, which is the only format that camera can support.

3. Floodlight cannot turn on automatically?
If you want the light to turn on in the darkness when people or animal moving, please set on "Motion Detection" and "PIR" on the app.

4. Siren cannot turn on automatically?
Siren is designed to be turned on manually to avoid disturbing your neighbors.

5. Two way audio is not working?
Please go to "Settings" -> "Basic function settings" -> "Talk Mode" -> turn on "Two-way talk".

6. You cannot get the video for a long time?
Please first make sure the camera is installed as close as possible to your router.
It is not recommended to install the camera in a place where there are two thick walls away from the router.
Please test your network and make sure it works well.

For more questions, please send them via the "Settings" - "FAQ&Feedback" within the app.

HK JW Illumination Co., Limited
Unit 616, 6/F., Kam Teem Industrial Building,
135 Connaught Road West, Sai Wan Hong Kong
Manufacturer/Hersteller: MDH LIGHTING LTD
Suite 302, 292 Strovolos Avenue, 2048 Strovolos Nicosia,
Cyprus

UK Importer: MDH LIGHTING LTD
69 Aberdeen Avenue, Cambridge CB2 8DL,
United Kingdom

Made in China

support@olafuslife.com

www.olafuslife.com

