



## Final Assembly of SKP-794-8dB

- 1—Ensure Fibreglass tube is cleaned prior to finishing
- 2—Ensure element built is pre-tested
- 3—Always tune before and after gluing.

### ELEMENT ALIGNMENT

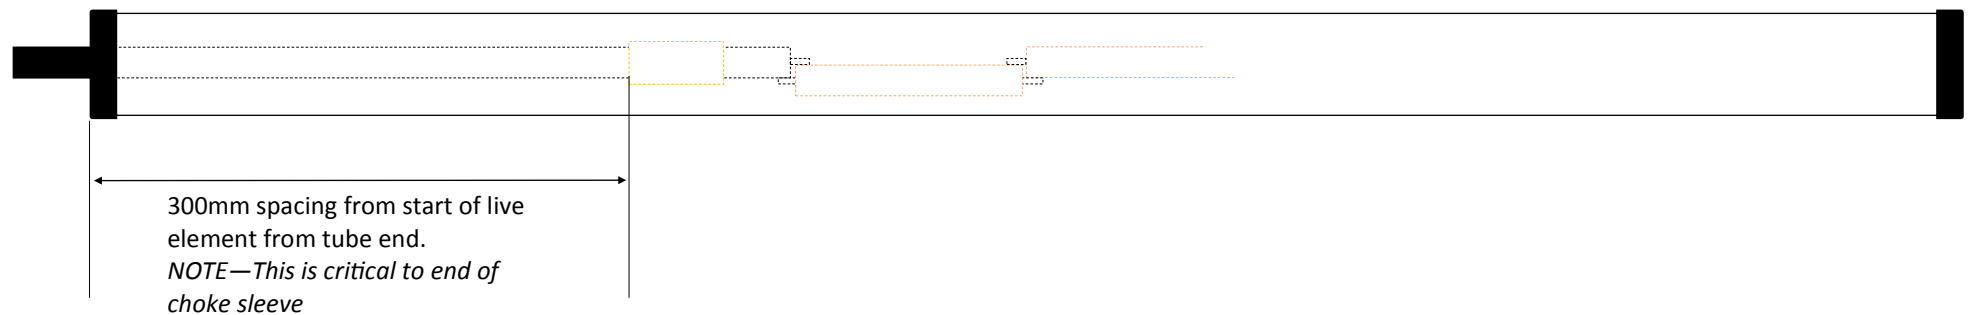

### FINISHED DIMENSIONS

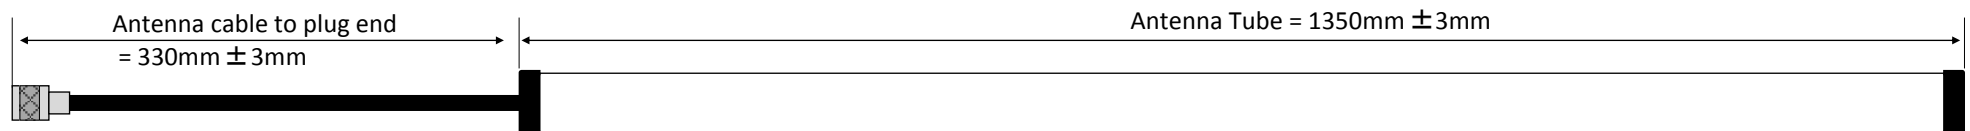

				NOTES	DRAWN DM	DATE 13/09/17	MATERIAL: Tube = HD Pultruded FG Element = Brass and Coaxial	DESCRIPTION: <b>Omni Directional 8dBi antenna</b> <b>868MHz</b>	
				Antenna to be individually hand tuned Sealed top and bottom via PU Machine Element to be secured with spacers—no rattle	CHKD	DATE	TREATMENT:	PART NO:	SHEET 1 OF 1
A	Critical length added below element to 300mm	Sept 2017	DeM		NOT TO	USED ON			
ISSUE LETTER	CHANGE	DATE	SIGN						