

TEST REPORT NO: RU1164/6097

COPY NO: 2

ISSUE NO: 1

FCC ID: NE060-1377Series

REPORT ON THE CERTIFICATION TESTING OF A AERIAL FACILITIES LIMITED 10W BDA 60-137702 WITH RESPECT TO THE FCC RULES CFR 47, PART 90 Subpart H PRIVATE LAND MOBILE REPEATER.

TEST DATE: 21st February 2005 – 3rd March 2005

IESTED BA:	JCHARTERS
APPROVED BY:	 P GREEN
·	PRODUCT MANAGER EMC

DATE: 10th January 2006

Distribution:

Copy Nos: 1. Aerial Facilities Limited

2. TCB: TRL Compliance Services Limited

3. TRL EMC

THIS DOCUMENT MAY BE REPRODUCED ONLY IN ITS ENTIRETY AND WITHOUT CHANGE

TRL COMPLIANCE SERVICES LTD EMC DIVISION

LONG GREEN FORTHAMPTON GLOUCESTER GL19 4QH UNITED KINGDOM TELEPHONE +44 (0)1684 833818 FAX +44 (0)1684 833858 E-MAIL test@trlcompliance.com www.trlcompliance.com



CONTENTS

	PAGE	
CERTIFICATE OF CONFORMITY & COMPLIANCE	3	
APPLICANT'S SUMMARY	4	
EQUIPMENT TEST CONDITIONS	5	
TESTS REQUIRED	5	
TEST RESULTS	6-35	
	ANNEX	
PHOTOGRAPHS	Α	
PHOTOGRAPH No. 1: Conducted Test setup		
PHOTOGRAPH No. 2: Radiated Test setup		
APPLICANT'S SUBMISSION OF DOCUMENTATION LIST	В	
EQUIPMENT CALIBRATION	С	
MEASUREMENT UNCERTAINTY	D	
SYSTEM DIAGRAM	E	
Notes: 1. Component failure during test	YES NO	[] [X]
2. If Yes, details of failure:		

The facilities used for the testing of the product contain in this report are FCC Listed.

3.

RU1164/6097 Page 2 of 46



CERTIFICATE OF CONFORMITY & COMPLIANCE

FCC IDENTITY:	NE060-1377Series	
PURPOSE OF TEST:	Certification	
TEST SPECIFICATION:	FCC RULES CFR 47, Part 90 Subpart H	
TEST RESULT:	Compliant to Specification	
EQUIPMENT UNDER TEST:	10W BDA 60-137702	
EQUIPMENT TYPE:	Private Land Mobile Repeater	
MAXIMIUM GAIN	Uplink 51.57 dB Downlink 46.60 dB	
MAXIMUM INPUT	Uplink -51dBm Downlink -12.6 dBm	
MAXIMUM OUTPUT	Uplink 0.57 dBm (into Fibre optic system) Downlink 34.00 dBm (radiating cable syste	m)
ANTENNA TYPE:	Not applicable	
CHANNEL SPACING:	Uplink, Determined by input signal channe Downlink, Determined by input signal chan	
NUMBER OF CHANNELS:	Uplink, Determined by input signal channe Downlink, Determined by input signal chan	
FREQUENCY GENERATION:	N/A	
MODULATION TYPE:	F3E	
POWER SOURCE(s):	+110Vac	
TEST DATE(s):	21 st February 2005 – 3 rd March 2005	
ORDER No(s):	29265	
APPLICANT:	Aerial Facilities Limited	
ADDRESS:	Aerial House Asheridge Road Chesham Buckinghamshire HP5 1TU United Kingdom	
TESTED BY:		J CHARTERS
APPROVED BY:		P GREEN PRODUCT MANAGER EMC

RU1164/6097 Page 3 of 46

APPLICANT'S SUMMARY

EQUIPMENT UNDER TEST (EUT):	10W BDA 60-137702
EQUIPMENT TYPE:	Private Land Mobile Repeater
PURPOSE OF TEST:	Certification
TEST SPECIFICATION(s):	FCC RULES CFR 47, Part 90 Subpart H
TEST RESULT:	COMPLIANT Yes [X] No []
APPLICANT'S CATEGORY:	MANUFACTURER [X] IMPORTER [] DISTRIBUTOR [] TEST HOUSE [] AGENT []
APPLICANT'S ORDER No(s):	29265
APPLICANT'S CONTACT PERSON(s):	Mr Peter Bradfield
E-mail address:	Peterb@aerial.co.uk
APPLICANT:	Aerial Facilities Limited
ADDRESS:	Aerial House Asheridge Road Chesham Buckinghamshire HP5 1TU United Kingdom
TEL:	+44 (0)1494 777000
FAX:	+44 (0)1494 778456
MANUFACTURER:	Aerial Facilities Limited
EUT(s) COUNTRY OF ORIGIN:	United Kingdom
TEST LABORATORY:	TRL EMC
UKAS ACCREDITATION No:	0728
TEST DATE(s)	21 st February 2005 – 3 rd March 2005
TEST REPORT No:	RU1164/6097

RU1164/6097 Page 4 of 46

EQUIPMENT TEST / EXAMINATIONS REQUIRED

TEST/EXAMINATION	RULE PART	APPLICABILITY	RESULT
RF Power Output	90.205	Yes	Complies
Audio Frequency Response	TIA EIA-603.3.2.6	N/A	N/A
Audio Low-Pass Filter Response	TIA EIA-603.3.2.6	N/A	N/A
Modulation Limiting	TIA EIA-603.3.2.6	N/A	N/A
Occupied Bandwidth	90.210	Yes	Complies
Spurious Emissions at Antenna Terminals	90.210	Yes	Complies
Field Strength of Spurious Emissions	90.210	Yes	Complies
Frequency Stability	90.213	N/A(note 1)	N/A
Transient behaviour	90.214	N/A(note 2)	N/A

2.	Product Class:		Uplink	Class A []	Class B [X]
			Downlink	Class A []	Class B [X]
3.	Product Use:		Private Land mob	ile Repeater	
4.	Emission Designator:		F3E		
5.	Temperatures:		Ambient (Tnom)	21°C	
6.	Supply Voltages:		Vnom	+110Va	С
	Note: Vnom voltages are as stated above	unless other	wise shown on the	test report pa	age
7.	Equipment Category:		Single channel Two channel Multi-channel	[] [] [X]	
8.	Channel spacing:		Narrowband Wideband	[] [X]	
9.	Test Location	TRL Complia	ance Services Up Holland Long Green	[X] []	
10.	Modifications made during test program			AGC Fitted	d in Downlink Path

System Description:

The 60-137702 is Bi directional amplifier consisting of and uplink and a downlink. The uplink operates in the frequency band 417.0 - 420.0 MHz. The uplink input is determined by input signal channelisation and the output of the amplifier if fed into a fibre optic system FCC IDs NE020-0040Series and NE020-0041Series. The downlink operates in the frequency band 408.0 - 411.0 MHz. The downlink output of the amplifier is fed into a radiating cable system. The 60-137702 is incorporated into a system as shown in Annex E.

> RU1164/6097 Page 5 of 46


¹ The EUT does not contain modulation circuitry; therefore the test was not performed.

² The EUT is not a keyed carrier system; therefore the test was not performed.

COMPLIANCE TESTS

AMPLIFIER GAIN - CONDUCTED - PART 2.1046 - UPLINK

Ambient temperature 26°C Relative humidity = 36% Supply voltage = +110Vac Channel number See test results

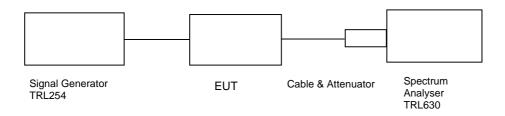

Frequency MHz	Signal Generator Input Level dBm	Cable & Attenuator loss dB	Level at Spectrum Analyser dBm	Gain dB	Output power dBm	Gain after 10dB input level increase dBm
417.0	-51	46.51	-46.11	51.40	0.40	41.57
418.5	-52	46.51	-46.12	52.39	0.39	42.57
420.0	-51	46.51	-45.94	51.57	0.57	41.57

Notes:

1. The signal generator input was increased by 10dBs and the level of the output signal remeasured


TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
SPECTRUM ANALYSER	ANRITSU	MS2665C	MT26089	479	
ATTENUATOR	BIRD	8304-300-N	N/A	220	х
CABLE	ROSENBERGER	MICRO COAX	N/A	280	x
SIGNAL GENERATOR	MARCONI	2042	119388/080	179	x
SPECTRUM ANALYSER	RHODE & SCHWARZ	ESIB 7	100182	630	х

RU1164/6097 Page 6 of 46

AMPLIFIER INTERMODULATION SPURIOUS EMISSIONS - CONDUCTED - PART 2.1053- UPLINK

Ambient temperature = 25°C Radio Laboratory

Relative humidity = 36% Supply voltage = +110Vac

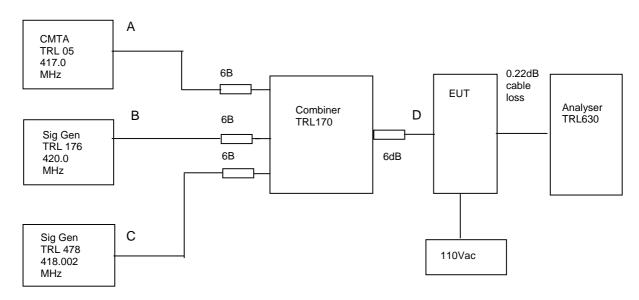

The Intermodulation and spurious products were measured with the amplifier operating at maximum gain. A three tone test was conducted using the equipment as above. The input power level was adjusted so the level at point D was 10dB above the maximum input of –51dm. The cable loss between the EUT and the spectrum analyser was 0.22

R	RF Input Frequency (MHz)		Highest Intermodulation Product Level (dBm)	Limit (dBm)
417.0	418.002	420.0	-54.01 dBm @ 419.004 MHz	-13


Graphical data is shown on the following pages:

Test equipment used for intermodulation test

Tool oquipmont do	Test equipment deed for intermediation test						
TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED		
СМТА	ROHDE & SCHWARZ	CMTA52	894715/033	05	х		
SIGNAL GENERATOR	MARCONI	2042	119388/080	176	х		
COMBINER	ELCOM	RC-4-50	N/A	170	х		
SIGNAL GENERATOR	RHODE & SCHWARZ	SMR 20	834671/003	478	х		
SPECTRUM ANALYSER	RHODE & SCHWARZ	ESIB 7	100182	630	х		

RU1164/6097 Page 7 of 46


Intermodulation Inband

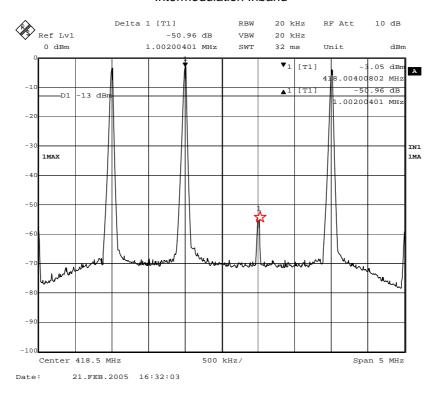

The above plot shows that all products (designated by ★) are at least 50dB below the fundamentals.

RU1164/6097 Page 8 of 46

Intermodulation Wideband

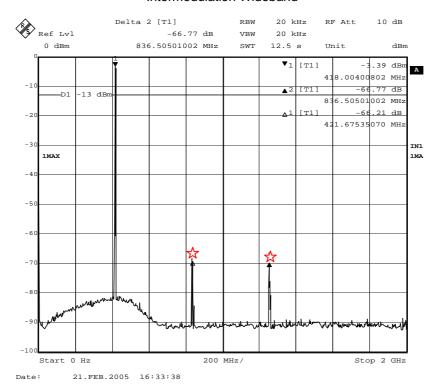


The above plot shows that products outside the bands (designated by ☆) are at least 60dB below the fundamentals.

RU1164/6097 Page 9 of 46

TRANSMITTER TESTS

AMPLIFIER MODULATED CHANNEL TEST - CONDUCTED - Part 2.1049- UPLINK

Ambient temperature = 23°C
Relative humidity = 36%
Supply voltage = +110Vac
Channel number = See test results

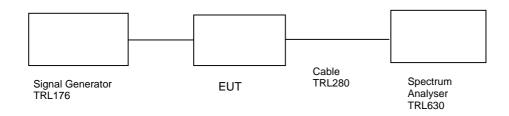

This test was performed to show that the amplifier does not alter the input signal in any way. The input signal was set to the maximum input level (-51dBm) and modulated with a 2500Hz tone. The plots show the signal measured at the signal generator and the signal measured at the output of the EUT.


Note: The cables and attenuators had the following losses.

- 1. Cable TRL280 between EUT and Spectrum Analyser 0.78dB
- 2. Cable between signal generator and EUT 0.22dB


TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
SPECTRUM ANALYSER	ANRITSU	MS2665C	MT26089	479	
ATTENUATOR	BIRD	8304-300-N	N/A	220	
CABLE	ROSENBERGER	MICRO COAX	N/A	280	x
SIGNAL GENERATOR	MARCONI	2042	119388/080	176	х
SPECTRUM ANALYSER	RHODE & SCHWARZ	ESIB 7	100182	630	х

RU1164/6097 Page 10 of 46

417.0 MHz Signal Generator, deviation set to 5kHz

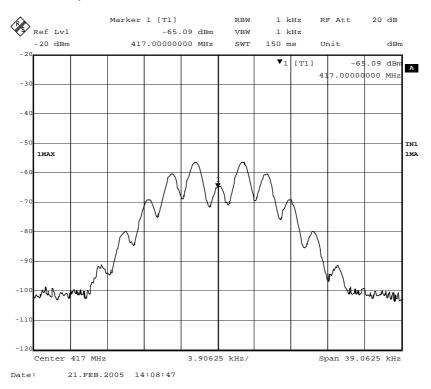


417.0 MHz Signal Generator and EUT, deviation set to 5kHz

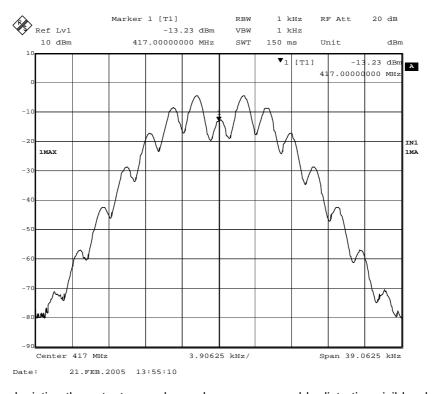


The above plots depicting the output waveshape show no measurable distortion visible when compared to the input signal.

RU1164/6097 Page 11 of 46

418.5 MHz Signal Generator, deviation set to 5kHz

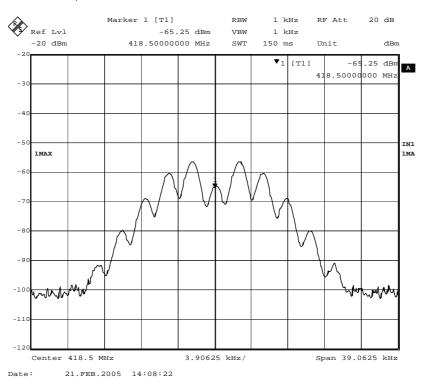


418.5 MHz Signal Generator and EUT, deviation set to 5kHz

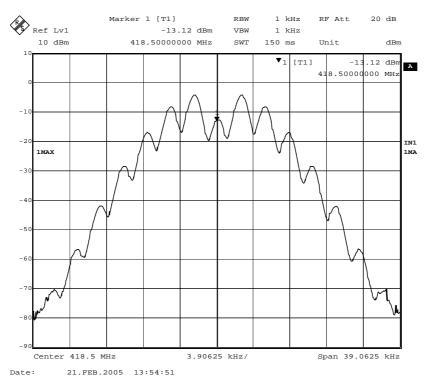


The above plots depicting the output waveshape show no measurable distortion visible when compared to the input signal.

RU1164/6097 Page 12 of 46

420.0 MHz Signal Generator, deviation set to 5kHz

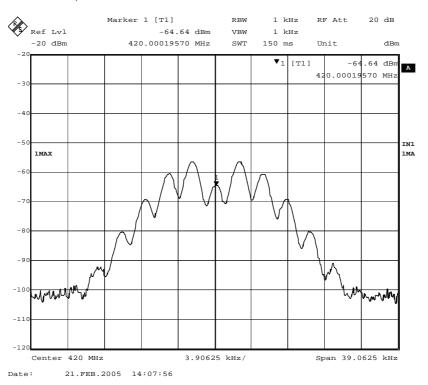

420.0 MHz Signal Generator and EUT, deviation set to 5kHz

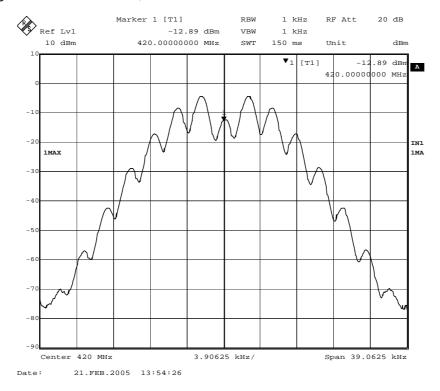


The above plots depicting the output waveshape show no measurable distortion visible when compared to the input signal.

RU1164/6097 Page 13 of 46

TRANSMITTER TESTS

AMPLIFIER SPURIOUS EMISSIONS - CONDUCTED - Part 2.1053- UPLINK

Ambient temperature = 23°C
Relative humidity = 50% Test Signal = F3E
Supply voltage = +110Vac

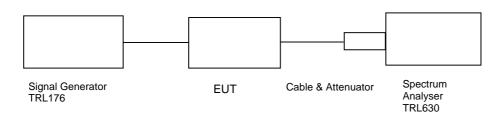

The test was set up as per the diagram. The level at the input was adjusted to compensate for the loss of the interconnecting cable. The unit was tested operating at maximum power and on three test frequencies.

The Spurious limit was calculated as follows:

On any frequency removed from the assigned frequency by more that 250% of the authorised bandwidth

At least 43 + 10 log PdB

 $(10logP_{watts}) - (43+10log (P_{watts} * 1000)) = LIMIT = -13 dBm$

RESULTS


FREQUENCY RANGE	FREQ. (MHz)	MEASURED LEVEL (dBm)	ATTENUATOR & CABLE LOSSES (dB)	EMISSION LEVEL (dBm)	LIMIT (dBm)
0 – 4.2 GHz	1	No Significant Emissions within 20dBs of the limit			

The test equipment used for the Transmitter Conducted Emissions:


TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
SPECTRUM ANALYSER	ANRITSU	MS2665C	MT26089	479	
ATTENUATOR	BIRD	8304-300-N	N/A	220	х
CABLE	ROSENBERGER	MICRO COAX	N/A	280	х
SIGNAL GENERATOR	MARCONI	2042	119388/080	176	х
SPECTRUM ANALYSER	RHODE & SCHWARZ	ESIB 7	100182	630	х

RU1164/6097 Page 14 of 46

Conducted emissions 417.0 MHz 0 – 2.1GHz

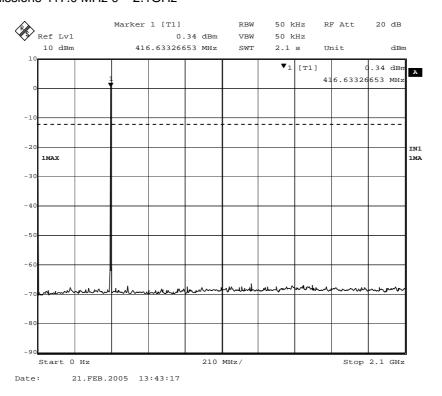


Conducted emissions 417.0 MHz 2.1 - 4.2GHz

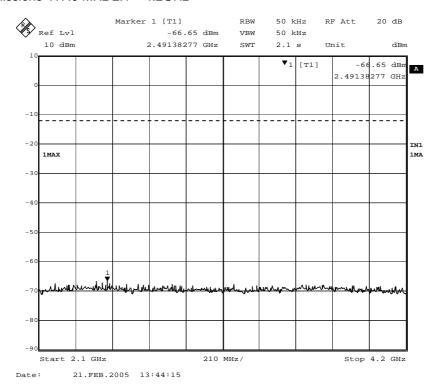


RU1164/6097 Page 15 of 46

Conducted emissions 420.0 MHz 0 - 2.1GHz

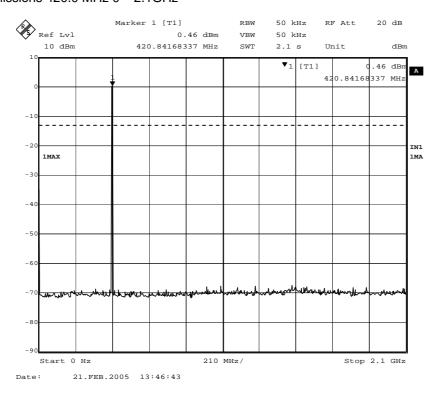


Conducted emissions 420.0 MHz 2.1 - 4.2GHz

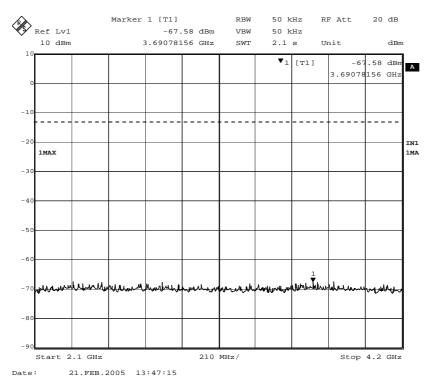

RU1164/6097 Page 16 of 46

TRANSMITTER TESTS

AMPLIFIER SPURIOUS EMISSIONS - RADIATED - Part 2.1053- UPLINK

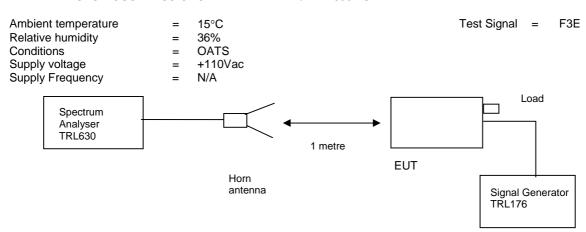

The test was set up as per the diagram. The level at the input was adjusted to compensate for the loss of the interconnecting cable. The unit was tested operating maximum power on three test frequencies with a 50 ohm load on the output. The unit was also tested with the signal generator replaced by another 50ohm load.

The Spurious limit was calculated as follows:

On any frequency removed from the assigned frequency by more that 250% of the authorised bandwidth

At least 43 + 10 log PdB

 $(10logP_{watts}) - (43+10log (P_{watts} * 1000)) = LIMIT = -13 dBm$

RESULTS


FREQUENCY RANGE	FREQ. (MHz)	MEAS. Rx. (dBµV)	CABLE LOSS (dB)	ANT FACTOR	FIELD STRENGTH (dBµV/m)	CALCULATED EIRP (dBm)	LIMIT (dBm)
0 – 4.2 GHz			No Signifi	cant Emiss	ions		-13

The test equipment used for the Transmitter Spurious Emissions:


The test equipment used for the Transmitter Opunious Emissions.							
TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED		
SPECTRUM ANALYSER	ANRITSU	MS2665C	MT26089	479			
HORN	EMCO	3115	9010-3581	139	х		
ATTENUATOR	BIRD	8304-300-N	N/A	220			
CABLE	ROSENBERGER	MICRO COAX	N/A	280	х		
SIGNAL GENERATOR	MARCONI	2042	119388/080	179	х		
SPECTRUM ANALYSER	RHODE & SCHWARZ	ESIB 7	100182	630	x		

RU1164/6097 Page 17 of 46


Radiated emissions 417.0 MHz 0 - 2.1GHz

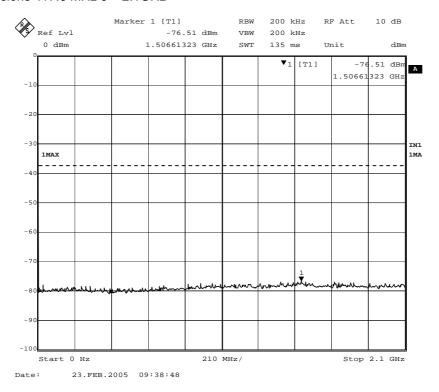


Radiated emissions 417.0 MHz 2.1 - 4.2GHz

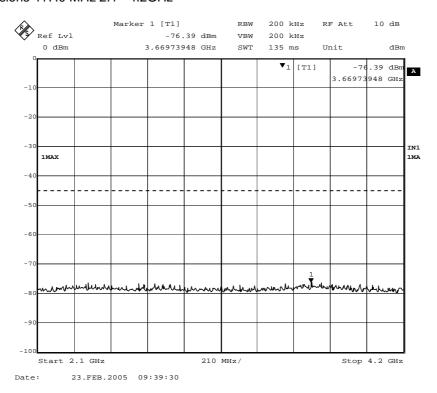


Radiated emissions 420.0 MHz 0 - 2.1GHz

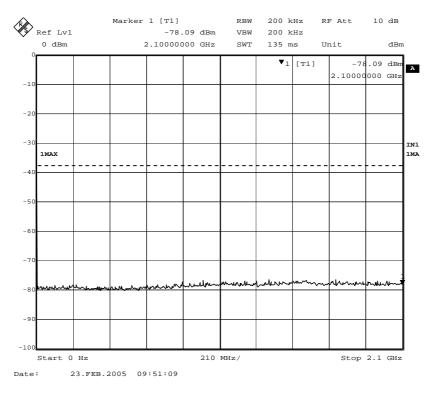


Radiated emissions 420.0 MHz 2.1 - 4.2GHz

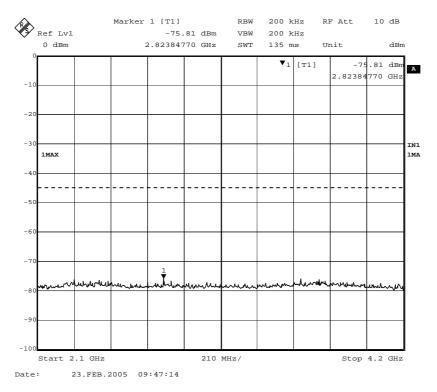

Radiated emissions no input signal 0 - 2.1GHz

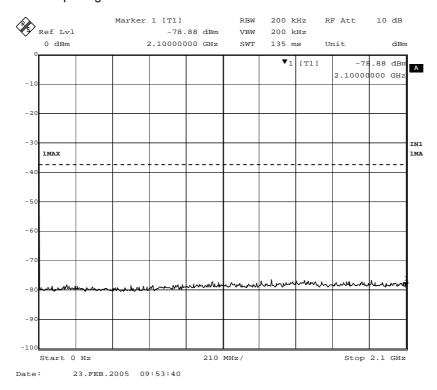


Radiated emissions no input signal 2.1 – 4.2GHz

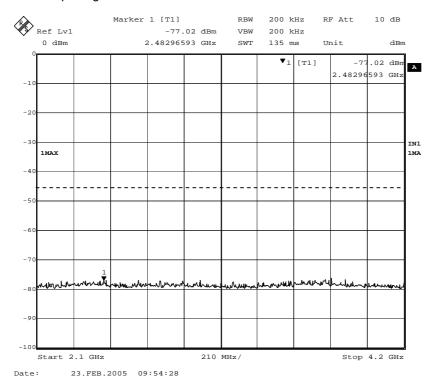

AMPLIFIER GAIN - CONDUCTED - PART 2.1046 - DOWNLINK

 $20^{\circ}C$ Ambient temperature Relative humidity 40% = Supply voltage Channel number = +110Vac = See test results

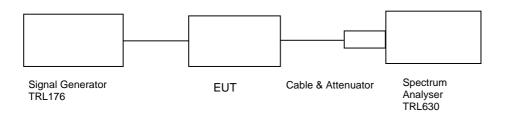

Frequency MHz	Signal Generator Input Level dBm	Cable & Attenuator loss dB	Level at Spectrum Analyser dBm	Gain dB	Output Power dBm	Gain after 10dB input level increase dBm
408.0	-12.5	47.42	-13.97	46.0	33.50	36.93
409.5	-12.6	47.42	-13.39	46.6	34.00	37.42
411.0	-12.5	47.42	-13.95	46.0	33.50	36.63


Notes:

1. The signal generator input was increased by 10dBs and the level of the output signal remeasured.

TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
SPECTRUM ANALYSER	ANRITSU	MS2665C	MT26089	479	
ATTENUATOR	BIRD	8304-200	N/A	103	x
ATTENUATOR	BIRD	8304-300-N	N/A	220	x
CABLE	ROSENBERGER	MICRO COAX	N/A	280	x
SIGNAL GENERATOR	MARCONI	2042	119388/080	176	х
SPECTRUM ANALYSER	RHODE & SCHWARZ	ESIB 7	100182	630	х

AMPLIFIER INTERMODULATION SPURIOUS EMISSIONS - CONDUCTED - PART 2.1053- DOWNLINK

Ambient temperature = 20°C Relative humidity = 40% Supply voltage = +110Vac

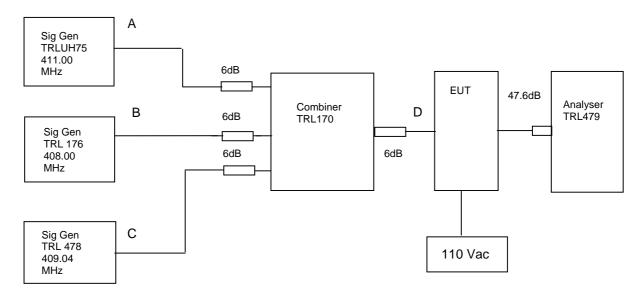

The Intermodulation and spurious products were measured with the amplifier operating at maximum gain. A three tone test was conducted using the equipment as above. The input power level was adjusted so that the level at point D was 10dB above the maximum input of -12.5dBm. The cable and attenuators loss between the EUT and the spectrum analyser was 47.6dB.

RF	Input Frequency (MHz)		RF Input Frequency Highest Intermodulation Product Level (MHz) (dBm)		Limit (dBm)
408.0	409.04	411.0	-14.52dBm @ 410.2 MHz	-13	


Sweep data is shown on the next page:

Test equipment used for intermodulation test

TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
SPECTRUM ANALYSER	ANRITSU	MS2665C	MT26089	479	x
SIGNAL GENERATOR	MARCONI	2022D	119215/058	UH75	х
СМТА	ROHDE & SCHWARZ	CMTA52	894715/033	05	
SIGNAL GENERATOR	RHODE & SCHWARZ	SMR 20	834671/003	478	х
SIGNAL GENERATOR	MARCONI	2042	119388/080	176	х
COMBINER	ELCOM	RC-4-50	N/A	170	х
SPECTRUM ANALYSER	RHODE & SCHWARZ	ESIB 7	100182	630	


RF335 iss02 RU1164/6097 Page 22 of 46

Intermodulation Inband

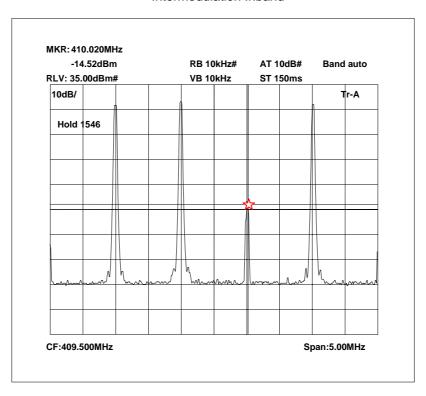

The above plot shows that all products (designated by ☆) are at least 40dB below the fundamentals.

Intermodulation Wideband

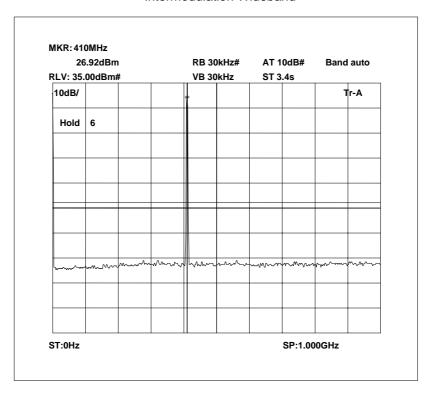


The above plot shows that there are no products outside the bands.

TRANSMITTER TESTS

AMPLIFIER MODULATED CHANNEL TEST - CONDUCTED - Part 2.1049- DOWNLINK

Ambient temperature = 24°C Radio Laboratory

Relative humidity = 36% Supply voltage = +110Vac Channel number = See test results

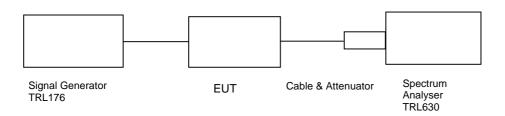


This test was performed to show that the amplifier does not alter the input signal in any way. The input signal was set to the maximum input level (-12.5dBm) and modulated with a 2500Hz tone. The plots show the signal measured at the signal generator and the signal measured at the output of the EUT.

Note: The cables and attenuators had the following losses.


- 1. Cable TRL280 and attenuators TRL220 = 47.6dB
- 2. Cable between signal generator and EUT = 0.22dB

TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
SPECTRUM ANALYSER	ANRITSU	MS2665C	MT26089	479	
ATTENUATOR	BIRD	8304-200	N/A	103	х
ATTENUATOR	BIRD	8304-300-N	N/A	220	х
CABLE	ROSENBERGER	MICRO COAX	N/A	280	х
SIGNAL GENERATOR	MARCONI	2042	119388/080	176	х
SPECTRUM ANALYSER	RHODE & SCHWARZ	ESIB 7	100182	630	х

408.0 MHz Signal Generator, deviation set to 5kHz

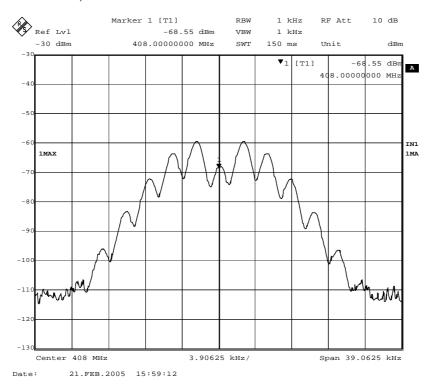


408.0 MHz Signal Generator and EUT, deviation set to 5kHz

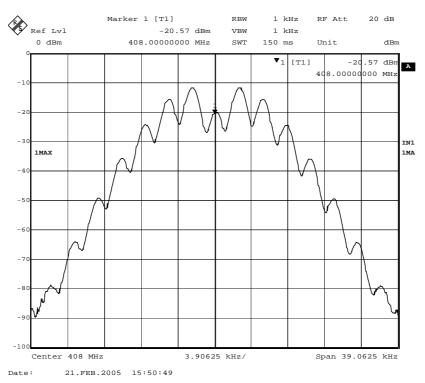


The above plots depicting the output waveshape show no measurable distortion visible when compared to the input signal.

409.5 MHz Signal Generator, deviation set to 5kHz

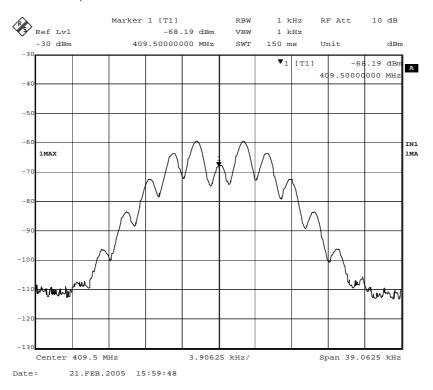


409.5 MHz Signal Generator and EUT, deviation set to 5kHz

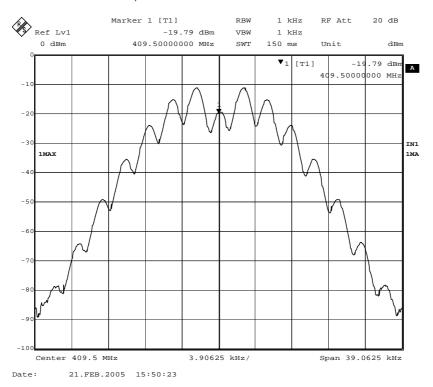


The above plots depicting the output waveshape show no measurable distortion visible when compared to the input signal.

411.0 MHz Signal Generator, deviation set to 5kHz

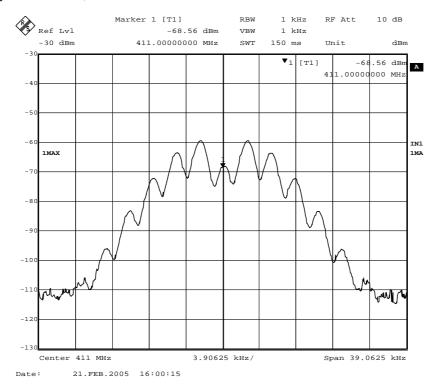

411.0 MHz Signal Generator and EUT, deviation set to 5kHz

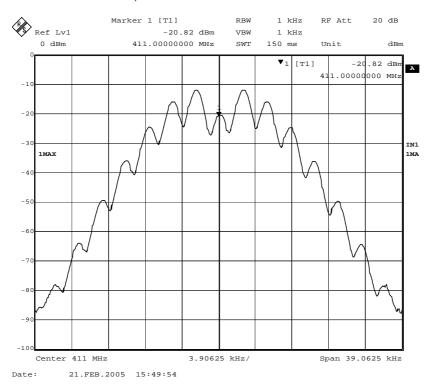


The above plots depicting the output waveshape show no measurable distortion visible when compared to the input signal.

TRANSMITTER TESTS

AMPLIFIER SPURIOUS EMISSIONS - CONDUCTED - Part 2.1053 - DOWNLINK

Ambient temperature = 23°C Radio Laboratory
Relative humidity = 36% Test Signal = F3E
Supply voltage = +110Vac

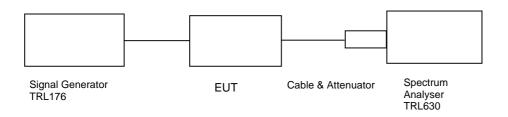

The test was set up as per the diagram. The level at the input was adjusted to compensate for the loss of the interconnecting cable. The unit was tested operating at maximum power and on three test frequencies.

The Spurious limit was calculated as follows:

On any frequency removed from the assigned frequency by more that 250% of the authorised bandwidth

At least 43 + 10 log PdB

 $(10logP_{watts}) - (43+10log (P_{watts} * 1000)) = LIMIT = -13 dBm$

RESULTS


FREQUENCY RANGE	FREQ. (MHz)	MEASURED LEVEL (dBm)	ATTENUATOR & CABLE LOSSES (dB)	EMISSION LEVEL (dBm)	LIMIT (dBm)
0 – 4.2 GHz		No Signifi	cant Emissions		-13

The test equipment used for the Transmitter Conducted Emissions:


TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
SPECTRUM ANALYSER	ANRITSU	MS2665C	MT26089	479	
ATTENUATOR	BIRD	8304-200	N/A	103	
ATTENUATOR	BIRD	8304-300-N	N/A	220	х
CABLE	ROSENBERGER	MICRO COAX	N/A	280	х
SIGNAL GENERATOR	MARCONI	2042	119388/080	179	х
SPECTRUM ANALYSER	RHODE & SCHWARZ	ESIB 7	100182	630	х

RF335 iss02 RU1164/6097 Page 29 of 46


Conducted emissions 408.0 MHz 0 - 2.1GHz

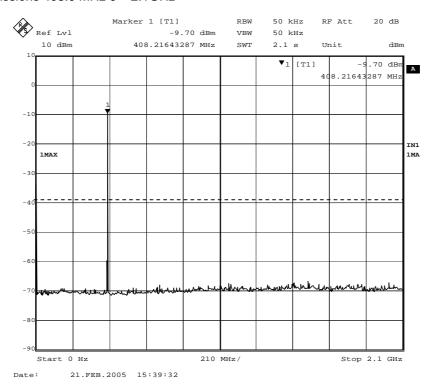


Conducted emissions 408.0 MHz 2.1 - 4.2GHz

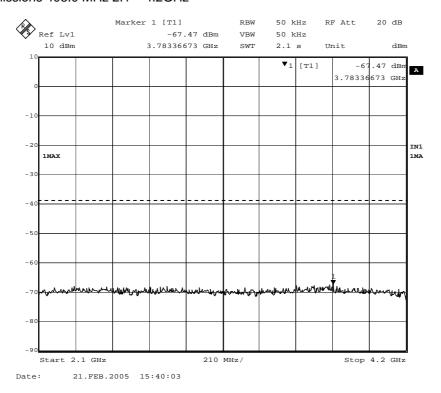

Conducted emissions 411.0 MHz 0 - 2.1GHz

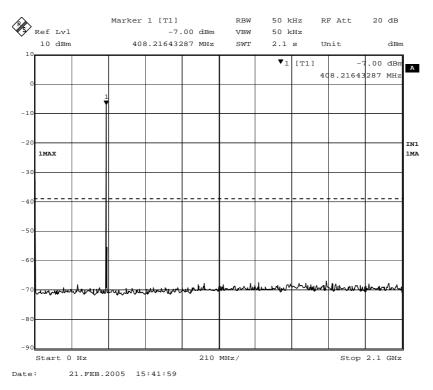


Conducted emissions 411.0 MHz 2.1 – 4.2GHz

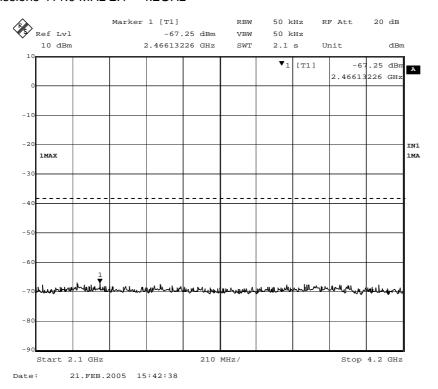

TRANSMITTER TESTS

AMPLIFIER SPURIOUS EMISSIONS - RADIATED - Part 2.1053- DOWNLINK

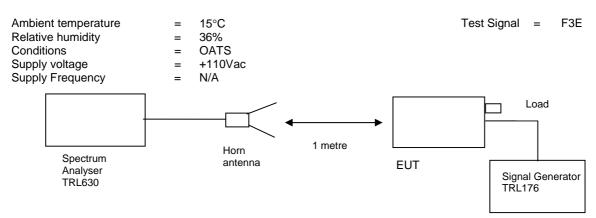

The test was set up as per the diagram. The level at the input was adjusted to compensate for the loss of the interconnecting cable. The unit was tested operating maximum power on three test frequencies with a 50 ohm load on the output. The unit was also tested with the signal generator replaced by another 50ohm load.

The Spurious limit was calculated as follows:

On any frequency removed from the assigned frequency by more that 250% of the authorised bandwidth

At least 43 + 10 log PdB

 $(10logP_{watts}) - (43+10log (P_{watts} * 1000)) = LIMIT = -13 dBm$


RESULTS

FREQUENCY RANGE	FREQ. (MHz)	MEAS. Rx. (dBμV)	CABLE LOSS (dB)	ANT FACTOR	FIELD STRENGTH (dBµV/m)	CALCULATED EIRP (dBm)	LIMIT (dBm)
0 – 4.2 GHz	N	No Significa	ant Emissio	ns within 2	0 dBs of the	limit	-13dBm


The test equipment used for the Transmitter Spurious Emissions:

TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
HORN	EMCO	3115	9010-3581	139	х
ATTENUATOR	BIRD	8304-300-N	N/A	220	х
ATTENUATOR	BIRD	8308-100	N/A	112	х
CABLE	ROSENBERGER	MICRO COAX	N/A	280	х
SIGNAL GENERATOR	MARCONI	2042	119388/080	176	х
SPECTRUM ANALYSER	RHODE & SCHWARZ	ESIB 7	100182	630	х


Radiated emissions 408.0 MHz 0 - 2.1GHz

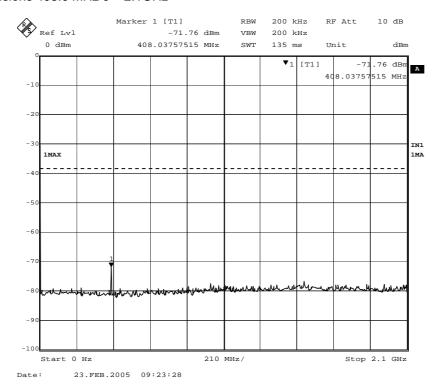


Radiated emissions 408.0 MHz 2.1 - 4.2GHz

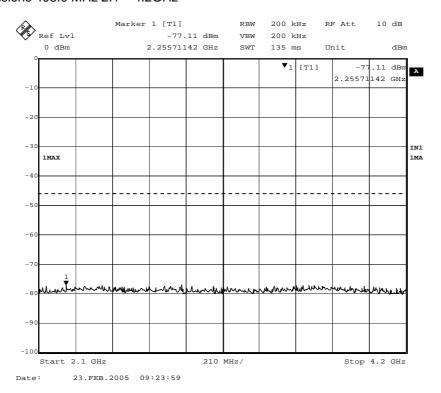


Radiated emissions 411.0 MHz 0 - 2.1GHz

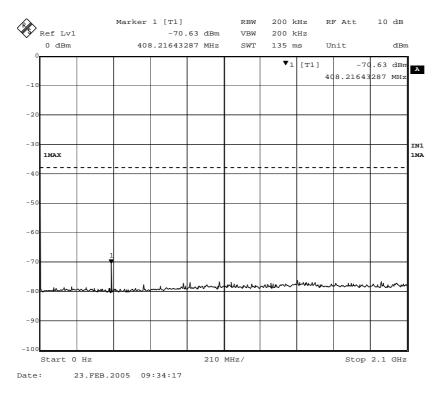


Radiated emissions 411.0 MHz 2.1 - 4.2GHz

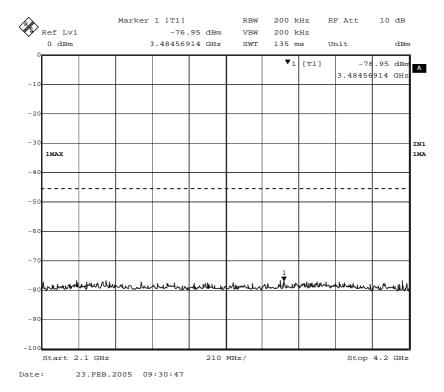

Radiated emissions no input signal 0 - 2.1GHz

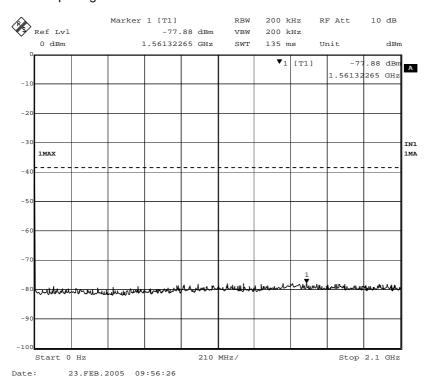


Radiated emissions no input signal 2.1 – 4.2GHz

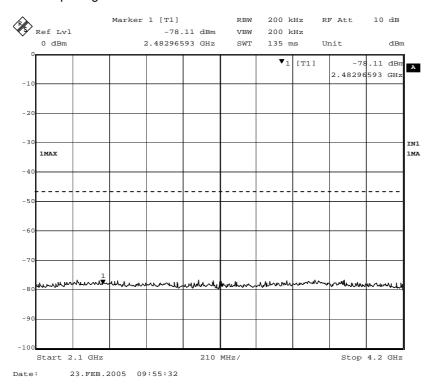

ANNEX A PHOTOGRAPHS

RF335 iss02 RU1164/6097 Page 36 of 46

PHOTOGRAPH No. 1 CONDUCTED TEST SETUP

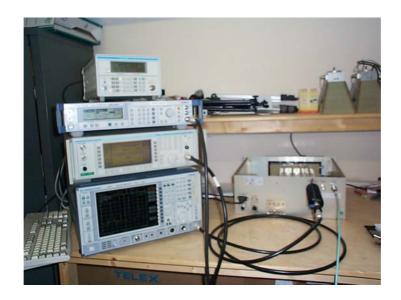

PHOTOGRAPH No. 2

RADIATED TEST SETUP



ANNEX B APPLICANT'S SUBMISSION OF DOCUMENTATION LIST

APPLICANT'S SUBMISSION OF DOCUMENTATION LIST

a.	TCB	-	APPLICATION FEE	[X]
b.	AGENT'S LETTER OF AUTHORISATION	-		[X]
C.	MODEL(s) vs IDENTITY	-		[]
d.	ALTERNATIVE TRADE NAME DECLARATION(s)	-		[]
e.	LABELLING	- - -	PHOTOGRAPHS DECLARATION DRAWINGS	[] [] []
f.	TECHNICAL DESCRIPTION	-		[X]
g.	BLOCK DIAGRAMS	- - -	Tx Rx PSU AUX	[X] [] []
h.	CIRCUIT DIAGRAMS	- - -	Tx Rx PSU AUX	[] [] []
i.	COMPONENT LOCATION	- - -	Tx Rx PSU AUX	[] [] []
j.	PCB TRACK LAYOUT	- - -	Tx Rx PSU AUX	[] [] []
k.	BILL OF MATERIALS	- - -	Tx Rx PSU AUX	[] [] []
l.	USER INSTALLATION / OPERATING INSTRUCTIONS	-		[X]

ANNEX C EQUIPMENT CALIBRATION

TRL	Equipment		Last Cal	Calibration	Due For
Number	Type	Manufacturer	Calibration	Period	Calibration
UH006	3m Range ERP CAL	TRL	06/01/2006	12	06/01/2007
UH028	Log Periodic Ant	Schwarbeck	28/04/2005	24	28/04/2007
UH029	Bicone Antenna	Schwarbeck	27/04/2005	24	27/04/2007
UH041	Multimeter	AVOmeter	14/12/2004	12	14/12/2005
UH075	Signal Generator	Marconi	11/03/2004	12	11/03/2005
UH120	Spectrum Analyser	Marconi	15/03/2005	12	15/03/2006
UH122	Oscilloscope	Tektronix	07/06/2005	24	07/06/2007
UH162	ERP Cable Cal	TRL	06/01/2006	12	06/01/2007
UH253	1m Cable N type	TRL	05/01/2006	12	05/01/2007
UH254	1m Cable N type	TRL	05/01/2006	12	05/01/2007
UH265	Notch filer	Telonic	24/06/2005	12	24/06/2006
L005	CMTA	R&S	05/12/2005	12	05/12/2006
L007	Loop Antenna	R&S	29/03/2005	24	29/03/2007
L103	Attenuator	Bird		Calibrate in use	
L138	1-18GHz Horn	EMCO	15/04/2005	24	15/04/2007
L139	1-18GHz Horn	EMCO	03/05/2005	24	03/05/2007
L176	Signal Generator	Marconi	31/01/2005	12	31/01/2006
L220	Attenuator	Bird		Calibrate in use	
L254	Signal Generator	Marconi	13/12/2004	12	13/12/2005
L280	18GHz Cable	Rosenberger	05/01/2006	12	05/01/2007
L343	CCIR Noise Filter	TRL	07/06/2005	12	07/06/2006
L426	Temperature Indicator	Fluke	14/12/2004	12	14/12/2005
L478	Signal Generator	R&S	19/05/2004	12	19/05/2004
L479	Analyser	Anritsu	18/11/2005	12	18/11/2006
L552	Signal Generator	Agilent	25/04/2005	12	25/04/2006
L630	Spectrum Analyser	R&S	03/03/2005	12	03/03/2005

ANNEX D MEASUREMENT UNCERTAINTY

Radio Testing - General Uncertainty Schedule

All statements of uncertainty are expanded standard uncertainty using a coverage factor of 1.96 to give a 95% confidence where no required test level exists.

[1] Adjacent Channel Power

Uncertainty in test result = 1.86dB

[2] Carrier Power

```
Uncertainty in test result (Equipment - TRLUH120) = 2.18dB
Uncertainty in test result (Equipment – TRL05) = 1.08dB
Uncertainty in test result (Equipment – TRL479) = 2.48dB
```

[3] Effective Radiated Power

Uncertainty in test result = 4.71dB

[4] Spurious Emissions

Uncertainty in test result = 4.75dB

[5] Maximum frequency error

```
Uncertainty in test result (Equipment - TRLUH120) = 119ppm Uncertainty in test result (Equipment – TRL05) = 0.113ppm Uncertainty in test result (Equipment – TRL479) = 0.265ppm
```

[6] Radiated Emissions, field strength OATS 14kHz-18GHz Electric Field

Uncertainty in test result (14kHz - 30MHz) = 4.8dB, Uncertainty in test result (30MHz - 1GHz) = 4.6dB, Uncertainty in test result (14kHz - 30MHz) = 4.7dB

[7] Frequency deviation

Uncertainty in test result = 3.2%

[8] Magnetic Field Emissions

Uncertainty in test result = 2.3dB

[9] Conducted Spurious

```
Uncertainty in test result (Equipment TRL479) Up to 8.1GHz = 3.31dB
Uncertainty in test result (Equipment TRL479) 8.1GHz – 15.3GHz = 4.43dB
Uncertainty in test result (Equipment TRL479) 15.3GHz – 21GHz = 5.34dB
Uncertainty in test result (Equipment TRLUH120) Up to 26GHz = 3.14dB
```

[10] Channel Bandwidth

Uncertainty in test result = 15.5%

[11] Amplitude and Time Measurement - Oscilloscope

Uncertainty in overall test level = 2.1dB, Uncertainty in time measurement = 0.59%, Uncertainty in Amplitude measurement = 0.82%

[11] Power Line Conduction

Uncertainty in test result = 3.4dB

ANNEX E SYSTEM DIAGRAM

SYSTEM DIAGRAM

