

EMC TEST REPORT No. 150500821SHA-001

Applicant : Everflourish Electrical Co.,Ltd.

Renjiu Village, Wuxiang Town, Yinzhou, Ningbo

315111, China

Manufacturer : Everflourish Electrical Co.,Ltd.

Renjiu Village, Wuxiang Town, Yinzhou, Ningbo

315111, China

Equipment : Remote control transmitter

Type/Model : EMW203T1

SUMMARY

The equipment complies with the requirements according to the following standard(s):

47CFR Part 15 (2014): Radio Frequency Devices

ANSI C63.10 (2009): American National Standard for Testing Unlicensed Wireless Devices

Date of issue: June 30, 2015

Prepared by: Reviewed by:

Jesse Xu (Project Engineer)

Jesse X4

Daniel Zhao (Reviewer)



Description of Test Facility

Name: Intertek Testing Services Limited Shanghai

Address: Building No.86, 1198 Qinzhou Road(North), Shanghai 200233, P.R. China

FCC Registration Number: 236597

IC Assigned Code: 2042B-1

Name of contact: Steve Li Tel: +86 21 64956565 ext. 214 Fax: +86 21 54262335 ext. 214



Content

	JMMARY	
Dı	ESCRIPTION OF TEST FACILITY	
1.	GENERAL INFORMATION	4
	1.1 Applicant Information	
	1.2 Identification of the EUT	4
	1.3 Technical specification	
	1.4 Mode of operation during the test / Test peripherals used	5
2.	TEST SPECIFICATION	6
	2.1 Instrument list	6
	2.2 Test Standard	
3.	FUNDAMENTAL & SPURIOUS EMISSION & RESTRICT BAND RADIATED EMISSION	7
	3.1 Test limit	
	3.2 Test Configuration	8
	3.3 Test procedure and test setup	8
	3.4 Test protocol	9
4.	DEACTIVATING TIME	10
	4.1 Test limit	10
	4.2 Test Configuration	11
	4.3 Test procedure and test setup	
	4.4 Test protocol	11
5.	POWER LINE CONDUCTED EMISSION	12
	5.1 Limit	12
	5.2 Test configuration	12
	5.3 Test procedure and test set up	
	5.4 Test protocol	14
6.	EMISSION BANDWIDTH	
	6.1 Test limit	15
	6.2 Test Configuration	15
	6.3 Test procedure and test setup	
	6.4 Test protocol	16
7.	OCCUPIED BANDWIDTH	17
	7.1 Test limit	17
	7.2 Test Configuration	17
	7.3 Test procedure and test setup	17
	7.4 Test protocol	18



1. General Information

1.1 Applicant Information

Applicant: Everflourish Electrical Co.,Ltd.

Renjiu Village, Wuxiang Town, Yinzhou, Ningbo

315111, China

Name of contact: Lisa Luo

Tel: 86 574 88330888*8294

Fax: 86 574 88330999

Manufacturer: Everflourish Electrical Co.,Ltd.

Renjiu Village, Wuxiang Town, Yinzhou, Ningbo

315111, China

Sample received date : June 13, 2015

Sample Identification No : *0150615-32-001*

Date of test : June 20, 2015 ~ June 30, 2015

1.2 Identification of the EUT

Equipment: Remote control transmitter

Type/model: EMW203T1

FCC ID: VBA-EF203T1

IC: NA

FCC ID:VBA-EF203T1



1.3 Technical specification

Operation Frequency Band: 433.92MHz

Modulation: ASK

Antenna Designation: Integral antenna, non-user removable.

Gain of Antenna: 1dBi

Rating: Battery: DC 3V

Working frequency: 433.92MHz

Description of EUT: There is one model only.

The EUT is a transmitter to control the working

condition of the corresponding receiver.

Channel Description: There is one channel only, namely 433.92MHz.

1.4 Mode of operation during the test / Test peripherals used

Within this test report, EUT was tested with modulation and tested under its rating voltage and frequency.

The EUT is a handheld device, so three axes (X, Y, Z) were observed while the test receiver worked as "max hold" continuously and the highest reading among the whole test procedure was recorded.



2. Test Specification

2.1 Instrument list

Equipment	Type	Manu.	Internal no.	Cal. Date	Due date
Test Receiver	ESIB 26	R&S	EC 3045	2014-10-21	2016-10-20
Semi-anechoic	-	Albatross	EC 3048	2015-5-21	2016-5-20
chamber		project			
Bilog Antenna	CBL 6112D	TESEQ	EC 4206	2014-5-16	2016-5-15
Horn antenna	HF 906	R&S	EC 3049	2014-5-13	2016-5-12
Pre-amplifier	Pre-amp 18	R&S	EC 3222	2015-4-12	2016-4-11
Test Receiver	FSV40	R&S	/	2014-10-21	2015-10-20
Loop antenna	9230-1/9229-1	Schwarzbeck	086814/084	2014-12-16	2015-12-15
			814		

2.2 Test Standard

47CFR Part 15 (2014) ANSI C63.10: 2009

2.3 Test Summary

This report applies to tested sample only. This report shall not be reproduced in part without written approval of Intertek Testing Service Shanghai Limited.

TEST ITEM	FCC REFERANCE	IC REFERANCE	RESULT
Fundamental & spurious	15.231(b)	-	Pass
emission			
Restrict band radiated emission	15.205	-	Pass
Power line conducted emission	15.207	-	NA
Emission bandwidth	15.231(c)	-	Pass
Deactivating time	15.231(a)(1)	-	Pass
Occupied bandwidth	-	-	NA



3. Fundamental & Spurious Emission & Restrict band radiated emission

Test result: PASS

3.1 Test limit

3.1.1 The emission shall test through the 10th harmonic or to 40GHz, whichever is lower. It must comply with the limits below:

Fundamental Frequency (MHz)	Fundamental limit (uV/m)	Spurious limit (uV/m)	
40.66 – 40.70	2250	225	
☐70 – 130	1250	125	
□130 - 174	1250 to 3750	125 to 375	
<u>174 - 260</u>	3750	375	
$\boxtimes 260 - 470$	3750 to 12500	375 to 1250	
Above 470	12500	1250	

The formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz, uV/m at 3 meters = 56.81818(Frequency) - 6136.3636; for the band 260-470 MHz, uV/m at 3 meters = 41.6667(Frequency) - 7083.3333. The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.

For that the EUT use fundamental frequency of 433.92MHz, after calculation, the limit is:


Fundamental limit = $41.6667 * 433.92 - 7083.3333 = 10996.68 \text{ uV/m} = 80.80dBuV/m}$ Spurious limit = 81 - 20 = 60.80dBuV/m

3.1.2 The radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) showed as below:

Frequency (MHz)	Field Strength (dBuV/m)	Measurement Distance (m)		
30 - 88	40.0	3		
88 - 216	43.5	3		
216 - 960	46.0	3		
Above 960	54.0	3		



3.2 Test Configuration

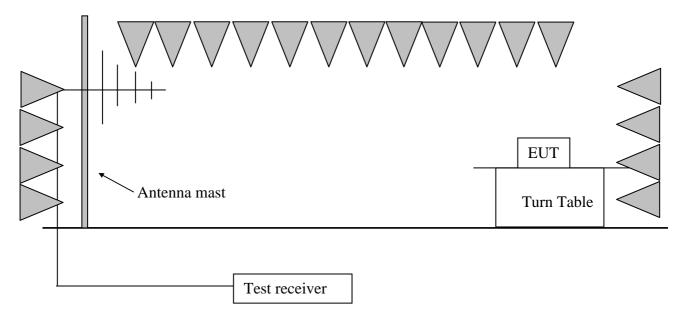

3.3 Test procedure and test setup

The measurement was applied in a semi-anechoic chamber. While testing for spurious emission higher than 1GHz, if applied, the pre-amplifier would be equipped just at the output terminal of the antenna.

Tabletop devices shall be placed on a nonconducting platform with nominal top surface dimensions 1 m by 1.5 m. For emissions testing at or below 1 GHz, the table height shall be 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m.

The turntable rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna mast. The antenna moved up and down between from 1 meter to 4 meters to find out the maximum emission level.

The radiated emission was measured using the test receiver with the resolutions bandwidth set as:

RBW=300 Hz, VBW=1 kHz (9 kHz~150 kHz);

RBW=10kHz, VBW=30kHz (150kHz~30MHz);

RBW = 100kHz, VBW = 300kHz (30MHz~1GHz)

RBW = 1MHz, VBW = 3MHz (>1GHz for PK);



3.4 Test protocol

Antenna	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Emission Type	Limit (dBuV/m)	Margin	Detector
Н	433.92	18.80	83.10	Fundamental	100.80	17.70	PK
Н	869.75	23.60	58.90	Harmonics	80.80	21.90	PK
Н	1737.47	-18.10	54.30	Harmonics	80.80	26.50	PK
Н	2170.34	-16.28	56.10	Harmonics	80.80	24.70	PK
V	433.92	19.10	71.30	Fundamental	100.80	29.50	PK
V	869.75	24.00	47.80	Harmonics	80.80	33.00	PK
V	2170.34	-16.28	48.50	Harmonics	80.80	32.30	PK
V	3909.81	-2.70	38.40	Restrict	74.00	35.60	PK
Н	407.00	17.40	23.40	Restrict	46.00	22.60	PK
Н	1720.12	-10.00	33.42	Restrict	74.00	40.58	PK

Remark: 1.Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz)

- 2. Corrected Reading = Original Receiver Reading + Correct Factor
- 3. Margin = limit Corrected Reading
- 4. If PK reading is less than AV limit, the AV test can be elided.

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,

Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV, limit = 40.00dBuV/m.

Then Correct Factor = 30.20 + 2.00 - 32.00 = 0.20 dB/m; Corrected Reading = 10 dBuV + 0.20 dB/m = 10.20 dBuV/m; Margin = 40.00 dBuV/m - 10.20 dBuV/m = 29.80 dB.

Calculating the AV value according to the duty cycle

Antenna	Frequency (MHz)	PK Reading (dBuV/m)	Correct Factor (dB)	AV Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)
Н	433.92	83.10	-9.58	73.52	80.80	7.28

Remark: 1.Correct Factor = $20\lg (duty cycle) = 20\lg (0.332) = -9.58$

- 2. AV Reading = PK Reading + Correct Factor
- 3. Margin = limit AV Reading



4. Deactivating time


Test result: PA	ASS
-----------------	-----

4	4				•	•	
4		. 1.7	est	Iп	m	1	t
-							B.

(1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.
(2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.
(3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.
(4) Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.
(5) Transmission of set-up information for security systems may exceed the transmission duration limits in (1) and (2) above, provided such transmission are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.



4.2 Test Configuration

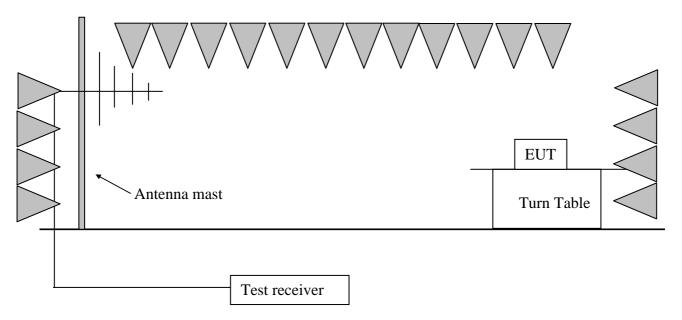

4.3 Test procedure and test setup

The measurement was applied in a semi-anechoic chamber.

The central frequency of test receiver was set as the operating frequency of EUT and the Span was set as 0.

The EUT was switched once. The test receiver recorded the whole time from the triggered moment to the time of stopping radiating. For manual switching, to avoid uncertainty, the operating above would be repeated five times and the worst data is recorded.

4.4 Test protocol

Whole time from the triggered moment to the time of stopping radiating: 0.46s. As a result, the EUT complies with the limit of 5s' deactivating time.




5. Power line conducted emission

Test result: NA

5.1 Limit

Frequency of Emission (MHz)	Conducted Lin	mit (dBuV)				
	QP	AV				
0.15-0.5	66 to 56*	56 to 46 *				
0.5-5	56	46				
5-30	60	50				
* Decreases with the logarithm of the frequency.						

5.2 Test configuration

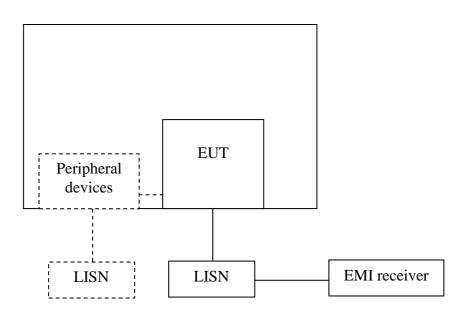

For table top equipment, wooden support is 0.8m height table

For floor standing equipment, wooden support is 0.1m height rack.



5.3 Test procedure and test set up

The EUT are connected to the main power through a line impedance stabilization network (LISN). This provides a $50\Omega/50uH$ coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a $50\Omega/50uH$ coupling impedance with 50Ω termination.

Both sides (Line and Neutral) of AC line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4 on conducted measurement. The bandwidth of the test receiver is set at 9 kHz.



5.4 Test protocol

Power line: L

Frequency	Correct Factor	Corrected Reading		Li	mit	Margin	
	(dB)	(dBuV)		(dB	uV)	(dB)	
		QP	AV	QP	AV	QP	AV
-	-	-	ı	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-

Remark: 1. Correction Factor (dB) = LISN Factor (dB) + Cable Loss (dB).

- 2. Margin (dB) = Limit Corrected Reading.
- 3. If the margin higher than 20dB, it would be marked as *.

Power line: N

Frequency	Correct Factor	Corrected Reading		Limit		Margin	
	(dB)	(dBuV)		(dBuV)		(dB)	
		QP	AV	QP	AV	QP	AV
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	_	-	-	-	-	-

Remark: 1. Correction Factor (dB) = LISN Factor (dB) + Cable Loss (dB).

- 2. Margin (dB) = Limit Corrected Reading.
- 3. If the margin higher than 20dB, it would be marked as *.



6. Emission Bandwidth


Test Status: Pass

6.1 Test limit

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20dB down from the modulated carrier.

The limit for the EUT = 0.25% * 433.92MHz = 1085kHz

6.2 Test Configuration

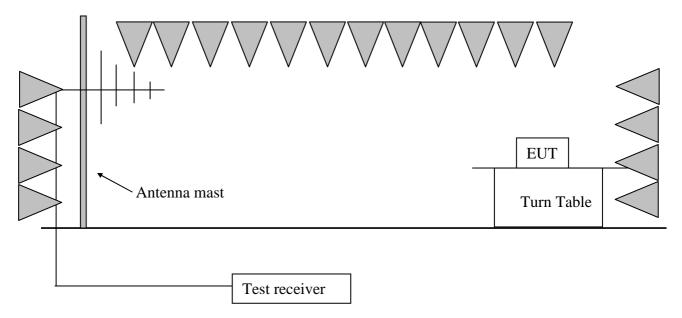

6.3 Test procedure and test setup

The EUT and simulators were placed on a 0.8m high wooden turntable above the horizontal metal ground plane. The turn table rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna mast. The antenna moved up and down between from 1meter to 4 meters to find out the maximum emission level.

The central frequency of test receiver was set near the operating frequency of EUT. The test was conducted using the Spectrum Analyzer with the resolutions bandwidth set at 30kHz, the video bandwidth set at 100kHz.

FCC ID:VBA-EF203T1



6.4 Test protocol

 $\begin{array}{cccc} \text{Temperature} & : & 25 \, ^{\circ}\text{C} \\ \text{Relative Humidity} & : & 55 \, \% \\ \end{array}$

Channel	Emission Bandwidth (kHz)	Limit (kHz)
1	134	1085




7. Occupied Bandwidth

Test Status: NA

7.1 Test limit

None

7.2 Test Configuration

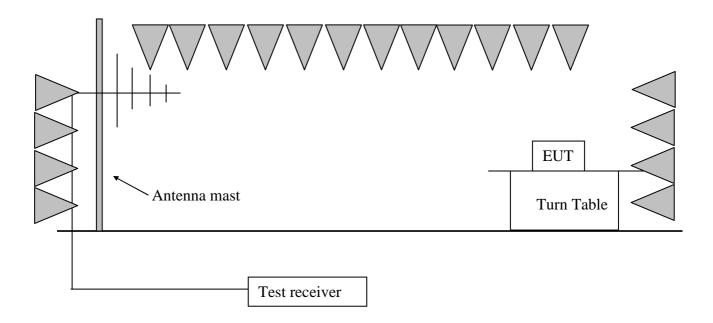

7.3 Test procedure and test setup

The occupied bandwidth per RSS-Gen Issue 3 Clause 4.6.1 was measured using the Spectrum Analyzer with the resolutions bandwidth set at 10kHz, the video bandwidth set at 30kHz.



7.4 Test protocol

Temperature : °C Relative Humidity : %

Channel	Occupied Bandwidth (MHz)	Max. Value MHz)

Remark: "Max. Value" is the maximum test result of all the measured occupied bandwidth.