

4.3. Test Result of Radiated emission

Emission frequencies below 1 GHz Channel HI

Test Date: Mar. 04, 2005 Temperature: 20 Humidity: 59% Atmospheric pressure: 1031mmHg

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result@3m (dBuV/m)	Limit@3m (dBuV/m)	Margin (dB)	Remark	Table Deg.	Ant High (m)
139.89	H	48.05	-15.88	32.17	43.5	-11.33	Peak	197	1.0
141.78	H	47.14	-15.91	31.23	43.5	-12.27	Peak	190	1.0
143.94	H	48.21	-15.94	32.27	43.5	-11.23	Peak	192	1.0
145.83	H	45.94	-15.99	29.95	43.5	-13.55	Peak	180	1.0
301.40	H	51.07	-12.33	38.74	46.0	-7.26	Peak	194	1.0
344.80	H	46.78	-11.23	35.56	46.0	-10.44	Peak	188	1.0
367.90	H	46.17	-10.17	36.00	46.0	-10.00	Peak	187	1.0
750.80	H	35.18	1.30	36.48	46.0	-9.52	Peak	187	1.0
56.19	V	50.80	-19.75	31.05	40.0	-8.95	Peak	197	1.0
77.79	V	52.99	-20.63	32.36	40.0	-7.64	Peak	187	1.0
99.39	V	52.55	-17.54	35.01	43.5	-8.49	Peak	190	1.0
109.38	V	53.02	-16.37	36.65	43.5	-6.85	Peak	199	1.0
400.80	V	45.94	-9.08	36.86	46.0	-9.14	Peak	189	1.0
432.30	V	48.36	-8.25	40.11	46.0	-5.89	Peak	192	1.0
444.90	V	46.90	-8.07	38.83	46.0	-7.17	Peak	184	1.0
460.30	V	44.40	-7.55	36.86	46.0	-9.14	Peak	197	1.0

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss – Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120 kHz and video bandwidth is 300 kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too below to be measured.

Modulation Standard: IEEE 802.11b (11Mbps)

Emission frequencies above 1 GHz Channel LO

Test Date: Mar. 04, 2005 Temperature: 20 Humidity: 59% Atmospheric pressure: 1031mmHg

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result@3m (dBuV/m)	Limit@3m (dBuV/m)	Margin (dB)	Remark	Table Deg.	Ant High (m)
4821.60	H	44.80	8.12	52.92	74	-21.08	Peak	194	1.1
4821.60	H	31.61	8.12	39.73	54	-14.27	Ave	194	1.1
7233.50	H	45.20	11.89	57.09	74	-16.91	Peak	189	1.1
7233.50	H	38.01	11.89	49.99	54	-4.01	Ave	189	1.1
9648.00	H	---	---	---	54	---	Ave	---	---
12060.00	H	---	---	---	54	---	Ave	---	---
4823.20	V	57.61	7.36	64.97	74	-9.03	Peak	197	1.0
4823.20	V	43.13	7.36	50.49	54	-3.51	Ave	197	1.0
7236.00	V	51.53	11.05	62.58	74	-11.42	Peak	198	1.0
7236.00	V	38.42	11.05	49.47	54	-4.53	Ave	198	1.0
9648.00	V	---	---	---	54	---	Ave	---	---
12060.00	V	---	---	---	54	---	Ave	---	---

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss – Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120 kHz and video bandwidth is 300 kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too below to be measured.

Modulation Standard: IEEE 802.11b (11Mbps)

Emission frequencies above 1 GHz Channel MID

Test Date: Mar. 04, 2005 Temperature: 20 Humidity: 59% Atmospheric pressure: 1031mmHg

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result@3m (dBuV/m)	Limit@3m (dBuV/m)	Margin (dB)	Remark	Table Deg.	Ant High (m)
4874.80	H	43.67	8.32	51.99	74	-22.01	Peak	190	1.1
4874.80	H	39.63	8.32	47.95	54	-6.05	Ave	190	1.1
7310.20	H	46.60	12.05	58.65	74	-15.35	Peak	187	1.1
7310.20	H	35.74	12.05	47.79	54	-6.21	Ave	187	1.1
9748.00	H	---	---	---	54	---	Ave	---	---
12185.00	H	---	---	---	54	---	Ave	---	---
4874.80	V	55.23	7.54	62.77	74	-11.23	Peak	199	1.0
4874.80	V	40.53	7.54	48.07	54	-5.93	Ave	199	1.0
7310.20	V	47.92	11.14	59.06	74	-14.94	Peak	198	1.0
7310.20	V	36.77	11.14	47.91	54	-6.09	Ave	198	1.0
9748.00	V	---	---	---	54	---	Ave	---	---
12185.00	V	---	---	---	54	---	Ave	---	---

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss – Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120 kHz and video bandwidth is 300 kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too below to be measured.

Modulation Standard: IEEE 802.11b (11Mbps)

Emission frequencies above 1 GHz Channel HI

Test Date: Mar. 04, 2005 Temperature: 20 Humidity: 59% Atmospheric pressure: 1031mmHg

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result@3m (dBuV/m)	Limit@3m (dBuV/m)	Margin (dB)	Remark	Table Deg.	Ant High (m)
4924.10	H	44.31	8.52	52.82	74	-21.18	Peak	166	1.1
4924.10	H	40.78	8.52	49.30	54	-4.70	Ave	166	1.1
7384.90	H	45.96	12.20	58.16	74	-15.84	Peak	165	1.1
7384.90	H	35.92	12.20	48.12	54	-5.88	Ave	165	1.1
9848.00	H	---	---	---	54	---	Ave	---	---
12310.00	H	---	---	---	54	---	Ave	---	---
4923.30	V	57.57	7.72	65.29	74	-8.71	Peak	165	1.0
4923.30	V	41.87	7.72	49.59	54	-4.41	Ave	165	1.0
7384.90	V	50.67	11.22	61.89	74	-12.11	Peak	168	1.0
7384.90	V	37.27	11.22	48.49	54	-5.51	Ave	168	1.0
9848.00	V	---	---	---	54	---	Ave	---	---
12310.00	V	---	---	---	54	---	Ave	---	---

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss – Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120 kHz and video bandwidth is 300 kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too below to be measured.

Modulation Standard: IEEE 802.11g (6Mbps)

Emission frequencies above 1 GHz Channel LO

Test Date: Mar 04, 2005 Temperature: 20 Humidity: 59% Atmospheric pressure: 1031mmHg

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result@3m (dBuV/m)	Limit@3m (dBuV/m)	Margin (dB)	Remark	Table Deg.	Ant High (m)
4824.00	H	44.55	8.12	52.67	74	-21.33	Peak	127	1.1
4824.00	H	41.33	8.12	49.45	54	4.55	Ave	127	1.1
7235.00	H	46.23	11.89	58.11	74	-15.89	Peak	128	1.1
7235.00	H	38.01	11.89	49.90	54	-4.10	Ave	128	1.1
9648.00	H	---	---	---	54	---	Ave	---	---
12060.00	H	---	---	---	54	---	Ave	---	---
4824.80	V	49.30	7.36	56.66	74	-17.34	Peak	128	1.0
4824.80	V	42.42	7.36	49.78	54	-4.22	Ave	128	1.0
7235.80	V	50.45	11.05	61.50	74	-12.50	Peak	129	1.0
7235.80	V	39.65	11.05	50.70	54	-3.30	Ave	129	1.0
9648.00	V	---	---	---	54	---	Ave	---	---
12060.00	V	---	---	---	54	---	Ave	---	---

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss – Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120 kHz and video bandwidth is 300 kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too below to be measured

Modulation Standard: IEEE 802.11g (6Mbps)

Emission frequencies above 1 GHz Channel MID

Test Date: Mar. 04, 2005 Temperature: 20 Humidity: 59% Atmospheric pressure: 1031mmHg

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result@3m (dBuV/m)	Limit@3m (dBuV/m)	Margin (dB)	Remark	Table Deg.	Ant High (m)
4873.40	H	44.62	8.32	52.93	74	-21.07	Peak	226	1.1
4873.40	H	40.66	8.32	48.98	54	-5.02	Ave	226	1.1
7311.00	H	46.02	12.04	58.06	74	-15.94	Peak	225	1.1
7311.00	H	37.20	12.04	49.24	54	-4.76	Ave	225	1.1
9748.00	H	---	---	---	54	---	Ave	---	---
12185.00	H	---	---	---	54	---	Ave	---	---
4873.40	V	52.19	7.53	59.72	74	-14.28	Peak	225	1.0
4873.40	V	41.96	7.54	49.50	54	-4.50	Ave	225	1.0
7311.80	V	50.57	11.13	61.70	74	-12.30	Peak	228	1.0
7311.80	V	38.90	11.14	50.04	54	-3.96	Ave	228	1.0
9748.00	V	---	---	---	54	---	Ave	---	---
12185.00	V	---	---	---	54	---	Ave	---	---

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss – Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120 kHz and video bandwidth is 300 kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too below to be measured.

Modulation Standard: IEEE 802.11g (6Mbps)

Emission frequencies above 1 GHz Channel HI

Test Date: Mar. 04, 2005 Temperature: 20 Humidity: 59% Atmospheric pressure: 1031mmHg

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result@3m (dBuV/m)	Limit@3m (dBuV/m)	Margin (dB)	Remark	Table Deg.	Ant High (m)
4924.10	H	44.94	8.52	53.45	74	-20.55	Peak	227	1.1
4924.10	H	39.80	8.52	48.32	54	-5.68	Ave	227	1.1
7384.90	H	45.68	12.19	57.87	74	-16.13	Peak	226	1.1
7384.90	H	36.20	12.19	48.39	54	-5.61	Ave	226	1.1
9848.00	H	---	---	---	54	---	Ave	---	---
12310.00	H	---	---	---	54	---	Ave	---	---
4922.70	V	52.42	7.72	60.14	74	-13.86	Peak	228	1.0
4922.70	V	41.01	7.72	48.73	54	-5.27	Ave	228	1.0
7383.80	V	47.34	11.21	68.55	74	-5.24	Peak	226	1.0
7383.80	V	37.54	11.22	48.76	54	-5.24	Ave	226	1.0
9848.00	V	---	---	---	54	---	Ave	---	---
12310.00	V	---	---	---	54	---	Ave	---	---

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss – Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120 kHz and video bandwidth is 300 kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too below to be measured.

4.3.1. Photographs of Radiated Emission Test

FRONT VIEW



REAR VIEW



4.4. 6dB Bandwidth Measurement Data

(1) Modulation Standard: IEEE 802.11b (11Mbps)


Test Date: Feb. 23, 2005 Temperature: 24 Humidity: 69% Atmospheric pressure: 1019mmHg

Channel	Frequency (MHz)	6dB Bandwidth (MHz)
01	2412	11.1
06	2437	11.1
11	2462	11.0


(2) Modulation Standard: IEEE 802.11g(6Mbps)

Test Date: Feb. 23, 2005 Temperature: 24 Humidity: 69% Atmospheric pressure: 1019mmHg


Channel	Frequency (MHz)	6dB Bandwidth (MHz)
01	2412	16.4
06	2437	16.4
11	2462	16.5

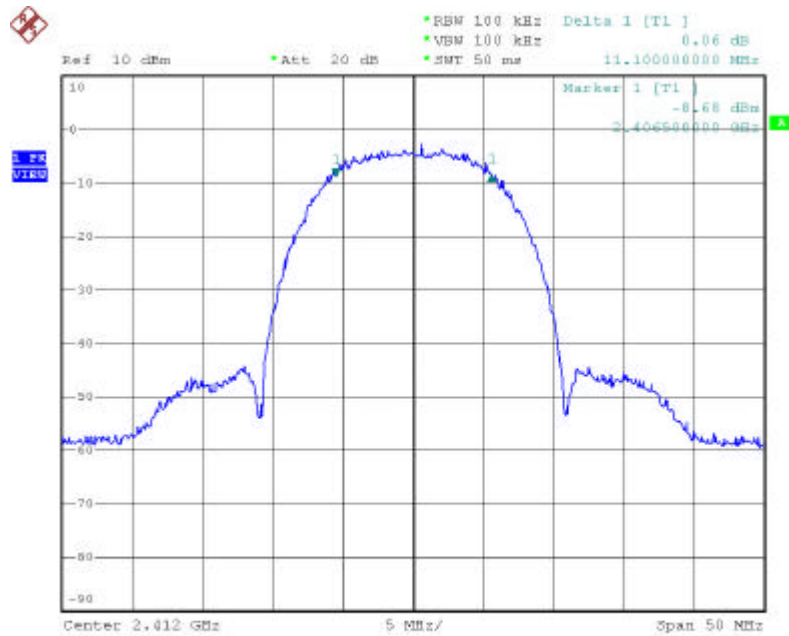


Date: 23.FEB.2005 17:21:44

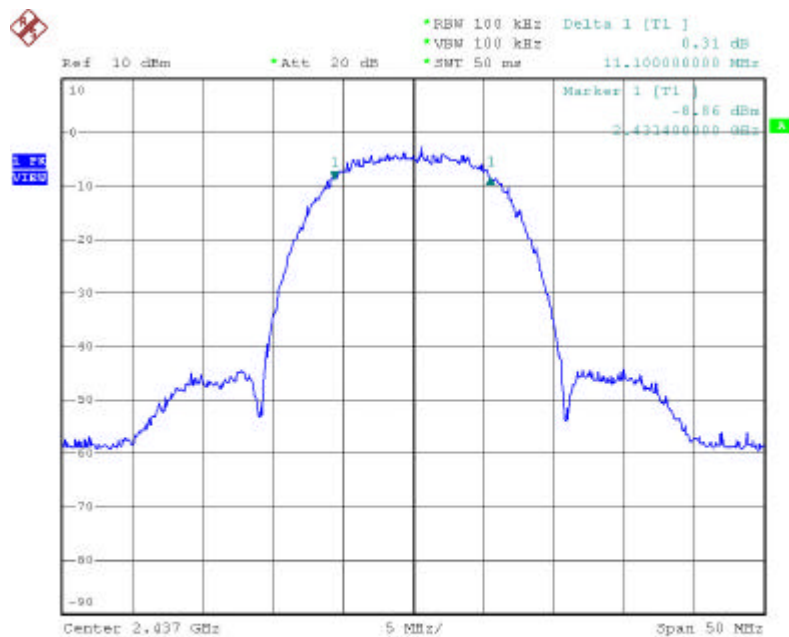


Date: 23.FEB.2005 17:24:37

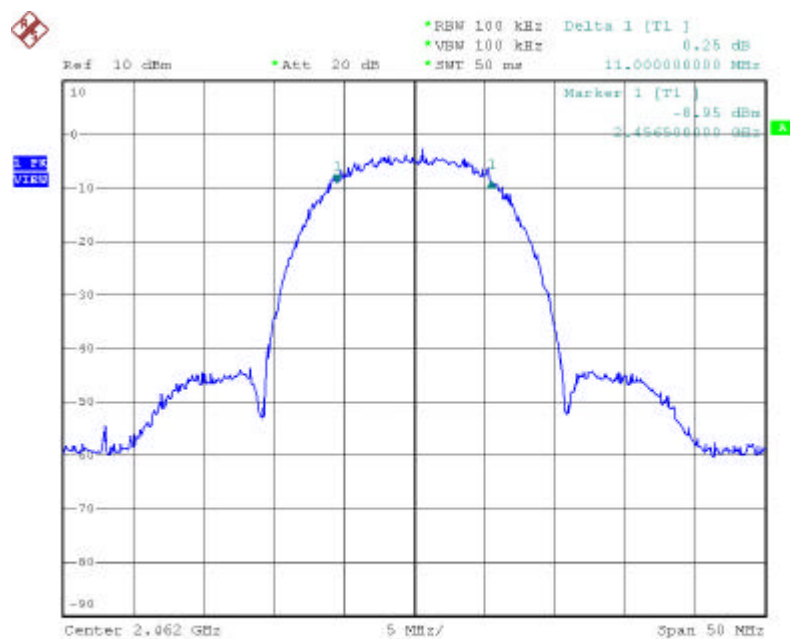


Date: 23.FEB.2005 17:26:23

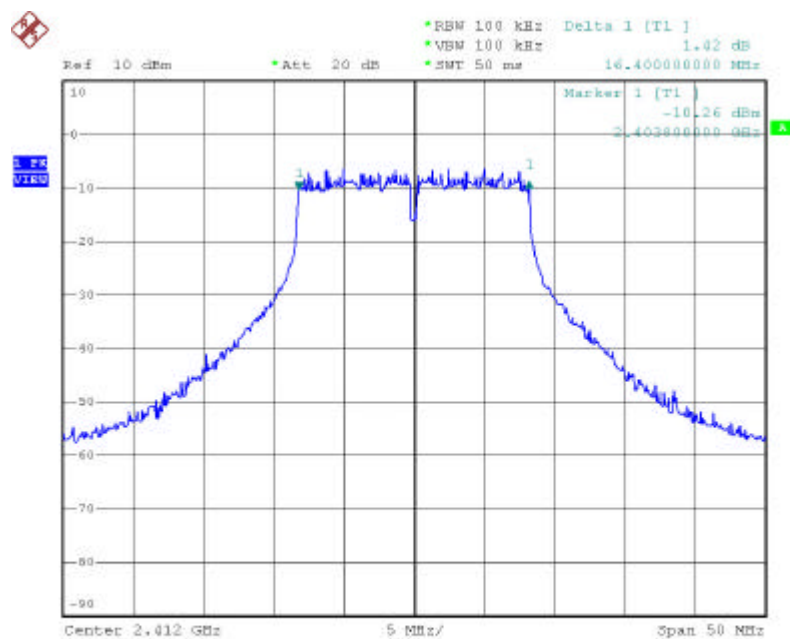

Date: 23.FEB.2005 17:29:24

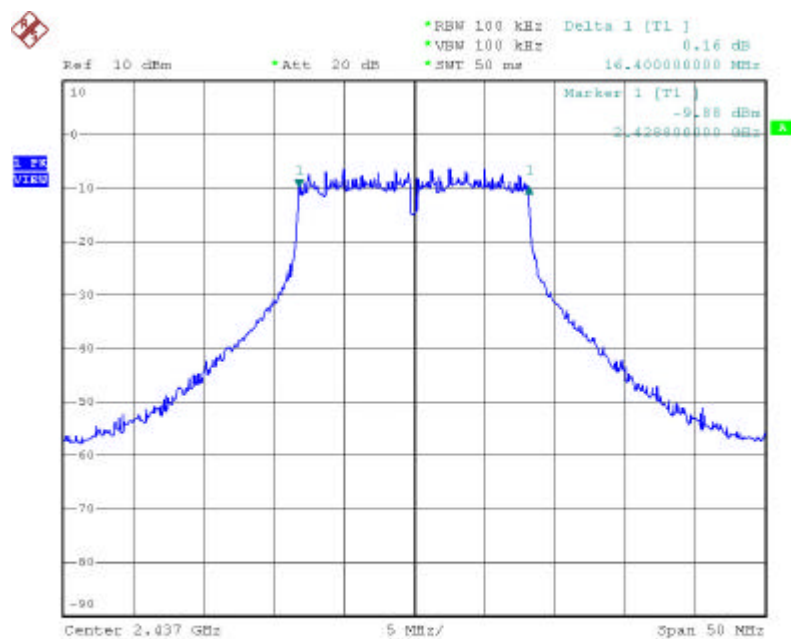

Date: 23.FEB.2005 17:31:56

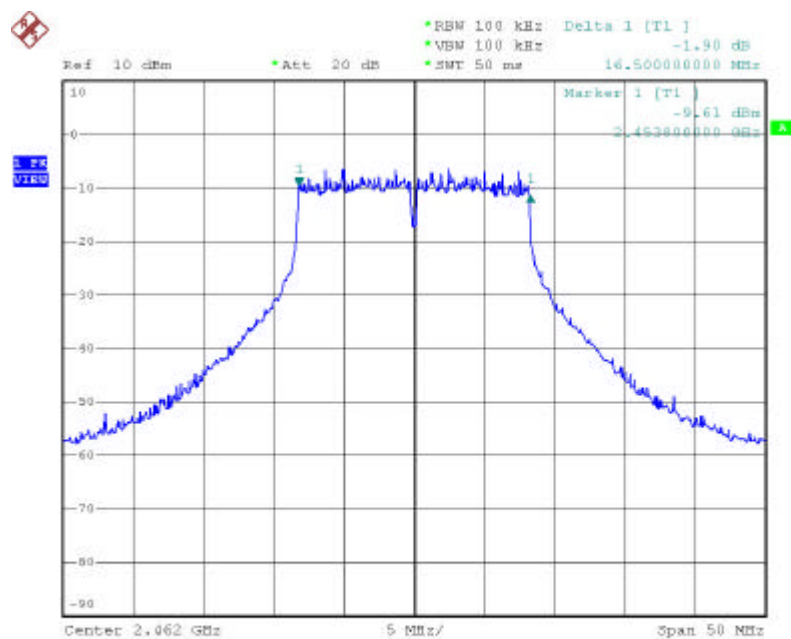

Date: 23.FEB.2005 17:36:29

4.5. Peak Output Power Measurement Data

(1) Modulation Standard: IEEE 802.11b(11Mbps)

Test Date: Feb. 23, 2005 Temperature: 24 Humidity: 69% Atmospheric pressure: 1019mmHg


Channel	Frequency (MHz)	Peak Power Output (dBm)	Peak Power Output (mW)
01	2412	12.88	19.409
06	2437	12.75	18.836
11	2462	12.69	18.578

(2) Modulation Standard: IEEE 802.11g(6Mbps)


Test Date: Feb. 23, 2005 Temperature: 24 Humidity: 69% Atmospheric pressure: 1019mmHg

Channel	Frequency (MHz)	Peak Power Output (dBm)	Peak Power Output (mW)
01	2412	12.97	19.815
06	2437	12.94	19.679
11	2462	12.79	19.011


Note: Conducted Power = Reading Value + Cable Loss

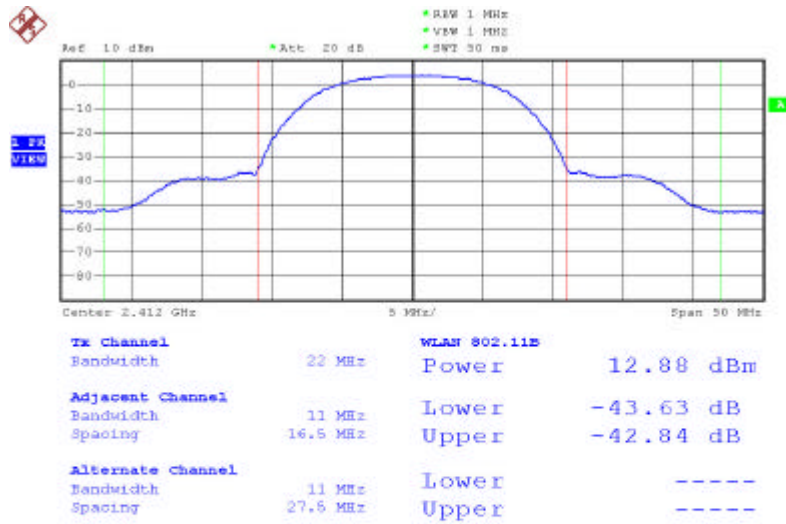


Date: 23.FEB.2005 17:17:28

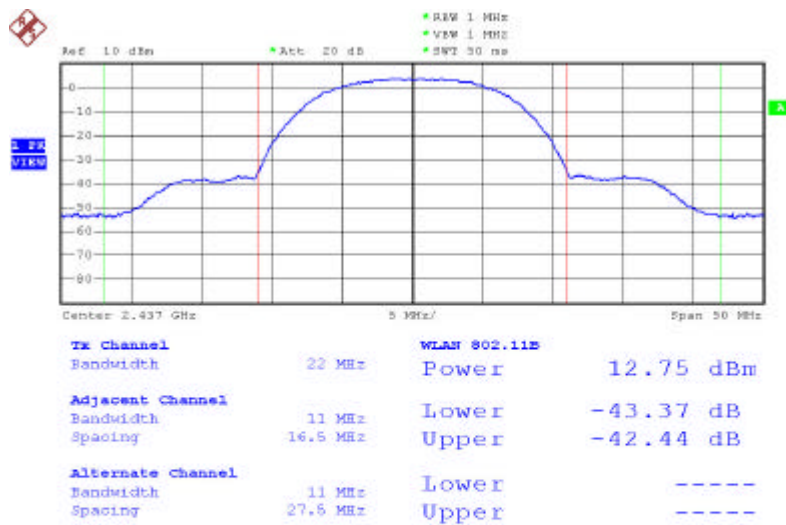


Date: 23.FEB.2005 17:18:37

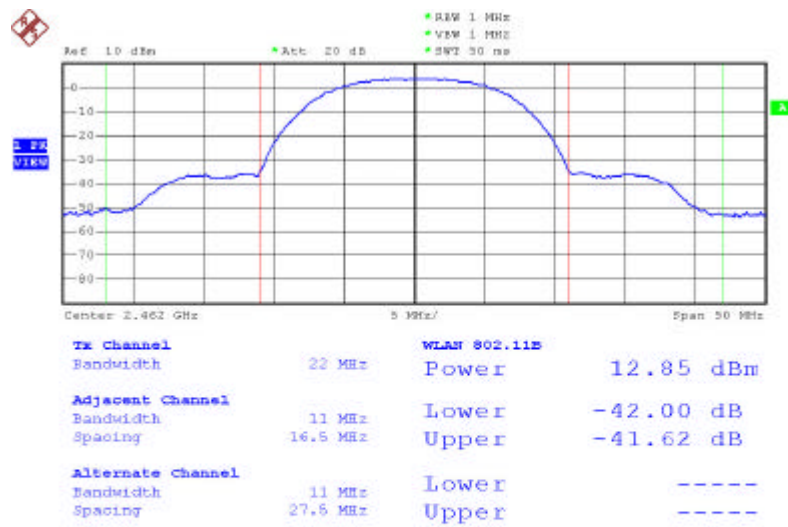


Date: 23.FEB.2005 17:00:09

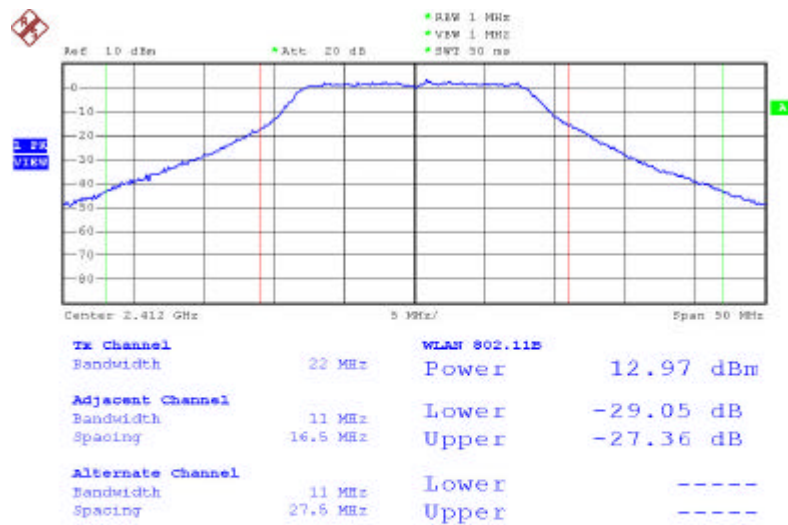

Date: 23.FEB.2005 17:06:50

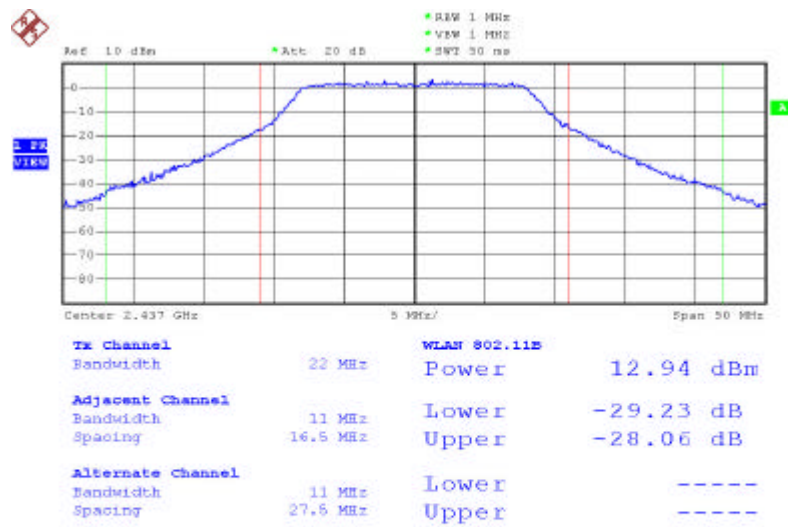

Date: 23.FEB.2005 17:34:41

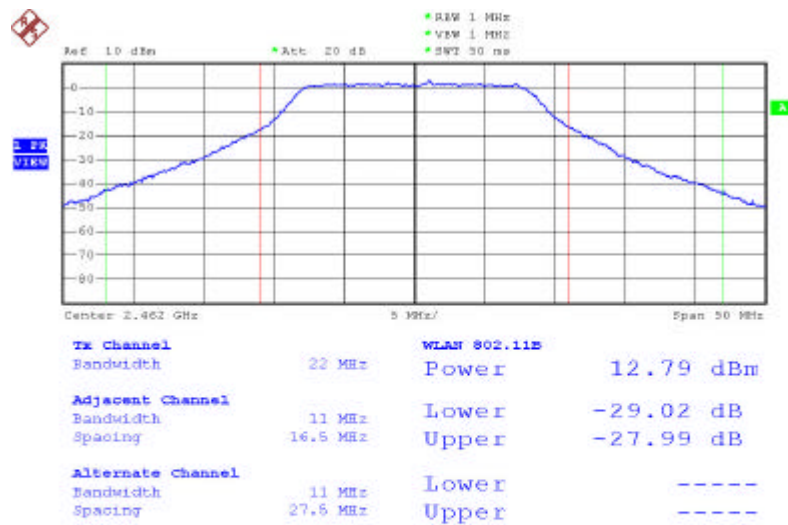

Date: 23.FEB.2005 17:13:22

4.6. Band Edges Measurement Data

(1) Modulation Standard: IEEE 802.11b(11Mbps)


Test Date: Feb. 23, 2005 Temperature: 24 Humidity: 69% Atmospheric pressure: 1019mmHg

Channel	Frequency	maximum value in frequency (MHz)	maximum value is (dBm)
01	2412	2399.6	-44.46
11	2462	2520.1	-53.97


(2) Modulation Standard: IEEE 802.11g(6Mbps)

Test Date: Feb. 23, 2005 Temperature: 24 Humidity: 69% Atmospheric pressure: 1019mmHg


Channel	Frequency	maximum value in frequency (MHz)	maximum value is (dBm)
01	2412	2400.0	-36.51
11	2462	2520.1	-53.49

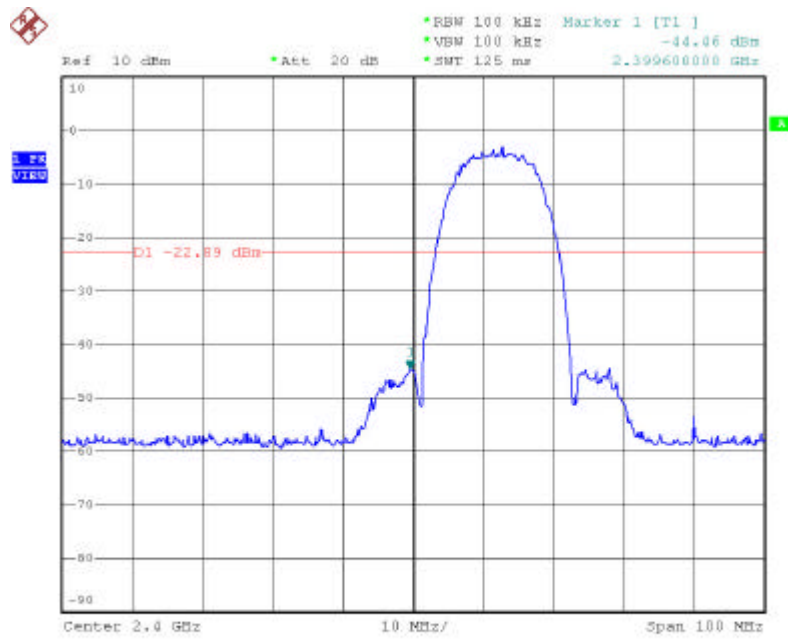


Date: 23.FEB.2005 17:39:21

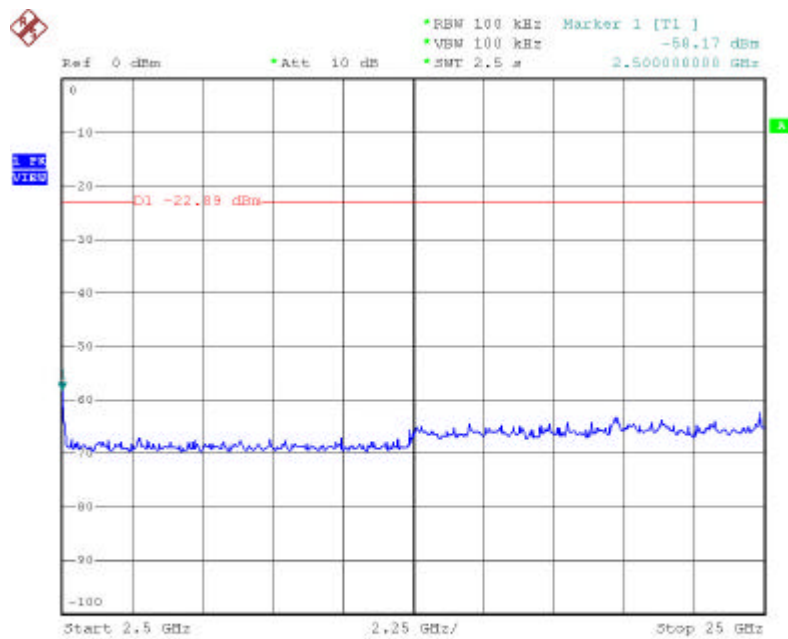


Date: 23.FEB.2005 17:40:25

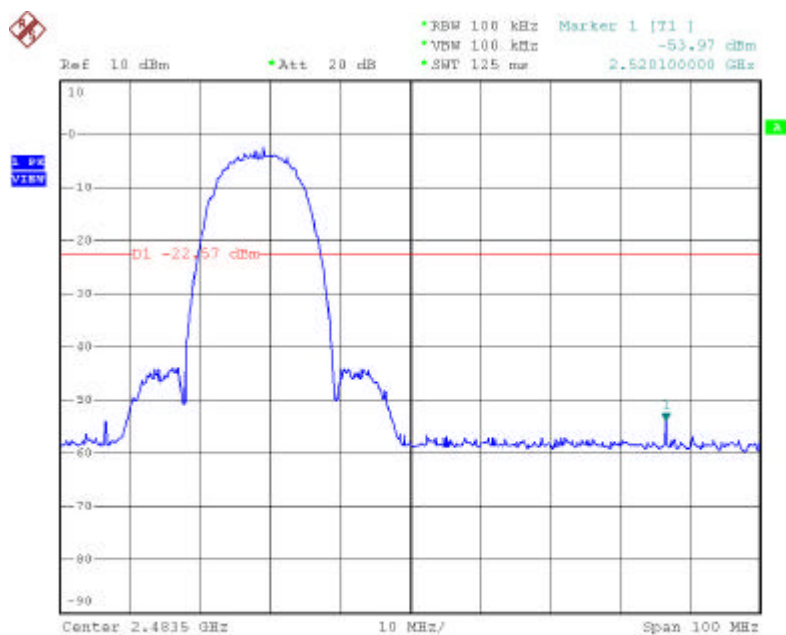


Date: 23.FEB.2005 17:42:21

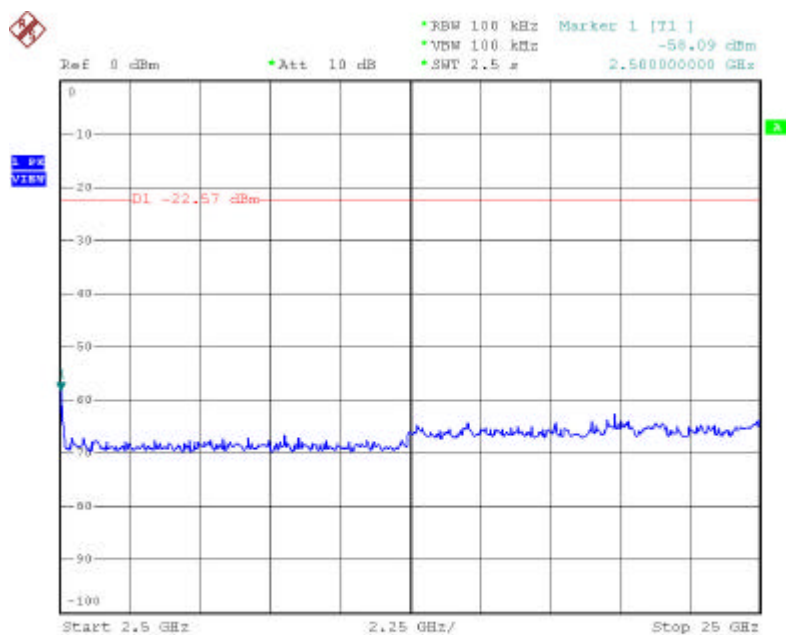


Date: 23.FEB.2005 17:44:00

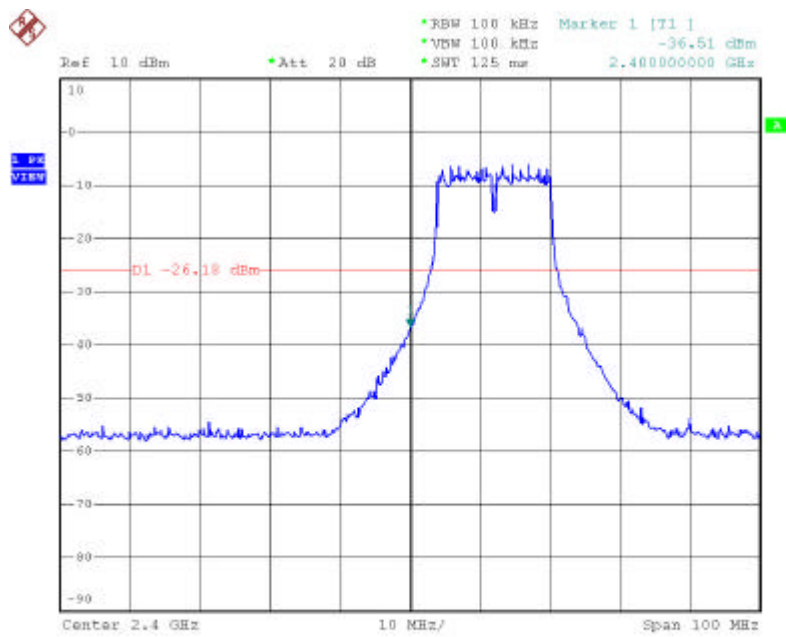


Date: 23.FEB.2005 17:45:32

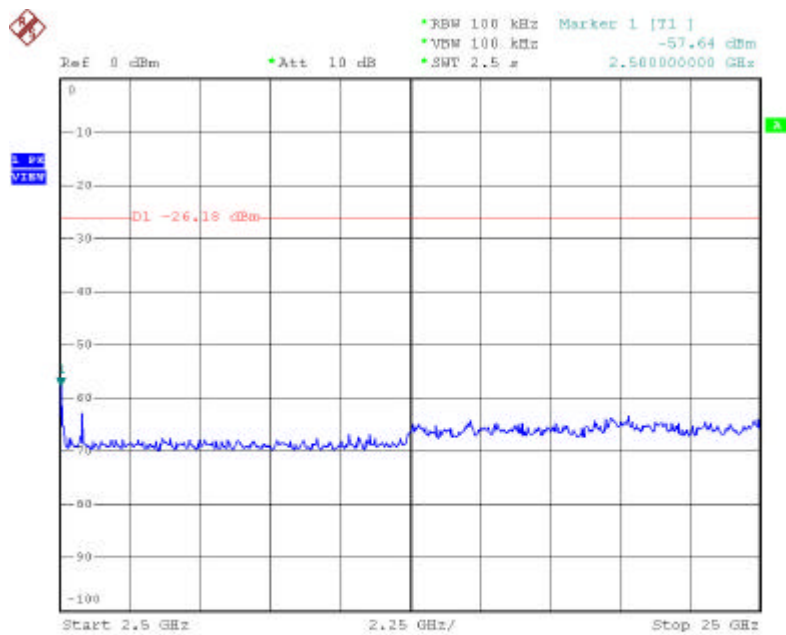

Date: 23.FEB.2005 17:46:29

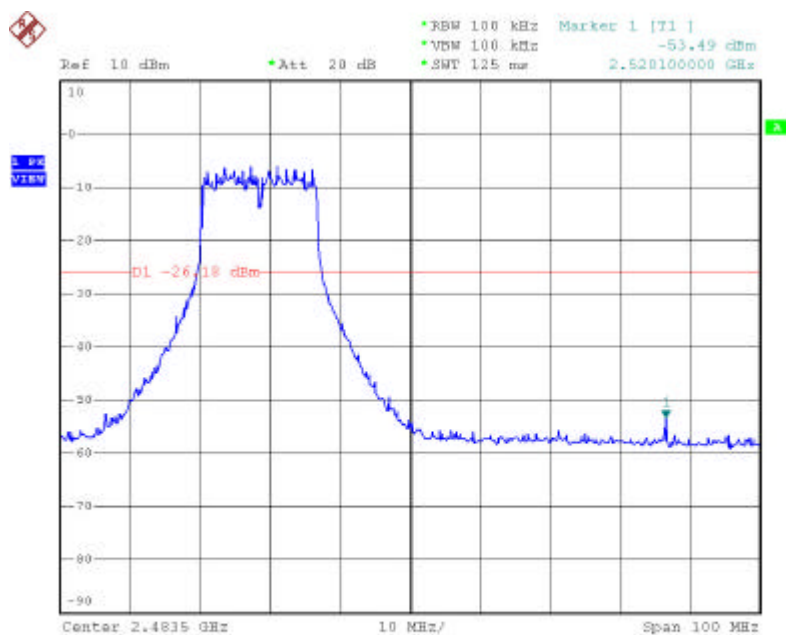

Date: 23.FEB.2005 17:48:03

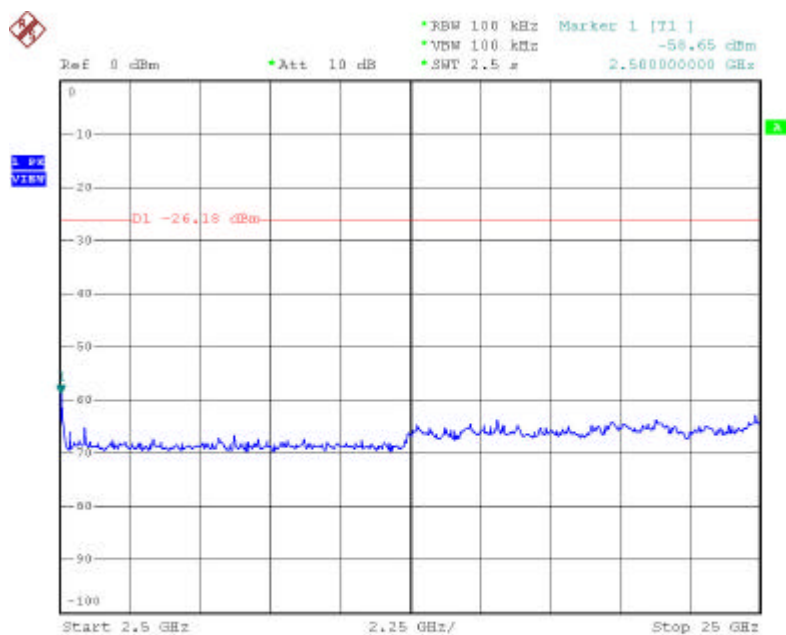

Date: 23.FEB.2005 17:49:10

4.7. Restrict band emission Measurement Data

Modulation Standard: IEEE 802.11b (11Mbps)

Test Date: Mar. 04, 2005 Temperature: 20 Humidity: 59% Atmospheric pressure: 1031mmHg

a) Channel 1

Frequency (MHz)	Ant-Pol H/V	Meter Reading	Corrected Factor	Result (dBuV/m)	Remark	Limit@3m (dBuV/m)		Margin (dB)	Table (Deg.)	Ant High (m)
						Peak	Ave.			
2320.2	H	51.92	1.01	52.93	Peak	74	54	-21.07	197	1.0
2319.9	H	44.61	1.01	45.62	Ave.	74	54	-8.38	197	1.0
2302.2	V	51.92	0.95	52.87	Peak	74	54	-21.13	197	1.1
2319.9	V	44.61	1.01	45.62	Ave.	74	54	-8.38	197	1.1

b) Channel 11

Frequency (MHz)	Ant-Pol H/V	Meter Reading	Corrected Factor	Result (dBuV/m)	Remark	Limit@3m (dBuV/m)		Margin (dB)	Table (Deg.)	Ant High (m)
						Peak	Ave.			
2496.8	H	47.41	1.62	49.03	Peak	74	54	-24.97	197	1.0
2496.8	H	47.41	1.62	49.03	Ave.	74	54	-4.97	197	1.0
2489.8	V	50.72	1.59	52.31	Peak	74	54	-21.69	197	1.1
2489.8	V	50.72	1.59	52.31	Ave.	74	54	-1.69	197	1.1

Modulation Standard: IEEE 802.11g (6Mbps)

Test Date: Feb. 17, 2005 Temperature: 23 Humidity: 69% Atmospheric pressure: 1028mmHg

a) Channel 1

Frequency (MHz)	Ant-Pol H/V	Meter Reading	Corrected Factor	Result (dBuV/m)	Remark	Limit@3m (dBuV/m)		Margin (dB)	Table (Deg.)	Ant High (m)
						Peak	Ave.			
2389.9	H	49.83	1.25	51.08	Peak	74	54	-22.92	197	1.0
2389.9	H	49.83	1.25	51.08	Ave.	74	54	-2.92	197	1.0
2389.9	V	61.08	1.25	62.33	Peak	74	54	-11.67	197	1.1
2319.9	V	46.93	1.01	47.94	Ave.	74	54	-6.06	197	1.1

b) Channel 11

Frequency (MHz)	Ant-Pol H/V	Meter Reading	Corrected Factor	Result (dBuV/m)	Remark	Limit@3m (dBuV/m)		Margin (dB)	Table (Deg.)	Ant High (m)
						Peak	Ave.			
2489.9	H	47.55	1.60	49.15	Peak	74	54	-24.85	197	1.0
2489.9	H	47.55	1.60	49.15	Ave.	74	54	-4.85	197	1.0
2483.5	V	61.39	1.57	62.96	Peak	74	54	-11.04	197	1.1
2483.5	V	41.25	1.57	42.82	Ave.	74	54	-11.18	197	1.1

Notes:

1. Result = Meter Reading + Factor
2. Factor = Antenna Factor + Cable Loss – Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.

4.8. Power Spectral Density Measurement Data

(1) Modulation Standard: IEEE 802.11b(11Mbps)


Test Date: Feb. 24, 2005 Temperature: 24 Humidity: 67% Atmospheric pressure: 1016mmHg

Channel	Frequency	Maximum Power Density of 3 kHz Bandwidth (dBm)
01	2412	-14.43
06	2437	-14.77
11	2462	-14.95


(2) Modulation Standard: IEEE 802.11g(6Mbps)

Test Date: Feb. 24, 2005 Temperature: 24 Humidity: 67% Atmospheric pressure: 1016mmHg


Channel	Frequency	Maximum Power Density of 3 kHz Bandwidth (dBm)
01	2412	-20.08
06	2437	-20.15
11	2462	-20.12

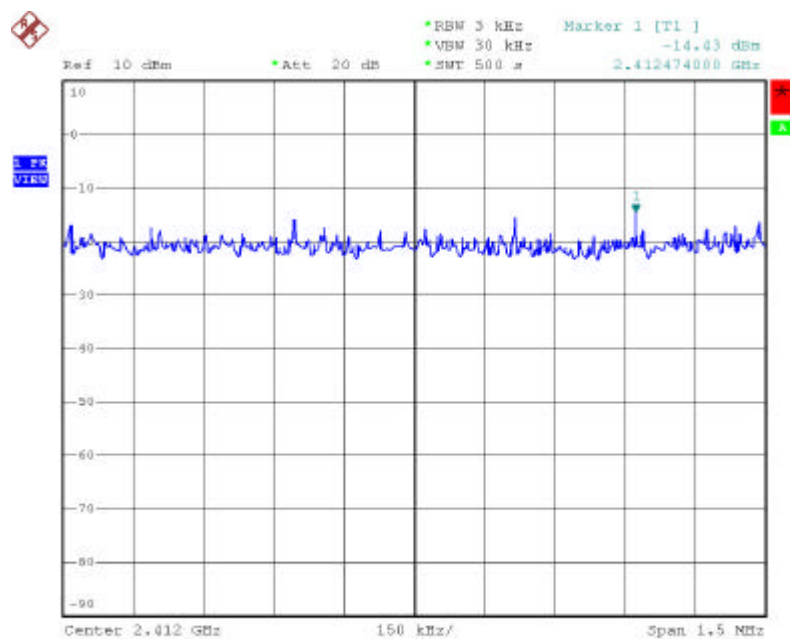


Date: 24.FEB.2005 11:13:48

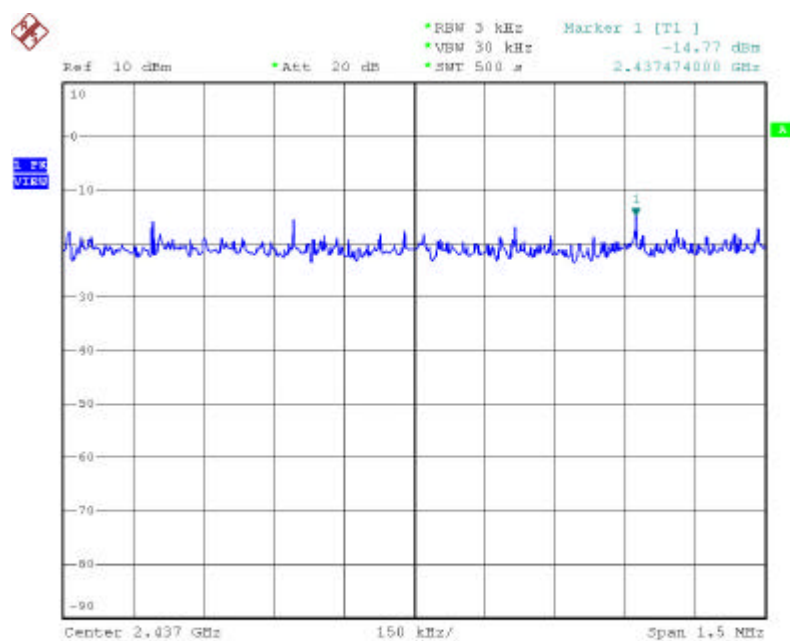


Date: 24.FEB.2005 11:01:11

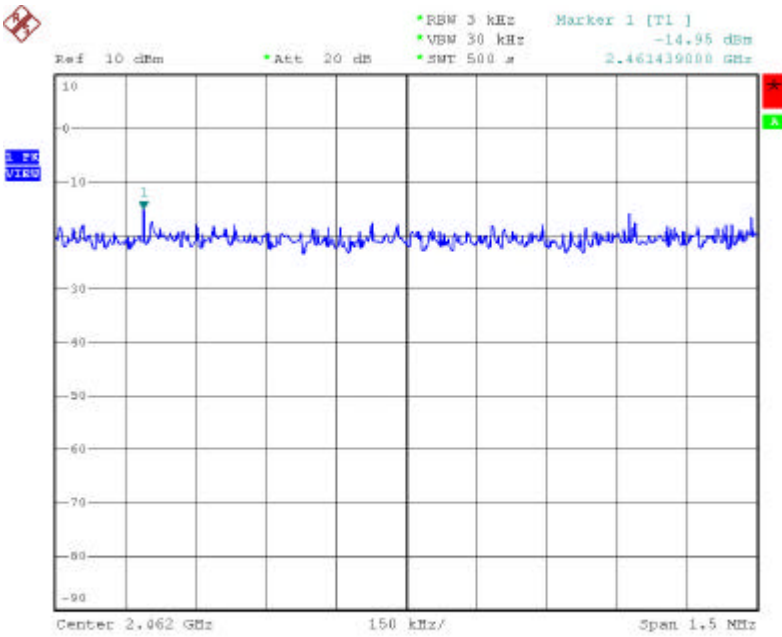


Date: 24.FEB.2005 11:25:29

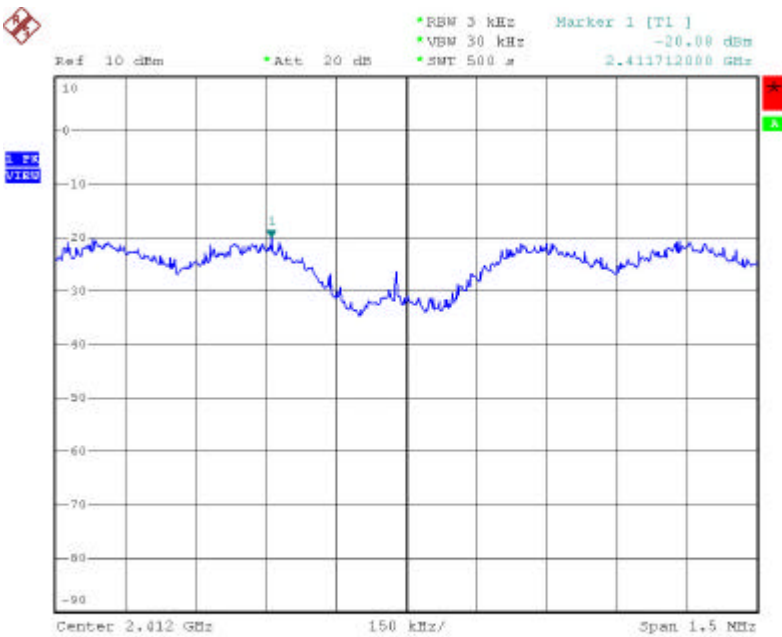

Date: 24.FEB.2005 11:35:33

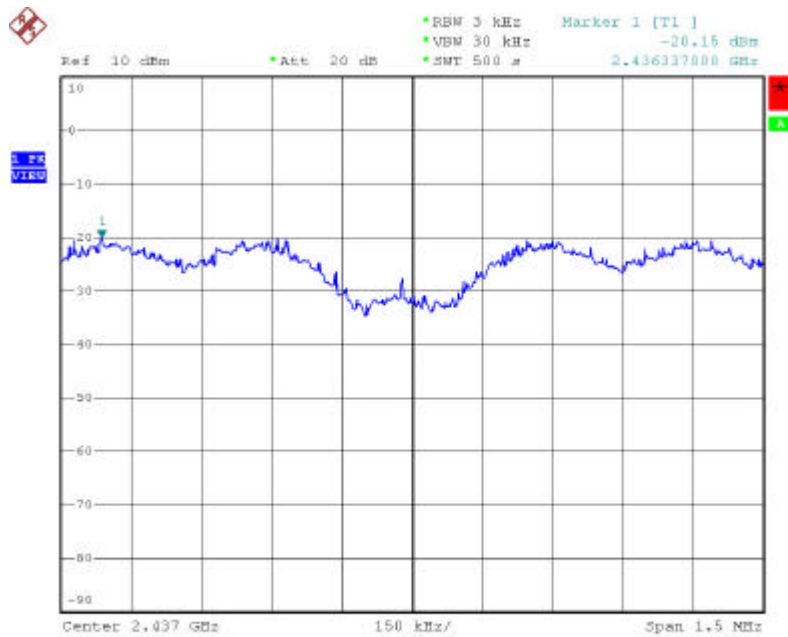

Date: 24.FEB.2005 11:50:25

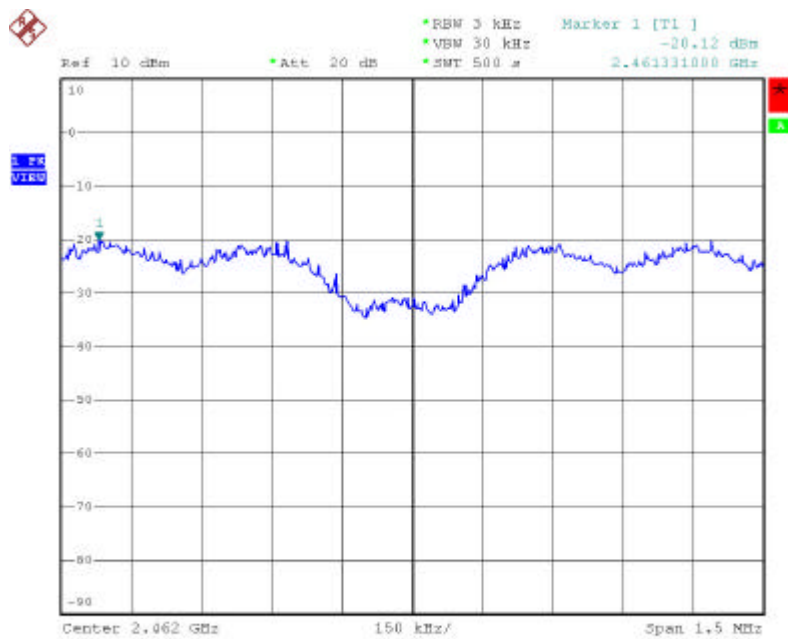

Date: 24.FEB.2005 12:08:32

5. List of Measuring Equipment Used

No	Instrument/Ancillary	Type	Manufacturer	Serial No.	Valid Date.
1	BILOG ANTENNA	CBL6112B	SCHAFFNER	2840	2005/04/08
2	PREAMPLIFIER	RFP4002	SCHAFFNER	010	2005/11/03
3	RECEIVER	SCR3501	SCHAFFNER	437	2005/11/03
4	SIGNAL GENERATOR	8648B	HP	3629U00612	2006/02/08
5	AMPLIFIER	8447D	AGILENT	2443A04650	2006/02/14
6	AMPLIFIER	8447D	AGILENT	2944A10531	2005/06/30
7	SERIES POWER METER	E4416A	AGILENT	GB41292146	2005/10/11
8	POWER SENSOR	E9327A	AGILENT	US40441392	2005/10/11
9	DIPOLE ANTENNA	AD-100	COM-POWER	721011	2005/12/02
10	DIPOLE ANTENNA	AD-100	COM-POWER	721010	2005/12/02
11	SPECTRUM ANALYZER	FSP40	R&S	100047	2005/12/28
12	PREAMPLIFIER	8449B	AGILENT	3008A01954	2005/12/27
13	HORN ANTENNA	3115	EMCO	31601	2006/02/21
14	HORN ANTENNA	3115	EMCO	31589	2006/01/31
15	HORN ANTENNA	3116	EMCO	31970	2006/01/30
16	HORN ANTENNA	3116	EMCO	31974	2006/02/21
17	EMI RECEIVER	8546A	HP	3807A00454	2006/02/25
18	RF FILTER SECTION	85460A	HP	3704A00386	2006/02/25
19	SIGNAL GENERATOR	83640A	HP	2927A00107	2006/03/16
20	ATTENUATOR	8491B	AGILENT	50703	2006/03/07
21	ATTENUATOR	8491B	AGILENT	50705	2006/03/07
22	TEMPERATURE CHAMBER	TMJ-9712	T MACHINE	T-12-040111	2006/02/21
23	HIGH PASS FILTER	84300-80038	HP	002	N/A
24	HIGH PASS FILTER	84300-80038	HP	006	N/A
25	DC Power Supply	GPD-3030	GM	7020936	N/A
26	AC POWER CONVERTER	AFC-11005	APC	F103120008	N/A