



FCC Radio Test Report

FCC ID: KA2CHS162A1

This report concerns: Original Grant

 Project No.
 : 2009H044

 Equipment
 : DCH-S162 A1

Brand Name : D-Link

Test Model : DCH-S162 A1

Series Model : N/A

Applicant: D-Link Corporation

Address : 17595 Mt. Herrmann, Fountain Valley, California United State 92708

Manufacturer : D-Link Corporation

Address : 17595 Mt. Herrmann, Fountain Valley, California United State 92708

Factory : LEEDARSON LIGHTING CO., LTD.

Address : Xingtai Industrial Zone, Economic Development Zone,

Changtai County, Zhangzhou City, Fujian Province, P.R.China

Date of Receipt : Oct. 23, 2020

Date of Test : Oct. 23, 2020~Dec. 02, 2020

Issued Date : Dec. 14, 2020

Report Version : R00

Test Sample : Engineering Sample No.: SH2020111669/SH2020111670

Standard(s) : FCC Part15, Subpart C (15.247)

ANSI C63.10-2013

KDB 558074 D01 15.247 Meas Guidance v05r02

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

Prepared by: Maker Qi

Maker Q

Approved by: Ryan Wang

IAC-MRA ACCREDITED

Certificate # 5123.03

Add: No. 29, Jintang Road, Tangzhen Industry Park, Pudong New Area, Shanghai 201210, China

TEL: +86-021-61765666 Web: www.newbtl.com



Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective. Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.



Table of Contents	Page
REPORT ISSUED HISTORY	5
1 . SUMMARY OF TEST RESULTS	6
1.1 TEST FACILITY	7
1.2 MEASUREMENT UNCERTAINTY	7
1.3 TEST ENVIRONMENT CONDITIONS	7
2 . GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF EUT	8
2.2 DESCRIPTION OF TEST MODES	10
2.3 PARAMETERS OF TEST SOFTWARE	10
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
2.5 SUPPORT UNITS	11
3 . AC POWER LINE CONDUCTED EMISSIONS TEST	12
3.1 LIMIT	12
3.2 TEST PROCEDURE	12
3.3 DEVIATION FROM TEST STANDARD	12
3.4 TEST SETUP	13
3.5 EUT OPERATING CONDITIONS	13
3.6 TEST RESULTS	13
4 . RADIATED EMISSION TEST	14
4.1 LIMIT	14
4.2 TEST PROCEDURE	15
4.3 DEVIATION FROM TEST STANDARD	15
4.4 TEST SETUP	16
4.5 EUT OPERATING CONDITIONS	18
4.6 TEST RESULT - 9 KHZ TO 30 MHZ	18
4.7 TEST RESULT - 30 MHZ TO 1000 MHZ	18
4.8 TEST RESULT - ABOVE 1000 MHZ	18
5 . BANDWIDTH TEST	19
5.1 LIMIT	19
5.2 TEST PROCEDURE	19
5.3 DEVIATION FROM STANDARD	19
5.4 TEST SETUP	19
5.5 EUT OPERATION CONDITIONS	19



Table of Contents	Page
5.6 TEST RESULTS	19
6 . MAXIMUM OUTPUT POWER	20
6.1 LIMIT	20
6.2 TEST PROCEDURE	20
6.3 DEVIATION FROM STANDARD	20
6.4 TEST SETUP	20
6.5 EUT OPERATION CONDITIONS	20
6.6 TEST RESULTS	20
7. CONDUCTED SPURIOUS EMISSION	21
7.1 LIMIT	21
7.2 TEST PROCEDURE	21
7.3 DEVIATION FROM STANDARD	21
7.4 TEST SETUP	21
7.5 EUT OPERATION CONDITIONS	21
7.6 TEST RESULTS	21
8 . POWER SPECTRAL DENSITY TEST	22
8.1 LIMIT	22
8.2 TEST PROCEDURE	22
8.3 DEVIATION FROM STANDARD	22
8.4 TEST SETUP	22
8.5 EUT OPERATION CONDITIONS	22
8.6 TEST RESULTS	22
9. MEASUREMENT INSTRUMENTS LIST	23
10 . EUT TEST PHOTO	25
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	28
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	31
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	32
APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ	35
APPENDIX E - BANDWIDTH	48
APPENDIX F - MAXIMUM OUTPUT POWER & E.I.R.P.	50
APPENDIX G - CONDUCTED SPURIOUS EMISSION	52
APPENDIX H - POWER SPECTRAL DENSITY	54



REPORT ISSUED HISTORY

Report Version	Description	Issued Date
R00	Original Issue.	Dec. 14, 2020



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part15, Subpart C (15.247)				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	PASS	
15.247(d) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	
15.247(a)(2)	Bandwidth	APPENDIX E	PASS	
15.247(b)(3)	Maximum Output Power	APPENDIX F	PASS	
15.247(d)	Conducted Spurious Emission	APPENDIX G	PASS	
15.247(e)	Power Spectral Density	APPENDIX H	PASS	
15.203	Antenna Requirement		PASS	

Note:

- (1) "N/A" denotes test is not applicable to this device.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.



1.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No. 29, Jintang Road, Tangzhen Industry Park, Pudong New Area, Shanghai 201210, China

BTL's Test Firm Registration Number for FCC: 476765

BTL's Designation Number for FCC: CN1241

1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

A. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
		9 KHz~30 MHz	V	3.79
		9 KHz~30 MHz	Η	3.57
		30 MHz~200 MHz	V	4.04
		30 MHz~200 MHz	Ι	3.76
SH-CB01	CISPR	200 MHz~1,000 MHz	V	4.24
SH-CBUT		200 MHz~1,000 MHz	Ι	3.84
		1 GHz~18 GHz	V	4.46
		1 GHz~18 GHz	Ι	4.40
		18 GHz~40 GHz	V	3.95
		18 GHz~40 GHz	Ι	3.95

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

T ()(T (1.1 1.19	T (\ / - (Tortonin
Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	25°C	54%	AC 120V/60Hz	Joven Xiong
Radiated Emissions-9K-30MHz	24°C	58%	AC 120V/60Hz	Forest Li
Radiated Emissions-30 MHz to 1GHz	24°C	58%	AC 120V/60Hz	Forest Li
Radiated Emissions-Above 1000 MHz	24°C	58%	AC 120V/60Hz	Forest Li
Bandwidth	23°C	62%	AC 120V/60Hz	Danny Dang
Maximum Output Power & e.i.r.p.	23°C	62%	AC 120V/60Hz	Danny Dang
Conducted Spurious Emission	23°C	62%	AC 120V/60Hz	Danny Dang
Power Spectral Density	23°C	62%	AC 120V/60Hz	Danny Dang



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	DCH-S162 A1
Brand Name	D-Link
Test Model	DCH-S162 A1
Series Model	N/A
Model Difference(s)	N/A
Software Version	V1.00.07
Hardware Version	V2.0
Power Source	AC Power supplied.
Power Rating	AC100~240V 50/60Hz
Operation Frequency	2402 MHz ~ 2480 MHz
Modulation Technology	GFSK
Bit Rate of Transmitter	1Mbps
Max. Output Power	4.74 dBm (0.0030 W) For 1Mbps

Note

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.



2. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	20	2442
01	2404	21	2444
02	2406	22	2446
03	2408	23	2448
04	2410	24	2450
05	2412	25	2452
06	2414	26	2454
07	2416	27	2456
08	2418	28	2458
09	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

3. Table for Filed Antenna:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	Loop	N/A	1.86

Note:

The antenna gain is provided by the manufacturer.



2.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX Mode NOTE (1)
Mode 2	TX Mode Channel 00 _1Mbps

Following mode(s) as (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test			
Final Test Mode Description			
Mode 2	TX Mode Channel 00 _1Mbps		

Radiated emissions test - Below 1GHz		
Final Test Mode	Description	
Mode 2	TX Mode Channel 00 _1Mbps	

Radiated emissions test - Above 1GHz	
Final Test Mode	Description
Mode 1	TX Mode NOTE (1)

Conducted test	
Final Test Mode	Description
Mode 1	TX Mode NOTE (1)

Note:

- (1) The measurements are performed at the high, middle, low available channels.
- (2) For radiated emission above 1 GHz test, 1GHz~26.5GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.

2.3 PARAMETERS OF TEST SOFTWARE

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of BT LE

Test Software	RTLBTAPP-5.2.2.27		
Frequency (MHz)	2402	2440	2480
Parameters(1Mbps)	default	default	default



2.4 BLOCK DIAGRAM SHOWING TH	2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED		
	EUT		

2.5 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
-	-	-	-	-

Item	Cable Type	Shielded Type	Ferrite Core	Length
-	-	-	-	-



3. AC POWER LINE CONDUCTED EMISSIONS TEST

3.1 LIMIT

Fraguency of Emission (MHz)	Limit (dBμV)		
Frequency of Emission (MHz)	Quasi-peak	Average	
0.15 - 0.5	66 to 56*	56 to 46*	
0.50 - 5.0	56	46	
5.0 - 30.0	60	50	

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.2 TEST PROCEDURE


- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.

3.3 DEVIATION FROM TEST STANDARD

No deviation



3.4 TEST SETUP

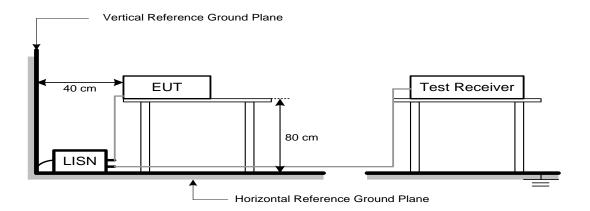

3.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

3.6 TEST RESULTS

Please refer to the APPENDIX A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of <code>Note</code>. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a " * " marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150 kHz to 30 MHz.



4. RADIATED EMISSION TEST

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

Frequency	Field Strength	Measurement Distance
(MHz)	(microvolts/meter)	(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	(dBuV/m at 3 m)	
Frequency (Wiriz)	Peak	Average
Above 1000	74	54

Note:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following: Measurement Value = Reading Level + Correct Factor Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use) Margin Level = Measurement Value - Limit Value



Spectrum Parameter	Setting	
Attenuation	Auto	
Start Frequency	1000 MHz	
Stop Frequency	10th carrier harmonic	
RBW / VBW	RBW 1 MHz VBW 3 MHz peak detector for Pk value	
(Emission in restricted band)	RMS detector for AV value	

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector

4.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1 GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item -EUT Test Photos.


4.3 DEVIATION FROM TEST STANDARD

No deviation




4.4 TEST SETUP


9 kHz-30 MHz

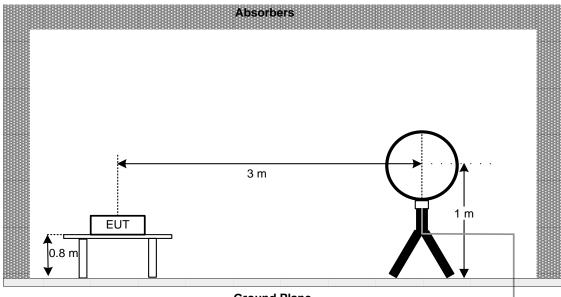

Ground Plane




30 MHz to 1 GHz

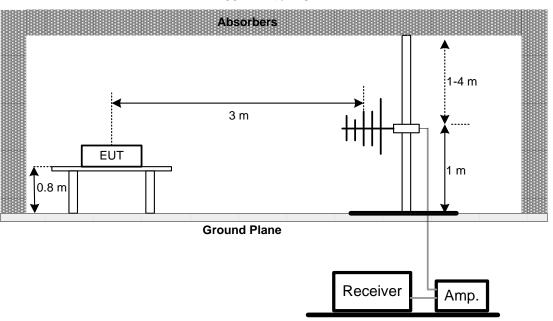



Above 1 GHz

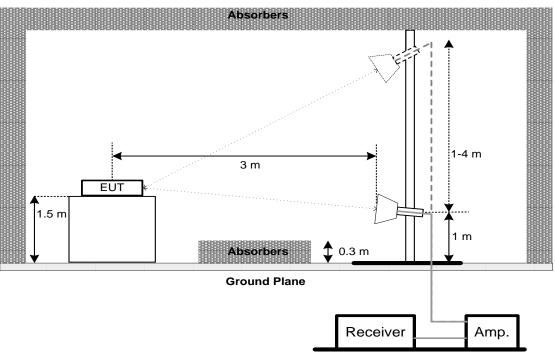



4.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULT - 9 kHz TO 30 MHz

Please refer to the APPENDIX B

Remark:

- (1) Distance extrapolation factor = 40 log (specific distance / test distance) (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.7 TEST RESULT - 30 MHz TO 1000 MHz

Please refer to the APPENDIX C.

4.8 TEST RESULT - ABOVE 1000 MHz

Please refer to the APPENDIX D.

Remark:

(1) No limit: This is fundamental signal, the judgment is not applicable. For fundamental signal judgment was referred to Peak output test.



5. BANDWIDTH TEST

5.1 LIMIT

· · · - · · · · · · · · · · · · · · · · · · ·				
FCC Part15, Subpart C (15.247)				
Section Test Item Limit				
15.247(a)(2)	Bandwidth	>= 500 kHz (6 dB bandwidth)		

5.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting: RBW= 100 kHz, VBW=300 kHz, Sweep time = 2.5 ms.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULTS

Please refer to the APPENDIX E.



6. MAXIMUM OUTPUT POWER

6.1 LIMIT

FCC Part15, Subpart C (15.247)				
Section Test Item Limit				
15.247(b)(3) Maximum Output Power 1 watt or 30 dBm				


6.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. The maximum conducted output power was performed in accordance with method 11.9.1.1 (for peak power) or 11.9.2.2 (for AVG power) of ANSI C63.10-2013.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

6.6 TEST RESULTS

Please refer to the APPENDIX F.



7. CONDUCTED SPURIOUS EMISSION

7.1 LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required.

7.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting: RBW= 100 kHz, VBW=300 kHz, Sweep time = 10 ms.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

EUT	SPECTRUM
	ANALYZER

7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

7.6 TEST RESULTS

Please refer to the APPENDIX G.



8. POWER SPECTRAL DENSITY TEST

8.1 LIMIT

FCC Part15, Subpart C (15.247)				
Section Test Item Limit				
15.247(e)	Power Spectral Density	8 dBm (in any 3 kHz)		

8.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting: RBW=3 kHz, VBW=10 kHz, Sweep time = auto.

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP

EUT	SPECTRUM
	ANALYZER

8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

8.6 TEST RESULTS

Please refer to the APPENDIX H.



9. MEASUREMENT INSTRUMENTS LIST

	AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until	
1	Line Impedance Stabilisation Network	Schwarzbeck	NNLK 8121	8121-822	Mar. 21, 2021	
2	TWO-LINE V-NETWORK	R&S	ENV216	101340	Aug. 23, 2021	
3	Test Cable	emci	EMCRG400-BM-N M-10000	170628	Jul. 15, 2021	
4	EMI Test Receiver	R&S	ESCI	100082	Mar. 21, 2021	
5	50Ω Terminator	SHX	TF2-1G-A	17051602	Mar. 21, 2021	
6	50Ω coaxial switch	Anritsu	MP59B	6201750902	Mar. 21, 2021	
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A	

	Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until	
1	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	719	Apr. 02, 2021	
2	Pre-Amplifier	emci	EMC9135	980400	Mar. 21, 2021	
3	MXE EMI Receiver	Keysight	N9038A	MY57150106	Mar. 21, 2021	
4	Test Cable	emci	EMC104-SM-SM-7 000	170330	Apr. 13, 2021	
5	Test Cable	emci	EMC104-SM-SM-1 000	170331	Apr. 13, 2021	
6	Test Cable	emci	EMC104-SM-NM-3 500	170621	Apr. 13, 2021	
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A	



	Radiated Emissions - Above 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until	
1	Double-Ridged Waveguide Horn Antenna	ETS-Lindgren	9120D	00206960	Apr. 02, 2021	
2	Pre-Amplifier	emci	EMC012645SE	980421	May. 11, 2021	
3	EXA Spectrum Analyzer	Keysight	N9010A	MY56480545	Mar. 21, 2021	
4	Test Cable	emci	EMC104-SM-SM-7 000	170330	Apr. 13, 2021	
5	Test Cable	emci	EMC104-SM-SM-1 000	170331	Apr. 13, 2021	
6	Test Cable	emci	EMC104-SM-NM-3 500	170621	Apr. 13, 2021	
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A	
8	MXE EMI Receiver	Keysight	N9038A	MY57150106	May. 06, 2021	
9	Double-Ridged Waveguide Horn Antenna	ETS-Lindgren	3116C	00203919	Jul. 20, 2021	
10	Pre-Amplifier	emci	EMC184045SE	980409	Mar. 21, 2021	
11	EXA Spectrum Analyzer	Keysight	N9010A	MY56480579	Mar. 21, 2021	
12	Test Cable	emci	EMC102-KM-KM-8 00	170654	Apr. 13, 2021	
13	Test Cable	emci	Super Reliable-40G-SS11- 7000	W0030860001	Apr. 13, 2021	
14	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A	

	Bandwidth					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until	
1	Spectrum Analyzer	R&S	FSP40	100626	May. 06, 2021	

	Maximum Output Power					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until	
1	Peak Power Analyze	Keysight	8990B	MY51000507	Mar. 21, 2021	
2	Wideband Power Sensor	Keysight	N9123A	MY58310003	Mar. 21, 2021	

	Antenna Conducted Spurious Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until	
1	Spectrum Analyzer	R&S	FSP40	100626	May. 06, 2021	

	Power Spectral Density					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until	
1	Spectrum Analyzer	R&S	FSP40	100626	May. 06, 2021	

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.



10. EUT TEST PHOTO

Conducted Emissions Test Photos









Radiated Emissions Test Photos

30 MHz to 1000 MHz

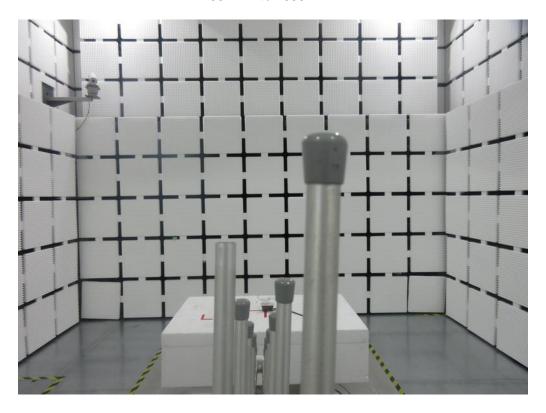

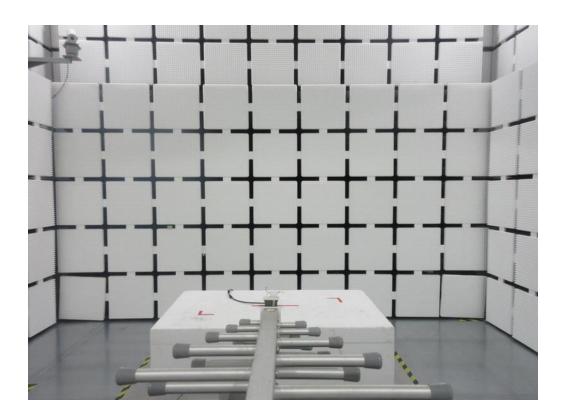




Radiated Emissions Test Photos

Above 1 GHz



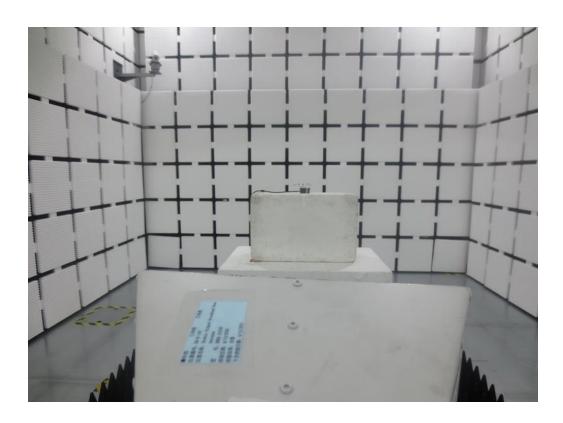




APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS



Test Mode: TX Mode Channel 00 _1Mbps

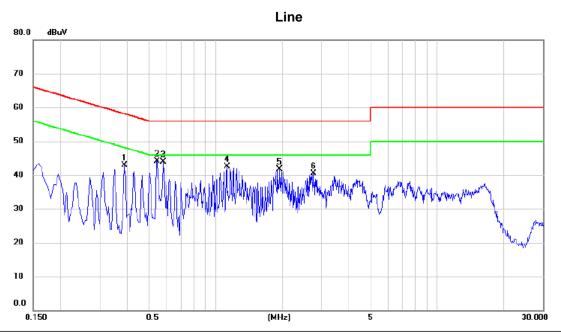


No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.3885	33.11	9.78	42.89	58.10	-15.21	peak	
2 *	0.5460	34.37	9.80	44.17	56.00	-11.83	peak	
3	0.5820	34.13	9.81	43.94	56.00	-12.06	peak	
4	1.1265	32.68	9.85	42.53	56.00	-13.47	peak	
5	1.9410	31.84	9.90	41.74	56.00	-14.26	peak	
6	2.7645	30.53	9.95	40.48	56.00	-15.52	peak	

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value Limit Value.



Test Mode: TX Mode Channel 00 _1Mbps

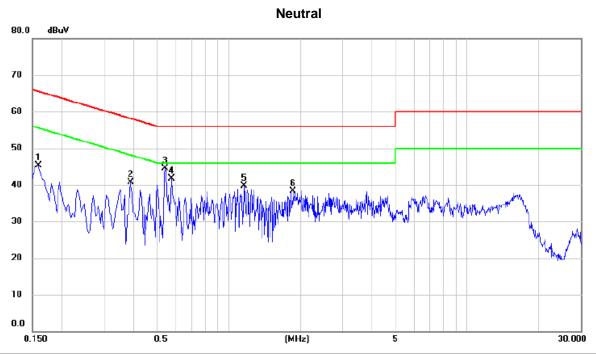

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.1590	35.70	9.69	45.39	65.52	-20.13	peak	
2	0.3885	30.98	9.76	40.74	58.10	-17.36	peak	
3 *	0.5415	34.80	9.78	44.58	56.00	-11.42	peak	
4	0.5775	31.96	9.79	41.75	56.00	-14.25	peak	
5	1.1625	29.94	9.83	39.77	56.00	-16.23	peak	
6	1.8645	28.45	9.87	38.32	56.00	-17.68	peak	

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value Limit Value.



APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ
Note: The measured value have enough margin over 20dB than the limit, therefore they are not reported.




APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ





Vertical

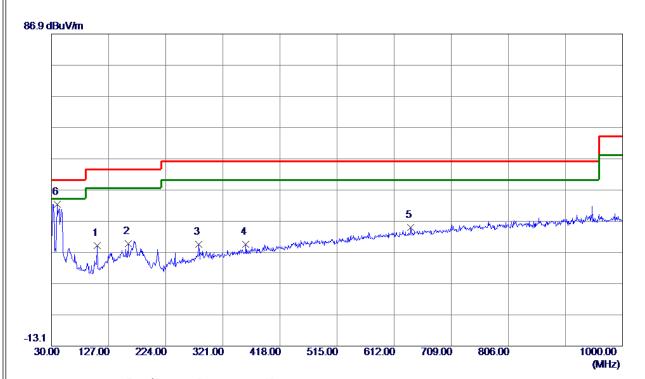

No.	Freq.	Keading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	107.6000	39. 12	-20.06	19.06	43.50	-24.44	Peak	
2	159. 9800	35. 71	-16. 05	19.66	43.50	-23.84	Peak	
3	280. 2600	35. 66	-16. 08	19. 58	46.00	-26. 42	Peak	
4	359. 8000	33. 96	-14. 37	19. 59	46.00	-26.41	Peak	
5	640. 1300	33. 50	-8. 67	24.83	46.00	-21. 17	Peak	
6 *	39. 2150	49.85	-17.49	32. 36	40.00	-7.64	Peak	

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value Limit Value.



Test Mode: TX Mode Channel 00 _1Mbps

Horizontal

86.9 dBuV/m 6 2 3 4 -13.1 30.00 127.00 224.00 321.00 418.00 515.00 612.00 709.00 806.00 1000.00 (MHz)

No.	Freq.	Reading Level	Correct Factor	$_{\tt Measure}^{\tt Measure}$	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	32.9100	49. 21	-18. 28	30. 93	40.00	-9. 07	Peak	
2	48. 4300	39. 36	-16.80	22. 56	40.00	-17.44	Peak	
3	169. 1950	36. 50	-16. 32	20. 18	43.50	-23. 32	Peak	
4	279.7750	33. 29	-16. 10	17. 19	46.00	-28.81	Peak	
5	510. 1500	32. 90	-11. 05	21.85	46.00	-24. 15	Peak	
6	640. 1300	35. 01	-8. 67	26. 34	46.00	-19.66	Peak	


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value Limit Value.



APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ





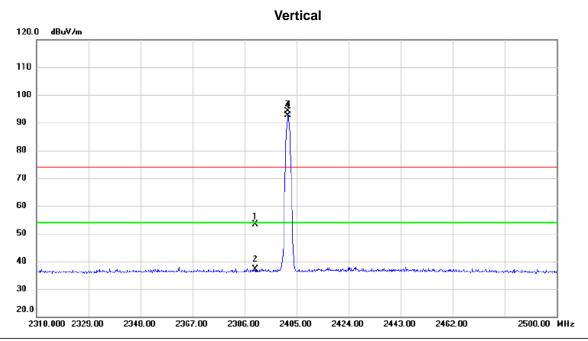

	No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
-			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
Ī	1		2390.000	21.55	31.74	53.29	74.00	-20.71	peak	
Ī	2		2390.000	5.45	31.74	37.19	54.00	-16.81	AVG	
Ī	3	Χ	2401.950	62.47	31.72	94.19	74.00	20.19	peak	
-	4	*	2401.950	60.90	31.72	92.62	54.00	38.62	AVG	


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value Limit Value.





Vertical






]	No.	Freq.	Level	Factor	measure	Limit	Margin		
		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
-	1	4804.0000	49. 91	-10.95	38. 96	74.00	-35.04	Peak	
2	2 *	3025. 9750	65. 87	-15.47	50.40	74.00	-23. 60	Peak	

- (1) Measurement Value = Reading Level + Correct Factor.(2) Margin Level = Measurement Value Limit Value.



Test Mode: TX 2402 MHz _CH00_1Mbps

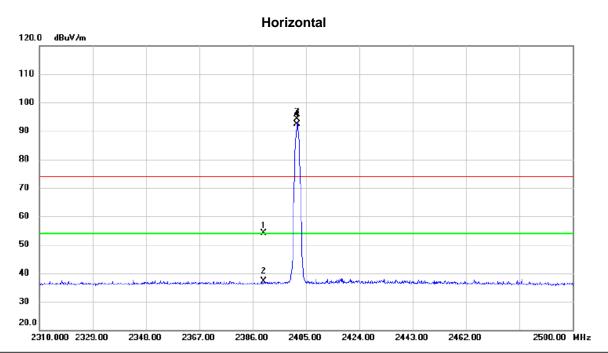

_	No.	Mk	. Freq.	Reading Level		Measure- ment	Limit	Margin		
-			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
-	1		2390.000	22.33	31.74	54.07	74.00	-19.93	peak	
-	2		2390.000	5.35	31.74	37.09	54.00	-16.91	AVG	
	3	X	2401.903	62.46	31.72	94.18	74.00	20.18	peak	
-	4	*	2401.903	60.75	31.72	92.47	54.00	38.47	AVG	


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value Limit Value.

(MHz)



Test Mode: TX 2402 MHz _CH00_1Mbps

Horizontal

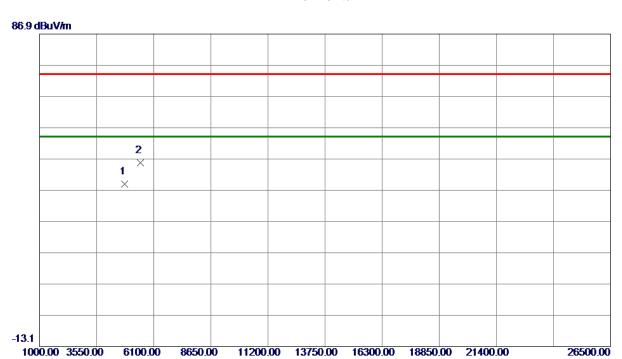


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	4804.0000	49.93	-10.95	38. 98	74.00	-35.02	Peak	
2 *	5494. 3750	55. 35	-9. 61	45. 74	74.00	-28. 26	Peak	

- (1) Measurement Value = Reading Level + Correct Factor.(2) Margin Level = Measurement Value Limit Value.



Test Mode: TX 2440 MHz _CH19_1Mbps

Vertical

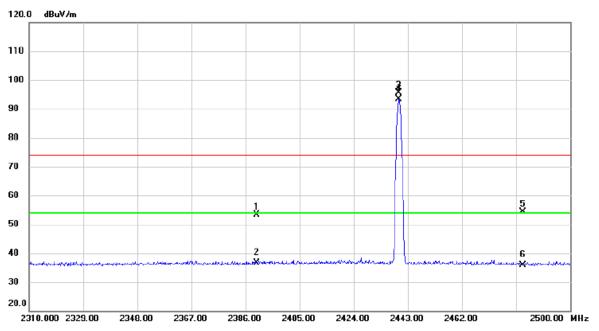

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	21.75	31.74	53.49	74.00	-20.51	peak	
2		2390.000	4.77	31.74	36.51	54.00	-17.49	AVG	
3	X	2439.950	63.82	31.72	95.54	74.00	21.54	peak	
4	*	2439.950	61.73	31.72	93.45	54.00	39.45	AVG	
5		2483.500	22.77	31.72	54.49	74.00	-19.51	peak	
6		2483.500	4.16	31.72	35.88	54.00	-18.12	AVG	

- (1) Measurement Value = Reading Level + Correct Factor.(2) Margin Level = Measurement Value Limit Value.





Vertical




No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	3033. 6250	64. 18	-15.44	48.74	74.00	-25. 26	Peak	
2	4989. 4750	52. 34	-10. 33	42.01	74.00	-31.99	Peak	

- (1) Measurement Value = Reading Level + Correct Factor.(2) Margin Level = Measurement Value Limit Value.



Test Mode: TX 2440 MHz _CH19_1Mbps

Horizontal

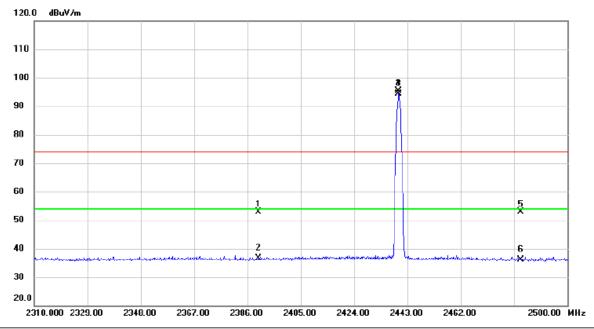

	No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
-			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
	1		2390.000	21.23	31.74	52.97	74.00	-21.03	peak	
	2		2390.000	4.83	31.74	36.57	54.00	-17.43	AVG	
	3	X	2439.941	63.73	31.72	95.45	74.00	21.45	peak	
	4	*	2439.941	62.63	31.72	94.35	54.00	40.35	AVG	
	5		2483.500	21.14	31.72	52.86	74.00	-21.14	peak	
	6		2483.500	4.38	31.72	36.10	54.00	-17.90	AVG	

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value Limit Value.






Horizontal




No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	4880.0000	49. 99	-10.78	39. 21	74.00	-34.79	Peak	

- (1) Measurement Value = Reading Level + Correct Factor.(2) Margin Level = Measurement Value Limit Value.





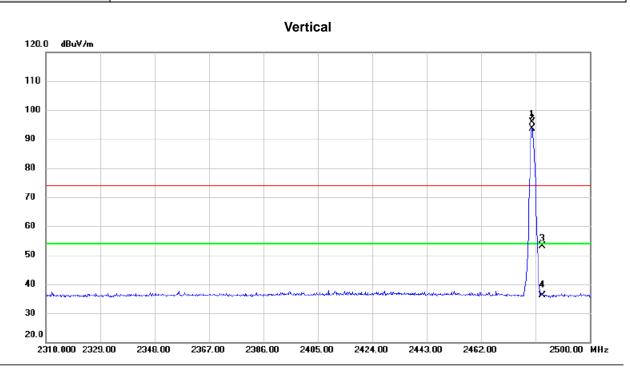

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	2479.917	64.22	31.71	95.93	74.00	21.93	peak	
2	*	2479.917	62.04	31.71	93.75	54.00	39.75	AVG	
3		2483.500	21.45	31.72	53.17	74.00	-20.83	peak	
4		2483.500	4.39	31.72	36.11	54.00	-17.89	AVG	


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value Limit Value.

(MHz)






Vertical

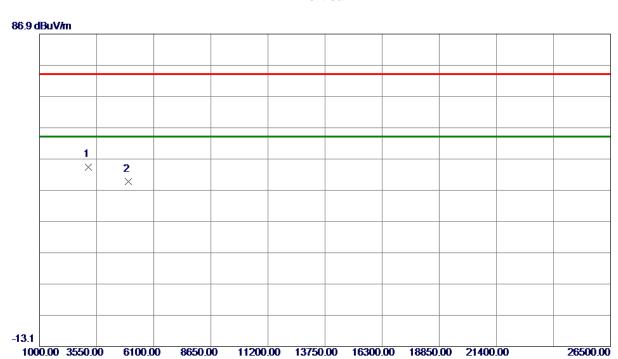


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	3195. 5500	59. 47	-15.07	44.40	74.00	-29.60	Peak	
2	4960.0000	50. 17	-10.46	39.71	74.00	-34. 29	Peak	

- (1) Measurement Value = Reading Level + Correct Factor.(2) Margin Level = Measurement Value Limit Value.






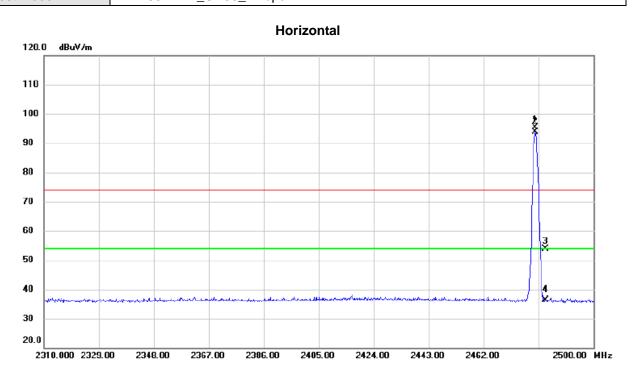


No.	M	c. Freq.			Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	Χ	2479.955	63.68	31.71	95.39	74.00	21.39	peak	
2	*	2479.955	62.12	31.71	93.83	54.00	39.83	AVG	
3		2483.500	22.05	31.72	53.77	74.00	-20.23	peak	
4		2483.500	4.62	31.72	36.34	54.00	-17.66	AVG	

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value Limit Value.





Horizontal

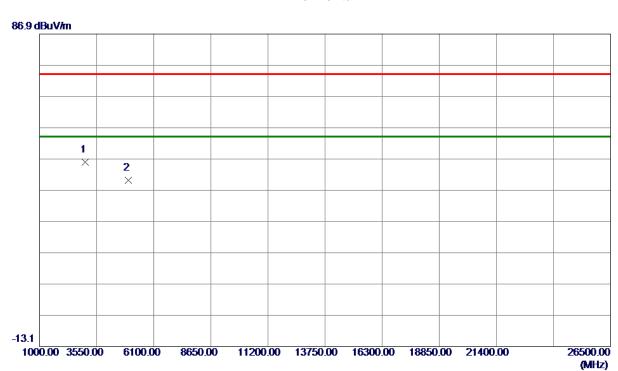

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	3036. 1750	61.38	-15. 43	45.95	74.00	-28.05	Peak	
2	4960.0000	50. 51	-10.46	40.05	74.00	-33.95	Peak	

- (1) Measurement Value = Reading Level + Correct Factor.(2) Margin Level = Measurement Value Limit Value.




APPENDIX E - BANDWIDTH



Test Mode:	CH00	CH19	CH39 -	1Mbps

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
01	2402	0.652	500	Complies
06	2440	0.657	500	Complies
11	2480	0.655	500	Complies

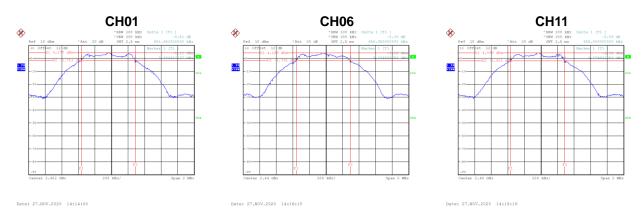

Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)	Result
01	2402	1.028	Complies
06	2440	1.040	Complies
11	2480	1.028	Complies





APPENDIX F - MAXIMUM OUTPUT POWER & E.I.R.P.				






Test Mode: CH00, CH19, CH39 - 1Mbps

Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	4.74	0.0030	30.00	1.00	Pass
2440	4.66	0.0029	30.00	1.00	Pass
2480	4.53	0.0028	30.00	1.00	Pass



APPENDIX G - CONDUCTED SPURIOUS EMISSION				



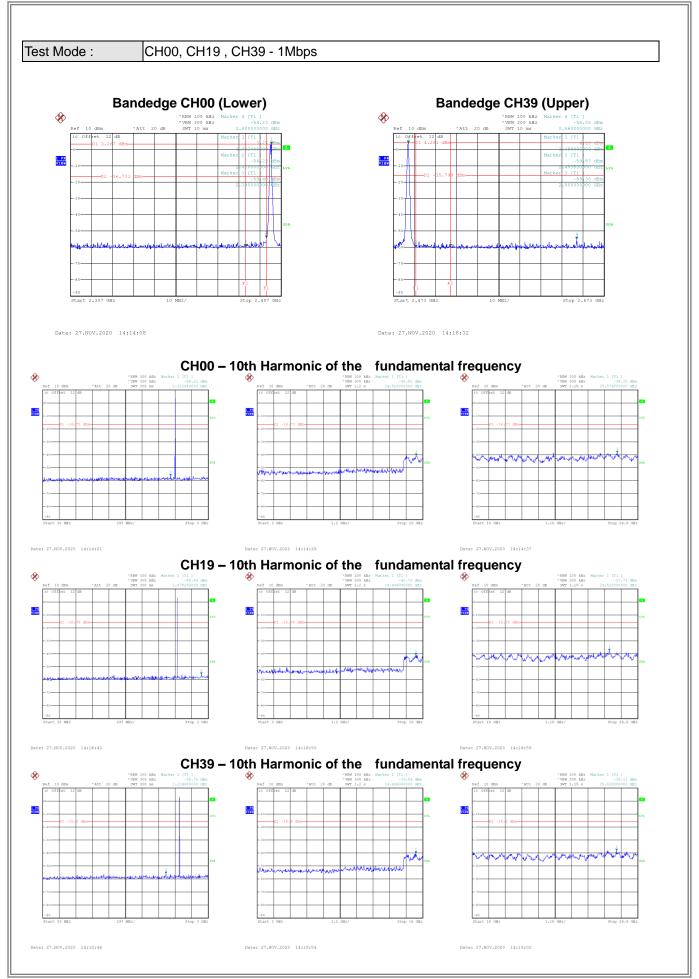



APPENDIX H - POWER SPECTRAL DENSITY				



Test Mode: CH00, CH19, CH39 - 1Mbps

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
00	2402	-11.30	8	Complies
19	2440	-9.49	8	Complies
39	2480	-11.50	8	Complies



End of Test Report