

TEST REPORT

Applicant Name: Shenzhen Xin Yuan Electronic Technology Co., Ltd.
Address: Room 801-803, Yousuowei Building, No.2000 JiaXian Road,
Bantian Street, Longgang District, Shenzhen, Guangdong
China
Report Number: 2401T38196E-RF-00B
FCC ID: 2ASYE-T-DECK

Test Standard (s)

FCC PART 15.247

Sample Description

Product Type: T-Deck
Model No.: T-Deck
Multiple Model(s) No.: N/A
Trade Mark: LILYGO
Date Received: 2024/05/16
Issue Date: 2024/11/13

Test Result:	Pass▲
--------------	-------

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Jojo Guo

Jojo Guo
RF Engineer

Approved By:

Nancy Wang

Nancy Wang
RF Supervisor

Note: The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China

Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	5
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	6
SYSTEM TEST CONFIGURATION	7
DESCRIPTION OF TEST CONFIGURATION	7
EQUIPMENT MODIFICATIONS	7
EUT EXERCISE SOFTWARE	7
DUTY CYCLE	7
SUPPORT EQUIPMENT LIST AND DETAILS	8
EXTERNAL I/O CABLE.....	8
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS	10
TEST EQUIPMENT LIST	11
FCC§15.247 (I), §1.1307 (B) (1) & §2.1093 - RF EXPOSURE.....	12
APPLICABLE STANDARD	12
MEASUREMENT RESULT	12
FCC §15.203 - ANTENNA REQUIREMENT.....	13
APPLICABLE STANDARD	13
ANTENNA CONNECTOR CONSTRUCTION	13
FCC §15.207 (A) - AC LINE CONDUCTED EMISSIONS	14
APPLICABLE STANDARD	14
EUT SETUP	14
EMI TEST RECEIVER SETUP.....	14
TEST PROCEDURE	14
FACTOR & OVER LIMIT CALCULATION.....	15
TEST DATA	15
FCC §15.209, §15.205 & §15.247(D) - SPURIOUS EMISSIONS.....	18
APPLICABLE STANDARD	18
EUT SETUP	18
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	19
TEST PROCEDURE	19
FACTOR & OVER LIMIT/MARGIN CALCULATION	20
TEST DATA	20
FCC §15.247(A) (2) - 6 DB EMISSION BANDWIDTH.....	30
APPLICABLE STANDARD	30
TEST PROCEDURE	30
TEST DATA	30

FCC §15.247(B) (3) - MAXIMUM CONDUCTED OUTPUT POWER	32
APPLICABLE STANDARD	32
TEST PROCEDURE	32
TEST DATA	32
FCC §15.247(D) - 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE	34
APPLICABLE STANDARD	34
TEST PROCEDURE	34
TEST DATA	34
FCC §15.247(E) - POWER SPECTRAL DENSITY.....	36
APPLICABLE STANDARD	36
TEST PROCEDURE	36
TEST DATA	36
EUT PHOTOGRAPHS.....	38
TEST SETUP PHOTOGRAPHS	39

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2401T38196E-RF-00B	Original Report	2024/11/13

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	T-Deck
Tested Model	T-Deck
Multiple Model(s)	N/A
Frequency Range	915 MHz
Maximum Conducted Peak Output Power	6.56dBm
Modulation Technique	GFSK
Antenna Specification [#]	1.04dBi (provided by the applicant)
Voltage Range	DC 5V from USB
Sample serial number	2LEM-2 for Conducted and Radiated Emissions Test 2LEM-3 for RF Conducted Test (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	N/A

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF Frequency		213.55 Hz(k=2, 95% level of confidence)
RF output power, conducted		0.72 dB(k=2, 95% level of confidence)
Unwanted Emission, conducted		1.75 dB(k=2, 95% level of confidence)
AC Power Lines Conducted Emissions	9kHz~150 kHz	3.94dB(k=2, 95% level of confidence)
	150 kHz ~30MHz	3.84dB(k=2, 95% level of confidence)
Radiated Emissions	9kHz - 30MHz	3.30dB(k=2, 95% level of confidence)
	30MHz~200MHz (Horizontal)	4.48dB(k=2, 95% level of confidence)
	30MHz~200MHz (Vertical)	4.55dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Horizontal)	4.85dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Vertical)	5.05dB(k=2, 95% level of confidence)
	1GHz - 6GHz	5.35dB(k=2, 95% level of confidence)
	6GHz - 18GHz	5.44dB(k=2, 95% level of confidence)
	18GHz - 40GHz	5.16dB(k=2, 95% level of confidence)
Temperature		±1°C
Humidity		±1%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 715558, the FCC Designation No. : CN5045.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in engineering mode.

Equipment Modifications


No modification was made to the EUT tested.

EUT Exercise Software

EUT was configured to testing mode by applicant and power level is default[#].

Duty cycle

Test Information			Environmental Conditions		
Test Date:	2024/11/01		Temperature:	26℃	
Test Mode:	Transmitting		Relative Humidity:	54 %	
Tester:	Allen Bai		ATM Pressure:	101.0 kPa	
Test Data:					
Test Mode	Ton (ms)	Ton+off (ms)	Duty Cycle (%)	1/T (Hz)	VBW Setting (Hz)
Lora	101.4	3014.5	3.36	10	10

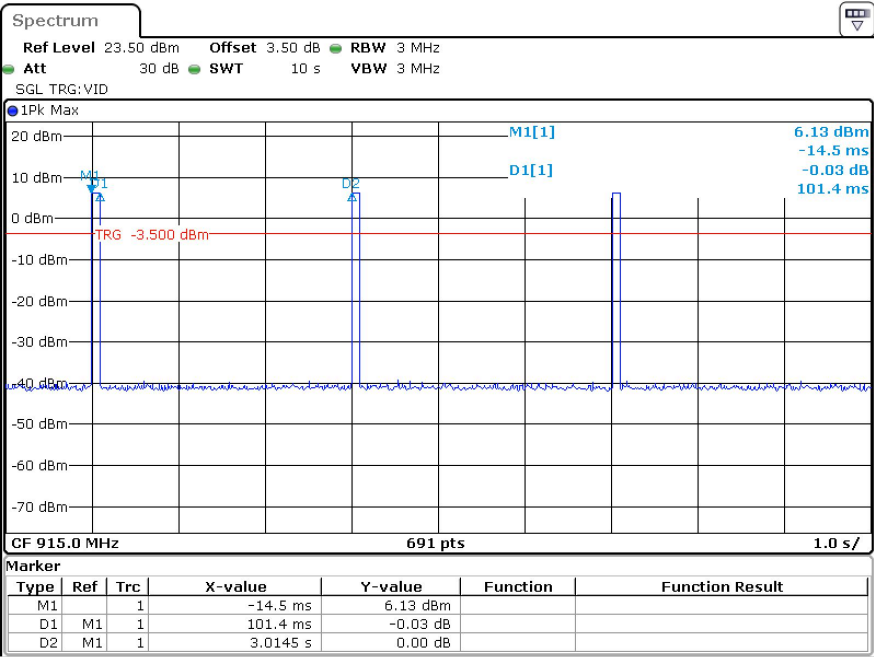

ProjectNo.:2401T38196E-RF Tester:Allen Bai
Date: 1.NOV.2024 01:27:33

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
YEZZ	Adapter	CART4P	Unknown
DELL	PC	WIN-60Q2KJ1U41E	Unknown

External I/O Cable


Cable Description	Length (m)	From Port	To
Un-shielding Detachable USB Cable	1.0	EUT	Adapter
Un-shielding Un-Detachable AC Cable	1.2	Receptacle	LISN
Un-shielding Detachable USB Cable	1.0	EUT	PC

Block Diagram of Test Setup

For Conducted Emissions:

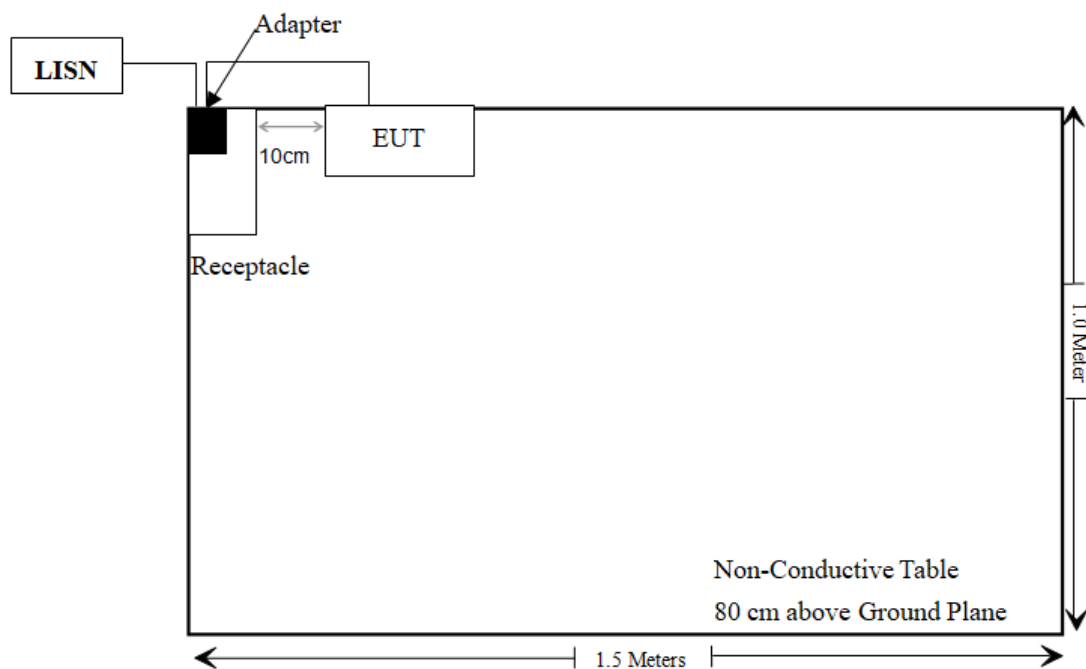

For Radiated Emissions:

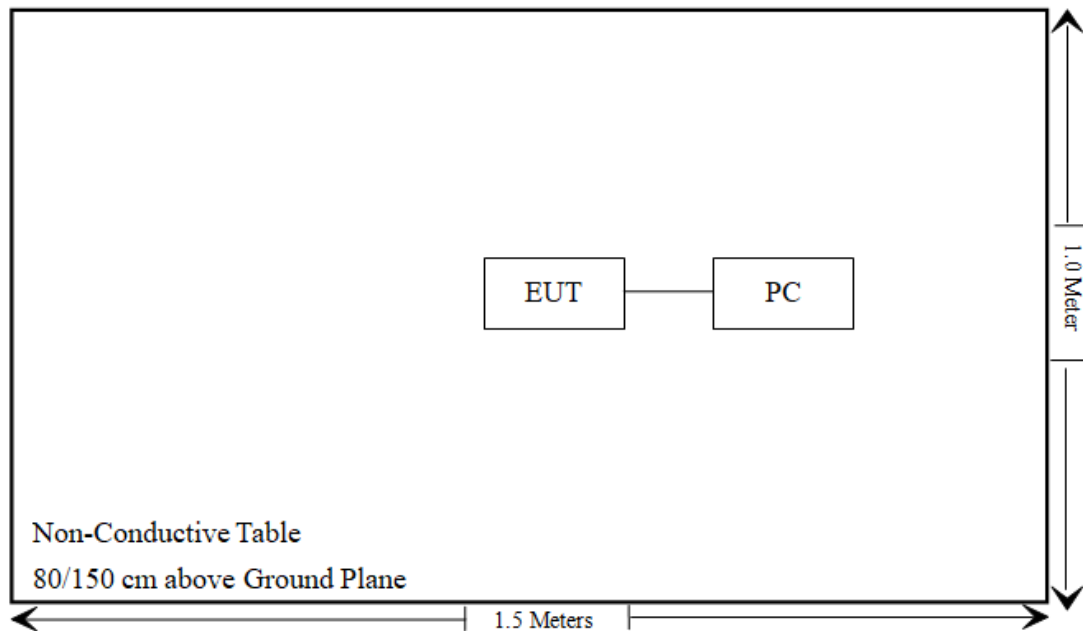

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b) (1) & §2.1093	RF Exposure	Compliant
FCC §15.203	Antenna Requirement	Compliant
FCC §15.207(a)	AC Line Conducted Emissions	Compliant
FCC §15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
FCC §15.247 (a)(2)	6 dB Emission Bandwidth	Compliant
FCC §15.247(b)(3)	Maximum Conducted Output Power	Compliant
FCC §15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
FCC §15.247(e)	Power Spectral Density	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2024/01/16	2025/01/15
Rohde & Schwarz	LISN	ENV216	101613	2024/01/16	2025/01/15
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2023/08/03	2024/08/02
Unknown	CE Cable	CE Cable	UF A210B-1-0720-504504	2023/08/03	2024/08/02
Audix	EMI Test software	E3	191218	NCR	NCR
Radiated Emission Test_ Below 1GHz					
R&S	EMI Test Receiver	ESR3	102455	2024/01/16	2025/01/15
Sonoma instrument	Pre-amplifier	310 N	186238	2024/05/21	2025/05/20
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2026/07/19
Unknown	Cable	Chamber A Cable 1	N/A	2024/05/21	2025/05/20
Unknown	Cable	XH500C	J-10M-A	2024/05/21	2025/05/20
BACL	Active Loop Antenna	1313-1A	4031911	2024/05/14	2027/05/13
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR
Radiated Emission Test_ Above 1GHz					
Rohde & Schwarz	Spectrum Analyzer	FSV40	101605	2024/03/27	2025/03/26
COM-POWER	Pre-amplifier	PA-122	181919	2024/06/18	2025/06/17
Schwarzbeck	Horn Antenna	BBHA9120D(1201)	1143	2023/07/26	2026/07/25
Unknown	RF Cable	KMSE	735	2024/06/18	2025/06/17
Unknown	RF Cable	UFA147	219661	2024/06/18	2025/06/17
Unknown	RF Cable	XH750A-N	J-10M	2024/06/18	2025/06/17
JD	Multiplex Switch Test Control Set	DT7220FSU	DQ77926	2024/06/18	2025/06/17
Audix	EMI Test software	E3	191218(V9)	NCR	NCR
RF Conducted Test					
R&S	SPECTRUM ANALYZER	FSV40-N	102259	2024/01/16	2025/01/15
WEINSCHHEL	3dB Attenuator	Unknown	F-03-EM220	2024/06/27	2025/06/26

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.247 (i), §1.1307 (b) (1) & §2.1093 - RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

- a) According to KDB 447498 D01 General RF Exposure Guidance v06

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

Measurement Result

For worst case:

Mode	Frequency (MHz)	Maximum Tune-up power [#]		Calculated Distance (mm)	Calculated Value	Threshold (1-g SAR)	SAR Test Exclusion
		(dBm)	(mW)				
Lora	915	7.0	5.01	5	1.0	3.0	Yes

Result: No Standalone SAR test is required.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

Antenna Connector Construction

The EUT has a FPC antenna arrangement which was permanently attached by an UFL Connector, and the maximum antenna gain[#] is 1.04dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliant.

FCC §15.207 (a) - AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

EUT Setup



- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Factor & Over Limit Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).

Test Data


Environmental Conditions

Temperature:	25 °C
Relative Humidity:	73 %
ATM Pressure:	101 kPa

The testing was performed by Macy Shi on 2024-05-31.

EUT operation mode: Transmitting

AC 120V/60 Hz, Line

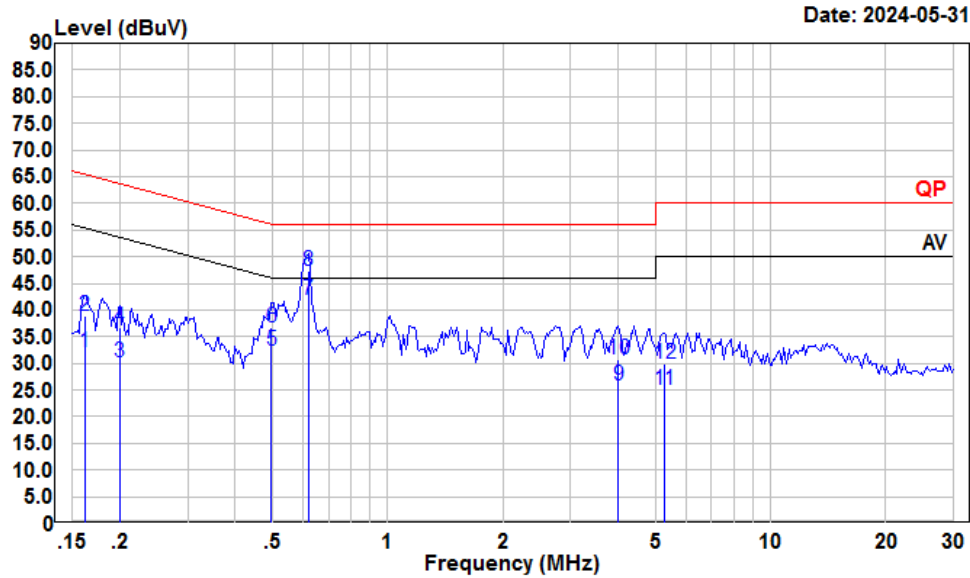

Condition: Line


Project : 2401T38196E-RF

tester : Macy.shi

Note : Lora DTS

	Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.16	11.01	32.03	10.87	10.15	55.38	-23.35	Average
2	0.16	17.74	38.76	10.87	10.15	65.38	-26.62	QP
3	0.20	9.36	30.25	10.80	10.09	53.62	-23.37	Average
4	0.20	15.77	36.66	10.80	10.09	63.62	-26.96	QP
5	0.50	11.78	32.43	10.50	10.15	46.05	-13.62	Average
6	0.50	16.20	36.85	10.50	10.15	56.05	-19.20	QP
7	0.62	21.28	42.00	10.50	10.22	46.00	-4.00	Average
8	0.62	26.56	47.28	10.50	10.22	56.00	-8.72	QP
9	4.01	5.26	25.82	10.30	10.26	46.00	-20.18	Average
10	4.01	10.08	30.64	10.30	10.26	56.00	-25.36	QP
11	5.28	4.40	25.02	10.40	10.22	50.00	-24.98	Average
12	5.28	9.20	29.82	10.40	10.22	60.00	-30.18	QP

AC 120V/60 Hz, Neutral

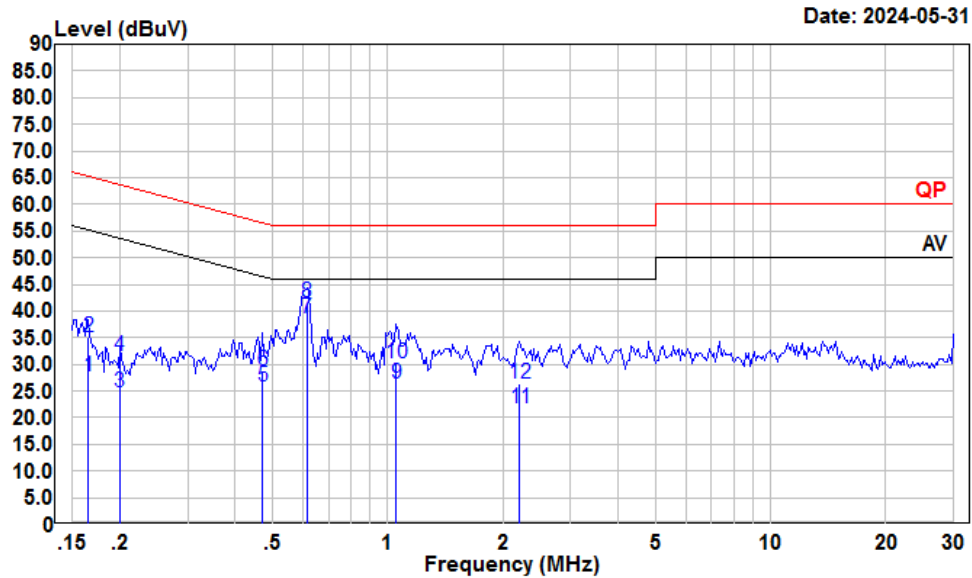

Condition: Neutral

Project : 2401T38196E-RF

tester : Macy.shi

Note : Lora DTS

	Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.17	7.02	27.70	10.53	10.15	55.21	-27.51	Average
2	0.17	14.44	35.12	10.53	10.15	65.21	-30.09	QP
3	0.20	4.40	24.89	10.40	10.09	53.62	-28.73	Average
4	0.20	11.10	31.59	10.40	10.09	63.62	-32.03	QP
5	0.47	5.01	25.86	10.68	10.17	46.49	-20.63	Average
6	0.47	7.88	28.73	10.68	10.17	56.49	-27.76	QP
7	0.61	17.60	38.52	10.70	10.22	46.00	-7.48	Average
8	0.61	20.82	41.74	10.70	10.22	56.00	-14.26	QP
9	1.05	5.30	26.33	10.86	10.17	46.00	-19.67	Average
10	1.05	9.10	30.13	10.86	10.17	56.00	-25.87	QP
11	2.21	1.03	21.63	10.40	10.20	46.00	-24.37	Average
12	2.21	5.84	26.44	10.40	10.20	56.00	-29.56	QP


FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;


EUT Setup

9 kHz-30MHz:

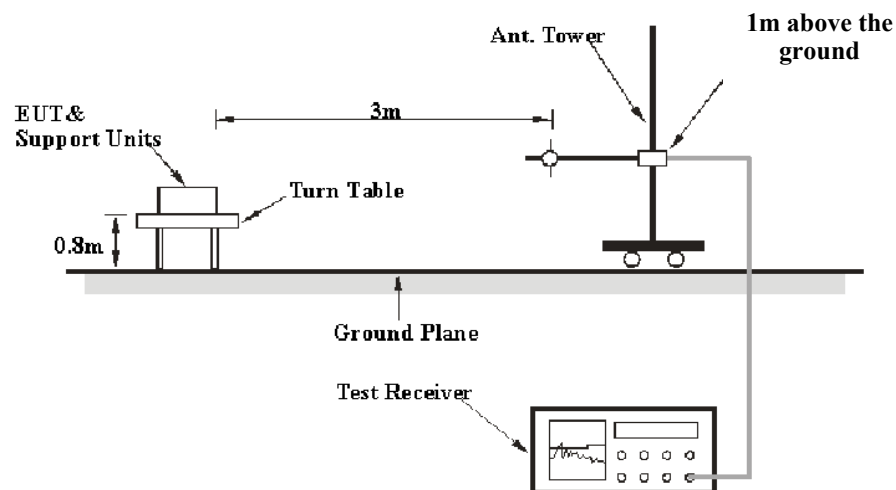

30MHz-1GHz:

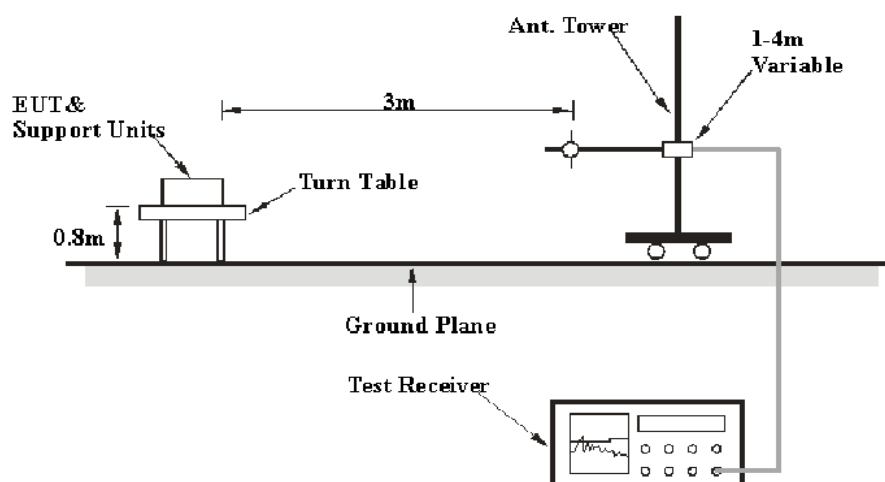

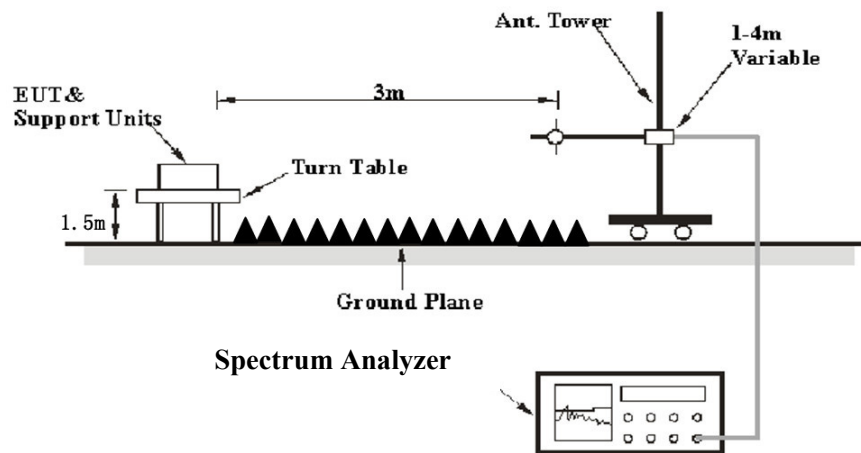Above 1GHz:

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
Average	>98%	1MHz	$\geq 10 \text{ Hz}$ ^{Note 1}
	<98%	1MHz	$\geq 1/\text{Ton}$ ^{Note 2}
Note 1: The detail test parameters please refer to duty cycle section.			
Note 2: Ton is minimum transmission duration.			

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, average detection modes for frequency bands 9–90 kHz and 110–490 kHz, peak and average detection modes for frequencies above 1 GHz.

For 9 kHz-30MHz, the report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground-parallel) unless the margin is greater than 20 dB.

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

All emissions under the average limit and under the noise floor have not recorded in the report.

Factor & Over Limit/Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\text{Over Limit/Margin} = \text{Level/Corrected Amplitude} - \text{Limit}$$

$$\text{Level / Corrected Amplitude} = \text{Read Level} + \text{Factor}$$

Test Data

Environmental Conditions

Temperature:	22~25.6 °C
Relative Humidity:	50~54 %
ATM Pressure:	101 kPa


The testing was performed by Anson Su from 2024-06-07 to 2024-10-23 for below 1GHz and Dylan Yang on 2024-08-22 for above 1GHz.

EUT operation mode: Transmitting

Note: Pre-scan in the X, Y and Z axes of orientation, the worst case Z-axis of orientation was recorded.


9 kHz-30 MHz:

Parallel (worst case)

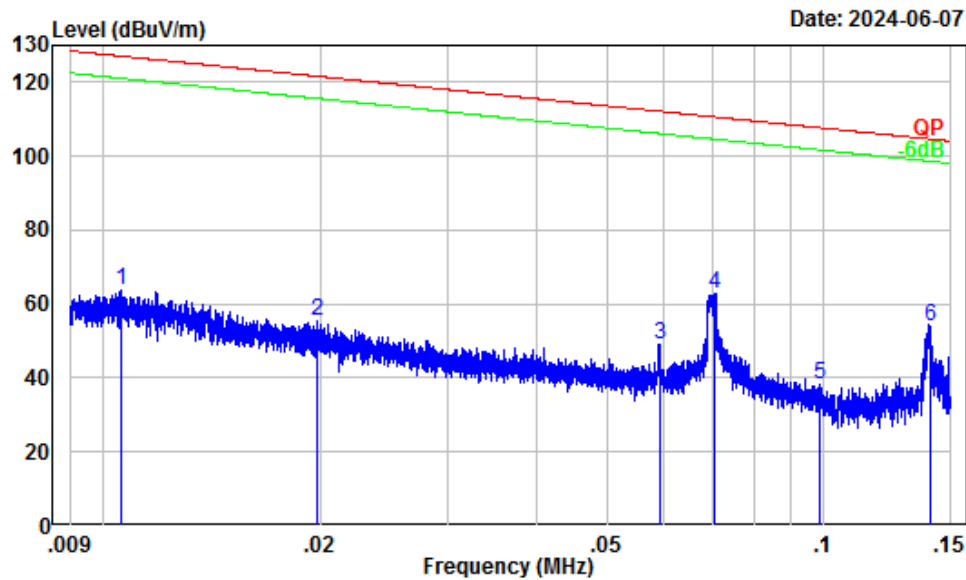

Site : Chamber A
Condition : 3m
Project Number: 2401T38196E-RF
Test Mode : Lora DTS
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.01	37.40	26.36	63.76	127.12	-63.36	Peak
2	0.02	32.68	22.86	55.54	121.66	-66.12	Peak
3	0.06	21.83	27.11	48.94	112.16	-63.22	Peak
4	0.07	20.32	42.34	62.66	110.65	-47.99	Peak
5	0.10	17.17	20.91	38.08	107.71	-69.63	Peak
6	0.14	15.17	38.88	54.05	104.66	-50.61	Peak

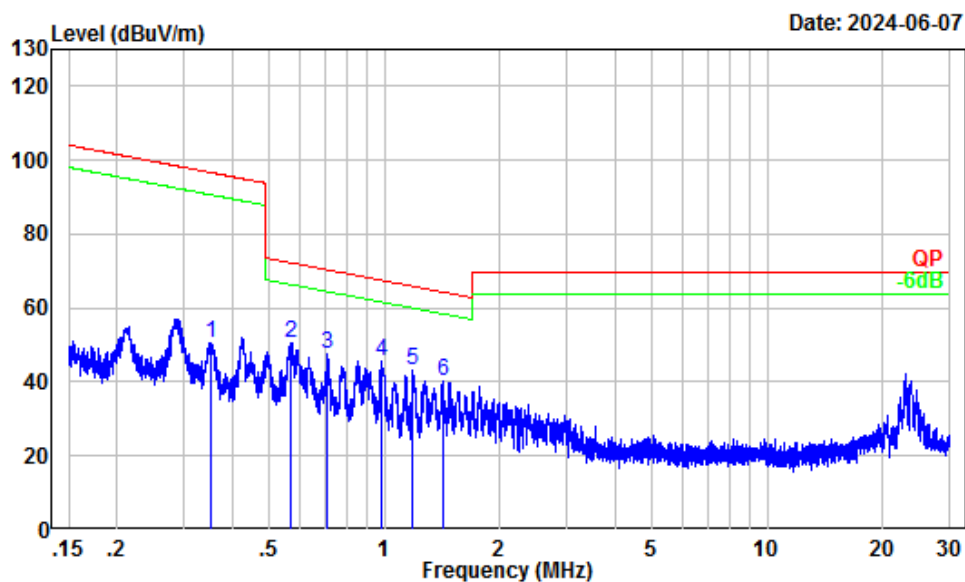


Site : Chamber A
 Condition : 3m
 Project Number: 2401T38196E-RF
 Test Mode : Lora DTS
 Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.35	6.60	43.99	50.59	96.65	-46.06	Peak
2	0.57	2.61	48.09	50.70	72.42	-21.72	Peak
3	0.71	0.99	46.72	47.71	70.53	-22.82	Peak
4	0.98	-1.46	46.96	45.50	67.63	-22.13	Peak
5	1.19	-2.24	45.28	43.04	65.96	-22.92	Peak
6	1.42	-3.05	43.15	40.10	64.37	-24.27	Peak

30 MHz~1 GHz:


Horizontal

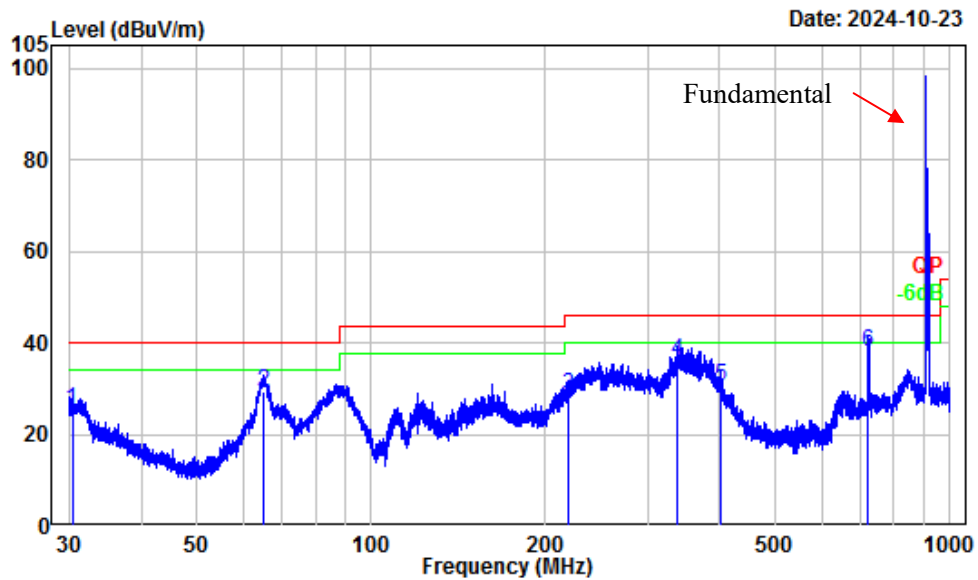

Site : Chamber A
Condition : 3m Horizontal
Project Number: 2401T38196E-RF
Test Mode : Lora DTS
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	30.40	-4.85	30.29	25.44	40.00	-14.56	Peak
2	65.03	-17.65	47.12	29.47	40.00	-10.53	QP
3	218.40	-13.86	42.56	28.70	46.00	-17.30	QP
4	338.99	-12.16	48.13	35.97	46.00	-10.03	QP
5	402.19	-10.55	41.22	30.67	46.00	-15.33	QP
6	723.63	-5.88	44.09	38.21	46.00	-7.79	QP

Vertical

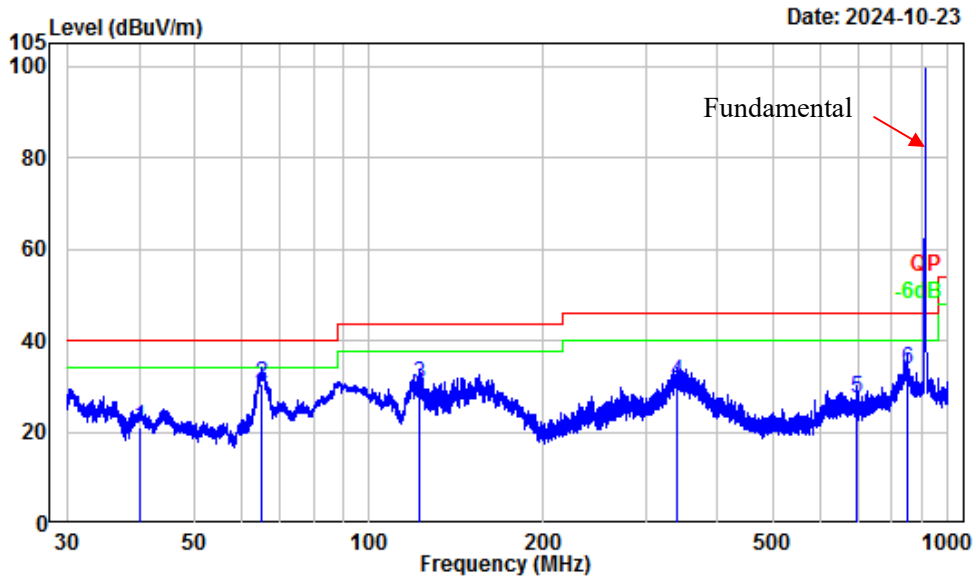

Site : Chamber A
Condition : 3m Vertical
Project Number: 2401T38196E-RF
Test Mode : Lora DTS
Tester : Anson Su

	Freq Factor		Read Level		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	Limit	
1	40.12	-13.09	34.16	21.07	40.00	-18.93	QP
2	65.11	-18.75	49.40	30.65	40.00	-9.35	QP
3	122.35	-12.72	43.35	30.63	43.50	-12.87	QP
4	340.04	-12.47	43.56	31.09	46.00	-14.91	QP
5	693.50	-6.64	34.03	27.39	46.00	-18.61	QP
6	849.54	-5.12	38.76	33.64	46.00	-12.36	QP

Above 1 GHz:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave					
915MHz							
2745.00	57.28	PK	H	-2.49	54.79	74	-19.21
2745.00	55.68	AV	H	-2.49	53.19	54	-0.81
2745.00	55.77	PK	V	-2.49	53.28	74	-20.72
2745.00	53.16	AV	V	-2.49	50.67	54	-3.33
3660.00	51.69	PK	H	-1.84	49.85	74	-24.15
3660.00	46.45	AV	H	-1.84	44.61	54	-9.39
3660.00	50.01	PK	V	-1.84	48.17	74	-25.83
3660.00	43.93	AV	V	-1.84	42.09	54	-11.91

Note:


Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor


Corrected Amplitude/Level = Corrected Factor + Reading


Margin = Corrected Amplitude/Level - Limit


The other spurious emission which is in the noise floor level was not recorded.

Listed with harmonic margin test plot:

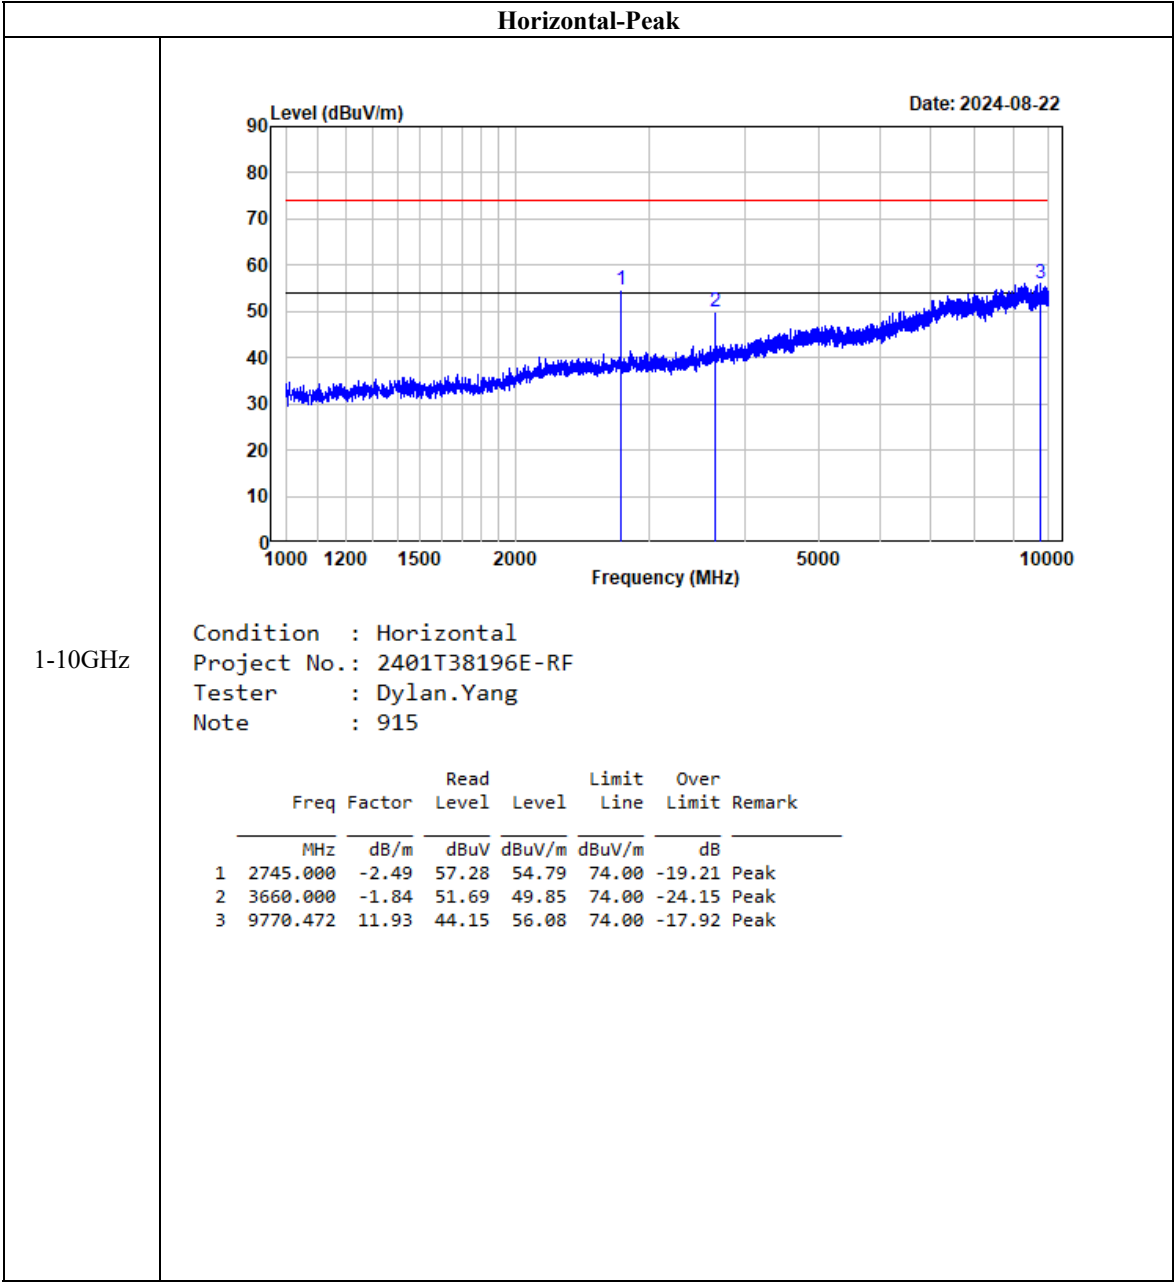

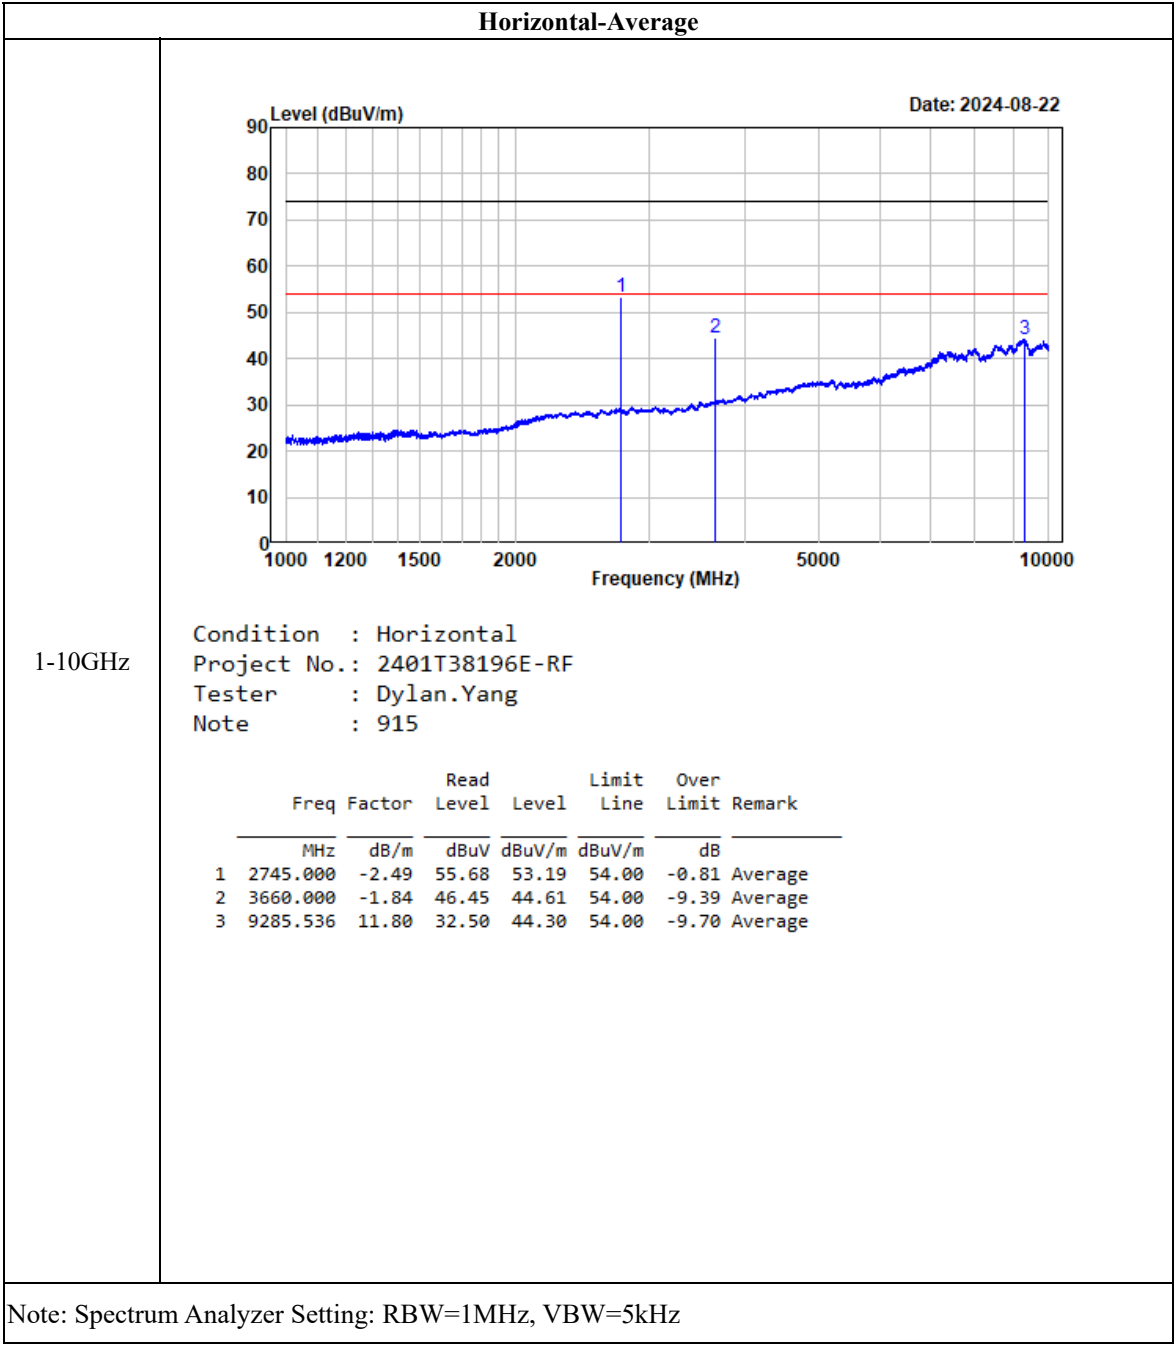

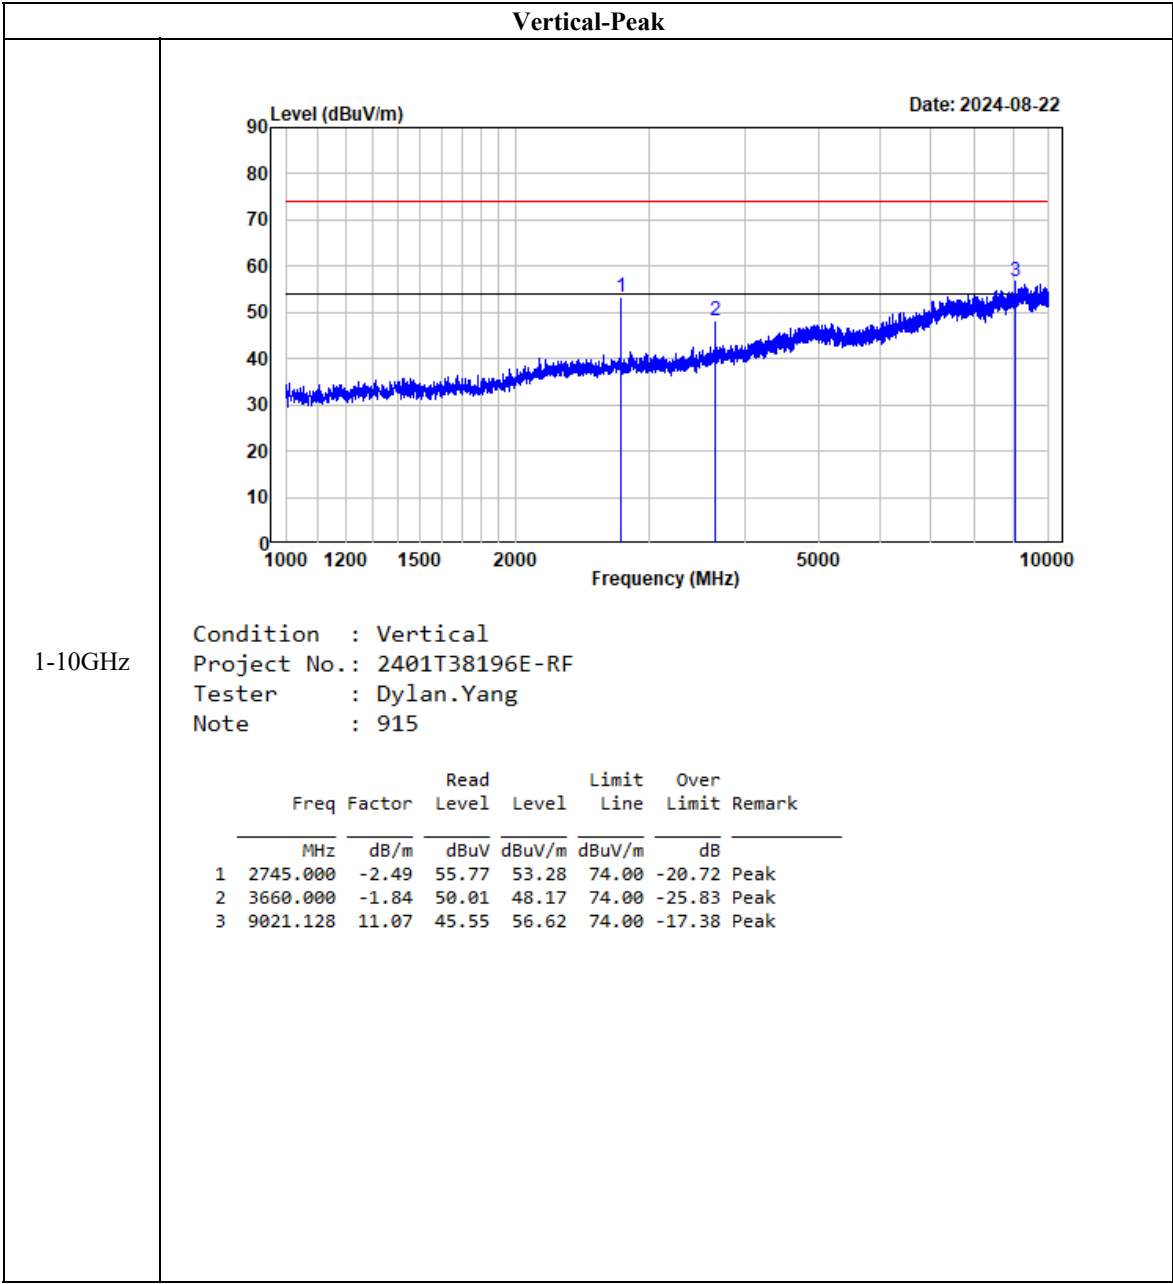

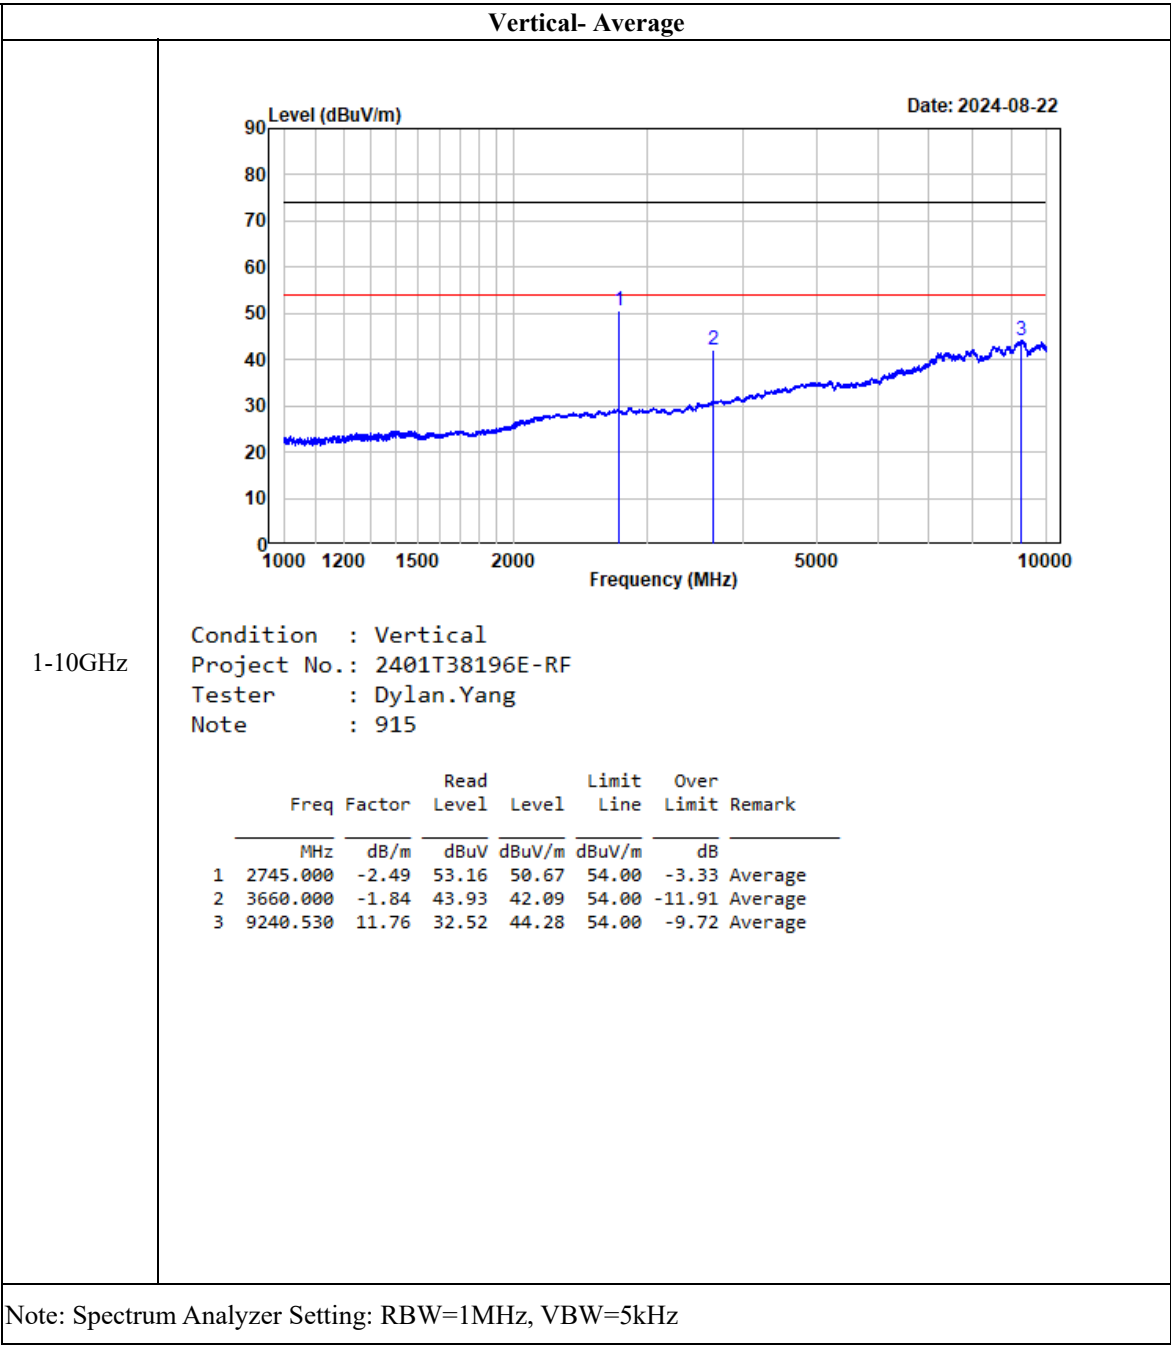

FCC §15.247(a) (2) - 6 dB EMISSION BANDWIDTH


Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.8.1

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.



Test Data

Environmental Conditions

Temperature:	25.3 °C
Relative Humidity:	55 %
ATM Pressure:	101 kPa


The testing was performed by Allen Bai on 2024-10-30.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the following table and plots.

Test Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)
915	0.64	0.5

6 dB Bandwidth

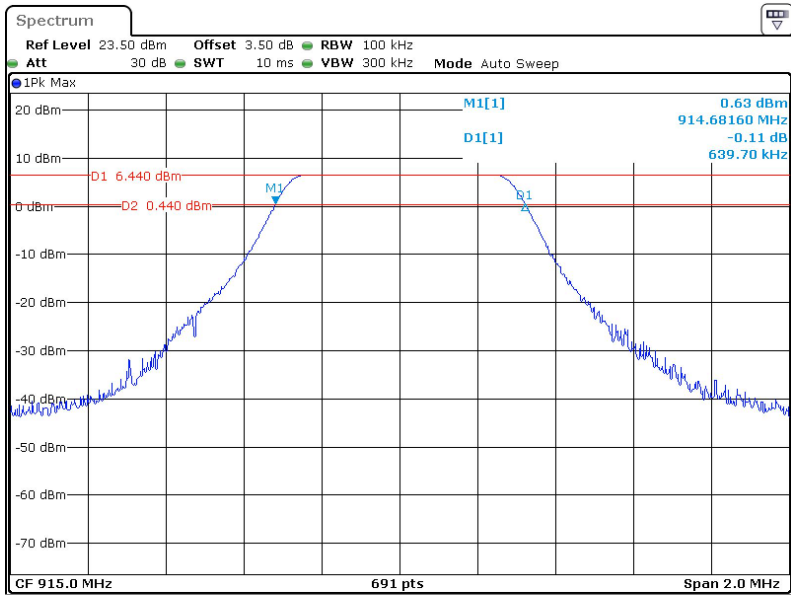

ProjectNo.:2401T38196E-RF Tester:Allen Bai
Date: 30.OCT.2024 06:09:53

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER


Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.9.1.1

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Data

Environmental Conditions


Temperature:	25.3 °C
Relative Humidity:	55 %
ATM Pressure:	101 kPa

The testing was performed by Allen Bai on 2024-10-30.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the following table and plots.

Test Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)	Limit (dBm)
915	6.56	≤30

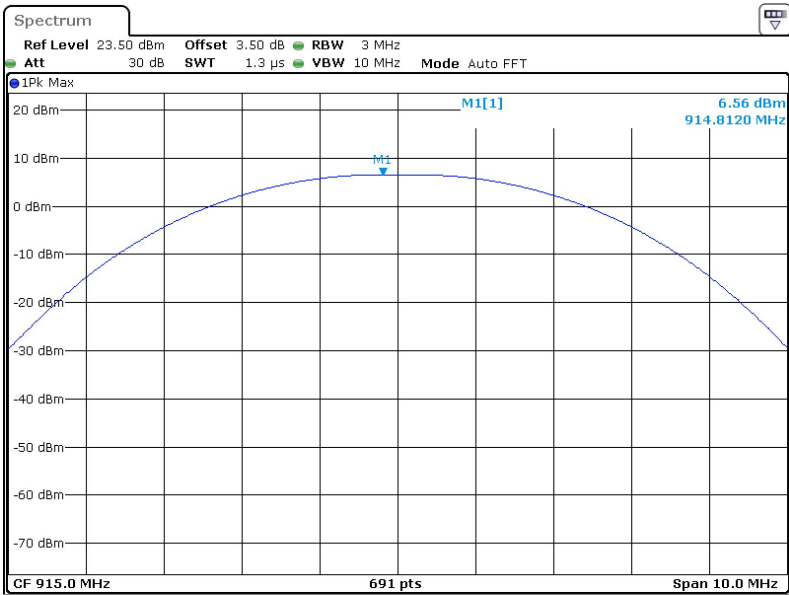

ProjectNo.:2401T38196E-RF Tester:Allen Bai
Date: 30.OCT.2024 05:42:43

FCC §15.247(d) - 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE


Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.11

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



Test Data

Environmental Conditions


Temperature:	25.3 °C
Relative Humidity:	55 %
ATM Pressure:	101 kPa

The testing was performed by Allen Bai on 2024-10-30.


EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the following plots.

Band edge

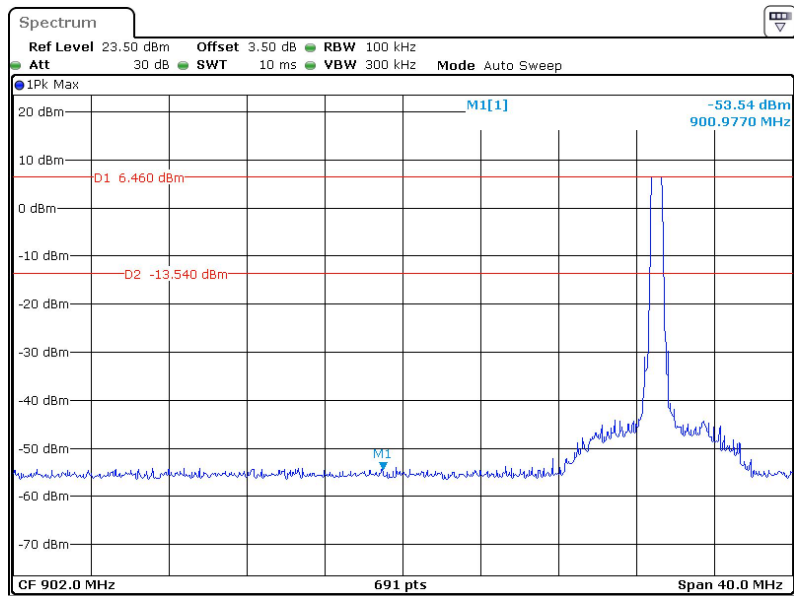

ProjectNo.:2401T38196E-RF Tester:Allen Bai
 Date: 30.OCT.2024 05:51:13

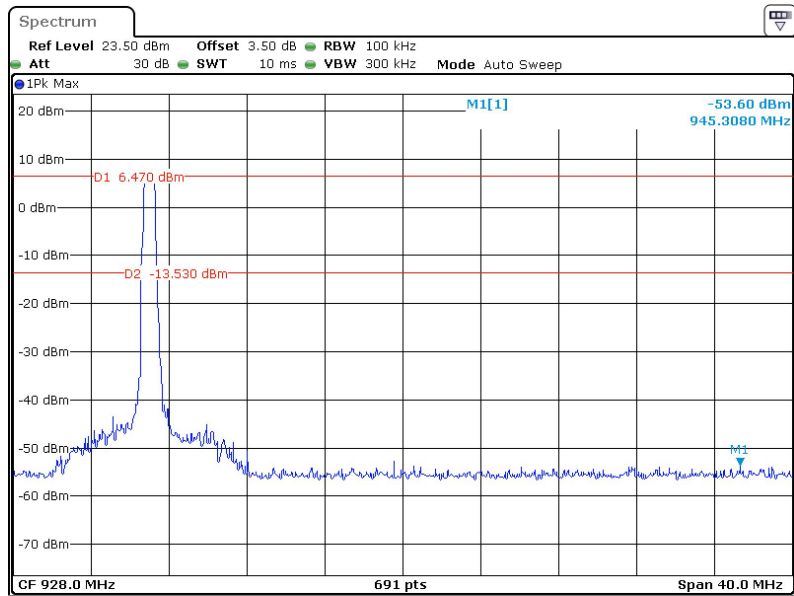

ProjectNo.:2401T38196E-RF Tester:Allen Bai
 Date: 30.OCT.2024 05:53:40


FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

2. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
3. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Set the span to 1.5 times the DTS bandwidth.
6. Detector = peak.
7. Sweep time = auto couple.
8. Trace mode = max hold.
9. Allow trace to fully stabilize.
10. Use the peak marker function to determine the maximum amplitude level within the RBW.
11. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



Test Data

Environmental Conditions


Temperature:	25.3 °C
Relative Humidity:	55 %
ATM Pressure:	101 kPa

The testing was performed by Allen Bai on 2024-10-30.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the following table and plots.

Test Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
915	-3.00	≤8.00

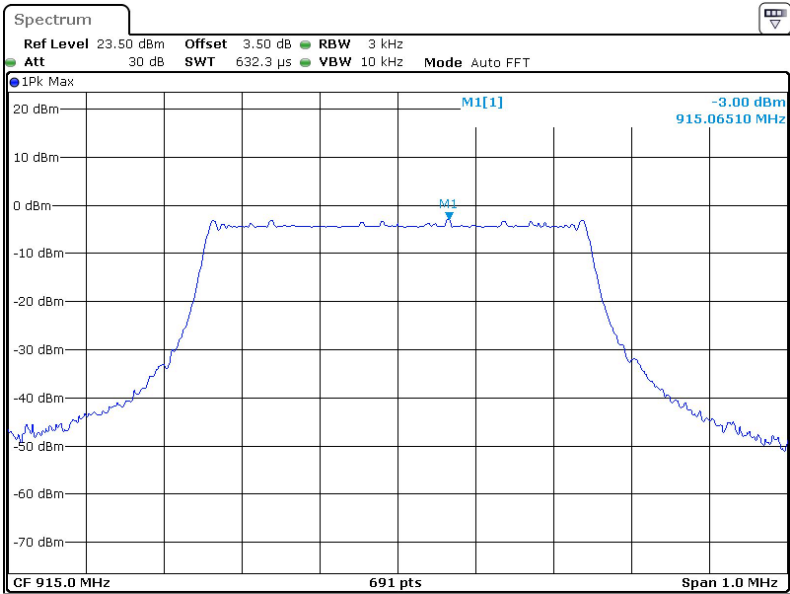

ProjectNo.:2401T38196E-RF Tester:Allen Bai
Date: 30.OCT.2024 05:41:20

EUT PHOTOGRAPHS

Please refer to the attachment 2401T38196E-RF External photo and 2401T38196E-RF Internal photo.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2401T38196E-RFD Test Setup photo.

******* END OF REPORT *******