



FCC Radio Test Report

FCC ID: 2AXJ4EAP660HDV2

Report No. : eLab-FCCP-1-2308G050

Equipment : AX3600 Ceiling Mount Wi-Fi 6 Access Point

Model Name : EAP660 HD

Brand Name : tp-link

Applicant: TP-Link Corporation Limited

Address : Room 901, 9/F., New East Ocean Centre, 9 Science Museum Road,

Tsim Sha Tsui, Kowloon, Hongkong

Manufacturer : TP-Link Corporation Limited

Address : Room 901, 9/F., New East Ocean Centre, 9 Science Museum Road,

Tsim Sha Tsui, Kowloon, Hongkong

Radio Function : Bluetooth Low Energy (5.0)

FCC Rule Part(s) : FCC CFR Title 47, Part 15, Subpart C (15.247)

Measurement : ANSI C63.10-2013

Procedure(s)

Date of Receipt : 2023/8/9

Date of Test : 2023/9/10 ~ 2023/10/16

Issued Date : 2023/11/23

The above equipment has been tested and found in compliance with the requirement of the above standards by eLab Inc.

Prepared by

Hunter Chiang, Engineer

Approved by

Sam Chuang, Supervisor

Testing Laboratory

eLab Inc.

10F., No. 167, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

Tel: +886-2-8692-6160 Fax: +886-2-8692-6170

Project No.: 2308G050 Page 1 of 50 Report Version: R01

Declaration

eLab represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

eLab's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **eLab** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **eLab** issued reports.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

eLab's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

eLab is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.





CONTENTS REVISION HISTORY 5 SUMMARY OF TEST RESULTS 6 1.1 **TEST FACILITY** 7 MEASUREMENT UNCERTAINTY 1.2 7 TEST ENVIRONMENT CONDITIONS 1.3 7 1.4 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING 8 2 **GENERAL INFORMATION** 9 **DESCRIPTION OF EUT** 2.1 9 2.2 **TEST MODES** 11 2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED 12 2.4 SUPPORT UNITS 12 3 AC POWER LINE CONDUCTED EMISSIONS TEST 13 3.1 LIMIT 13 **TEST PROCEDURE** 3.2 13 **TEST SETUP** 3.3 14 **TEST RESULT** 3.4 14 RADIATED EMISSIONS TEST 15 4 4.1 LIMIT 15 4.2 **TEST PROCEDURE** 16 4.3 **TEST SETUP** 16 **EUT OPERATING CONDITIONS** 4.4 18 TEST RESULT - BELOW 30 MHZ 4.5 18 4.6 TEST RESULT - 30 MHZ TO 1 GHZ 18 TEST RESULT - ABOVE 1 GHZ 4.7 18 5 **BANDWIDTH TEST** 19 APPLIED PROCEDURES / LIMIT 5.1 19 **TEST PROCEDURE** 5.2 19 5.3 **TEST SETUP** 19 **EUT OPERATION CONDITIONS** 5.4 19 5.5 **TEST RESULTS** 19 6 **OUTPUT POWER TEST** 20 APPLIED PROCEDURES / LIMIT 6.1 20 **TEST PROCEDURE** 6.2 20 6.3 **TEST SETUP** 20 **EUT OPERATION CONDITIONS** 6.4 20 6.5 TEST RESULTS 20 7 POWER SPECTRAL DENSITY TEST 21 APPLIED PROCEDURES / LIMIT 7.1 21 TEST PROCEDURE 7.2 21 **TEST SETUP** 7.3 21 7.4 **EUT OPERATION CONDITIONS** 21 7.5 **TEST RESULTS** 21 ANTENNA CONDUCTED SPURIOUS EMISSION 8 22 8.1 APPLIED PROCEDURES / LIMIT 22 8.2 TEST PROCEDURE 22 8.3 **TEST SETUP** 22 8.4 **EUT OPERATION CONDITIONS** 22



8.5	TEST	RESULTS	22
9	LIST OF	MEASURING EQUIPMENTS	23
10	EUT TES	ST PHOTO	25
11	EUT PH	OTOS	25
APPEND	IX A	AC POWER LINE CONDUCTED EMISSIONS	26
APPEND	IX B	RADIATED EMISSIONS - 30 MHZ TO 1 GHZ	31
APPEND	IX C	ADIATED EMISSIONS - ABOVE 1 GHZ	34
APPEND	IX D	BANDWIDTH	43
APPEND	IX E	OUTPUT POWER	45
APPEND	IX F	POWER SPECTRAL DENSITY TEST	47
APPEND	IX G	ANTENNA CONDUCTED SPURIOUS EMISSION	49



REVISION HISTORY

Report No.	Version	Description	Issued Date	Note
eLab-FCCP-1-2308G050	R00	Original Report.	2023/11/7	Invalid
eLab-FCCP-1-2308G050	R01	Updated the laboratory address in first	2023/11/23	Valid
		page.		

SUMMARY OF TEST RESULTS

Test procedures according to the technical standards.

Standard(s) Section	Description	Result	Remark
15.207	AC Power Line Conducted Emissions	Pass	
15.205 15.209 15.247(d)	Radiated Emissions	Pass	
15.247(a)(2)	Bandwidth	Pass	
15.247(b)(3)	Output Power	Pass	
15.247(e)	Power Spectral Density	Pass	
15.247(d)	Antenna conducted Spurious Emission	Pass	
15.203	Antenna Requirement	Pass	

NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report.(2) The report format version is FR15CBT4.0_V1.0

1.1 TEST FACILITY

The test facilities used to collect the test data in this report:

No.64, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan The test sites and facilities are covered under FCC RN: 681248 and DN: TW4045.

 ⊠ TR01

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $\mathbf{y} \pm \mathbf{U}$, where expanded uncertainty \mathbf{U} is based on a standard uncertainty multiplied by a coverage factor of $\mathbf{k} = \mathbf{2}$, providing a level of confidence of approximately 95 %. The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2. The eLab measurement uncertainty is less than the CISPR 16-4-2 \mathbf{U}_{cisor} requirement.

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U (dB)
C01	CISPR	150 kHz ~ 30MHz	3.44

B. Radiated emissions test:

Test Site	Measurement Frequency Range	U,(dB)
	0.03 GHz ~ 0.2 GHz	4.4417
	0.2 GHz ~ 1 GHz	4.5567
CB01	1 GHz ~ 6 GHz	3.9930
СВОТ	6 GHz ~ 18 GHz	4.4555
	18 GHz ~ 26 GHz	3.8333
	26 GHz ~ 40 GHz	3.8241

C. Conducted test:

Test Item	U,(dB)
Occupied Bandwidth	1.0502
Output power	1.0406
Power Spectral Density	1.0502
Conducted Spurious emissions	1.1484
Conducted Band edges	1.0518

NOTE:

Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Environment Condition	Test Voltage	Tested by
AC Power Line Conducted Emissions	25 °C, 45 %	AC 120V	Hunter Chiang
Radiated emissions (30MHz TO 1000MHz)	Refer to data	AC 120V	Hunter Chiang
Radiated emissions (Above 1GHz)	Refer to data	AC 120V	Hunter Chiang
Bandwidth	24 °C, 46 %	AC 120V	Hunter Chiang
Output Power	24 °C, 46 %	AC 120V	Hunter Chiang
Power Spectral Density	24 °C, 46 %	AC 120V	Hunter Chiang
Antenna conducted Spurious Emission	24 °C, 46 %	AC 120V	Hunter Chiang



1.4 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

Test Software		IPOP	V4.0	
Modulation Mode	2402 MHz	2440 MHz	2480 MHz	Data Rate
BLE 5.0	20	20	20	1 Mbps

2 GENERAL INFORMATION

2.1 DESCRIPTION OF EUT

Equipment	AX3600 Ceiling Mount Wi-Fi 6 Access Point	\neg
Model Name	EAP660 HD	
Brand Name	tp-link	
Serial Number	N/A	
Power Source	1# DC Voltage supplied from AC adapter. Model: T120200-2B4 2# DC Voltage supplied from PoE adapter.(Support unit)	
Power Rating	1# I/P: 100-240V~ 50/60Hz 0.8A O/P: 12.0V === 2.0A 2# 802.3at PoE: 42.5-57V===0.6A	
Operation Band	2400 MHz ~ 2483.5 MHz	
Operation Frequency	2402 MHz ~ 2480 MHz	
Modulation Technology	GFSK	
Transfer Rate	1 Mbps	
Output Power Max.	1 Mbps: 17.77 dBm (0.0598 W)	

NOTE:

(1) The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

Project No.: 2308G050 Page 9 of 50 Report Version: R01

(2) Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	20	2442
01	2404	21	2444
02	2406	22	2446
03	2408	23	2448
04	2410	24	2450
05	2412	25	2452
06	2414	26	2454
07	2416	27	2456
08	2418	28	2458
09	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

(3) Table for Filed Antenna:

Brand Name	P/N	Type	Frequency (MHz)	Gain (dBi)
tp-link	EAP660-Ant1	PIFA	2400-2500	2

(4) The above Antenna information are derived from the antenna data sheet provided by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

Project No.: 2308G050 Page 10 of 50 Report Version: R01

2.2 TEST MODES

Test Items	Test mode	Channel	Note
AC power line conducted emissions	Normal/Idle	-	-
Transmitter Radiated Emissions (below 1GHz)	1 Mbps	19	-
Transmitter Radiated Emissions	1 Mbps	00/39	Bandedge
(above 1GHz)	1 Mbps	00/19/39	Harmonic
Bandwidth	1 Mbps	00/19/39	-
Output Power	1 Mbps	00/19/39	-
Power Spectral Density	1 Mbps	00/19/39	-
Antenna conducted Spurious Emission	1 Mbps	00/19/39	-

NOTE:


(1)	For radiated emission band edge test, both	n Vertical and Horizontal	are evaluated,	but only the worst case
	(Vertical) is recorded.			

Project No.: 2308G050 Page 11 of 50 Report Version: R01



2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Equipment letters and Cable numbers refer to item numbers described in the tables of clause 2.4.

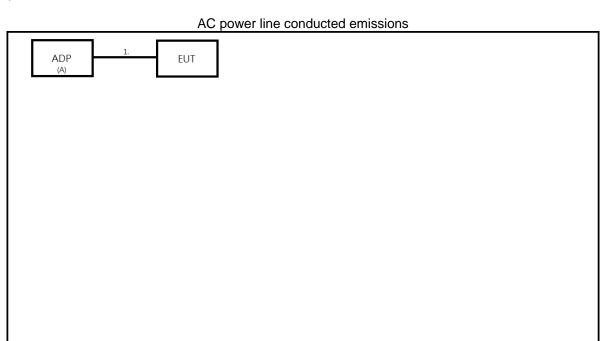

Radiated Emissions EUT 1 (A) ADP

2.4 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Remarks
Α	ADP	tp-link	T120200-2B4	Supplied by test requester

1 DC Cable NO 1.5m NO Supplied by test requester	Item	Cable Type	Ferrite Core	Length	Shielded	Remarks
	1	DC Cable	NO	1.5m	NO	

3 AC POWER LINE CONDUCTED EMISSIONS TEST

3.1 LIMIT

Frequency	Limit (dBµV)		
(MHz)	Quasi-peak	Average	
0.15 - 0.5	66 - 56 *	56 - 46 *	
0.50 - 5.0	56	46	
5.0 - 30.0	60	50	

NOTE:

(1) The tighter limit applies at the band edges.

(2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

(3) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)

Margin Level = Measurement Value - Limit Value

Calculation example:

Reading Level		Correct Factor		Measurement Value
38.22	+	3.45	II	41.67

Measurement Value		Limit Value		Margin Level
41.67	-	60	=	-18.33

The following table is the setting of the receiver.

Receiver Parameter	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

3.2 TEST PROCEDURE


- a. The EUT was placed 0.8 m above the horizontal ground plane with the EUT being connected to the power mains through a line impedance stabilization network (LISN).
 - All other support equipment were powered from an additional LISN(s).
 - The LISN provides 50 Ohm/50uH of impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle to keep the cable above 40 cm.
- c. Excess I/O cables that are not connected to a peripheral shall be bundled in the center.
 - The end of the cable will be terminated, using the correct terminating impedance.
 - The overall length shall not exceed 1 m.
- d. The LISN is spaced at least 80 cm from the nearest part of the EUT chassis.
- e. For the actual test configuration, please refer to the related Item EUT TEST PHOTO.

NOTE:

- (1) In the results, each reading is marked as Peak, QP or AVG per the detector used. BW=9 kHz (6 dB Bandwidth)
- (2) All readings are Peak unless otherwise stated QP or AVG in column of Note. Both the QP and the AVG readings must be less than the limit for compliance.

Project No.: 2308G050 Page 13 of 50 Report Version: R01

3.3 TEST SETUP

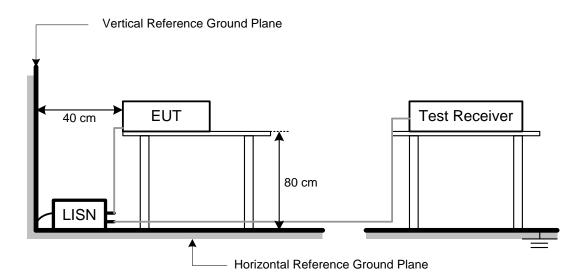

3.4 TEST RESULT

Please refer to the **APPENDIX A**.

4 RADIATED EMISSIONS TEST

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205, then the 15.209 limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency	Field Strength	Measurement Distance
(MHz)	(microvolts/meter)	(meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSIONS MEASUREMENT (Above 1000 MHz)

	Frequency	Radiated (dBu	Measurement Distance	
(MHz)		Peak	Average	(meters)
ſ	Above 1000	74	54	3

NOTE:

- (1) The limit for radiated test was performed according to FCC CFR Title 47, Part 15, Subpart C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

Calculation example:

Reading Level		Correct Factor		Measurement Value
41.91	+	-8.36	=	33.55

Measurement Value		Limit Value		Margin Level
33.55	-	43.50	=	-9.95

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW	1MHz / 3MHz for Peak,
(Emission in restricted band)	1MHz / 1/T for Average


Spectrum Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector




4.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. (above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m or 1.5 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item EUT TEST PHOTO.

4.3 TEST SETUP

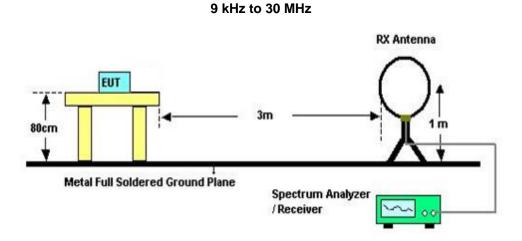



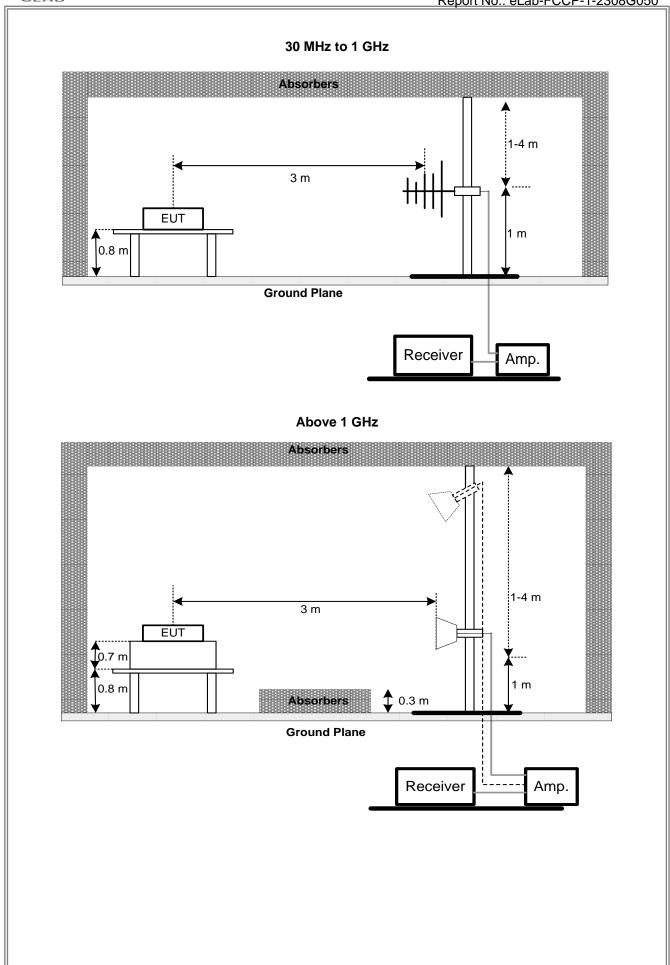



4.4 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.5 TEST RESULT - BELOW 30 MHZ

There were no emissions found below 30 MHz within 20 dB of the limit.

4.6 TEST RESULT - 30 MHZ TO 1 GHZ

Please refer to the APPENDIX B.

4.7 TEST RESULT - ABOVE 1 GHZ

Please refer to the APPENDIX C.

NOTE:

(1) No limit: This is fundamental signal, the judgment is not applicable. For fundamental signal judgment was referred to Peak output test.

Project No.: 2308G050 Page 18 of 50 Report Version: R01

5 BANDWIDTH TEST

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C					
Section	Frequency Range (MHz)	Result			
15.247(a)(2)	Bandwidth	>= 500KHz (6dB bandwidth)	2400-2483.5	PASS	

5.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = 2.5 ms.

5.3 TEST SETUP

EUT	SPECTRUM
	ANALYZER

5.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.5 TEST RESULTS

Please refer to the APPENDIX D.

6 OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247), Subpart C					
Section	Test Item	Limit	Frequency Range (MHz)	Result	
15.247(b)(3)	Maximum Output Power	1 watt or 30dBm	2400-2483.5	PASS	

6.2 TEST PROCEDURE

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
- b. The maximum peak conducted output power was performed in accordance with FCC KDB 558074 D01 15.247 Meas Guidance.

6.3 TEST SETUP

EUT	Power Meter
	1 ower weter

6.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.5 TEST RESULTS

Please refer to the APPENDIX E.

7 POWER SPECTRAL DENSITY TEST

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C						
Section Test Item		Limit	Frequency Range (MHz)	Result		
15.247(e)	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS		

7.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW=3KHz, VBW=10 KHz, Sweep time = auto.

7.3 TEST SETUP



7.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.5 TEST RESULTS

Please refer to the APPENDIX F.

8 ANTENNA CONDUCTED SPURIOUS EMISSION

8.1 APPLIED PROCEDURES / LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.

8.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = 10 ms.

8.3 TEST SETUP



8.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.5 TEST RESULTS

Please refer to the APPENDIX G.



9 LIST OF MEASURING EQUIPMENTS

	AC Power Line Conducted Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until	
1	TWO-LINE V-NETWORK	R&S	ENV216	101051	2024/7/21	2024/7/20	
2	Test Cable	EMCI	EMCRG58-BM-B M-9000	210501	2022/12/15	2023/12/14	
3	MXE EMI Receiver	Agilent	N9038A	MY54130009	2023/06/26	2024/06/25	
4	Measurement Software	EZ	EZ_EMC (Version NB-03A1-01)	N/A	N/A	N/A	

	Radiated Emissions							
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until		
1	Preamplifier	EMCI	EMC051845SE	980779	2022/12/19	2023/12/18		
2	Preamplifier	EMCI	EMC184045SE	980512	2022/12/02	2023/12/01		
3	Preamplifier	EMCI	EMC001340	980555	2022/12/05	2023/12/04		
4	Test Cable	EMCI	EMCCFD400-NM -NM-8000	200343	2022/11/15	2023/11/14		
5	Test Cable	EMCI	EMC105-SM-SM- 3000	210118	2022/12/08	2023/12/07		
6	Test Cable	EMCI	EMC105-SM-SM- 7000	210117	2022/11/15	2023/11/14		
7	Test Cable	EMCI	EMCCFD400-NM -NM-3300	200348	2022/11/15	2023/11/14		
8	EXA Signal Analyzer	keysight	N9010A	MY56480554	2023/9/12	2024/9/11		
9	Loop Ant	Electro-Metrics	EMCI-LPA600	274	2023/06/28	2024/06/27		
10	Horn Antenna	RFSPIN	DRH18-E	BBHA9170340	2023/02/10	2024/02/09		
11	Horn Ant	Schwarzbeck	BBHA 9170D	210109A18E	2023/06/29	2024/06/28		
12	Log-bicon Antenna	Schwarzbeck	VULB9168	9168-1207	2023/01/13	2024/01/12		
13	6dB Attenuator	EMCI	EMCI-N-6-06	AT-N0690	2023/01/13	2024/01/12		
14	Measurement Software	EZ	EZ_EMC (Version NB-03A1-01)	N/A	N/A	N/A		

Bandwidth						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	EXA Signal Analyzer	keysight	N9010A	MY56480554	2023/9/12	2024/9/11

Output Power						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	EXA Signal Analyzer	keysight	N9010A	MY56480554	2023/9/12	2024/9/11



Power Spectral Density						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	EXA Signal Analyzer	keysight	N9010A	MY56480554	2023/9/12	2024/9/11

Antenna conducted Spurious Emission							
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until	
1	EXA Signal Analyzer	keysight	N9010A	MY56480554	2023/9/12	2024/9/11	

Remark: "N/A" denotes no model name, no serial no. or no calibration specified. All calibration period of equipment list is one year.




Project No.: 2308G050 Page 25 of 50 Report Version: R01



APPENDIX A	AC POWER LINE CONDUCTED EMISSIONS

Project No.: 2308G050 Page 26 of 50 Report Version: R01


Test Mode	Normal	Tested Date	2023/9/10
Test Frequency	-	Phase	Line

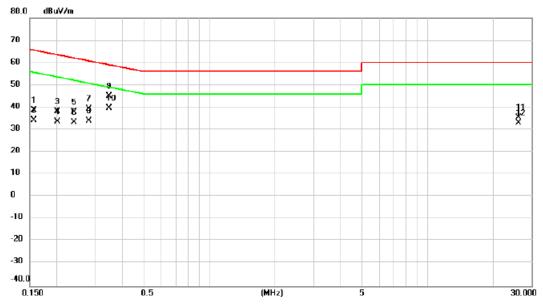

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
	MHz	dBu∀/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	0.1566	29.17	9.67	38.84	65.64	-26.80	QP	
2	0.1566	24.72	9.67	34.39	55.64	-21.25	AVG	
3	0.2007	28.51	9.67	38.18	63.58	-25.40	QP	
4	0.2007	24.00	9.67	33.67	53.58	-19.91	AVG	
5	0.2406	28.32	9.67	37.99	62.08	-24.09	QP	
6	0.2406	23.65	9.67	33.32	52.08	-18.76	AVG	
7	0.2812	29.70	9.66	39.36	60.78	-21.42	QP	
8	0.2812	24.38	9.66	34.04	50.78	-16.74	AVG	
9	0.3471	35.33	9.66	44.99	59.03	-14.04	QP	
10 *	0.3471	29.88	9.66	39.54	49.03	-9.49	AVG	
11	26.0750	25.27	10.20	35.47	60.00	-24.53	QP	
12	26.0750	22.74	10.20	32.94	50.00	-17.06	AVG	

- (1) Measurement Value = Reading Level + Correct Factor.(2) Margin Level = Measurement Value Limit Value.


Test Mod	le	Normal	Tested Date	2023/9/10
Test Fred	quency	-	Phase	Neutral

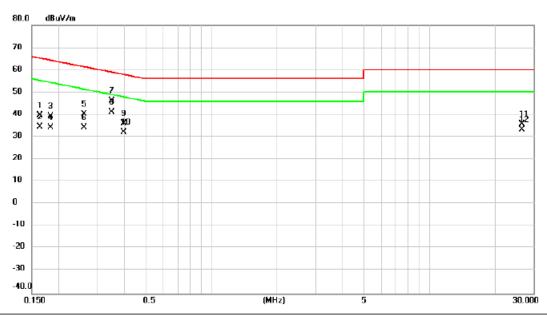

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.1636	30.01	9.67	39.68	65.28	-25.60	QP	
2		0.1636	24.81	9.67	34.48	55.28	-20.80	AVG	
3		0.1836	29.80	9.66	39.46	64.32	-24.86	QP	
4		0.1836	24.58	9.66	34.24	54.32	-20.08	AVG	
5		0.2615	30.52	9.65	40.17	61.38	-21.21	QP	
6		0.2615	24.75	9.65	34.40	51.38	-16.98	AVG	
7		0.3481	36.56	9.66	46.22	59.01	-12.79	QP	
8	*	0.3481	31.46	9.66	41.12	49.01	-7.89	AVG	
9		0.3975	26.43	9.67	36.10	57.91	-21.81	QP	
10		0.3975	22.52	9.67	32.19	47.91	-15.72	AVG	
11		26.6000	25.41	10.43	35.84	60.00	-24.16	QP	
12		26.6000	22.82	10.43	33.25	50.00	-16.75	AVG	

- (1) Measurement Value = Reading Level + Correct Factor.(2) Margin Level = Measurement Value Limit Value.


Test Mode	Idle	Tested Date	2023/9/11
Test Frequency	-	Phase	Line

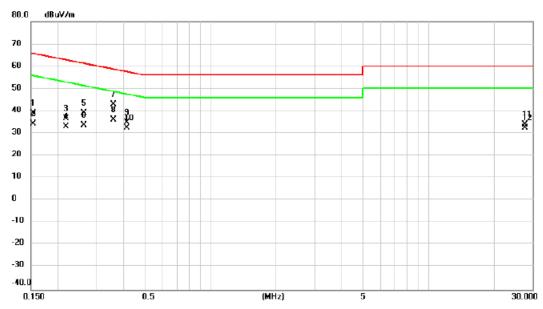

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
	MHz	dBu∀/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	0.1535	29.44	9.67	39.11	65.81	-26.70	QP	
2	0.1535	24.63	9.67	34.30	55.81	-21.51	AVG	
3	0.2180	27.10	9.67	36.77	62.89	-26.12	QP	
4	0.2180	23.40	9.67	33.07	52.89	-19.82	AVG	
5	0.2627	29.40	9.66	39.06	61.35	-22.29	QP	
6	0.2627	23.98	9.66	33.64	51.35	-17.71	AVG	
7	0.3593	33.24	9.66	42.90	58.74	-15.84	QP	
8 *	0.3593	26.25	9.66	35.91	48.74	-12.83	AVG	
9	0.4140	25.11	9.67	34.78	57.57	-22.79	QP	
10	0.4140	22.72	9.67	32.39	47.57	-15.18	AVG	
11	27.7000	23.84	10.20	34.04	60.00	-25.96	QP	
12	27.7000	22.33	10.20	32.53	50.00	-17.47	AVG	

- (1) Measurement Value = Reading Level + Correct Factor.(2) Margin Level = Measurement Value Limit Value.

Test Mode	Idle	Tested Date	2023/9/11
Test Frequency	-	Phase	Neutral

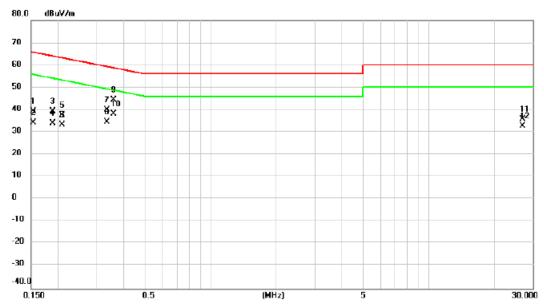

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	0.1535	29.83	9.67	39.50	65.81	-26.31	QP	
2	0.1535	24.70	9.67	34.37	55.81	-21.44	AVG	
3	0.1881	29.55	9.66	39.21	64.12	-24.91	QP	
4	0.1881	24.21	9.66	33.87	54.12	-20.25	AVG	
5	0.2081	28.03	9.66	37.69	63.28	-25.59	QP	
6	0.2081	23.72	9.66	33.38	53.28	-19.90	AVG	
7	0.3334	30.38	9.66	40.04	59.37	-19.33	QP	
8	0.3334	24.96	9.66	34.62	49.37	-14.75	AVG	
9	0.3580	34.66	9.66	44.32	58.77	-14.45	QP	
10 *	0.3580	28.39	9.66	38.05	48.77	-10.72	AVG	
11	26.9250	25.40	10.43	35.83	60.00	-24.17	QP	
12	26.9250	22.45	10.43	32.88	50.00	-17.12	AVG	


- (1) Measurement Value = Reading Level + Correct Factor.(2) Margin Level = Measurement Value Limit Value.



APPENDIX B	RADIATED EMISSIONS - 30 MHZ TO 1 GHZ

Project No.: 2308G050 Page 31 of 50 Report Version: R01


Test Mode	BLE 5.0 (1 Mbps)	Test Date	2023/9/22
Test Frequency	2440MHz	Polarization	Vertical
Temp	24°C	Hum.	46%

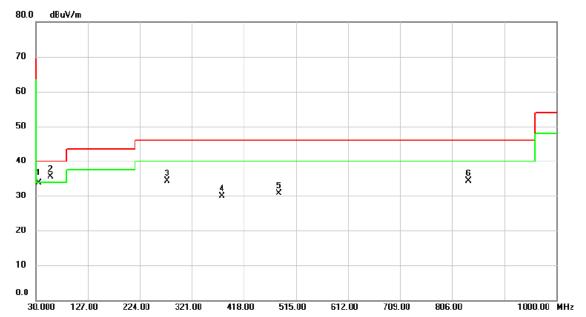

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		35.8200	46.91	-13.12	33.79	40.00	-6.21	QP	113	360	
2	*	58.1300	47.24	-11.80	35.44	40.00	-4.56	peak	100	284	
3		274.4400	45.33	-11.08	34.25	46.00	-11.75	peak	100	266	
4		377.2600	38.39	-8.41	29.98	46.00	-16.02	peak	100	52	
5		482.9900	36.26	-5.63	30.63	46.00	-15.37	peak	100	195	
6		836.0700	33.38	0.96	34.34	46.00	-11.66	peak	130	360	

- (1) Measurement Value = Reading Level + Correct Factor.(2) Margin Level = Measurement Value Limit Value.

Test Mode	BLE 5.0 (1 Mbps)	Test Date	2023/9/22
Test Frequency	2440MHz	Polarization	Horizontal
Temp	24°C	Hum.	46%

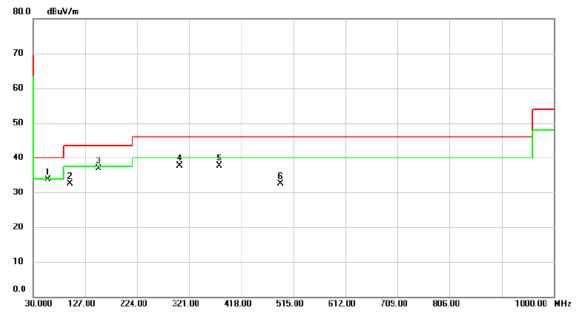

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	58.1300	45.57	-11.80	33.77	40.00	-6.23	peak	200	242	
2		98.8700	48.84	-16.29	32.55	43.50	-10.95	peak	200	317	
3		152.2200	48.28	-11.35	36.93	43.50	-6.57	peak	200	163	
4	;	303.5400	47.98	-10.26	37.72	46.00	-8.28	peak	100	142	
5	;	377.2600	46.02	-8.41	37.61	46.00	-8.39	peak	100	111	
6	-	490.7500	37.93	-5.50	32.43	46.00	-13.57	peak	200	200	

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value Limit Value.




APPENDIX C	ADIATED EMISSIONS - ABOVE 1 GHZ

Project No.: 2308G050 Page 34 of 50 Report Version: R01



l			
Test Mode	BLE 5.0 (1 Mbps)	Test Date	2023/10/16
Test Frequency	2402MHz	Polarization	Vertical
Temp	25°C	Hum.	47%

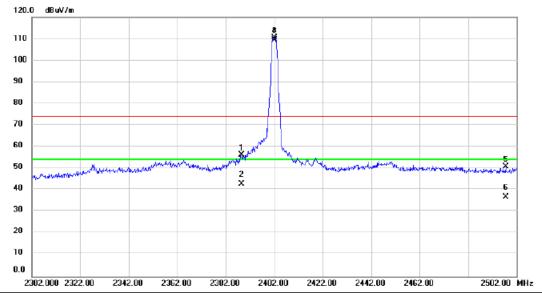


No.	Mk	c. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		Antenna Height	Table Degree	
		MHz	dBu∀	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		2388.600	62.77	-6.45	56.32	74.00	-17.68	peak			
2		2388.600	49.26	-6.45	42.81	54.00	-11.19	AVG			
3	Χ	2402.200	116.95	-6.43	110.52	74.00	36.52	peak			NO Limit
4	*	2402.200	115.71	-6.43	109.28	54.00	55.28	AVG			NO Limit
5		2497.600	57.21	-6.28	50.93	74.00	-23.07	peak			
6		2497.600	43.18	-6.28	36.90	54.00	-17.10	AVG			

- (1) Measurement Value = Reading Level + Correct Factor.(2) Margin Level = Measurement Value Limit Value.



Test Mode	BLE 5.0 (1 Mbps)	Test Date	2023/10/16
Test Frequency	2480MHz	Polarization	Vertical
Temp	25°C	Hum.	47%

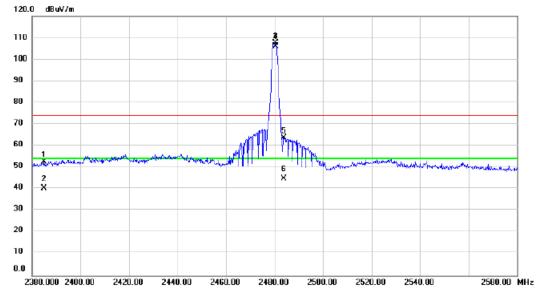

No.	Mk	c. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		Antenna Height	Table Degree	
		MHz	dBu∀	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		2385.000	59.13	-6.45	52.68	74.00	-21.32	peak			
2		2385.000	46.83	-6.45	40.38	54.00	-13.62	AVG			
3	Х	2480.400	113.79	-6.31	107.48	74.00	33.48	peak			NO Limit
4	*	2480.400	112.49	-6.31	106.18	54.00	52.18	AVG			NO Limit
5		2483.800	70.20	-6.30	63.90	74.00	-10.10	peak			
6		2483.800	51.17	-6.30	44.87	54.00	-9.13	AVG			

- (1) Measurement Value = Reading Level + Correct Factor.(2) Margin Level = Measurement Value Limit Value.


Test Mode	BLE 5.0 (1 Mbps)	Test Date	2023/9/22
Test Frequency	2402MHz	Polarization	Vertical
Temp	24°C	Hum.	46%



No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		Antenna Height		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		4804.000	53.22	-8.90	44.32	74.00	-29.68	peak			
2	*	4804.000	47.82	-8.90	38.92	54.00	-15.08	AVG			

- (1) Measurement Value = Reading Level + Correct Factor.(2) Margin Level = Measurement Value Limit Value.


Test Mode	BLE 5.0 (1 Mbps)	Test Date	2023/9/22
Test Frequency	2402MHz	Polarization	Horizontal
Temp	24°C	Hum.	46%

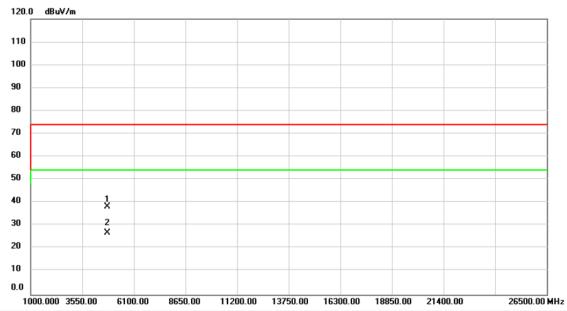

No.	Mk	. Freq.		Correct Factor	Measure- ment		Margin		Antenna Height		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		4804.000	47.18	-8.90	38.28	74.00	-35.72	peak			
2	*	4804.000	35.71	-8.90	26.81	54.00	-27.19	AVG			

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value Limit Value.

Test Mode	BLE 5.0 (1 Mbps)	Test Date	2023/9/22
Test Frequency	2440MHz	Polarization	Vertical
Temp	24°C	Hum.	46%

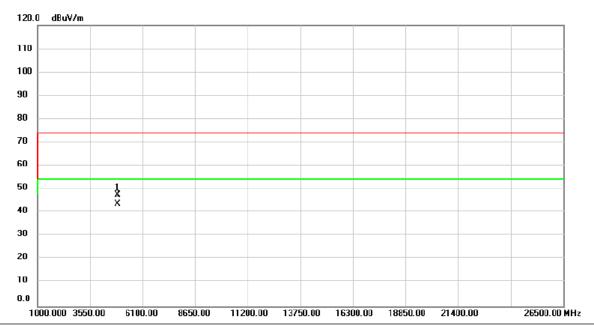

No	. M	k. Freq.	Reading Level	Correct Factor	Measure- ment		Margin		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		4880.000	56.16	-8.66	47.50	74.00	-26.50	peak			
2	*	4880.000	52.24	-8.66	43.58	54.00	-10.42	AVG			

- (1) Measurement Value = Reading Level + Correct Factor.(2) Margin Level = Measurement Value Limit Value.


Test Mode	BLE 5.0 (1 Mbps)	Test Date	2023/9/22
Test Frequency	2440MHz	Polarization	Horizontal
Temp	24°C	Hum.	46%



No.	Mk	. Freq.	_	Correct Factor	Measure- ment		Margin		Antenna Height		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		4960.000	48.20	-8.40	39.80	74.00	-34.20	peak			
2	*	4960.000	35.27	-8.40	26.87	54.00	-27.13	AVG			

- (1) Measurement Value = Reading Level + Correct Factor.(2) Margin Level = Measurement Value Limit Value.

Test Mode	BLE 5.0 (1 Mbps)	Test Date	2023/9/22
Test Frequency	2480MHz	Polarization	Vertical
Temp	24°C	Hum.	46%

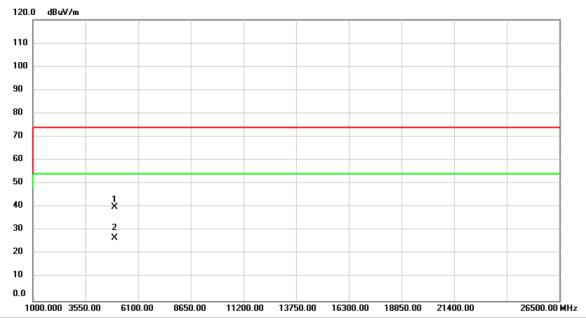

No.	Mk	. Freq.	Reading Level		Measure- ment		Margin		Antenna Height		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		4960.000	48.35	-8.40	39.95	74.00	-34.05	peak			
2	*	4960.000	35.29	-8.40	26.89	54.00	-27.11	AVG			

- (1) Measurement Value = Reading Level + Correct Factor.(2) Margin Level = Measurement Value Limit Value.

Test Mode	BLE 5.0 (1 Mbps)	Test Date	2023/9/22
Test Frequency	2480MHz	Polarization	Horizontal
Temp	24°C	Hum.	46%



	No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		Antenna Height		
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
-	1		4960.000	48.20	-8.40	39.80	74.00	-34.20	peak			
-	2	*	4960.000	35.27	-8.40	26.87	54.00	-27.13	AVG			

- (1) Measurement Value = Reading Level + Correct Factor.(2) Margin Level = Measurement Value Limit Value.




ELAB		Report No.: eLab-FCCP-1-2308G050
	APPENDIX D	BANDWIDTH

Project No.: 2308G050 Page 43 of 50 Report Version: R01



Test Mode: 1Mbps

Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2402	1.0868	1.0776	500	Pass
2440	1.0913	1.0788	500	Pass
2480	1.0863	1.0764	500	Pass

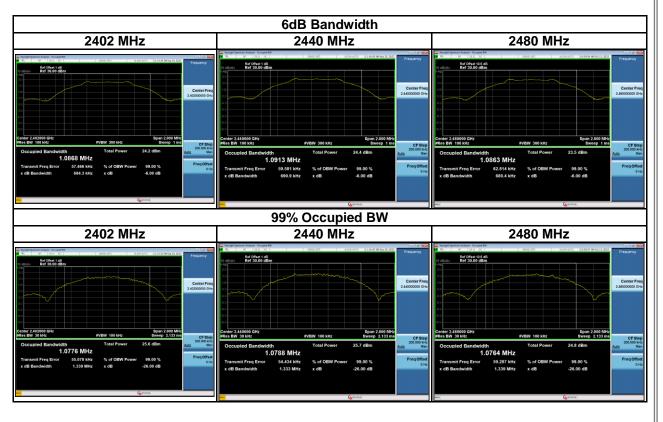



elab		Report No.: eLab-FCCP-1-2308G050
	APPENDIX E	OUTPUT POWER

Project No.: 2308G050 Page 45 of 50 Report Version: R01



Test Mode :	1Mbps	Tested Date	2023/9/25, 2023/10/13
-------------	-------	-------------	--------------------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	17.60	0.0575	30.00	1.0000	Pass
2440	17.77	0.0598	30.00	1.0000	Pass
2480	16.95	0.0495	30.00	1.0000	Pass

Project No.: 2308G050 Page 46 of 50 Report Version: R01

APF	PENDIX F	POWER SPECTRAL DENSITY TEST	

Project No.: 2308G050 Page 47 of 50 Report Version: R01



Test Mode: 1Mbps

Frequency (MHz)	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Test Result
2402	4.87	8	Pass
2440	6.42	8	Pass
2480	5.22	8	Pass





APPENDIX G	ANTENNA CONDUCTED SPURIOUS EMISSION

Project No.: 2308G050 Page 49 of 50 Report Version: R01





Test Mode: 1Mbps

