

EXHIBIT E- RADIATED SPURIOUS EMISSION DATA

1 CDMA BC0

1.1 CDMA BC0 LCH

Test result

Project Number: Certification

Test Time: 2022-10-31_11.10.13

EUT Name: N.A

Test Engineer: LS

Manufacturer: N.A

Test Standard: FCC

Model: UT 30

Work Addition: TX

Temp.(oC): 24

Load: full load

Hum.: 58%

Remark: DR-RSE01-E22090034-01#05

RSE Test case: CE_FCC_FCC PART22&24&27_FCC_CDMA_EVDO



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
277.350	-69.75	-13.11	-13.0	-56.75	169.00	Vertical	Vertical	Pass
824.188	-52.63	1.94	-13.0	-39.63	47.70	Vertical	Vertical	Pass
1649.500	-39.95	-0.60	-13.0	-26.95	207.60	Vertical	Vertical	Pass
2473.500	-40.85	3.73	-13.0	-27.85	186.40	Vertical	Vertical	Pass
6937.500	-30.08	19.32	-13.0	-17.08	353.10	Vertical	Vertical	Pass
9307.000	-26.00	29.28	-13.0	-13.00	100.00	Vertical	Vertical	Pass

1.2 CDMA BC0 MCH

Test result

Project Number: Certification

Test Time: 2022-10-31_11.53.32

EUT Name: N.A

Test Engineer: LS

Manufacturer: N.A

Test Standard: FCC

Model: UT 30

Work Addition: TX


Temp.(oC): 24

Load: full load

Hum.: 58%

Remark: DR-RSE01-E22090034-01#05

RSE Test case_CE_FCC_FCC PART22&24&27_FCC CDMA_EVDO

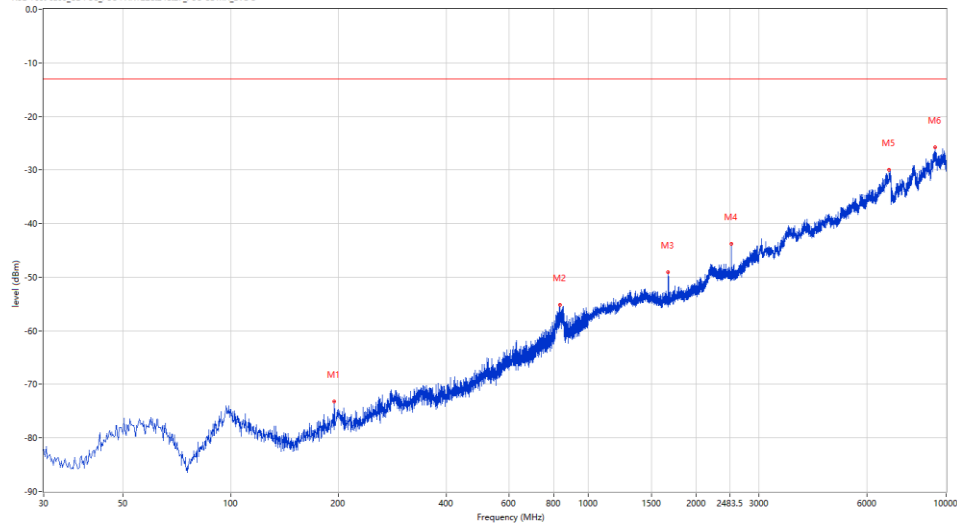

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
194.900	-73.22	-15.28	-13.0	-60.22	7.00	Vertical	Vertical	Pass
833.402	-55.11	2.38	-13.0	-42.11	6.00	Vertical	Vertical	Pass
1672.500	-49.00	-0.92	-13.0	-36.00	173.30	Vertical	Vertical	Pass
2509.500	-43.78	4.06	-13.0	-30.78	231.40	Vertical	Vertical	Pass
6932.250	-29.92	19.24	-13.0	-16.92	45.60	Vertical	Vertical	Pass
9300.000	-25.71	29.38	-13.0	-12.71	357.80	Vertical	Vertical	Pass

1.3 CDMA BC0 HCH

Test result

Project Number: Certification

Test Time: 2022-10-31_11.24.01

EUT Name: N.A

Test Engineer: LS

Manufacturer: N.A

Test Standard: FCC

Model: UT 30

Work Addition: TX


Temp.(oC): 24

Load: full load

Hum.: 58%

Remark: DR-RSE01-E22090034-01#05

RSE Test case_FCC_FCC PART22824&27_FCC CDMA_EVDO

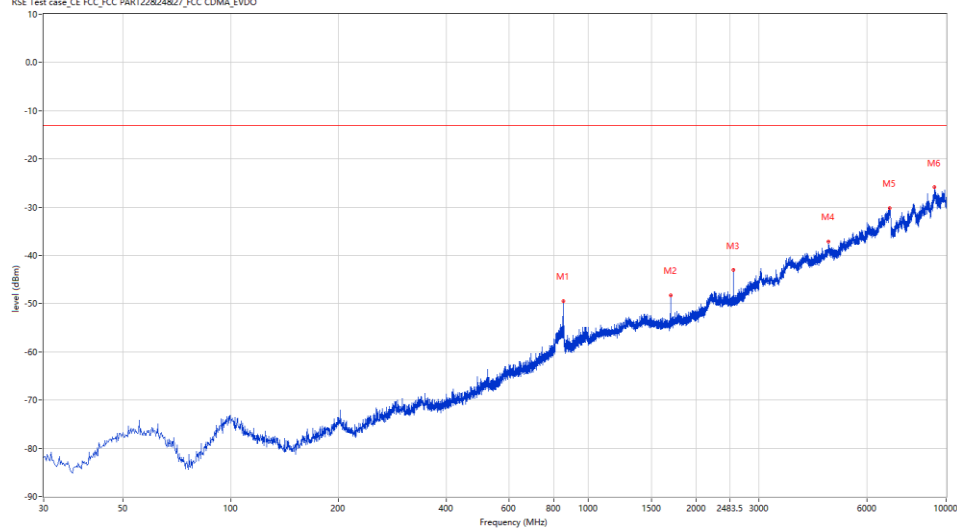

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
852.075	-49.43	3.29	-13.0	-36.43	32.00	Vertical	Vertical	Pass
1697.000	-48.26	-0.58	-13.0	-35.26	288.60	Vertical	Vertical	Pass
2544.500	-42.96	4.32	-13.0	-29.96	225.70	Vertical	Vertical	Pass
4697.500	-37.07	13.60	-13.0	-24.07	277.90	Vertical	Vertical	Pass
6955.000	-30.22	19.45	-13.0	-17.22	330.70	Vertical	Vertical	Pass
9291.250	-25.80	29.15	-13.0	-12.80	172.60	Vertical	Vertical	Pass

2 EVDO BC0

2.1 EVDO BC0 LCH

Test result

Project Number: Certification

Test Time: 2022-10-31_10.10.40

EUT Name: N.A

Test Engineer: LS

Manufacturer: N.A

Test Standard: FCC

Model: UT 30

Work Addition: TX


Temp.(oC): 24

Load: full load

Hum.: 58%

Remark: DR-RSE01-E22090034-01#05

RSE Test case_CCE FCC PART228/248/27_FCC CDMA_EVDO

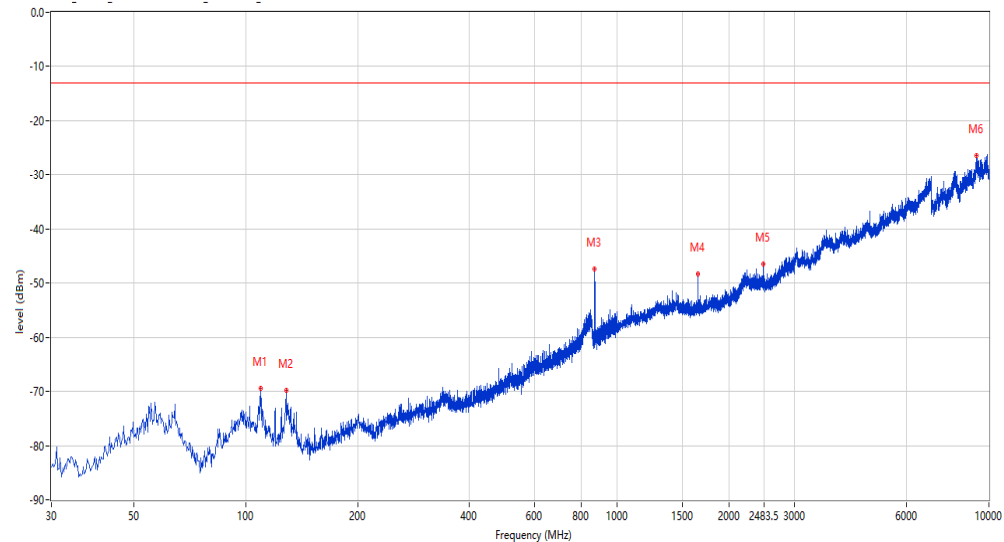

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
109.783	-69.47	-16.39	-13.0	-56.47	16.80	Vertical	Vertical	Pass
128.455	-69.74	-18.08	-13.0	-56.74	0.00	Vertical	Vertical	Pass
869.778	-47.43	0.05	-13.0	-34.43	50.30	Vertical	Vertical	Pass
1650.000	-48.34	-0.60	-13.0	-35.34	51.60	Vertical	Vertical	Pass
2475.500	-46.43	3.77	-13.0	-33.43	174.40	Vertical	Vertical	Pass
9272.001	-26.53	28.66	-13.0	-13.53	233.30	Vertical	Vertical	Pass

2.2 EVDO BC0 MCH

Test result

Project Number: Certification

Test Time: 2022-10-31_10.14.35

EUT Name: N.A

Test Engineer: LS

Manufacturer: N.A

Test Standard: FCC

Model: UT 30

Work Addition: TX


Temp.(oC): 24

Load: full load

Hum.: 58%

Remark: DR-RSE01-E22090034-01#10

RSE Test case_FCC_FCC PART22&24&27_FCC CDMA_EVDO

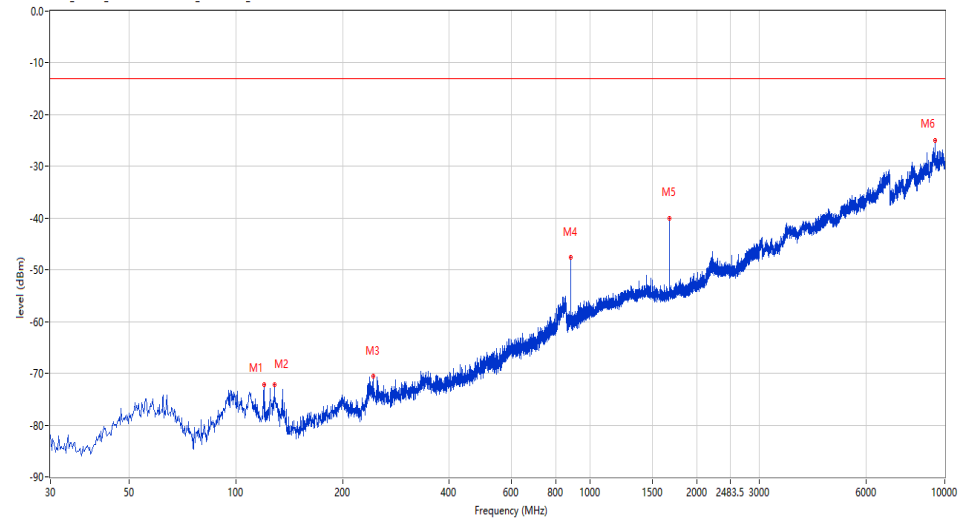

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
119.967	-72.26	-17.78	-13.0	-59.26	358.50	Vertical	Vertical	Pass
128.455	-72.19	-18.08	-13.0	-59.19	319.70	Vertical	Vertical	Pass
244.370	-70.57	-14.55	-13.0	-57.57	227.40	Vertical	Vertical	Pass
881.660	-47.59	-0.18	-13.0	-34.59	173.80	Vertical	Vertical	Pass
1672.000	-40.12	-0.92	-13.0	-27.12	51.70	Vertical	Vertical	Pass
9396.250	-24.98	28.81	-13.0	-11.98	254.70	Vertical	Vertical	Pass

2.3 EVDO BC0 HCH

Test result

Project Number: Certification

Test Time: 2022-10-31_10.17.01

EUT Name: N.A

Test Engineer: LS

Manufacturer: N.A

Test Standard: FCC

Model: UT 30

Work Addition: TX


Temp.(oC): 24

Load: full load

Hum.: 58%

Remark: DR-RSE01-E22090034-01#05

RSE Test case FCC_FCC PART22&24&27_FCC CDMA_EVDO

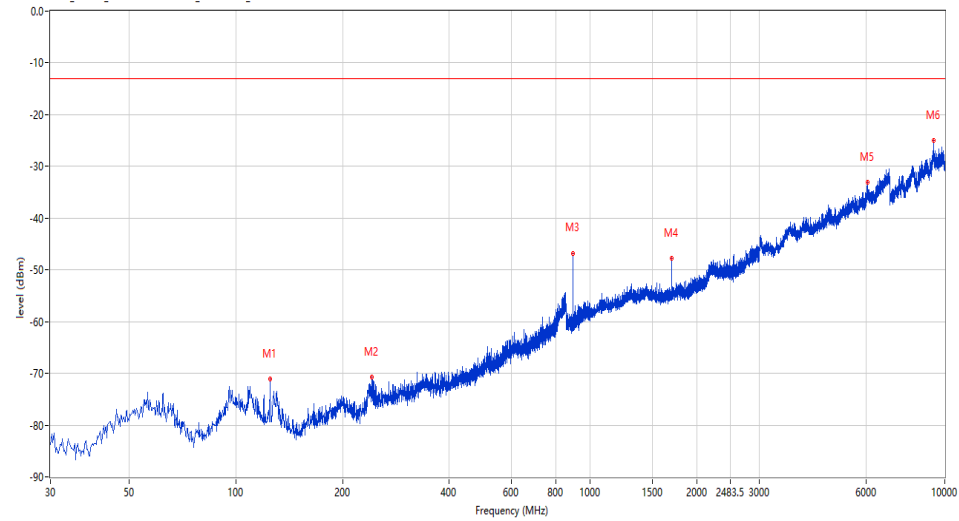

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
124.817	-71.16	-17.95	-13.0	-58.16	347.60	Vertical	Vertical	Pass
242.430	-70.76	-14.57	-13.0	-57.76	281.70	Vertical	Vertical	Pass
893.300	-46.78	-0.03	-13.0	-33.78	67.40	Vertical	Vertical	Pass
1696.000	-47.80	-0.60	-13.0	-34.80	16.20	Vertical	Vertical	Pass
6045.000	-33.12	16.83	-13.0	-20.12	160.30	Vertical	Vertical	Pass
9314.000	-25.01	29.19	-13.0	-12.01	257.80	Vertical	Vertical	Pass