

Report No.: SUCR241000040302

Rev.: 01 Page: 1 of 46

HAC (T-Coil) Test Report

Application No.: SUCR2410000403WM
Applicant: Sonim Technologies, Inc.

Address of Applicant: 4445 Eastgate Mall, Suite 200, San Diego, CA 92121, USA

Manufacturer: Sonim Technologies, Inc.

Address of Manufacturer: 4445 Eastgate Mall, Suite 200, San Diego, CA 92121, USA

EUT Description: Smart Phone

Model No: X800

Type No.: \$1003/\$1001/\$1004/\$1005/\$1006/\$1010

FCC ID: WYPS1003

Trade Mark: Sonim

Standards: ANSI C63.19-2019

CFR 47 FCC Part 20

Date of Receipt: 2024-10-15

Date of Test: 2024-10-21 to 2024-12-13

Date of Issue: 2024-12-17

Test Result : PASS *

Prepared by: Leon Liu/ Project Manager

Approved by: Nick HU/ Technical Manager (Title)

Nick Hu

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory

^{*} In the configuration tested, the EUT detailed in this report complied with the standards specified above.



Report No.: SUCR241000040302

Rev.: 01 Page: 2 of 46

	Revision Record					
Version	Description	Date	Remark			
01		2024-12-17	Original			

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sas.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms



Report No.: SUCR241000040302

Rev.: 01 Page: 3 of 46

TEST SUMMARY

Frequency Band HAC T-coil Test Results				
GSM 850	PASS			
PCS 1900	PASS			
WCDMA band 2	PASS			
WCDMA band 4	PASS			
WCDMA band 5	PASS			
LTE band 2	PASS			
LTE band 4	PASS			
LTE band 5	PASS			
LTE band 7	PASS			
LTE band 12	PASS			
LTE band 13	PASS			
LTE band 14	PASS			
LTE band 25	PASS			
LTE band 26	PASS			
LTE band 30	PASS			
LTE band 66	PASS			
LTE band 71	PASS			
LTE band 38	PASS			
LTE band 41	PASS			
LTE band 42	PASS			
LTE band 43	PASS			
LTE band 48	PASS			
FR1 n2	PASS			
FR1 n5	PASS			
FR1 n7	PASS			
FR1 n14	PASS			
FR1 n25	PASS			
FR1 n26	PASS			
FR1 n30	PASS			
FR1 n38	PASS			
FR1 n41	PASS			
FR1 n48	PASS			
FR1 1146	PASS			
	PASS			
FR1 n70 FR1 n71	PASS			
FR1 n77	PASS			
	PASS			
FR1 n78	PASS			
WLAN2.4GHz	PASS			
WLAN5GHz	PASS			
WLAN6GHz				
HAC ResultS: PASS				

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sas.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory



Report No.: SUCR241000040302

Rev.: 01 Page: 4 of 46

CONTENTS

1	GEN	IERAL INFORMATION	6
	1.1 1.2 1.3 1.4 1.5 1.6	Introduction Details of Client Test Location Test Facility General Description of EUT Test Specification ANSI C63.19-2019 limits	7 7 8 8 14
2	CAL	IBRATION CERTIFICATE	15
3	HAC	(T-COIL) MEASUREMENT SYSTEM	16
	3.1 3.2 3.3 3.4 3.5 3.6 3.7 3.8	Measurement System Diagram for SPEAG Robotic T-Coil Measurement System Calibration Audio Magnetic Probe AM1DV3 Test Arch Phone Holder AMCC- Audio Magnetic Calibration Coil AMMI - Audio Magnetic Measurement Instrument	17 24 25 25 25 26 26
4		ASUREMENT UNCERTAINTY EVALUATION	
5	5.1 5.2 5.3	T-Coil Performance Requirements T-Coil measurement points and reference plane T-Coil Measurement Procedure	29 31
6	T-C	DIL TESTING FOR CMRS VOICE	34
	6.1 6.2 6.3	General Description	34
7	T-C	DIL TESTING FOR CMRS IP VOICE	36
	7.1 7.2 7.3	VoLTE Tests Results VoWiFi Tests Results T-Coil testing for OTT VoIP Application	41
8	EQU	JIPMENT LIST	45
9	CAL	IBRATION CERTIFICATE	46
10) PHC	TOGRAPHS	46
11	I EUT	CONSTRUCTIONAL DETAILS	46
Α	PPEND	X A: DETAILED TEST RESULTS	46

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory



Report No.: SUCR241000040302

Rev.: 01 Page: 5 of 46

APPENDIX B: CALIBRATION CERTIFICATE	46
APPENDIX C: PHOTOGRAPHS	46
APPENDIX D: EUT CONSTRUCTIONAL DETAILS	46

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sas.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980

www.sgsgroup.com.cn



Report No.: SUCR241000040302

Rev.: 01 Page: 6 of 46

1 General Information

1.1 Introduction

The purpose of this standard is to provide tests and establish requirements for hearing aids and for WDs that allow a hearing aid user to effectively use a WD when both the hearing aid and WD meet the requirements of this standard. The various parameters required in order to demonstrate compatibility are measured. The design of the standard is such that when a hearing aid and a WD achieve the specified requirements, as measured by the methodology of this standard, the user of a hearing aid can effectively use a WD In order to provide for the usability of a hearing aid with a WD, several factors are coordinated, as follows:

- a) The field strength emitted by a WD must not exceed the RF immunity of the hearing aid.
- b) The T-Coil baseband H-field transmission of the WD must be compatible with the T-Coil mode of the hearing aid.
- c) The magnetic noise from the WD in the T-Coil band must not degrade the reception quality to unacceptable levels.

Both the WD's RF and audio-band emissions are measured. Hence, the following measurements are made for the WDs:

- a) RF amplitude modulation characteristics and power level or, optionally, near-feld E-field emissions
- b) T-Coil mode, magnetie signal strength in the audio band.
- c) T-Coil mode, magnetic noise in the audio band
- d) T-Coil mode, magnetic signal frequency response in the audio band

Corresponding to these quantities, the hearing aid is measured for the following:

- 1) RF immunity in microphone mode
- 2) RF immunity in T-Coil mode

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory



Report No.: SUCR241000040302

Rev.: 01 Page: 7 of 46

1.2 Details of Client

Applicant:	Sonim Technologies, Inc.	
Address:	445 Eastgate Mall, Suite 200, San Diego, CA 92121, USA	
Manufacturer:	Sonim Technologies, Inc.	
Address:	4445 Eastgate Mall, Suite 200, San Diego, CA 92121, USA	

1.3 Test Location

Company:	SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
	South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone
Post code:	215000
Test Engineer:	Alger Du

1.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

A2LA (Certificate No. 6336.01)

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

• Innovation, Science and Economic Development Canada

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

• FCC -Designation Number: CN1312

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an

accredited testing laboratory.

Designation Number: CN1312.

Test Firm Registration Number: 717327

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and justication is uses defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SUCR241000040302

Rev.: 01 Page: 8 of 46

1.5 General Description of EUT

Device Type :	portable device				
Exposure Category:	uncontrolled environment / general population				
Product Name:	XP Pro				
Model No.(EUT):	X800				
Trade Mark:	Sonim				
FCC ID:	WYPS1003				
Product Phase:	Identical Prototype				
IMEI:	016582000011097/ 016582000011105/				
Hardware Version:	V1.0				
Software Version:	X80.0-01-14.0-19.4	0.01			
Antenna Type:	PIFA Antenna				
	GSM: GMSK, 8PSK; WCDMA: QPSK;16QAM;				
Modulation Mode:	LTE: QPSK,16QAM,64QAM,256QAM;				
iviodulation iviode.	NR: BPSK,QPSK,16QAM,64QAM,256QAM,CP-OFDM				
	WIFI: DSSS, OFDM; BT: GFSK, π/4DQPSK,8DPSK				
Device Class:	В				
GPRS Multi-slots Class:	12	EGPRS Multi-slots Class:	33		
HSDPA UE Category:	10	HSUPA UE Category	6		
	4,tested with power	level 5(GSM850)			
Power Class	1,tested with power level 0(GSM1900)				
l Ower Class	3, tested with power control "all 1"(WCDMA Band)				
	3, tested with power control Max Power(LTE Band)				
	Band	Tx (MHz)	Rx (MHz)		
	GSM 850	824 - 849 MHz	869 - 894 MHz		
Frequency Bands:	PCS 1900	1850 - 1910 MHz	1930 - 1990 MHz		
l requeitcy bands.	WCDMA band 2	1850 -1910 MHz	1930 - 1990 MHz		
	WCDMA band 4	1710 -1755MHz	2110 - 2155MHz		
	WCDMA band 5	824 - 849MHz	869 - 894MHz		

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sas.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory



Report No.: SUCR241000040302

Rev.: 01 Page: 9 of 46

LTE band 2	1850 - 1910 MHz	1930 - 1990 MHz
LTE band 4	1710 - 1755 MHz	2110 - 2155 MHz
LTE band 5	824 - 849 MHz	869 - 894 MHz
LTE band 7	2500 - 2570 MHz	2620 - 2690 MHz
LTE band 12	699 - 716 MHz	729 - 746 MHz
LTE band 13	777 - 787 MHz	746 - 756 MHz
LTE band 14	788 - 798 MHz	758 - 768 MHz
LTE band 25	1850 - 1915 MHz	1930 - 1995 MHz
LTE band 26	814 - 849 MHz	859 - 894 MHz
LTE band 30	2305 - 2315 MHz	2350 - 2360 MHz
LTE band 38	2570 - 2620 MHz	2570 - 2620 MHz
LTE band 41	2496 - 2690 MHz	2496 - 2690 MHz
LTE band 42	3400 - 3600 MHz	3400 - 3600 MHz
LTE band 43	3600 - 3800 MHz	3600 - 3800 MHz
LTE band 48	3550 - 3700 MHz	3550 - 3700 MHz
LTE band 66	1710 - 1780 MHz	2110 - 2200 MHz
LTE band 71	663 - 698 MHz	617 - 652 MHz
FR1 n2	1850 - 1910 MHz	1930 - 1990 MHz
FR1 n5	824 - 849 MHz	869 - 894 MHz
FR1 n7	2500 - 2570 MHz	2620 - 2690 MHz
FR1 n14	788 - 798 MHz	758- 768 MHz
FR1 n25	1850 - 1915 MHz	1930 - 1995 MHz
FR1 n26	814 - 849 MHz	859 - 894 MHz
FR1 n30	2305 - 2315 MHz	2350 - 2360 MHz
FR1 n38	2570 - 2620 MHz	2570 - 2620 MHz
FR1 n41	2496 - 2690 MHz	2496 - 2690 MHz
FR1 n48	3550 - 3700 MHz	3550 - 3700 MHz
FR1 n66	1710 - 1780 MHz	2110 - 2200 MHz
FR1 n70	1695 - 1710 MHz	1995 - 2020 MHz
FR1 n71	663 - 698 MHz	617 - 652 MHz
FR1 n77	3300 - 4200 MHz	3300 - 4200 MHz
FR1 n78	3300 - 3800 MHz	3300 - 3800 MHz
WLAN2.4GHz	2412-2462 MHz	2412-2462 MHz

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sas.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory



Report No.: SUCR241000040302

Rev.: 01

Page: 10 of 46

		5180~5240MHz	5180~5240MHz	
	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	5260~5320MHz	5260~5320MHz	
	WLAN5GHz	5500~5720MHz	5500~5720MHz	
		5745~5825MHz	5745~5825MHz	
		5925-6425MHz	5925-6425MHz	
	WLAN6GHz	6425~6525MHz	6425~6525MHz	
	WLANOGHZ	6525~6875MHz	6525~6875MHz	
		6875~7125MHz	6875~7125MHz	
	Bluetooth	2400~2483.5MHz	2400~2483.5MHz	
	Model:	BAT-05000-21S		
Battery Information:	Normal Voltage:	3.87V		
	Rated capacity:	5000mAh		
	Manufacturer:	Shenzhen Aerospace Electronic Co., Ltd.		

Note:

*Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information, SGS is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.

Remark:

As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and justication is uses defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.




Report No.: SUCR241000040302

Rev.: 01

Page: 11 of 46

1.5.1 DUT Antenna Locations(Back view)

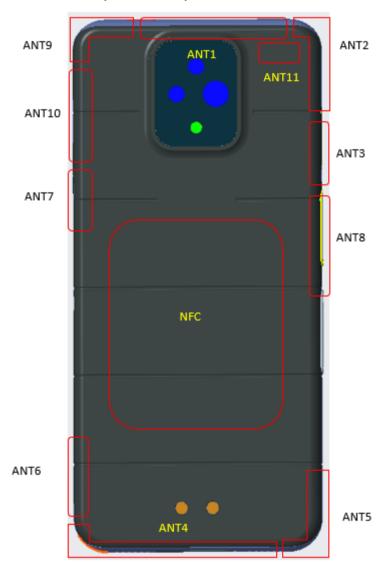

Note:

1) The diversity Antenna does not support transmitter function.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980

www.sgsgroup.com.cn



Report No.: SUCR241000040302

Rev.: 01

Page: 12 of 46

1.5.2 List of air interfaces/frequency bands

Air Interface	Band (MHz)	Туре	ANSI C63.19	Simultaneous	Name of Voice	Power
Air interrace	band (MIDZ)	туре	Tested	Transmitter	Service	Reduction
	850	VO	Yes		CMRS Voice	NO
GSM	1900			BT, Wi-Fi		
	EDGE	VD	Yes		NO	
	Band II					
WCDMA	Band IV	VO	Yes	BT, Wi-Fi	CMRS Voice	NO
	Band V			,		
	HSPA	VD	Yes		Google Meet*	
	LTE band 2					
	LTE band 4					
	LTE band 5					
	LTE band 7					
	LTE band 12					
LTE FDD	LTE band 13	VD	Yes	BT, Wi-Fi	VoLTE	NO
	LTE band 14			5.,	Google Meet*	
	LTE band 25					
	LTE band 26					
	LTE band 30					
	LTE band 66					
	LTE band 71					
	LTE band 38		Yes	BT, Wi-Fi	VoLTE Google Meet*	NO
	LTE band 41					
LTE TDD	LTE band 42	VD				
	LTE band 43					
	LTE band 48					
	FR1 n2				Google Meet*	NO
	FR1 n5					
	FR1 n7					
	FR1 n14					
FR1 FDD	FR1 n25	DT	Yes	BT, Wi-Fi		
	FR1 n26			,		
	FR1 n30					
	FR1 n66					
	FR1 n70					
	FR1 n71					
	FR1 n38			BT, Wi-Fi		
FD4 = 55	FR1 n41	DT	Yes		Google Meet*	NO
FR1 TDD	FR1 n48					
	FR1 n77					
	FR1 n78					

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sas.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory



Report No.: SUCR241000040302

Rev.: 01

Page: 13 of 46

	2450					
	5200					
	5300					
	5500					
Wi-Fi	5800	VD	Yes	WWAN	Google Meet*	NO
	U-NII 5					
	U-NII 6					
	U-NII 7					
	U-NII 8					
BT	2450	DT	No(1)	WWAN	NO	ОИ

VO: Legacy Cellular Voice Service

DT: Digital Transport (no voice)

*ANSI C63.19-2019 use table 6.1 to establish the Normal speech input level and NOTE 2 of table 6.1 identifies the group of VoIP voice services that use -16 dBm0 as the normal speech input level.

Remark:

- 1.The WLAN6GHz U-NII 6/7/8 were above 6GHz and were not evaluated due to outside of the current scope of ANSI C63.19 and FCC HAC regulations.
- 2.The WLAN6GHz UNI-5 was evaluated for operations which are entirely below 6GHz, above 6 GHz were not evaluated due outside of the current scope of ANSI C63.19 and FCC HAC regulations.
- Because features of Google Meet allow the option of voice-only communications, Meet has been tested for HAC/T-Coil compatibility to ensure the best user experience.
- 4. The Google Meet and google Fi the audio path, parameter and audio codec are all the same, therefore, the Google Meet is evaluation for this device to show compliance.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sqs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Tems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-and-C

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Member of the SGS Group (SGS SA)



Report No.: SUCR241000040302

Rev.: 01

Page: 14 of 46

1.6 Test Specification

Identity	Document Title
CFR 47 FCC Part 20	§20.19 Hearing aid-compatible mobile handsets.
ANSI C63.19-2019	American National Standard for Methods of Measurement of Compatibility between Wireless Communication Devices
KDB 285076 D01	HAC Guidance v06
KDB 285076 D02	T-Coil testing v04

1.7 ANSI C63.19-2019 limits

GSM operating modes:

- · The primary group shall include at least 25 measurement points.
- The secondary group shall include at least 125 contiguous measurement points.

Non-2G GSM operating modes:

- The primary group shall include at least 75 measurement points.
- · The secondary group shall include at least 300 contiguous measurement points

Additionally, to avoid an oddly shaped area of low noise, the secondary group shall include at least one longitudinal column of at least 10 contiguous qualifying oints and t least one transverse row containing at least 15 contiguous qualifying points.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SUCR241000040302

Rev.: 01

Page: 15 of 46

2 Calibration certificate

Temperature	Min. = 18°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%

Table 1: The Ambient Conditions

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sas.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980

\$2992980 www.sgsgroup.com.cn

Member of the SGS Group (SGS SA)



Report No.: SUCR241000040302

Rev.: Λ1

Page: 16 of 46

HAC (T-Coil) Measurement System

3.1 Measurement System Diagram for SPEAG Robotic

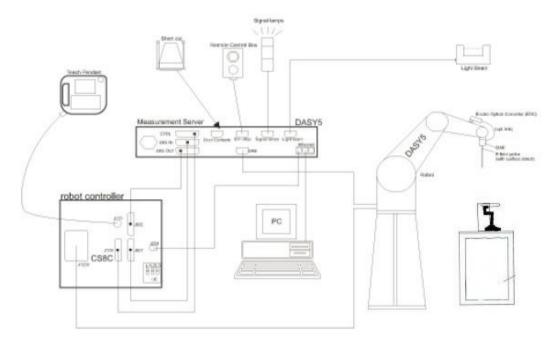


Fig. 1. The SPEAG Robotic Diagram

The DASY8 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stabile RX family) with controller, teach pendant and software. An arm extension is for accommodating the data acquisition electronics (DAE).
- · An Audio Magnetic probe.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, ADconversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 7.
- · DASY5 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The Test Arch SAM phantom
- The device holder for handheld mobile phones.
- Validation dipole kits allowing to validate the proper functioning of the system.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Tems-and-Conditions-and-Condit

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laborator



Report No.: SUCR241000040302

Rev.: 01

Page: 17 of 46

3.2 T-Coil Measurement

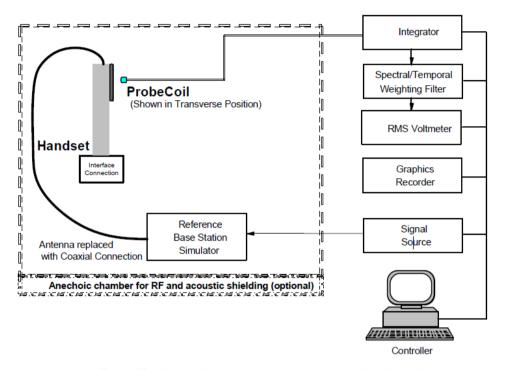


Fig. 2. T-coil signal measurement test setup-in call method

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980 www

Wireless Laborator

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.



Report No.: SUCR241000040302

Rev.: 01

Page: 18 of 46

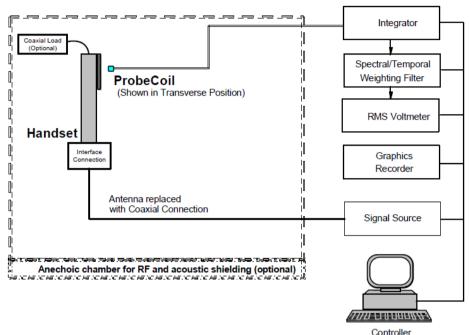


Fig. 3. T-coil signal measurement test setup-test mode method.

The reference axis is normal to the reference plane and passes through the center of the acoustie output (or the center of the whole array); or may be centered on or near a secondary inductive source. The actual location of the reference axis and resultant measurement area shall be noted in the test report.

The measurement area shall be 50 mm by 50 mm. The measurement area for both desired ABM signal and undesired ABM field may be located where the transverse magnetic measurements are optimum with regard to the requirements. However, the measurement area should be in the vicinity of the acoustic output of the WD and shall be in the same half of the phone as the WD receiver. In a WD handset with a centered receiver and a circularly symmetrical magnetic field, the measurement axis and the reference axis would coincide.

Measurements of desired ABM signal strength and undesired ABM field are made at 2.0 mm +0.5 mm or 4 mm intervals in an X-Y measurement area patter over the entire measurement area (676 measurement points total); either all measured or measured plus interpolated.

Note.

- #. The EUT do not use the special HAC SW.
- #. Setting the maximum volume for EUT during the measurement.
- #. For the measurement, it doesn't use the "post-test measurement processing of results".
- #. Per KDB 285076 D01v06, handsets that that have the ability to support concurrent connections using simultaneous transmissions shall be independently tested for each air interface/band given in ANSI C63.19-2019. At the present time ANSI C63.19 does not provide simultaneous transmission test procedures.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sqs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory



Report No.: SUCR241000040302

Rev.: 01

Page: 19 of 46

Define the all applicable inpot audio level as below according to c63 and KDB 285076 D02v04:

GSM input Level: -16dB UMTS input Level: -16dB VOLTE input Level: -16dB VOWIFI input Level: -16dB VONR input Level: -16dB OTT input Level: -16dB

For GSM/UMTS/VoLTE/VOWIF test setup and input level, the correct input level definition is via a communication tester CMW500 "Decoder Cal" and "Codec Cal" to set the correct audio input levels.

For VONR test setup and input level, the correct input level definition is via a communication tester CMX500 and External DAU USB sound card "Decoder Cal" and "Codec Cal" to set the correct audio input levels.

CMW500 and External DAU USB sound card is able to output 1 kHz audio signal equivalent to 3.14dBm0 at "Decoder Cal". configuration, the signal reference is used to adjust the AMMI gain setting to reach-16Bm0 for GSM/UMTS/VoLTE/VONR. CMW500/CMX500 input is calibrated and the relation between the analog input voltage and the internal level in dBm0 can be determined.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Document at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory



Report No.: SUCR241000040302

Rev.: 01

Page: 20 of 46

3.2.1 Define the input level for GSM/UMTS/LTE/WLAN

- 1. The Required gain factor for the specific signal shall typically be multiplied by this factor to achieve approx. The same level as for the 1kHz sine signal.
- 2. The below calculation formula is an example and showing how to determine the input level for the device.

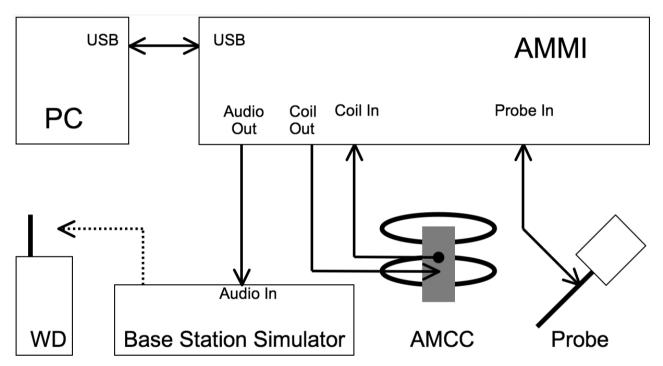


Fig. 2. T-coil signal measurement test setup

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Member of the SGS Group (SGS SA)



Report No.: SUCR241000040302

Rev.: Λ1

Page: 21 of 46

The predefined signal types have the following differences / factors compared to the 1kHz sine signal:

Signal [file name]	Duration [s]	Peak-to- RMS [dB]	RMS [dB]	Required gain factor *)	Gain setting
1kHz sine		3.0	0.0	1.00	
48k_1.025kHz_10s.wav	10	3.0	0.0	1.00	
48k_1kHz_3.15kHz_10s.wav	10	6.0	-3.0	1.42	
48k_315Hz_1kHz_10s.wav	10	6.0	-2.9	1.40	
48k_csek_8k_441_white_10s.wav	10	13.8	-10.5	3.34	
48k_multisine_50-5000_10s.wav	10	11.1	-7.9	2.49	
48k_voice_1kHz_1s.wav	1	16.2	-12.7	4.33	
48k_voice_300-3000_2s.wav	2	21.6	-18.6	8.48	

^(*) The gain for the specific signal shall typically be multiplied by this factor to acheive approx, the same level as for the 1kHz sine signal.

Insert the gain applicable for your setup in the last column of the table.

Input Level for GSM/UMTS/VoLTE/VOWIFI

iput Level for GSM/GMTS/VGLTL/VGVVIII										
Gain Value	dBm0	Full scal Voltage	dB	AMMI audio out dBv (RMS)	AMCC Coil Out (dBv (RMS)					
	3.14	1.5		0.55						
100	5.53		40	2.94	3.09					
8.39	-16		18.4 7		-18.44					
Signal Type	Duratio n (s)	Peak to RMS (dB)	RMS (dB)	Gain Factor	Gain Setting					
1kHz sine	-	3	0	1	8.39					
48k_voice_1kHz	1	15.74	-12.7	4.33	36.32					
48k_voice_300- 3000	2	21.57	-18.6	8.48	71.13					

Define the input level for OTT.

- 1. The Required gain factor for the specific signal shall typically be multiplied by this factor to achieve approx. The same level as for the 1kHz sine signal.
- The below calculation formula is an example and showing how to determine the input level for the device.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Tems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-and-C

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Member of the SGS Group (SGS SA)



Report No.: SUCR241000040302

Rev.: Λ1

Page: 22 of 46

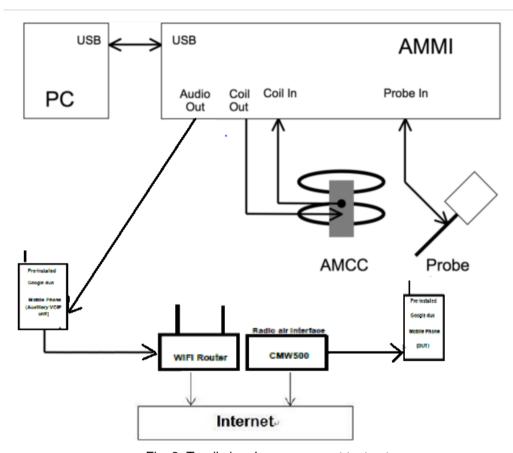


Fig. 2. T-coil signal measurement test setup

- #. Voice over Internet Protocol (VoIP) such as Google Meet application, also called IP telephony, is a methodology and group of technologies for the delivery of voice communications and multimedia sessions over Internet Protocol (IP) networks, such as the Internet. The terms Internet telephony, broadband telephony, and broadband phone service specifically refer to the provisioning of communications services (voice, fax, SMS, voice-messaging) over the public Internet, rather than via the public switched telephone network (PSTN)
- #. The Google Meet service support code and bitrate are list in section9, the customized Google Meet software is installed on a mobile phone which is used as the Auxiliary for the test. The software enables audio coding rate to be changed, and reports the input digital audio level before audio processing which can be used to calibrate the input audio level
- .#. This device comes with the preinstalled VoIP application that supports the Google Meet service and related codec. The test configuration establishes a call between the device under test and an auxiliary handset via the Google Meet server
- #. The test setup used for Google Meet VoIP call is via the data application unit on the 2G/3G/4G/5G/WiFi simulate base station, connected to the internet via the Google Meet serverr to the auxiliary device. The auxiliary device runs special software that allows the codecs and bit rate to be fixed to a specific value.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Tems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-and-C

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laborator

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980

www.sgsgroup.com.cn



Report No.: SUCR241000040302

Rev.: 01

Page: 23 of 46

Please refer to section9, an assessment was made of each of the different codec bit rates to determine the worst case for each of the different OTT transport (WiFi, LTE, GSM, WCDMA,NR)

#. The auxiliary device includes software that displays the audio level in dBFS which allows calibration of the system to establish the -16dBm0 reference level. After establishing the voice call between auxiliary device and device under test the audio output from the AMMI is injected into the auxiliary device. The gain factor to establish a reference level of -16dBm0 for use during the test is determined as detailed in the next page based on the 0dBFull Scale (0dBFS) value being equivalent to 3.14dBm0.

Input Level for OTT

input Level for O								
Gain Value 20* log(gain)					Level			
(linear) dB					dBm0			
					0.533			
10			20		-18.39			-15.78
9.75			19.78		-22.61			-16
Signal Type	Durat	_	Peak to F	RMS	RMS Gain Factor		G	Sain Setting

Signal Type	Duration (s)	Peak to RMS (dB)	RMS (dB)	Gain Factor	Gain Setting	
1kHz sine	-	3	0	1	9.75	
48k_voice_1kHz	1	15.74	-12.7	4.33	42.23	
48k_voice_300-3000	2	21.57	-18.6	8.48	82.71	

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and justication is uses defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SUCR241000040302

Rev.: 01

Page: 24 of 46

3.3 System Calibration

For correct and calibrated measurement of the voltages and ABM field, DASY will perform a calibration job as below.

In phase 1, the audio output is switched off, and a 200 mVpp symmetric rectangular signal of 1 kHz is generated and internally connected directly to both channels of the sampling unit (Coil in, Probe in).

In phase 2, the audio output is off, and a 20 mVpp symmetric 100 Hz signal is internally connected. The signals during phases 1 and 2 are available at the output on the rear panel of the AMMI. However, the output must not be loaded, in order to avoid influencing the calibration. An RMS voltmeter would indicate 100 mVRMS during the first phase and 10 mVRMS during the second phase. After the first two phases, the two input channels are both calibrated for absolute measurements of voltages. The resulting factors are displayed above the multi-meter window.

After phases 1 and 2, the input channels are calibrated to measure exact voltages. This is required to use the inputs for measuring voltages with their peak and RMS value.

In phase 3, a multi-sine signal covering each third-octave band from 50 Hz to 10 kHz is generated and applied to both audio outputs. The probe should be positioned in the center of the AMCC and aligned in the z-direction, the field orientation of the AMCC. The "Coil In" channel is measuring the voltage over the AMCC internal shunt, which is proportional to the magnetic field in the AMCC. At the same time, the "Probe In" channel samples the amplified

signal picked up by the probe coil and provides it to a numerical integrator. The ratio of the two voltages in each third-octave filter leads to the spectral representation over the frequency band of interest. The Coil signal is scaled in dBV, and the Probe signal is first integrated and normalized to show dB A/m. The ratio probe-to-coil at the frequency of 1 kHz is the sensitivity which will be used in the consecutive T-Coil jobs.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980

www.sgsgroup.com.cn



Report No.: SUCR241000040302

Rev.:

25 of 46 Page:


3.4 Audio Magnetic Probe AM1DV3

Description	Active single sensor probe for both axial and radial measurement scans- Fully RF shielded, compatible with DAE, with adapted probe cup	-
Dynamic Range	0.1 KHz to 20 KHz	
Sensitivity	<-50dB A/m @ 1KHz	
Internal Amp	20dB	4
Dimensions	300X18mm	
		AM1DV3 Audio Probe

3.5 Test Arch

Description	Enables easy and well defined positioning of the phone and validation dipoles as well as simple teaching of the robot.	
Dimensions	length: 370 mm width: 370 mm height: 370 mm	Test Arch

3.6 Phone Holder

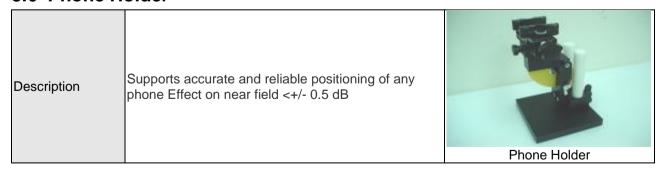

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sqs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Tems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-and-C

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory




Report No.: SUCR241000040302

Rev.:

26 of 46 Page:

3.7 AMCC- Audio Magnetic Calibration Coil

Allows calibration of the complete measurement setup, the two horizontal coils create a Description homogeneous magnetic field in the z direction. Refer to Appendix 5 for more detail on AMCC coil



3.8 AMMI - Audio Magnetic Measurement Instrument

Description	-USB interface to PC - Probe signal digitization and power supply- Test signal generation for wireless device (via base station simulator)- Autocalibration and interfaces to AMCC for complete setup-calibration	AMMI AMMI
Data Rate	48 KHz / 24bit	
Dynamic Range	85 dB	
Dimensions:	19" X 65 X 270mm	

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's Indiangs at the time of its intervention only and within the limits of Client's instructions, if any. The Company's soole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory



Report No.: SUCR241000040302

Rev.: 01

Page: 27 of 46

4 Measurement uncertainty evaluation

4 Wedsurement uncertainty evaluation										
Error Description	Uncertainty Value (%)	Probability Dist.	Divisor	ci ABM1	ci ABM2	Standard Uncertainty ABM1 (%)	Standard Uncertainty ABM2 (%)			
Related to probe sensitivity										
Reference level	±3.0	R	$\sqrt{3}$	1	1	±3.0	±3.0			
AMCC geometry	±0.4	R	$\sqrt{3}$	1	1	±0.2	±0.2			
AMCC current	±0.6	R	$\sqrt{3}$	1	1	±0.4	±0.4			
Probe positioning during calibration	±0.2	R	$\sqrt{3}$	1	1	±0.1	±0.1			
Noise distribution	±0.7	R	$\sqrt{3}$	0.0143	1	±0.0	±0.4			
Frequency slope	±5.9	R	$\sqrt{3}$	0.1	1	±0.3	±3.5			
Related to probe system										
Repeatability / drift	±1.0	R	$\sqrt{3}$	1	1	±0.6	±0.6			
Linearity / dynamic range	±0.6	N	1	1	1	±0.4	±0.4			
Audio noise	±1.0	R	$\sqrt{3}$	0.1	1	±0.1	±0.6			
Probe angle	±2.3	R	$\sqrt{3}$	1	1	±1.4	±1.4			
Spectral Processing	±0.9	R	$\sqrt{3}$	1	1	±0.5	±0.5			
Integration time	±0.6	N	1	1	5	±0.6	±3.0			
Field distribution	±0.2	R	$\sqrt{3}$	1	1	±0.1	±0.1			
Test signal										
Reference signal spectrum response	±0.6	R	$\sqrt{3}$	0	1	±0.0	±0.4			
Positioning										
Probe positioning	±1.9	R	$\sqrt{3}$	1	1	±1.1	±1.1			
Phantom Thickness	±0.9	R	$\sqrt{3}$	1	1	±0.5	±0.5			
DUT positioning	±1.9	R	$\sqrt{3}$	1	1	±1.1	±1.1			
External Contributions										
RF interference	±0.0	R	$\sqrt{3}$	1	0.3	±0.0	±0.0			
Test Signal Variation	±2.0	R	$\sqrt{3}$	1	1	±1.2	±1.2			

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sas.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory



Report No.: SUCR241000040302

Rev.: 01

Page: 28 of 46

Combined Std. Uncertainty (ABM Field)	$u_{c}^{'} = \sqrt{\sum_{i=1}^{20} c_{i}^{2} u_{i}^{2}}$	±4.1	±6.2
Expanded Std. Uncertainty (K=2)		±8.2	±12.4

Table 2: Measurement uncertainties for T-Coil

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sas.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980

www.sgsgroup.com.cn



Report No.: SUCR241000040302

Rev.: 01

Page: 29 of 46

5 HAC (T-Coil) Measurement

5.1 T-Coil Performance Requirements

In order to be rated for T-Coil use, a WD shall meet the requirements for signal level and signal quality contained in this part.

1) T-Coil coupling field intensity

When measured as specified in ANSI C63.19, the T-Coil signal shall be ≥ -18 dB (A/m) at 1 kHz, in a 1/3 octave band filter for all orientations.

2) Frequency response

The frequency response of the axial component of the magnetic field, measured in 1/3 octave bands, shall follow the response curve specified in this sub-clause, over the frequency range 300 Hz to 3000 Hz. Figure 1 and Figure 2 provide the boundaries for the specified frequency.

These response curves are for true field strength measurements of the T-Coil signal. Thus the 6 dB/octave probe response has been corrected from the raw readings.

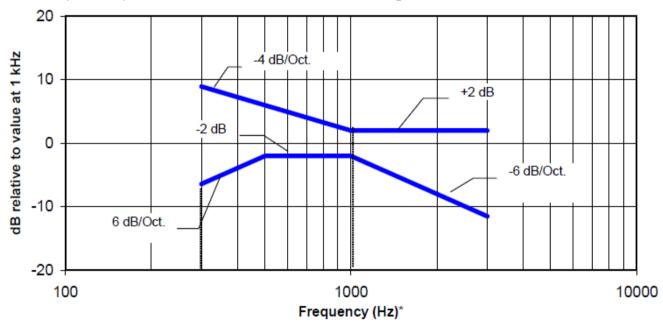


Figure 1—Magnetic field frequency response for WDs with a field ≤ −15 dB (A/m) at 1 kHz

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Document at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

 ${\sf SGS\text{-}CSTC\ Standards\ Technical\ Services\ (Suzhou) \quad Co., Ltd.}$

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980

www.sgsgroup.com.cn



Report No.: SUCR241000040302

Rev.: 01

Page: 30 of 46

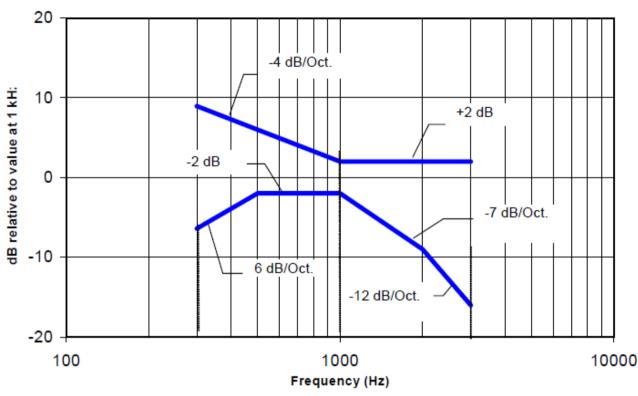


Figure 2 —Magnetic field frequency response for WDs with a field that exceeds -15dB(A/m) at 1 kHz

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and justication is uses defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SUCR241000040302


Rev.: 01

Page: 31 of 46

5.2 T-Coil measurement points and reference plane

Figure 3 illustrate the references and reference plane that shall be used in a typical EUT emissions measurement. The principle of this section is applied to EUT with similar geometry. Please refer to Appendix C for the setup photographs.

- ◆ The area is 5 cm by 5 cm.
- ◆ The area is centered on the audio frequency output transducer of the EUT.
- ♦ The area is in a reference plane, which is defined as the planar area that contains the highest point in the area of the phone that normally rests against the user's ear. It is parallel to the centerline of the receiver area of the phone and is defined by the points of the receiver-end of the EUT handset, which, in normal handset use, rest against the ear.
- ◆ The measurement plane is parallel to, and 10 mm in front of, the reference plane.






Figure A.4—Measurement and reference planes probe orientation for WD audio frequency magnetic field measurements

Figure 3 Axis and planes for WD audio frequency magnetic field measurements

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory



Report No.: SUCR241000040302

Rev.: 01

Page: 32 of 46

5.3 T-Coil Measurement Procedure

According to ANSI C63.19-2019, section4:

This subclause describes the procedures used to measure the ABM (T-Coi) performance of the WD. Measurements shall be performed over a meastrement area 50 mm square, in the measurement plane, as specified in A.3. The measurement area shall be scanned with a uniform measurement point spacing of 2.0 mm \pm 0.5 mm in each X=Y axis of the plane, yielding 676 measurement points with approximately even spacing throughout the area.

Optionally, measurement point spacing may be inereased to 4 mm, with interpolation employed to yield the required 676 equivalent measurement points distributed uniformly over the 50 mm square measurement area. Interpolated points shall be derived from the average of the linear representations of the field strengths of the nearest two or four equidistant measured points. The area of measurement is increased to a 52 mm square so that edge rows and columns of the required 50 mm square can be either measured or interpolated with none extrapolated.

In order to assure that the required signal quality is measured, the measurement of the intended signal and the measurement of the unintended signal shall be made at the same locations. Measurements shall not include undesired influence from the WD's RF field; therefore, use of a coaxial connection to a base station simulator or non-radiating load might be necessary. However, even then with a coaxial connection to a base station simulator or non-radiating load there could still be RF leakage from the WD, which could interfere with the desired measurement. Pre-measurement checks should be made to avoid this possibility. Al measurements shall be done with the WD operating on battery power with an appropriate normal speech audio signal input level given in Table 6.1. If the device display can be tumed off during a phone call, then that may be done during the measurement as well. If tested with the display in the off state this shall be documented in the test report.

Measurements shall be performed with the probe coil oriented in the transverse direction, aligned in the plane of the measurement area and perpendicular to the long dimension of the WD. A multi-stage sequence consists of first measuring the field strength of the desired T-Coil signal(desired ABM signal) that is useful to a hearing aid.

T-Coil at each specified measurement point. The undesired magnetic component (undesired ABM field) is then measured in the same transverse orientation at each of the same measurement point.

The following steps summarize the basic test flow for determining desired ABM signal and undesired ABM field. These steps assume that a sine wave or narrowband 1/3 octave signal can be used for the measurement of desired ABM signal level.

To minimize the need to test every WD operating mode to the telecoil requirements of Clause 6, it is permissible to exclude some subset of supported configurations. For a given WD, every mode that supports voice communication shall be considered for telecoil testing. However, if it can be demonstrated that a certain configuration will not be the worst-case telecoil configuration, such configurations may be excluded from the fall telecoil scans of 6.4.}4 For example, operating modes may be pre-screened by scanning for both desired ABM signal and udesired ABM field at a lower measurement point density than the final scans, thus saving considerable testing time by eliminating configurations that are excellent performers from more detailed testing for worst-case.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and justication is uses defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sqs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory



Report No.: SUCR241000040302

Rev.: 01

Page: 33 of 46

Many factors could affect telecoil test results. RF power level and amplitude modulation characteristics as well as the specific curent paths within the WD associated with the RF output stage(s), the display, and processing circuitry could affect the undesired ABM field. Audio codec implementation and acoustic receiver characteristies could also affect the desired ABM signal).

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory



Report No.: SUCR241000040302

Rev.: Λ1

Page: 34 of 46

6 T-Coil testing for CMRS Voice

6.1 **General Description**

1. Codec Investigation:

This clause describes the measurement of the baseband (audio frequency) magnetic T-Coil signal from a WD. The goal is to evaluate the size of the area where a user could position their WD relative to their hearing aid's telecoil and receive an acceptable magnetically coupled signal. Three quantities are measured and evaluated. The first is the field strength of the desired signal at the center of the audio band (desired ABM signal). The second is the frequency response of the desired signal measured across the audio band. The third is the field strength of the undesired audio band magnetic field.

2. Air Interface Investigation:

a. Use the worst-case codec test and document a limited set of bands/channel/bandwidths. Observe the effect of

changing the band and bandwidth to ensure that there are no unexpected variations. Using the knowledge of

observed variations, it is necessary to report only a set band/channel/bandwidth for each orientation for a voice

service/air interface.

b. According to the ANSI C63.19 2019 section 6.3.4, test middle channel of each frequency band for HAC

for each orientation to determine worst HAC T-Coil.

c. Opening the Hearing-aid can improve the HAC T-Coil performance of the earpiece.

6.2 **GSM Tests Results**

Codec Investigation:

Air Interface	Modulation	Channel	Sample	Codec	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Frequency Response	Date
GSM850	Voice	190	#1	AMR NB FR	60	142	PASS	2024/10/21
GSM850	Voice	190	#1	EFR (FR V2)	57	130	PASS	2024/10/21
GSM850	Voice	190	#1	AMR WB FR	55	126	PASS	2024/10/21

Remark: According to codec investigation, the worst codec is AMR WB FR

Air Interface Investigation

7 til 1111011140	<u> </u>							
Air Interface	Modulation	Channel	Sample	Codec	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Frequency Response	Date
GSM850	Voice	190	#1	AMR WB FR	55	126	PASS	2024/10/21
GSM1900	Voice	661	#1	AMR WB FR	73	173	PASS	2024/10/21

Remark:

- 1. Phone Condition: Air Link; Hearing-aid on; Mute on; Backlight off; Max Volume
- 2. The detail frequency response results please refer to appendix A.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Tems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-and-C

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



Report No.: SUCR241000040302

01 Rev.:

35 of 46 Page:

6.3 **UMTS Tests Results**

Codec Investigation:

Air Interface	Modul ation	Channe I	Sampl e	Codec	O. Gup	O. Gup	Secondary Group Max Longitudin al	Group May	у	Date
WCDMA II	Voice	9400	#1	AMR NB 4.75Kbps	546	676	26	26	PASS	2024/10/2
WCDMA II	Voice	9400	#1	AMR NB12.2Kbps	546	676	26	26	PASS	2024/10/2
WCDMA II	Voice	9400	#1	AMR WB 6.60Kbps	545	676	26	26	PASS	2024/10/2
WCDMA II	Voice	9400	#1	AMR WB 23.85Kbps	545	676	26	26	PASS	2024/10/2

Remark: According to codec investigation, the worst codec is AMR WB 6.60Kbps

Air Interface Investigation:

Air Interface	Modul ation	Channel	Sample	Codec	Primary Group Contiguo us Point Count	Secondary Group Contiguou s Point Count	Secondary	Trongword	Frequenc	Date
WCDMA II	Voice	9400	#1	AMR WB 6.60Kbps	545	676	26	26	PASS	2024/10/2
WCDMA IV	Voice	1412	#1	AMR WB 6.60Kbps	544	676	26	26	PASS	2024/10/2
WCDMA V	Voice	4183	#1	AMR WB 6.60Kbps	542	676	26	26	PASS	2024/10/2

Remark:

- 1. Phone Condition: Air Link; Hearing-aid on; Mute on; Backlight off; Max Volume
- 2. The detail frequency response results please refer to appendix A.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions



Report No.: SUCR241000040302

Rev.: 01

Page: 36 of 46

7 T-Coil testing for CMRS IP Voice

7.1 VoLTE Tests Results

1. Codec Investigation:

For a voice service/air interface, investigate the variations of codec configurations (NB bit rate) and document the parameters for that voice service. It is only necessary to document this for one channel / band, the following worst investigation codec would be remarked to be used for the testing for the handset.

2. Air Interface Investigation:

a. Use the worst-case codec test and document a limited set of bands / channel / bandwidths. Observe the effect of changing the band and bandwidth to ensure that there are no unexpected variations. Using the knowledge of the observed variations, it is necessary to report only a set band/channel/bandwidth for each orientation for a voice service/air interface and the following worst configure would be remarked to be used for the testing for the

handset.

b. Select LTE FDD one frequency band to do measurement at the worst Primary Group Contiguous Point Count position was additionally performed with varying the BWs/Modulations/RB size to verify the variation to find out worst configuration, the observed variation is very little to be within 1.5 dB which is much less than the margin from the rating threshold.

LTE FDD Codec Investigation:

Air Interface	BW	Modul ation	RB	RB	Chan nel	Sampl e	Codec	Primary Group Contiguou s Point Count	Secondary Group Contiguou s Point Count	Secondary Group Max Longitudin al	Secondar y Group Max Transvers e	Frequen cy Respon se	Date
LTE Band 2	20	QPSK	1	0	18900	#1	AMR NB 4.75Kbps	531	667	26	26	PASS	2024/10/22
LTE Band 2	20	QPSK	1	0	18900	#1	AMR NB 12.2Kbps	530	666	26	26	PASS	2024/10/22
LTE Band 2	20	QPSK	1	0	18900	#1	AMR WB 6.60Kbps	539	673	26	26	PASS	2024/10/22
LTE Band 2	20	QPSK	1	0	18900	#1	AMR WB 23.85Kbps	523	651	26	26	PASS	2024/10/22
LTE Band 2	20	QPSK	1	0	18900	#1	EVS NB 5.9Kbps	507	670	26	26	PASS	2024/10/22
LTE Band 2	20	QPSK	1	0	18900	#1	EVS NB 24.4Kbps	531	661	26	26	PASS	2024/10/22
LTE Band 2	20	QPSK	1	0	18900	#1	EVS WB 5.9Kbps	452	675	26	26	PASS	2024/10/22
LTE Band 2	20	QPSK	1	0	18900	#1	EVS WB 24.4Kbps	514	646	26	26	PASS	2024/10/22
LTE Band 2	20	QPSK	50	0	18900	#1	EVS WB 5.9Kbps	479	633	26	26	PASS	2024/10/22
LTE Band 2	20	QPSK	100	0	18900	#1	EVS WB 5.9Kbps	503	641	26	26	PASS	2024/10/22
LTE Band 2	20	16QAM	1	0	18900	#1	EVS WB 5.9Kbps	511	657	26	26	PASS	2024/10/22
LTE Band 2	20	64QAM	1	0	18900	#1	EVS WB 5.9Kbps	527	655	26	26	PASS	2024/10/22
LTE Band 2	20	256QAM	1	0	18900	#1	EVS WB 5.9Kbps	530	656	26	26	PASS	2024/10/22
LTE Band 2	15	QPSK	1	0	18900	#1	EVS WB 5.9Kbps	514	645	26	26	PASS	2024/10/22
LTE Band 2	10	QPSK	1	0	18900	#1	EVS WB 5.9Kbps	524	639	26	26	PASS	2024/10/22
LTE Band 2	5	QPSK	1	0	18900	#1	EVS WB 5.9Kbps		637	26	26	PASS	2024/10/22
LTE Band 2	3	QPSK	1	0	18900	#1	EVS WB 5.9Kbps	509	622	26	26	PASS	2024/10/22
LTE Band 2	1.4	QPSK	1	0	18900	#1	EVS WB 5.9Kbps	515	625	26	26	PASS	2024/10/22

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory



SUCR241000040302 Report No.:

Rev.: 01

37 of 46 Page:

Remark:

- Select Worst worst codec Bandwidth/Modulation/RB Size from LTE FDD Test results to do LTE FDD
- Select Worst Bandwidth/Modulation/RB Size from LTE FDD Test results to do LTE FDD
- According to codec investigation, the worst codec is EVS WB 5.9Kbps

Air interface:

Air Interface	BW	Modulation	RB	RB	Channel	Sample	Codec	Primary Group Contiguou s Point Count	Secondary Group Contiguou s Point Count	Group Max	Secondar y Group Max Transvers e	Frequen cy Respons e	Date
LTE Band 2	20	QPSK	1	0	18900	#1	EVS WB 5.9Kbps	452	675	26	26	PASS	2024/10/22
LTE Band 4	20	QPSK	1	0	20175	#1	EVS WB 5.9Kbps	445	671	26	26	PASS	2024/10/22
LTE Band 5	10	QPSK	1	0	20525	#1	EVS WB 5.9Kbps	487	676	26	26	PASS	2024/10/22
LTE Band 7	20	QPSK	1	0	21100	#1	EVS WB 5.9Kbps	447	665	26	26	PASS	2024/10/23
LTE Band 12	10	QPSK	1	0	23095	#1	EVS WB 5.9Kbps	449	676	26	26	PASS	2024/10/23
LTE Band 13	10	QPSK	1	0	23230	#1	EVS WB 5.9Kbps	457	676	26	26	PASS	2024/10/23
LTE Band 14	10	QPSK	1	0	23330	#1	EVS WB 5.9Kbps	467	676	26	26	PASS	2024/10/23
LTE Band 25	20	QPSK	1	0	26365	#1	EVS WB 5.9Kbps	470	665	26	26	PASS	2024/10/23
LTE Band 26	15	QPSK	1	0	26865	#1	EVS WB 5.9Kbps	470	676	26	26	PASS	2024/10/23
LTE Band 30	10	QPSK	1	0	27710	#1	EVS WB 5.9Kbps	362	543	26	26	PASS	2024/10/23
LTE Band 66	20	QPSK	1	0	132322	#1	EVS WB 5.9Kbps	354	534	26	26	PASS	2024/10/23
LTE Band 71	20	QPSK	1	0	133297	#1	EVS WB 5.9Kbps	355	537	26	26	PASS	2024/10/23

- 1. Phone Condition: Air Link; Hearing-aid on; Mute on; Backlight off; Max Volume
- 2. The detail frequency response results please refer to appendix A

LTE TDD Codec Investigation:

Air Interface	вw	Modulation	RB	RB	Chan nel	Sample	Codec	Group	Secondary Group Contiguou s Point Count	Group May	y Group	CV	Date
LTE Band 41	20	QPSK	1	0	40620	#1	AMR NB 4.75Kbps	231	348	18	26	PASS	2024/10/24
LTE Band 41	20	QPSK	1	0	40620	#1	AMR NB 12.2Kbps	229	347	18	26	PASS	2024/10/24
LTE Band 41	20	QPSK	1	0	40620	#1	AMR WB 6.60Kbps	227	347	18	26	PASS	2024/10/24
LTE Band 41	20	QPSK	1	0	40620	#1	AMR WB 23.85Kbps	245	364	19	26	PASS	2024/10/24
LTE Band 41	20	QPSK	1	0	40620	#1	EVS NB 5.9Kbps	214	355	19	26	PASS	2024/10/24
LTE Band 41	20	QPSK	1	0	40620	#1	EVS NB 24.4Kbps	241	361	19	26	PASS	2024/10/24

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory



Report No.: SUCR241000040302

01 Rev.:

38 of 46 Page:

LTE Band 41	20	QPSK	1	0	40620	#1	EVS WB 5.9Kbps	212	364	19	26	PASS	2024/10/24
LTE Band 41	20	QPSK	1	0	40620	#1	EVS WB 24.4Kbps	251	365	19	26	PASS	2024/10/24
LTE Band 41	20	QPSK	50	0	40620	#1	EVS WB 5.9Kbps	231	355	19	26	PASS	2024/10/24
LTE Band 41	20	QPSK	100	0	40620	#1	EVS WB 5.9Kbps	229	347	19	26	PASS	2024/10/24
LTE Band 41	20	16QAM	1	0	40620	#1	EVS WB 5.9Kbps	224	339	19	26	PASS	2024/10/24
LTE Band 41	20	64QAM	1	0	40620	#1	EVS WB 5.9Kbps	230	344	19	26	PASS	2024/10/24
LTE Band 41	20	256QAM	1	0	40620	#1	EVS WB 5.9Kbps	233	347	19	26	PASS	2024/10/24
LTE Band 41	15	QPSK	1	0	40620	#1	EVS WB 5.9Kbps	238	340	19	26	PASS	2024/10/24
LTE Band 41	10	QPSK	1	0	40620	#1	EVS WB 5.9Kbps	225	337	19	26	PASS	2024/10/24
LTE Band 41	5	QPSK	1	0	40620	#1	EVS WB 5.9Kbps	235	341	19	26	PASS	2024/10/24

Remark:

- Select Worst worst codec Bandwidth/Modulation/RB Size from LTE TDD Test results to do LTE TDD
- Select Worst Bandwidth/Modulation/RB Size from LTE TDD Test results to do LTE TDD
- According to codec investigation, the worst codec is EVS WB 5.9Kbps

LTE TDD Air interface:

Air Interface	BW	Modulat ion	RB	RB	Channel	Sample	Codec	Group	Secondary Group Contiguou s Point Count	Group Max	Secondar y Group Max Transvers e	Respon	Date
LTE Band 41	20	QPSK	1	0	40620	#1	EVS WB 5.9Kbps	212	364	19	26	PASS	2024/10/24
LTE Band 38	20	QPSK	1	0	38000	#1	EVS WB 5.9Kbps	198	363	19	26	PASS	2024/10/24
LTE Band 42	20	QPSK	1	0	42590	#1	EVS WB 5.9Kbps	294	389	18	26	PASS	2024/12/3
LTE Band 43	20	QPSK	1	0	44590	#1	EVS WB 5.9Kbps	254	386	18	26	PASS	2024/12/3
LTE Band 48	20	QPSK	1	0	55990	#1	EVS WB 5.9Kbps	244	384	18	26	PASS	2024/12/3

- 1. Phone Condition: Air Link; Hearing-aid on; Mute on; Backlight off; Max Volume
- 2. The detail frequency response results please refer to appendix A

FR1 NR Codec Investigation:

Air Interface	BW	Modulation	RB	RB	Chan nel	Sampl e	Codec	Primary Group Contiguo us Point Count	Secondar y Group Contiguou s Point Count	,	Secondar y Group Max Transvers e	Cy	Date
FR1 n78	100	DFT-s-OFDM QPSK	1	1	636666	#1	AMR NB 4.75Kbps	122	336	17	26	PASS	2024/10/25
FR1 n78	100	DFT-s-OFDM QPSK	1	1	636666	#1	AMR NB 12.2Kbps	127	335	17	26	PASS	2024/10/25
FR1 n78	100	DFT-s-OFDM QPSK	1	1	636666	#1	AMR WB 6.60Kbps	102	333	17	26	PASS	2024/10/25
FR1 n78	100	DFT-s-OFDM QPSK	1	1	636666	#1	AMR WB 23.85Kbps	123	332	17	26	PASS	2024/10/25
FR1 n78	100	DFT-s-OFDM	1	1	636666	#1	EVS NB 5.9Kbps	115	366	17	26	PASS	2024/10/25

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory



Report No.: SUCR241000040302

Rev.: 01

Page: 39 of 46

		QPSK		1	1		1					1	<u> </u>
FR1 n78	100	DFT-s-OFDM	1	1	636666	#1	EVS NB 24.4Kbps	134	364	17	26	PASS	2024/10/25
		QPSK DFT-s-OFDM											
FR1 n78	100	QPSK	1	1	636666	#1	EVS WB 5.9Kbps	106	366	17	26	PASS	2024/10/25
FR1 n78	100	DFT-s-OFDM QPSK	1	1	636666	#1	EVS WB 24.4Kbps	159	365	17	26	PASS	2024/10/25
FR1 n78	100	DFT-s-OFDM QPSK	50	0	636666	#1	AMR WB 6.60Kbps	133	347	17	26	PASS	2024/10/25
FR1 n78	100	DFT-s-OFDM QPSK	100	0	636666	#1	AMR WB 6.60Kbps	127	334	17	26	PASS	2024/10/25
FR1 n78	100	DFT-s-OFDM 16QAM	1	1	636666	#1	AMR WB 6.60Kbps	120	346	17	26	PASS	2024/10/25
FR1 n78	100	DFT-s-OFDM 64QAM	1	1	636666	#1	AMR WB 6.60Kbps	121	340	17	26	PASS	2024/10/25
FR1 n78	100	DFT-s-OFDM 256QAM	1	1	636666	#1	AMR WB 6.60Kbps	139	353	17	26	PASS	2024/10/25
FR1 n78	100	DFT-PI/2 BPSK	1	1	636666	#1	AMR WB 6.60Kbps	126	349	17	26	PASS	2024/10/25
FR1 n78	100	CP-OFDM QPSK	1	1	636666	#1	AMR WB 6.60Kbps	137	345	17	26	PASS	2024/10/25
FR1 n78	90	DFT-s-OFDM QPSK	1	1	636666	#1	AMR WB 6.60Kbps	128	336	17	26	PASS	2024/10/25
FR1 n78	80	DFT-s-OFDM QPSK	1	1	636666	#1	AMR WB 6.60Kbps	124	332	17	26	PASS	2024/10/25
FR1 n78	70	DFT-s-OFDM QPSK	1	1	636666	#1	AMR WB 6.60Kbps	130	342	17	26	PASS	2024/10/25
FR1 n78	60	DFT-s-OFDM QPSK	1	1	636666	#1	AMR WB 6.60Kbps	134	347	17	26	PASS	2024/10/25
FR1 n78	50	DFT-s-OFDM QPSK	1	1	636666	#1	AMR WB 6.60Kbps	129	338	17	26	PASS	2024/10/25
FR1 n78	40	DFT-s-OFDM QPSK	1	1	636666	#1	AMR WB 6.60Kbps	125	342	17	26	PASS	2024/10/25
FR1 n78	30	DFT-s-OFDM QPSK	1	1	636666	#1	AMR WB 6.60Kbps	131	345	17	26	PASS	2024/10/25
FR1 n78	20	DFT-s-OFDM QPSK	1	1	636666	#1	AMR WB 6.60Kbps	130	336	17	26	PASS	2024/10/25
FR1 n25	25	DFT-s-OFDM QPSK	1	1	376500	#1	AMR WB 6.60Kbps	273	543	26	26	PASS	2024/10/25
FR1 n25	20	DFT-s-OFDM QPSK	1	1	376500	#1	AMR WB 6.60Kbps	279	544	26	26	PASS	2024/10/25
FR1 n25	15	DFT-s-OFDM QPSK	1	1	376500	#1	AMR WB 6.60Kbps	283	549	26	26	PASS	2024/10/25
FR1 n25	10	DFT-s-OFDM QPSK	1	1	376500	#1	AMR WB 6.60Kbps	281	547	26	26	PASS	2024/10/25
FR1 n25	5	DFT-s-OFDM QPSK	1	1	376500	#1	AMR WB 6.60Kbps	285	544	26	26	PASS	2024/10/25

Remark:

- 1. Select Worst worst codec Bandwidth/Modulation/RB Size from FR1 NR Test results to do FR1 NR
- 2. Select Worst Bandwidth/Modulation/RB Size from FR1 NR Test results to do FR1 NR
- 3. According to codec investigation, the worst codec is AMR WB 6.6Kbps

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sas.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory



Report No.: SUCR241000040302

Rev.: 01

Page: 40 of 46

Air Interface	BW	Modulation	RB	RB	Chan nel	Sample	Codec	Primary Group Contiguo us Point Count	Secondary Group Contiguou s Point Count	Secondary Group Max Longitudin al	Secondar y Group Max Transvers e	Frequen cy Respon se	Date
FR1 n78	100	DFT-s-OFDM QPSK	1	1	636666	#1	AMR WB 6.60Kbps	102	333	17	26	PASS	2024/10/25
FR1 n2	20	DFT-s-OFDM QPSK	1	1	376000	#1	AMR WB 6.60Kbps	319	663	26	26	PASS	2024/12/1
FR1 n5	20	DFT-s-OFDM QPSK	1	1	167300	#1	AMR WB 6.60Kbps	324	676	26	26	PASS	2024/12/1
FR1 n7	20	DFT-s-OFDM QPSK	1	1	507000	#1	AMR WB 6.60Kbps	332	653	26	26	PASS	2024/12/1
FR1 n14	10	DFT-s-OFDM QPSK	1	1	158600	#1	AMR WB 6.60Kbps	330	676	26	26	PASS	2024/12/1
FR1 n25	30	DFT-s-OFDM QPSK	1	1	376500	#1	AMR WB 6.60Kbps	296	588	26	26	PASS	2024/12/1
FR1 n26	20	DFT-s-OFDM QPSK	1	1	166300	#1	AMR WB 6.60Kbps	331	670	26	26	PASS	2024/12/1
FR1 n30	10	DFT-s-OFDM QPSK	1	1	462000	#1	AMR WB 6.60Kbps	272	513	24	26	PASS	2024/12/1
FR1 n38	40	DFT-s-OFDM QPSK	1	1	519000	#1	AMR WB 6.60Kbps	109	335	18	26	PASS	2024/12/2
FR1 n41	100	DFT-s-OFDM QPSK	1	1	518598	#1	AMR WB 6.60Kbps	187	428	20	26	PASS	2024/12/2
FR1 n48	40	DFT-s-OFDM QPSK	1	1	641666	#1	AMR WB 6.60Kbps	127	364	18	26	PASS	2024/12/1
FR1 n66	30	DFT-s-OFDM QPSK	1	1	349000	#1	AMR WB 6.60Kbps	278	539	26	26	PASS	2024/12/2
FR1 n70	15	DFT-s-OFDM QPSK	1	1	340500	#1	AMR WB 6.60Kbps	275	539	26	26	PASS	2024/12/2
FR1 n71	20	DFT-s-OFDM QPSK	1	1	136100	#1	AMR WB 6.60Kbps	275	544	26	26	PASS	2024/12/2
FR1 n77	100	DFT-s-OFDM QPSK	1	1	656000	#1	AMR WB 6.60Kbps	96	330	17	26	PASS	2024/12/1

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sas.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory



Report No.: SUCR241000040302

Rev.: 01

Page: 41 of 46

7.2 VoWiFi Tests Results

1. Codec Investigation:

For a voice service/air interface, investigate the variations of codec configurations (WB, NB bit rate) and document the parameters for that voice service. It is only necessary to document this for one channel/band, the following worst investigation codec would be remarked to be used for the testing for the handset.

2. Air Interface Investigation:

a. Use the worst-case codec test and document a limited set of bands/channel/bandwidths. Observe the effect of

changing the band and bandwidth to ensure that there are no unexpected variations. Using the knowledge of the

observed variations, it is necessary to report only a set band/channel/bandwidth for each orientation for a voice

service/air interface and the following worst configure would be remarked to be used for the testing for the handset.

b. Select WLAN 2.4GHz, WLAN5GHz and WLAN6GHz one frequency band to do measurement at the worst Primary Group Contiguous Point Count position was additionally performed with varying the BWs/Modulations/data rate to verify the variation to find out worst configuration, the observed variation is very little to be within 1 dB which is much less than the margin from the rating threshold.

Air Interface	BW	Modulation	RB	RB	Channel	Sample	Codec	Primary Group Contiguou s Point Count	Secondary Group Contiguou s Point Count	Secondary Group Max Longitudin al	Secondar y Group Max Transvers e	Frequenc y Respons e	Date
802.11b	20	1M	-	•	6	#1	AMR NB 4.75Kbps	216	308	17	26	PASS	2024/12/6
802.11b	20	1M		-	6	#1	AMR NB12.2Kbps	224	314	17	26	PASS	2024/12/6
802.11b	20	1M	-	-	6	#1	AMR WB 6.60Kbps	200	301	16	26	PASS	2024/12/6
802.11b	20	1M	-	-	6	#1	AMR WB 23.85Kbps	203	303	16	26	PASS	2024/12/6
802.11b	20	1M		-	6	#1	EVS NB 5.9Kbps	208	308	17	26	PASS	2024/12/6
802.11b	20	1M	-	-	6	#1	EVS NB 24.4Kbps	211	311	17	26	PASS	2024/12/6
802.11b	20	1M	-	-	6	#1	EVS WB 5.9Kbps	187	323	17	26	PASS	2024/12/6
802.11b	20	1M	-	-	6	#1	EVS WB 24.4Kbps	190	324	17	26	PASS	2024/12/6
802.11b	20	11M	-	-	6	#1	EVS WB 5.9Kbps	203	320	17	26	PASS	2024/12/6
802.11g	20	6M		-	6	#1	EVS WB 5.9Kbps	271	420	18	26	PASS	2024/12/6
802.11g	20	54M	•	•	6	#1	EVS WB 5.9Kbps	288	426	18	26	PASS	2024/12/6
802.11n- HT20	20	MCS0	1	1	6	#1	EVS WB 5.9Kbps	223	357	18	26	PASS	2024/12/6
802.11n- HT20	20	MCS7			6	#1	EVS WB 5.9Kbps	231	366	18	26	PASS	2024/12/6
802.11n- HT40	40	MCS0	-	-	6	#1	EVS WB 5.9Kbps	211	339	17	26	PASS	2024/12/6
802.11n- HT40	40	MCS7	-	-	6	#1	EVS WB 5.9Kbps	216	342	17	26	PASS	2024/12/6
802.11ax- HE20	20	MCS0		-	6	#1	EVS WB 5.9Kbps	299	425	17	26	PASS	2024/12/6
802.11ax- HE20	20	MCS7		-	6	#1	EVS WB 5.9Kbps	304	428	17	26	PASS	2024/12/6
802.11ax- HE40	40	MCS0		-	6	#1	EVS WB 5.9Kbps	315	442	19	26	PASS	2024/12/6

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Document at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory



Report No.: SUCR241000040302

01 Rev.:

42 of 46 Page:

802.11ax- HE40	40	MCS7	-	-	6	#1	EVS WB 5.9Kbps	322	451	19	26	PASS	2024/12/6
802.11a	20	6M	-	-	40	#1	EVS WB 5.9Kbps	340	463	24	26	PASS	2024/12/13
802.11a	20	54M	-	-	40	#1	EVS WB 5.9Kbps	346	466	24	26	PASS	2024/12/13
802.11ac- VHT20	20	MCS0	-	-	40	#1	EVS WB 5.9Kbps	344	471	25	26	PASS	2024/12/13
802.11ac- VHT20	20	MCS7	-	-	40	#1	EVS WB 5.9Kbps	351	477	25	26	PASS	2024/12/13
802.11ac- VHT40	40	MCS0	-	-	38	#1	EVS WB 5.9Kbps	332	462	26	26	PASS	2024/12/13
802.11ac- VHT40	40	MCS7	-	-	38	#1	EVS WB 5.9Kbps	337	463	26	26	PASS	2024/12/13
802.11ac- VHT80	80	MCS0	-	-	42	#1	EVS WB 5.9Kbps	323	426	26	26	PASS	2024/12/13
802.11ac- VHT80	80	MCS7	-	-	42	#1	EVS WB 5.9Kbps	337	433	26	26	PASS	2024/12/13
802.11ac- VHT160	160	MCS0	-	-	50	#1	EVS WB 5.9Kbps	347	472	22	26	PASS	2024/12/13
802.11ac- VHT160	160	MCS7	-	-	50	#1	EVS WB 5.9Kbps	351	475	22	26	PASS	2024/12/13
802.11ax- HE80	80	MCS0	-	-	42	#1	EVS WB 5.9Kbps	321	453	22	26	PASS	2024/12/13
802.11ax- HE80	80	MCS7	-	-	42	#1	EVS WB 5.9Kbps	325	447	22	26	PASS	2024/12/13
802.11ax- HE160	160	MCS0	-	-	50	#1	EVS WB 5.9Kbps	306	441	22	26	PASS	2024/12/13
802.11ax- HE160	160	MCS7	-	-	50	#1	EVS WB 5.9Kbps	311	444	22	26	PASS	2024/12/13
WLAN6G 802.11ax- HE20	20	MCS0	-	-	5	#1	EVS WB 5.9Kbps	297	389	17	26	PASS	2024/12/2

- According to codec investigation, the worst codec is **EVS WB 5.9Kbps**According to codec investigation, WiFi the worst codec is **EVS WB 5.9Kbps**

Air interface:

Air Interface	BW	Modulati on	RB	RB	Channel	Sample	Codec	Groun		Secondary Group Max Longitudina I		Frequen cy Respons e	Date
802.11n- HT40	40	MCS0	1	1	6	#1	EVS WB 5.9Kbps	211	339	17	26	PASS	2024/12/6
802.11n- HT40	40	MCS0	-	-	54	#1	EVS WB 5.9Kbps	324	444	19	26	PASS	2024/12/6
802.11n- HT40	40	MCS0	-	-	118	#1	EVS WB 5.9Kbps	244	385	17	26	PASS	2024/12/6
802.11n- HT40	40	MCS0	-	-	159	#1	EVS WB 5.9Kbps	231	360	16	26	PASS	2024/12/6

- 1. Phone Condition: Air Link; Hearing-aid on; Mute on; Backlight off; Max Volume
- 2. The detail frequency response results please refer to appendix A.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions



Report No.: SUCR241000040302

Rev.: Λ1

Page: 43 of 46

7.3 T-Coil testing for OTT VoIP Application

- 1. The Google Meet only support OPUS audio codec and support 6kbps to 75kbps bitrate.
- 2. The test setup used for OTT VoIP call is the DUT connect to the CMW500/CMX500 and via the data application unit on CMW500/CMX500 connection to the Internet, the Auxiliary EUT is connected to the WiFi access point, the channel/Modulation/Frequency bands/data rate is configured on the CMW500/CMX500 for the DUT unit. For the Auxiliary VoIP unit which is used to configure the audio codec rate and determine the audio.
- 3. Codec Investigation: For a voice service/air interface, investigate the variations of codec configurations (WB, NB bit rate) and document the parameters for that voice service. It is only necessary to document this for one channel/band, the following tests results which the worst-case codec would be remarked to be used for the testing for the handset.
- 4. Use the worst-case codec test and document a limited set of bands/channel/bandwidths. Observe the effect of

changing the band and bandwidth to ensure that there are no unexpected variations. Using the knowledge of the

observed variations, it is necessary to report only a set band/channel/bandwidth for each orientation for a voice service/air interface.

Air interface:

WCDMA:

Air Interface	Modulati on	Channel	Sample	Codec	Primary Group Contiguous Point Count	-	Secondary	Secondary Group Max Transvers e		
WCDMA V	HSPA	4183	#1	OPUS 6kbps	217	538	26	26	PASS	2024/12/5
WCDMA V	HSPA	4183	#1	OPUS 40kbps	228	540	26	26	PASS	2024/12/5
WCDMA V	HSPA	4183	#1	OPUS 75kbps	223	541	26	26	PASS	2024/12/5

LTE FDD:

Air Interface	B W	Modulati on	R B	R B		Sampl e	Codec	Group	Secondary Group Contiguou s Point Count	Secondary Group Max Longitudina I	Group Max	су	Date
LTE Band 66	20	QPSK	1	0	132322	#1	OPUS 6kbps	218	537	26	26	PASS	2024/12/5
LTE Band 66	20	QPSK	1	0	132322	#1	OPUS 40kbps	223	534	26	26	PASS	2024/12/5
LTE Band 66	20	QPSK	1	0	132322	#1	OPUS 75kbps	221	537	26	26	PASS	2024/12/5

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Tems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-and-C



Report No.: SUCR241000040302

01 Rev.:

44 of 46 Page:

LTE TDD:

Air Interface	BW	Modulat ion	R B	R B	Channe I	Sampl e	Codec	Primary Group Contiguou s Point Count	Secondary Group Contiguou s Point Count	Secondary Group Max Longitudina I	Group Max	сy	Date
LTE Band 38	20	QPSK	1	0	38000	#1	OPUS 6kbps	88	354	18	26	PASS	2024/12/5
LTE Band 38	20	QPSK	1	0	38000	#1	OPUS 40kbps	92	355	18	26	PASS	2024/12/5
LTE Band 38	20	QPSK	1	0	38000	#1	OPUS 75kbps	97	359	18	26	PASS	2024/12/5

FR1 NR:

Air Interfac e	BW	Modulatio n	R B	R B	Channe I	Sampl e	Codec	Group	Secondary Group Contiguou s Point Count	Group May	Secondary Group Max Transvers e	v	Date
FR1 n77	100	DFT-s- OFDM QPSK	1	1	656000	#1	OPUS 6kbps	115	346	17	26	PASS	2024/12/12
FR1 n77	100	DFT-s- OFDM QPSK	1	1	656000	#1	OPUS 40kbps	118	348	17	26	PASS	2024/12/12
FR1 n77	100	DFT-s- OFDM QPSK	1	1	656000	#1	OPUS 75kbps	124	350	17	26	PASS	2024/12/12

WIFI:

Air Interfac e	BW	Modulati on	R B	R B	Channe I	Sampl e	Codec	Group	Group	Group May	Group	CV	Date
802.11b	20	1M	-	٠	6	#1	OPUS 6kbps	78	312	14	26	PASS	2024/12/12
802.11b	20	1M	1	-	6	#1	OPUS 40kbps	80	315	15	26	PASS	2024/12/12
802.11b	20	1M	-	-	6	#1	OPUS 75kbps	82	314	15	26	PASS	2024/12/12

- 1. Phone Condition: Air Link; Mute on; Backlight off; Max Volume
- 2. The detail frequency response results please refer to appendix A.
- 3. According to the manufacturer's statement, NR OTT selects the worst mode in LTE for testing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions



Report No.: SUCR241000040302

Rev.:

45 of 46 Page:

Equipment list 8

	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date	Cal. Due date	
\boxtimes	Software	SPEAG	DASY8	NA	NCR	NCR	
\boxtimes	DAE	SPEAG	DAE4	1740	2023-11-03	2024-11-02	
\boxtimes	DAE	SPEAG	DAE4	1374	2024-10-30	2025-10-29	
\boxtimes	Audio Magnetic 1D Field Probe	SPEAG	AM1DV3	3115	2024-08-15	2025-08-14	
\boxtimes	Test Arch SD HAC	SPEAG	NA	NA	NCR	NCR	
\boxtimes	Audio Magnetic Measuring Instrument	SPEAG	AMMI	1028	NCR	NCR	
\boxtimes	Audio Magnetic	SPEAG	AMCC	1143	N/A	N/A	
\boxtimes	Universal Radio Communication Tester	R&S	CMW500	111637	2024-09-10	2025-09-09	
\boxtimes	RADIO COMMUNICATION TESTR	R&S	CMX500	101930	2024-02-01	2025-01-31	
\boxtimes	Humidity and Temperature Indicator	MingGao	MingGao	NA	2024-06-13	2025-06-12	

Note:

2. NCR: "No-Calibration Required".

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions

^{1.} All the equipments are within the valid period when the tests are performed.



Report No.: SUCR241000040302

Rev.:

46 of 46 Page:

9 Calibration certificate

Please see the Appendix B

Photographs 10

Please see the Appendix C

11 **EUT Constructional Details**

Please see the Appendix D

Appendix A: Detailed Test Results

Appendix B: Calibration certificate

Appendix C: Photographs

Appendix D: EUT Constructional Details

---End of Report---

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sqs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Tems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-fems-and-Conditions-and-C

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Member of the SGS Group (SGS SA)