


Alliance_eROU

User Manual

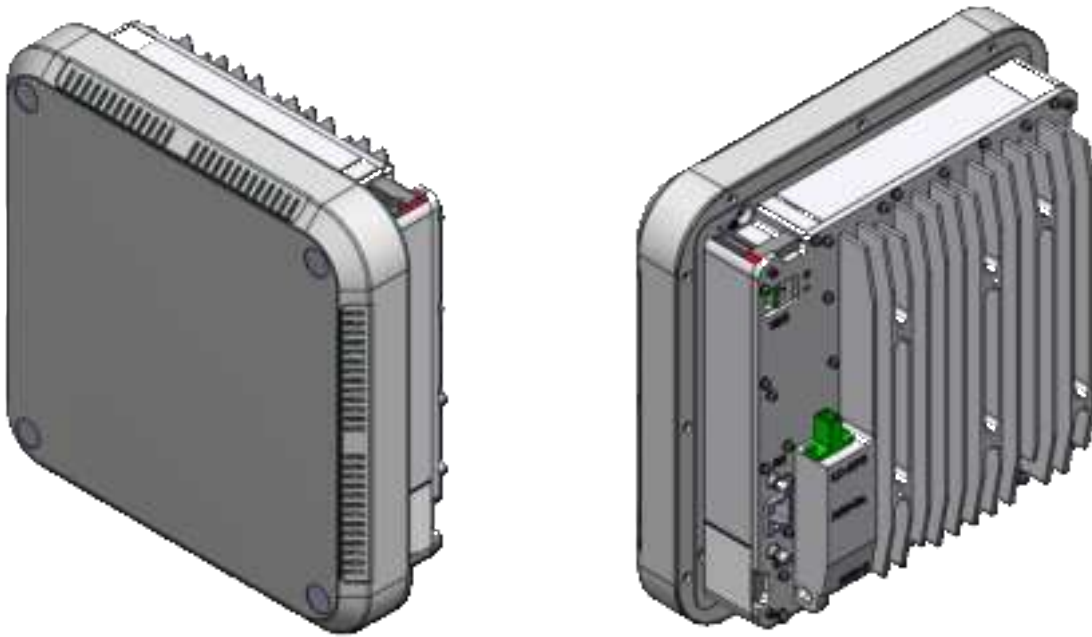

Document Reference:

Version:	V1.3
Document Status:	Release 4
Issue Date:	Mar 10, 2022
Author:	Hyo-Seok Oh
Department:	R&D Division Team 2
Authorizing Manager:	hyun-suk Chae

REVISION HISTORY

Version	Issue Date	No. of Pages	Initials	Details of Revision Changes
V 1.0	March 09, 2020		Original	
V 1.1	Jun 23, 2020			eROUa_682335 Add
V 1.2	Jan 25, 2022			eROUa_682335_R Add
V 1.3	Mar 10, 2022			eROU_781717 Add

Technical Support

SOLID serial numbers must be available to authorize technical support and/or to establish a return authorization for defective units. The serial numbers are located on the back of the unit, as well as on the box in which they were delivered. Additional support information may be obtained by accessing the SOLiD Tehcnology, Inc. website at www.solid.co.kr or send email at sjkim@solid.co.kr

This manual is produced by Global Business Division Business Team Printed in Korea.

Contents

<i>Section1</i>	<i>Safety & Certification Notice</i>	<i>4</i>
<i>Section2</i>	<i>System configuration and Functions</i>	<i>8</i>
2.1	eROU(edge Remote Optic Unit)	8
2.1.1	Specifications of eROU	9
2.1.2	Port on eROU	11
2.1.2.1	Functions.....	11
2.2	AC/DC Adaptor information	12
<i>Section3</i>	<i>System Installation</i>	<i>13</i>
3.1	eROU Installation.....	13
3.1.1	eROU Enclosure installation	13
3.1.2	eROU(External Antenna) Mount Installation.....	15
3.1.3	Installation Cable Gland	17
3.1.4	Power cabling.....	18
3.1.8	Ground cabling	18

Section1

Safety & Certification Notice

“Only qualified personnel should handle the DAS equipment. Any person involved in installation or service of the DAS should understand and follow these safety guidelines.”

- Obey all general and regional installation and safety regulations relating to work on high voltage installations, as well as regulations covering correct use of tools and personal protective equipment.
- The power supply unit in repeaters contains dangerous voltage level, which can cause electric shock. Switch the mains off prior to any work in such a repeater. Any local regulations are to be followed when servicing repeaters.
- eROU equipment is exclusive to the indoor.
- Use this unit only for the purpose specified by the manufacturer. Do not carry out any modifications or fit any spare parts which are not sold or recommended by the manufacturer. This could cause fires, electric shock or other injuries.
- Any DAS system or Fiber BDA will generate radio (RF) signals and continuously emit RF energy. Avoid prolonged exposure to the antennas. SOLiD recommends maintaining a **50 cm** minimum clearance from the antenna while the system is operating.
- Do not operate this unit on or close to flammable materials, as the unit may reach high temperatures due to power dissipation.
- Do not use any solvents, chemicals, or cleaning solutions containing alcohol, ammonia, or abrasives on the DAS equipment. Alcohol may be used to clean fiber optic cabling ends and connectors.
- To prevent electrical shock, switch the main power supply off prior to working with the DAS System or Fiber BDA. Never install or use electrical equipment in a wet location or during a lightning storm.
- Do not look into the ends of any optical fiber or directly into the optical transceiver of any digital unit. Use an optical spectrum analyzer to verify active fibers. Place a protective cap over any radiating transceiver or optical fiber connector to avoid the potential of radiation exposure.
- Allow sufficient fiber length to permit routing without severe bends.
- For pluggable equipment, make sure to install the socket outlet near the equipment so that it is easily accessible.
- A readily accessible disconnect device shall be incorporated external to the equipment.
- This power of this system shall be supplied through wiring installed in a normal building.


If powered directly from the mains distribution system, it shall be used additional protection, such as

overvoltage protection device

- Only 50 ohm rated antennas, cables and passive equipment shall be used with this remote. Any equipment attached to this device not meeting this standard may cause degradation and unwanted signals in the bi-directional system. All components connected to this device must operate in the frequency range of this device.
- Only 50 ohm rated antennas, cables and passive components operating from 150 - 3 GHz shall be used with this device.
- The head end unit must always be connected to the Base Station using a direct cabled connection. This system has not been approved for use with a wireless connection via server antenna to the base station.
- Access can only be gained by SERVICE PERSONS or by USERS who have been instructed about the reasons for the restrictions applied to the location and about any precautions that shall be taken; and
- Access is through the use of a TOOL or lock and key, or other means of security, and is on trolled by the authority responsible for the location.
- Notice! Be careful not to touch the Heat-sink part due to high temperature.



- Signal booster warning label message should include as follows:

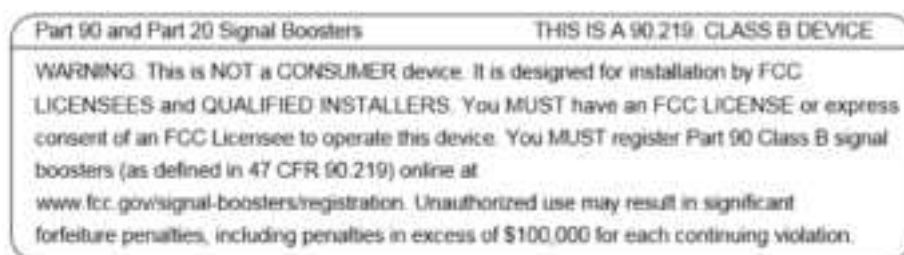



- Certification

- FCC: This equipment complies with the applicable sections of Title 47 CFR Parts 15,22,24,27 and 90
 - Use of unauthorized antennas, cables, and/or coupling devices not conforming with ERP/EIRP and/or indoor-only restrictions is prohibited.
 - Home/ personal use are prohibited.
- UL/CUL: This equipment complies with UL and CUL 62368-1 Standard for safety for information technology equipment,including electrical business equipment
- FDA/CDRH: This equipment uses a Class 1 LASER according to FDA/CDRH Rules.This product conforms to all applicable standards of 21 CFR Chapter 1, Subchapter J, Part 1040

FCC Part 15.105 statement

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

FCC Part 15.21 statement

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

RF Exposure Statement

The antenna(s) must be installed such that a minimum separation distance of at least **35 cm** is maintained between the radiator (antenna) and all persons at all times. This device must not be co-located or operating in conjunction with any other antenna or transmitter.

Section2

System configuration and Functions

2.1 eROU (edge Remote Optic Unit)

eROU receives TX optical signals from eHUB and converts them into RF signals. The converted RF signal is radiated to the antenna port via the AMP and Multiplexer.

When receiving RX signals through the antenna port, this unit filters out-of-band signals in a corresponding Multiplexer and sends the results to OPTIC to make electronic-optical conversion of them. After converted, the signals are sent to a upper device of eHUB.

The eROU supports up to 4 bands.

In addition, if band extension is required, another eROU can be added up to three using optical splitters and RF ports. However, the band expansion equipment will be developed in the future.

And eROU is divided into an Internal product with an antenna and an External product without an antenna..

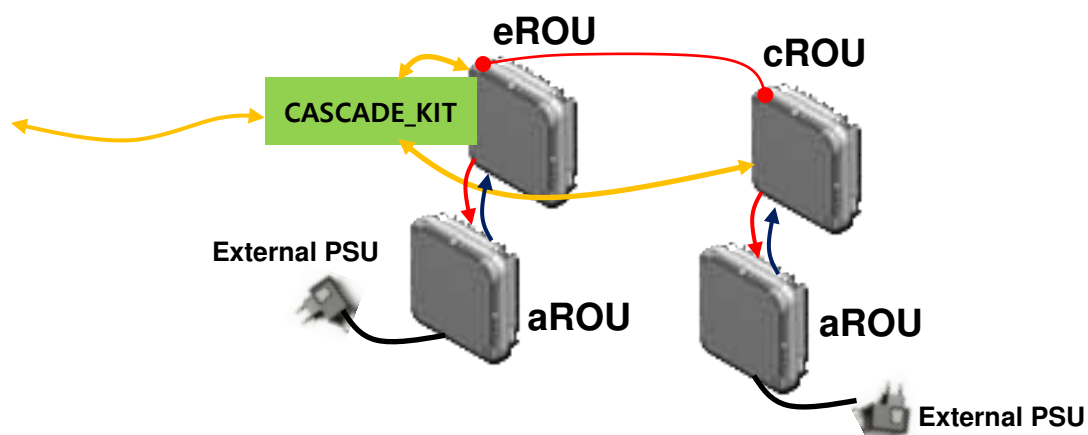


Figure 1. eROU Configuration Diagram



Figure 2. eROU outer Look

2.1.1 Specifications of eROU

Item	Spec.		Remark
	eROU		
The rated mean output Power per band	600 700LTE 8085	+19dBm	
	1900P AWS 2300WCS 2500_100TDD	+23dBm	
	3500CBRS	+22dBm	
The nominal downlink bandwidth	600	35MHz	
	700LTE	40MHz	
	8085	32MHz	
	1900P	65MHz	
	AWS	70MHz	
	2300WCS	10MHz	
	2500_100TDD	194MHz	
	3500CBRS	150MHz	

The nominal uplink bandwidth	600	35MHz			
	700LTE	700FN B1 : 17MHz 700FN B2 : 21MHz			
	8085	32MHz			
	1900P	65MHz			
	AWS	70MHz			
	2300WCS	10MHz			
	2500_100TDD	194MHz			
	3500CBRS	150MHz			
The nominal passband gain	Downlink	600	61dB		
		700LTE_FN	63dB		
		8085	58dB		
		1900P	67dB		
		AWS13	67dB		
		2300WCS	69dB		
		2500_100TDD	67dB		
		3500CBRS	56dB		
	Uplink	600 8085 3500CBRS	52dB		
		2300WCS	48dB		
		700LTE_FN 1900P AWS13 2500_100TDD	45dB		
	Input/ Output Impedance		50 ohm		
	Weight		2.6 kg(Internal)		Common Part
3.0 kg(External)					
Power consumption		35W			
Temperature range		-5°C to +50°C		Ambient Temperature	
Humidity Range		5% ~ 90%		Non-condensing	
Sealing (Remote Unit)		IEC/UL/CSA 62368-1			
Size(mm)		220 x 220 x 90		Integrated Antenna	
		200 x 200 x 73		External Antenna	

2.1.1 Port on eROU & eROUa

2.1.1.1 Functions



Figure 4. The name of each port on eROU

No	Port	Quantity	Remark
1	Optical Port	1EA	LC/APC
2	ANTENNA PORT(External Only)	1EA	2.2-5 type female
3	Power IN	1EA	Terminal_Block_CONN_2P(TLPS-302V-02P-G)
4	ADD ON eROU Port	2EA	QMA-type female
5	ADD ON eROU Port	1EA	RJ45
6	USB Port	1EA	USB-C Type

2.2 AC/DC Adaptor information


Manufacturer	SHENZHEN HONOR ELECTRONIC
Model name	ADS-65DI-48-1 48065E
Specification	Input range 100-240V, 50/60Hz Output range 48Vdc 1.35A / 64.8W

This product is intended to be supplied by a Listed Switching Adapter marked “Class 2” or “LPS” or “PS2” and rated from 100 - 240V~; 50/60HZ; 1.5A max.

Section3 System Installation

3.1 eROU Installation

The following table shows the required accessories and tools for installing eROU.

No	Tools	Q'ty	Specification	Remark
1		1	(+), Ø3.0 Length is more than 20mm	For fixing

3.1.1 eROU Enclosure installation

The eROU can be mounted on a wall or ceiling.

and divided into the version of External Antenna and the version of Internal Antenna.

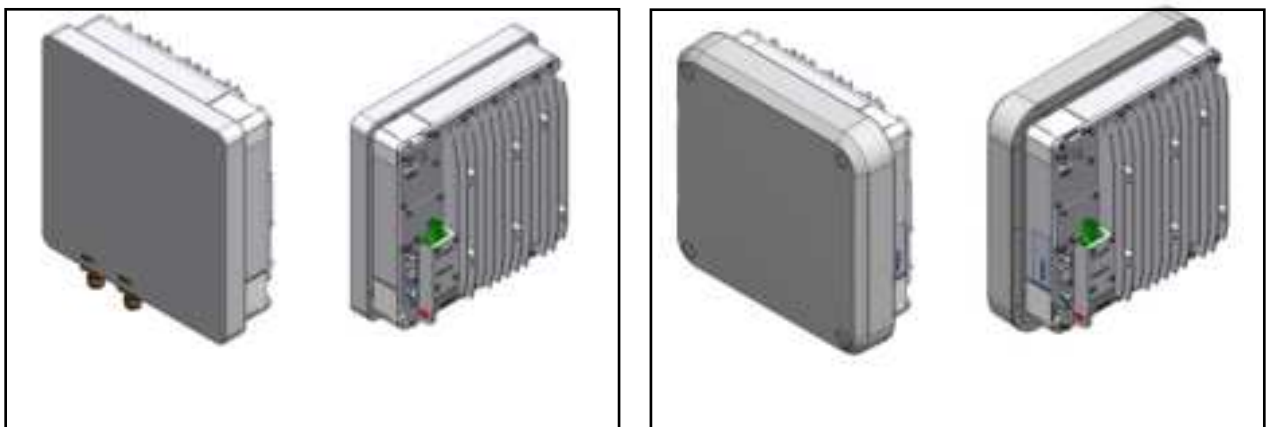


Figure 3. eROU appearance (Left : External Antenna, Right : Internal Antenna)

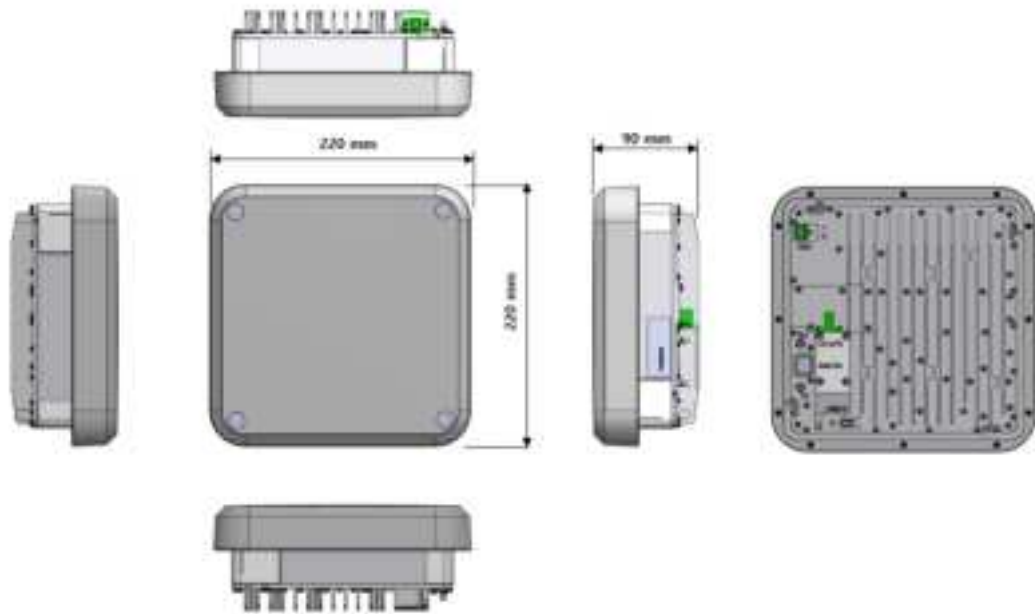


Figure 4. Dimension used to install eROU (internal)



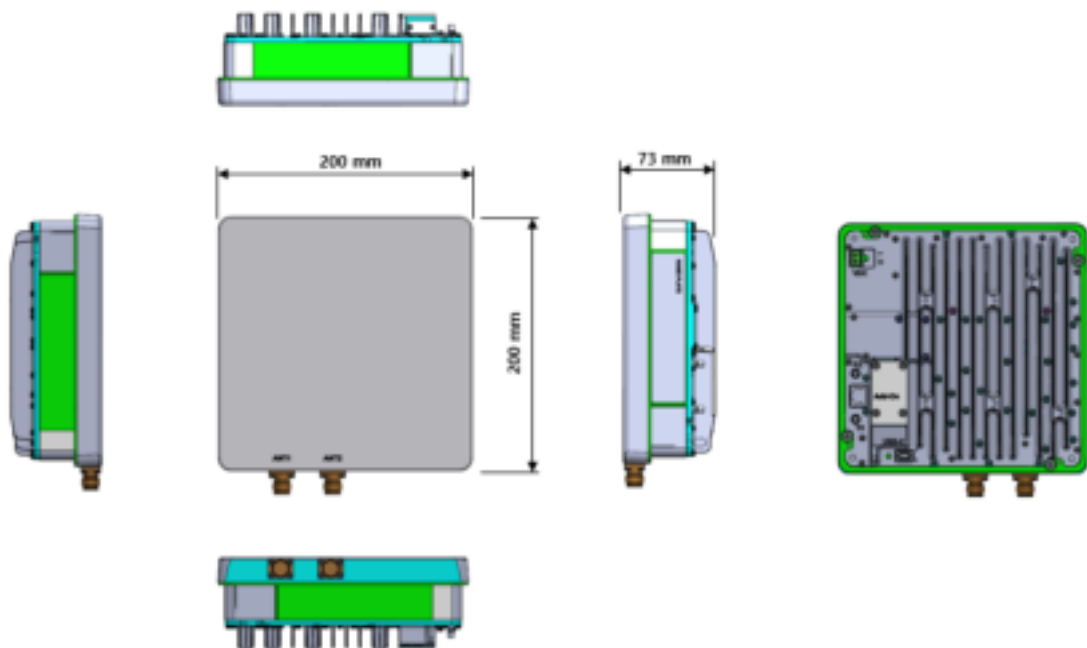


Figure 3. Dimension used to install eROU (external)


3.1.2 eROU (External Antenna) Mount Installation

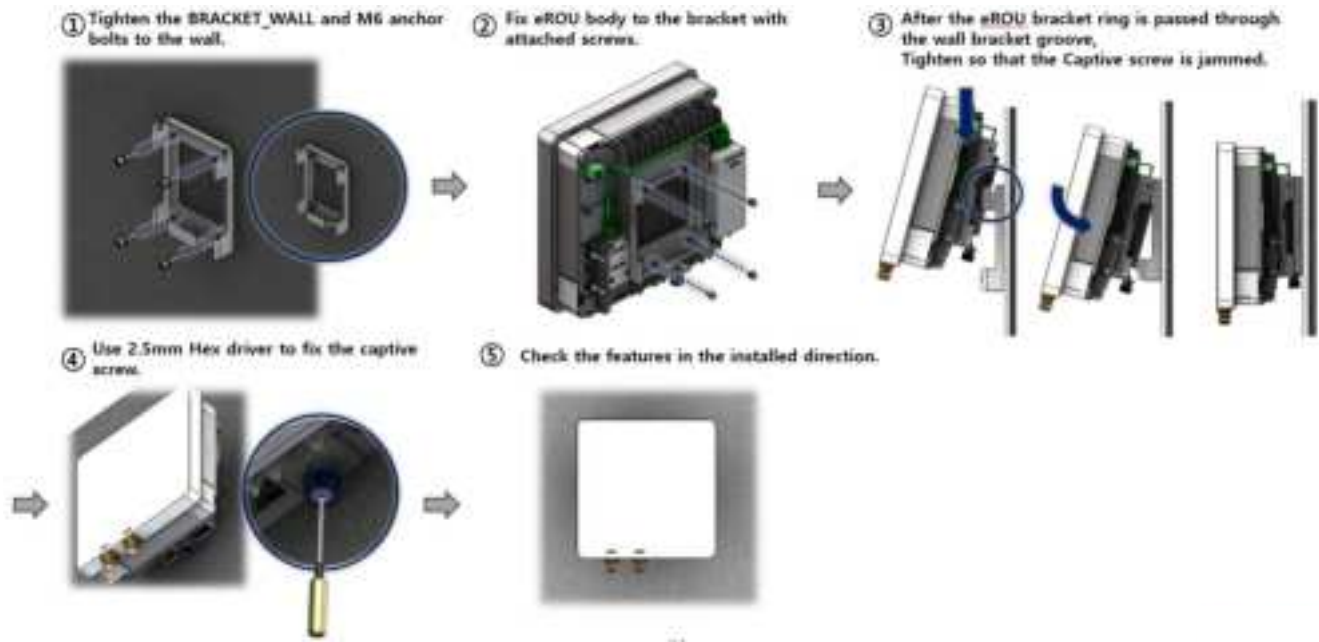

3.1.3 eROU (Internal Antenna) Mount Installation_ Case .1

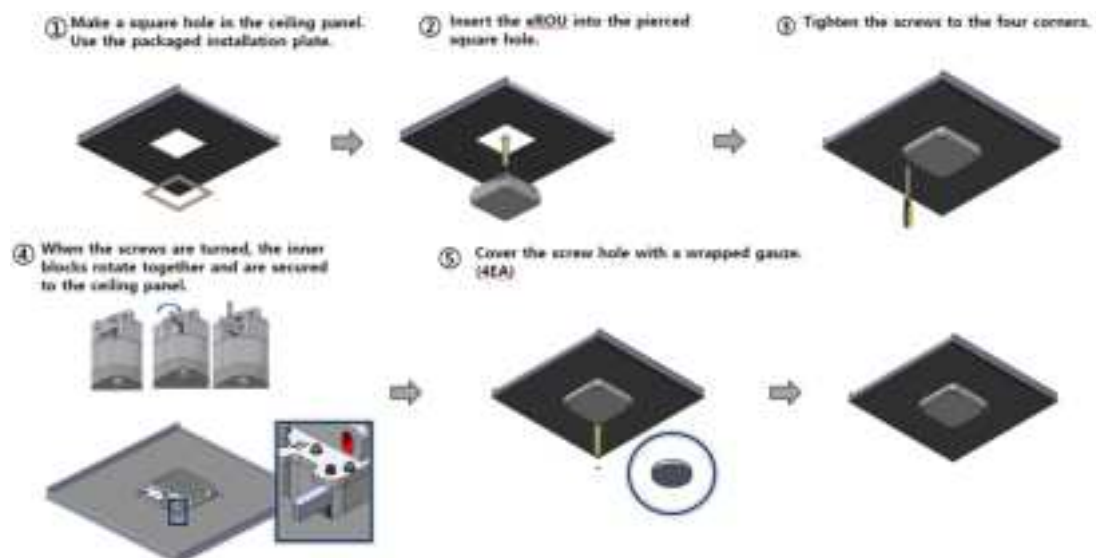


3.1.4 eROU (Internal Antenna) Mount Installation_ Case .2

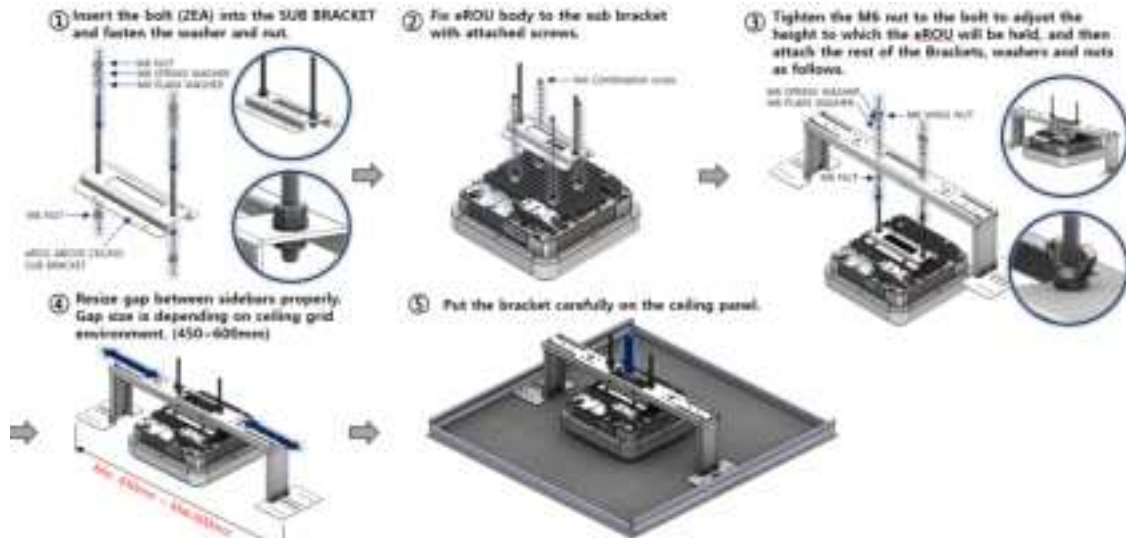


3.1.5 Installation Cable Gland


3.1.5.1 eROU

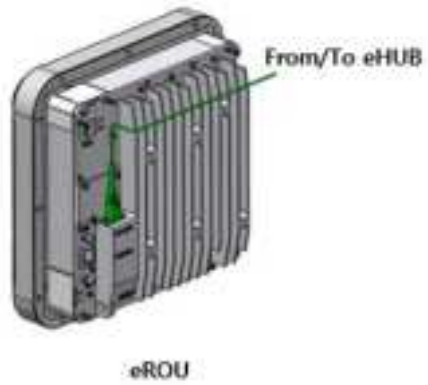

3.1.5.2 Combine of eROU and cROU

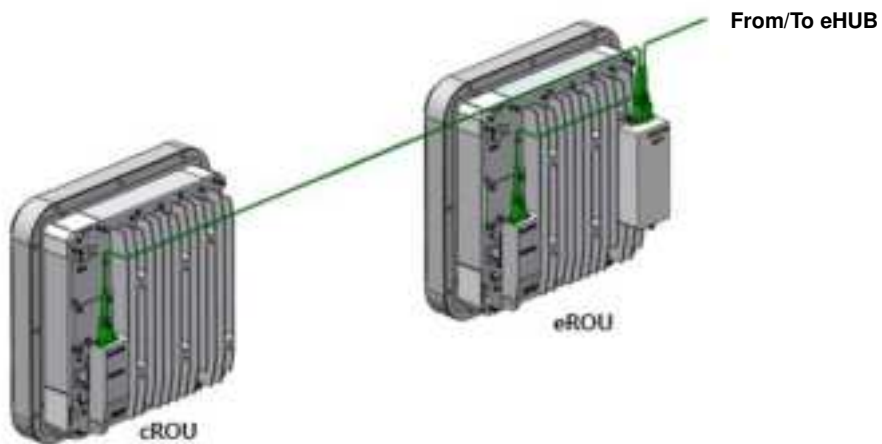

3.1.6 Power cabling

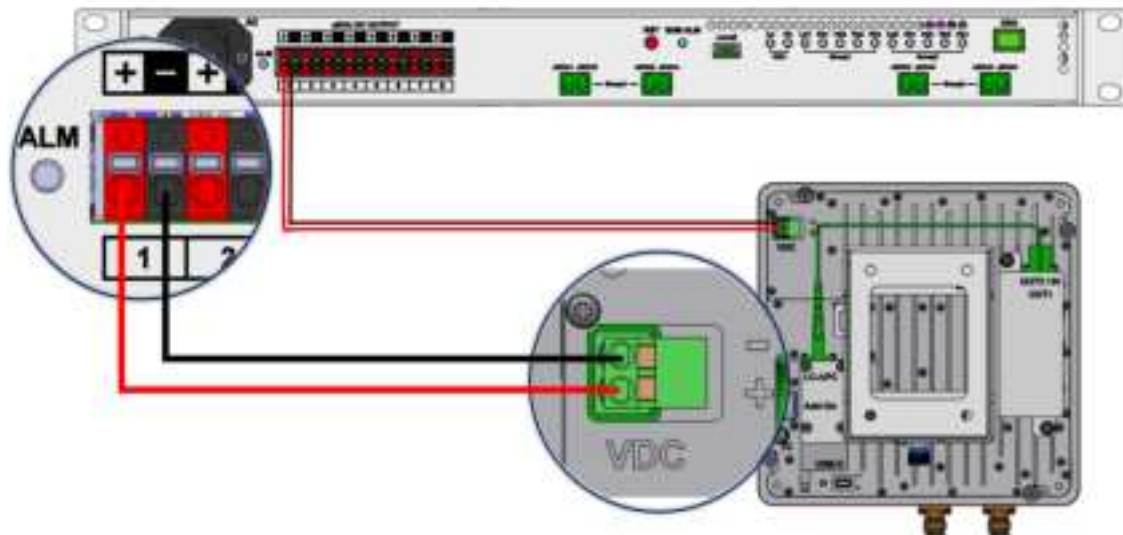

1. The eROU receives DC power from the eHub or external adapter.
2. Cable length between eHub and eROU supports up to 1 km.(Cable specifications recommend AWG14 and Cable type shall be marked “CL2”.)
3. If the maximum length between the eHub and the eROU is exceeded, the use of the External Adapter is recommended.

** Adaptor is extra purchases. Specified below shall be used only adapter.

3.1.8 Ground cabling

Not required.

For external & Internal antenna type, the following antenna gain must be applied.

Band name	DL (MHz)	Max. Peak gain (dBi) Internal antenna type	Max. Peak gain (dBi) External antenan type
Lower 700 MHz	728 -746 MHz	3.27 (ANT 1)	11
Upper 700 MHz	746 -757 MHz	3.27 (ANT 1)	
FirstNet	758 -768 MHz	3.27 (ANT 1)	
ESMR	862-869 MHz	3.67 (ANT 2)	
Cellular	869-894 MHz	3.67 (ANT 2)	
Broadband PCS	1 930 -1 995 MHz	4.72 (ANT 2)	7
AWS	2 110 -2 190 MHz	4.29 (ANT 1)	7