



## 8. Radiated Spurious Emissions

### 8.1. Block diagram of test setup


In 3 m Anechoic Chamber, test setup diagram for 9 kHz - 30 MHz:

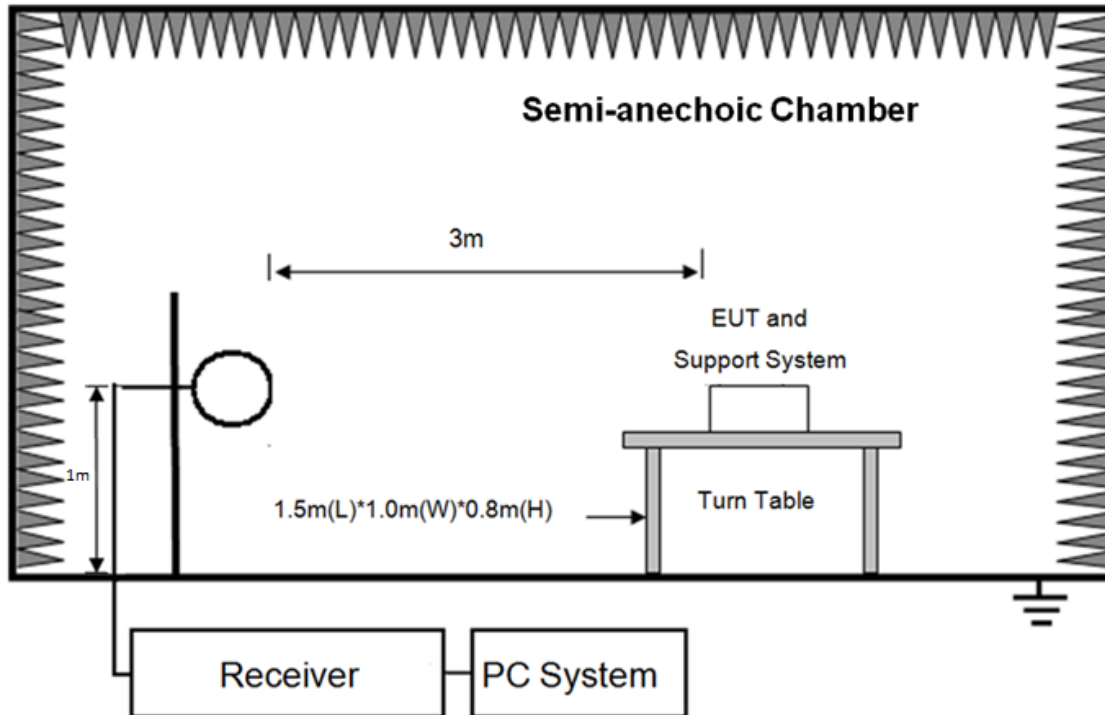

In 3 m Anechoic Chamber, test setup diagram for 30 MHz – 1 GHz:

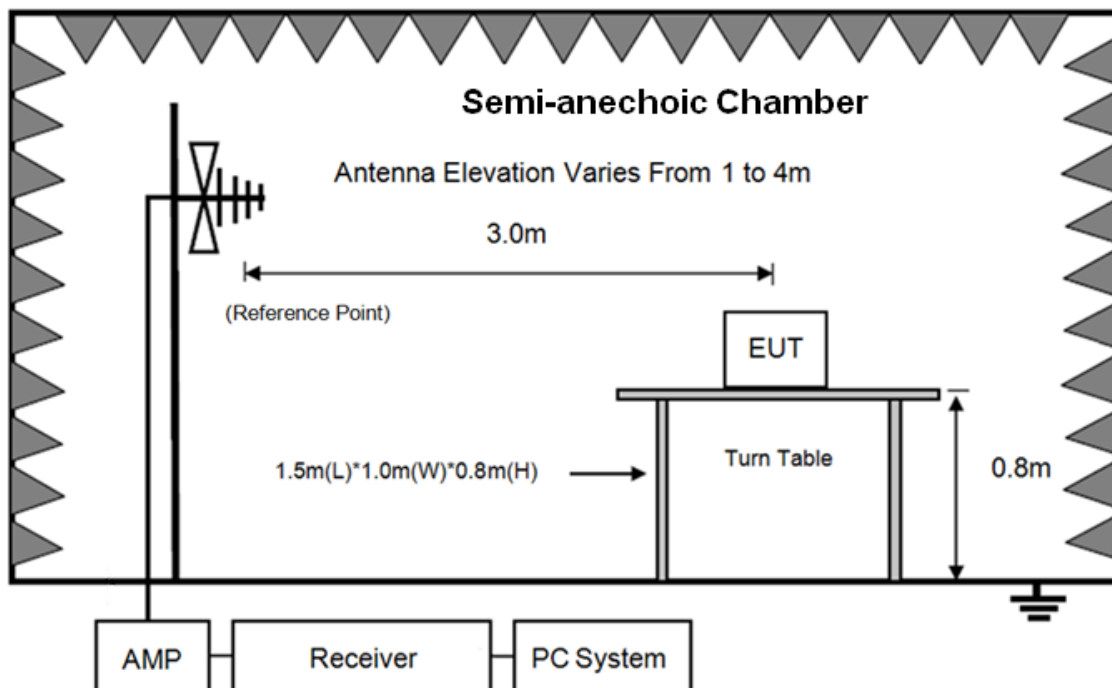

In 3 m Anechoic Chamber, test setup diagram for frequency above 1 GHz:

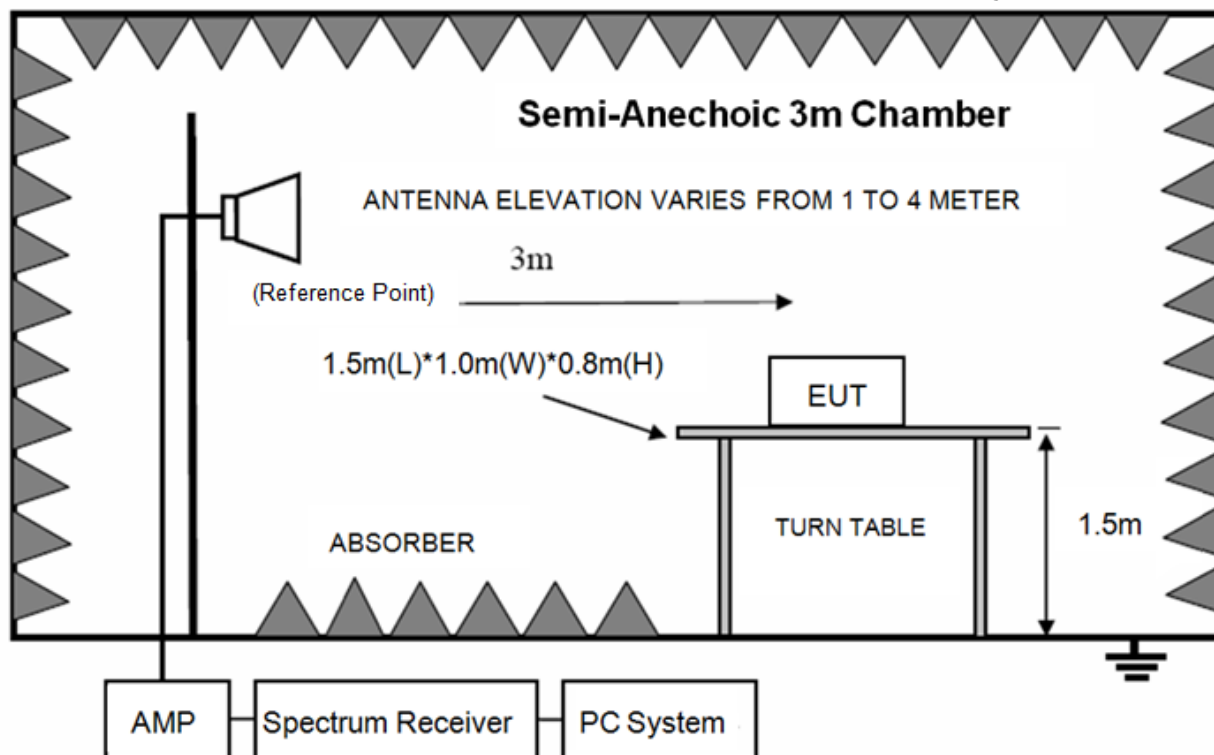

Note: For harmonic emissions test an appropriate high pass filter was inserted in the input port of AMP.

## 8.2. Limit

(1) FCC 15.205 Restricted frequency band

| MHz                      | MHz                 | MHz           | GHz              |
|--------------------------|---------------------|---------------|------------------|
| 0.090-0.110              | 16.42-16.423        | 399.9-410     | 4.5-5.15         |
| <sup>1</sup> 0.495-0.505 | 16.69475-16.69525   | 608-614       | 5.35-5.46        |
| 2.1735-2.1905            | 16.80425-16.80475   | 960-1240      | 7.25-7.75        |
| 4.125-4.128              | 25.5-25.67          | 1300-1427     | 8.025-8.5        |
| 4.1772&4.17775           | 37.5-38.25          | 1435-1626.5   | 9.0-9.2          |
| 4.2072&4.20775           | 73-74.6             | 1645.5-1646.5 | 9.3-9.5          |
| 6.215-6.218              | 74.8-75.2           | 1660-1710     | 10.6-12.7        |
| 6.26775-6.26825          | 108-121.94          | 1718.8-1722.2 | 13.25-13.4       |
| 6.31175-6.31225          | 123-138             | 2200-2300     | 14.47-14.5       |
| 8.291-8.294              | 149.9-150.05        | 2310-2390     | 15.35-16.2       |
| 8.362-8.366              | 156.52475-156.52525 | 2483.5-2500   | 17.7-21.4        |
| 8.37625-8.38675          | 156.7-156.9         | 2690-2900     | 22.01-23.12      |
| 8.41425-8.41475          | 162.0125-167.17     | 3260-3267     | 23.6-24.0        |
| 12.29-12.293             | 167.72-173.2        | 3332-3339     | 31.2-31.8        |
| 12.51975-12.52025        | 240-285             | 3345.8-3358   | 36.43-36.5       |
| 12.57675-12.57725        | 322-335.4           | 3600-4400     | ( <sup>2</sup> ) |
| 13.36-13.41              |                     |               |                  |

<sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup>Above 38.6

(2) RSS-GEN Restricted frequency band\*

| MHz               | MHz                 | MHz           | GHz         |
|-------------------|---------------------|---------------|-------------|
| 0.090-0.110       | 12.57675-12.57725   | 399.9-410     | 7.25-7.75   |
| 0.495-0.505       | 13.36-13.41         | 608-614       | 8.025-8.5   |
| 2.1735-2.1905     | 16.42-16.423        | 960-1427      | 9.0-9.2     |
| 3.020-3.026       | 16.69475-16.69525   | 1435-1626.5   | 9.3-9.5     |
| 4.125-4.128       | 16.80425-16.80475   | 1645.5-1646.5 | 10.6-12.7   |
| 4.17725-4.17775   | 25.5-25.67          | 1660-1710     | 13.25-13.4  |
| 4.20725-4.20775   | 37.5-38.25          | 1718.8-1722.2 | 14.47-14.5  |
| 5.677-5.683       | 73-74.6             | 2200-2300     | 15.35-16.2  |
| 6.215-6.218       | 74.8-75.2           | 2310-2390     | 17.7-21.4   |
| 6.26775-6.26825   | 108-138             | 2483.5-2500   | 22.01-23.12 |
| 6.31175-6.31225   | 149.9-150.05        | 2655-2900     | 23.6-24.0   |
| 8.291-8.294       | 156.52475-156.52525 | 3260-3267     | 31.2-31.8   |
| 8.362-8.366       | 156.7-156.9         | 3332-3339     | 36.43-36.5  |
| 8.37625-8.38675   | 162.0125-167.17     | 3345.8-3358   | Above 38.6  |
| 8.41425-8.41475   | 167.72-173.2        | 3500-4400     |             |
| 12.29-12.293      | 240-285             | 4.5-5.15      |             |
| 12.51975-12.52025 | 322-335.4           | 5.35-5.46     |             |

\* Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

(3) FCC 15.209 & RSS-GEN Limit.

| FREQUENCY<br>MHz | DISTANCE<br>Meters | FIELD STRENGTHS LIMIT                           |               |
|------------------|--------------------|-------------------------------------------------|---------------|
|                  |                    | μV/m                                            | dB(μV)/m      |
| 0.009 ~ 0.490    | 300                | 2400/F(kHz)                                     | 67.6-20log(F) |
| 0.490 ~ 1.705    | 30                 | 24000/F(kHz)                                    | 87.6-20log(F) |
| 1.705 ~ 30.0     | 30                 | 30                                              | 29.54         |
| 30 ~ 88          | 3                  | 100                                             | 40.0          |
| 88 ~ 216         | 3                  | 150                                             | 43.5          |
| 216 ~ 960        | 3                  | 200                                             | 46.0          |
| 960 ~ 1000       | 3                  | 500                                             | 54.0          |
| Above 1000       | 3                  | 74.0 dB(μV)/m (Peak)<br>54.0 dB(μV)/m (Average) |               |

Note: (1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3m}(\text{dB}\mu\text{V}/\text{m}) = \text{Limit}_{30m}(\text{dB}\mu\text{V}/\text{m}) + 40\text{Log}(30m/3m)$$

## (4) Limit for this EUT

All the emissions appearing within 15.205 & RSS-GEN restricted frequency bands shall not exceed the limits shown in 15.209 & RSS-GEN, all the other emissions shall be at least 20dB below the fundamental emissions or comply with 15.209 & RSS-GEN limits.

### 8.3. Test procedure

- (1) EUT height should be 0.8 m for below 1 GHz at a semi-anechoic chamber while EUT height should be 1.5 m for above 1 GHz at full chamber or semi-anechoic chamber ground with absorbers.
- (2) The antenna used as below table.

| Test frequency range | Test antenna used                      | Measuring distance |
|----------------------|----------------------------------------|--------------------|
| 9 kHz-30 MHz         | Active Loop antenna                    | 3 m                |
| 30 MHz-1 GHz         | Trilog Broadband Antenna               | 3 m                |
| 1 GHz-18 GHz         | Double Ridged Horn Antenna(1GHz-18GHz) | 3 m                |
| 18 GHz-40 GHz        | Horn Antenna(18GHz-40GHz)              | 3 m                |

According ANSI C63.10:2020 clause 6.4.4.2 and 6.5.3, for measurements below 30 MHz, the loop antenna was positioned with its plane vertical from the EUT and rotated about its vertical axis for maximum response at each azimuth position around the EUT. And the loop antenna also be positioned with its plane horizontal at the specified distance from the EUT. The center of the loop is 1 m above the ground. for measurement above 30 MHz, the Trilog Broadband Antenna or Horn Antenna was located 3 m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

- (3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

- (a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1m above ground.)

- (b) Change work frequency or channel of device if practicable.

- (c) Change modulation type of device if practicable.

- (d) Change power supply range from 85% to 115% of the rated supply voltage

- (e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was

investigated, and no any obvious emission were detected from 18GHz to 25GHz, so below final test was performed with frequency range from 9kHz to 18GHz.

- (4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 2020 on Radiated Emission test.
- (5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9-90 kHz, 110-490 kHz, for emissions from 9 kHz-90 kHz, 110 kHz-490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.
- (6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW

| Frequency band | RBW     |
|----------------|---------|
| 9 kHz-150 kHz  | 200 Hz  |
| 150 kHz-30 MHz | 9 kHz   |
| 30 MHz-1 GHz   | 120 kHz |

- (7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; According ANSI C63.10:2020 clause 4.1.4.2.2 procedure for Average measure.
- (8) X axis, Y axis, Z axis are tested, and worse setup X axis is reported.

#### 8.4. Test result


##### Pass. (See below detailed test result)

All the emissions except fundamental emission from 9 kHz to 25 GHz were comply with 15.209 limit.

Note1: According exploratory test no any obvious emission was detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

Note2: For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in transmission mode.

## Radiated Emission test (below 1GHz)

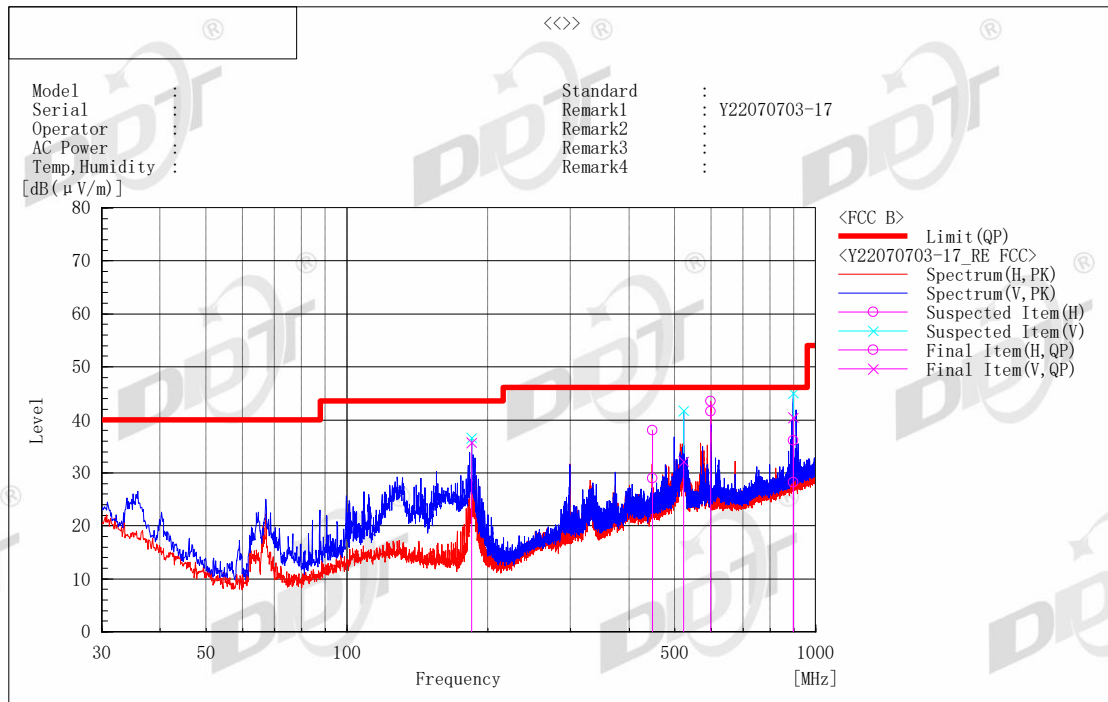

## Final Result

| No. | Frequency [MHz] | (P) | Reading QP [dB (μV)] | c. f [dB(1/m)] | Result QP [dB (μV/m)] | Limit QP [dB (μV/m)] | Margin QP [dB] | Height [cm] | Angle [°] | System | Remark |
|-----|-----------------|-----|----------------------|----------------|-----------------------|----------------------|----------------|-------------|-----------|--------|--------|
| 1   | 448.093         | H   | 32.2                 | -3.3           | 28.9                  | 46.0                 | 17.1           | 200.0       | 258.9     | 1      |        |
| 2   | 597.472         | H   | 42.3                 | -0.7           | 41.6                  | 46.0                 | 4.4            | 100.0       | 284.6     | 1      |        |
| 3   | 896.179         | H   | 24.8                 | 3.3            | 28.1                  | 46.0                 | 17.9           | 302.0       | 236.9     | 1      |        |
| 4   | 184.375         | V   | 47.9                 | -12.2          | 35.7                  | 43.5                 | 7.8            | 100.0       | 103.9     | 2      |        |
| 5   | 522.379         | V   | 33.8                 | -1.6           | 32.2                  | 46.0                 | 13.8           | 200.0       | 328.7     | 2      |        |
| 6   | 896.071         | V   | 36.6                 | 3.9            | 40.5                  | 46.0                 | 5.5            | 100.0       | 3.2       | 2      |        |

Note) Receiving antenna polarization : Horizontal and/or Vertical

Test Distance : 3 m, Antenna Height : 1 m to 4 m

Level QP (Quasi-Peak) = Reading QP + Factor (Antenna Factor + Cable Loss - Amp. Gain)

Margin QP (Quasi-Peak) = Limit - Level QP



## Radiated Emission test (1GHz -3GHz)

## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-26-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11B 11M ANT1 2412MHz

Data: 155

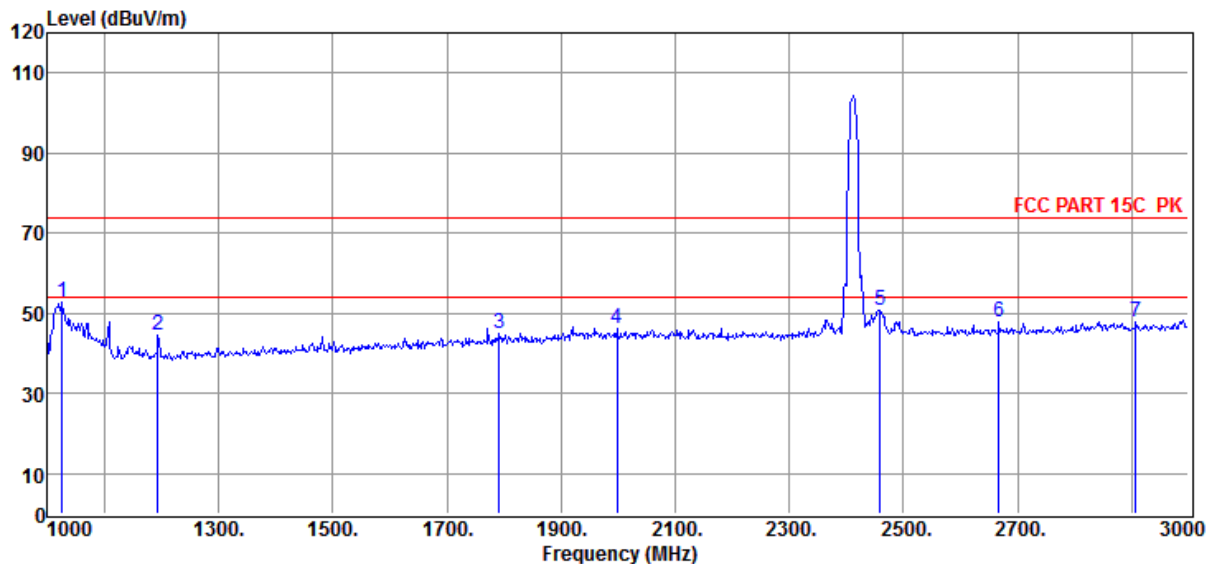

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 1026.00        | 64.21                   | 23.60                       | -35.20              | 52.61                       | 74.00                     | -21.39                | Peak     | HORIZONTAL   |
| 2              | 1194.00        | 55.39                   | 24.28                       | -35.12              | 44.55                       | 74.00                     | -29.45                | Peak     | HORIZONTAL   |
| 3              | 1792.00        | 52.13                   | 27.31                       | -34.45              | 44.99                       | 74.00                     | -29.01                | Peak     | HORIZONTAL   |
| 4              | 1998.00        | 52.17                   | 28.59                       | -34.42              | 46.34                       | 74.00                     | -27.66                | Peak     | HORIZONTAL   |
| 5              | 2460.00        | 56.42                   | 27.96                       | -33.81              | 50.57                       | 74.00                     | -23.43                | Peak     | HORIZONTAL   |
| 6              | 2668.00        | 52.58                   | 28.34                       | -33.29              | 47.63                       | 74.00                     | -26.37                | Peak     | HORIZONTAL   |
| 7              | 2908.00        | 51.99                   | 28.96                       | -33.32              | 47.63                       | 74.00                     | -26.37                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-26-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11B 11M ANT1 2412MHz

Data: 156

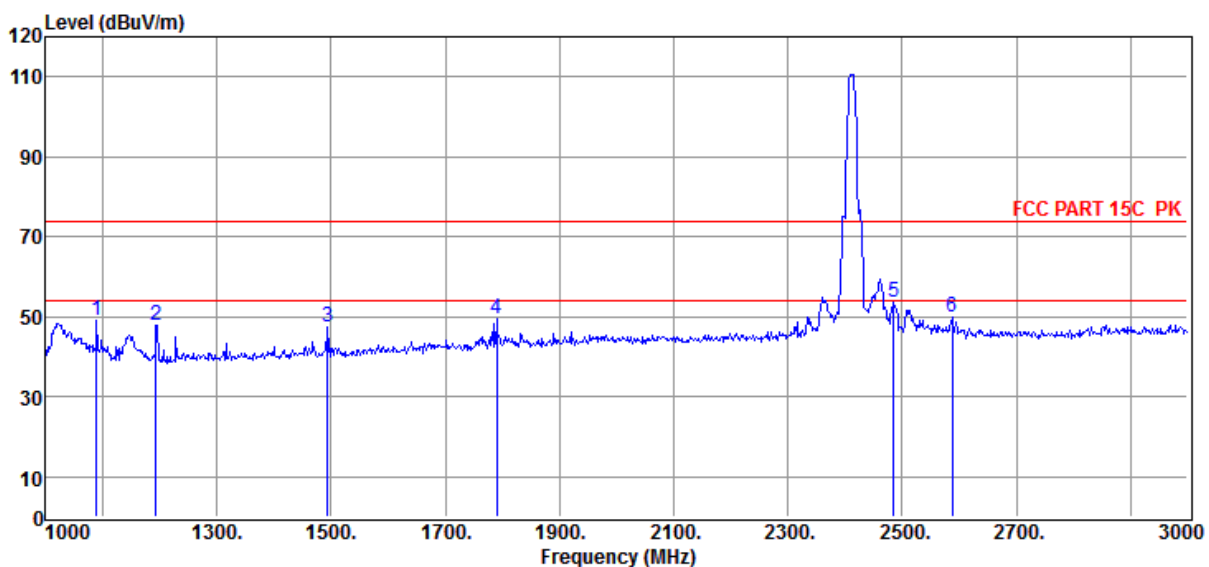

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 1090.00        | 60.34                   | 23.86                       | -35.24              | 48.96                       | 74.00                     | -25.04                | Peak     | VERTICAL     |
| 2              | 1194.00        | 58.81                   | 24.28                       | -35.12              | 47.97                       | 74.00                     | -26.03                | Peak     | VERTICAL     |
| 3              | 1494.00        | 56.69                   | 25.48                       | -34.71              | 47.46                       | 74.00                     | -26.54                | Peak     | VERTICAL     |
| 4              | 1790.00        | 56.64                   | 27.30                       | -34.47              | 49.47                       | 74.00                     | -24.53                | Peak     | VERTICAL     |
| 5              | 2486.00        | 59.28                   | 27.92                       | -33.75              | 53.45                       | 74.00                     | -20.55                | Peak     | VERTICAL     |
| 6              | 2588.00        | 55.20                   | 28.13                       | -33.53              | 49.80                       | 74.00                     | -24.20                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.



# Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-26-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11B 11M ANT2 2412MHz

Data: 157

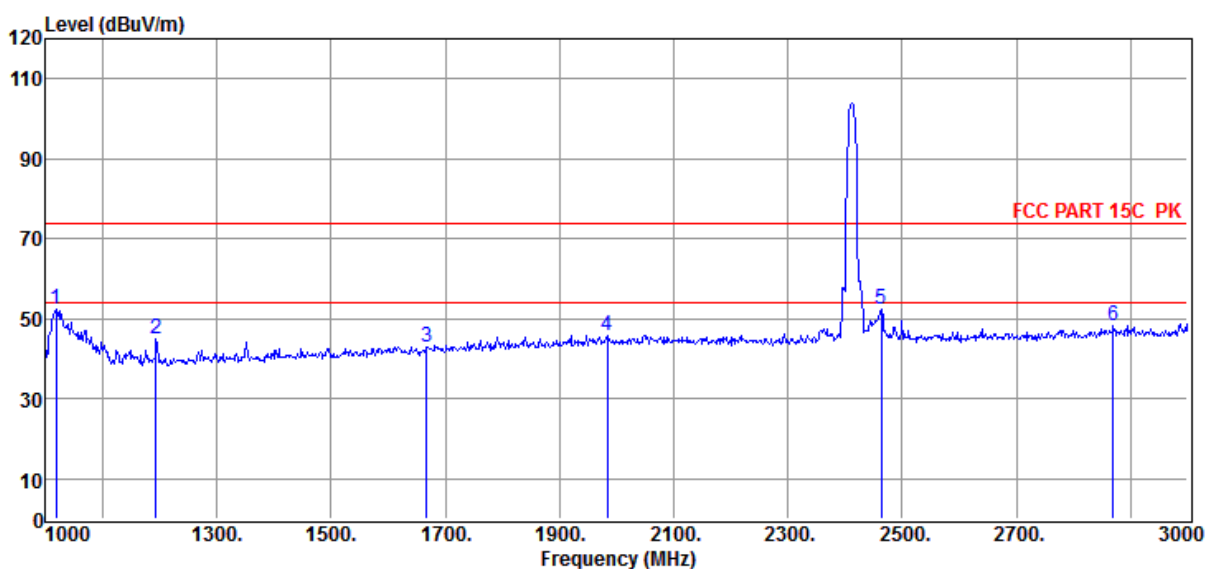

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 1018.00        | 64.19                   | 23.57                       | -35.24              | 52.52                       | 74.00                     | -21.48                | Peak     | HORIZONTAL   |
| 2              | 1194.00        | 55.85                   | 24.28                       | -35.12              | 45.01                       | 74.00                     | -28.99                | Peak     | HORIZONTAL   |
| 3              | 1668.00        | 50.99                   | 26.54                       | -34.51              | 43.02                       | 74.00                     | -30.98                | Peak     | HORIZONTAL   |
| 4              | 1984.00        | 51.46                   | 28.50                       | -34.26              | 45.70                       | 74.00                     | -28.30                | Peak     | HORIZONTAL   |
| 5              | 2464.00        | 58.11                   | 27.95                       | -33.82              | 52.24                       | 74.00                     | -21.76                | Peak     | HORIZONTAL   |
| 6              | 2870.00        | 52.88                   | 28.86                       | -33.38              | 48.36                       | 74.00                     | -25.64                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-26-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11B 11M ANT2 2412MHz

Data: 158

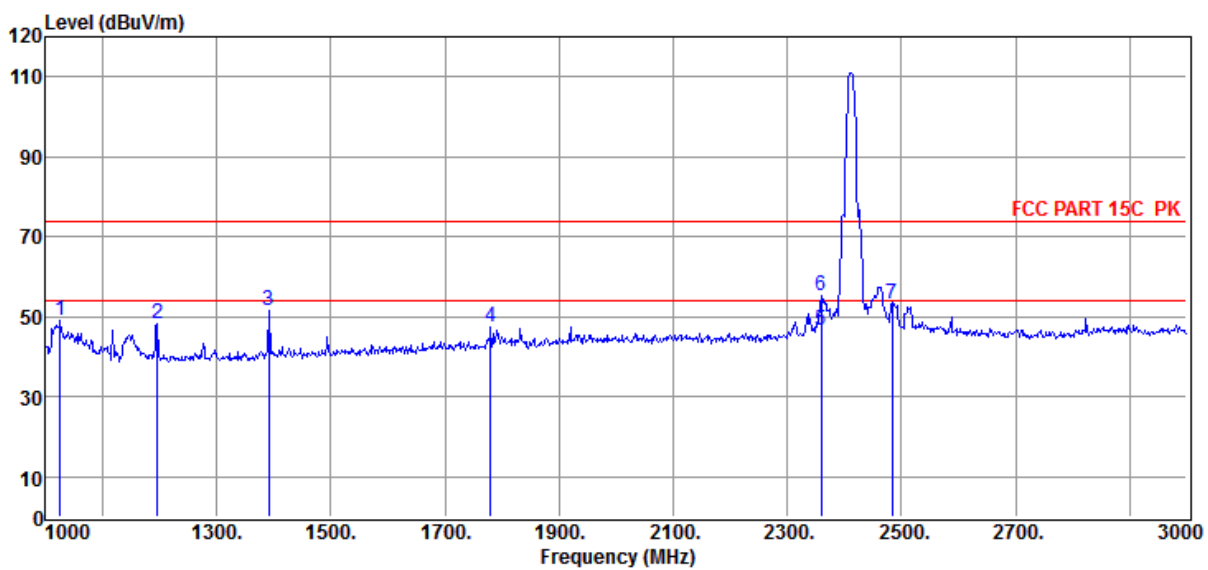

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 1026.00        | 60.74                   | 23.60                       | -35.20              | 49.14                       | 74.00                     | -24.86                | Peak     | VERTICAL     |
| 2              | 1196.00        | 59.03                   | 24.28                       | -35.13              | 48.18                       | 74.00                     | -25.82                | Peak     | VERTICAL     |
| 3              | 1392.00        | 61.41                   | 25.07                       | -34.75              | 51.73                       | 74.00                     | -22.27                | Peak     | VERTICAL     |
| 4              | 1780.00        | 54.87                   | 27.24                       | -34.54              | 47.57                       | 74.00                     | -26.43                | Peak     | VERTICAL     |
| 5              | 2360.00        | 52.61                   | 28.10                       | -33.98              | 46.73                       | 54.00                     | -7.27                 | Average  | VERTICAL     |
| 6              | 2360.00        | 61.06                   | 28.10                       | -33.98              | 55.18                       | 74.00                     | -18.82                | Peak     | VERTICAL     |
| 7              | 2484.00        | 59.23                   | 27.92                       | -33.79              | 53.36                       | 74.00                     | -20.64                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-26-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11B 11M ANT1 2437MHz

Data: 159

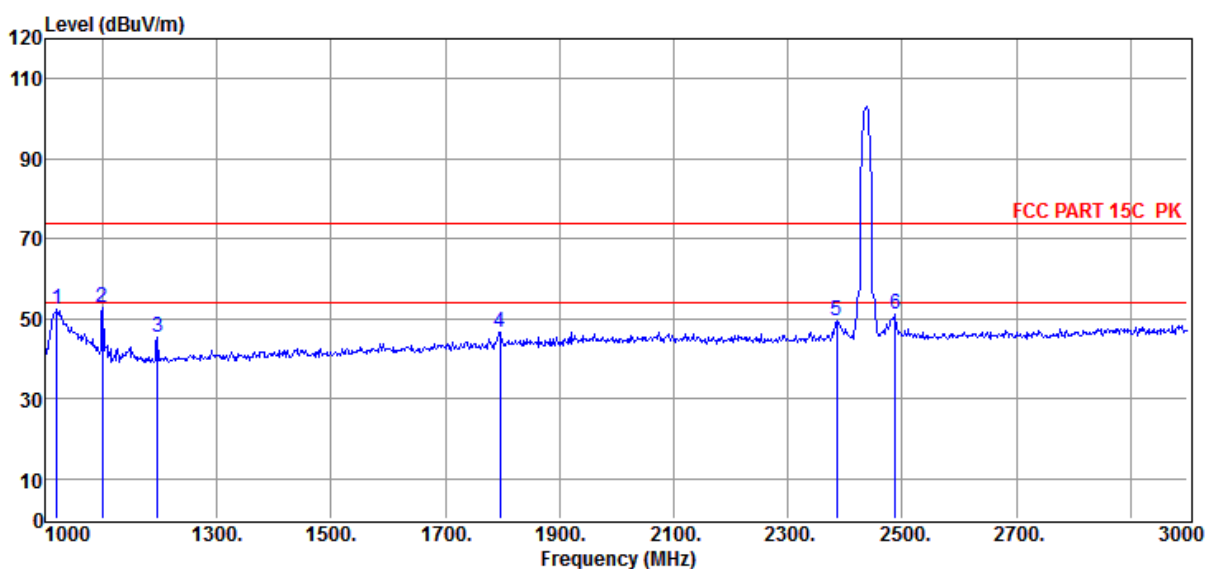

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 1020.00        | 63.86                   | 23.58                       | -35.24              | 52.20                       | 74.00                     | -21.80                | Peak     | HORIZONTAL   |
| 2              | 1100.00        | 64.30                   | 23.90                       | -35.24              | 52.96                       | 74.00                     | -21.04                | Peak     | HORIZONTAL   |
| 3              | 1196.00        | 56.08                   | 24.28                       | -35.13              | 45.23                       | 74.00                     | -28.77                | Peak     | HORIZONTAL   |
| 4              | 1796.00        | 53.73                   | 27.34                       | -34.42              | 46.65                       | 74.00                     | -27.35                | Peak     | HORIZONTAL   |
| 5              | 2386.00        | 55.59                   | 28.06                       | -34.01              | 49.64                       | 74.00                     | -24.36                | Peak     | HORIZONTAL   |
| 6              | 2488.00        | 56.94                   | 27.92                       | -33.72              | 51.14                       | 74.00                     | -22.86                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-26-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11B 11M ANT1 2437MHz

Data: 160

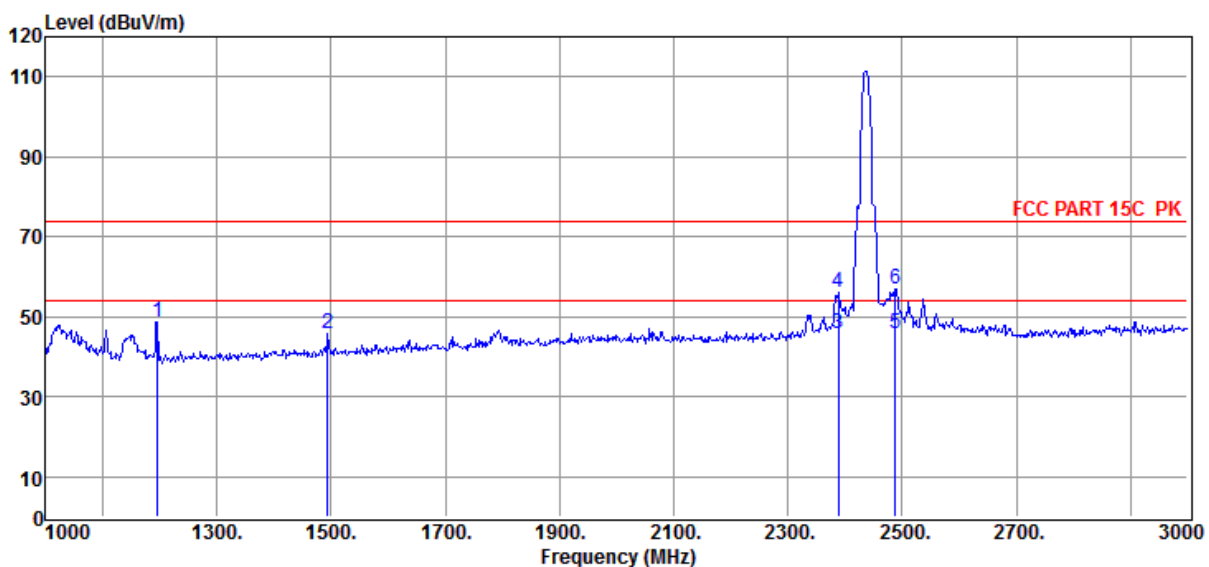

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 1196.00        | 59.53                   | 24.28                       | -35.13              | 48.68                       | 74.00                     | -25.32                | Peak     | VERTICAL     |
| 2              | 1494.00        | 54.92                   | 25.48                       | -34.71              | 45.69                       | 74.00                     | -28.31                | Peak     | VERTICAL     |
| 3              | 2388.00        | 51.68                   | 28.06                       | -34.01              | 45.73                       | 54.00                     | -8.27                 | Average  | VERTICAL     |
| 4              | 2388.00        | 62.18                   | 28.06                       | -34.01              | 56.23                       | 74.00                     | -17.77                | Peak     | VERTICAL     |
| 5              | 2488.00        | 51.62                   | 27.92                       | -33.72              | 45.82                       | 54.00                     | -8.18                 | Average  | VERTICAL     |
| 6              | 2488.00        | 62.71                   | 27.92                       | -33.72              | 56.91                       | 74.00                     | -17.09                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-26-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11B 11M ANT2 2437MHz

Data: 161

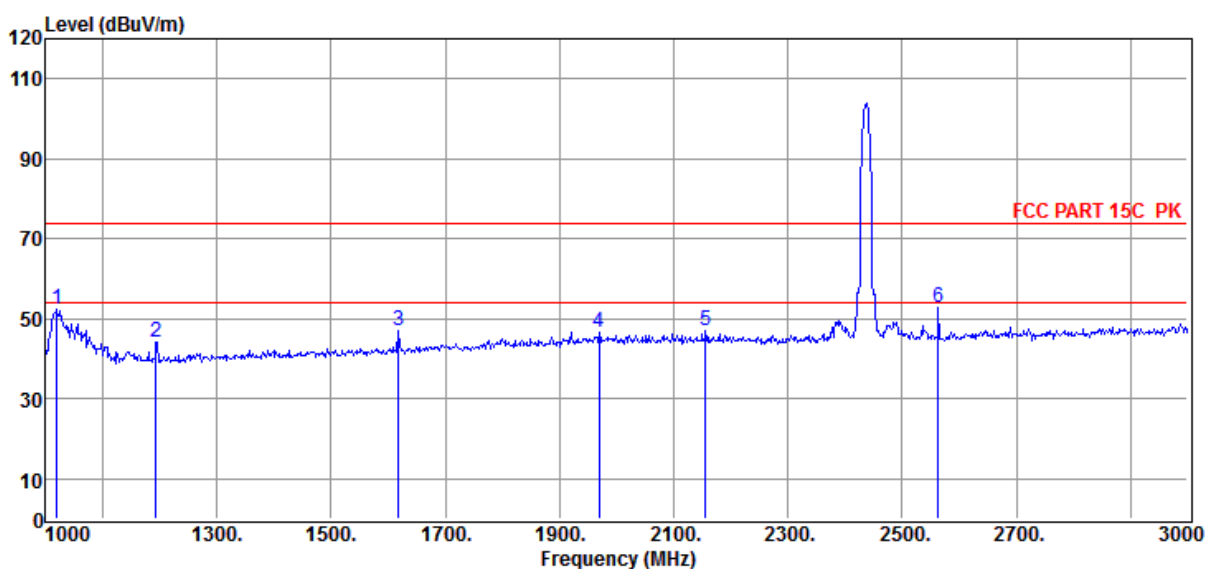

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 1020.00        | 64.07                   | 23.58                       | -35.24              | 52.41                       | 74.00                     | -21.59                | Peak     | HORIZONTAL   |
| 2              | 1194.00        | 54.97                   | 24.28                       | -35.12              | 44.13                       | 74.00                     | -29.87                | Peak     | HORIZONTAL   |
| 3              | 1618.00        | 55.39                   | 26.23                       | -34.54              | 47.08                       | 74.00                     | -26.92                | Peak     | HORIZONTAL   |
| 4              | 1970.00        | 52.39                   | 28.41                       | -34.22              | 46.58                       | 74.00                     | -27.42                | Peak     | HORIZONTAL   |
| 5              | 2156.00        | 53.04                   | 28.38                       | -34.32              | 47.10                       | 74.00                     | -26.90                | Peak     | HORIZONTAL   |
| 6              | 2564.00        | 58.16                   | 28.07                       | -33.54              | 52.69                       | 74.00                     | -21.31                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-26-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11B 11M ANT2 2437MHz

Data: 162

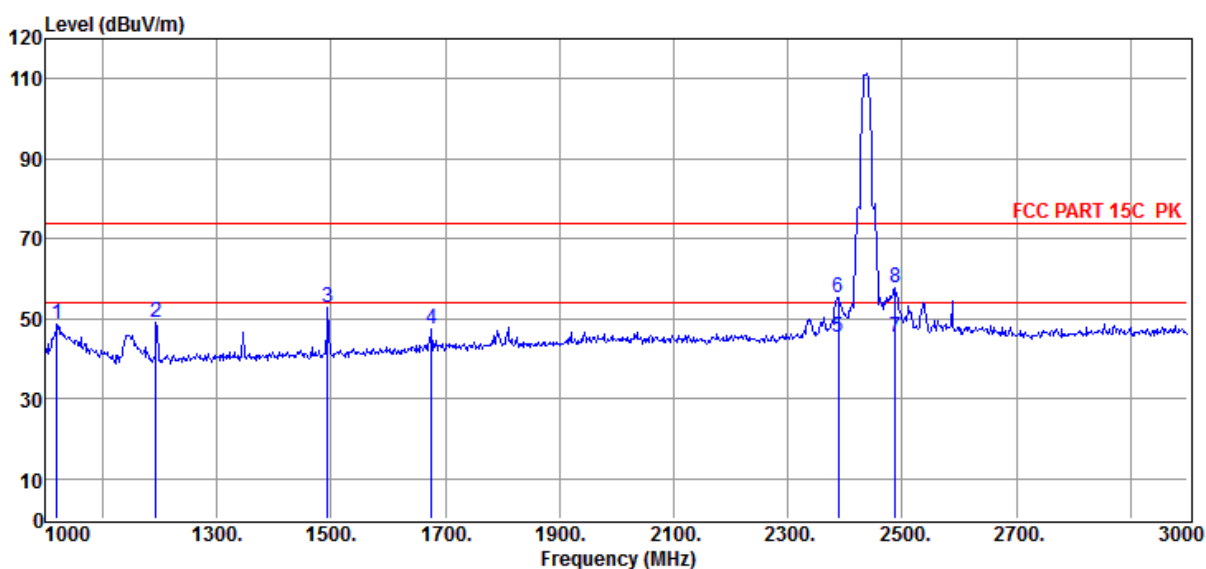

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 1020.00        | 60.11                   | 23.58                       | -35.24              | 48.45                       | 74.00                     | -25.55                | Peak     | VERTICAL     |
| 2              | 1194.00        | 59.94                   | 24.28                       | -35.12              | 49.10                       | 74.00                     | -24.90                | Peak     | VERTICAL     |
| 3              | 1494.00        | 61.97                   | 25.48                       | -34.71              | 52.74                       | 74.00                     | -21.26                | Peak     | VERTICAL     |
| 4              | 1676.00        | 55.37                   | 26.59                       | -34.46              | 47.50                       | 74.00                     | -26.50                | Peak     | VERTICAL     |
| 5              | 2388.00        | 51.23                   | 28.06                       | -34.01              | 45.28                       | 54.00                     | -8.72                 | Average  | VERTICAL     |
| 6              | 2388.00        | 61.28                   | 28.06                       | -34.01              | 55.33                       | 74.00                     | -18.67                | Peak     | VERTICAL     |
| 7              | 2488.00        | 51.26                   | 27.92                       | -33.72              | 45.46                       | 54.00                     | -8.54                 | Average  | VERTICAL     |
| 8              | 2488.00        | 63.67                   | 27.92                       | -33.72              | 57.87                       | 74.00                     | -16.13                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.



## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-26-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11B 11M ANT1 2462MHz

Data: 163

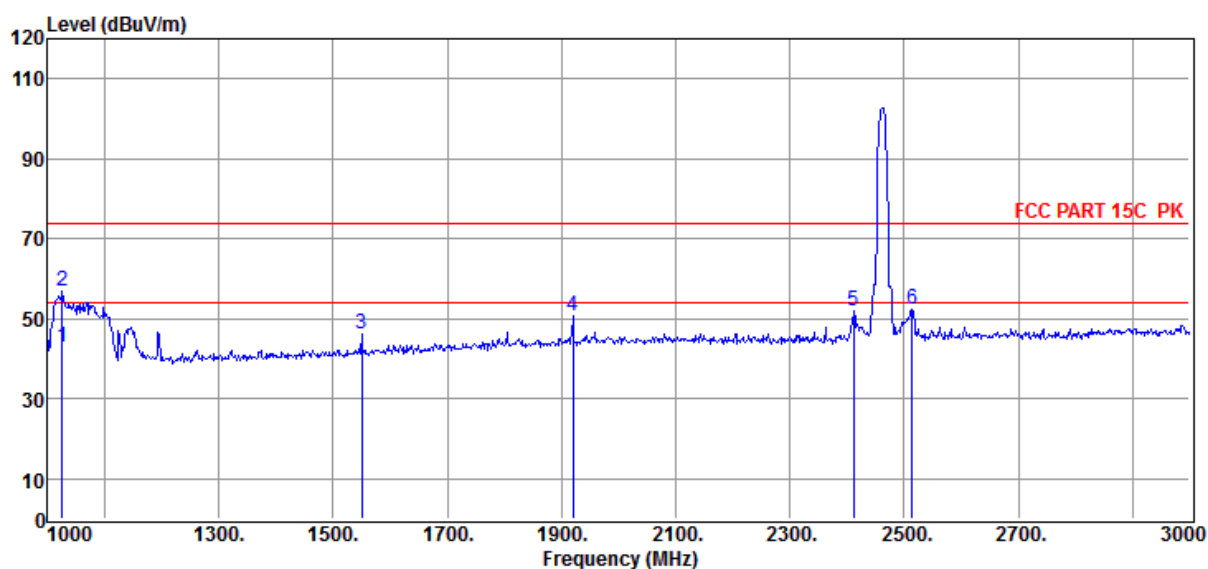

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 1026.00        | 54.57                   | 23.60                       | -35.20              | 42.97                       | 54.00                     | -11.03                | Average  | HORIZONTAL   |
| 2              | 1026.00        | 68.54                   | 23.60                       | -35.20              | 56.94                       | 74.00                     | -17.06                | Peak     | HORIZONTAL   |
| 3              | 1550.00        | 55.15                   | 25.81                       | -34.58              | 46.38                       | 74.00                     | -27.62                | Peak     | HORIZONTAL   |
| 4              | 1920.00        | 56.94                   | 28.10                       | -34.42              | 50.62                       | 74.00                     | -23.38                | Peak     | HORIZONTAL   |
| 5              | 2412.00        | 57.99                   | 28.02                       | -33.88              | 52.13                       | 74.00                     | -21.87                | Peak     | HORIZONTAL   |
| 6              | 2514.00        | 57.87                   | 27.94                       | -33.53              | 52.28                       | 74.00                     | -21.72                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-26-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11B 11M ANT1 2462MHz

Data: 164

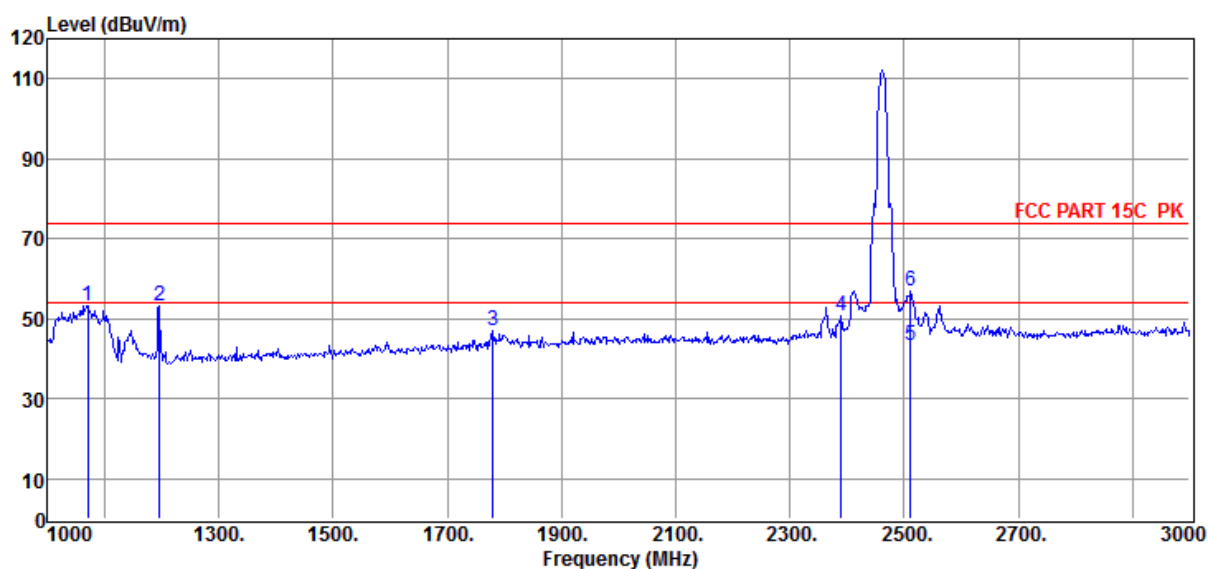

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 1070.00        | 64.68                   | 23.78                       | -35.24              | 53.22                       | 74.00                     | -20.78                | Peak     | VERTICAL     |
| 2              | 1196.00        | 63.98                   | 24.28                       | -35.13              | 53.13                       | 74.00                     | -20.87                | Peak     | VERTICAL     |
| 3              | 1780.00        | 54.16                   | 27.24                       | -34.54              | 46.86                       | 74.00                     | -27.14                | Peak     | VERTICAL     |
| 4              | 2390.00        | 56.74                   | 28.05                       | -34.02              | 50.77                       | 74.00                     | -23.23                | Peak     | VERTICAL     |
| 5              | 2512.00        | 48.90                   | 27.93                       | -33.53              | 43.30                       | 54.00                     | -10.70                | Average  | VERTICAL     |
| 6              | 2512.00        | 62.41                   | 27.93                       | -33.53              | 56.81                       | 74.00                     | -17.19                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-26-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11B 11M ANT2 2462MHz

Data: 165

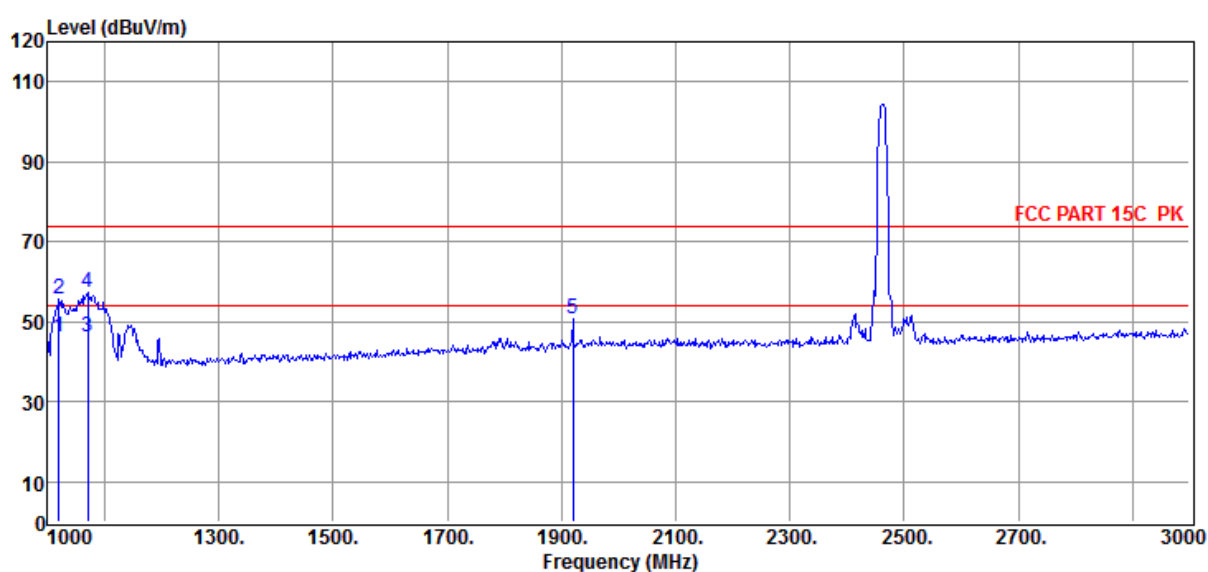

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 1020.00        | 57.67                   | 23.58                       | -35.24              | 46.01                       | 54.00                     | -7.99                 | Average  | HORIZONTAL   |
| 2              | 1020.00        | 67.27                   | 23.58                       | -35.24              | 55.61                       | 74.00                     | -18.39                | Peak     | HORIZONTAL   |
| 3              | 1070.00        | 57.56                   | 23.78                       | -35.24              | 46.10                       | 54.00                     | -7.90                 | Average  | HORIZONTAL   |
| 4              | 1070.00        | 68.58                   | 23.78                       | -35.24              | 57.12                       | 74.00                     | -16.88                | Peak     | HORIZONTAL   |
| 5              | 1920.00        | 57.22                   | 28.10                       | -34.42              | 50.90                       | 74.00                     | -23.10                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-26-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11B 11M ANT2 2462MHz

Data: 166

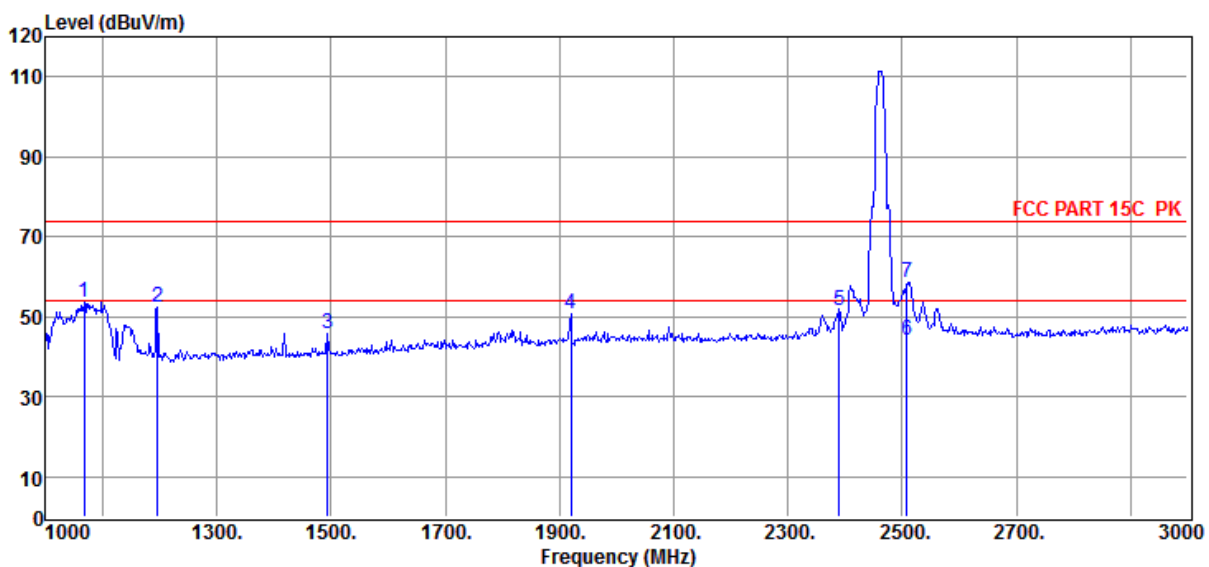

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 1068.00        | 65.01                   | 23.77                       | -35.23              | 53.55                       | 74.00                     | -20.45                | Peak     | VERTICAL     |
| 2              | 1196.00        | 63.07                   | 24.28                       | -35.13              | 52.22                       | 74.00                     | -21.78                | Peak     | VERTICAL     |
| 3              | 1494.00        | 54.98                   | 25.48                       | -34.71              | 45.75                       | 74.00                     | -28.25                | Peak     | VERTICAL     |
| 4              | 1920.00        | 57.06                   | 28.10                       | -34.42              | 50.74                       | 74.00                     | -23.26                | Peak     | VERTICAL     |
| 5              | 2390.00        | 57.39                   | 28.05                       | -34.02              | 51.42                       | 74.00                     | -22.58                | Peak     | VERTICAL     |
| 6              | 2508.00        | 49.66                   | 27.92                       | -33.53              | 44.05                       | 54.00                     | -9.95                 | Average  | VERTICAL     |
| 7              | 2508.00        | 64.28                   | 27.92                       | -33.53              | 58.67                       | 74.00                     | -15.33                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-26-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11G 6M ANT1 2412MHz

Data: 167

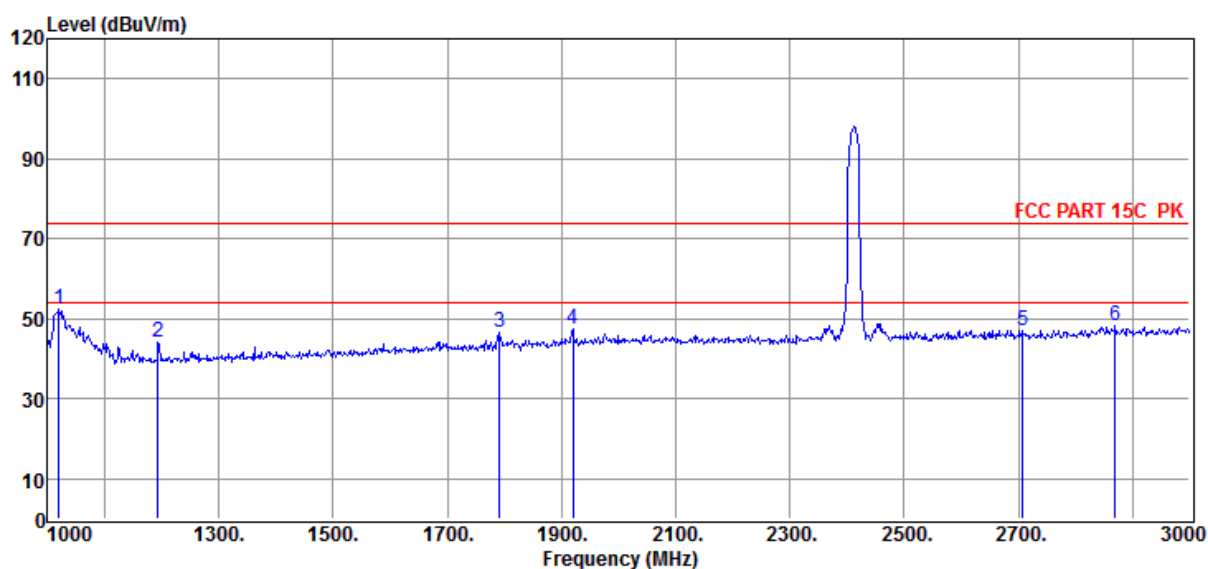

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 1020.00        | 63.91                   | 23.58                       | -35.24              | 52.25                       | 74.00                     | -21.75                | Peak     | HORIZONTAL   |
| 2              | 1194.00        | 54.77                   | 24.28                       | -35.12              | 43.93                       | 74.00                     | -30.07                | Peak     | HORIZONTAL   |
| 3              | 1792.00        | 53.67                   | 27.31                       | -34.45              | 46.53                       | 74.00                     | -27.47                | Peak     | HORIZONTAL   |
| 4              | 1920.00        | 53.70                   | 28.10                       | -34.42              | 47.38                       | 74.00                     | -26.62                | Peak     | HORIZONTAL   |
| 5              | 2708.00        | 52.08                   | 28.44                       | -33.39              | 47.13                       | 74.00                     | -26.87                | Peak     | HORIZONTAL   |
| 6              | 2870.00        | 52.86                   | 28.86                       | -33.38              | 48.34                       | 74.00                     | -25.66                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-26-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11G 6M ANT1 2412MHz

Data: 168

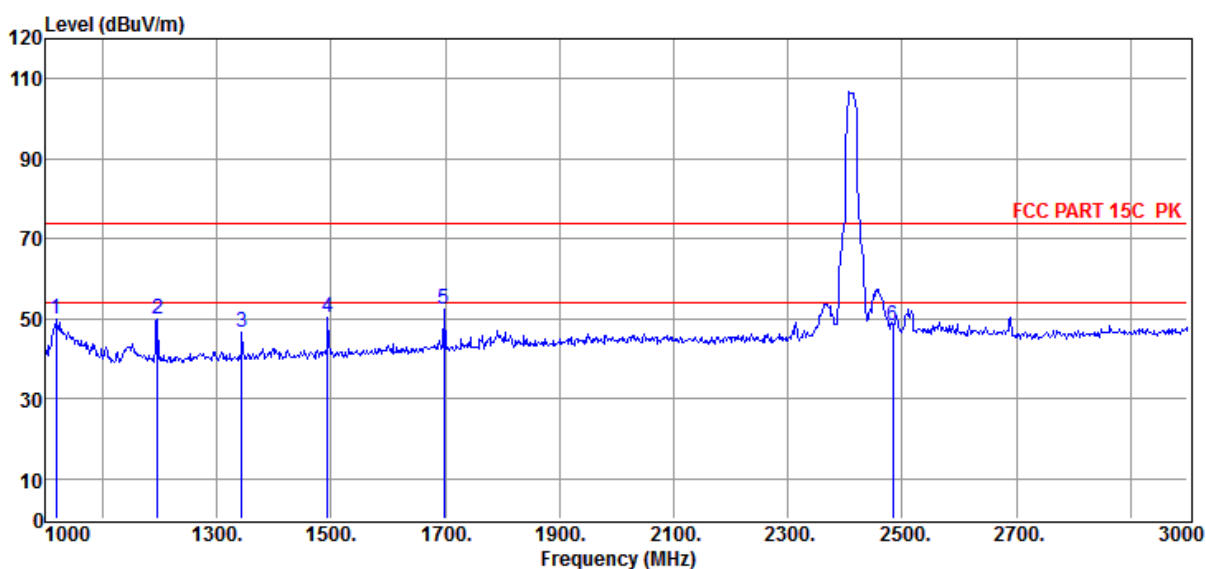

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 1018.00        | 61.43                   | 23.57                       | -35.24              | 49.76                       | 74.00                     | -24.24                | Peak     | VERTICAL     |
| 2              | 1196.00        | 60.58                   | 24.28                       | -35.13              | 49.73                       | 74.00                     | -24.27                | Peak     | VERTICAL     |
| 3              | 1344.00        | 56.68                   | 24.88                       | -34.87              | 46.69                       | 74.00                     | -27.31                | Peak     | VERTICAL     |
| 4              | 1494.00        | 59.39                   | 25.48                       | -34.71              | 50.16                       | 74.00                     | -23.84                | Peak     | VERTICAL     |
| 5              | 1698.00        | 60.13                   | 26.73                       | -34.44              | 52.42                       | 74.00                     | -21.58                | Peak     | VERTICAL     |
| 6              | 2484.00        | 53.97                   | 27.92                       | -33.79              | 48.10                       | 74.00                     | -25.90                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.



# Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-26-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11G 6M ANT2 2412MHz

Data: 169

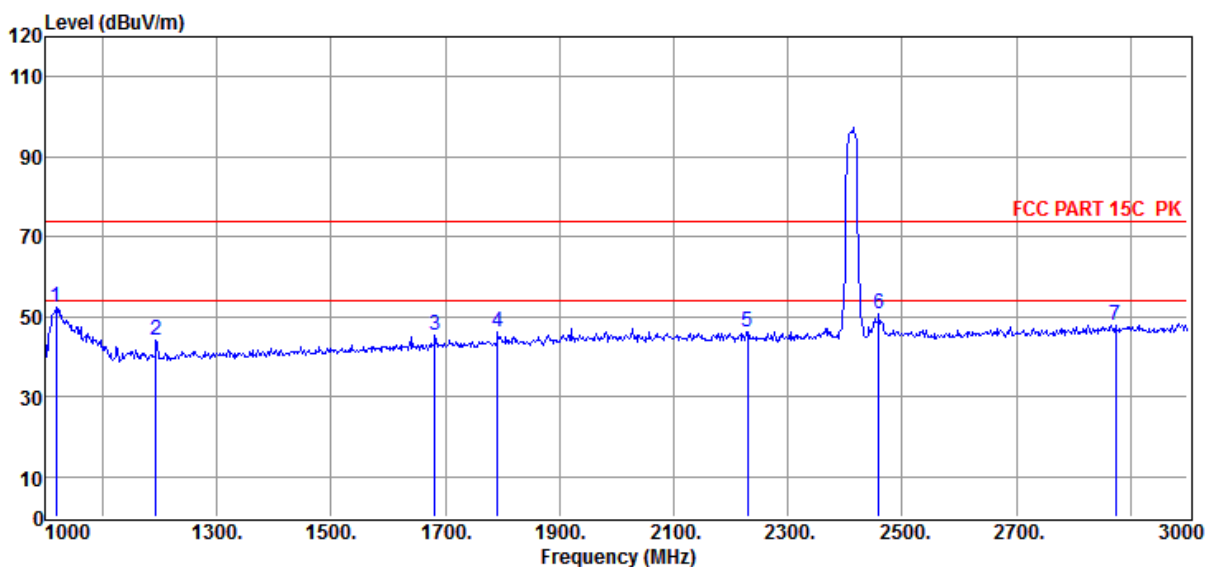

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 1018.00        | 64.20                   | 23.57                       | -35.24              | 52.53                       | 74.00                     | -21.47                | Peak     | HORIZONTAL   |
| 2              | 1194.00        | 55.06                   | 24.28                       | -35.12              | 44.22                       | 74.00                     | -29.78                | Peak     | HORIZONTAL   |
| 3              | 1682.00        | 53.02                   | 26.63                       | -34.43              | 45.22                       | 74.00                     | -28.78                | Peak     | HORIZONTAL   |
| 4              | 1792.00        | 53.39                   | 27.31                       | -34.45              | 46.25                       | 74.00                     | -27.75                | Peak     | HORIZONTAL   |
| 5              | 2230.00        | 52.21                   | 28.28                       | -34.14              | 46.35                       | 74.00                     | -27.65                | Peak     | HORIZONTAL   |
| 6              | 2460.00        | 56.50                   | 27.96                       | -33.81              | 50.65                       | 74.00                     | -23.35                | Peak     | HORIZONTAL   |
| 7              | 2874.00        | 52.44                   | 28.87                       | -33.37              | 47.94                       | 74.00                     | -26.06                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-26-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11G 6M ANT2 2412MHz

Data: 170

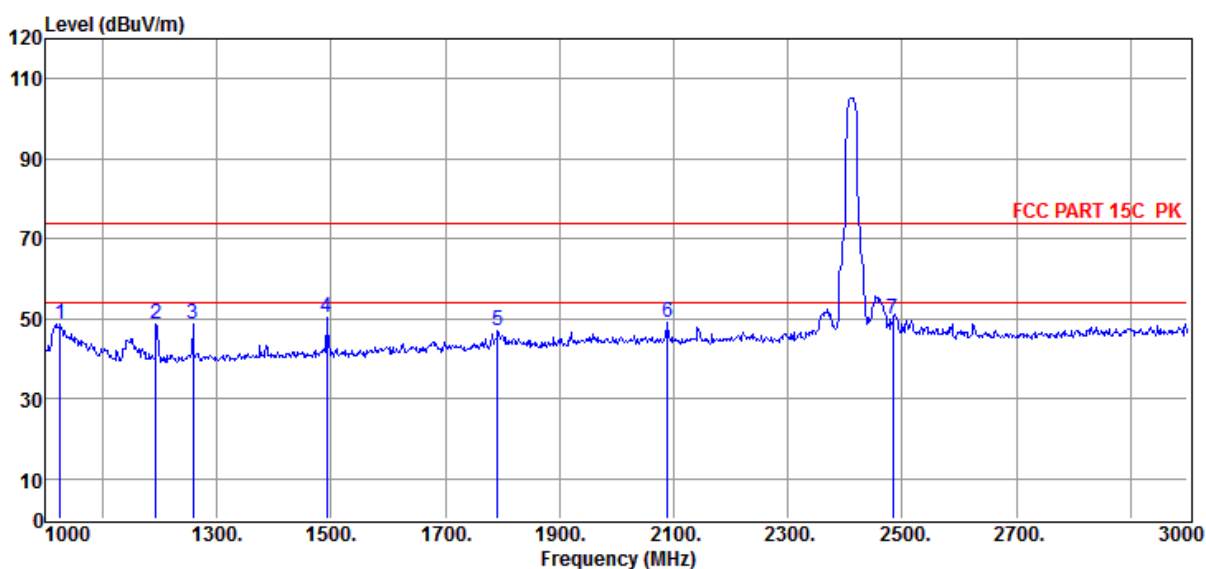

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 1026.00        | 60.17                   | 23.60                       | -35.20              | 48.57                       | 74.00                     | -25.43                | Peak     | VERTICAL     |
| 2              | 1194.00        | 59.33                   | 24.28                       | -35.12              | 48.49                       | 74.00                     | -25.51                | Peak     | VERTICAL     |
| 3              | 1258.00        | 59.24                   | 24.53                       | -34.92              | 48.85                       | 74.00                     | -25.15                | Peak     | VERTICAL     |
| 4              | 1492.00        | 59.38                   | 25.47                       | -34.71              | 50.14                       | 74.00                     | -23.86                | Peak     | VERTICAL     |
| 5              | 1792.00        | 53.95                   | 27.31                       | -34.45              | 46.81                       | 74.00                     | -27.19                | Peak     | VERTICAL     |
| 6              | 2090.00        | 55.03                   | 28.47                       | -34.29              | 49.21                       | 74.00                     | -24.79                | Peak     | VERTICAL     |
| 7              | 2484.00        | 55.57                   | 27.92                       | -33.79              | 49.70                       | 74.00                     | -24.30                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-26-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11G 6M ANT1 2437MHz

Data: 171

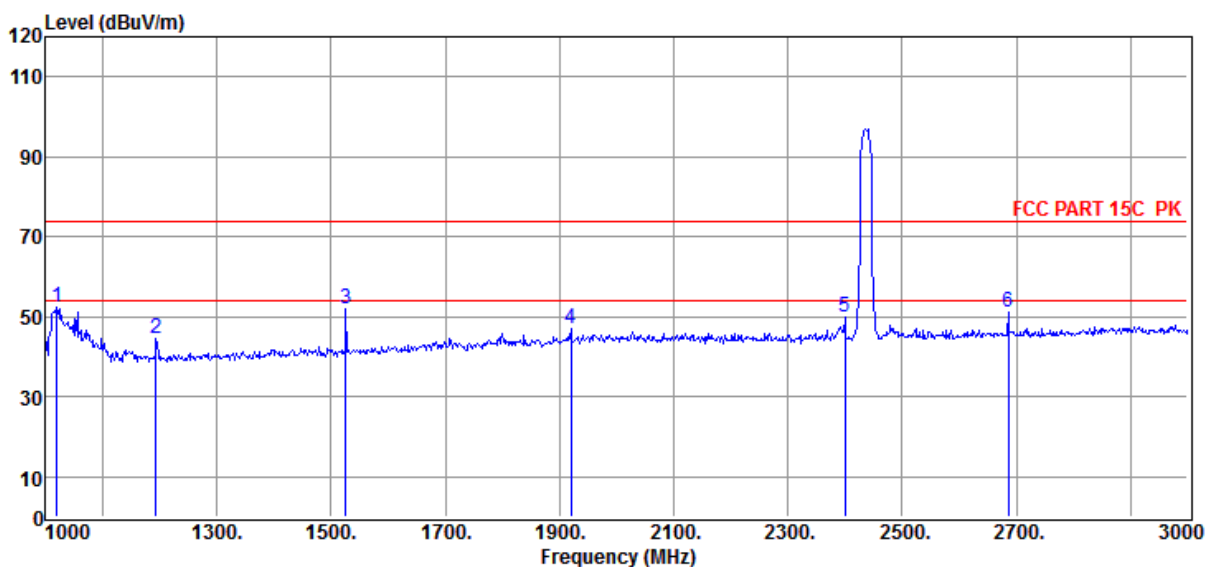

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 1020.00        | 64.10                   | 23.58                       | -35.24              | 52.44                       | 74.00                     | -21.56                | Peak     | HORIZONTAL   |
| 2              | 1194.00        | 55.27                   | 24.28                       | -35.12              | 44.43                       | 74.00                     | -29.57                | Peak     | HORIZONTAL   |
| 3              | 1526.00        | 60.69                   | 25.66                       | -34.57              | 51.78                       | 74.00                     | -22.22                | Peak     | HORIZONTAL   |
| 4              | 1920.00        | 53.36                   | 28.10                       | -34.42              | 47.04                       | 74.00                     | -26.96                | Peak     | HORIZONTAL   |
| 5              | 2400.00        | 55.95                   | 28.04                       | -34.05              | 49.94                       | 74.00                     | -24.06                | Peak     | HORIZONTAL   |
| 6              | 2686.00        | 56.19                   | 28.38                       | -33.34              | 51.23                       | 74.00                     | -22.77                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-26-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11G 6M ANT1 2437MHz

Data: 172

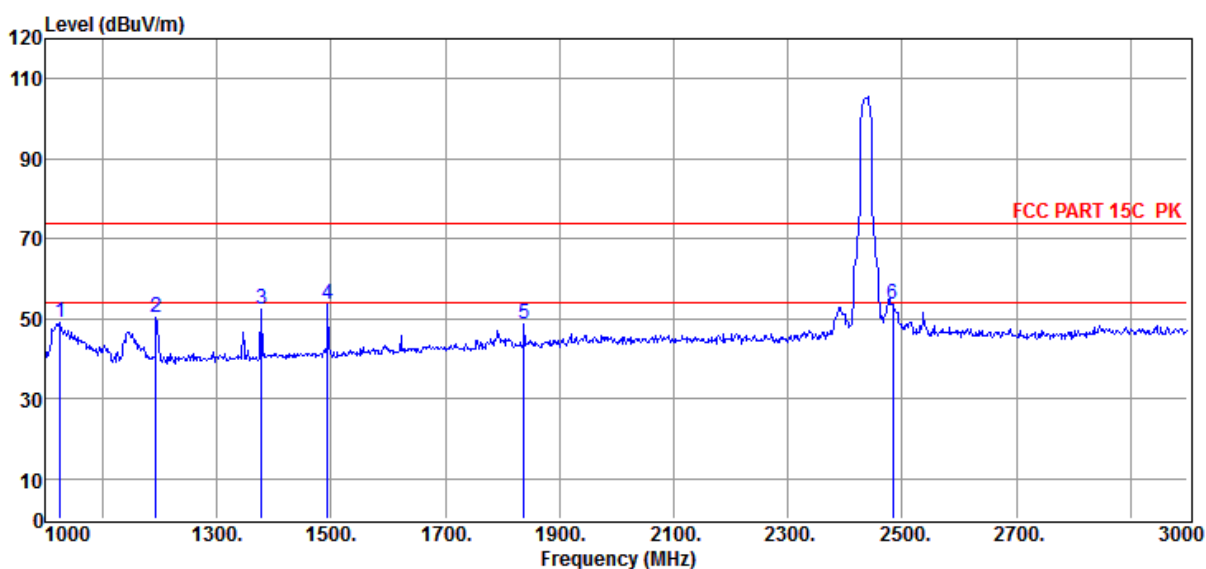

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 1026.00        | 60.67                   | 23.60                       | -35.20              | 49.07                       | 74.00                     | -24.93                | Peak     | VERTICAL     |
| 2              | 1194.00        | 61.06                   | 24.28                       | -35.12              | 50.22                       | 74.00                     | -23.78                | Peak     | VERTICAL     |
| 3              | 1378.00        | 62.33                   | 25.01                       | -34.77              | 52.57                       | 74.00                     | -21.43                | Peak     | VERTICAL     |
| 4              | 1494.00        | 62.97                   | 25.48                       | -34.71              | 53.74                       | 74.00                     | -20.26                | Peak     | VERTICAL     |
| 5              | 1838.00        | 55.35                   | 27.60                       | -34.46              | 48.49                       | 74.00                     | -25.51                | Peak     | VERTICAL     |
| 6              | 2484.00        | 59.65                   | 27.92                       | -33.79              | 53.78                       | 74.00                     | -20.22                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-26-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11G 6M ANT2 2437MHz

Data: 173

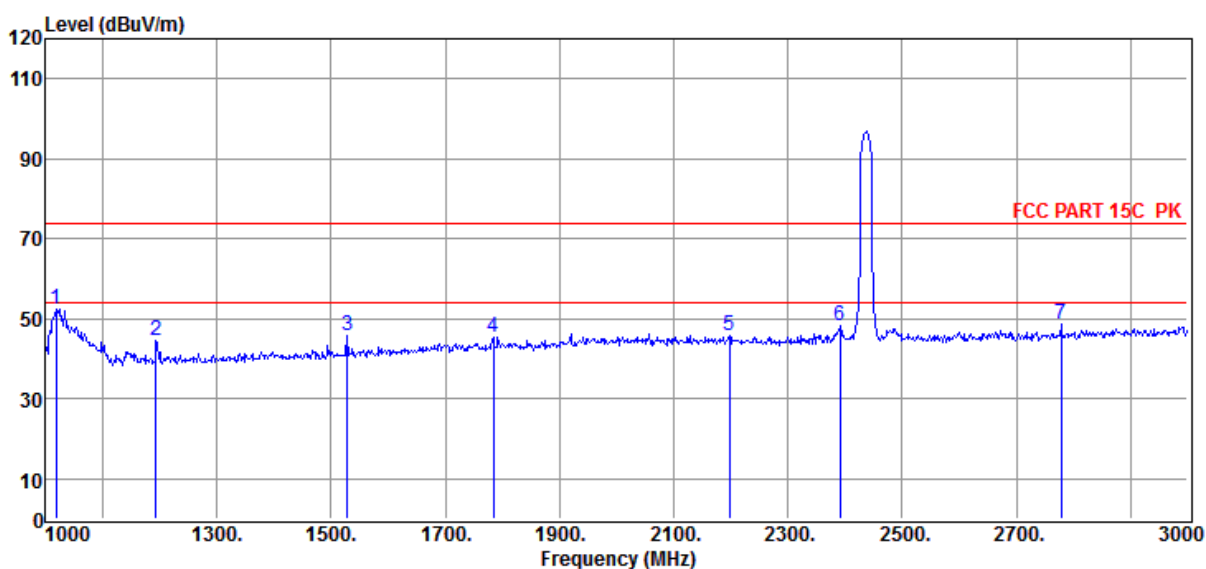

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 1018.00        | 64.20                   | 23.57                       | -35.24              | 52.53                       | 74.00                     | -21.47                | Peak     | HORIZONTAL   |
| 2              | 1194.00        | 55.46                   | 24.28                       | -35.12              | 44.62                       | 74.00                     | -29.38                | Peak     | HORIZONTAL   |
| 3              | 1528.00        | 54.85                   | 25.67                       | -34.56              | 45.96                       | 74.00                     | -28.04                | Peak     | HORIZONTAL   |
| 4              | 1784.00        | 52.73                   | 27.26                       | -34.51              | 45.48                       | 74.00                     | -28.52                | Peak     | HORIZONTAL   |
| 5              | 2198.00        | 51.43                   | 28.32                       | -34.14              | 45.61                       | 74.00                     | -28.39                | Peak     | HORIZONTAL   |
| 6              | 2392.00        | 54.31                   | 28.05                       | -34.03              | 48.33                       | 74.00                     | -25.67                | Peak     | HORIZONTAL   |
| 7              | 2778.00        | 53.36                   | 28.62                       | -33.50              | 48.48                       | 74.00                     | -25.52                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-26-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11G 6M ANT2 2437MHz

Data: 174

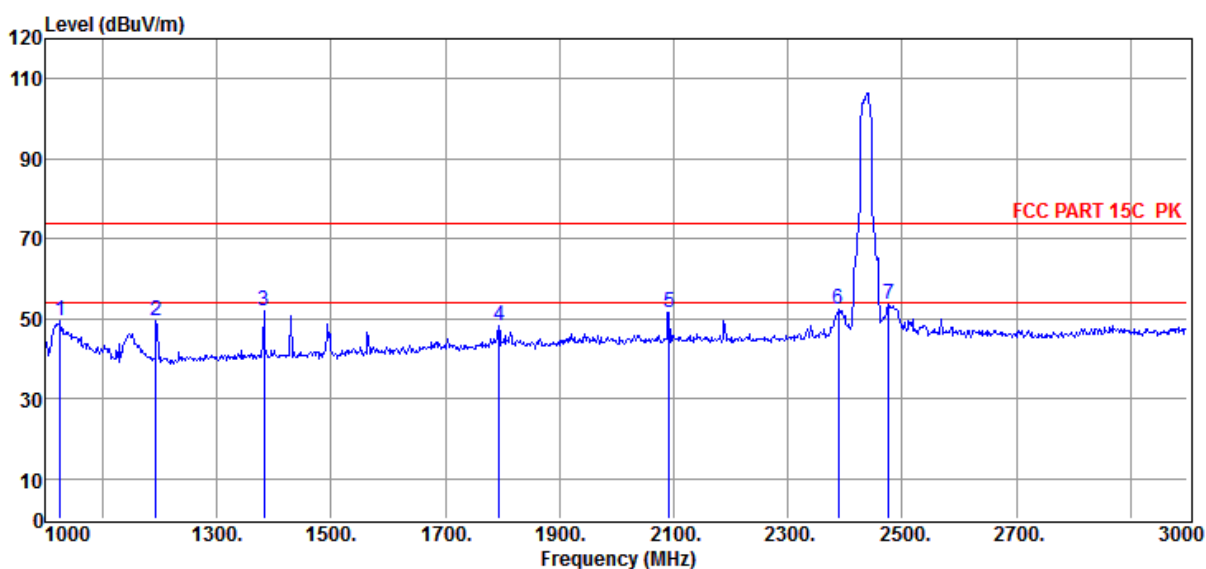

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 1026.00        | 61.06                   | 23.60                       | -35.20              | 49.46                       | 74.00                     | -24.54                | Peak     | VERTICAL     |
| 2              | 1194.00        | 60.22                   | 24.28                       | -35.12              | 49.38                       | 74.00                     | -24.62                | Peak     | VERTICAL     |
| 3              | 1382.00        | 61.62                   | 25.03                       | -34.76              | 51.89                       | 74.00                     | -22.11                | Peak     | VERTICAL     |
| 4              | 1794.00        | 55.43                   | 27.32                       | -34.44              | 48.31                       | 74.00                     | -25.69                | Peak     | VERTICAL     |
| 5              | 2092.00        | 57.27                   | 28.47                       | -34.28              | 51.46                       | 74.00                     | -22.54                | Peak     | VERTICAL     |
| 6              | 2388.00        | 58.13                   | 28.06                       | -34.01              | 52.18                       | 74.00                     | -21.82                | Peak     | VERTICAL     |
| 7              | 2476.00        | 59.43                   | 27.93                       | -33.84              | 53.52                       | 74.00                     | -20.48                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.



## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-26-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11G 6M ANT2 2462MHz

Data: 175

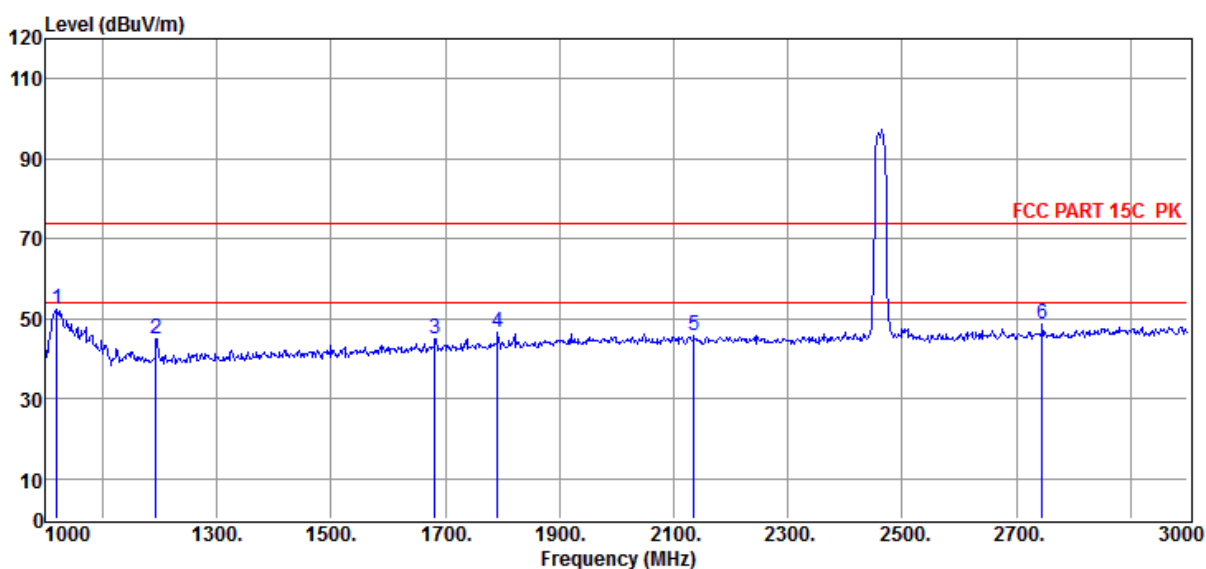

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 1020.00        | 64.12                   | 23.58                       | -35.24              | 52.46                       | 74.00                     | -21.54                | Peak     | HORIZONTAL   |
| 2              | 1194.00        | 55.97                   | 24.28                       | -35.12              | 45.13                       | 74.00                     | -28.87                | Peak     | HORIZONTAL   |
| 3              | 1682.00        | 52.69                   | 26.63                       | -34.43              | 44.89                       | 74.00                     | -29.11                | Peak     | HORIZONTAL   |
| 4              | 1792.00        | 53.58                   | 27.31                       | -34.45              | 46.44                       | 74.00                     | -27.56                | Peak     | HORIZONTAL   |
| 5              | 2136.00        | 51.79                   | 28.41                       | -34.27              | 45.93                       | 74.00                     | -28.07                | Peak     | HORIZONTAL   |
| 6              | 2746.00        | 53.53                   | 28.54                       | -33.45              | 48.62                       | 74.00                     | -25.38                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-26-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11G 6M ANT2 2462MHz

Data: 176

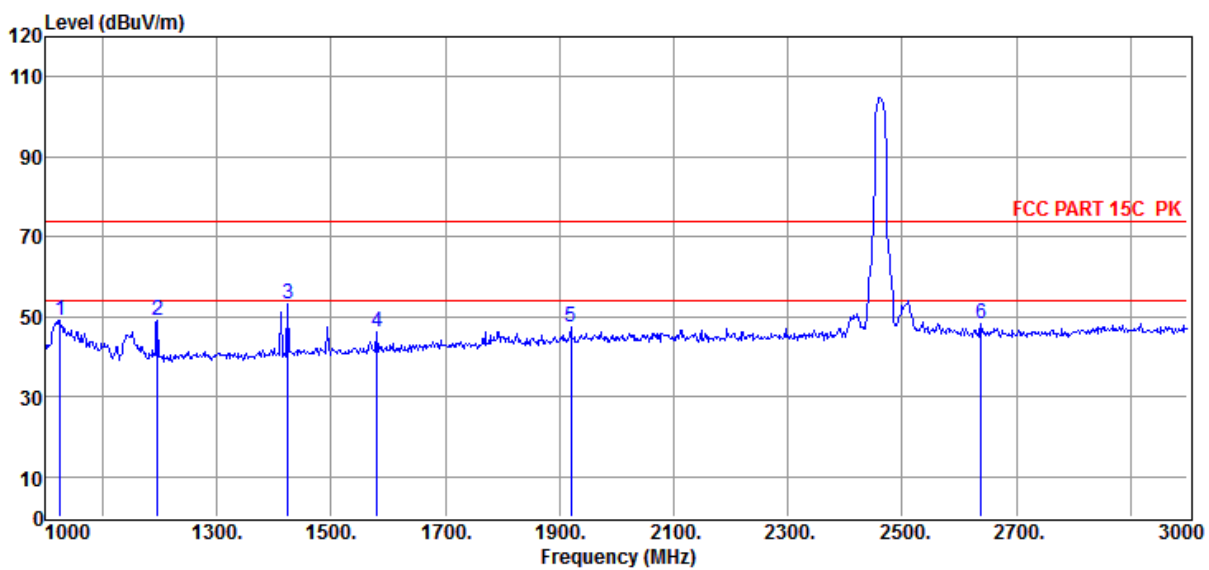

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 1026.00        | 60.58                   | 23.60                       | -35.20              | 48.98                       | 74.00                     | -25.02                | Peak     | VERTICAL     |
| 2              | 1196.00        | 59.83                   | 24.28                       | -35.13              | 48.98                       | 74.00                     | -25.02                | Peak     | VERTICAL     |
| 3              | 1424.00        | 62.77                   | 25.20                       | -34.76              | 53.21                       | 74.00                     | -20.79                | Peak     | VERTICAL     |
| 4              | 1580.00        | 54.79                   | 26.00                       | -34.55              | 46.24                       | 74.00                     | -27.76                | Peak     | VERTICAL     |
| 5              | 1920.00        | 53.90                   | 28.10                       | -34.42              | 47.58                       | 74.00                     | -26.42                | Peak     | VERTICAL     |
| 6              | 2638.00        | 53.28                   | 28.26                       | -33.31              | 48.23                       | 74.00                     | -25.77                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-26-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11G 6M ANT1 2462MHz

Data: 177

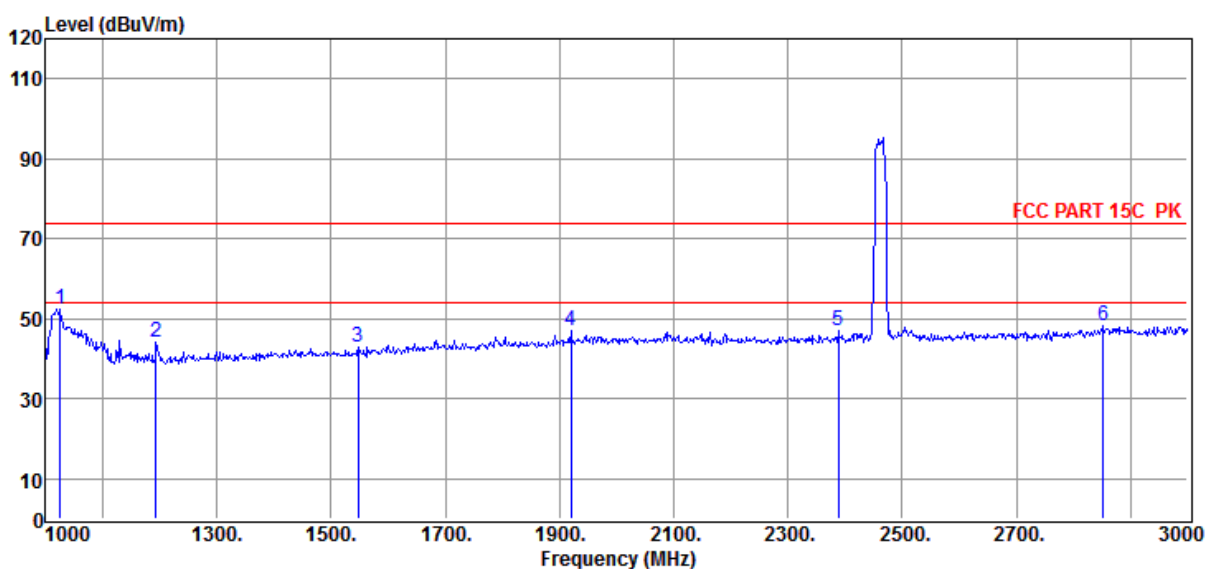

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 1026.00        | 63.96                   | 23.60                       | -35.20              | 52.36                       | 74.00                     | -21.64                | Peak     | HORIZONTAL   |
| 2              | 1194.00        | 54.95                   | 24.28                       | -35.12              | 44.11                       | 74.00                     | -29.89                | Peak     | HORIZONTAL   |
| 3              | 1548.00        | 51.84                   | 25.80                       | -34.58              | 43.06                       | 74.00                     | -30.94                | Peak     | HORIZONTAL   |
| 4              | 1920.00        | 53.47                   | 28.10                       | -34.42              | 47.15                       | 74.00                     | -26.85                | Peak     | HORIZONTAL   |
| 5              | 2388.00        | 53.10                   | 28.06                       | -34.01              | 47.15                       | 74.00                     | -26.85                | Peak     | HORIZONTAL   |
| 6              | 2852.00        | 52.74                   | 28.82                       | -33.44              | 48.12                       | 74.00                     | -25.88                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-26-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11G 6M ANT1 2462MHz

Data: 178

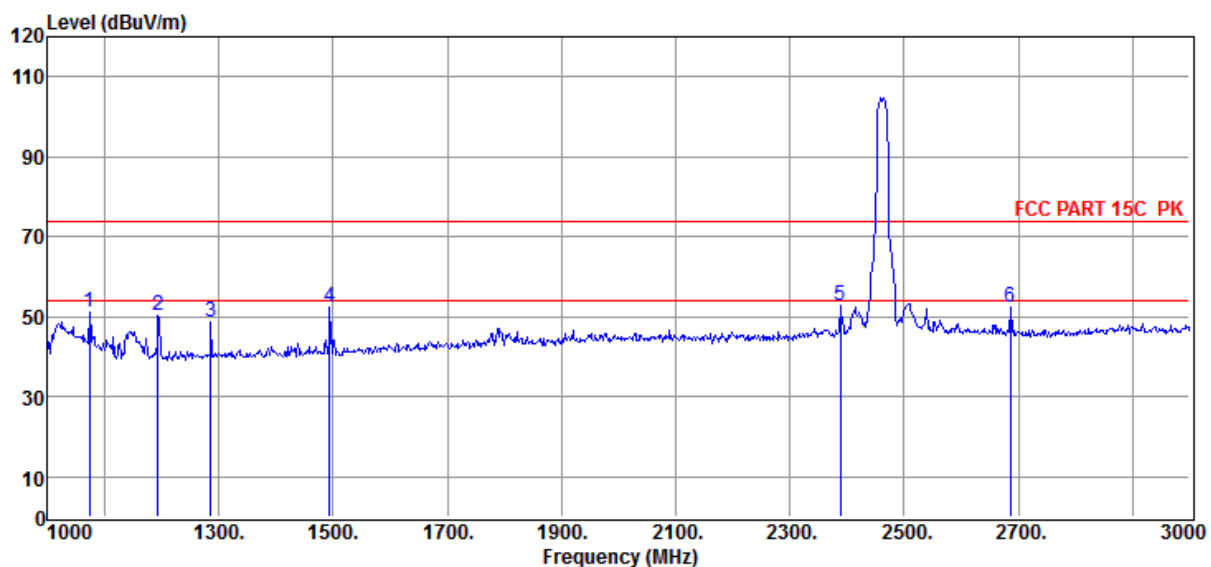

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 1074.00        | 62.73                   | 23.80                       | -35.24              | 51.29                       | 74.00                     | -22.71                | Peak     | VERTICAL     |
| 2              | 1194.00        | 61.14                   | 24.28                       | -35.12              | 50.30                       | 74.00                     | -23.70                | Peak     | VERTICAL     |
| 3              | 1286.00        | 58.77                   | 24.64                       | -34.90              | 48.51                       | 74.00                     | -25.49                | Peak     | VERTICAL     |
| 4              | 1494.00        | 61.66                   | 25.48                       | -34.71              | 52.43                       | 74.00                     | -21.57                | Peak     | VERTICAL     |
| 5              | 2388.00        | 58.83                   | 28.06                       | -34.01              | 52.88                       | 74.00                     | -21.12                | Peak     | VERTICAL     |
| 6              | 2686.00        | 57.35                   | 28.38                       | -33.34              | 52.39                       | 74.00                     | -21.61                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-26-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11N20 MCS0 ANT1 2412MHz

Data: 179

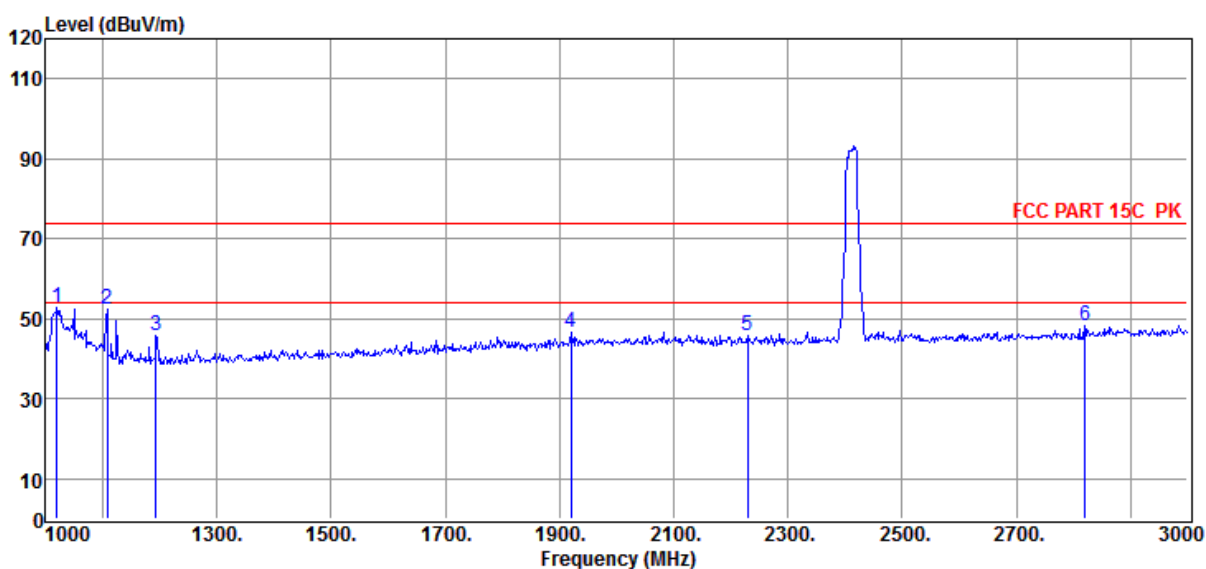

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 1020.00        | 64.38                   | 23.58                       | -35.24              | 52.72                       | 74.00                     | -21.28                | Peak     | HORIZONTAL   |
| 2              | 1108.00        | 63.48                   | 23.93                       | -35.24              | 52.17                       | 74.00                     | -21.83                | Peak     | HORIZONTAL   |
| 3              | 1194.00        | 56.42                   | 24.28                       | -35.12              | 45.58                       | 74.00                     | -28.42                | Peak     | HORIZONTAL   |
| 4              | 1920.00        | 52.76                   | 28.10                       | -34.42              | 46.44                       | 74.00                     | -27.56                | Peak     | HORIZONTAL   |
| 5              | 2230.00        | 51.56                   | 28.28                       | -34.14              | 45.70                       | 74.00                     | -28.30                | Peak     | HORIZONTAL   |
| 6              | 2820.00        | 52.83                   | 28.73                       | -33.50              | 48.06                       | 74.00                     | -25.94                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-26-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11N20 MCS0 ANT1 2412MHz

Data: 180

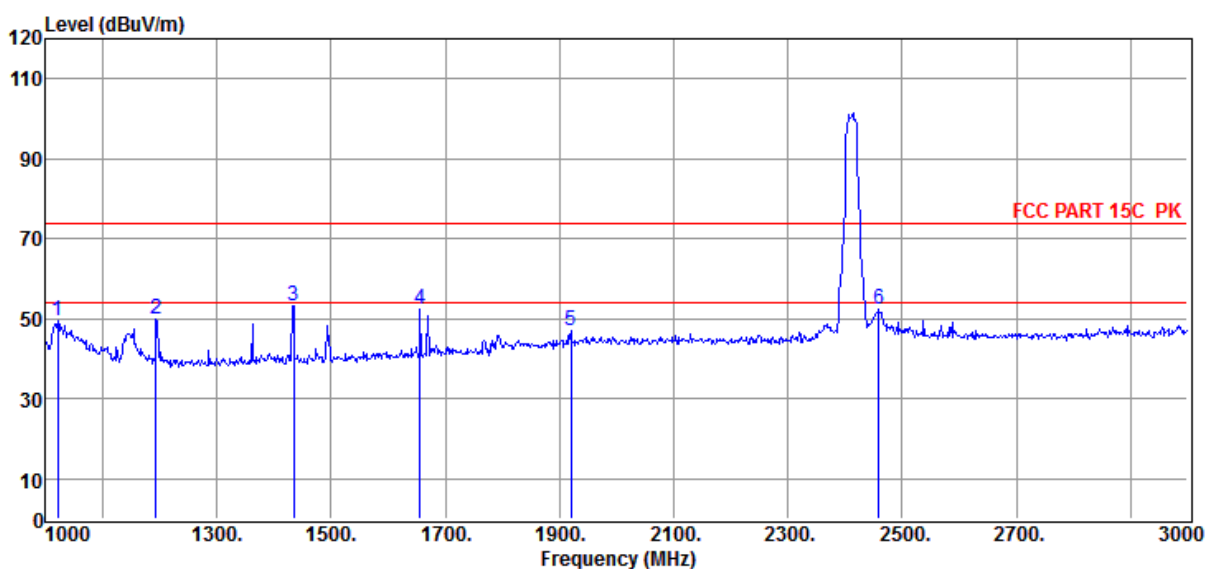

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 1022.00        | 60.95                   | 23.59                       | -35.23              | 49.31                       | 74.00                     | -24.69                | Peak     | VERTICAL     |
| 2              | 1194.00        | 60.86                   | 24.28                       | -35.12              | 50.02                       | 74.00                     | -23.98                | Peak     | VERTICAL     |
| 3              | 1434.00        | 62.68                   | 25.24                       | -34.71              | 53.21                       | 74.00                     | -20.79                | Peak     | VERTICAL     |
| 4              | 1656.00        | 60.60                   | 26.47                       | -34.56              | 52.51                       | 74.00                     | -21.49                | Peak     | VERTICAL     |
| 5              | 1920.00        | 53.40                   | 28.10                       | -34.42              | 47.08                       | 74.00                     | -26.92                | Peak     | VERTICAL     |
| 6              | 2460.00        | 58.37                   | 27.96                       | -33.81              | 52.52                       | 74.00                     | -21.48                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.



## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-26-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11N20 MCS0 ANT2 2412MHz

Data: 181

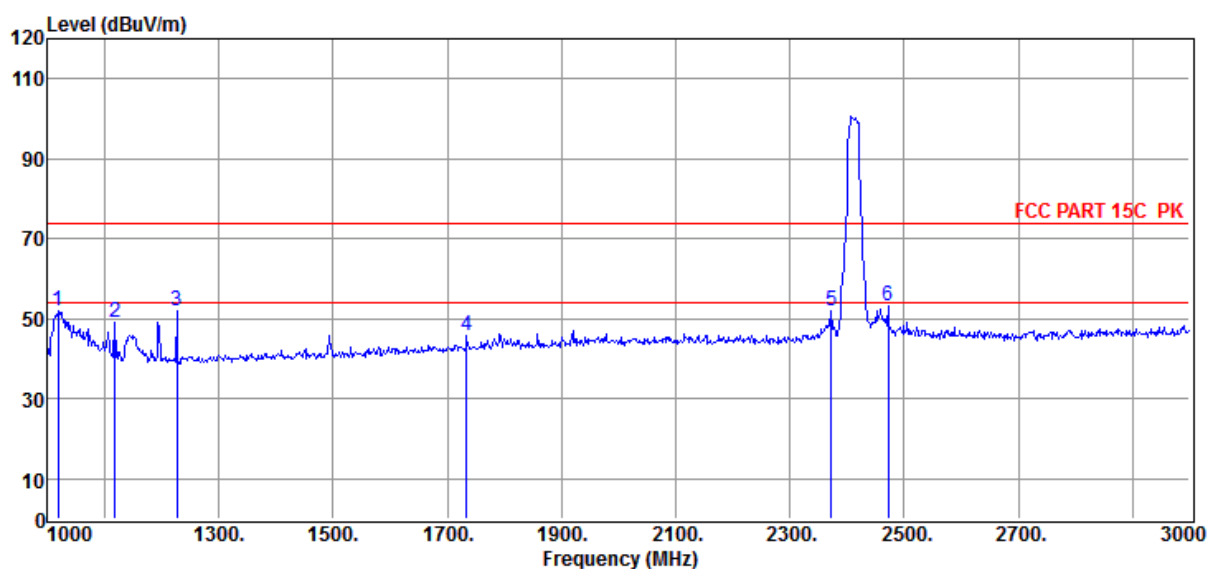

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 1018.00        | 63.47                   | 23.57                       | -35.24              | 51.80                       | 74.00                     | -22.20                | Peak     | HORIZONTAL   |
| 2              | 1118.00        | 60.30                   | 23.97                       | -35.24              | 49.03                       | 74.00                     | -24.97                | Peak     | HORIZONTAL   |
| 3              | 1226.00        | 62.81                   | 24.40                       | -35.08              | 52.13                       | 74.00                     | -21.87                | Peak     | HORIZONTAL   |
| 4              | 1734.00        | 53.32                   | 26.95                       | -34.47              | 45.80                       | 74.00                     | -28.20                | Peak     | HORIZONTAL   |
| 5              | 2372.00        | 57.96                   | 28.08                       | -33.99              | 52.05                       | 74.00                     | -21.95                | Peak     | HORIZONTAL   |
| 6              | 2472.00        | 59.29                   | 27.94                       | -33.83              | 53.40                       | 74.00                     | -20.60                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-26-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11N20 MCS0 ANT2 2412MHz

Data: 182

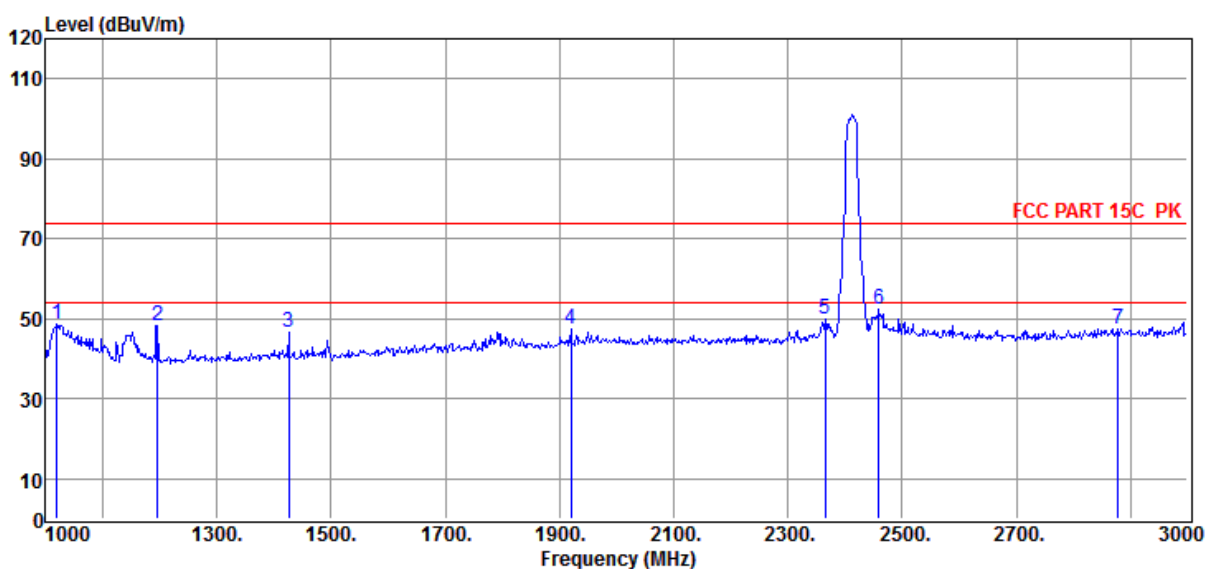

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 1020.00        | 60.16                   | 23.58                       | -35.24              | 48.50                       | 74.00                     | -25.50                | Peak     | VERTICAL     |
| 2              | 1196.00        | 59.25                   | 24.28                       | -35.13              | 48.40                       | 74.00                     | -25.60                | Peak     | VERTICAL     |
| 3              | 1426.00        | 55.96                   | 25.20                       | -34.75              | 46.41                       | 74.00                     | -27.59                | Peak     | VERTICAL     |
| 4              | 1920.00        | 53.91                   | 28.10                       | -34.42              | 47.59                       | 74.00                     | -26.41                | Peak     | VERTICAL     |
| 5              | 2366.00        | 55.83                   | 28.09                       | -33.98              | 49.94                       | 74.00                     | -24.06                | Peak     | VERTICAL     |
| 6              | 2460.00        | 58.12                   | 27.96                       | -33.81              | 52.27                       | 74.00                     | -21.73                | Peak     | VERTICAL     |
| 7              | 2878.00        | 52.01                   | 28.88                       | -33.35              | 47.54                       | 74.00                     | -26.46                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-26-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11N20 MCS0 ANT1 2437MHz

Data: 183

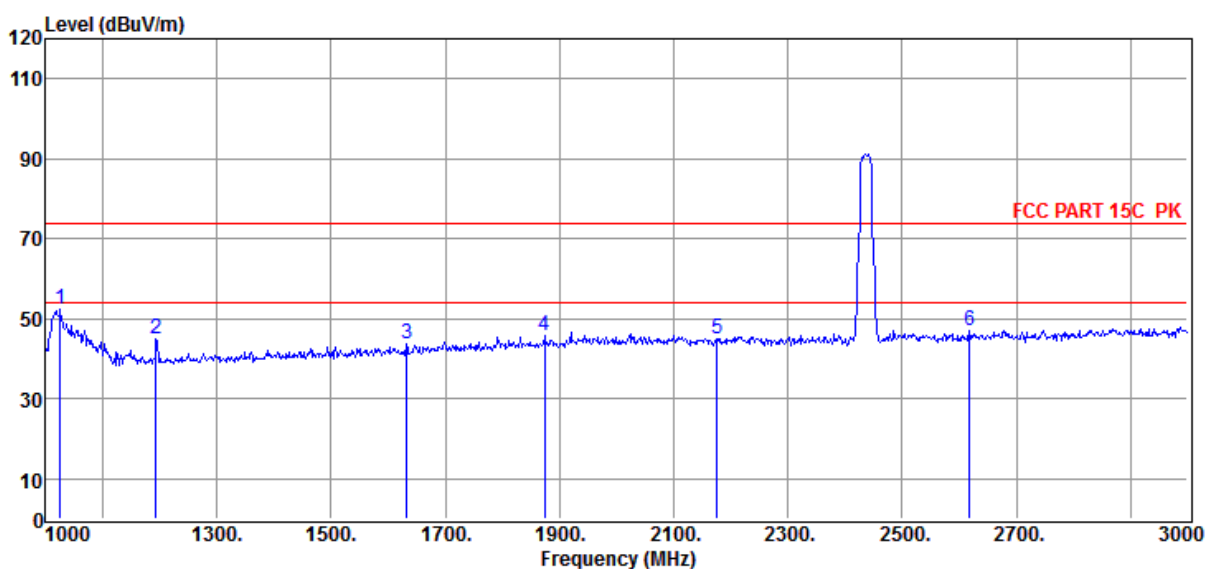

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 1026.00        | 63.86                   | 23.60                       | -35.20              | 52.26                       | 74.00                     | -21.74                | Peak     | HORIZONTAL   |
| 2              | 1194.00        | 55.67                   | 24.28                       | -35.12              | 44.83                       | 74.00                     | -29.17                | Peak     | HORIZONTAL   |
| 3              | 1632.00        | 51.82                   | 26.32                       | -34.54              | 43.60                       | 74.00                     | -30.40                | Peak     | HORIZONTAL   |
| 4              | 1874.00        | 52.64                   | 27.82                       | -34.56              | 45.90                       | 74.00                     | -28.10                | Peak     | HORIZONTAL   |
| 5              | 2176.00        | 50.94                   | 28.35                       | -34.18              | 45.11                       | 74.00                     | -28.89                | Peak     | HORIZONTAL   |
| 6              | 2618.00        | 52.41                   | 28.21                       | -33.43              | 47.19                       | 74.00                     | -26.81                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-26-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11N20 MCS0 ANT1 2437MHz

Data: 184

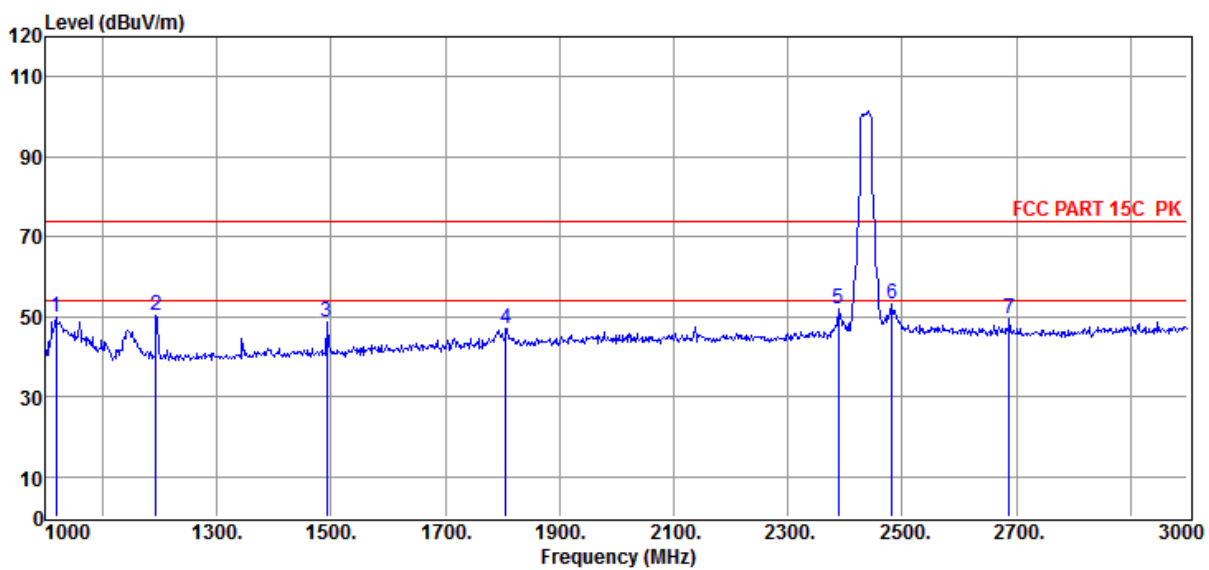

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 1018.00        | 61.52                   | 23.57                       | -35.24              | 49.85                       | 74.00                     | -24.15                | Peak     | VERTICAL     |
| 2              | 1194.00        | 61.07                   | 24.28                       | -35.12              | 50.23                       | 74.00                     | -23.77                | Peak     | VERTICAL     |
| 3              | 1492.00        | 57.86                   | 25.47                       | -34.71              | 48.62                       | 74.00                     | -25.38                | Peak     | VERTICAL     |
| 4              | 1806.00        | 53.91                   | 27.40                       | -34.36              | 46.95                       | 74.00                     | -27.05                | Peak     | VERTICAL     |
| 5              | 2388.00        | 57.86                   | 28.06                       | -34.01              | 51.91                       | 74.00                     | -22.09                | Peak     | VERTICAL     |
| 6              | 2482.00        | 58.90                   | 27.93                       | -33.82              | 53.01                       | 74.00                     | -20.99                | Peak     | VERTICAL     |
| 7              | 2688.00        | 54.57                   | 28.39                       | -33.35              | 49.61                       | 74.00                     | -24.39                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-26-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11N20 MCS0 ANT2 2437MHz

Data: 185

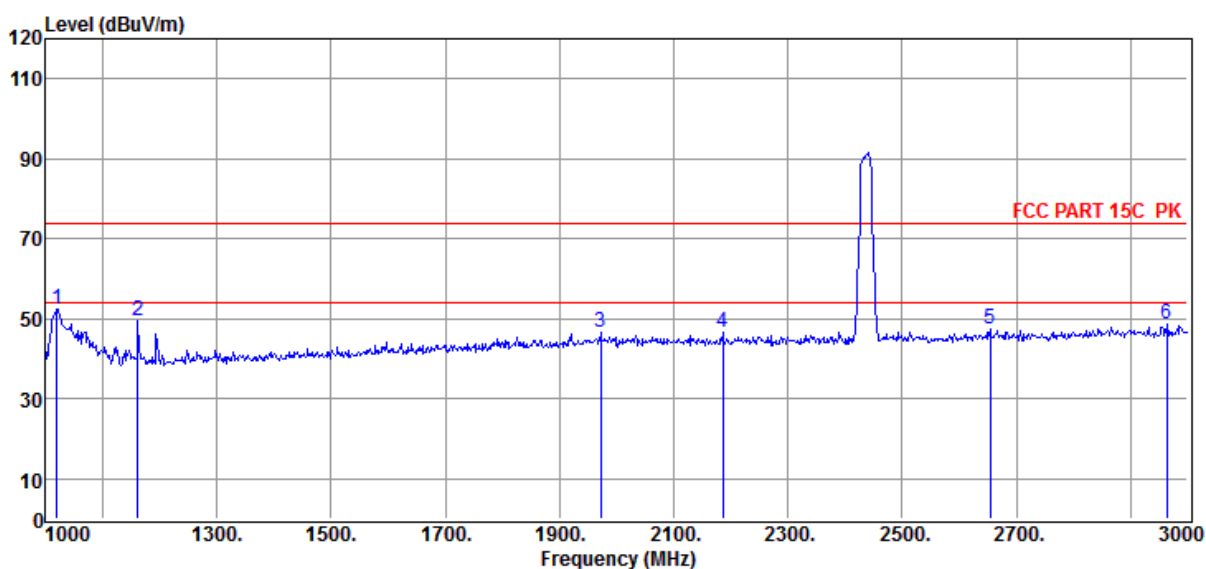

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 1020.00        | 64.19                   | 23.58                       | -35.24              | 52.53                       | 74.00                     | -21.47                | Peak     | HORIZONTAL   |
| 2              | 1162.00        | 60.45                   | 24.15                       | -35.06              | 49.54                       | 74.00                     | -24.46                | Peak     | HORIZONTAL   |
| 3              | 1972.00        | 52.56                   | 28.43                       | -34.22              | 46.77                       | 74.00                     | -27.23                | Peak     | HORIZONTAL   |
| 4              | 2186.00        | 52.48                   | 28.34                       | -34.14              | 46.68                       | 74.00                     | -27.32                | Peak     | HORIZONTAL   |
| 5              | 2654.00        | 52.29                   | 28.30                       | -33.25              | 47.34                       | 74.00                     | -26.66                | Peak     | HORIZONTAL   |
| 6              | 2964.00        | 53.10                   | 29.11                       | -33.55              | 48.66                       | 74.00                     | -25.34                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-26-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11N20 MCS0 ANT2 2437MHz

Data: 186

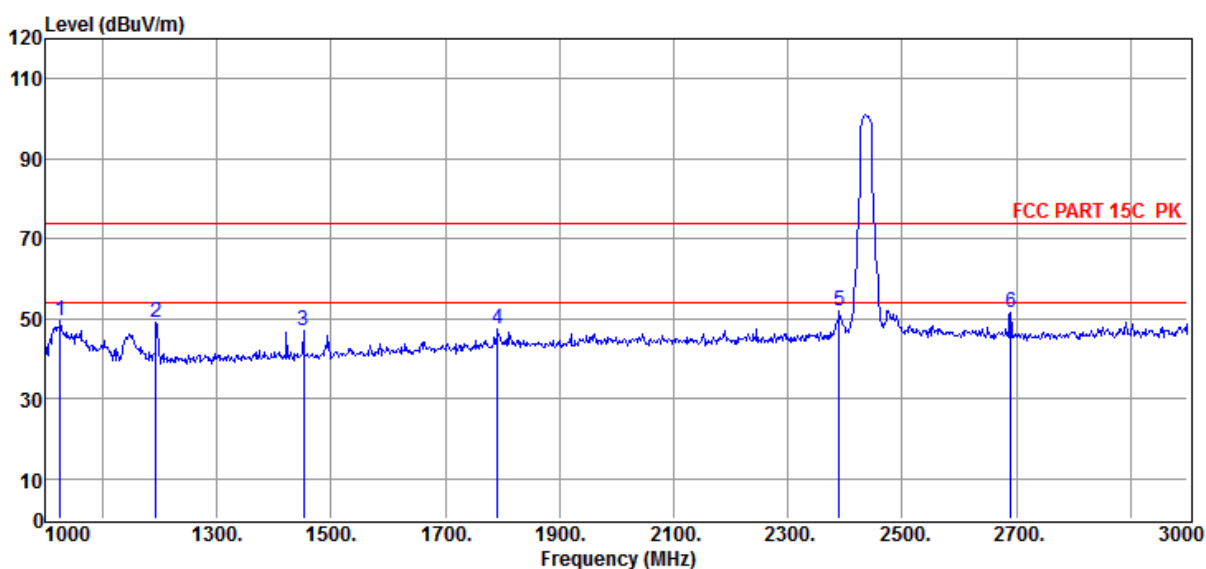

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 1026.00        | 61.15                   | 23.60                       | -35.20              | 49.55                       | 74.00                     | -24.45                | Peak     | VERTICAL     |
| 2              | 1194.00        | 59.84                   | 24.28                       | -35.12              | 49.00                       | 74.00                     | -25.00                | Peak     | VERTICAL     |
| 3              | 1452.00        | 56.37                   | 25.31                       | -34.62              | 47.06                       | 74.00                     | -26.94                | Peak     | VERTICAL     |
| 4              | 1792.00        | 54.63                   | 27.31                       | -34.45              | 47.49                       | 74.00                     | -26.51                | Peak     | VERTICAL     |
| 5              | 2390.00        | 58.12                   | 28.05                       | -34.02              | 52.15                       | 74.00                     | -21.85                | Peak     | VERTICAL     |
| 6              | 2690.00        | 56.68                   | 28.39                       | -33.35              | 51.72                       | 74.00                     | -22.28                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.



## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-26-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11N20 MCS0 ANT1 2462MHz

Data: 187

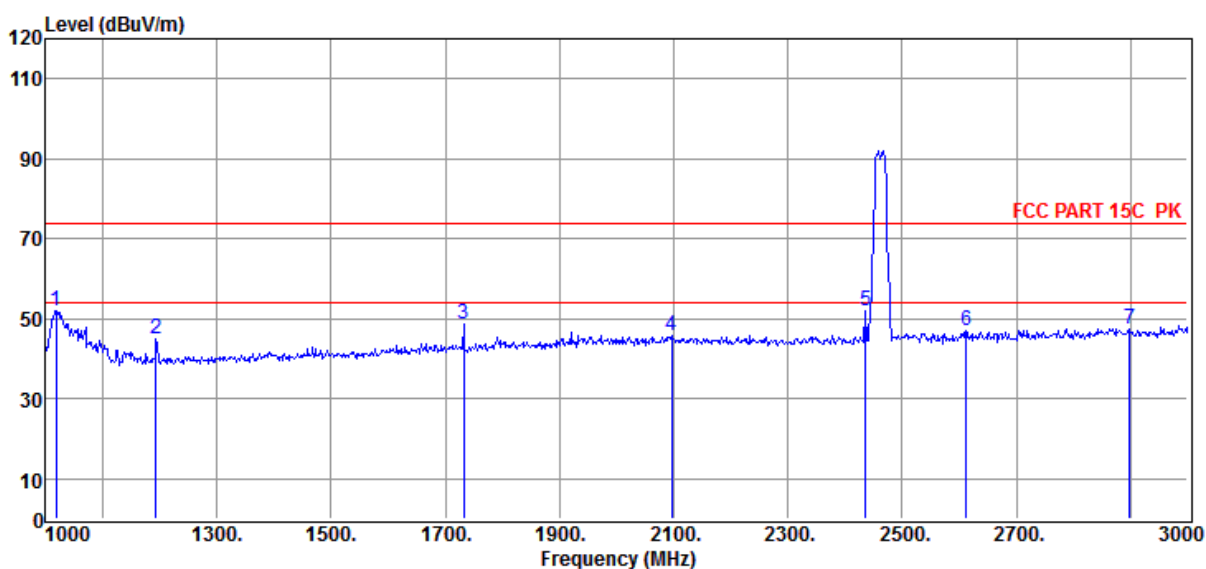

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 1018.00        | 63.57                   | 23.57                       | -35.24              | 51.90                       | 74.00                     | -22.10                | Peak     | HORIZONTAL   |
| 2              | 1194.00        | 55.95                   | 24.28                       | -35.12              | 45.11                       | 74.00                     | -28.89                | Peak     | HORIZONTAL   |
| 3              | 1732.00        | 55.98                   | 26.94                       | -34.45              | 48.47                       | 74.00                     | -25.53                | Peak     | HORIZONTAL   |
| 4              | 2096.00        | 51.65                   | 28.47                       | -34.25              | 45.87                       | 74.00                     | -28.13                | Peak     | HORIZONTAL   |
| 5              | 2436.00        | 57.74                   | 27.99                       | -33.88              | 51.85                       | 74.00                     | -22.15                | Peak     | HORIZONTAL   |
| 6              | 2612.00        | 52.33                   | 28.19                       | -33.46              | 47.06                       | 74.00                     | -26.94                | Peak     | HORIZONTAL   |
| 7              | 2898.00        | 51.61                   | 28.93                       | -33.29              | 47.25                       | 74.00                     | -26.75                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-26-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11N20 MCS0 ANT1 2462MHz

Data: 188

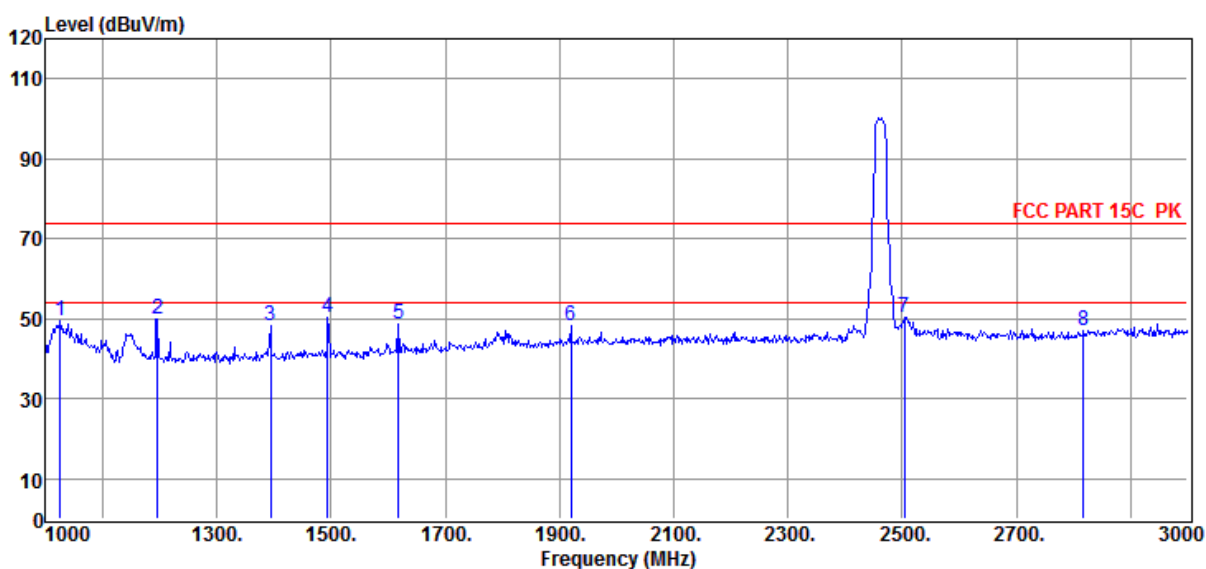

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 1026.00        | 61.11                   | 23.60                       | -35.20              | 49.51                       | 74.00                     | -24.49                | Peak     | VERTICAL     |
| 2              | 1196.00        | 60.70                   | 24.28                       | -35.13              | 49.85                       | 74.00                     | -24.15                | Peak     | VERTICAL     |
| 3              | 1394.00        | 58.10                   | 25.08                       | -34.75              | 48.43                       | 74.00                     | -25.57                | Peak     | VERTICAL     |
| 4              | 1494.00        | 59.43                   | 25.48                       | -34.71              | 50.20                       | 74.00                     | -23.80                | Peak     | VERTICAL     |
| 5              | 1618.00        | 56.92                   | 26.23                       | -34.54              | 48.61                       | 74.00                     | -25.39                | Peak     | VERTICAL     |
| 6              | 1920.00        | 54.62                   | 28.10                       | -34.42              | 48.30                       | 74.00                     | -25.70                | Peak     | VERTICAL     |
| 7              | 2504.00        | 56.03                   | 27.91                       | -33.53              | 50.41                       | 74.00                     | -23.59                | Peak     | VERTICAL     |
| 8              | 2818.00        | 51.98                   | 28.73                       | -33.51              | 47.20                       | 74.00                     | -26.80                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-26-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11N20 MCS0 ANT2 2462MHz

Data: 189

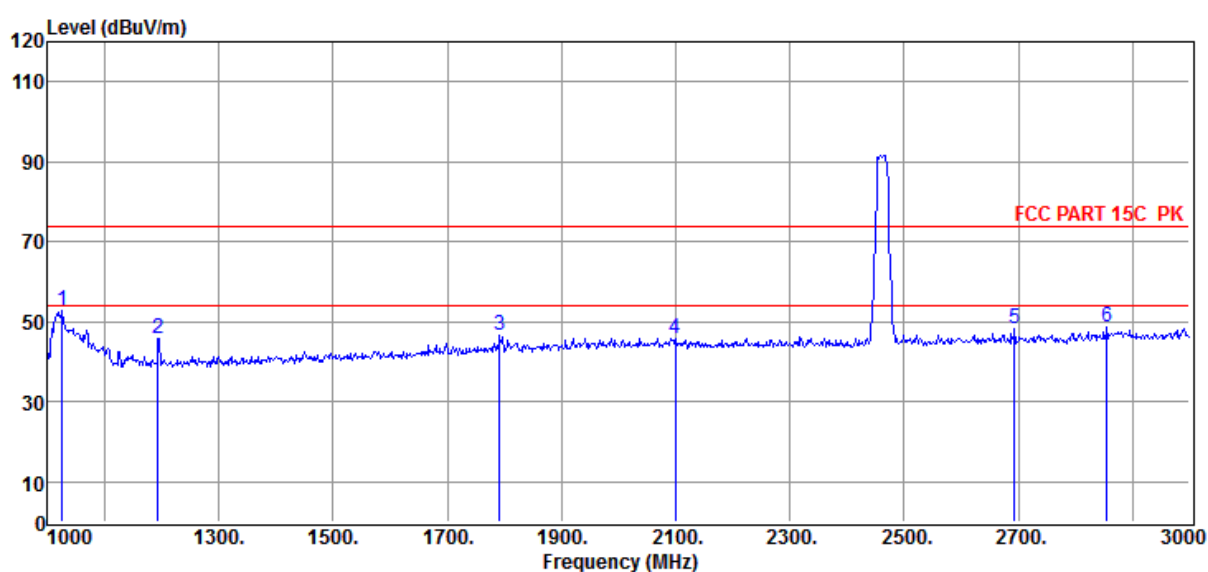

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 1026.00        | 64.45                   | 23.60                       | -35.20              | 52.85                       | 74.00                     | -21.15                | Peak     | HORIZONTAL   |
| 2              | 1194.00        | 56.60                   | 24.28                       | -35.12              | 45.76                       | 74.00                     | -28.24                | Peak     | HORIZONTAL   |
| 3              | 1792.00        | 53.54                   | 27.31                       | -34.45              | 46.40                       | 74.00                     | -27.60                | Peak     | HORIZONTAL   |
| 4              | 2100.00        | 51.39                   | 28.46                       | -34.23              | 45.62                       | 74.00                     | -28.38                | Peak     | HORIZONTAL   |
| 5              | 2694.00        | 53.03                   | 28.40                       | -33.36              | 48.07                       | 74.00                     | -25.93                | Peak     | HORIZONTAL   |
| 6              | 2856.00        | 53.09                   | 28.83                       | -33.43              | 48.49                       | 74.00                     | -25.51                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-26-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11N20 MCS0 ANT2 2462MHz

Data: 190

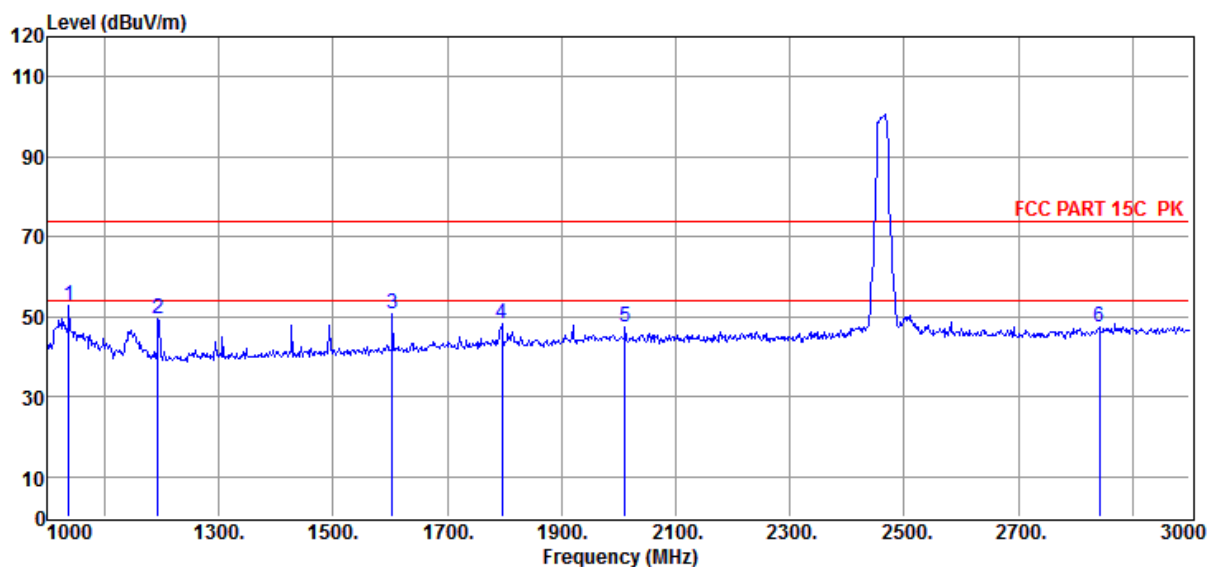

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 1038.00        | 64.33                   | 23.65                       | -35.13              | 52.85                       | 74.00                     | -21.15                | Peak     | VERTICAL     |
| 2              | 1194.00        | 60.50                   | 24.28                       | -35.12              | 49.66                       | 74.00                     | -24.34                | Peak     | VERTICAL     |
| 3              | 1604.00        | 59.26                   | 26.14                       | -34.58              | 50.82                       | 74.00                     | -23.18                | Peak     | VERTICAL     |
| 4              | 1796.00        | 55.31                   | 27.34                       | -34.42              | 48.23                       | 74.00                     | -25.77                | Peak     | VERTICAL     |
| 5              | 2012.00        | 53.29                   | 28.58                       | -34.43              | 47.44                       | 74.00                     | -26.56                | Peak     | VERTICAL     |
| 6              | 2842.00        | 52.20                   | 28.79                       | -33.46              | 47.53                       | 74.00                     | -26.47                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission test (3GHz -18GHz)

## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-22-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11B 11M ANT2 2412MHz

Data: 61

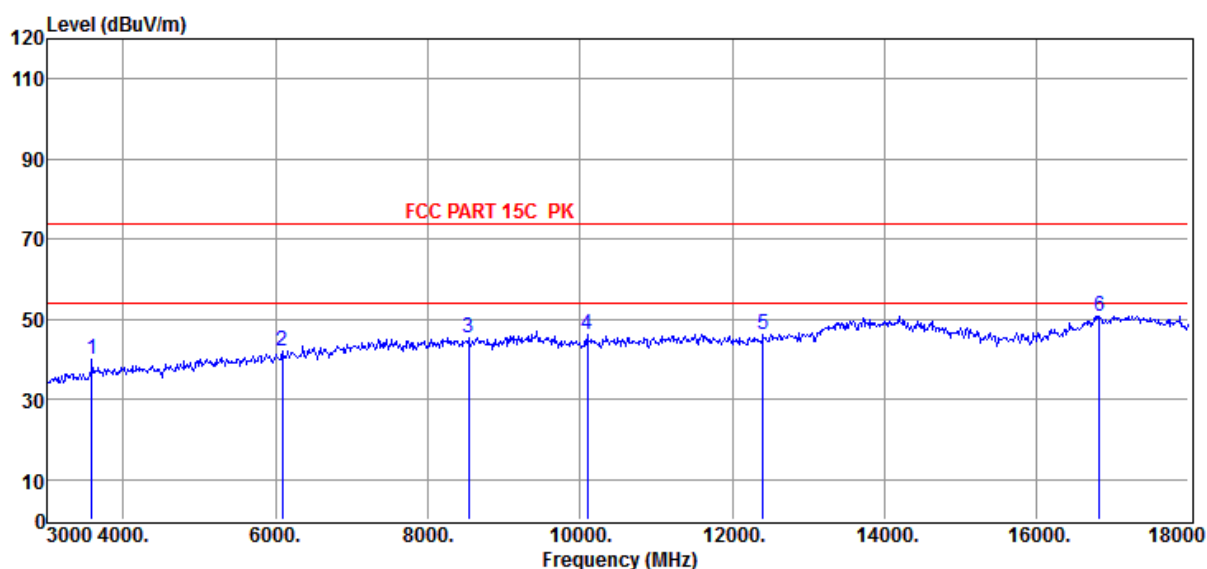

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 3585.00        | 41.67                   | 30.60                       | -32.26              | 40.01                       | 74.00                     | -33.99                | Peak     | HORIZONTAL   |
| 2              | 6090.00        | 38.44                   | 35.39                       | -31.85              | 41.98                       | 74.00                     | -32.02                | Peak     | HORIZONTAL   |
| 3              | 8535.00        | 39.06                   | 37.42                       | -30.95              | 45.53                       | 74.00                     | -28.47                | Peak     | HORIZONTAL   |
| 4              | 10095.00       | 37.32                   | 38.34                       | -29.65              | 46.01                       | 74.00                     | -27.99                | Peak     | HORIZONTAL   |
| 5              | 12405.00       | 36.29                   | 38.60                       | -28.88              | 46.01                       | 74.00                     | -27.99                | Peak     | HORIZONTAL   |
| 6              | 16830.00       | 35.54                   | 41.38                       | -26.11              | 50.81                       | 74.00                     | -23.19                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-22-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11B 11M ANT2 2412MHz

Data: 62

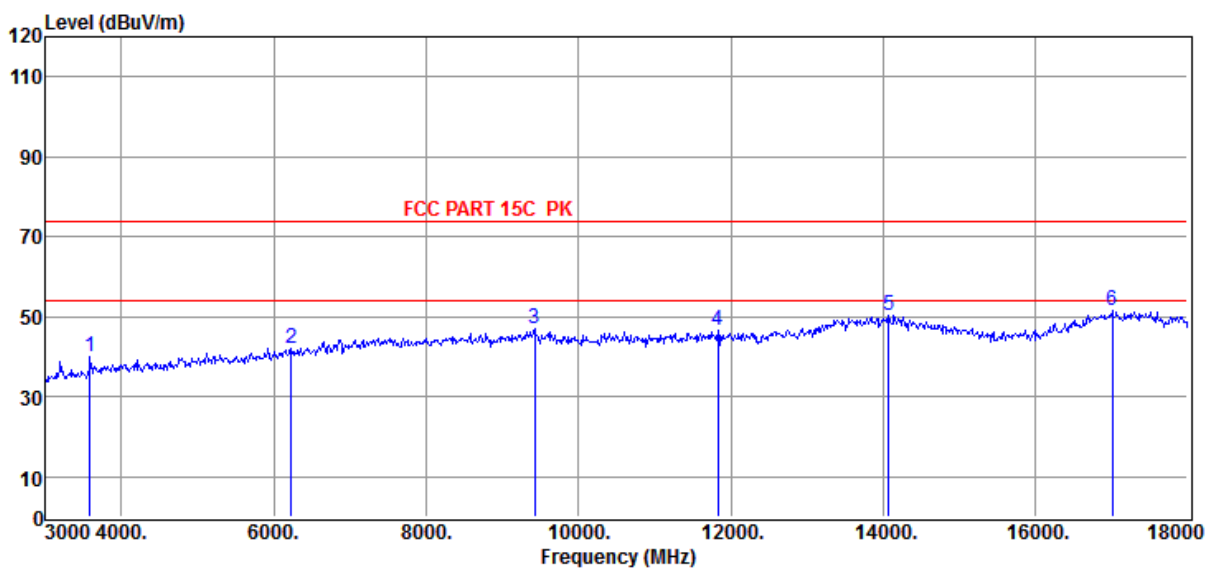

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 3585.00        | 41.69                   | 30.60                       | -32.26              | 40.03                       | 74.00                     | -33.97                | Peak     | VERTICAL     |
| 2              | 6225.00        | 38.59                   | 35.52                       | -32.04              | 42.07                       | 74.00                     | -31.93                | Peak     | VERTICAL     |
| 3              | 9420.00        | 38.71                   | 37.95                       | -29.84              | 46.82                       | 74.00                     | -27.18                | Peak     | VERTICAL     |
| 4              | 11835.00       | 36.54                   | 38.63                       | -28.62              | 46.55                       | 74.00                     | -27.45                | Peak     | VERTICAL     |
| 5              | 14070.00       | 37.19                   | 41.30                       | -28.25              | 50.24                       | 74.00                     | -23.76                | Peak     | VERTICAL     |
| 6              | 17010.00       | 35.32                   | 42.21                       | -25.97              | 51.56                       | 74.00                     | -22.44                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.



# Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-22-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11B 11M ANT1 2412MHz

Data: 63

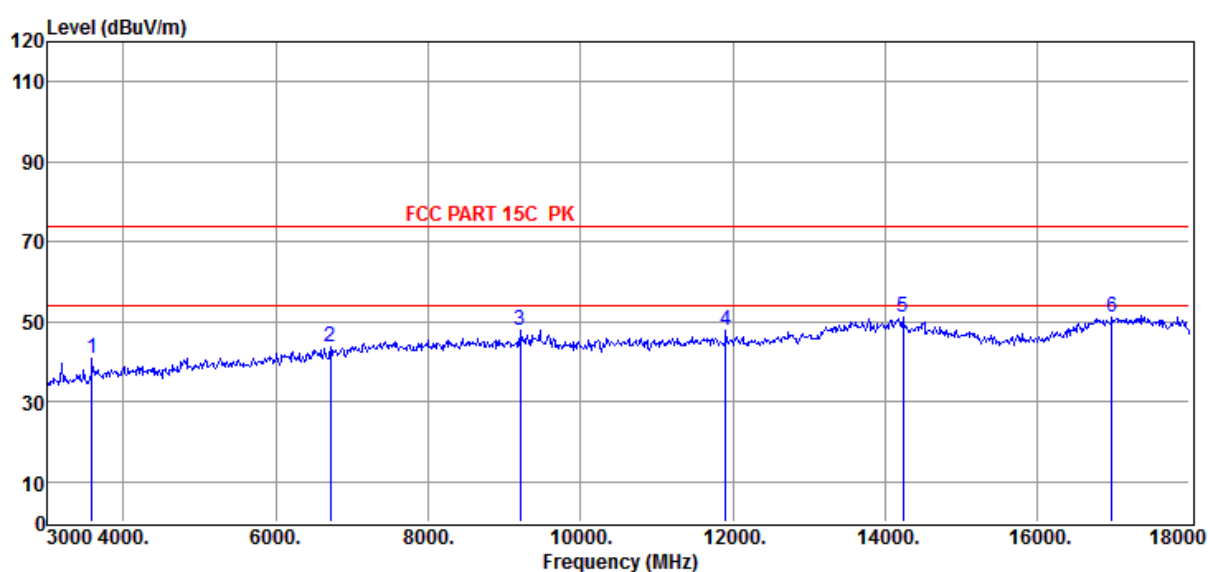

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 3585.00        | 42.46                   | 30.60                       | -32.26              | 40.80                       | 74.00                     | -33.20                | Peak     | VERTICAL     |
| 2              | 6720.00        | 39.18                   | 36.15                       | -31.44              | 43.89                       | 74.00                     | -30.11                | Peak     | VERTICAL     |
| 3              | 9210.00        | 40.50                   | 37.83                       | -30.51              | 47.82                       | 74.00                     | -26.18                | Peak     | VERTICAL     |
| 4              | 11910.00       | 37.65                   | 38.62                       | -28.63              | 47.64                       | 74.00                     | -26.36                | Peak     | VERTICAL     |
| 5              | 14235.00       | 37.36                   | 41.07                       | -27.43              | 51.00                       | 74.00                     | -23.00                | Peak     | VERTICAL     |
| 6              | 16980.00       | 35.02                   | 42.10                       | -26.07              | 51.05                       | 74.00                     | -22.95                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

**Test Site** : 10m Chamber

**Test Date** : 07-22-2022

**Tested By** : Sunny

**EUT** : BASE STATION


**Model Number** : WVODB1

**Power Supply** : AC 120V/60Hz

**Test Mode** : Tx mode

**Memo** : 11B 11M ANT1 2412MHz

Data: 64

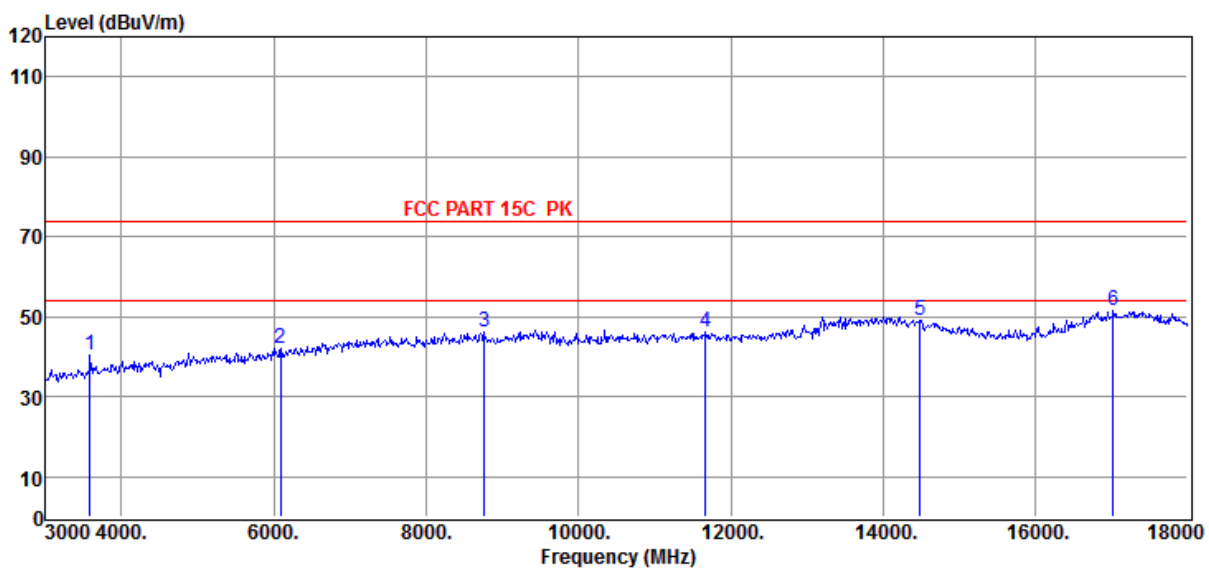

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 3585.00        | 42.13                   | 30.60                       | -32.26              | 40.47                       | 74.00                     | -33.53                | Peak     | HORIZONTAL   |
| 2              | 6090.00        | 38.43                   | 35.39                       | -31.85              | 41.97                       | 74.00                     | -32.03                | Peak     | HORIZONTAL   |
| 3              | 8760.00        | 39.47                   | 37.56                       | -30.89              | 46.14                       | 74.00                     | -27.86                | Peak     | HORIZONTAL   |
| 4              | 11670.00       | 36.13                   | 38.67                       | -28.63              | 46.17                       | 74.00                     | -27.83                | Peak     | HORIZONTAL   |
| 5              | 14490.00       | 36.24                   | 40.71                       | -27.78              | 49.17                       | 74.00                     | -24.83                | Peak     | HORIZONTAL   |
| 6              | 17025.00       | 35.35                   | 42.24                       | -26.10              | 51.49                       | 74.00                     | -22.51                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-22-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11B 11M ANT1 2437MHz

Data: 65

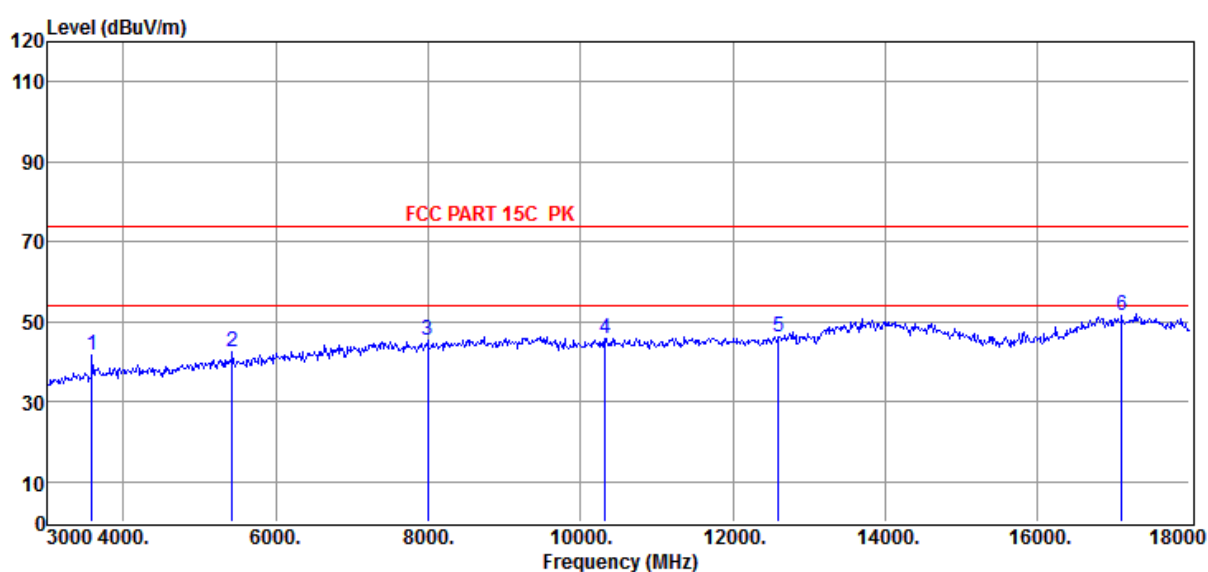

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 3585.00        | 43.44                   | 30.60                       | -32.26              | 41.78                       | 74.00                     | -32.22                | Peak     | HORIZONTAL   |
| 2              | 5430.00        | 40.35                   | 33.67                       | -31.53              | 42.49                       | 74.00                     | -31.51                | Peak     | HORIZONTAL   |
| 3              | 7995.00        | 39.09                   | 37.00                       | -30.90              | 45.19                       | 74.00                     | -28.81                | Peak     | HORIZONTAL   |
| 4              | 10320.00       | 37.24                   | 38.43                       | -29.76              | 45.91                       | 74.00                     | -28.09                | Peak     | HORIZONTAL   |
| 5              | 12600.00       | 36.56                   | 38.78                       | -28.96              | 46.38                       | 74.00                     | -27.62                | Peak     | HORIZONTAL   |
| 6              | 17115.00       | 35.90                   | 42.36                       | -26.80              | 51.46                       | 74.00                     | -22.54                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-22-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11B 11M ANT1 2437MHz

Data: 66

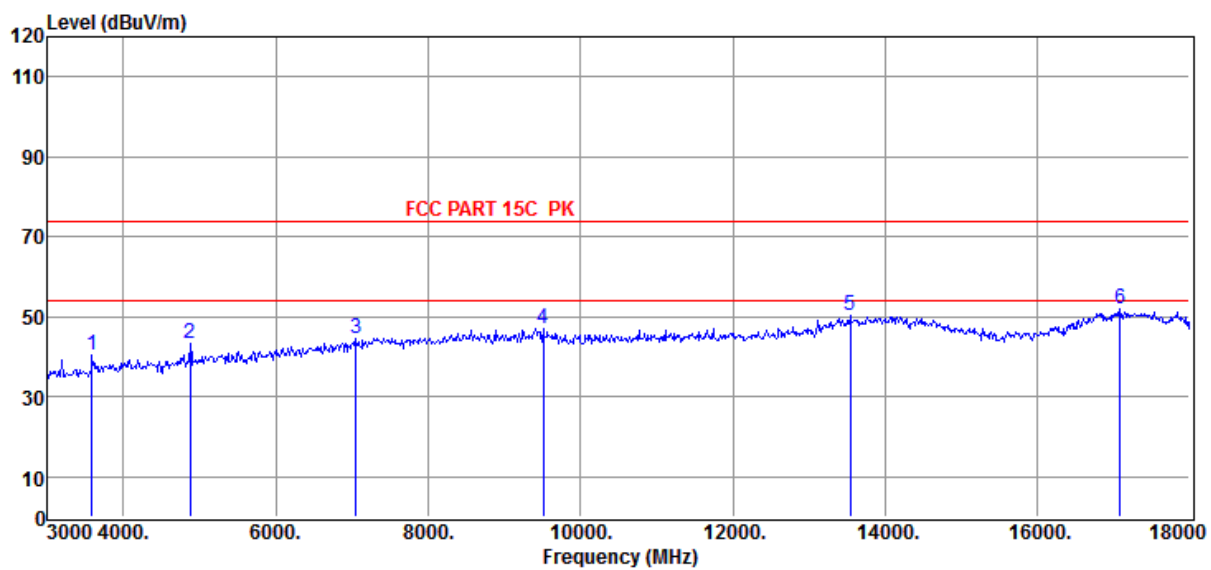

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 3585.00        | 42.24                   | 30.60                       | -32.26              | 40.58                       | 74.00                     | -33.42                | Peak     | VERTICAL     |
| 2              | 4875.00        | 42.42                   | 32.65                       | -31.74              | 43.33                       | 74.00                     | -30.67                | Peak     | VERTICAL     |
| 3              | 7050.00        | 38.36                   | 36.68                       | -30.47              | 44.57                       | 74.00                     | -29.43                | Peak     | VERTICAL     |
| 4              | 9510.00        | 39.21                   | 38.01                       | -30.19              | 47.03                       | 74.00                     | -26.97                | Peak     | VERTICAL     |
| 5              | 13545.00       | 38.74                   | 40.49                       | -29.10              | 50.13                       | 74.00                     | -23.87                | Peak     | VERTICAL     |
| 6              | 17085.00       | 36.24                   | 42.32                       | -26.65              | 51.91                       | 74.00                     | -22.09                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-22-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11B 11M ANT2 2437MHz

Data: 67

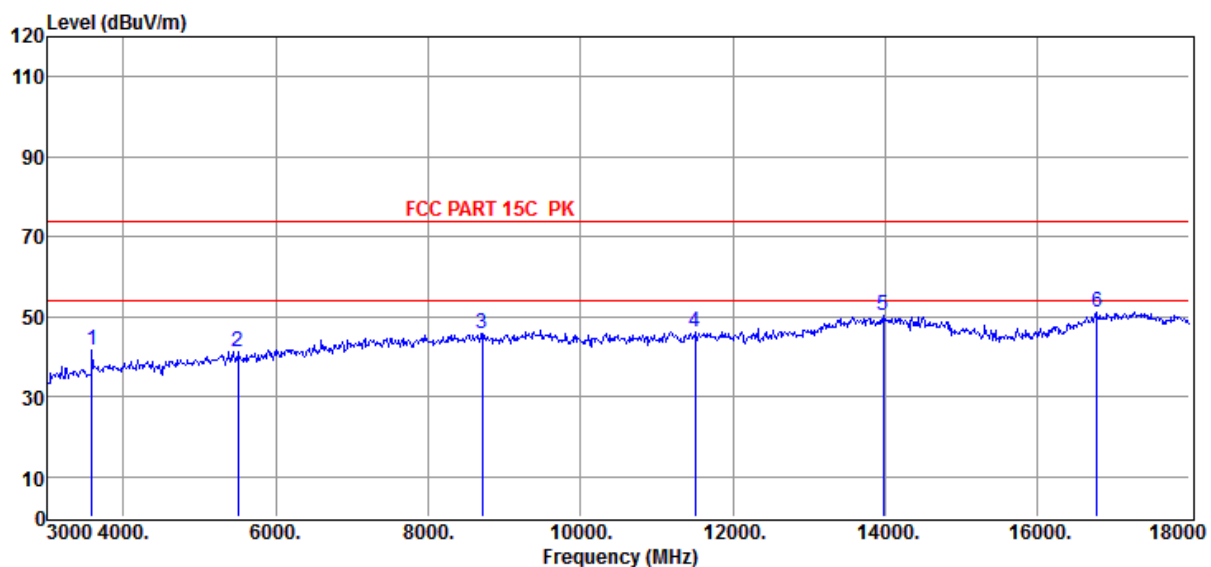

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 3585.00        | 43.14                   | 30.60                       | -32.26              | 41.48                       | 74.00                     | -32.52                | Peak     | HORIZONTAL   |
| 2              | 5505.00        | 38.90                   | 33.81                       | -31.55              | 41.16                       | 74.00                     | -32.84                | Peak     | HORIZONTAL   |
| 3              | 8715.00        | 39.24                   | 37.53                       | -30.87              | 45.90                       | 74.00                     | -28.10                | Peak     | HORIZONTAL   |
| 4              | 11505.00       | 36.23                   | 38.70                       | -28.61              | 46.32                       | 74.00                     | -27.68                | Peak     | HORIZONTAL   |
| 5              | 13980.00       | 37.25                   | 41.36                       | -28.44              | 50.17                       | 74.00                     | -23.83                | Peak     | HORIZONTAL   |
| 6              | 16785.00       | 36.04                   | 41.17                       | -25.91              | 51.30                       | 74.00                     | -22.70                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-22-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11B 11M ANT2 2437MHz

Data: 68

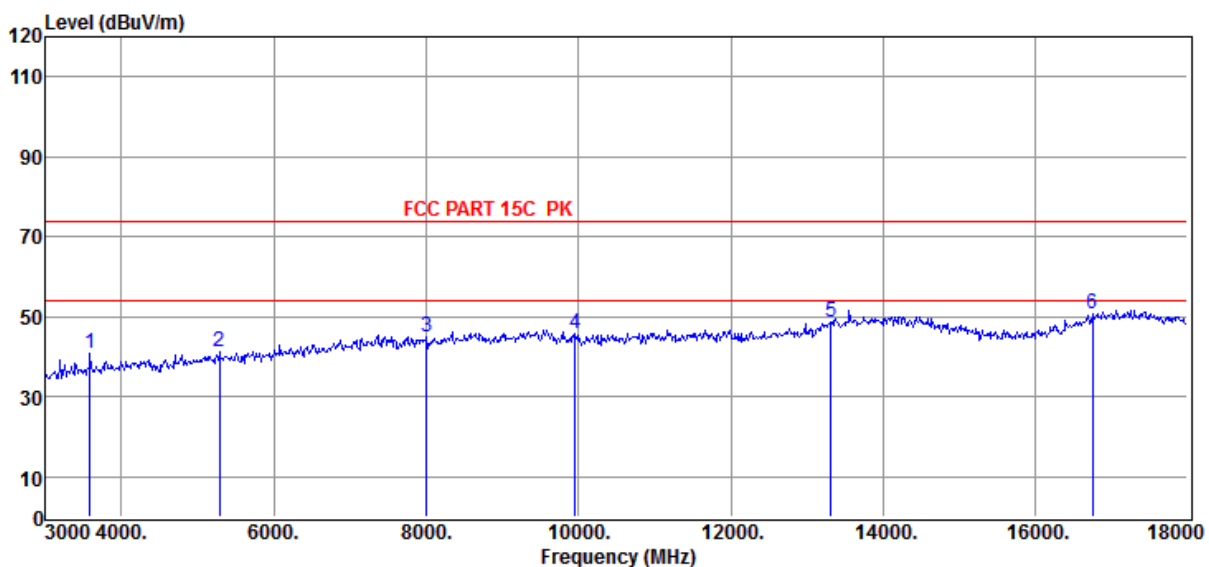

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 3585.00        | 42.43                   | 30.60                       | -32.26              | 40.77                       | 74.00                     | -33.23                | Peak     | VERTICAL     |
| 2              | 5280.00        | 39.19                   | 33.40                       | -31.50              | 41.09                       | 74.00                     | -32.91                | Peak     | VERTICAL     |
| 3              | 8010.00        | 39.03                   | 37.01                       | -30.89              | 45.15                       | 74.00                     | -28.85                | Peak     | VERTICAL     |
| 4              | 9960.00        | 37.64                   | 38.28                       | -30.19              | 45.73                       | 74.00                     | -28.27                | Peak     | VERTICAL     |
| 5              | 13320.00       | 37.87                   | 40.08                       | -29.17              | 48.78                       | 74.00                     | -25.22                | Peak     | VERTICAL     |
| 6              | 16755.00       | 35.74                   | 41.02                       | -26.14              | 50.62                       | 74.00                     | -23.38                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.



## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-22-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11B 11M ANT1 2462MHz

Data: 69

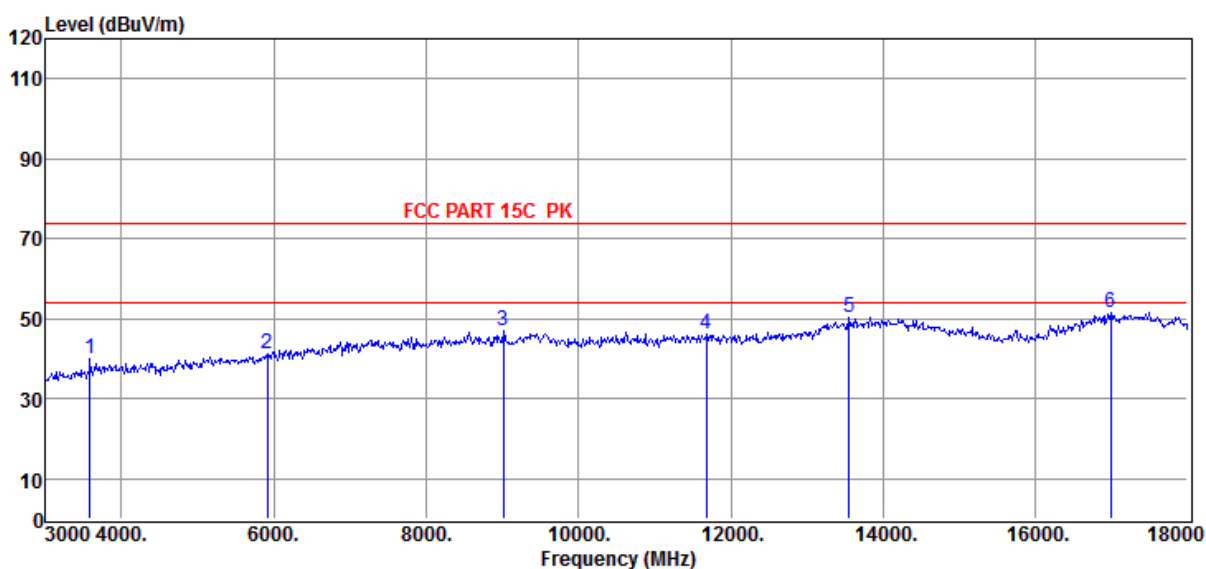

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 3585.00        | 41.79                   | 30.60                       | -32.26              | 40.13                       | 74.00                     | -33.87                | Peak     | HORIZONTAL   |
| 2              | 5910.00        | 37.78                   | 35.03                       | -31.66              | 41.15                       | 74.00                     | -32.85                | Peak     | HORIZONTAL   |
| 3              | 9015.00        | 39.78                   | 37.71                       | -30.55              | 46.94                       | 74.00                     | -27.06                | Peak     | HORIZONTAL   |
| 4              | 11685.00       | 36.10                   | 38.66                       | -28.63              | 46.13                       | 74.00                     | -27.87                | Peak     | HORIZONTAL   |
| 5              | 13560.00       | 38.86                   | 40.52                       | -29.11              | 50.27                       | 74.00                     | -23.73                | Peak     | HORIZONTAL   |
| 6              | 16995.00       | 35.47                   | 42.18                       | -25.93              | 51.72                       | 74.00                     | -22.28                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-22-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11B 11M ANT1 2462MHz

Data: 70

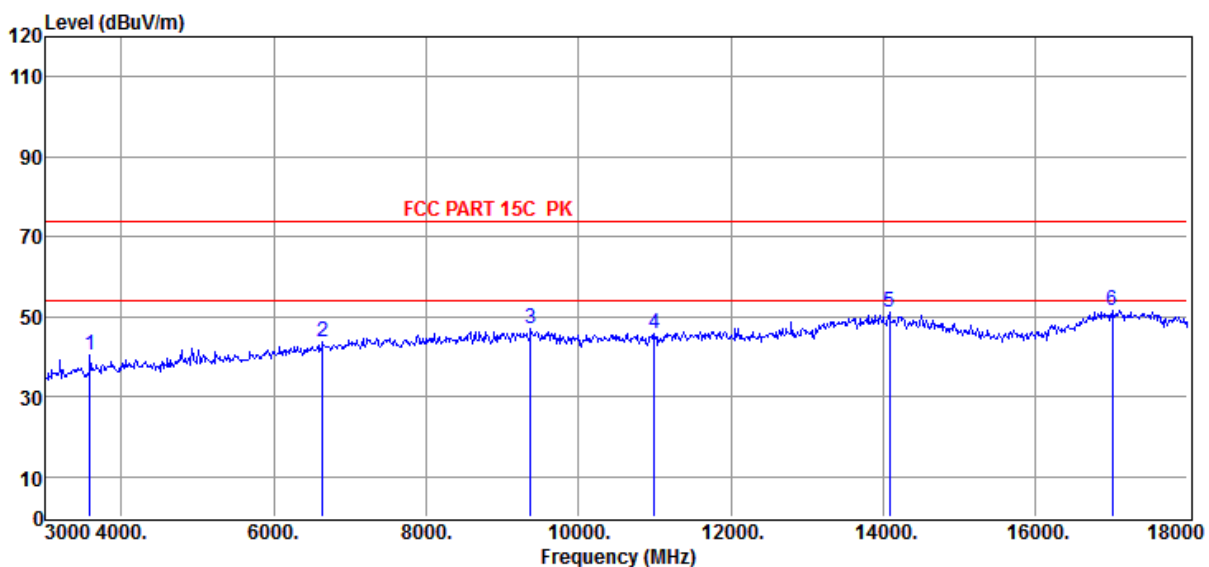

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 3585.00        | 41.94                   | 30.60                       | -32.26              | 40.28                       | 74.00                     | -33.72                | Peak     | VERTICAL     |
| 2              | 6645.00        | 38.81                   | 36.03                       | -31.17              | 43.67                       | 74.00                     | -30.33                | Peak     | VERTICAL     |
| 3              | 9375.00        | 38.75                   | 37.92                       | -29.86              | 46.81                       | 74.00                     | -27.19                | Peak     | VERTICAL     |
| 4              | 10995.00       | 36.01                   | 38.70                       | -28.86              | 45.85                       | 74.00                     | -28.15                | Peak     | VERTICAL     |
| 5              | 14085.00       | 37.98                   | 41.28                       | -28.22              | 51.04                       | 74.00                     | -22.96                | Peak     | VERTICAL     |
| 6              | 17010.00       | 35.28                   | 42.21                       | -25.97              | 51.52                       | 74.00                     | -22.48                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-22-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11B 11M ANT2 2462MHz

Data: 71

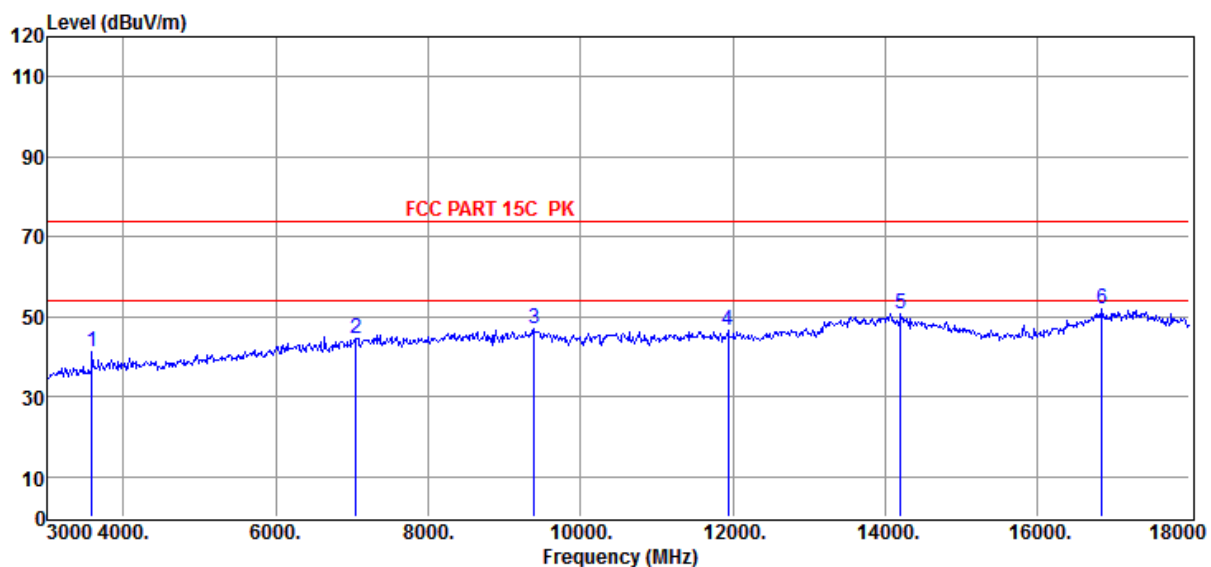

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 3585.00        | 42.73                   | 30.60                       | -32.26              | 41.07                       | 74.00                     | -32.93                | Peak     | VERTICAL     |
| 2              | 7050.00        | 38.43                   | 36.68                       | -30.47              | 44.64                       | 74.00                     | -29.36                | Peak     | VERTICAL     |
| 3              | 9390.00        | 38.86                   | 37.93                       | -29.80              | 46.99                       | 74.00                     | -27.01                | Peak     | VERTICAL     |
| 4              | 11940.00       | 36.47                   | 38.61                       | -28.68              | 46.40                       | 74.00                     | -27.60                | Peak     | VERTICAL     |
| 5              | 14205.00       | 36.61                   | 41.11                       | -27.10              | 50.62                       | 74.00                     | -23.38                | Peak     | VERTICAL     |
| 6              | 16845.00       | 36.58                   | 41.46                       | -26.27              | 51.77                       | 74.00                     | -22.23                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-22-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11B 11M ANT2 2462MHz

Data: 72

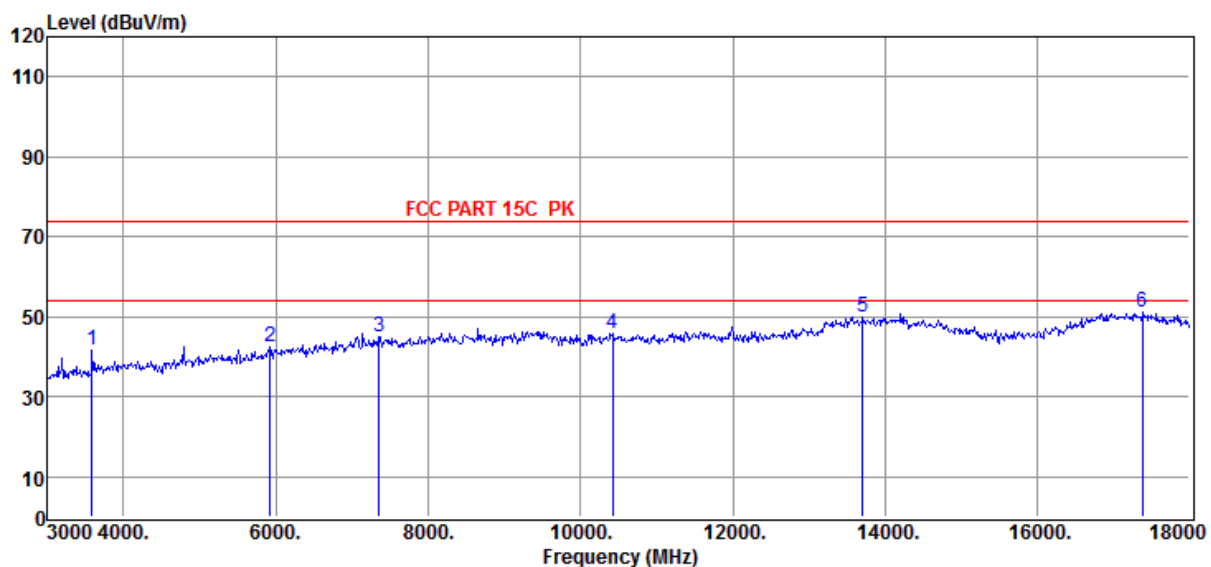

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 3585.00        | 43.13                   | 30.60                       | -32.26              | 41.47                       | 74.00                     | -32.53                | Peak     | VERTICAL     |
| 2              | 5925.00        | 39.33                   | 35.08                       | -31.79              | 42.62                       | 74.00                     | -31.38                | Peak     | VERTICAL     |
| 3              | 7350.00        | 38.44                   | 37.16                       | -30.59              | 45.01                       | 74.00                     | -28.99                | Peak     | VERTICAL     |
| 4              | 10425.00       | 36.94                   | 38.47                       | -29.61              | 45.80                       | 74.00                     | -28.20                | Peak     | VERTICAL     |
| 5              | 13710.00       | 38.06                   | 40.82                       | -28.91              | 49.97                       | 74.00                     | -24.03                | Peak     | VERTICAL     |
| 6              | 17385.00       | 35.50                   | 42.74                       | -27.11              | 51.13                       | 74.00                     | -22.87                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-25-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11G 6M ANT1 2412MHz

Data: 107

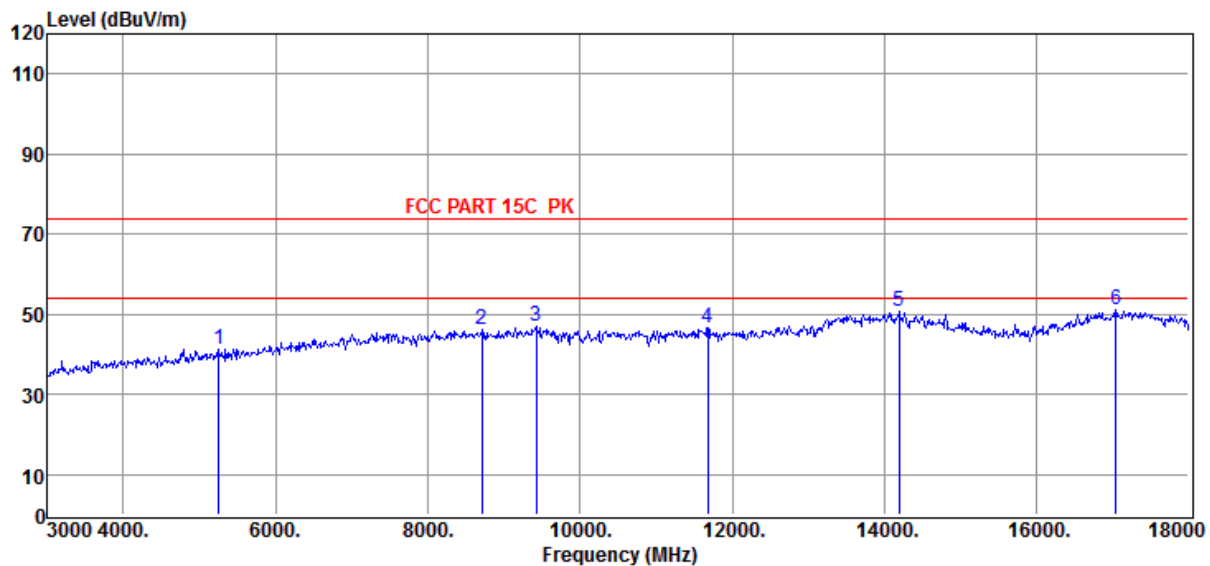

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 5250.00        | 39.18                   | 33.35                       | -31.26              | 41.27                       | 74.00                     | -32.73                | Peak     | VERTICAL     |
| 2              | 8715.00        | 39.62                   | 37.53                       | -30.87              | 46.28                       | 74.00                     | -27.72                | Peak     | VERTICAL     |
| 3              | 9420.00        | 38.73                   | 37.95                       | -29.84              | 46.84                       | 74.00                     | -27.16                | Peak     | VERTICAL     |
| 4              | 11685.00       | 36.56                   | 38.66                       | -28.63              | 46.59                       | 74.00                     | -27.41                | Peak     | VERTICAL     |
| 5              | 14190.00       | 36.80                   | 41.13                       | -27.16              | 50.77                       | 74.00                     | -23.23                | Peak     | VERTICAL     |
| 6              | 17040.00       | 35.06                   | 42.26                       | -26.24              | 51.08                       | 74.00                     | -22.92                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-25-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11G 6M ANT1 2412MHz

Data: 108

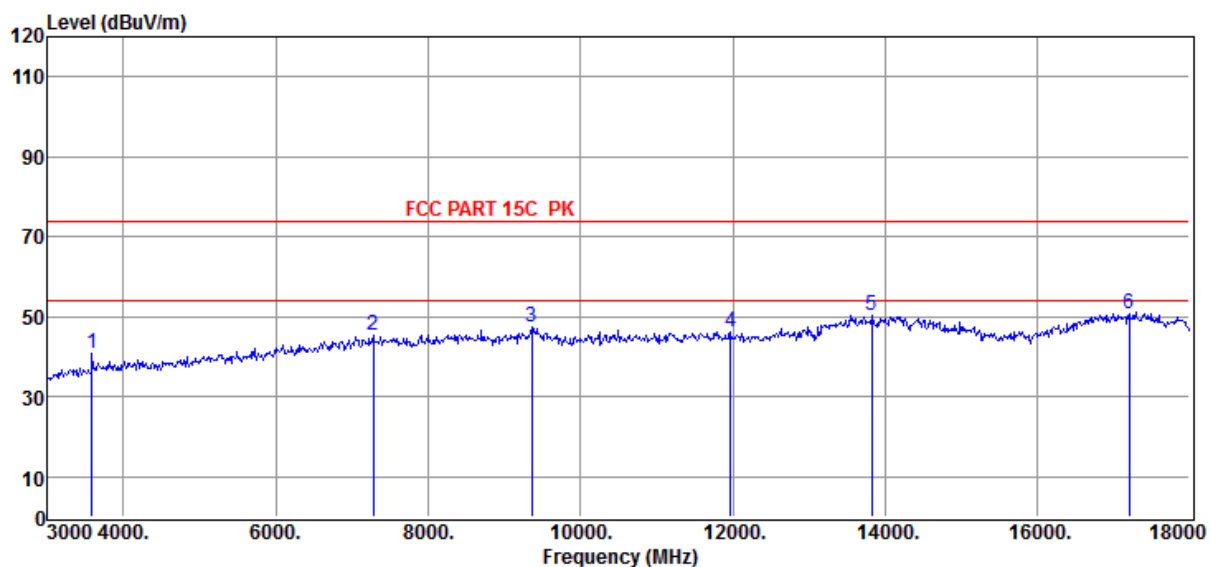

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 3585.00        | 42.65                   | 30.60                       | -32.26              | 40.99                       | 74.00                     | -33.01                | Peak     | HORIZONTAL   |
| 2              | 7275.00        | 39.13                   | 37.04                       | -30.70              | 45.47                       | 74.00                     | -28.53                | Peak     | HORIZONTAL   |
| 3              | 9360.00        | 39.24                   | 37.92                       | -29.93              | 47.23                       | 74.00                     | -26.77                | Peak     | HORIZONTAL   |
| 4              | 11970.00       | 36.27                   | 38.61                       | -28.73              | 46.15                       | 74.00                     | -27.85                | Peak     | HORIZONTAL   |
| 5              | 13830.00       | 38.28                   | 41.06                       | -28.88              | 50.46                       | 74.00                     | -23.54                | Peak     | HORIZONTAL   |
| 6              | 17205.00       | 35.18                   | 42.49                       | -26.92              | 50.75                       | 74.00                     | -23.25                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.



## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-25-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11G 6M ANT2 2412MHz

Data: 109

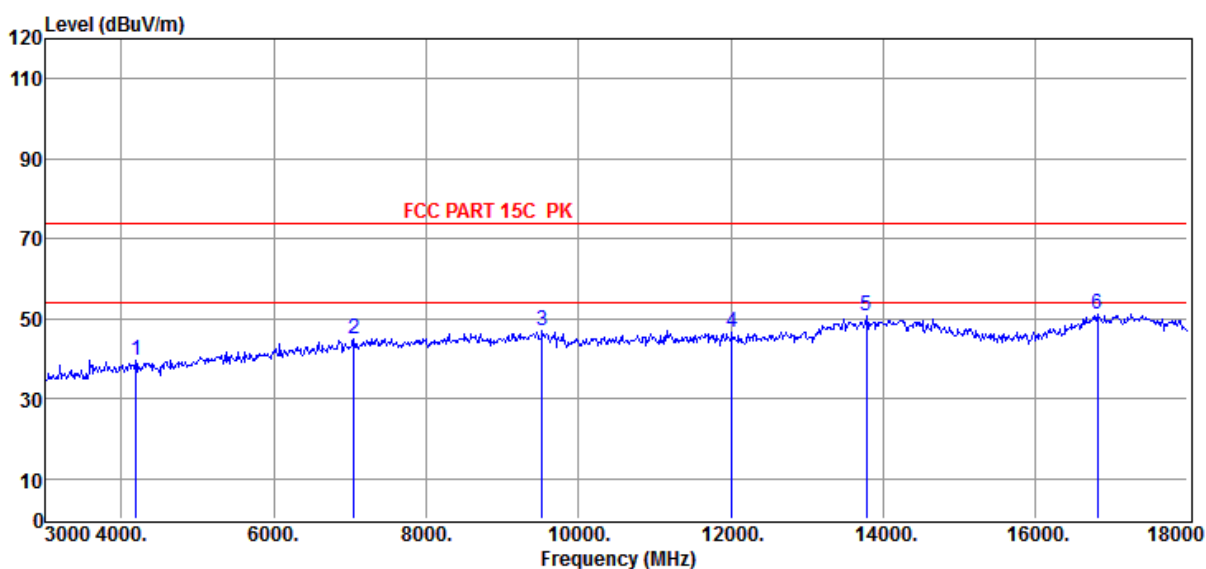

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 4185.00        | 39.91                   | 31.71                       | -32.10              | 39.52                       | 74.00                     | -34.48                | Peak     | HORIZONTAL   |
| 2              | 7050.00        | 38.76                   | 36.68                       | -30.47              | 44.97                       | 74.00                     | -29.03                | Peak     | HORIZONTAL   |
| 3              | 9525.00        | 38.99                   | 38.01                       | -30.16              | 46.84                       | 74.00                     | -27.16                | Peak     | HORIZONTAL   |
| 4              | 12015.00       | 36.90                   | 38.60                       | -28.77              | 46.73                       | 74.00                     | -27.27                | Peak     | HORIZONTAL   |
| 5              | 13785.00       | 38.54                   | 40.97                       | -28.98              | 50.53                       | 74.00                     | -23.47                | Peak     | HORIZONTAL   |
| 6              | 16815.00       | 35.88                   | 41.31                       | -25.96              | 51.23                       | 74.00                     | -22.77                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-25-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11G 6M ANT2 2412MHz

Data: 110

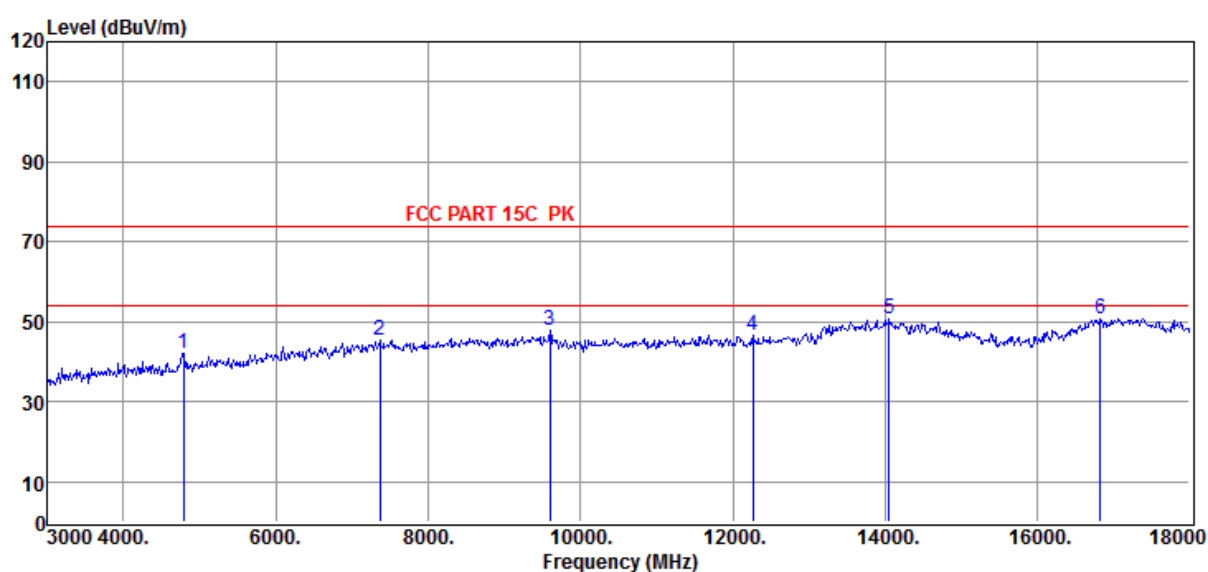

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 4785.00        | 41.32                   | 32.47                       | -31.66              | 42.13                       | 74.00                     | -31.87                | Peak     | VERTICAL     |
| 2              | 7365.00        | 38.87                   | 37.18                       | -30.75              | 45.30                       | 74.00                     | -28.70                | Peak     | VERTICAL     |
| 3              | 9600.00        | 39.63                   | 38.06                       | -29.97              | 47.72                       | 74.00                     | -26.28                | Peak     | VERTICAL     |
| 4              | 12270.00       | 37.10                   | 38.60                       | -29.21              | 46.49                       | 74.00                     | -27.51                | Peak     | VERTICAL     |
| 5              | 14055.00       | 37.49                   | 41.32                       | -28.28              | 50.53                       | 74.00                     | -23.47                | Peak     | VERTICAL     |
| 6              | 16830.00       | 35.30                   | 41.38                       | -26.11              | 50.57                       | 74.00                     | -23.43                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-25-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11G 6M ANT2 2437MHz

Data: 111

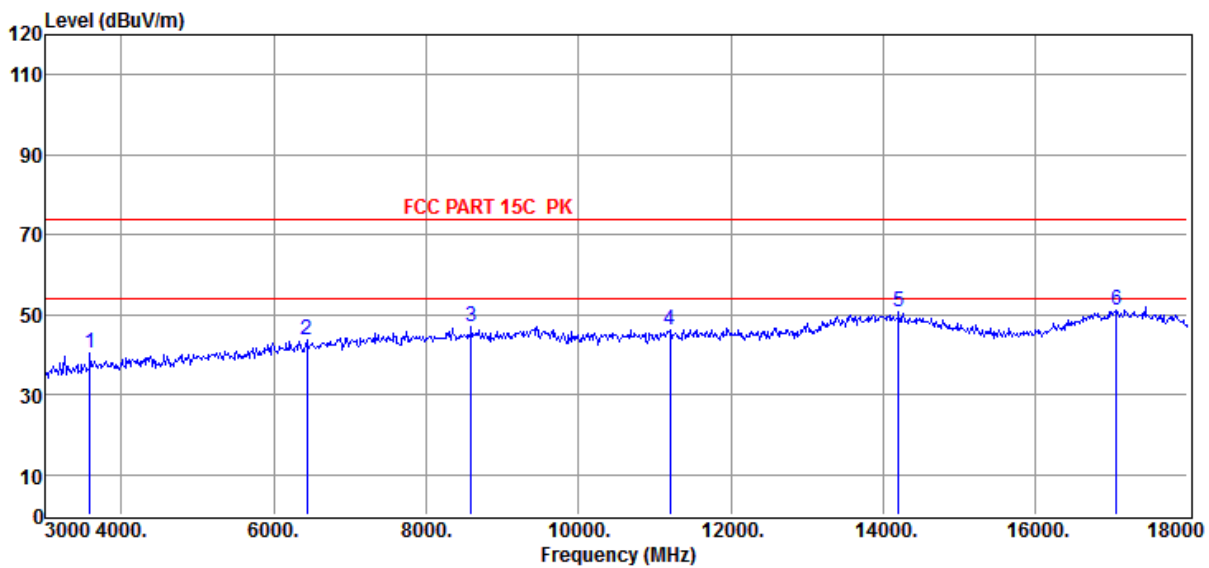

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 3585.00        | 41.89                   | 30.60                       | -32.26              | 40.23                       | 74.00                     | -33.77                | Peak     | VERTICAL     |
| 2              | 6435.00        | 39.74                   | 35.74                       | -31.75              | 43.73                       | 74.00                     | -30.27                | Peak     | VERTICAL     |
| 3              | 8595.00        | 40.36                   | 37.46                       | -30.98              | 46.84                       | 74.00                     | -27.16                | Peak     | VERTICAL     |
| 4              | 11205.00       | 35.92                   | 38.70                       | -28.32              | 46.30                       | 74.00                     | -27.70                | Peak     | VERTICAL     |
| 5              | 14205.00       | 36.66                   | 41.11                       | -27.10              | 50.67                       | 74.00                     | -23.33                | Peak     | VERTICAL     |
| 6              | 17070.00       | 35.37                   | 42.30                       | -26.51              | 51.16                       | 74.00                     | -22.84                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-25-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11G 6M ANT2 2437MHz

Data: 112

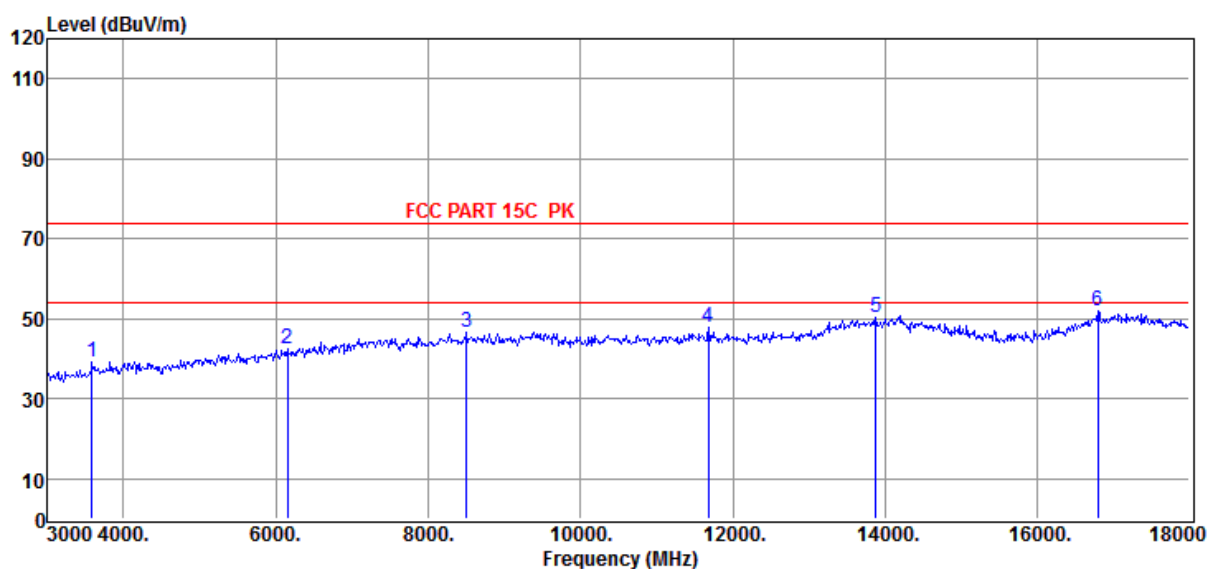

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 3585.00        | 40.87                   | 30.60                       | -32.26              | 39.21                       | 74.00                     | -34.79                | Peak     | HORIZONTAL   |
| 2              | 6150.00        | 38.94                   | 35.45                       | -31.86              | 42.53                       | 74.00                     | -31.47                | Peak     | HORIZONTAL   |
| 3              | 8505.00        | 40.12                   | 37.40                       | -30.94              | 46.58                       | 74.00                     | -27.42                | Peak     | HORIZONTAL   |
| 4              | 11685.00       | 37.79                   | 38.66                       | -28.63              | 47.82                       | 74.00                     | -26.18                | Peak     | HORIZONTAL   |
| 5              | 13875.00       | 37.91                   | 41.15                       | -28.71              | 50.35                       | 74.00                     | -23.65                | Peak     | HORIZONTAL   |
| 6              | 16800.00       | 36.44                   | 41.24                       | -25.80              | 51.88                       | 74.00                     | -22.12                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-25-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11G 6M ANT1 2437MHz

Data: 113

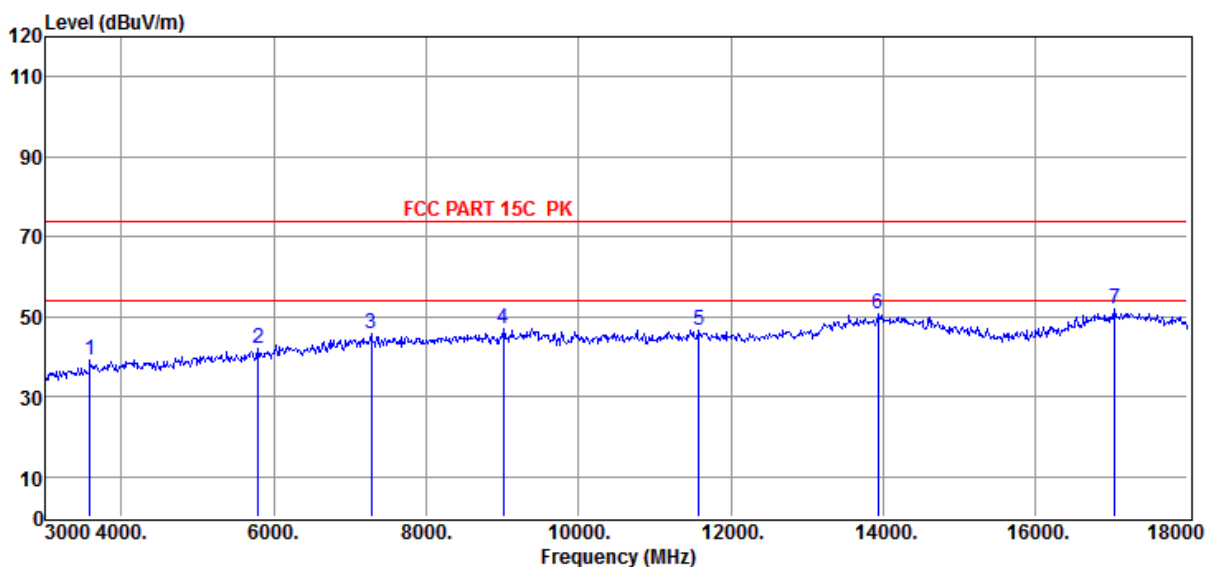

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 3585.00        | 40.73                   | 30.60                       | -32.26              | 39.07                       | 74.00                     | -34.93                | Peak     | HORIZONTAL   |
| 2              | 5790.00        | 39.43                   | 34.67                       | -32.00              | 42.10                       | 74.00                     | -31.90                | Peak     | HORIZONTAL   |
| 3              | 7275.00        | 39.55                   | 37.04                       | -30.70              | 45.89                       | 74.00                     | -28.11                | Peak     | HORIZONTAL   |
| 4              | 9015.00        | 40.01                   | 37.71                       | -30.55              | 47.17                       | 74.00                     | -26.83                | Peak     | HORIZONTAL   |
| 5              | 11580.00       | 36.74                   | 38.68                       | -28.62              | 46.80                       | 74.00                     | -27.20                | Peak     | HORIZONTAL   |
| 6              | 13935.00       | 37.82                   | 41.27                       | -28.54              | 50.55                       | 74.00                     | -23.45                | Peak     | HORIZONTAL   |
| 7              | 17040.00       | 35.79                   | 42.26                       | -26.24              | 51.81                       | 74.00                     | -22.19                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-25-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11G 6M ANT1 2437MHz

Data: 114

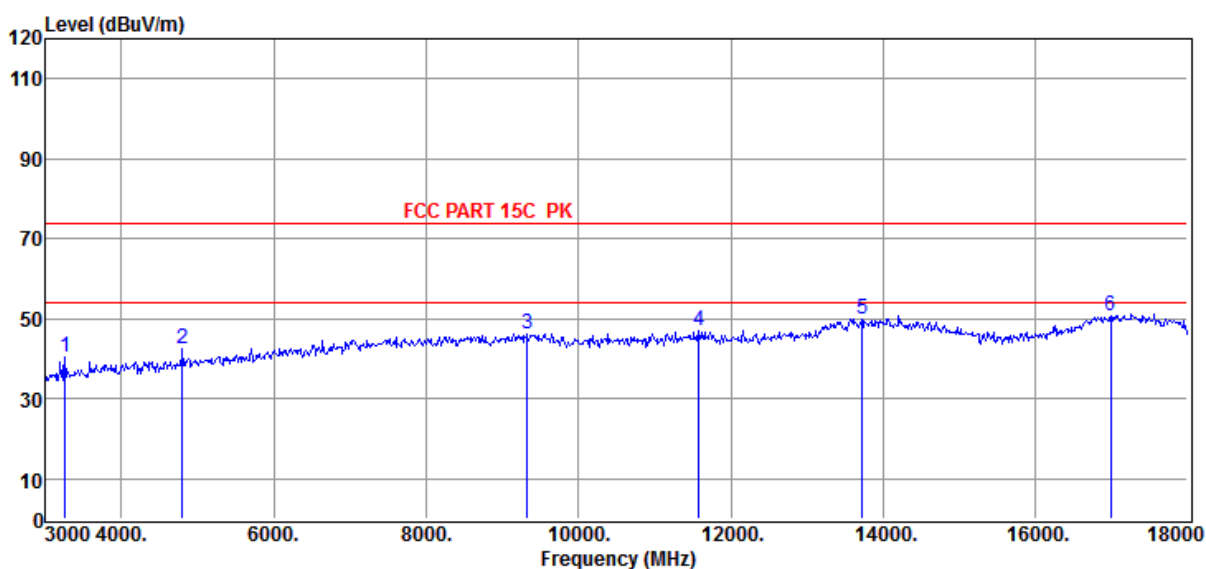

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 3255.00        | 42.83                   | 29.81                       | -32.37              | 40.27                       | 74.00                     | -33.73                | Peak     | VERTICAL     |
| 2              | 4800.00        | 41.59                   | 32.50                       | -31.73              | 42.36                       | 74.00                     | -31.64                | Peak     | VERTICAL     |
| 3              | 9330.00        | 38.53                   | 37.90                       | -30.07              | 46.36                       | 74.00                     | -27.64                | Peak     | VERTICAL     |
| 4              | 11580.00       | 36.88                   | 38.68                       | -28.62              | 46.94                       | 74.00                     | -27.06                | Peak     | VERTICAL     |
| 5              | 13725.00       | 37.91                   | 40.85                       | -28.92              | 49.84                       | 74.00                     | -24.16                | Peak     | VERTICAL     |
| 6              | 16995.00       | 34.59                   | 42.18                       | -25.93              | 50.84                       | 74.00                     | -23.16                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.



# Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-25-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11G 6M ANT1 2462MHz

Data: 115

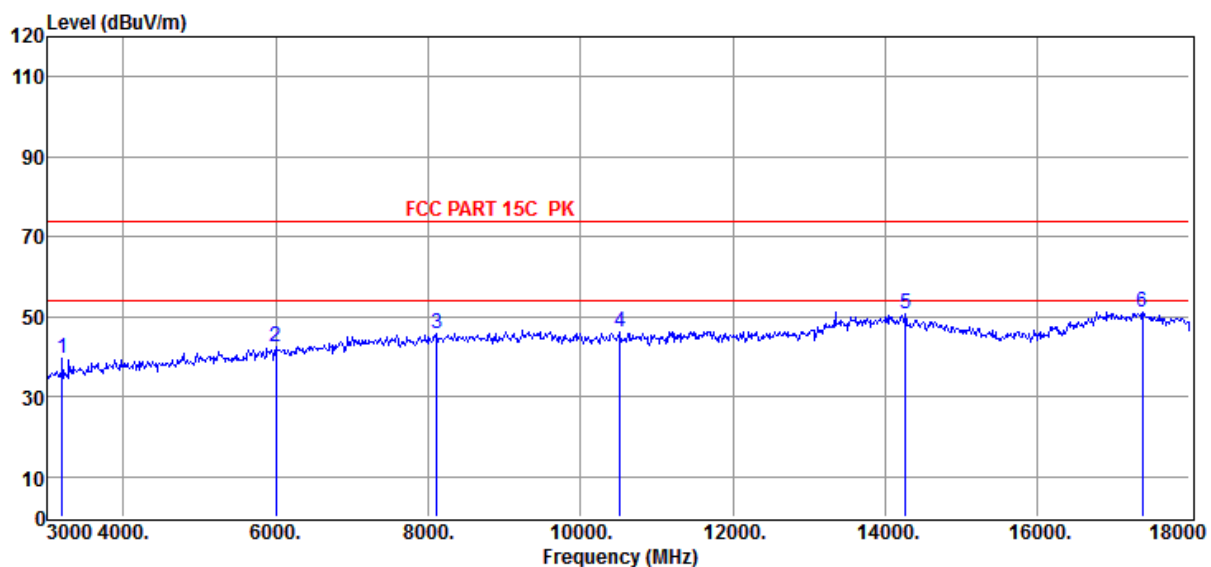

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 3195.00        | 41.85                   | 29.67                       | -32.08              | 39.44                       | 74.00                     | -34.56                | Peak     | VERTICAL     |
| 2              | 6000.00        | 38.92                   | 35.30                       | -31.80              | 42.42                       | 74.00                     | -31.58                | Peak     | VERTICAL     |
| 3              | 8115.00        | 39.98                   | 37.09                       | -31.32              | 45.75                       | 74.00                     | -28.25                | Peak     | VERTICAL     |
| 4              | 10515.00       | 37.12                   | 38.51                       | -29.54              | 46.09                       | 74.00                     | -27.91                | Peak     | VERTICAL     |
| 5              | 14265.00       | 37.26                   | 41.03                       | -27.75              | 50.54                       | 74.00                     | -23.46                | Peak     | VERTICAL     |
| 6              | 17385.00       | 35.67                   | 42.74                       | -27.11              | 51.30                       | 74.00                     | -22.70                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-25-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11G 6M ANT1 2462MHz

Data: 116

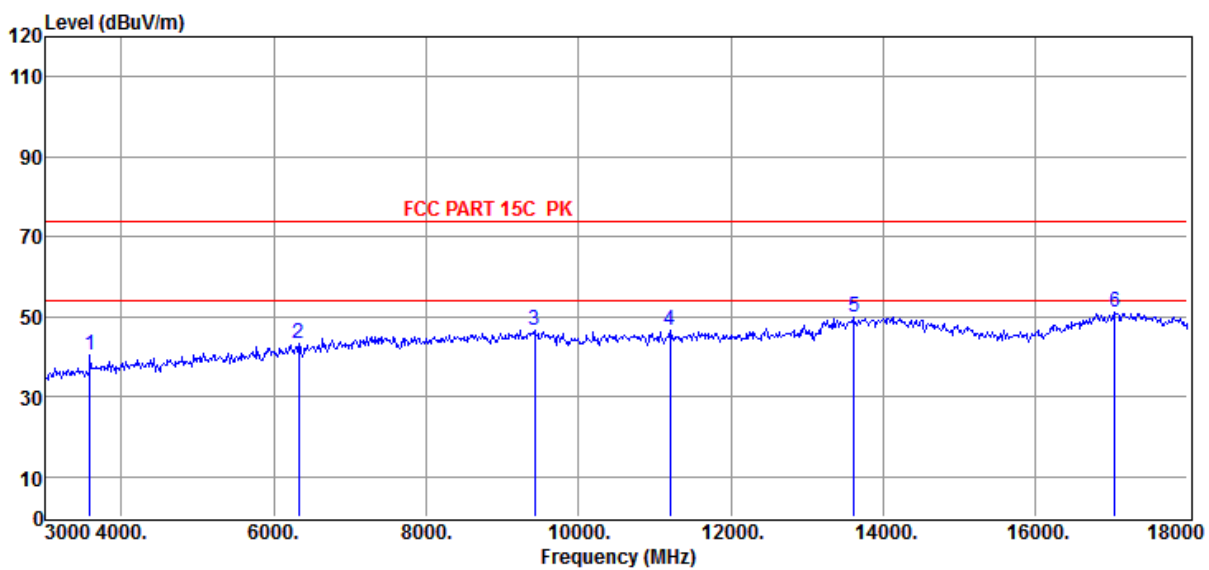

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 3585.00        | 42.06                   | 30.60                       | -32.26              | 40.40                       | 74.00                     | -33.60                | Peak     | HORIZONTAL   |
| 2              | 6330.00        | 39.52                   | 35.63                       | -31.85              | 43.30                       | 74.00                     | -30.70                | Peak     | HORIZONTAL   |
| 3              | 9420.00        | 38.49                   | 37.95                       | -29.84              | 46.60                       | 74.00                     | -27.40                | Peak     | HORIZONTAL   |
| 4              | 11205.00       | 36.12                   | 38.70                       | -28.32              | 46.50                       | 74.00                     | -27.50                | Peak     | HORIZONTAL   |
| 5              | 13620.00       | 38.51                   | 40.64                       | -29.09              | 50.06                       | 74.00                     | -23.94                | Peak     | HORIZONTAL   |
| 6              | 17040.00       | 35.11                   | 42.26                       | -26.24              | 51.13                       | 74.00                     | -22.87                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-25-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11G 6M ANT2 2462MHz

Data: 117

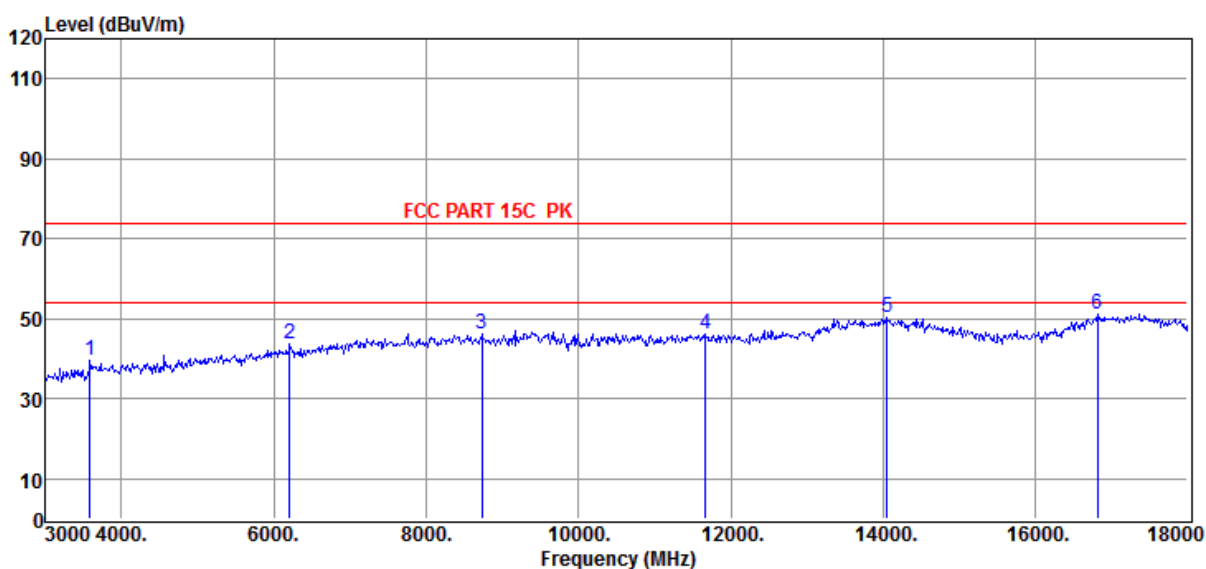

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 3585.00        | 41.25                   | 30.60                       | -32.26              | 39.59                       | 74.00                     | -34.41                | Peak     | HORIZONTAL   |
| 2              | 6210.00        | 40.18                   | 35.51                       | -31.93              | 43.76                       | 74.00                     | -30.24                | Peak     | HORIZONTAL   |
| 3              | 8730.00        | 39.37                   | 37.54                       | -30.88              | 46.03                       | 74.00                     | -27.97                | Peak     | HORIZONTAL   |
| 4              | 11670.00       | 36.24                   | 38.67                       | -28.63              | 46.28                       | 74.00                     | -27.72                | Peak     | HORIZONTAL   |
| 5              | 14055.00       | 37.37                   | 41.32                       | -28.28              | 50.41                       | 74.00                     | -23.59                | Peak     | HORIZONTAL   |
| 6              | 16815.00       | 35.75                   | 41.31                       | -25.96              | 51.10                       | 74.00                     | -22.90                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-25-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11G 6M ANT2 2462MHz

Data: 118

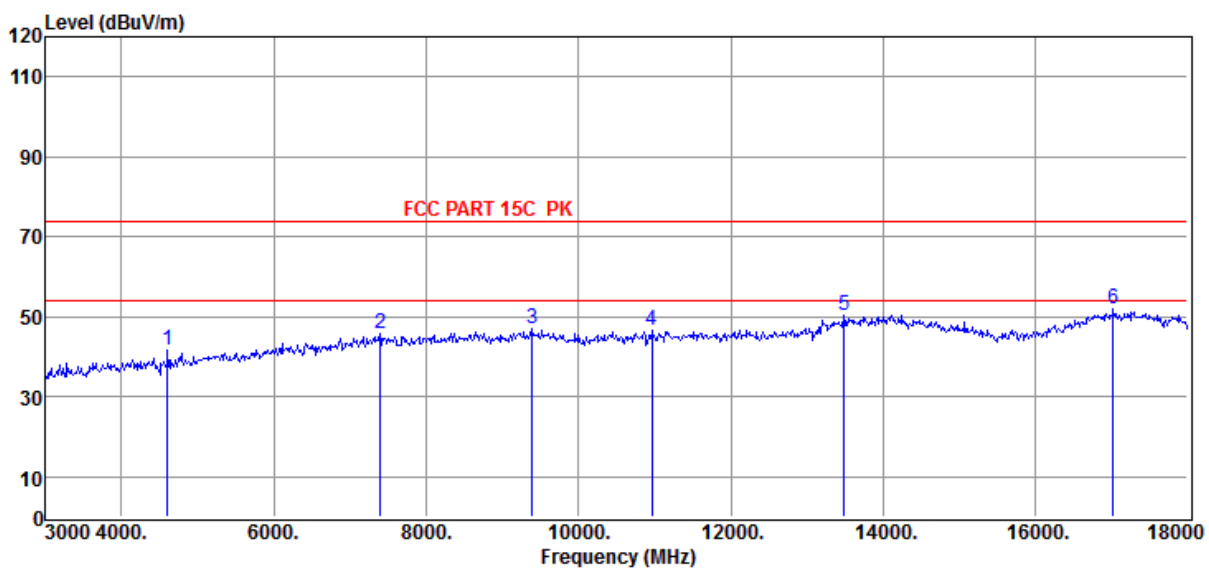

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 4605.00        | 41.40                   | 32.11                       | -32.06              | 41.45                       | 74.00                     | -32.55                | Peak     | VERTICAL     |
| 2              | 7395.00        | 39.61                   | 37.23                       | -31.08              | 45.76                       | 74.00                     | -28.24                | Peak     | VERTICAL     |
| 3              | 9390.00        | 38.71                   | 37.93                       | -29.80              | 46.84                       | 74.00                     | -27.16                | Peak     | VERTICAL     |
| 4              | 10965.00       | 37.06                   | 38.69                       | -28.95              | 46.80                       | 74.00                     | -27.20                | Peak     | VERTICAL     |
| 5              | 13485.00       | 39.22                   | 40.37                       | -29.12              | 50.47                       | 74.00                     | -23.53                | Peak     | VERTICAL     |
| 6              | 17025.00       | 35.81                   | 42.24                       | -26.10              | 51.95                       | 74.00                     | -22.05                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-22-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11N20 MCS0 ANT1 2412MHz

Data: 73

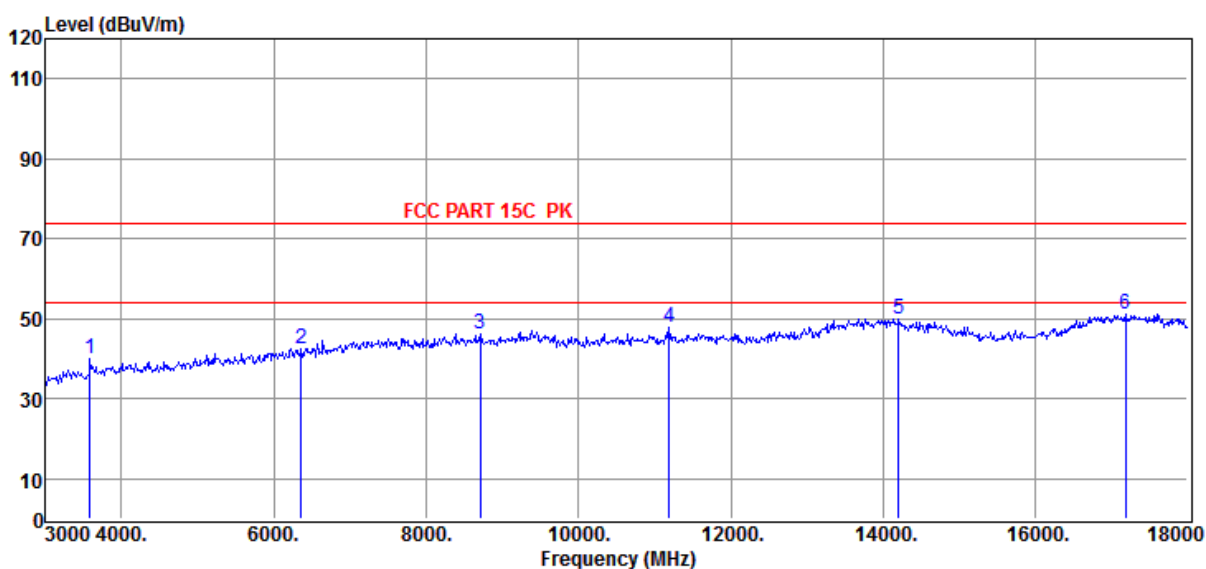

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 3585.00        | 41.51                   | 30.60                       | -32.26              | 39.85                       | 74.00                     | -34.15                | Peak     | HORIZONTAL   |
| 2              | 6360.00        | 38.79                   | 35.66                       | -31.83              | 42.62                       | 74.00                     | -31.38                | Peak     | HORIZONTAL   |
| 3              | 8715.00        | 39.66                   | 37.53                       | -30.87              | 46.32                       | 74.00                     | -27.68                | Peak     | HORIZONTAL   |
| 4              | 11190.00       | 37.37                   | 38.70                       | -28.34              | 47.73                       | 74.00                     | -26.27                | Peak     | HORIZONTAL   |
| 5              | 14205.00       | 35.94                   | 41.11                       | -27.10              | 49.95                       | 74.00                     | -24.05                | Peak     | HORIZONTAL   |
| 6              | 17190.00       | 35.55                   | 42.47                       | -26.92              | 51.10                       | 74.00                     | -22.90                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-22-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11N20 MCS0 ANT1 2412MHz

Data: 74

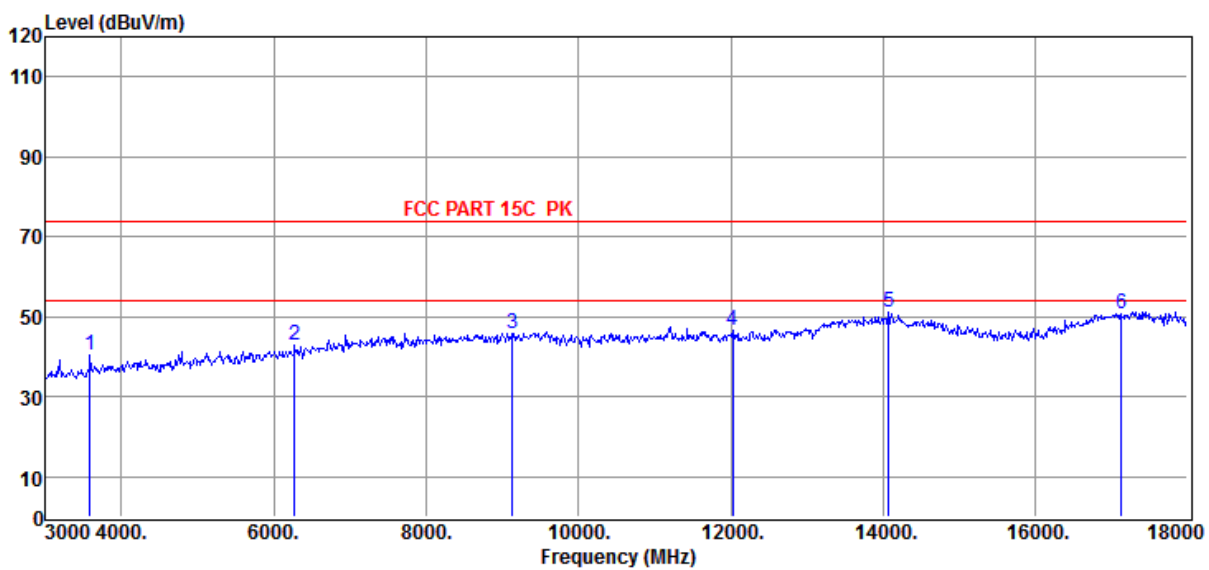

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 3585.00        | 42.02                   | 30.60                       | -32.26              | 40.36                       | 74.00                     | -33.64                | Peak     | VERTICAL     |
| 2              | 6270.00        | 39.22                   | 35.57                       | -32.08              | 42.71                       | 74.00                     | -31.29                | Peak     | VERTICAL     |
| 3              | 9135.00        | 38.81                   | 37.78                       | -30.65              | 45.94                       | 74.00                     | -28.06                | Peak     | VERTICAL     |
| 4              | 12030.00       | 36.59                   | 38.60                       | -28.77              | 46.42                       | 74.00                     | -27.58                | Peak     | VERTICAL     |
| 5              | 14070.00       | 37.89                   | 41.30                       | -28.25              | 50.94                       | 74.00                     | -23.06                | Peak     | VERTICAL     |
| 6              | 17130.00       | 35.09                   | 42.38                       | -26.83              | 50.64                       | 74.00                     | -23.36                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.



# Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-22-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11N20 MCS0 ANT2 2412MHz

Data: 75

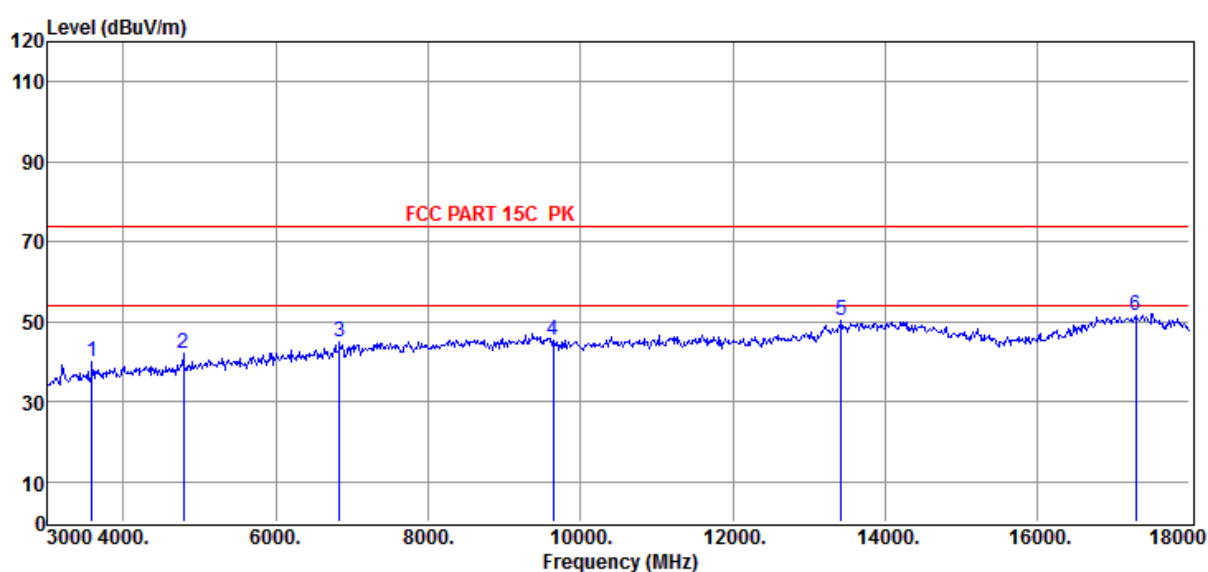

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 3585.00        | 41.60                   | 30.60                       | -32.26              | 39.94                       | 74.00                     | -34.06                | Peak     | VERTICAL     |
| 2              | 4785.00        | 41.35                   | 32.47                       | -31.66              | 42.16                       | 74.00                     | -31.84                | Peak     | VERTICAL     |
| 3              | 6840.00        | 39.40                   | 36.34                       | -30.94              | 44.80                       | 74.00                     | -29.20                | Peak     | VERTICAL     |
| 4              | 9645.00        | 37.39                   | 38.09                       | -30.01              | 45.47                       | 74.00                     | -28.53                | Peak     | VERTICAL     |
| 5              | 13425.00       | 39.24                   | 40.26                       | -29.34              | 50.16                       | 74.00                     | -23.84                | Peak     | VERTICAL     |
| 6              | 17295.00       | 35.77                   | 42.61                       | -26.80              | 51.58                       | 74.00                     | -22.42                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-22-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11N20 MCS0 ANT2 2412MHz

Data: 76

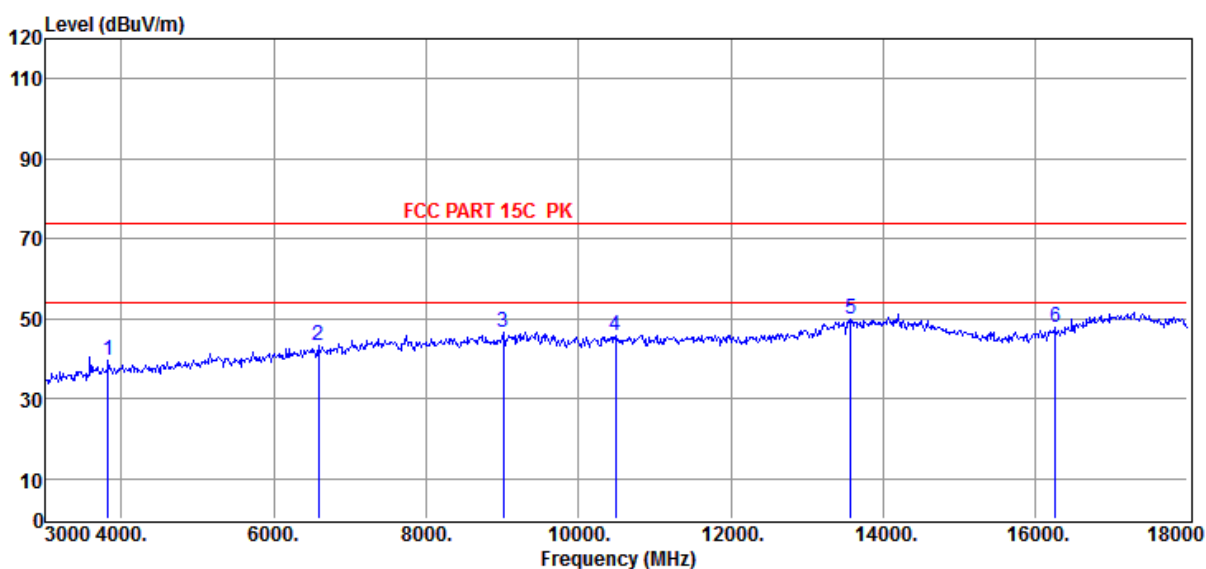

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 3825.00        | 40.60                   | 31.18                       | -32.21              | 39.57                       | 74.00                     | -34.43                | Peak     | HORIZONTAL   |
| 2              | 6585.00        | 38.93                   | 35.94                       | -31.55              | 43.32                       | 74.00                     | -30.68                | Peak     | HORIZONTAL   |
| 3              | 9015.00        | 39.46                   | 37.71                       | -30.55              | 46.62                       | 74.00                     | -27.38                | Peak     | HORIZONTAL   |
| 4              | 10485.00       | 36.94                   | 38.49                       | -29.58              | 45.85                       | 74.00                     | -28.15                | Peak     | HORIZONTAL   |
| 5              | 13575.00       | 38.43                   | 40.55                       | -29.12              | 49.86                       | 74.00                     | -24.14                | Peak     | HORIZONTAL   |
| 6              | 16260.00       | 36.18                   | 39.18                       | -27.39              | 47.97                       | 74.00                     | -26.03                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-22-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11N20 MCS0 ANT2 2437MHz

Data: 77

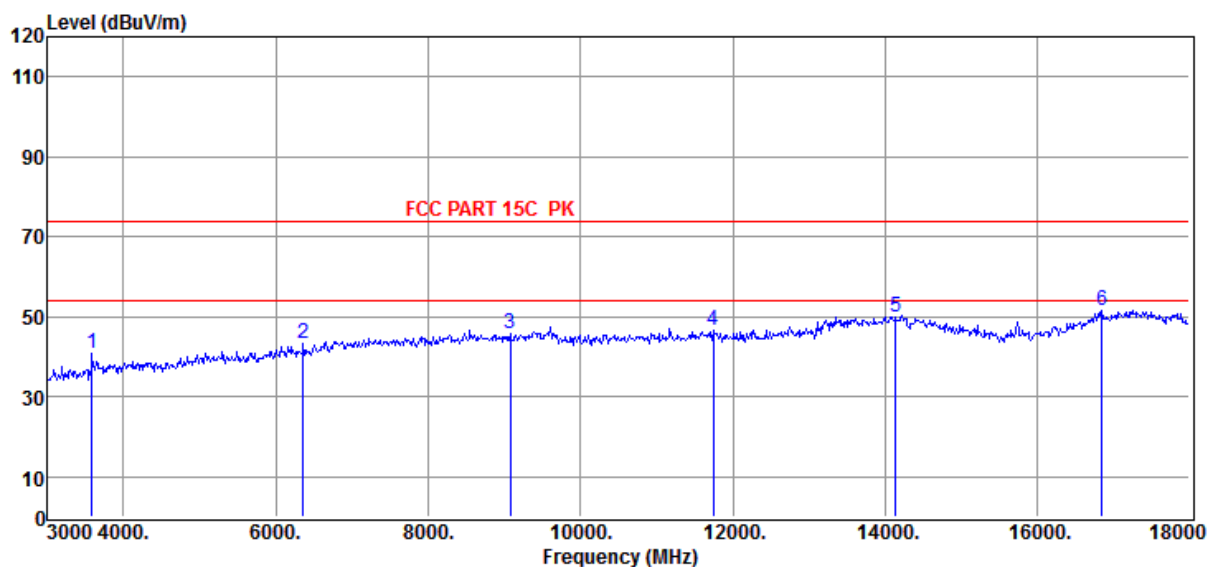

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 3585.00        | 42.39                   | 30.60                       | -32.26              | 40.73                       | 74.00                     | -33.27                | Peak     | HORIZONTAL   |
| 2              | 6360.00        | 39.60                   | 35.66                       | -31.83              | 43.43                       | 74.00                     | -30.57                | Peak     | HORIZONTAL   |
| 3              | 9075.00        | 38.59                   | 37.74                       | -30.66              | 45.67                       | 74.00                     | -28.33                | Peak     | HORIZONTAL   |
| 4              | 11745.00       | 36.70                   | 38.65                       | -28.63              | 46.72                       | 74.00                     | -27.28                | Peak     | HORIZONTAL   |
| 5              | 14145.00       | 36.58                   | 41.20                       | -27.68              | 50.10                       | 74.00                     | -23.90                | Peak     | HORIZONTAL   |
| 6              | 16845.00       | 36.36                   | 41.46                       | -26.27              | 51.55                       | 74.00                     | -22.45                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-22-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11N20 MCS0 ANT2 2437MHz

Data: 78

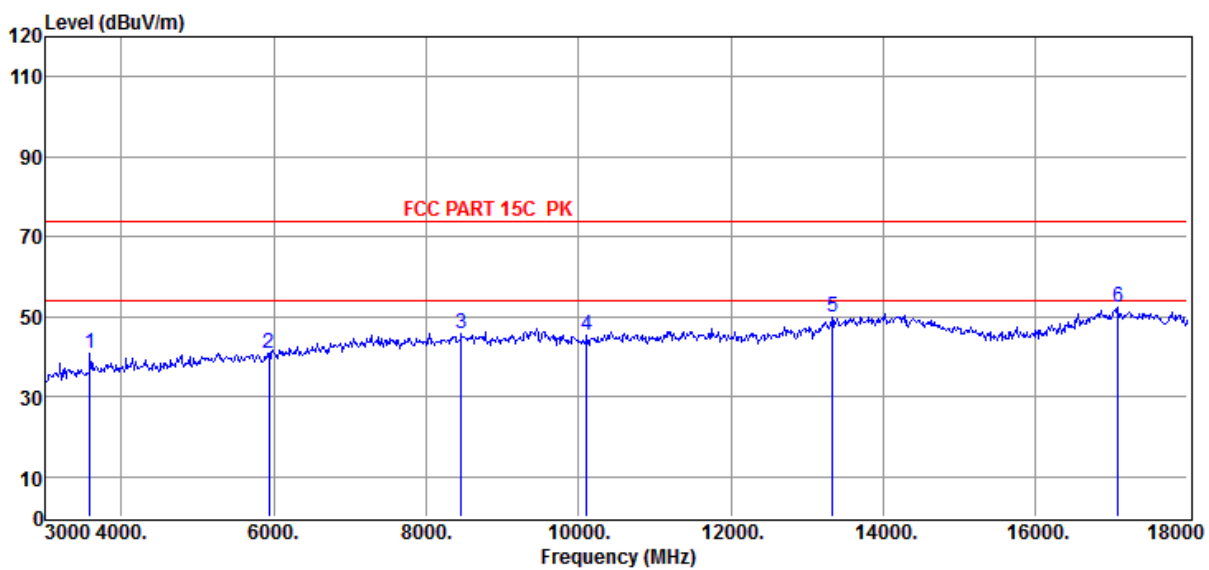

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 3585.00        | 42.34                   | 30.60                       | -32.26              | 40.68                       | 74.00                     | -33.32                | Peak     | VERTICAL     |
| 2              | 5940.00        | 37.83                   | 35.12                       | -31.92              | 41.03                       | 74.00                     | -32.97                | Peak     | VERTICAL     |
| 3              | 8460.00        | 39.33                   | 37.37                       | -31.06              | 45.64                       | 74.00                     | -28.36                | Peak     | VERTICAL     |
| 4              | 10110.00       | 36.70                   | 38.34                       | -29.69              | 45.35                       | 74.00                     | -28.65                | Peak     | VERTICAL     |
| 5              | 13335.00       | 38.86                   | 40.10                       | -29.22              | 49.74                       | 74.00                     | -24.26                | Peak     | VERTICAL     |
| 6              | 17085.00       | 36.89                   | 42.32                       | -26.65              | 52.56                       | 74.00                     | -21.44                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-22-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11N20 MCS0 ANT1 2437MHz

Data: 79

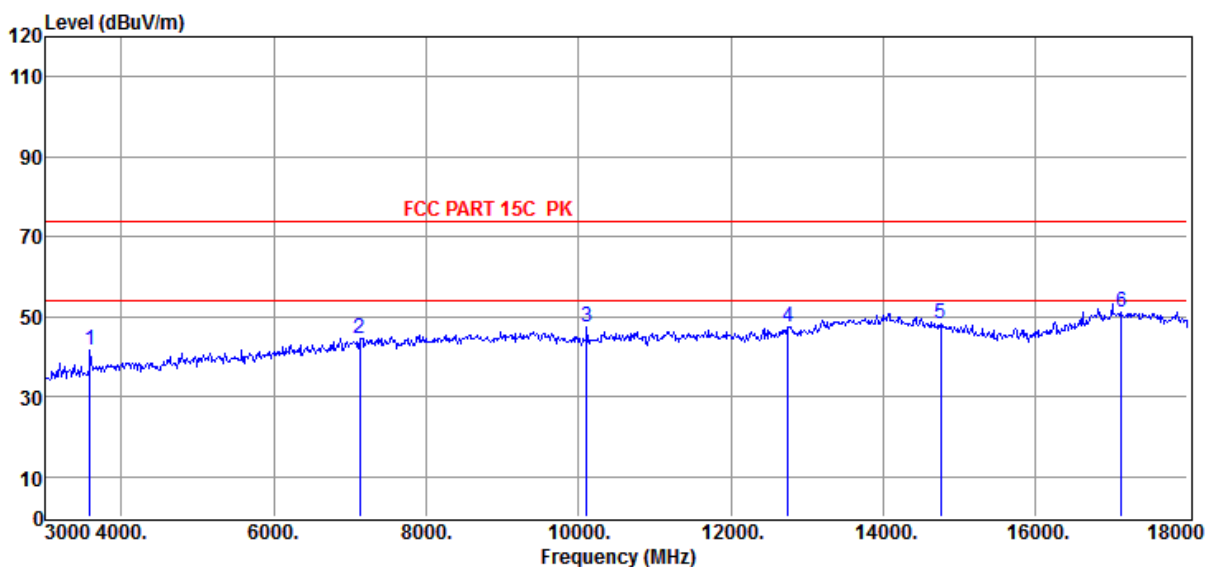

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 3585.00        | 43.12                   | 30.60                       | -32.26              | 41.46                       | 74.00                     | -32.54                | Peak     | VERTICAL     |
| 2              | 7125.00        | 38.73                   | 36.80                       | -31.07              | 44.46                       | 74.00                     | -29.54                | Peak     | VERTICAL     |
| 3              | 10110.00       | 38.77                   | 38.34                       | -29.69              | 47.42                       | 74.00                     | -26.58                | Peak     | VERTICAL     |
| 4              | 12750.00       | 37.50                   | 39.05                       | -29.31              | 47.24                       | 74.00                     | -26.76                | Peak     | VERTICAL     |
| 5              | 14760.00       | 35.47                   | 39.82                       | -27.06              | 48.23                       | 74.00                     | -25.77                | Peak     | VERTICAL     |
| 6              | 17130.00       | 35.41                   | 42.38                       | -26.83              | 50.96                       | 74.00                     | -23.04                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-22-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11N20 MCS0 ANT1 2437MHz

Data: 80

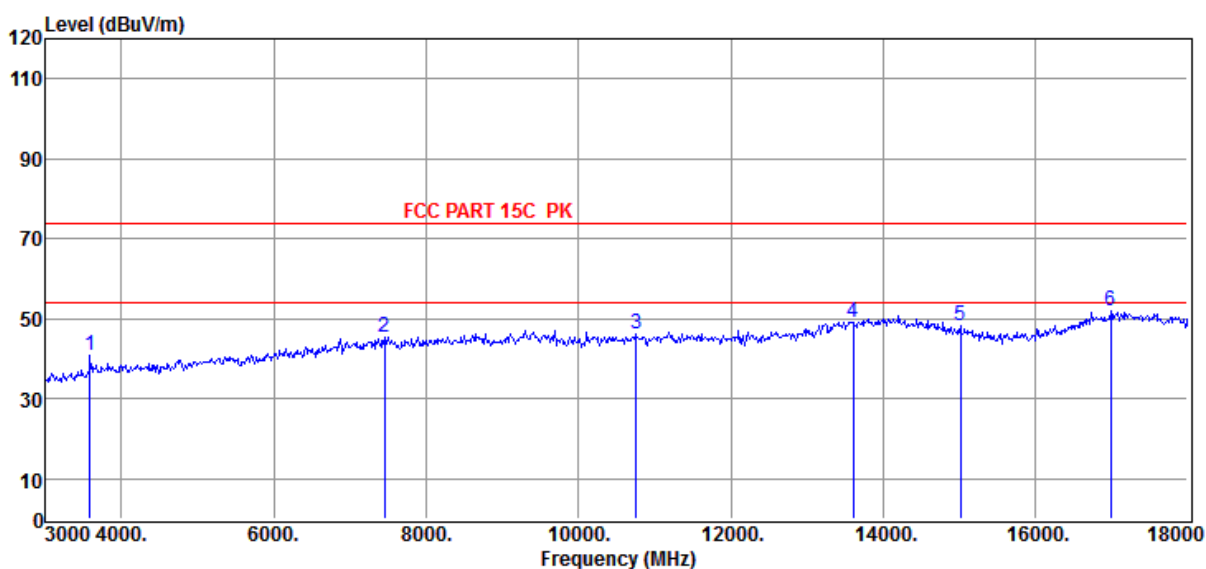

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 3585.00        | 42.59                   | 30.60                       | -32.26              | 40.93                       | 74.00                     | -33.07                | Peak     | HORIZONTAL   |
| 2              | 7455.00        | 38.71                   | 37.33                       | -30.82              | 45.22                       | 74.00                     | -28.78                | Peak     | HORIZONTAL   |
| 3              | 10755.00       | 36.77                   | 38.60                       | -29.20              | 46.17                       | 74.00                     | -27.83                | Peak     | HORIZONTAL   |
| 4              | 13605.00       | 37.77                   | 40.61                       | -29.13              | 49.25                       | 74.00                     | -24.75                | Peak     | HORIZONTAL   |
| 5              | 15015.00       | 36.50                   | 38.98                       | -27.28              | 48.20                       | 74.00                     | -25.80                | Peak     | HORIZONTAL   |
| 6              | 16995.00       | 35.57                   | 42.18                       | -25.93              | 51.82                       | 74.00                     | -22.18                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.



# Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-22-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11N20 MCS0 ANT1 2462MHz

Data: 81

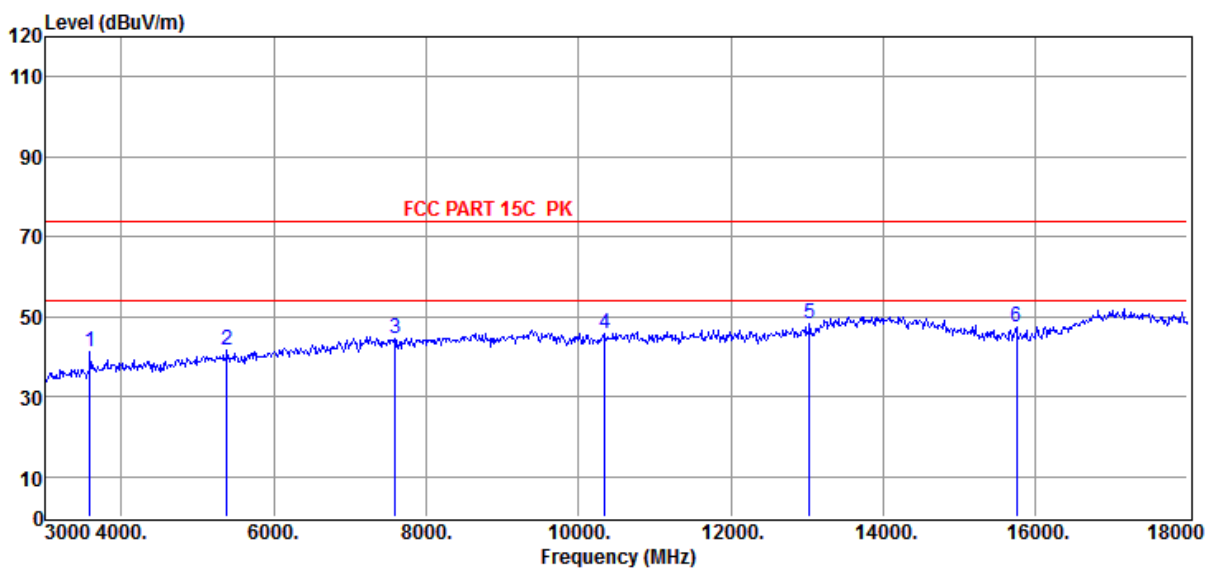

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 3585.00        | 42.95                   | 30.60                       | -32.26              | 41.29                       | 74.00                     | -32.71                | Peak     | HORIZONTAL   |
| 2              | 5385.00        | 39.70                   | 33.59                       | -31.68              | 41.61                       | 74.00                     | -32.39                | Peak     | HORIZONTAL   |
| 3              | 7590.00        | 38.22                   | 37.33                       | -30.90              | 44.65                       | 74.00                     | -29.35                | Peak     | HORIZONTAL   |
| 4              | 10350.00       | 37.09                   | 38.44                       | -29.71              | 45.82                       | 74.00                     | -28.18                | Peak     | HORIZONTAL   |
| 5              | 13035.00       | 38.14                   | 39.56                       | -29.48              | 48.22                       | 74.00                     | -25.78                | Peak     | HORIZONTAL   |
| 6              | 15750.00       | 36.56                   | 38.35                       | -27.60              | 47.31                       | 74.00                     | -26.69                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-22-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11N20 MCS0 ANT1 2462MHz

Data: 82

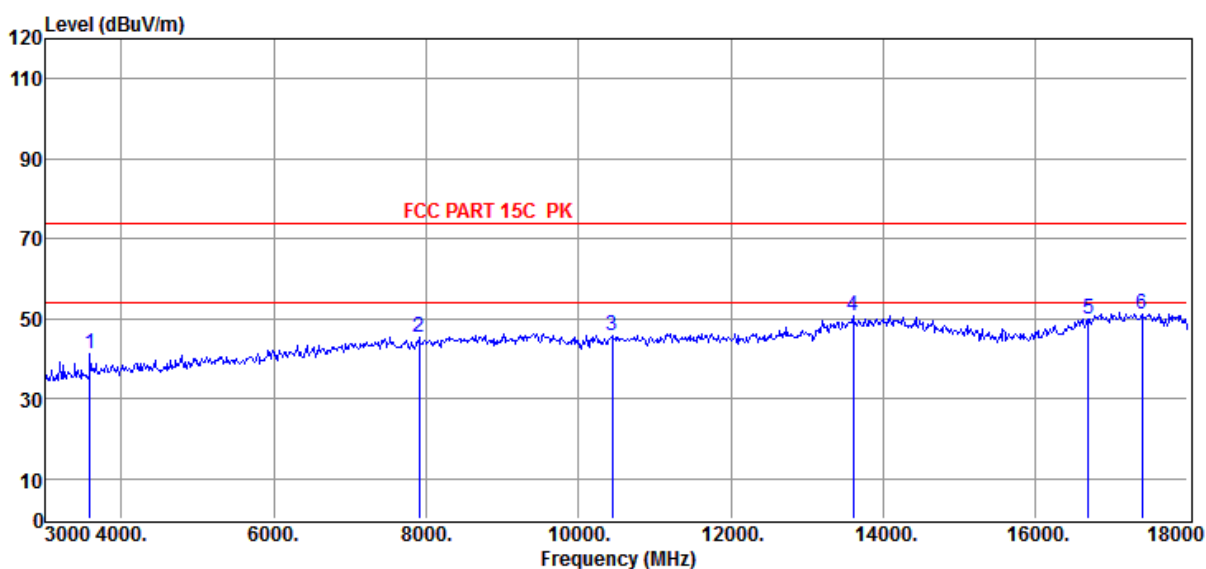

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 3585.00        | 42.85                   | 30.60                       | -32.26              | 41.19                       | 74.00                     | -32.81                | Peak     | VERTICAL     |
| 2              | 7905.00        | 39.47                   | 37.08                       | -31.22              | 45.33                       | 74.00                     | -28.67                | Peak     | VERTICAL     |
| 3              | 10440.00       | 36.96                   | 38.48                       | -29.60              | 45.84                       | 74.00                     | -28.16                | Peak     | VERTICAL     |
| 4              | 13605.00       | 39.36                   | 40.61                       | -29.13              | 50.84                       | 74.00                     | -23.16                | Peak     | VERTICAL     |
| 5              | 16695.00       | 35.88                   | 40.74                       | -26.54              | 50.08                       | 74.00                     | -23.92                | Peak     | VERTICAL     |
| 6              | 17400.00       | 35.62                   | 42.76                       | -27.17              | 51.21                       | 74.00                     | -22.79                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-22-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11N20 MCS0 ANT2 2462MHz

Data: 83

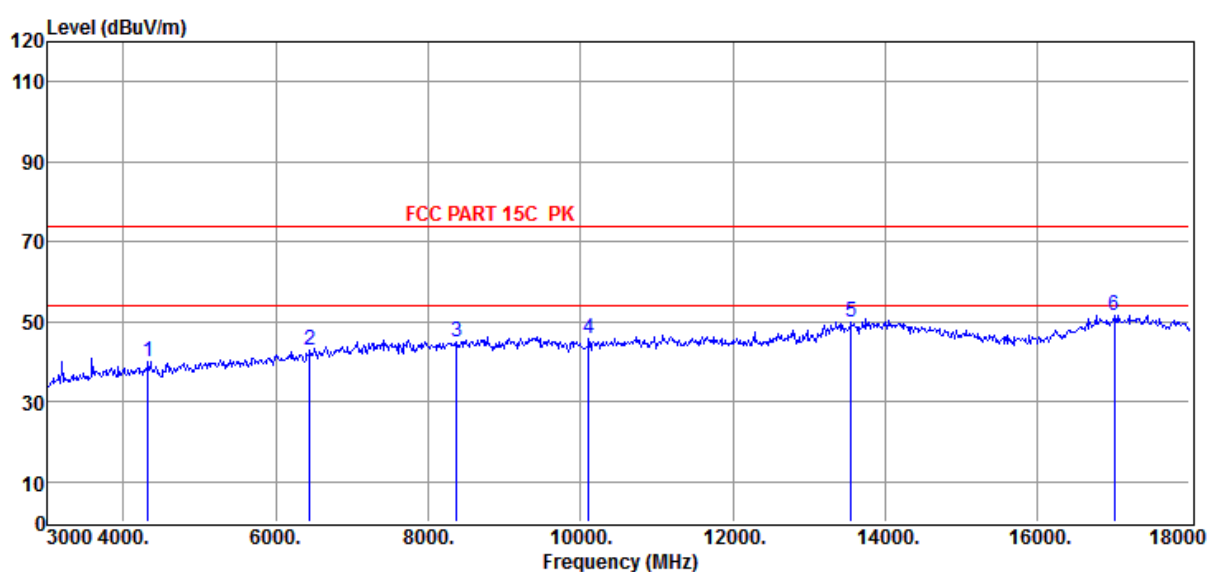

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 4320.00        | 40.19                   | 31.79                       | -32.03              | 39.95                       | 74.00                     | -34.05                | Peak     | VERTICAL     |
| 2              | 6450.00        | 38.77                   | 35.75                       | -31.74              | 42.78                       | 74.00                     | -31.22                | Peak     | VERTICAL     |
| 3              | 8370.00        | 38.96                   | 37.30                       | -31.15              | 45.11                       | 74.00                     | -28.89                | Peak     | VERTICAL     |
| 4              | 10110.00       | 36.99                   | 38.34                       | -29.69              | 45.64                       | 74.00                     | -28.36                | Peak     | VERTICAL     |
| 5              | 13560.00       | 38.55                   | 40.52                       | -29.11              | 49.96                       | 74.00                     | -24.04                | Peak     | VERTICAL     |
| 6              | 17010.00       | 35.32                   | 42.21                       | -25.97              | 51.56                       | 74.00                     | -22.44                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-22-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11N20 MCS0 ANT2 2462MHz

Data: 84

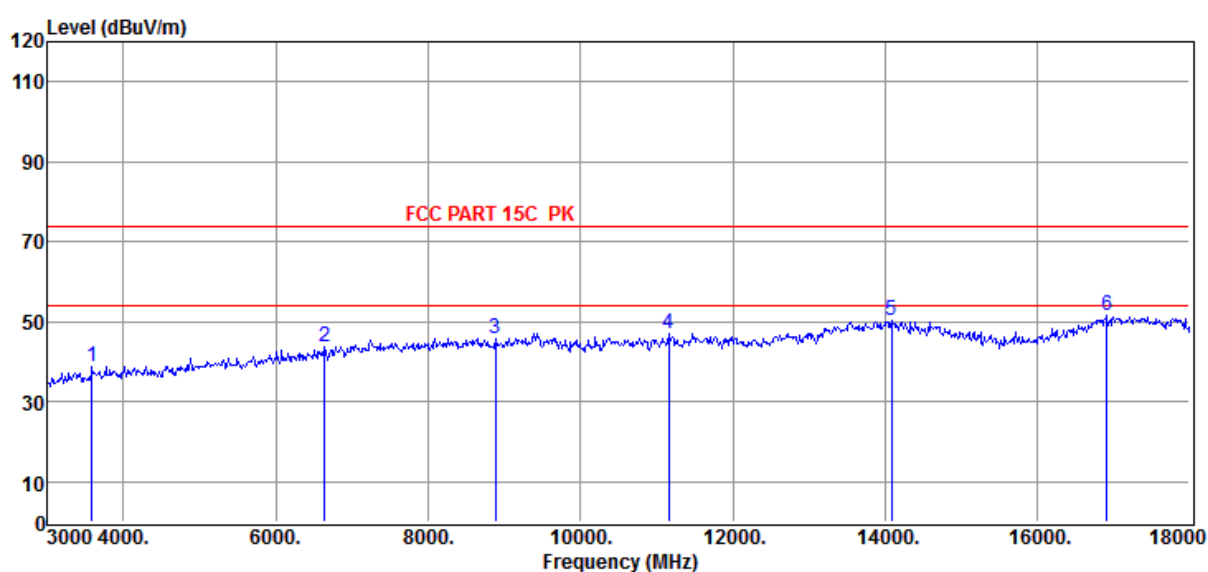

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 3585.00        | 40.51                   | 30.60                       | -32.26              | 38.85                       | 74.00                     | -35.15                | Peak     | HORIZONTAL   |
| 2              | 6645.00        | 38.66                   | 36.03                       | -31.17              | 43.52                       | 74.00                     | -30.48                | Peak     | HORIZONTAL   |
| 3              | 8880.00        | 39.31                   | 37.63                       | -31.15              | 45.79                       | 74.00                     | -28.21                | Peak     | HORIZONTAL   |
| 4              | 11160.00       | 36.81                   | 38.70                       | -28.46              | 47.05                       | 74.00                     | -26.95                | Peak     | HORIZONTAL   |
| 5              | 14085.00       | 37.39                   | 41.28                       | -28.22              | 50.45                       | 74.00                     | -23.55                | Peak     | HORIZONTAL   |
| 6              | 16920.00       | 36.38                   | 41.82                       | -26.65              | 51.55                       | 74.00                     | -22.45                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## 9. Radiated Band Edge Compliance

### 9.1. Block diagram of test setup

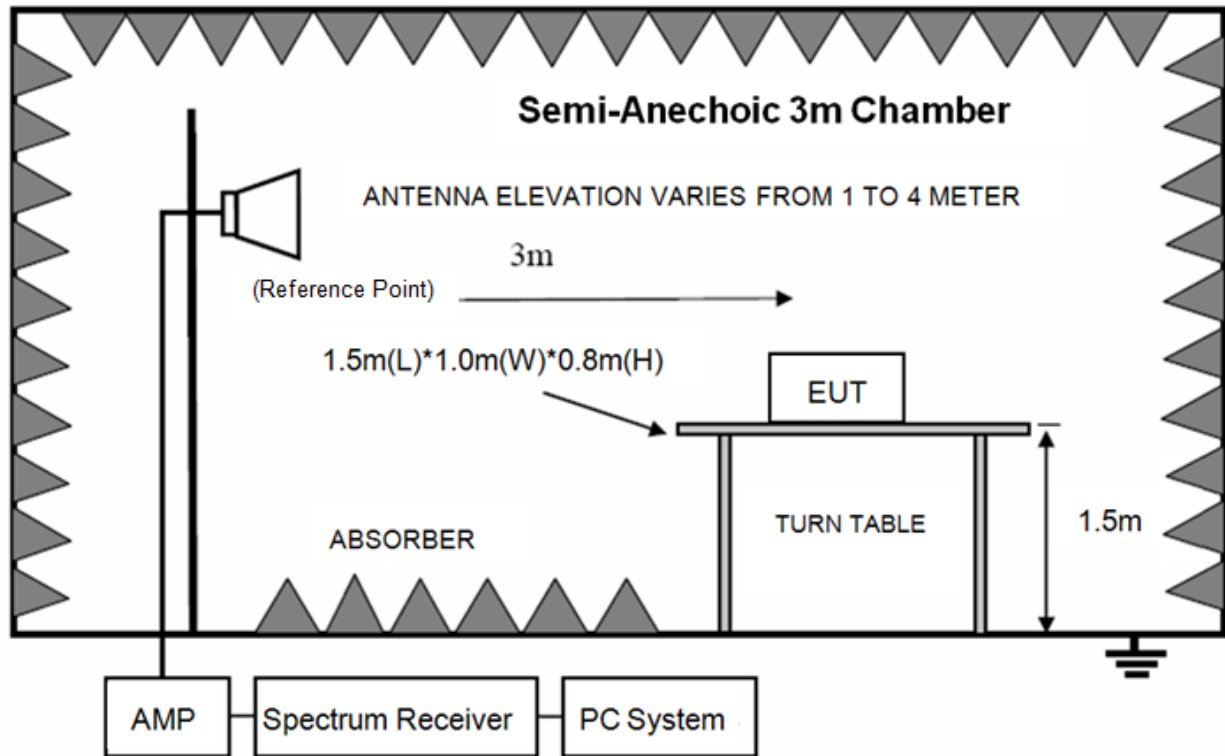

### 9.2. Limit

All restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400 MHz to 2483.5 MHz shall be at least 20dB below the fundamental emissions or comply with RSS-Gen Issue 3 clause 7.2.5 (Same as FCC 15.209) limits.

### 9.3. Test procedure

Same with clause 8.3 except change investigated frequency range.  
Remark: All restriction band have been tested, and shown in report.

### 9.4. Test result

**Pass. (See below detailed test result)**

Note: All modes were test and the worst case was record in this report.

# Radiated Emission Test Result

**Test Site** : 10m Chamber

**Test Date** : 07-22-2022

**Tested By** : Sunny

**EUT** : BASE STATION


**Model Number** : WVODB1

**Power Supply** : AC 120V/60Hz

**Test Mode** : Tx mode

**Memo** : 11B 11M ANT1 2412MHz

Data: 42

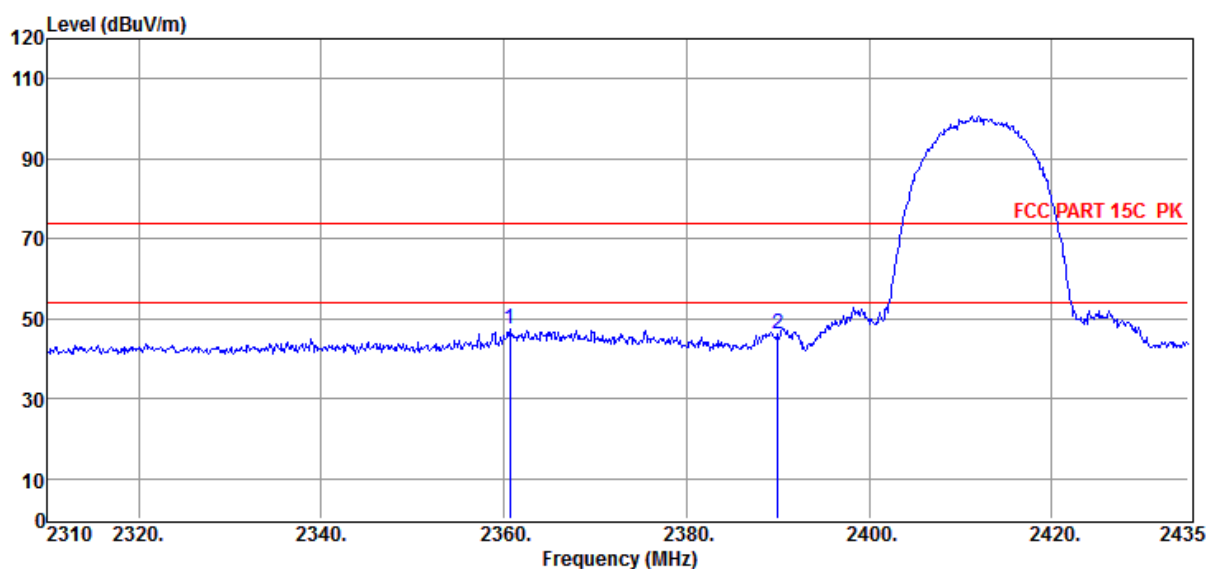

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2360.63        | 53.42                   | 28.10                       | -33.98              | 47.54                       | 74.00                     | -26.46                | Peak     | HORIZONTAL   |
| 2              | 2390.00        | 52.32                   | 28.05                       | -34.02              | 46.35                       | 74.00                     | -27.65                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.



## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-22-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11B 11M ANT1 2412MHz

Data: 43

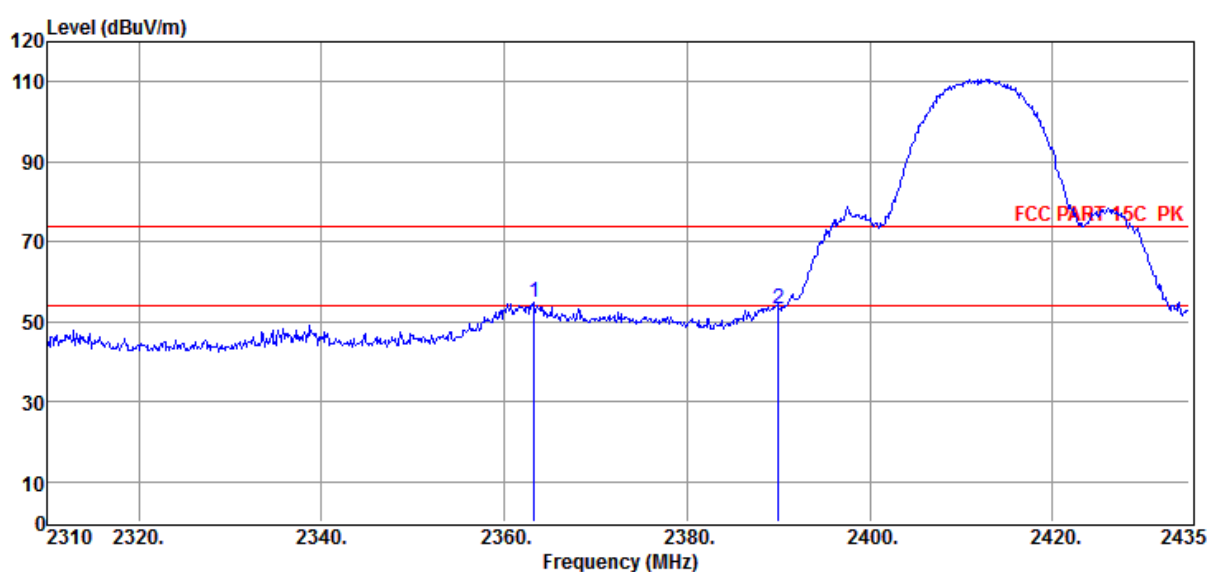

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2363.25        | 60.64                   | 28.09                       | -33.98              | 54.75                       | 74.00                     | -19.25                | Peak     | VERTICAL     |
| 2              | 2390.00        | 59.26                   | 28.05                       | -34.02              | 53.29                       | 74.00                     | -20.71                | Peak     | VERTICAL     |

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Margin = Result Level - Limit.

# Radiated Emission Test Result

**Test Site** : 10m Chamber

**Test Date** : 07-22-2022

**Tested By** : Sunny

**EUT** : BASE STATION


**Model Number** : WVODB1

**Power Supply** : AC 120V/60Hz

**Test Mode** : Tx mode

**Memo** : 11B 11M ANT2 2412MHz

Data: 44

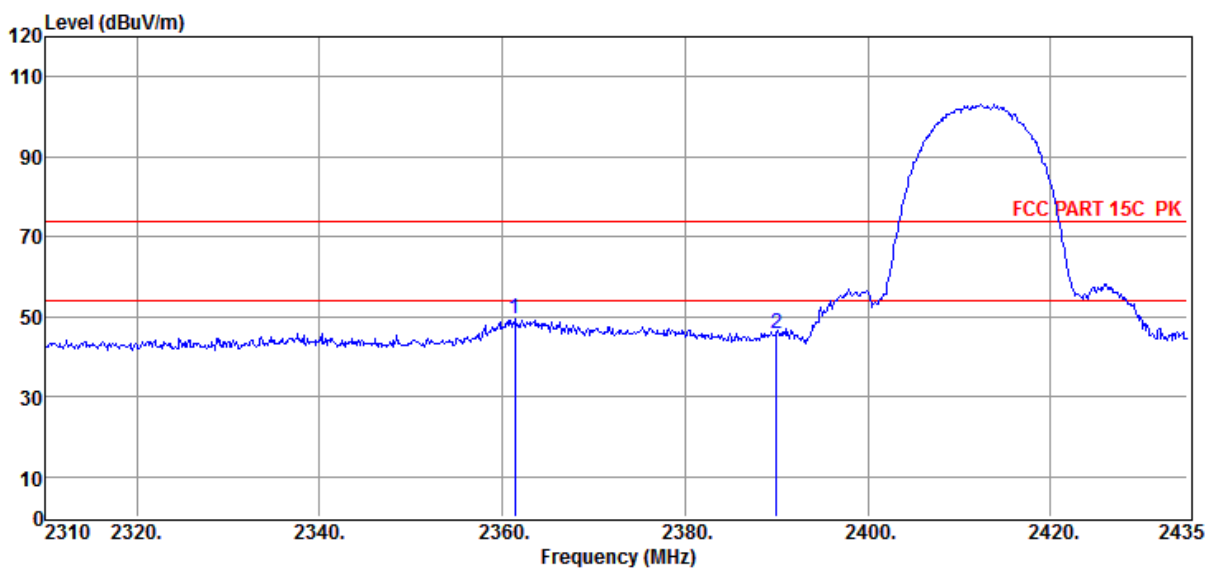

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2361.38        | 55.31                   | 28.09                       | -33.98              | 49.42                       | 74.00                     | -24.58                | Peak     | HORIZONTAL   |
| 2              | 2390.00        | 51.61                   | 28.05                       | -34.02              | 45.64                       | 74.00                     | -28.36                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-22-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11B 11M ANT2 2412MHz

Data: 45

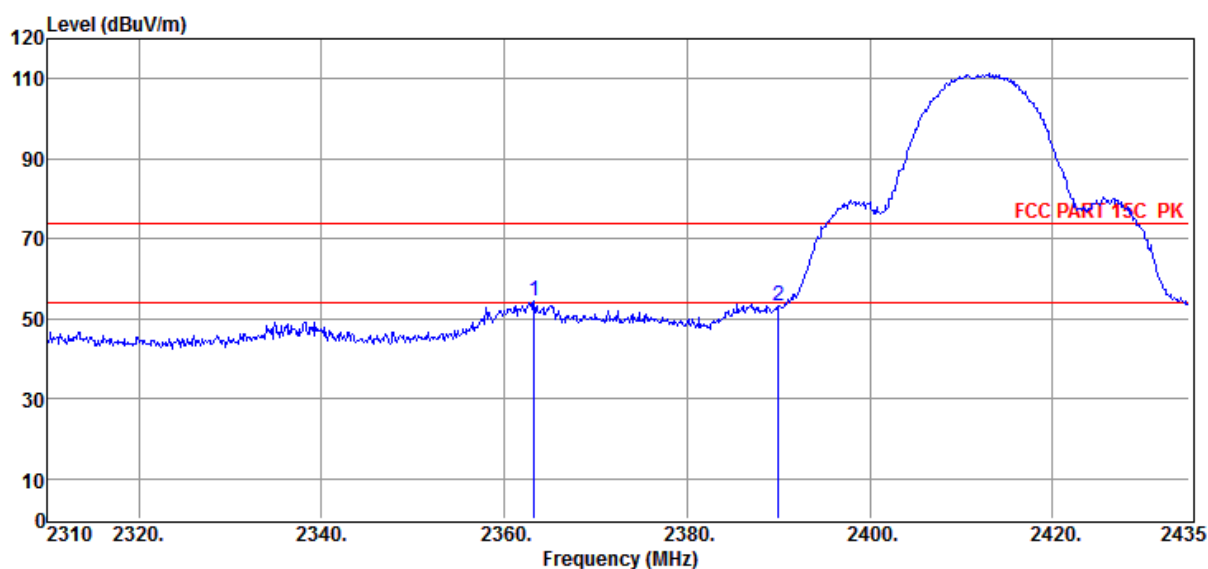

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2363.25        | 60.19                   | 28.09                       | -33.98              | 54.30                       | 74.00                     | -19.70                | Peak     | VERTICAL     |
| 2              | 2390.00        | 58.99                   | 28.05                       | -34.02              | 53.02                       | 74.00                     | -20.98                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-22-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11B 11M ANT1 2462MHz

Data: 46

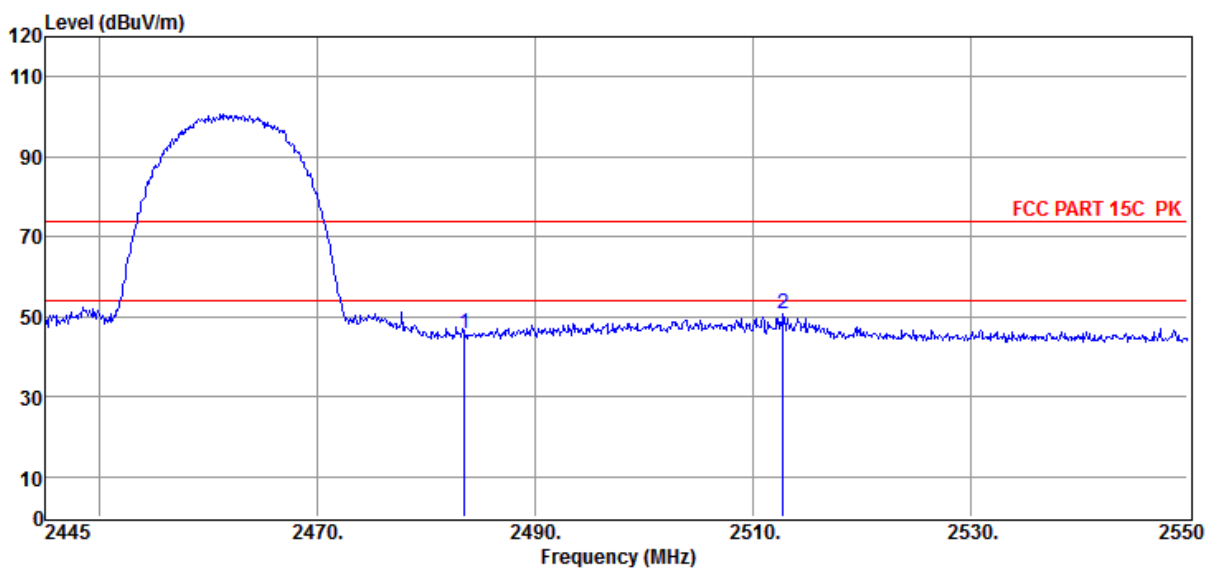

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2483.50        | 51.81                   | 27.92                       | -33.79              | 45.94                       | 74.00                     | -28.06                | Peak     | HORIZONTAL   |
| 2              | 2512.83        | 56.49                   | 27.93                       | -33.53              | 50.89                       | 74.00                     | -23.11                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-22-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11B 11M ANT1 2462MHz

Data: 47

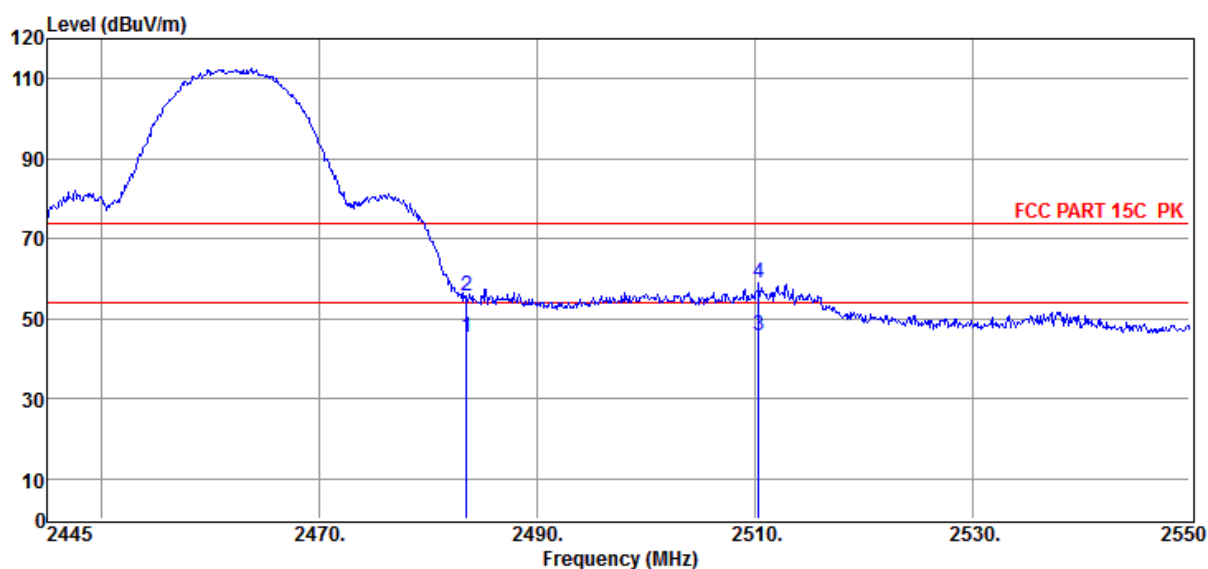

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2483.50        | 51.30                   | 27.92                       | -33.79              | 45.43                       | 54.00                     | -8.57                 | Average  | VERTICAL     |
| 2              | 2483.50        | 61.57                   | 27.92                       | -33.79              | 55.70                       | 74.00                     | -18.30                | Peak     | VERTICAL     |
| 3              | 2510.42        | 51.35                   | 27.93                       | -33.53              | 45.75                       | 54.00                     | -8.25                 | Average  | VERTICAL     |
| 4              | 2510.42        | 64.39                   | 27.93                       | -33.53              | 58.79                       | 74.00                     | -15.21                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-22-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11B 11M ANT2 2462MHz

Data: 48

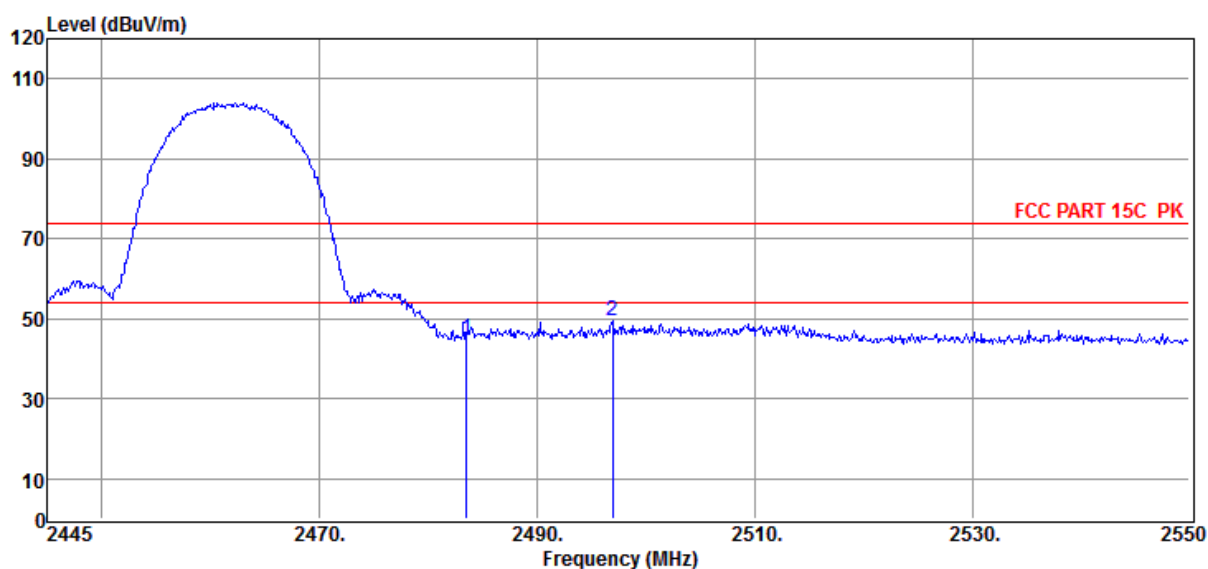

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2483.50        | 50.79                   | 27.92                       | -33.79              | 44.92                       | 74.00                     | -29.08                | Peak     | HORIZONTAL   |
| 2              | 2496.98        | 55.08                   | 27.90                       | -33.58              | 49.40                       | 74.00                     | -24.60                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.



## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-22-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11B 11M ANT2 2462MHz

Data: 49

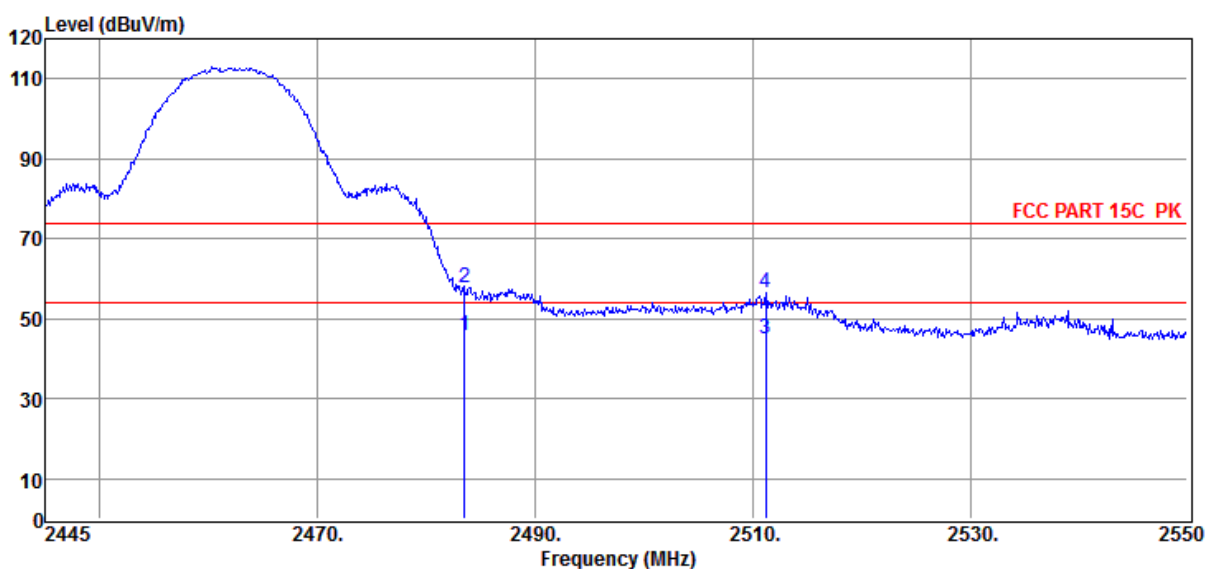

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2483.50        | 51.67                   | 27.92                       | -33.79              | 45.80                       | 54.00                     | -8.20                 | Average  | VERTICAL     |
| 2              | 2483.50        | 63.56                   | 27.92                       | -33.79              | 57.69                       | 74.00                     | -16.31                | Peak     | VERTICAL     |
| 3              | 2511.26        | 50.41                   | 27.93                       | -33.53              | 44.81                       | 54.00                     | -9.19                 | Average  | VERTICAL     |
| 4              | 2511.26        | 61.93                   | 27.93                       | -33.53              | 56.33                       | 74.00                     | -17.67                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

**Test Site** : 10m Chamber

**Test Date** : 07-26-2022

**Tested By** : Sunny

**EUT** : BASE STATION


**Model Number** : WVODB1

**Power Supply** : AC 120V/60Hz

**Test Mode** : Tx mode

**Memo** : 11G 6M ANT1 2412MHz

Data: 147

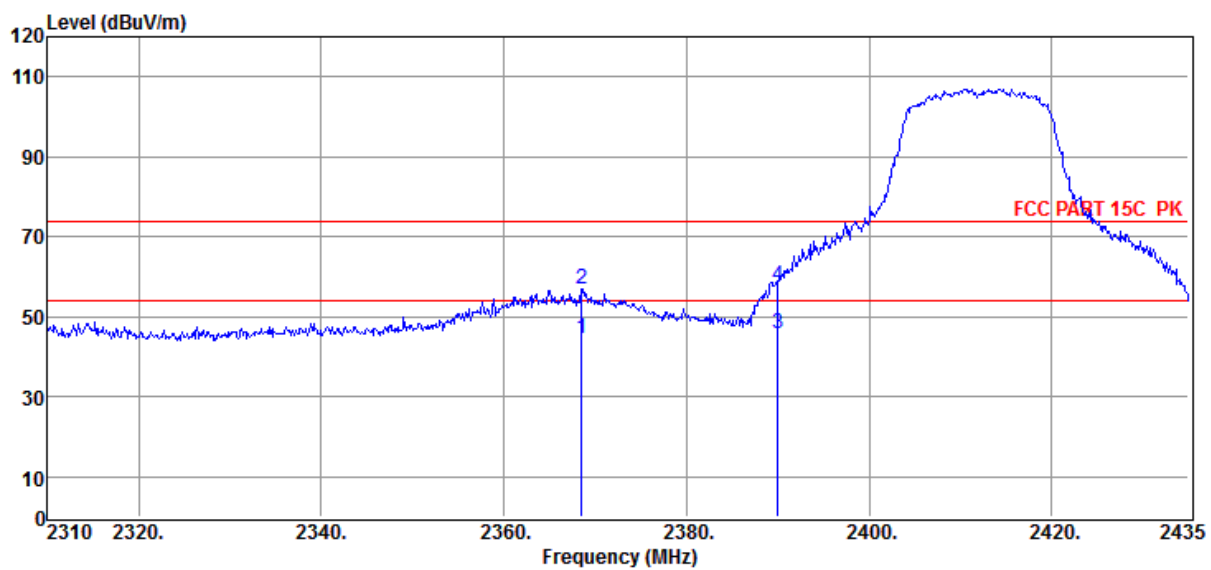

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2368.50        | 50.58                   | 28.08                       | -33.98              | 44.68                       | 54.00                     | -9.32                 | Average  | VERTICAL     |
| 2              | 2368.50        | 62.94                   | 28.08                       | -33.98              | 57.04                       | 74.00                     | -16.96                | Peak     | VERTICAL     |
| 3              | 2390.00        | 51.62                   | 28.05                       | -34.02              | 45.65                       | 54.00                     | -8.35                 | Average  | VERTICAL     |
| 4              | 2390.00        | 63.77                   | 28.05                       | -34.02              | 57.80                       | 74.00                     | -16.20                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-26-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11G 6M ANT1 2412MHz

Data: 148

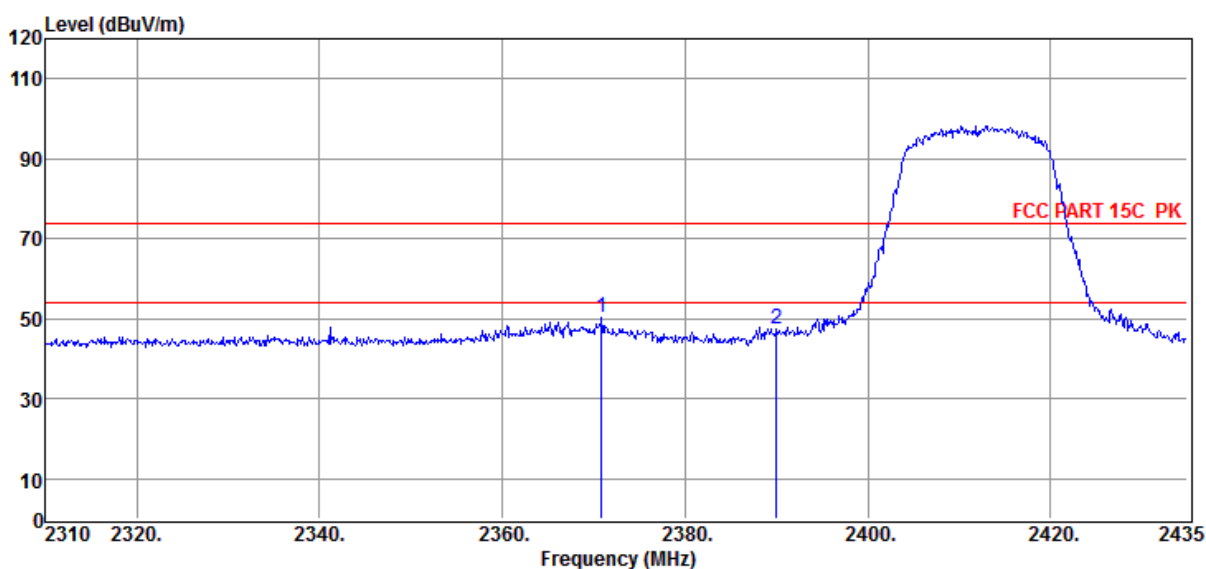

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2370.88        | 56.15                   | 28.08                       | -33.99              | 50.24                       | 74.00                     | -23.76                | Peak     | HORIZONTAL   |
| 2              | 2390.00        | 53.30                   | 28.05                       | -34.02              | 47.33                       | 74.00                     | -26.67                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-26-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11G 6M ANT2 2412MHz

Data: 149

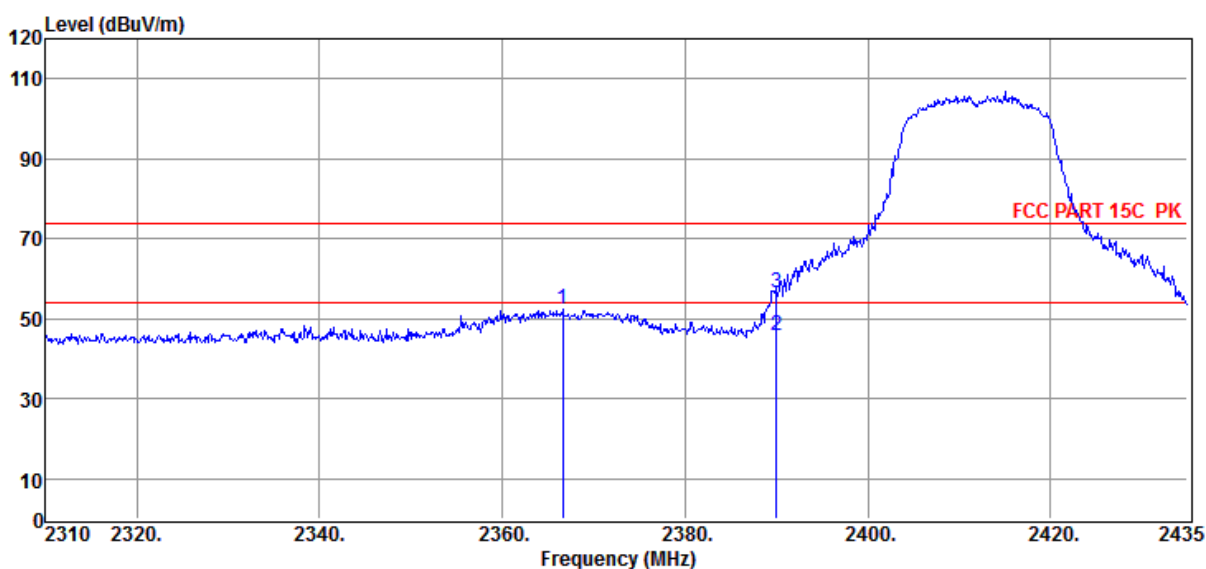

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2366.63        | 58.31                   | 28.09                       | -33.98              | 52.42                       | 74.00                     | -21.58                | Peak     | VERTICAL     |
| 2              | 2390.00        | 51.78                   | 28.05                       | -34.02              | 45.81                       | 54.00                     | -8.19                 | Average  | VERTICAL     |
| 3              | 2390.00        | 62.35                   | 28.05                       | -34.02              | 56.38                       | 74.00                     | -17.62                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-26-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11G 6M ANT2 2412MHz

Data: 150

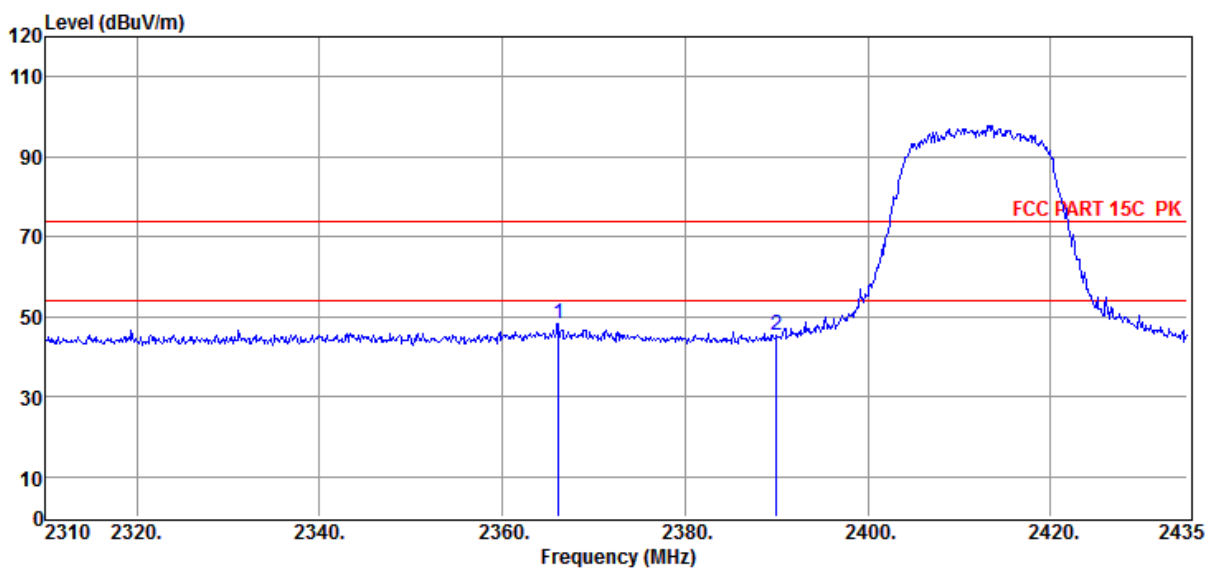

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2366.13        | 54.29                   | 28.09                       | -33.98              | 48.40                       | 74.00                     | -25.60                | Peak     | HORIZONTAL   |
| 2              | 2390.00        | 51.25                   | 28.05                       | -34.02              | 45.28                       | 74.00                     | -28.72                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-26-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11G 6M ANT2 2462MHz

Data: 151

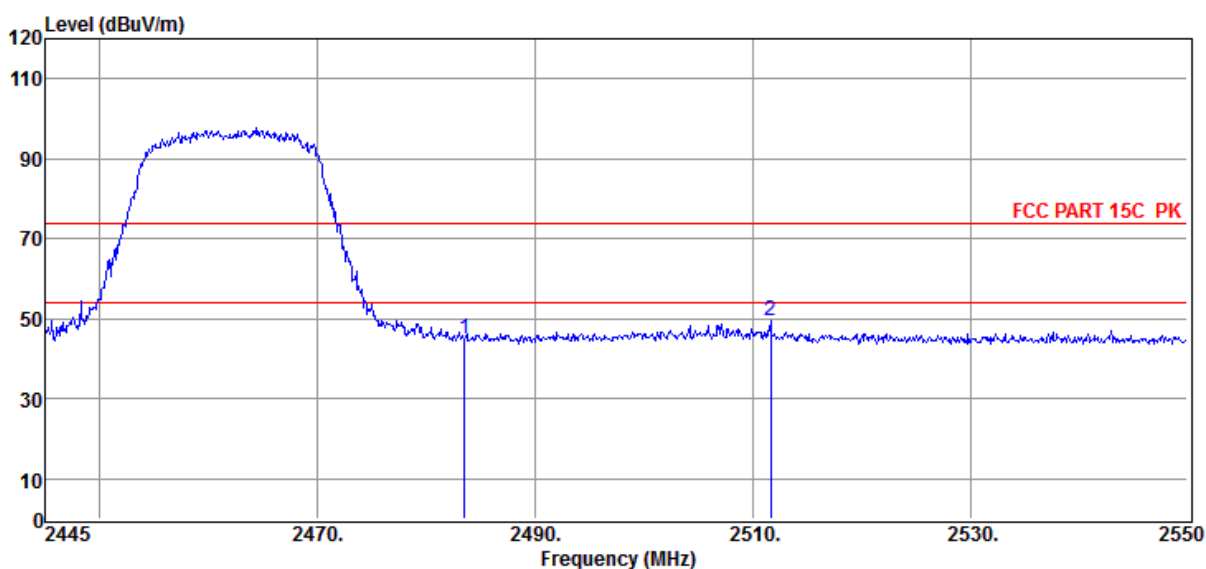

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2483.50        | 50.90                   | 27.92                       | -33.79              | 45.03                       | 74.00                     | -28.97                | Peak     | HORIZONTAL   |
| 2              | 2511.68        | 55.15                   | 27.93                       | -33.53              | 49.55                       | 74.00                     | -24.45                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.



## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-26-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11G 6M ANT2 2462MHz

Data: 152

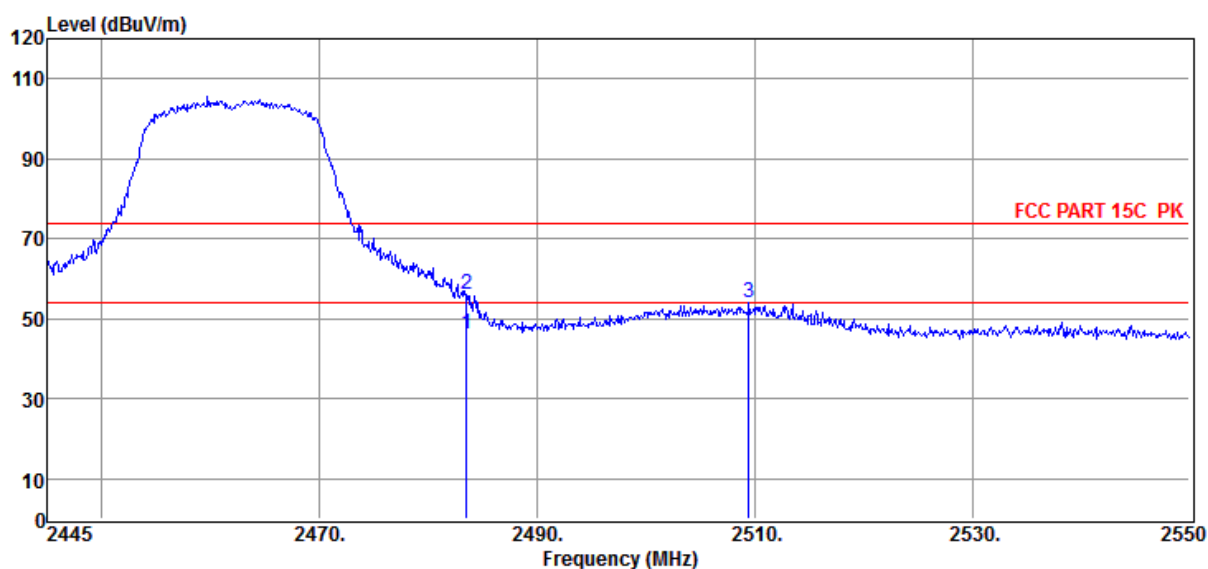

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2483.50        | 52.25                   | 27.92                       | -33.79              | 46.38                       | 54.00                     | -7.62                 | Average  | VERTICAL     |
| 2              | 2483.50        | 61.75                   | 27.92                       | -33.79              | 55.88                       | 74.00                     | -18.12                | Peak     | VERTICAL     |
| 3              | 2509.47        | 59.80                   | 27.92                       | -33.53              | 54.19                       | 74.00                     | -19.81                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-26-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11G 6M ANT1 2462MHz

Data: 153

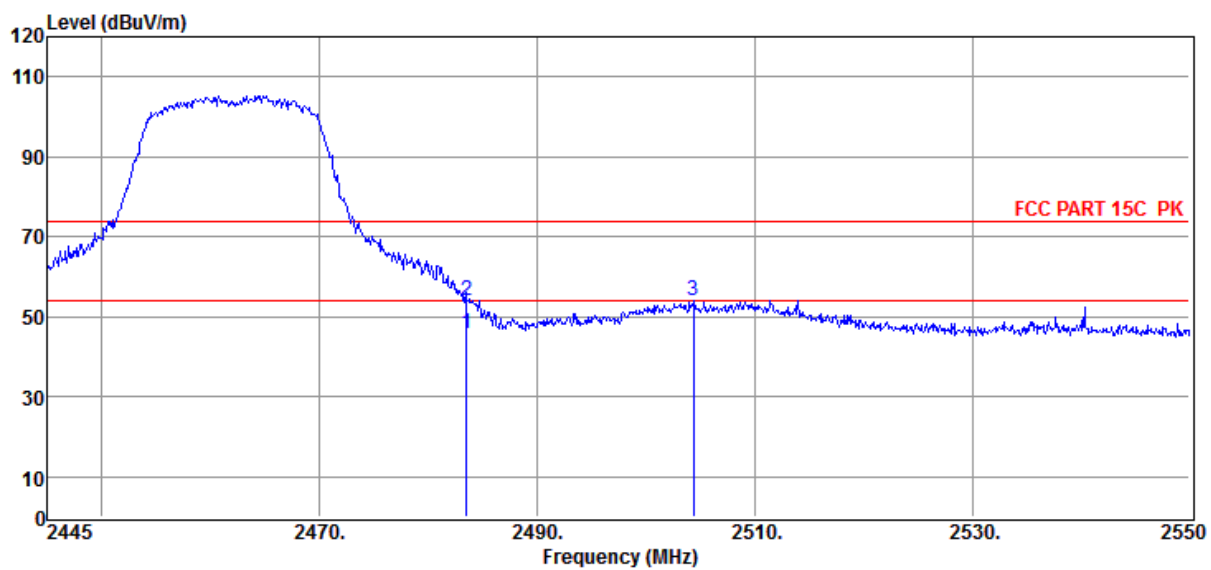

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2483.50        | 51.61                   | 27.92                       | -33.79              | 45.74                       | 54.00                     | -8.26                 | Average  | VERTICAL     |
| 2              | 2483.50        | 60.06                   | 27.92                       | -33.79              | 54.19                       | 74.00                     | -19.81                | Peak     | VERTICAL     |
| 3              | 2504.43        | 59.60                   | 27.91                       | -33.53              | 53.98                       | 74.00                     | -20.02                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

**Test Site** : 10m Chamber

**Test Date** : 07-26-2022

**Tested By** : Sunny

**EUT** : BASE STATION


**Model Number** : WVODB1

**Power Supply** : AC 120V/60Hz

**Test Mode** : Tx mode

**Memo** : 11G 6M ANT1 2462MHz

Data: 154

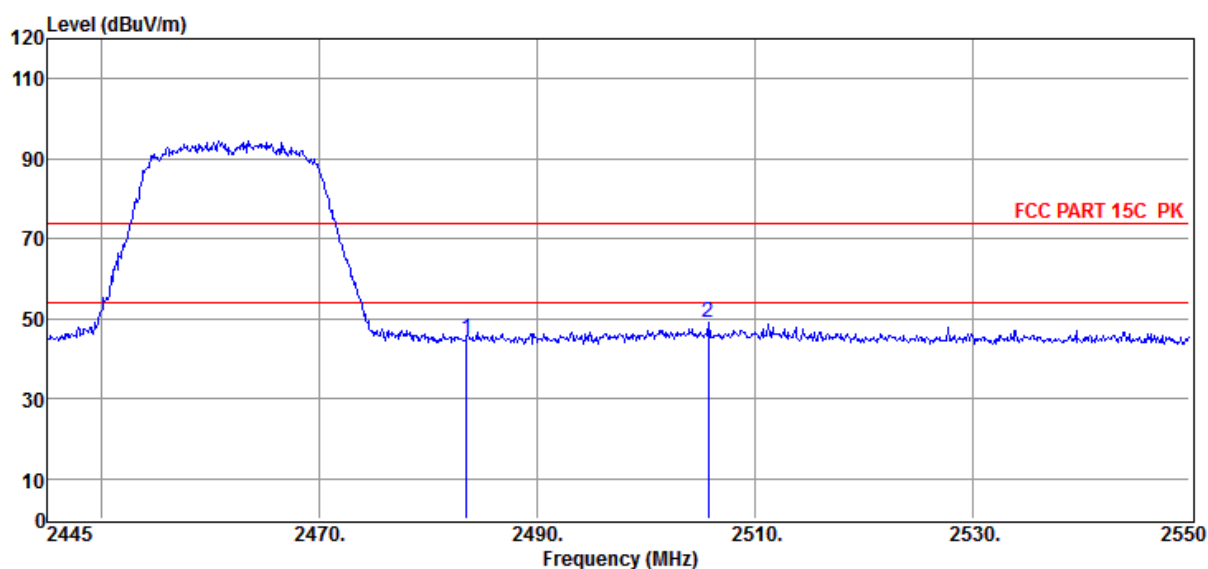

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2483.50        | 50.84                   | 27.92                       | -33.79              | 44.97                       | 74.00                     | -29.03                | Peak     | HORIZONTAL   |
| 2              | 2505.80        | 54.77                   | 27.92                       | -33.53              | 49.16                       | 74.00                     | -24.84                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-25-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11N20 MCS0 ANT1 2412MHz

Data: 50

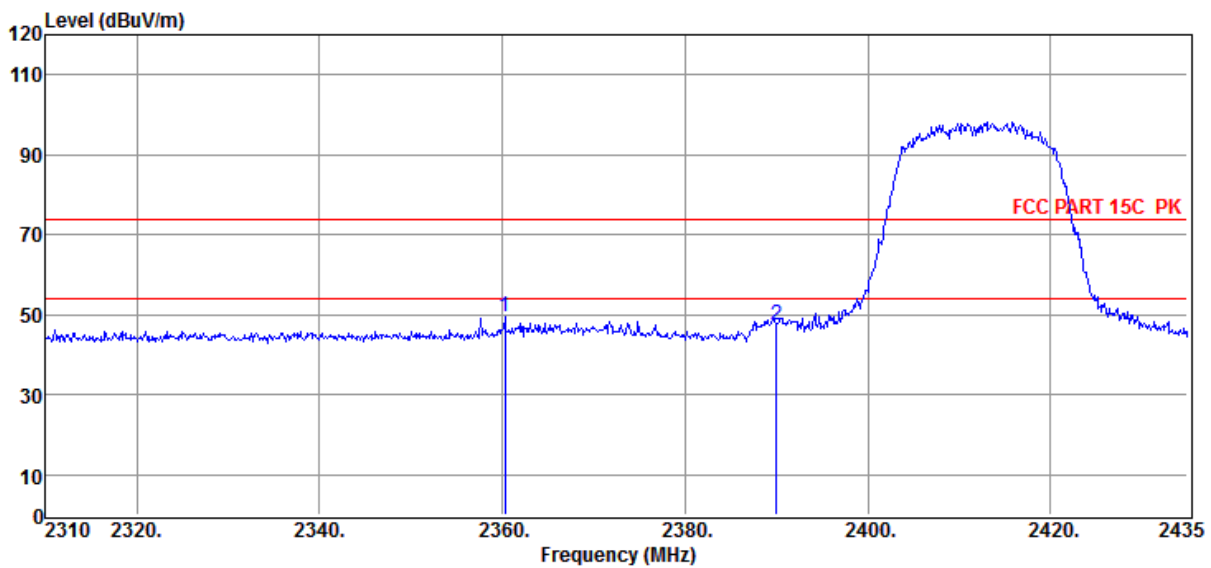

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2360.25        | 55.39                   | 28.10                       | -33.98              | 49.51                       | 74.00                     | -24.49                | Peak     | HORIZONTAL   |
| 2              | 2390.00        | 53.50                   | 28.05                       | -34.02              | 47.53                       | 74.00                     | -26.47                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-22-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11N20 MCS0 ANT1 2412MHz

Data: 51

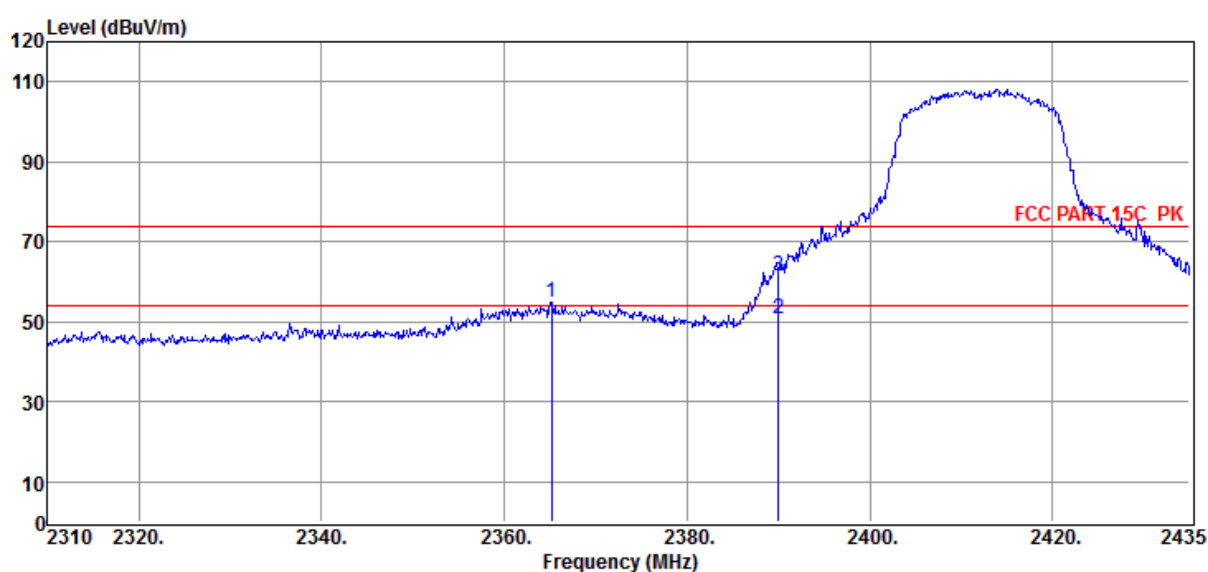

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2365.13        | 60.72                   | 28.09                       | -33.98              | 54.83                       | 74.00                     | -19.17                | Peak     | VERTICAL     |
| 2              | 2390.00        | 56.82                   | 28.05                       | -34.02              | 50.85                       | 54.00                     | -3.15                 | Average  | VERTICAL     |
| 3              | 2390.00        | 67.43                   | 28.05                       | -34.02              | 61.46                       | 74.00                     | -12.54                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

**Test Site** : 10m Chamber

**Test Date** : 07-22-2022

**Tested By** : Sunny

**EUT** : BASE STATION


**Model Number** : WVODB1

**Power Supply** : AC 120V/60Hz

**Test Mode** : Tx mode

**Memo** : 11N20 MCS0 ANT2 2412MHz

Data: 52

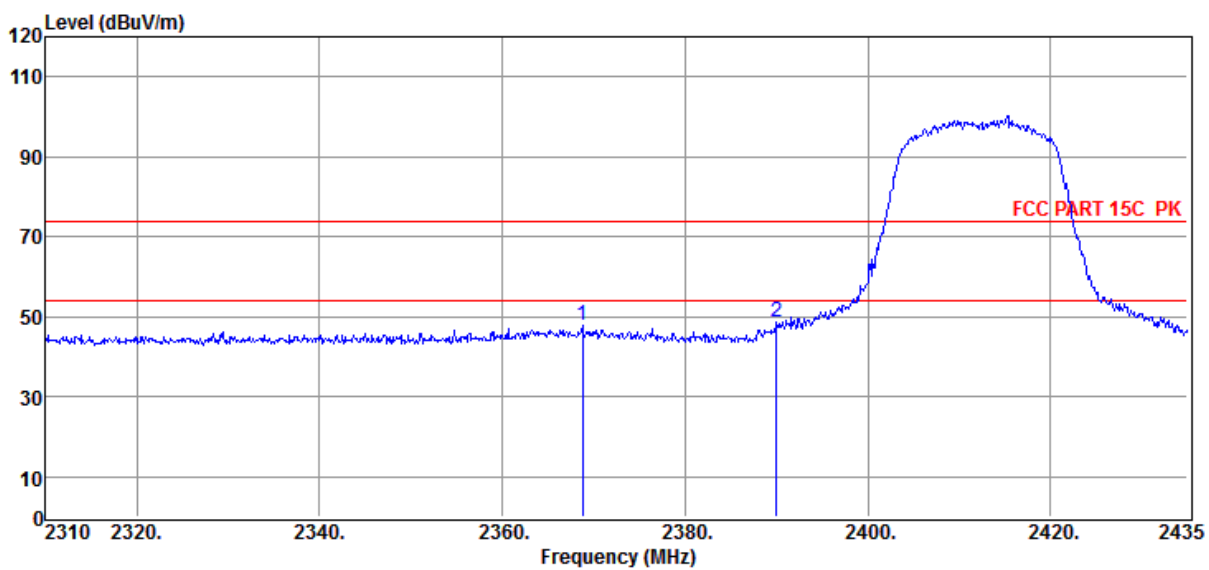

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2368.75        | 53.85                   | 28.08                       | -33.98              | 47.95                       | 74.00                     | -26.05                | Peak     | HORIZONTAL   |
| 2              | 2390.00        | 54.49                   | 28.05                       | -34.02              | 48.52                       | 74.00                     | -25.48                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.



# Radiated Emission Test Result

**Test Site** : 10m Chamber

**Test Date** : 07-22-2022

**Tested By** : Sunny

**EUT** : BASE STATION


**Model Number** : WVODB1

**Power Supply** : AC 120V/60Hz

**Test Mode** : Tx mode

**Memo** : 11N20 MCS0 ANT2 2412MHz

Data: 53

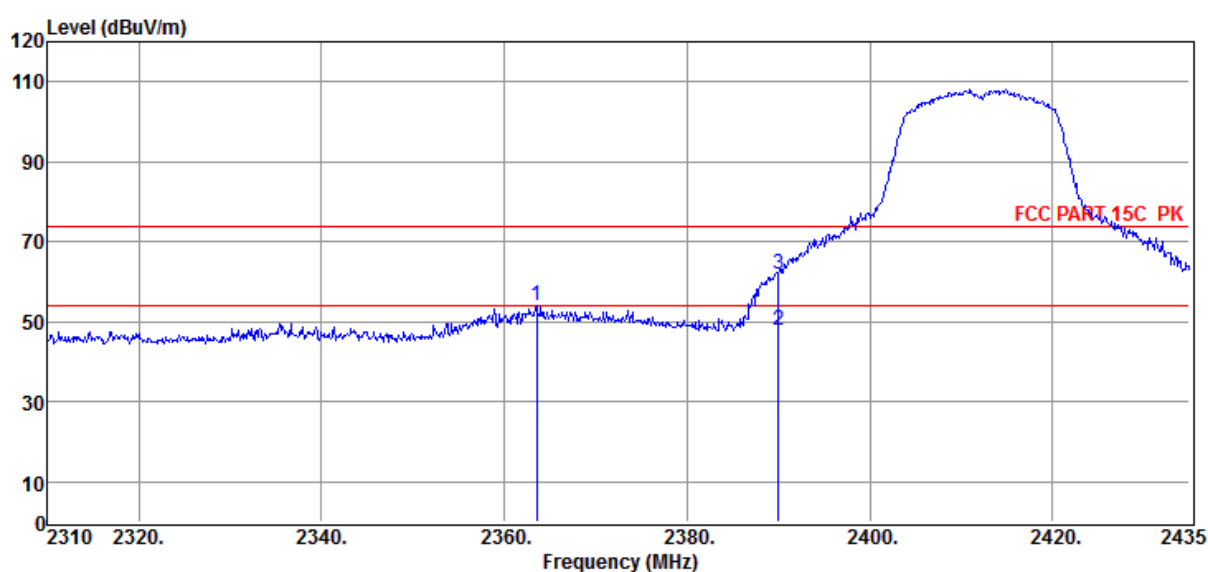

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2363.50        | 59.83                   | 28.09                       | -33.98              | 53.94                       | 74.00                     | -20.06                | Peak     | VERTICAL     |
| 2              | 2390.00        | 53.63                   | 28.05                       | -34.02              | 47.66                       | 54.00                     | -6.34                 | Average  | VERTICAL     |
| 3              | 2390.00        | 67.89                   | 28.05                       | -34.02              | 61.92                       | 74.00                     | -12.08                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-22-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11N20 MCS0 ANT1 2462MHz

Data: 54

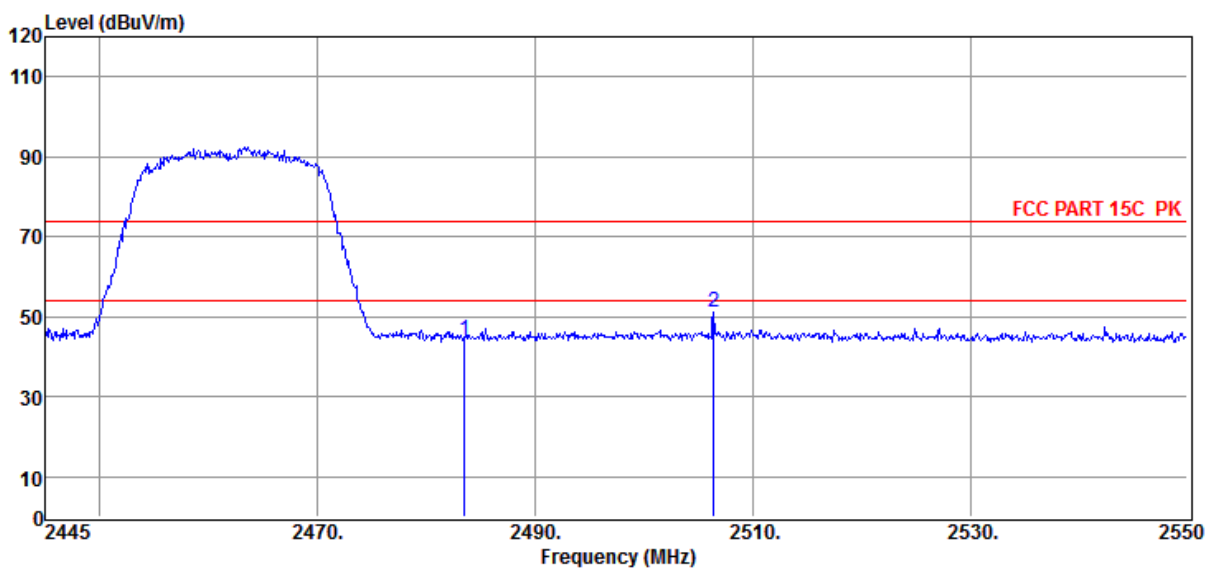

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2483.50        | 49.99                   | 27.92                       | -33.79              | 44.12                       | 74.00                     | -29.88                | Peak     | HORIZONTAL   |
| 2              | 2506.43        | 56.83                   | 27.92                       | -33.53              | 51.22                       | 74.00                     | -22.78                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

**Test Site** : 10m Chamber

**Test Date** : 07-22-2022

**Tested By** : Sunny

**EUT** : BASE STATION


**Model Number** : WVODB1

**Power Supply** : AC 120V/60Hz

**Test Mode** : Tx mode

**Memo** : 11N20 MCS0 ANT1 2462MHz

Data: 55

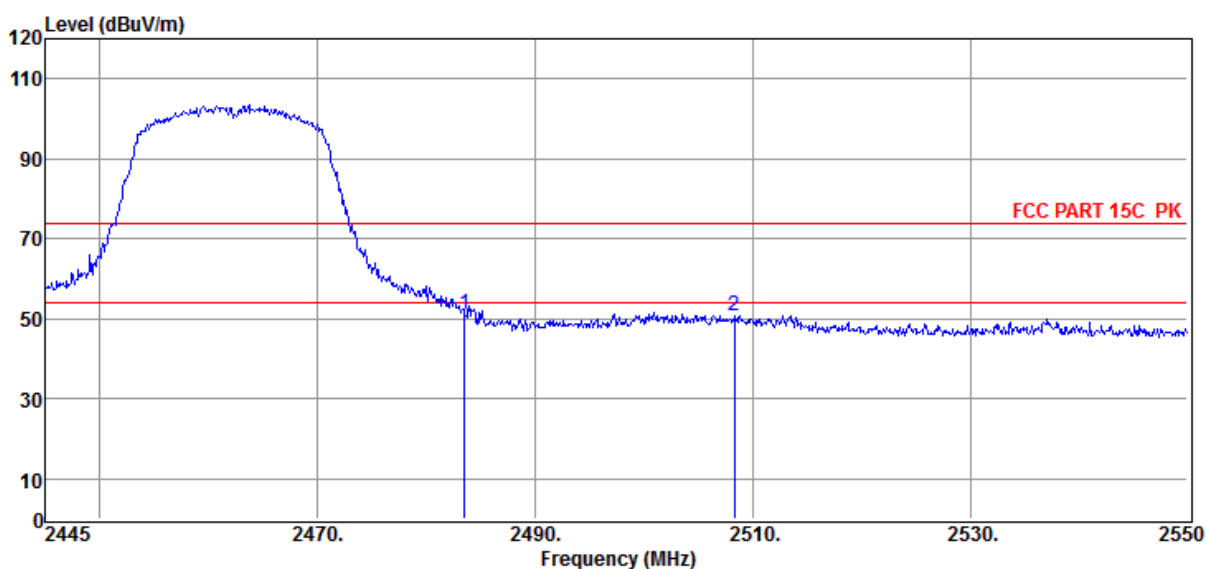

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2483.50        | 57.16                   | 27.92                       | -33.79              | 51.29                       | 74.00                     | -22.71                | Peak     | VERTICAL     |
| 2              | 2508.32        | 56.51                   | 27.92                       | -33.53              | 50.90                       | 74.00                     | -23.10                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-22-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11N20 MCS0 ANT2 2462MHz

Data: 56

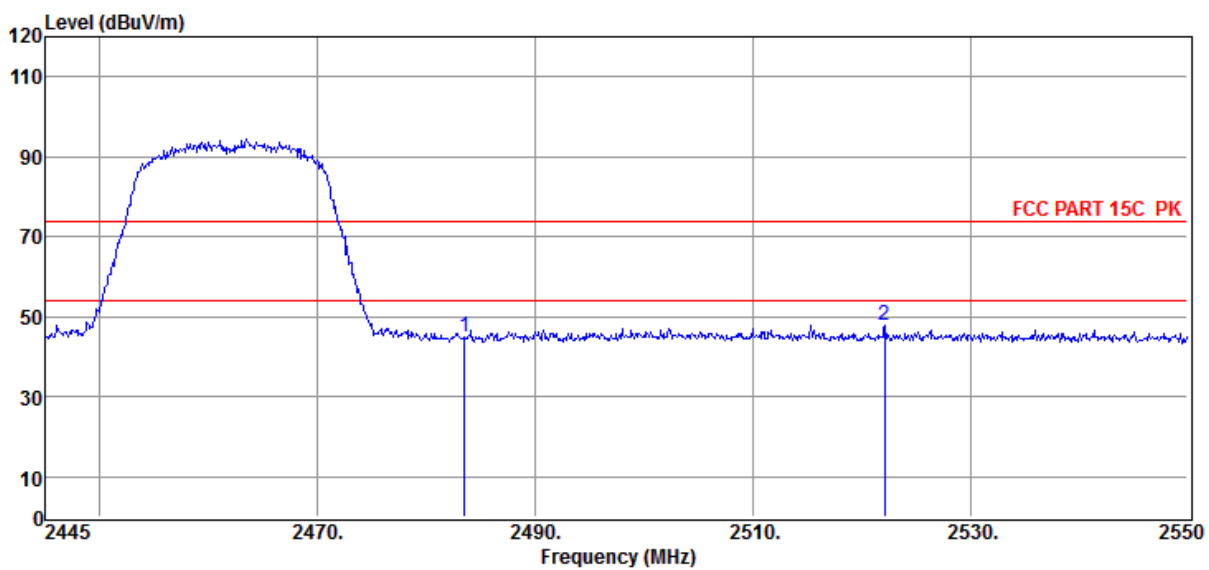

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2483.50        | 50.61                   | 27.92                       | -33.79              | 44.74                       | 74.00                     | -29.26                | Peak     | HORIZONTAL   |
| 2              | 2522.18        | 53.35                   | 27.96                       | -33.53              | 47.78                       | 74.00                     | -26.22                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 07-22-2022

Tested By : Sunny

EUT : BASE STATION


Model Number : WVODB1

Power Supply : AC 120V/60Hz

Test Mode : Tx mode

Memo : 11N20 MCS0 ANT2 2462MHz

Data: 57

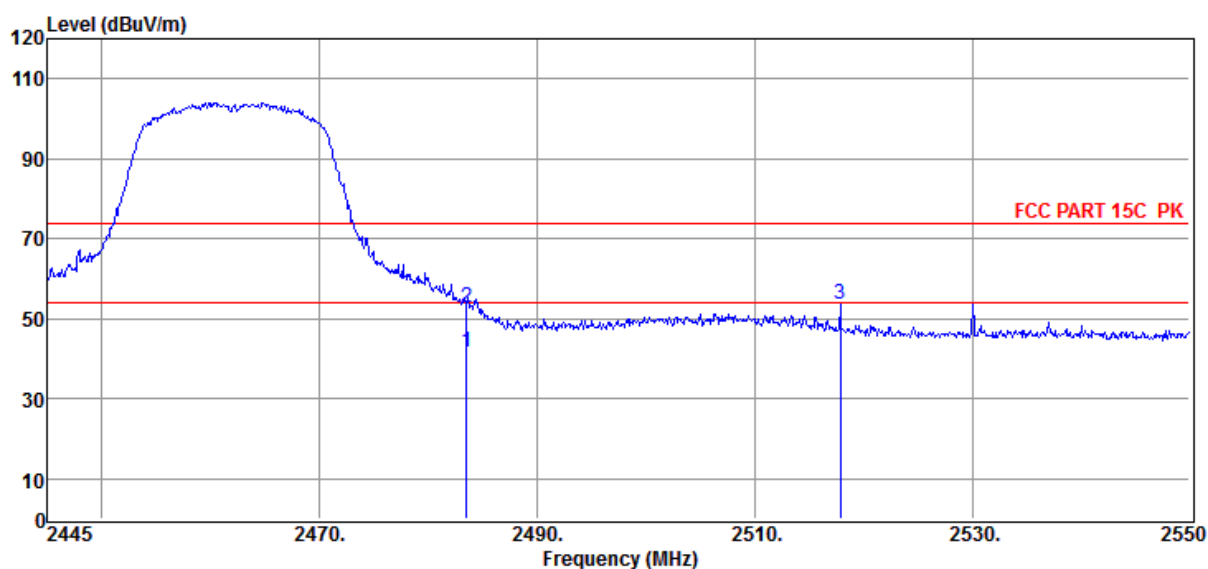

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2483.50        | 47.59                   | 27.92                       | -33.79              | 41.72                       | 54.00                     | -12.28                | Average  | VERTICAL     |
| 2              | 2483.50        | 58.64                   | 27.92                       | -33.79              | 52.77                       | 74.00                     | -21.23                | Peak     | VERTICAL     |
| 3              | 2517.87        | 59.28                   | 27.95                       | -33.53              | 53.70                       | 74.00                     | -20.30                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## 10. Power Line Conducted Emission

### 10.1. Block diagram of test setup

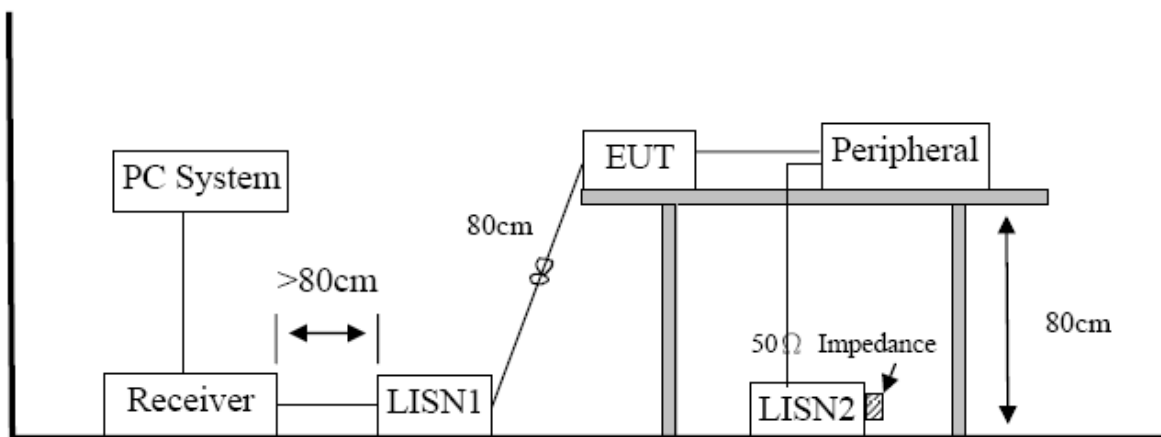

### 10.2. Power Line Conducted Emission Limits (Class B)

| Frequency         | Quasi-Peak Level<br>dB(μV) | Average Level<br>dB(μV) |
|-------------------|----------------------------|-------------------------|
| 150 kHz ~ 500 kHz | 66 ~ 56*                   | 56 ~ 46*                |
| 500 kHz ~ 5 MHz   | 56                         | 46                      |
| 5 MHz ~ 30 MHz    | 60                         | 50                      |

Note 1: \* Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

### 10.3. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.



A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.


The bandwidth of test receiver is set at 9 kHz.

#### **10.4. Test result**

**Pass. (See below detailed test result)**

Note1: All emissions not reported below are too low against the prescribed limits.

## Test Data

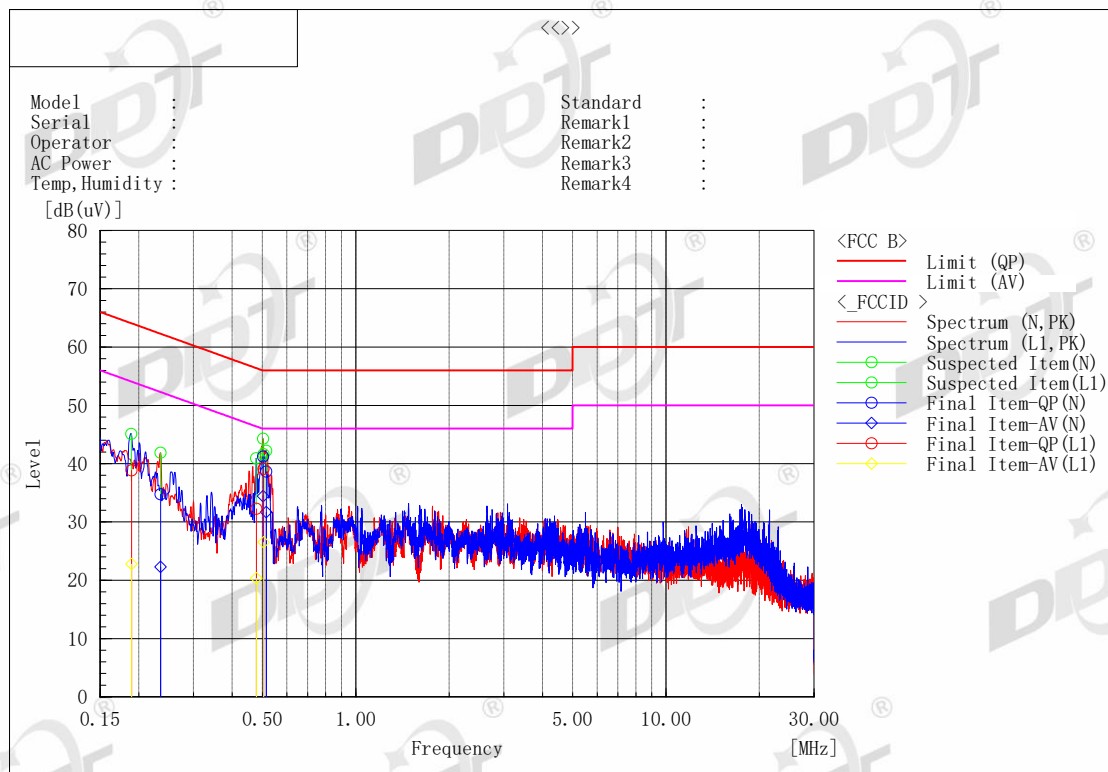

## Final Result

## --- N Phase ---

| No. | Frequency [MHz] | Reading QP [dB(uV)] | Reading CAV [dB(uV)] | c. f [dB] | Result QP [dB(uV)] | Result CAV [dB(uV)] | Limit QP [dB(uV)] | Limit AV [dB(uV)] | Margin QP [dB] | Margin CAV [dB] |
|-----|-----------------|---------------------|----------------------|-----------|--------------------|---------------------|-------------------|-------------------|----------------|-----------------|
| 1   | 0.50291         | 31.5                | 24.7                 | 9.7       | 41.2               | 34.4                | 56.0              | 46.0              | 14.8           | 11.6            |
| 2   | 0.51472         | 28.9                | 22.0                 | 9.7       | 38.6               | 31.7                | 56.0              | 46.0              | 17.4           | 14.3            |
| 3   | 0.23489         | 25.0                | 12.6                 | 9.7       | 34.7               | 22.3                | 62.3              | 52.3              | 27.6           | 30.0            |

## --- L1 Phase ---

| No. | Frequency [MHz] | Reading QP [dB(uV)] | Reading CAV [dB(uV)] | c. f [dB] | Result QP [dB(uV)] | Result CAV [dB(uV)] | Limit QP [dB(uV)] | Limit AV [dB(uV)] | Margin QP [dB] | Margin CAV [dB] |
|-----|-----------------|---------------------|----------------------|-----------|--------------------|---------------------|-------------------|-------------------|----------------|-----------------|
| 1   | 0.50528         | 29.4                | 16.8                 | 9.7       | 39.1               | 26.5                | 56.0              | 46.0              | 16.9           | 19.5            |
| 2   | 0.47805         | 22.5                | 10.6                 | 9.7       | 32.2               | 20.3                | 56.4              | 46.4              | 24.2           | 26.1            |
| 3   | 0.18939         | 29.1                | 13.1                 | 9.7       | 38.8               | 22.8                | 64.1              | 54.1              | 25.3           | 31.3            |

Note1) Level (Quasi-Peak and/or C/Average) = Meter Reading + Factor

Note2) Line = Polarity of input power (Live or Neutral)

N : Abbreviation of Neutral Polarity, L1 : Abbreviation of Live Polarity,

Note3) Factor = LISN Insertion Loss + Cable Loss

Note4) Margin = Limit – Level (Quasi-Peak and/or C/Average)

Note5) C/Average : Abbreviation of CISPR Average

## 11. Antenna Requirements

### 11.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 11.2. Result

The antenna used for this product is Dipole antenna and no antenna other than that furnished by the responsible party shall be used with the device, maximum antenna gain is 3.51 dBi.