

Nemko Test Report: 2L0027RUS1

Applicant: Andrew Corporation
2601 Telecom Parkway
Richardson, TX 7508

Equipment Under Test: Enhanced Remote Antenna Unit (ERAU)
(E.U.T.) Part No. AEO4A-D0602-001

In Accordance With: **FCC Part 22, Subpart H**
Cellular Band Repeaters

Tested By: Nemko Dallas Inc.
802 N. Kealy
Lewisville, TX
75057-3136

Authorized By:



Tom Tidwell, RF Group Manager

Date: 3/22/02

Total No. of Pages: 57

EQUIPMENT: [Enhanced Remote Antenna Unit
\(ERAU\)](#)

PROJECT NO.: 2L0027RUS1

Table of Contents

SECTION 1.	SUMMARY OF TEST RESULTS	3
SECTION 2.	GENERAL EQUIPMENT SPECIFICATION	5
SECTION 3.	RF POWER OUTPUT	7
SECTION 4.	OCCUPIED BANDWIDTH	8
SECTION 5.	SPURIOUS EMISSIONS AT ANTENNA TERMINALS	19
SECTION 6.	FIELD STRENGTH OF SPURIOUS	38
SECTION 7.	TEST EQUIPMENT LIST	41
ANNEX A -	TEST DETAILS.....	42
ANNEX B -	TEST DIAGRAMS	51

EQUIPMENT: Enhanced Remote Antenna Unit
(ERAU)

PROJECT NO.: 2L0027RUS1

Section 1. Summary of Test Results

Manufacturer: Andrew Corporation

Model No.: Enhanced Remote Antenna Unit (ERAU)

Serial No.: None

General: **All measurements are traceable to national standards.**

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC Part 22, Subpart H.



New Submission



Production Unit



Class II Permissive Change



Pre-Production Unit

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE
TEST SPECIFICATIONS HAVE BEEN MADE.

See "Summary of Test Data".

Nemko Dallas Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Dallas Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.

EQUIPMENT: Enhanced Remote Antenna Unit
(ERAU)

PROJECT NO.: 2L0027RUS1

Summary Of Test Data

NAME OF TEST	PARA. NO.	SPEC.	RESULT
RF Power Output	22.913(a)	500W ERP	Complies
Occupied Bandwidth (Voice & SAT)	22.917(c)	Mask	Complies
Occupies Bandwidth (Wideband Data)	22.917(d)	Mask	Complies
Occupied Bandwidth (ST)	22.917(d)	Mask	Complies
Occupied Bandwidth (Digital)	None	None	Complies
Spurious Emissions at Antenna Terminals	22.917	-13 dBm	Complies
Field Strength of Spurious Emissions	22.917	-13 dBm E.I.R.P.	Complies
Frequency Stability	22.355	1.5 ppm	N/A

Footnote The device is an F1-F1 repeater with no modulation circuitry therefore,
s: frequency stability was not tested.

Measurement uncertainty for each test configuration is expressed to 95% probability.

EQUIPMENT: [Enhanced Remote Antenna Unit
\(ERAU\)](#)

PROJECT NO.: 2L0027RUS1

Section 2. General Equipment Specification

Supply Voltage Input:	40-70 Vdc		
Frequency Range:	Downlink:	869 – 894 MHz	
Frequency Range:	Uplink:	824 – 849 MHz	
Type of Modulation and Designator:	CDMA (F9W) ☒	GSM (GXW) ☐	NADC (DXW) ☒
	CDPD (F9W) ☐	AMPS (F8W, F1D) ☒	
Output Impedance:	50 ohms		
Max Input Power:	0 dBm		
RF Output (Rated):	Downlink:	Per Channel: 0.375 W Total: 0.750 W	
	Uplink:	Per Channel: N/A W Total: N/A W	
Frequency Translation:	F1-F1 ☒	F1-F2 ☐	N/A ☐
Band Selection:	Software ☐	Duplexer Change ☐	Fullband Coverage ☒


EQUIPMENT: [Enhanced Remote Antenna Unit
\(ERAU\)](#)

PROJECT NO.: 2L0027RUS1

Description of Operation

The Andrew InCell™ Fiber Distributed Antenna System is designed to provide improved RF performance in buildings that suffer from poor wireless coverage. The InCell™ interfaces directly with a BTS or off-air antenna and distributes RF signals to indoor antennas that provide improved downlink and uplink performance. The InCell™ system uses multiple Enhanced Remote Antenna Units (ERAU) located within the building to optimize communications with handheld mobile phones and wireless office equipment. Each ERAU is connected to a central distribution unit (CDU) by two low-loss, single mode fiber optic cables that provide downlink signals to the remote antenna and uplink signals from the mobile phone or wireless office equipment.

System Diagram

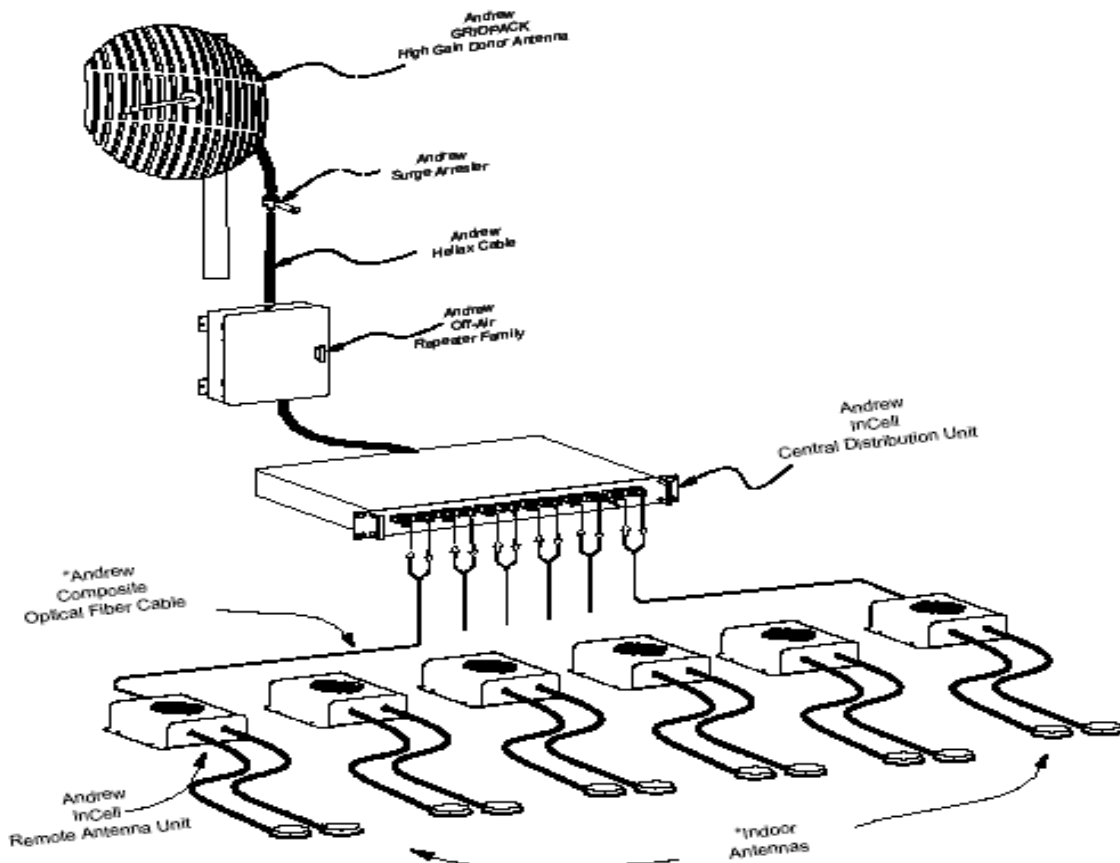

EQUIPMENT: Enhanced Remote Antenna Unit
(ERAU)

PROJECT NO.: 2L0027RUS1

Section 3. RF Power Output

NAME OF TEST: RF Power Output	PARA. NO.: 2.1046
TESTED BY: David Light	DATE: 3/18/2002

Test Results: Complies.**Test Data:**

	Modulation Type	Per Channel Power Output (2 Carriers) (dBm)	Composite Power Output (dBm)
Uplink	AMPS	N/A	
Downlink	AMPS	25.4	28.4
Uplink	CDMA	N/A	
Downlink	CDMA	25.8	28.8
Uplink	NADC	N/A	
Downlink	NADC	25.8	28.8

Equipment Used: 1036-1629-1471-1478**Measurement Uncertainty:** +/- 1.6 dB**Temperature:** 22 °C**Relative Humidity:** 60 %

EQUIPMENT: [Enhanced Remote Antenna Unit
\(ERAU\)](#)

PROJECT NO.: 2L0027RUS1

Section 4. Occupied Bandwidth

NAME OF TEST: Occupied Bandwidth	PARA. NO.: 2.1049
TESTED BY: David Light	DATE: 3/18/2002

Test Results: [Complies.](#)

Test Data: [See attached plots](#)

**Measurement
Uncertainty:** [+/- 1.6](#) dB

EQUIPMENT: Enhanced Remote Antenna Unit
(ERAU)

PROJECT NO.: 2L0027RUS1


Test Data – Occupied Bandwidth



Nemko Dallas, Inc.

Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

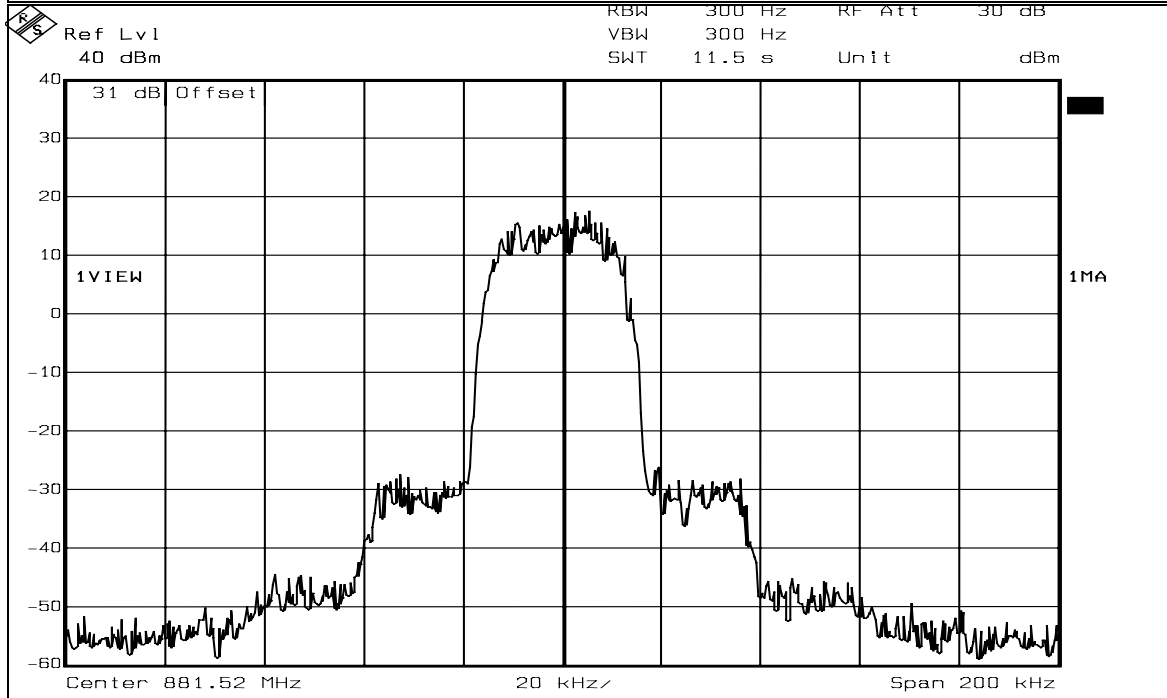Data Plot		OCCUPIED BANDWIDTH	
Page 1 of 6		Complete ☒	
Job No.: 2L0027R	Date: 3/18/2002	Preliminary: ☐	
Specification: PT 22	Temperature(°C): 20		
Tested By: David Light	Relative Humidity(%): 60		
E.U.T.: DUAL BAND REPEATER			
Configuration: TX FULL POWER IN MID BAND			
Sample Number: 1			
Location: Lab 1	RBW: Refer to plots	Measurement	
Detector Type: Peak	VBW: Refer to plots	Distance: N/A m	
Test Equipment Used			
Antenna:	Directional Coupler:		
Pre-Amp:	Cable #1: 1628		
Filter:	Cable #2: 1629		
Receiver: 1036	Cable #3: 1627		
Attenuator #1: 1478	Cable #4:		
Attenuator #2: 1471	Mixer:		
Additional equipment used: 1052 1051 1092 1053			
Measurement Uncertainty: +/-1.7 dB			
			
Date: 18.MAR.2002 11:31:33			
Notes: TDMA OUTPUT			

EQUIPMENT: Enhanced Remote Antenna Unit
(ERAU)

PROJECT NO.: 2L0027RUS1

Test Data – Occupied Bandwidth



Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

Data Plot

Page 2 of 6

Job No.: 2L0027R

Date: 3/18/2002

Specification: PT 22


Temperature(°C): 20

Tested By: David Light

Relative Humidity(%) 60

E.U.T.: DUAL BAND REPEATER

Configuration: TX FULL POWER IN MID BAND

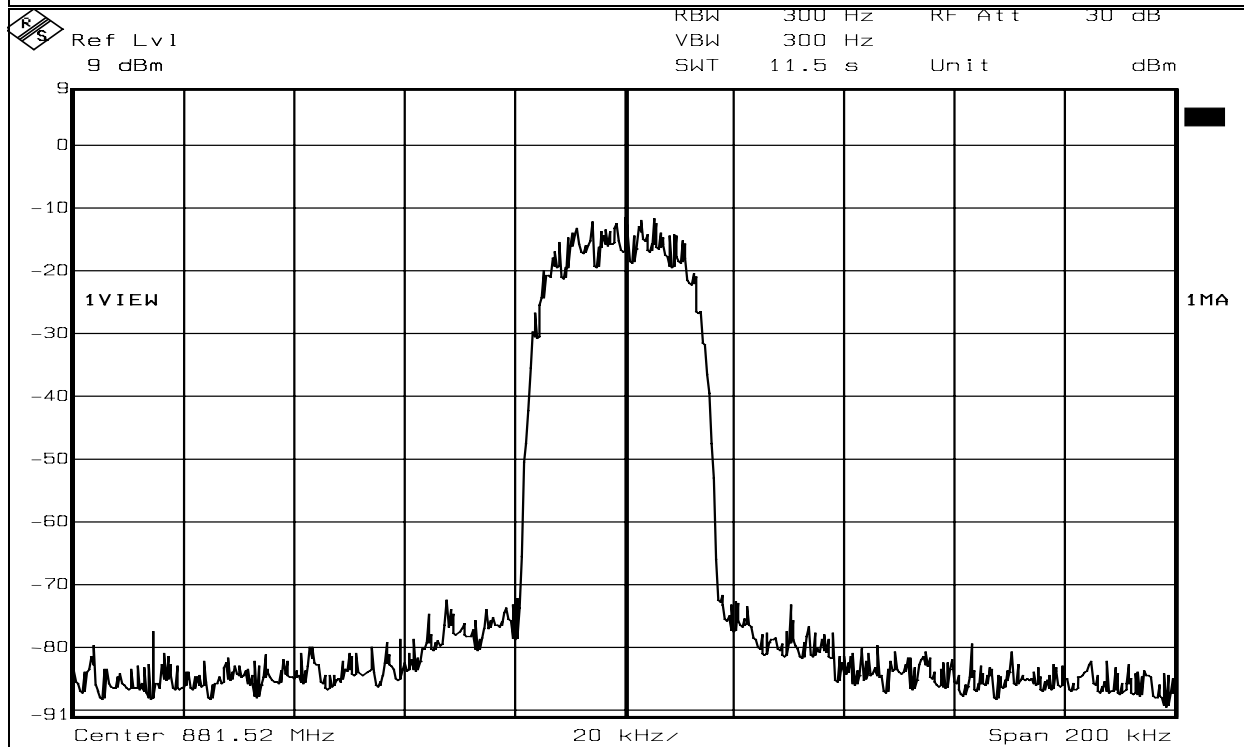OCCUPIED BANDWIDTH

Date: 18.MAR.2002 11:32:50

Notes: TDMA INPUT

EQUIPMENT: Enhanced Remote Antenna Unit
(ERAU)


PROJECT NO.: 2L0027RUS1

Test Data – Occupied Bandwidth



Nemko Dallas, Inc.

Dallas Headquarters:

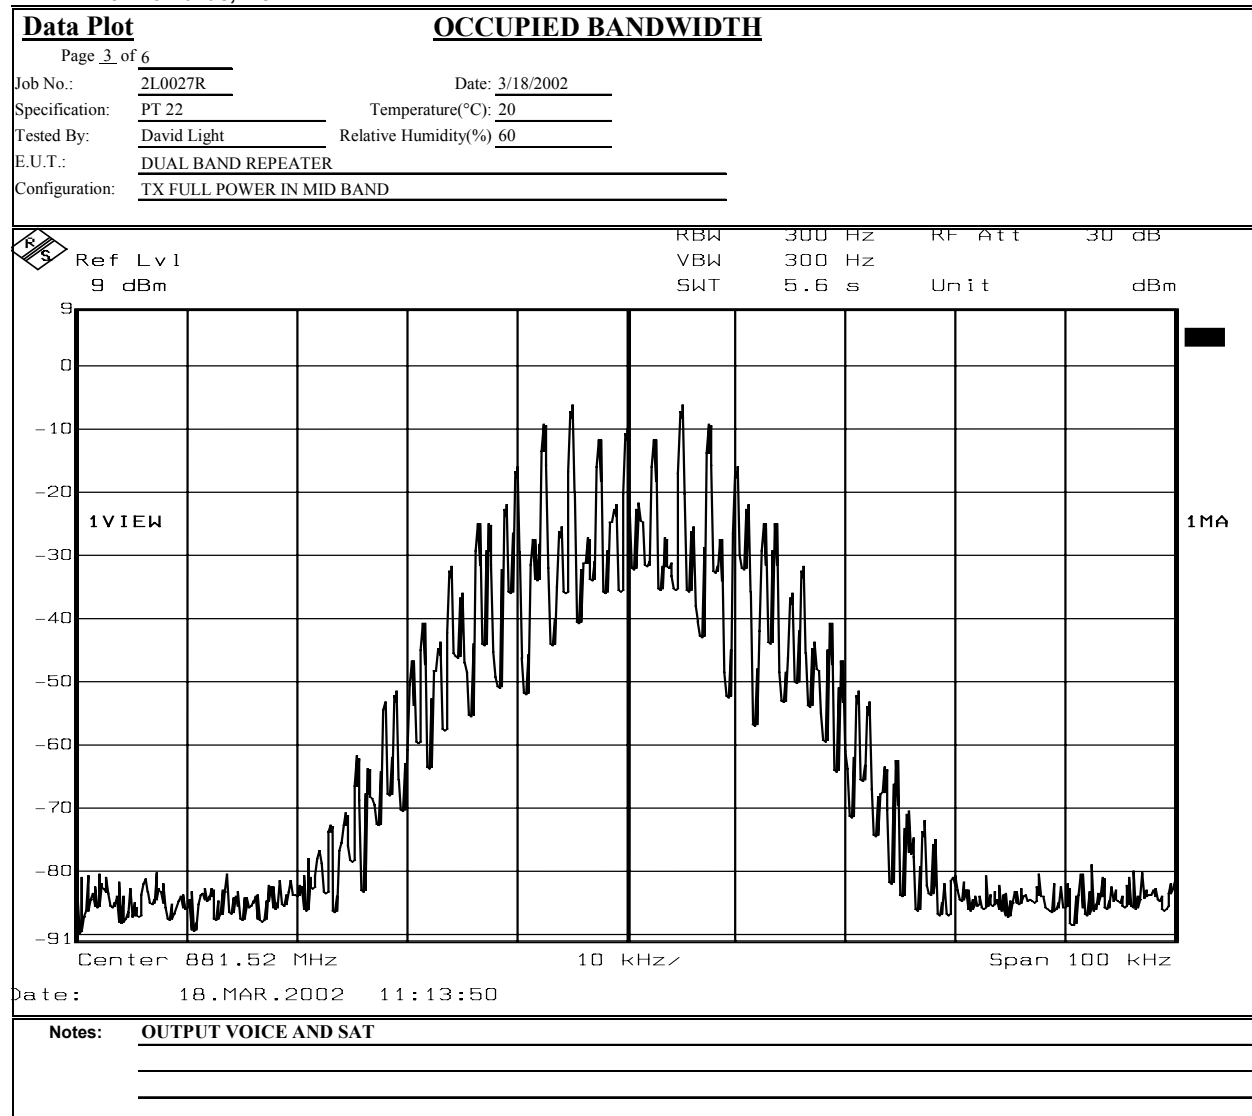
802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

EQUIPMENT: **Enhanced Remote Antenna Unit
(ERAU)**

PROJECT NO.: 2L0027RUS1

Test Data – Occupied Bandwidth**Dallas Headquarters:**802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

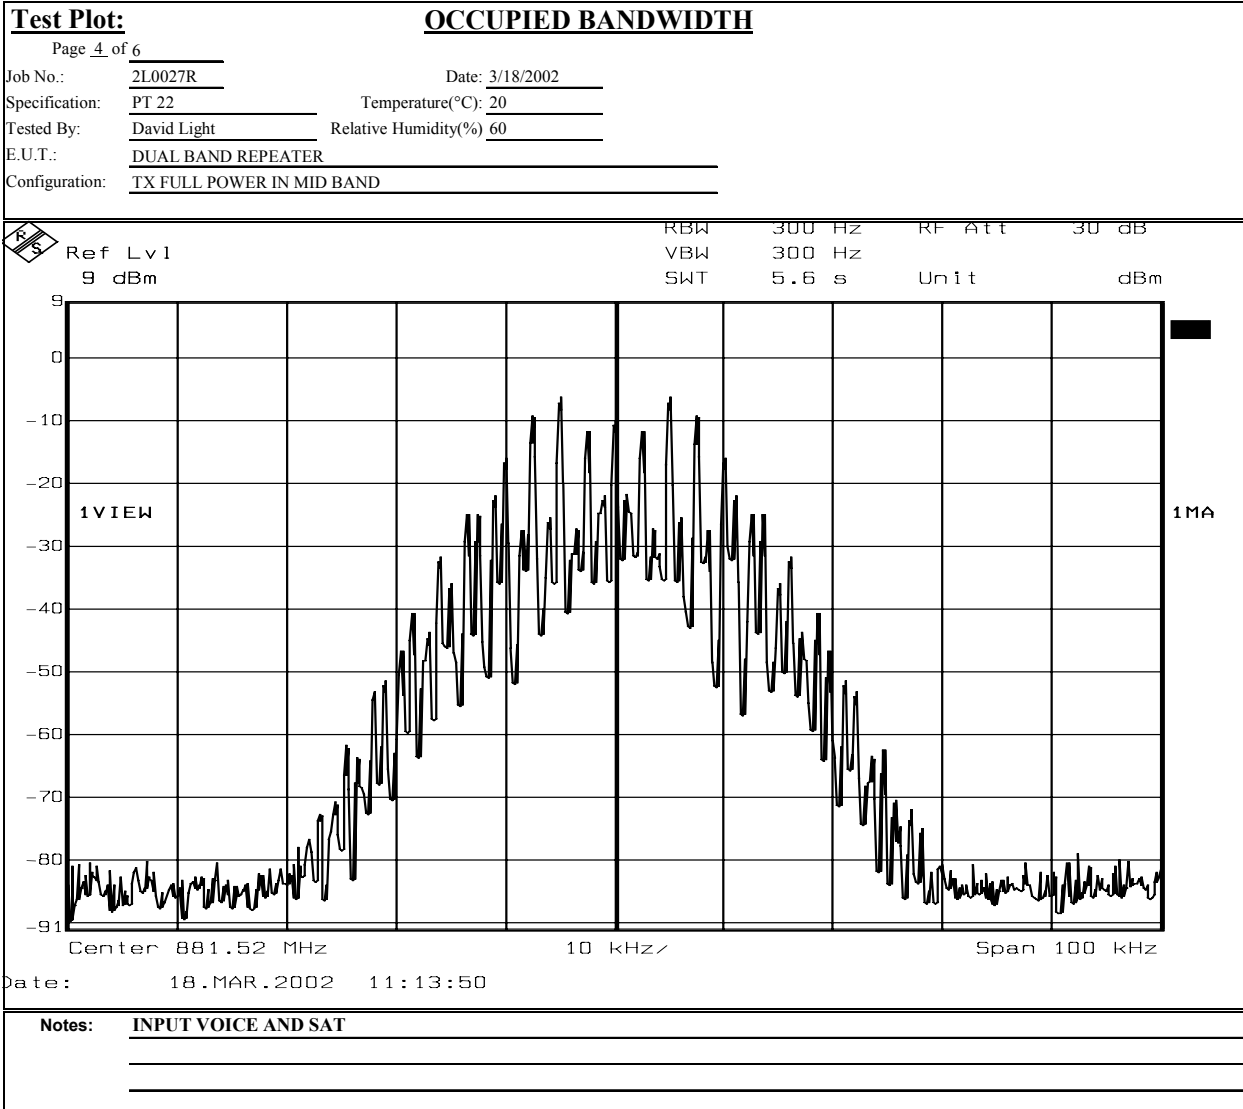

EQUIPMENT: Enhanced Remote Antenna Unit
(ERAU)


PROJECT NO.: 2L0027RUS1

Test Data – Occupied Bandwidth



Nemko Dallas, Inc.

Dallas Headquarters:

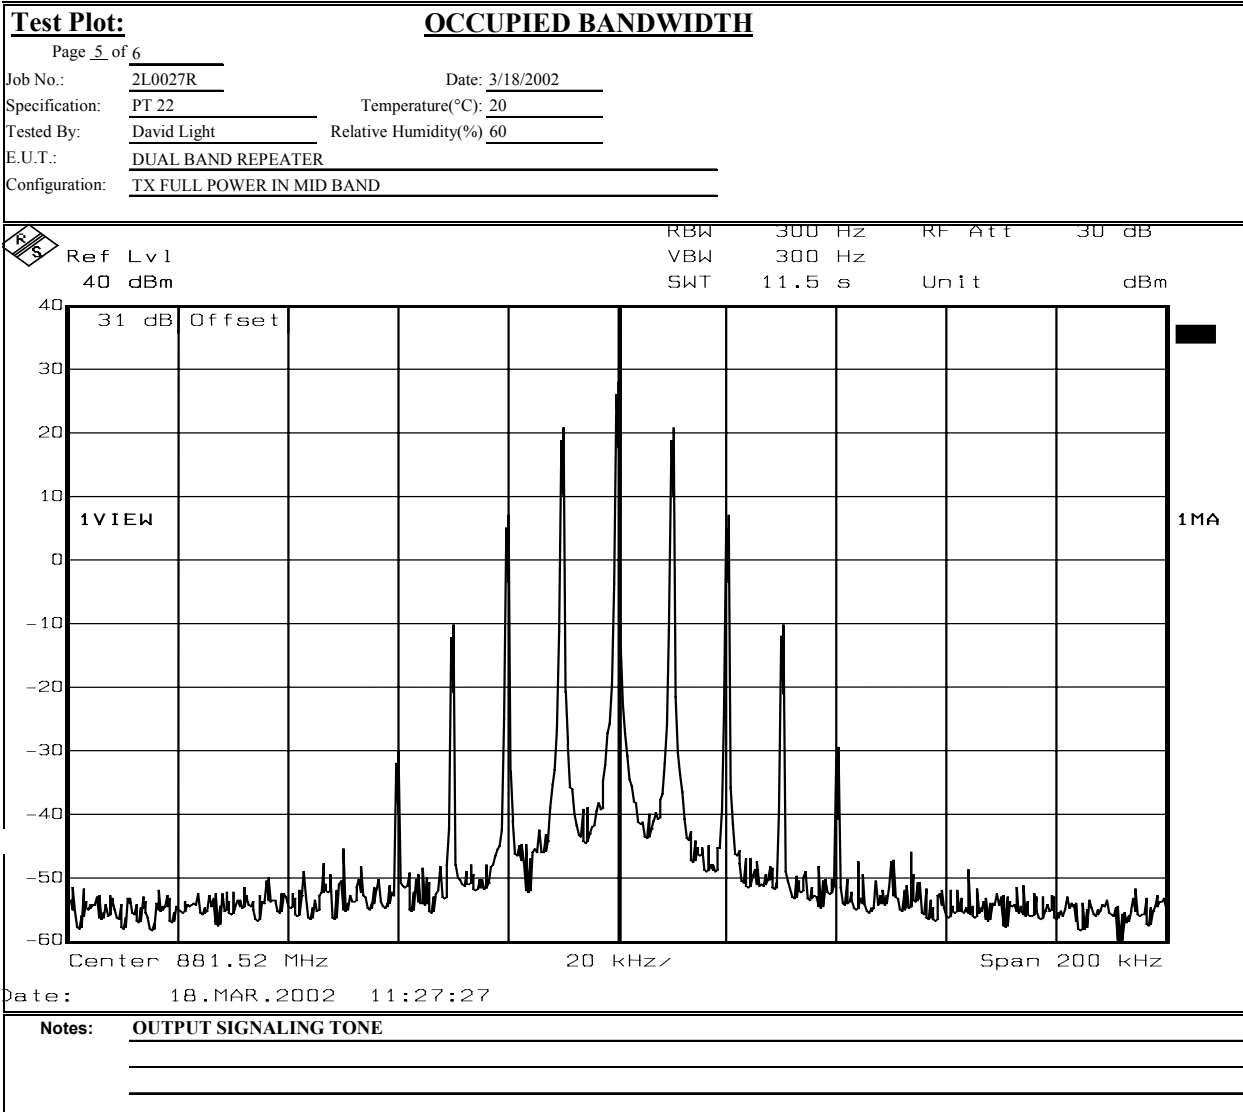
802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

EQUIPMENT: **Enhanced Remote Antenna Unit
(ERAU)**

PROJECT NO.: 2L0027RUS1

Test Data – Occupied Bandwidth

Nemko Dallas, Inc.

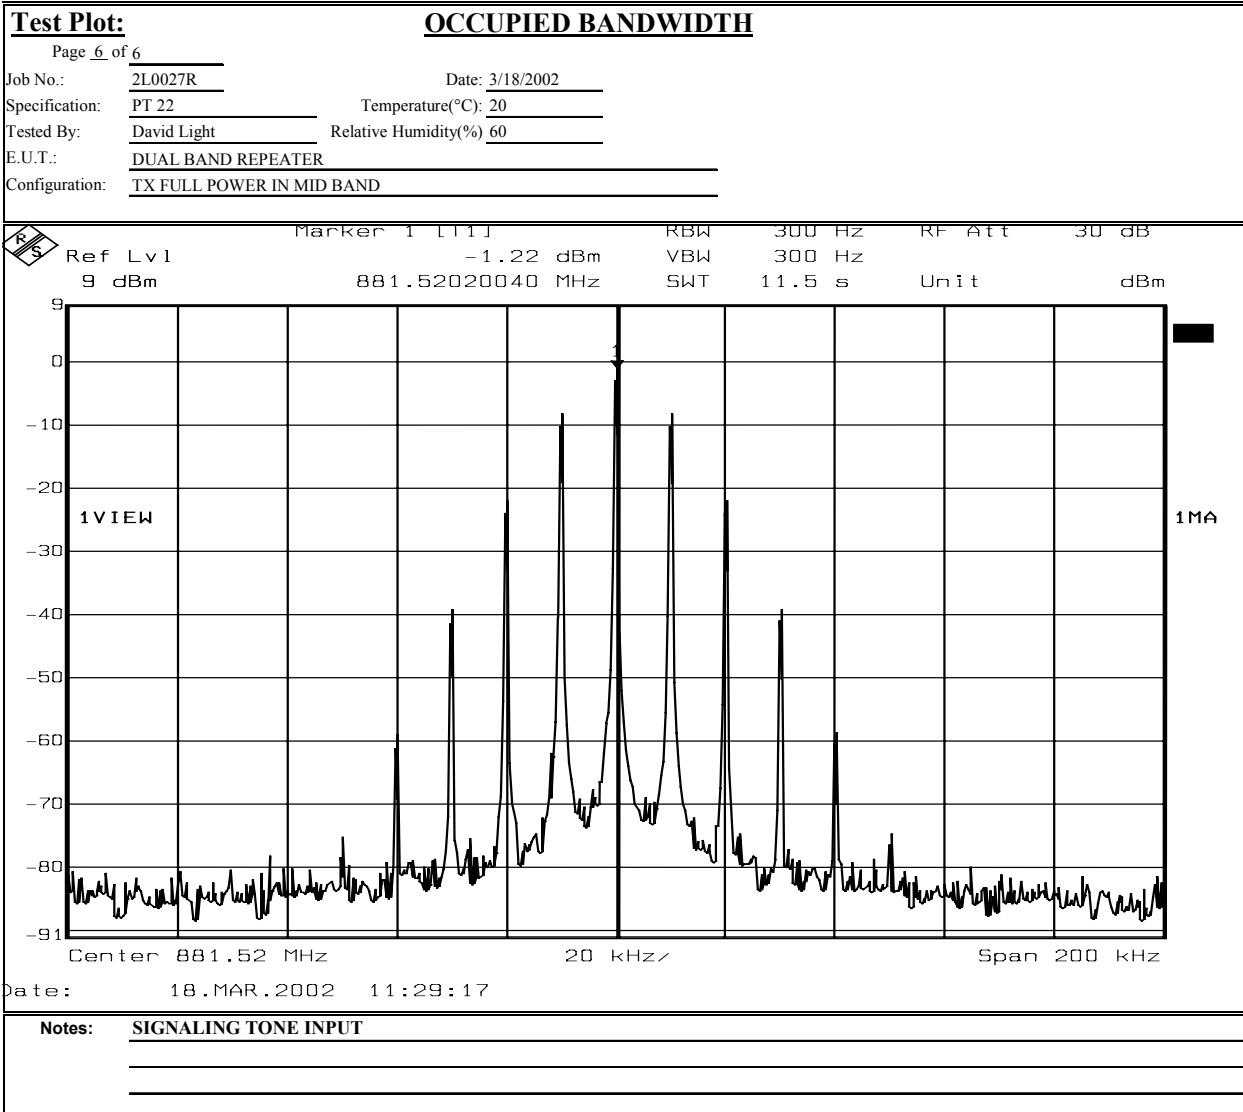Dallas Headquarters:802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

EQUIPMENT: Enhanced Remote Antenna Unit
(ERAU)

PROJECT NO.: 2L0027RUS1

Test Data – Occupied Bandwidth



Nemko Dallas, Inc.

Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Data Plot		OCCUPIED BANDWIDTH	
Page 1 of 4			
Job No.: 2L0027R	Date: 3/18/2002	Complete ☒ Preliminary ☐	
Specification: PT 22	Temperature(°C): 22		
Tested By: David Light	Relative Humidity(%): 60		
E.U.T.: DUAL BAND REPEATER			
Configuration: TX FULL POWER AT MID BAND			
Sample Number: 1			
Location: Lab 1	RBW: Refer to plots	Measurement Distance: N/A m	
Detector Type: Peak	VBW: Refer to plots		
Test Equipment Used			
Antenna:	Directional Coupler:		
Pre-Amp:	Cable #1: 1627		
Filter:	Cable #2: 1628		
Receiver: 1036	Cable #3: 1629		
Attenuator #1: 1478	Cable #4:		
Attenuator #2: 1471	Mixer:		
Additional equipment used:	1052 1051 1092 1053		
Measurement Uncertainty:	+/-1.7 dB		
Date: 18.MAR.2002 11:36:48			
Notes: CDMA OUTPUT			

EQUIPMENT: Enhanced Remote Antenna Unit
(ERAU)

PROJECT NO.: 2L0027RUS1

Test Data – Occupied Bandwidth



Dallas Headquarters:


802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

Data Plot**OCCUPIED BANDWIDTH**

Page 2 of 4

Job No.: 2L0027R Date: 3/18/2002
Specification: PT 22 Temperature(°C): 22
Tested By: David Light Relative Humidity(%) 60
E.U.T.: DUAL BAND REPEATER
Configuration: TX FULL POWER AT MID BAND

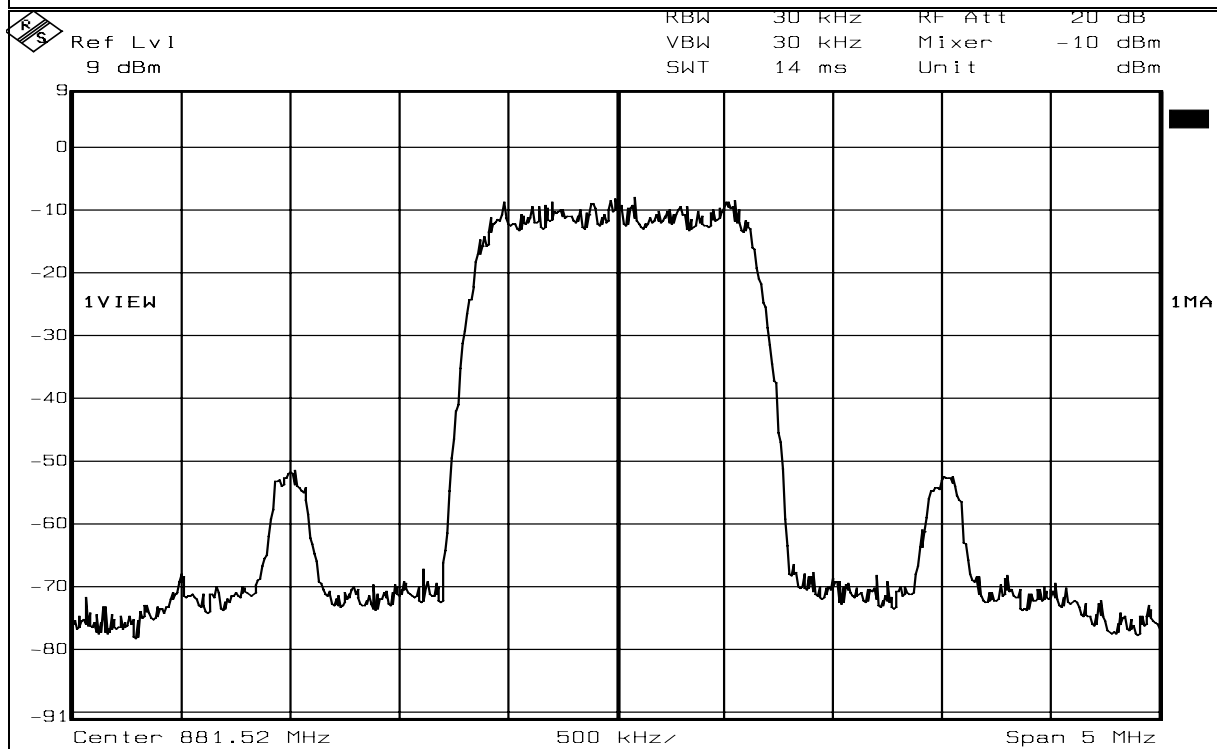

Date: 18.MAR.2002 11:38:06


Notes: CDMA INPUT

EQUIPMENT: **Enhanced Remote Antenna Unit
(ERAU)**

PROJECT NO.: 2L0027RUS1

Test Data – Occupied Bandwidth

Nemko Dallas, Inc.

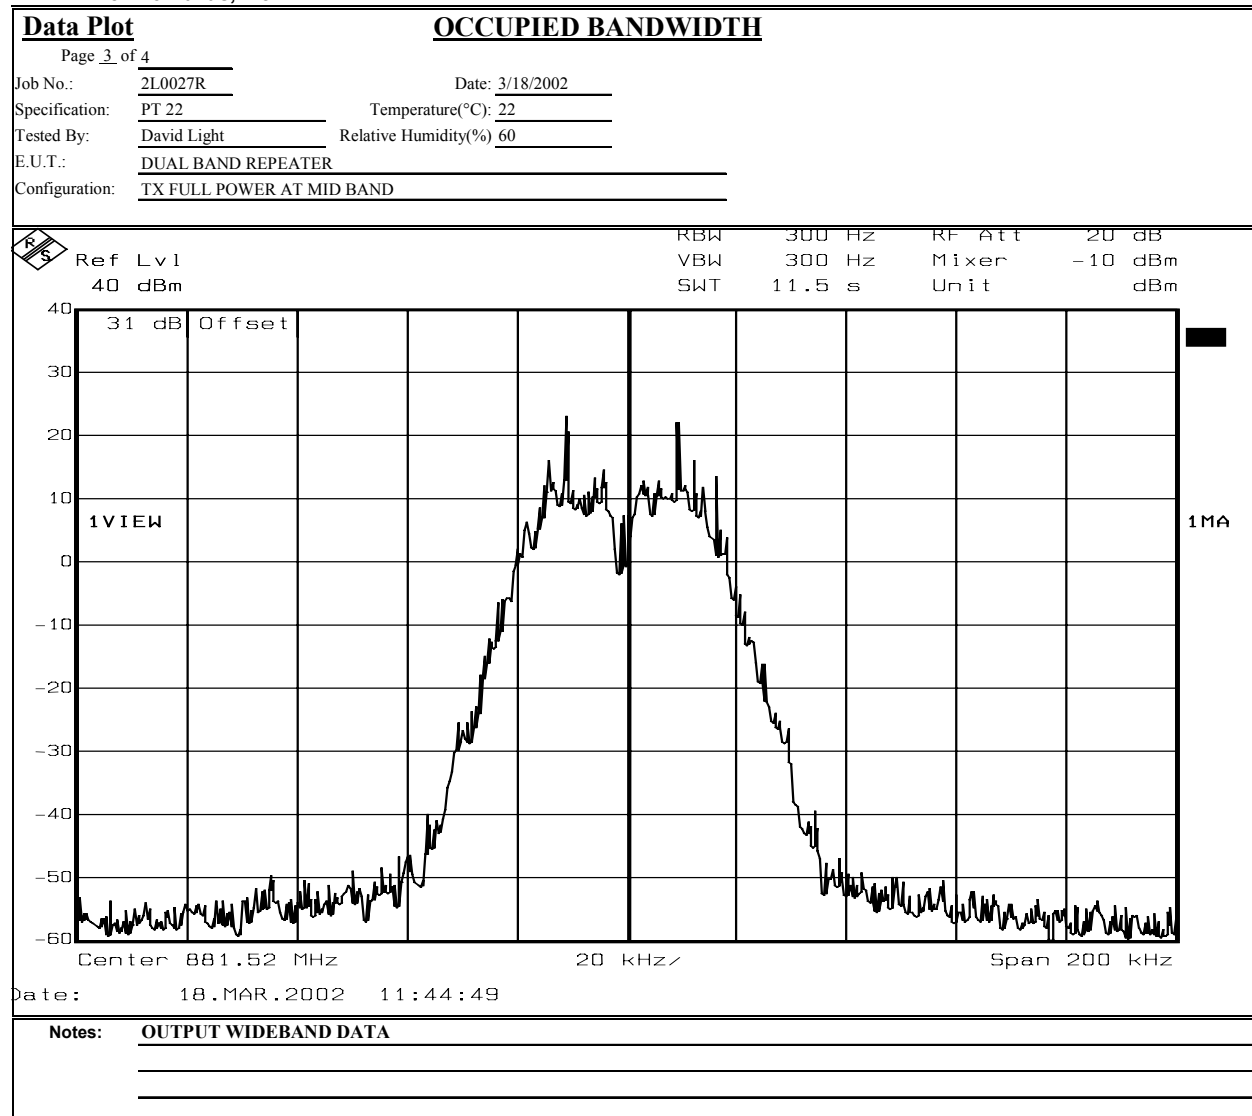
Dallas Headquarters:802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

EQUIPMENT: **Enhanced Remote Antenna Unit
(ERAU)**

PROJECT NO.: 2L0027RUS1

Test Data – Occupied Bandwidth

Nemko Dallas, Inc.

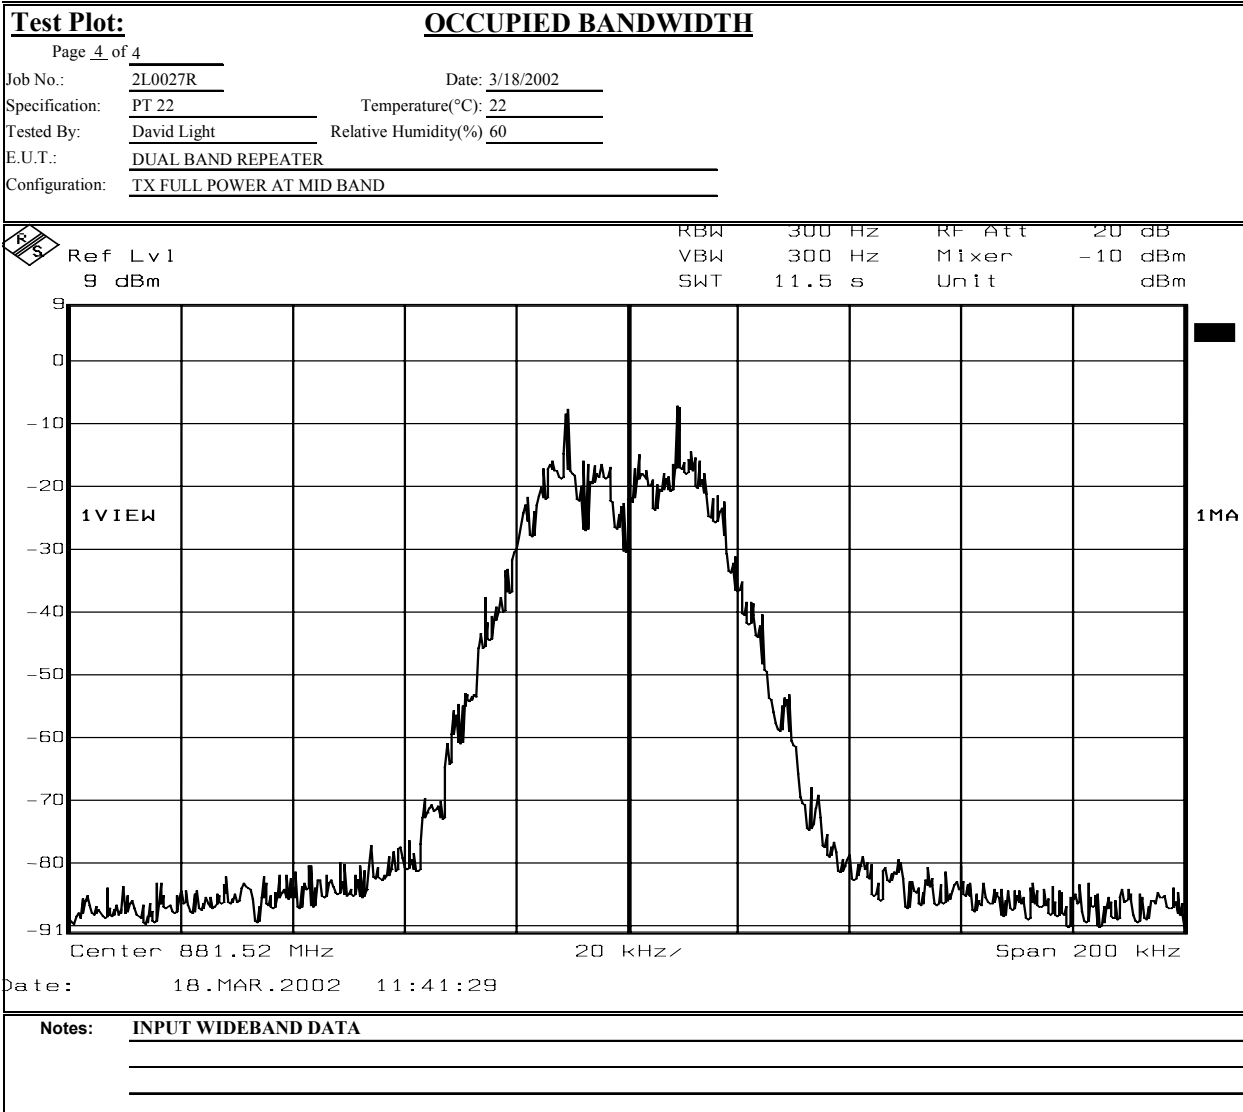Dallas Headquarters:802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

EQUIPMENT: [Enhanced Remote Antenna Unit
\(ERAU\)](#)

PROJECT NO.: 2L0027RUS1

Section 5. Spurious Emissions at Antenna Terminals

NAME OF TEST: Spurious Emissions @ Antenna Terminals	PARA. NO.: 2.1051
TESTED BY: David Light	DATE: 3/18/2002

Test Results: [Complies.](#)

Test Data: [See attached plots](#)

Measurement Uncertainty: ± 1.6 dB

EQUIPMENT: Enhanced Remote Antenna Unit
(ERAU)

PROJECT NO.: 2L0027RUS1

Test Data – Spurious Emissions at Antenna Terminals



Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

Data Plot		SPURIOUS EMISSIONS AT ANTENNA TERMINALS			
Page 1 of 2				Complete	X
Job No.: 2L0027R	Date: 3/18/2002			Preliminary:	
Specification: PT 22	Temperature(°C): 22				
Tested By: David Light	Relative Humidity(%): 60				
E.U.T.: DUAL BAND REPEATER					
Configuration: TX AT MID BAND					
Sample Number: 1					
Location: Lab 1	RBW: Refer to plots			Measurement	
Detector Type: Peak	VBW: Refer to plots			Distance: N/A	m
Test Equipment Used					
Antenna:	Directional Coupler:				
Pre-Amp:	Cable #1:	1627			
Filter:	Cable #2:	1628			
Receiver:	Cable #3:	1629			
Attenuator #1:	Cable #4:				
Attenuator #2:	Mixer:				
Additional equipment used:	1052	1051	1092	1053	
Measurement Uncertainty:	+/-1.7 dB				
Ref Lvl 30 dBm Marker 1 [111] 28.32 dBm 869.75951904 MHz RBW 100 kHz SWT 245 ms RF Att 10 dB Unit dBm VBW 100 kHz Mixer -10 dBm 31 dB Offset 1 VIEW D1 -13 dBm 1MA EXT Start 30 MHz 97 MHz Stop 1 GHz					
Date: 18.MAR.2002 16:11:11					
Notes:					

EQUIPMENT: Enhanced Remote Antenna Unit
(ERAU)

PROJECT NO.: 2L0027RUS1

Test Data – Spurious Emissions at Antenna Terminals



Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667


Nemko Dallas, Inc.

Data Plot

SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Page 2 of 2

Job No.: 2L0027R Date: 3/18/2002
Specification: PT 22 Temperature(°C): 22
Tested By: David Light Relative Humidity(%) 60
E.U.T.: DUAL BAND REPEATER
Configuration: TX AT MID BAND

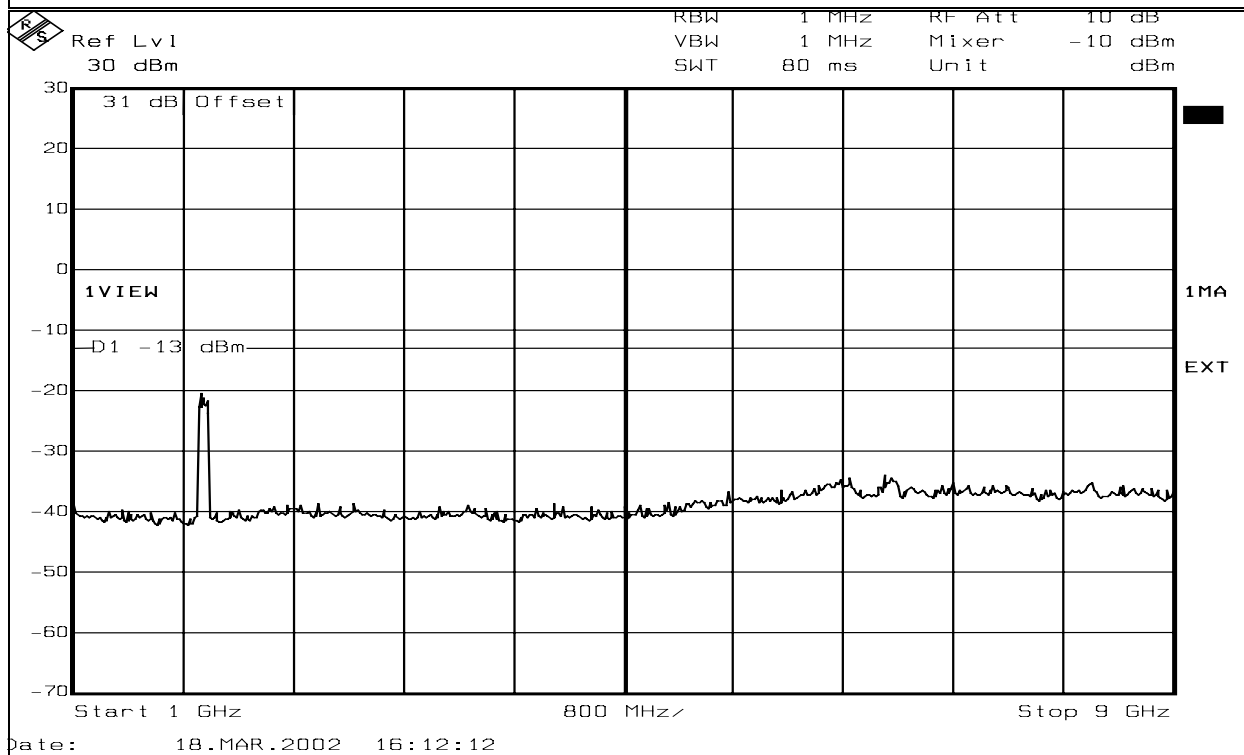

Date: 18.MAR.2002 16:12:12

Notes:

EQUIPMENT: Enhanced Remote Antenna Unit
(ERAU)

PROJECT NO.: 2L0027RUS1

Test Data – Spurious Emissions at Antenna Terminals



Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.


Data Plot

UPPER BANDEDGES

Page 1 of 5
Job No.: 2L0027R Date: 3/18/2002 Complete X
Specification: PT22 Temperature(°C): 22 Preliminary: _____
Tested By: David Light Relative Humidity(%): 60
E.U.T.: DUAL BAND REPEATER
Configuration: TX AT HIGHEST CHANNEL IN BAND
Sample Number: 1
Location: Lab 1 RBW: Refer to plots Measurement Distance: N/A m
Detector Type: Refer to plot VBW: Refer to plots

Test Equipment Used

Antenna: _____ Directional Coupler: _____
Pre-Amp: _____ Cable #1: 1627
Filter: _____ Cable #2: 1628
Receiver: 1036 Cable #3: 1629
Attenuator #1: 1478 Cable #4: _____
Attenuator #2: 1471 Mixer: _____
Additional equipment used: 1052 1051 1092 1053
Measurement Uncertainty: +/-1.7 dB

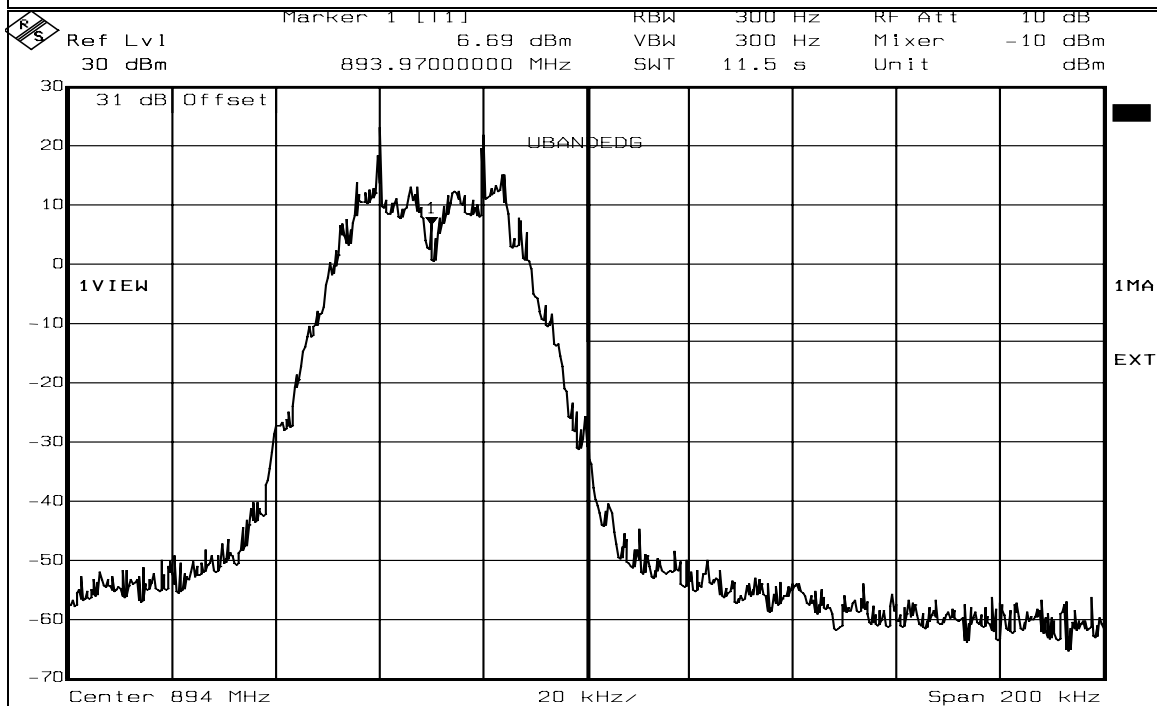

Date: 18.MAR.2002 14:15:09

Notes: WIDEBAND DATA

EQUIPMENT: Enhanced Remote Antenna Unit
(ERAU)

PROJECT NO.: 2L0027RUS1


Test Data – Spurious Emissions at Antenna Terminals



Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

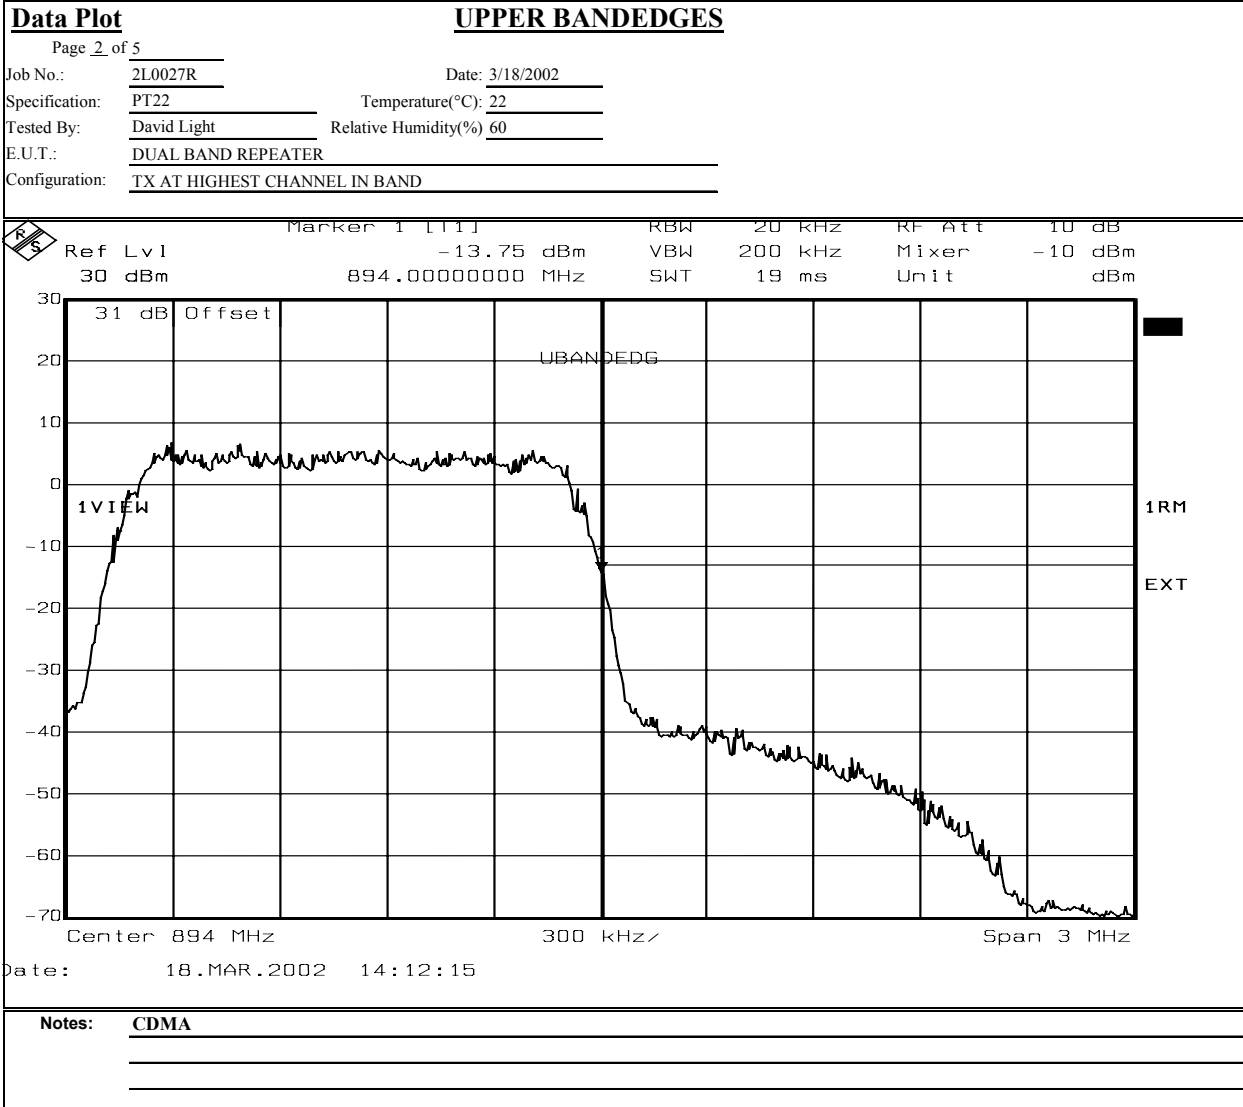

EQUIPMENT: Enhanced Remote Antenna Unit
(ERAU)


PROJECT NO.: 2L0027RUS1

Test Data – Spurious Emissions at Antenna Terminals



Nemko Dallas, Inc.

Dallas Headquarters:

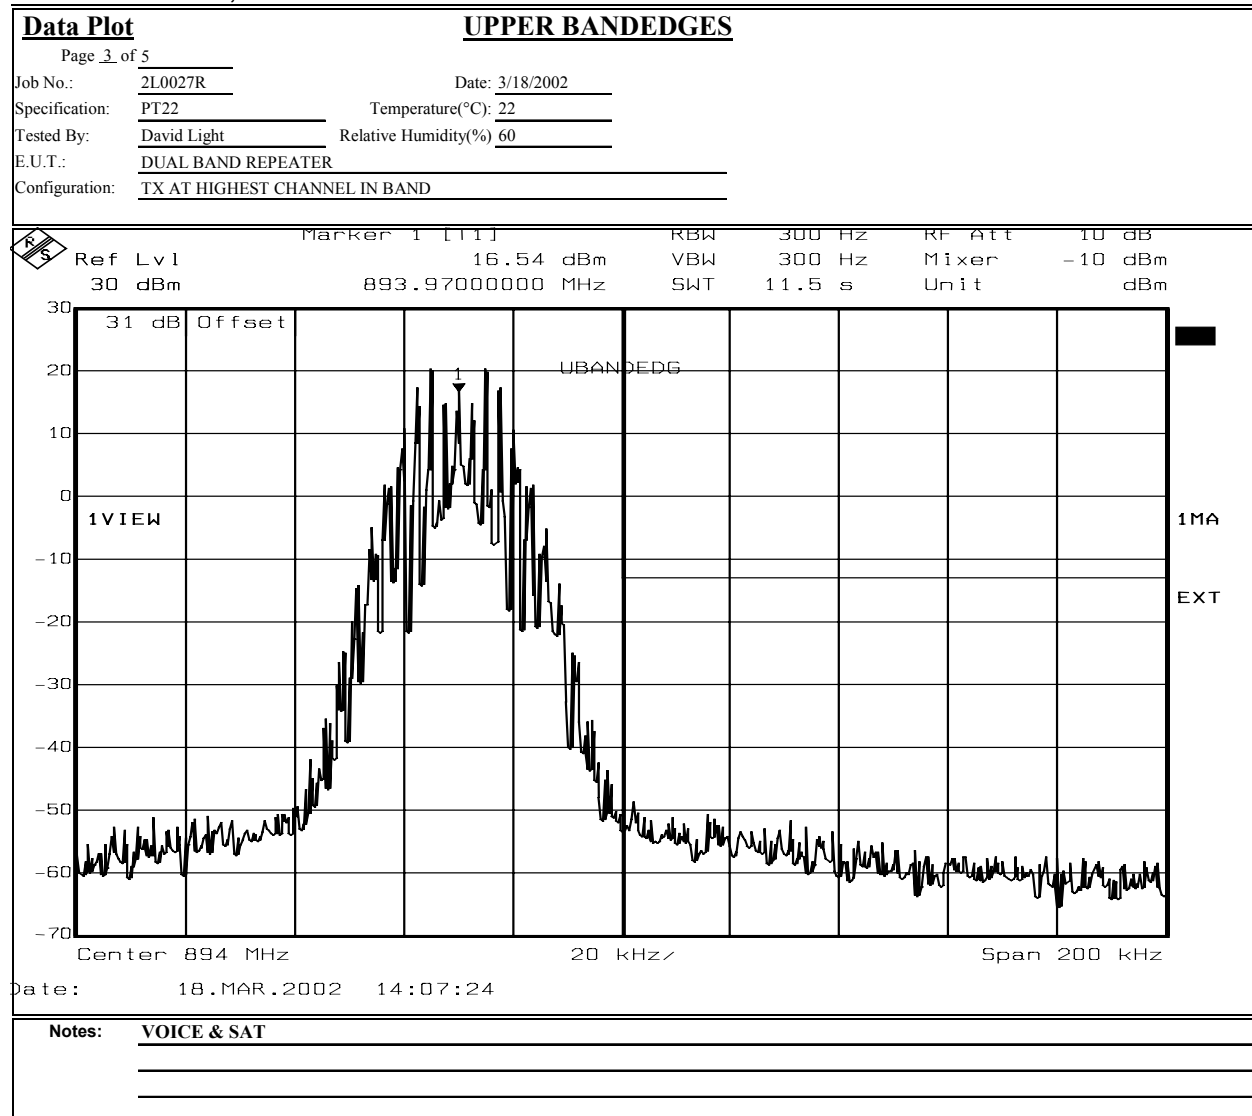
802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

EQUIPMENT: **Enhanced Remote Antenna Unit
(ERAU)**

PROJECT NO.: 2L0027RUS1

Test Data – Spurious Emissions at Antenna Terminals

Nemko Dallas, Inc.

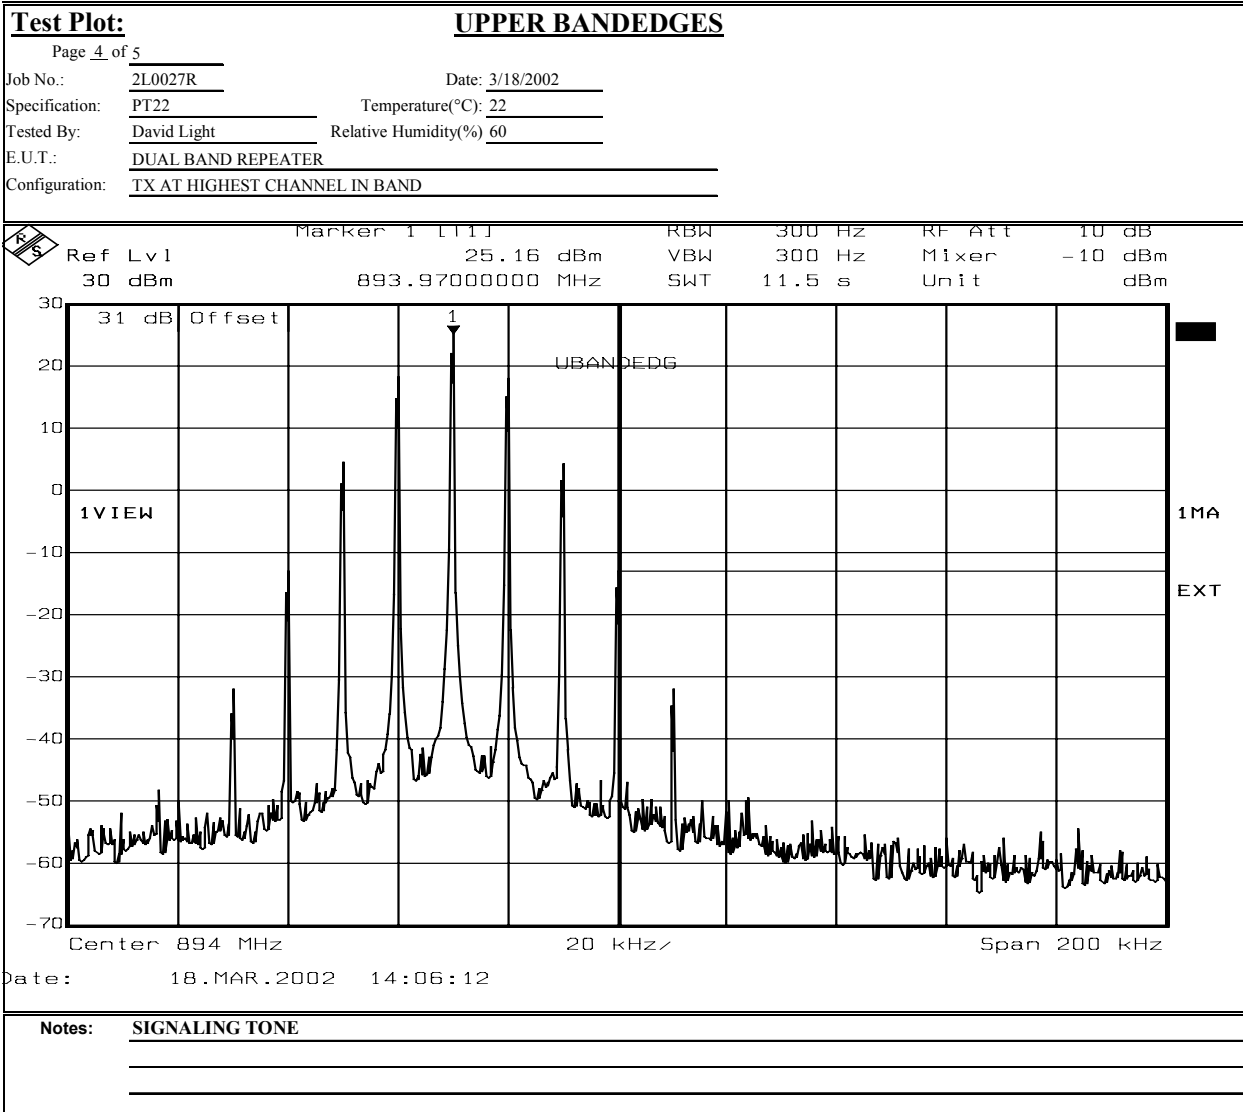Dallas Headquarters:802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

EQUIPMENT: Enhanced Remote Antenna Unit
(ERAU)


PROJECT NO.: 2L0027RUS1

Test Data – Spurious Emissions at Antenna Terminals



Nemko Dallas, Inc.

Dallas Headquarters:

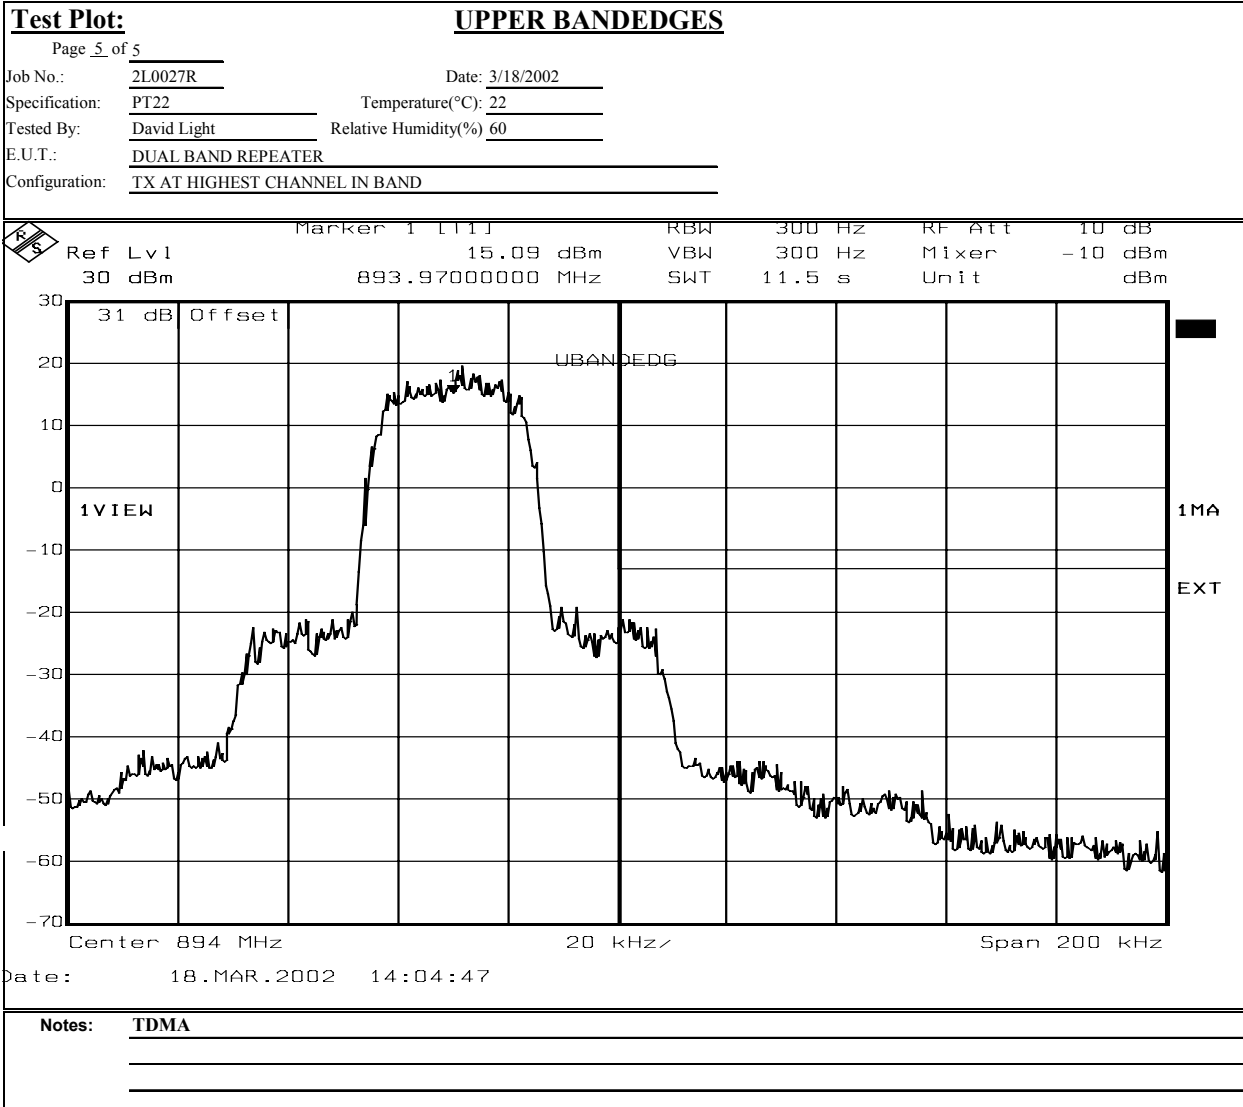802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

EQUIPMENT: Enhanced Remote Antenna Unit
(ERAU)

PROJECT NO.: 2L0027RUS1

Test Data – Spurious Emissions at Antenna Terminals



Nemko Dallas, Inc.

Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Data Plot		LOWER BANDEDGES	
Page 1 of 5		Complete	X
Job No.: 2L0027R	Date: 3/18/2002	Preliminary:	
Specification: PT22	Temperature(°C): 22		
Tested By: David Light	Relative Humidity(%): 60		
E.U.T.: DUAL BAND REPEATER			
Configuration: TX AT LOWEST CHANNEL IN BAND			
Sample Number: 1			
Location: Lab 1	RBW: Refer to plots	Measurement	
Detector Type: Refer to plot	VBW: Refer to plots	Distance:	m
Test Equipment Used			
Antenna:	Directional Coupler:		
Pre-Amp:	Cable #1:	1627	
Filter:	Cable #2:	1628	
Receiver:	Cable #3:	1629	
Attenuator #1:	Cable #4:		
Attenuator #2:	Mixer:		
Additional equipment used:	1052	1051	1092
			1053
Measurement Uncertainty:	+/-1.7 dB		
Marker 1 [111] Ref Lvl 2.96 dBm 40 dBm 869.04000000 MHz RBW 300 Hz VBW 300 Hz SWT 11.5 s RF Att 20 dB Mixer -10 dBm Unit dBm 31 dB Offset 1 VIEW 1 MA Center 869 MHz Span 200 kHz			
Date: 18.MAR.2002 11:51:08			
Notes: WIDEBAND DATA			


EQUIPMENT: **Enhanced Remote Antenna Unit
(ERAU)**

PROJECT NO.: 2L0027RUS1

Test Data – Spurious Emissions at Antenna Terminals**Dallas Headquarters:**

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

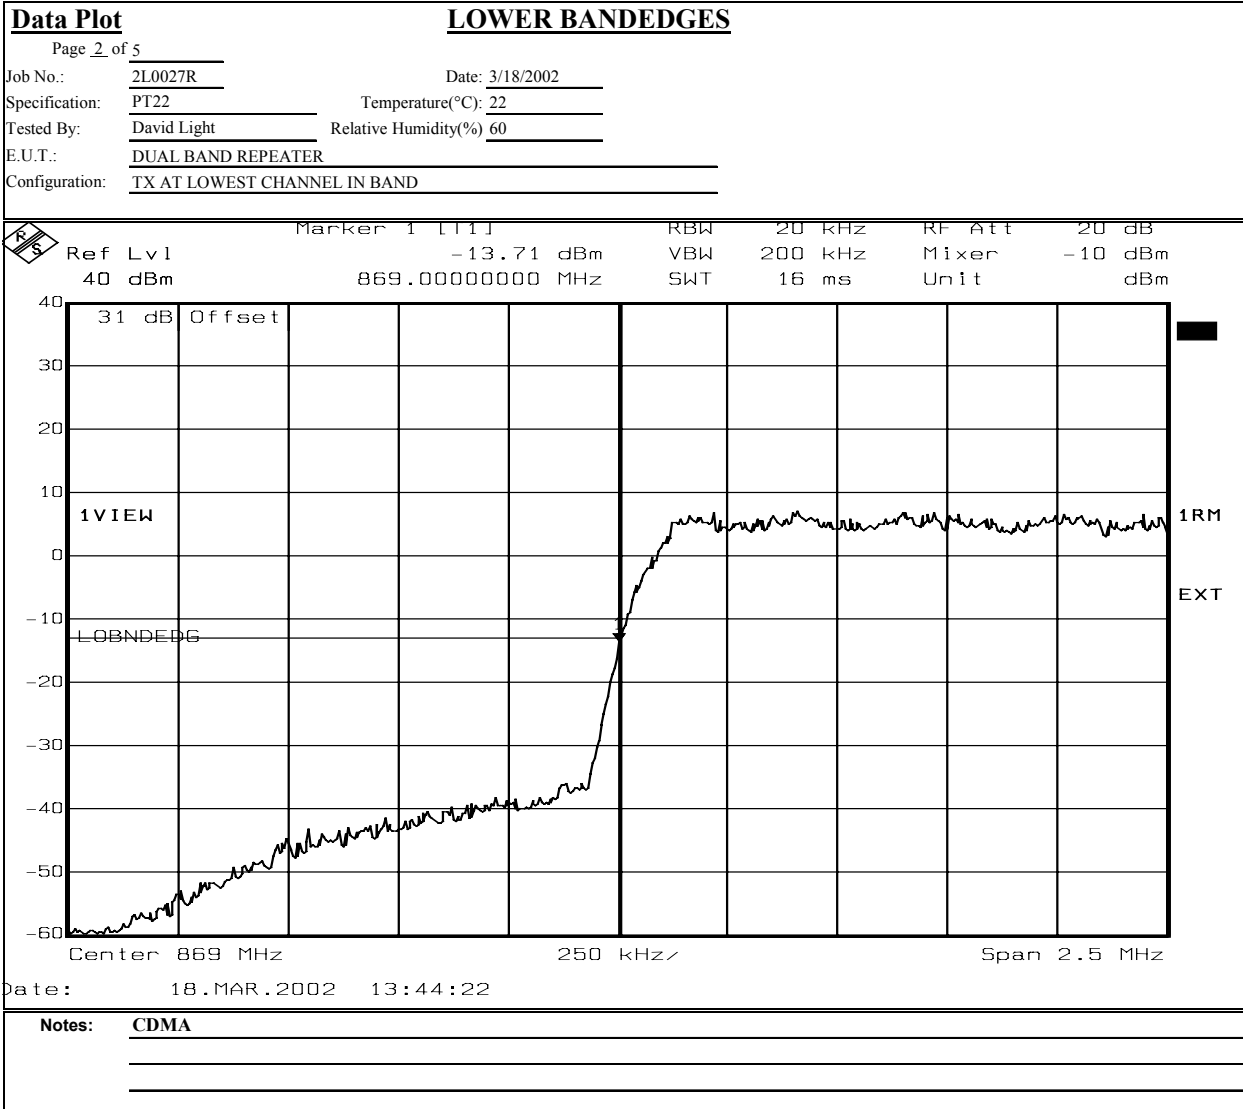

EQUIPMENT: Enhanced Remote Antenna Unit
(ERAU)


PROJECT NO.: 2L0027RUS1

Test Data – Spurious Emissions at Antenna Terminals



Nemko Dallas, Inc.

Dallas Headquarters:

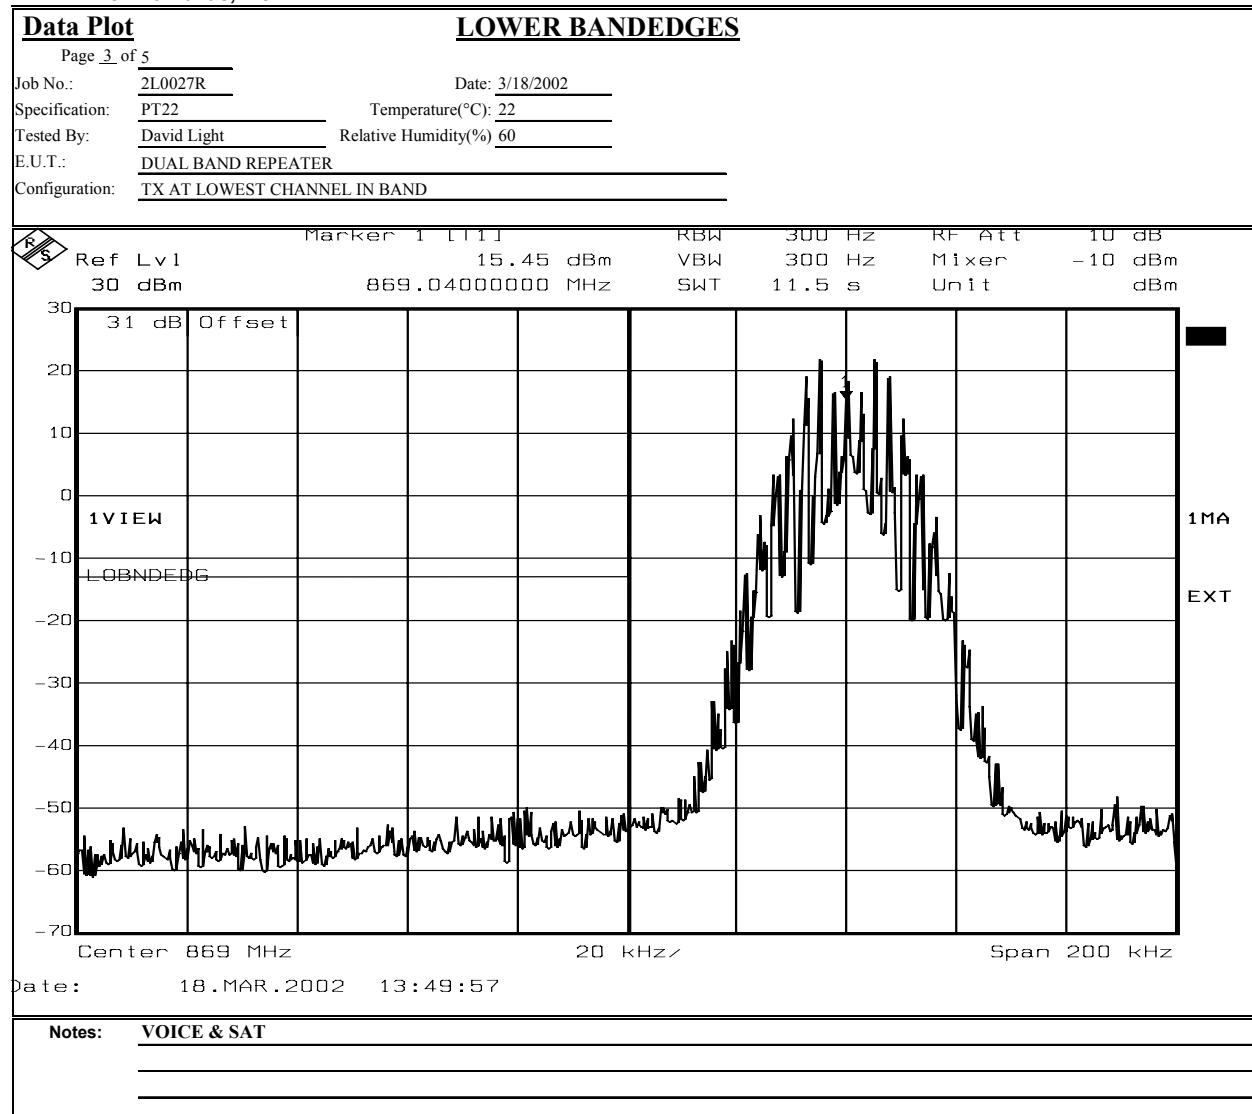
802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

EQUIPMENT: **Enhanced Remote Antenna Unit
(ERAU)**

PROJECT NO.: 2L0027RUS1

Test Data – Spurious Emissions at Antenna Terminals**Dallas Headquarters:**802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

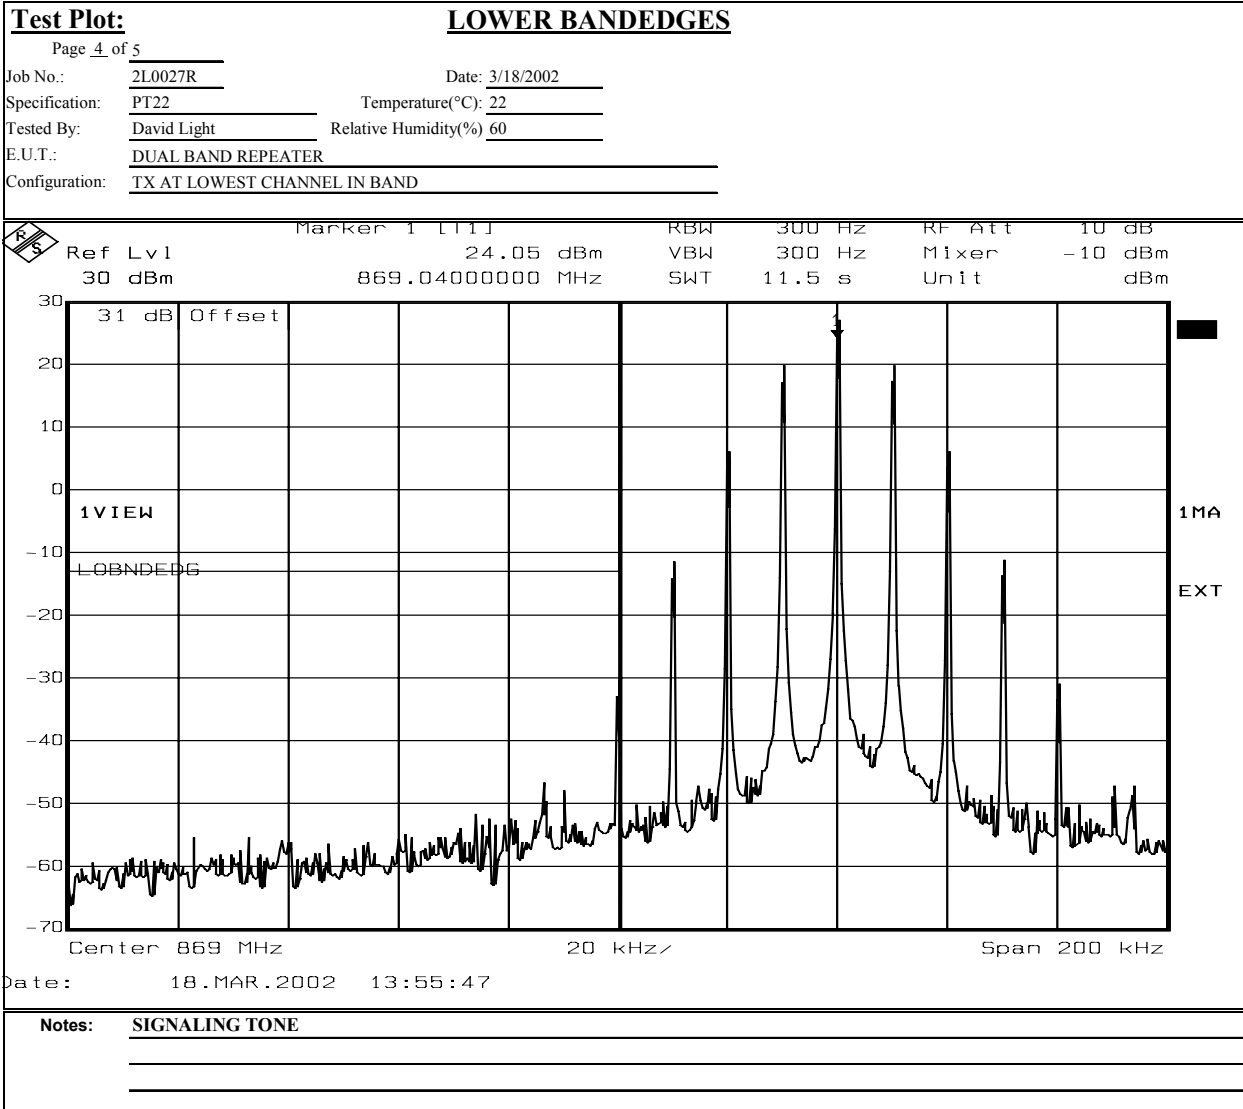

EQUIPMENT: Enhanced Remote Antenna Unit
(ERAU)


PROJECT NO.: 2L0027RUS1

Test Data – Spurious Emissions at Antenna Terminals



Nemko Dallas, Inc.

Dallas Headquarters:

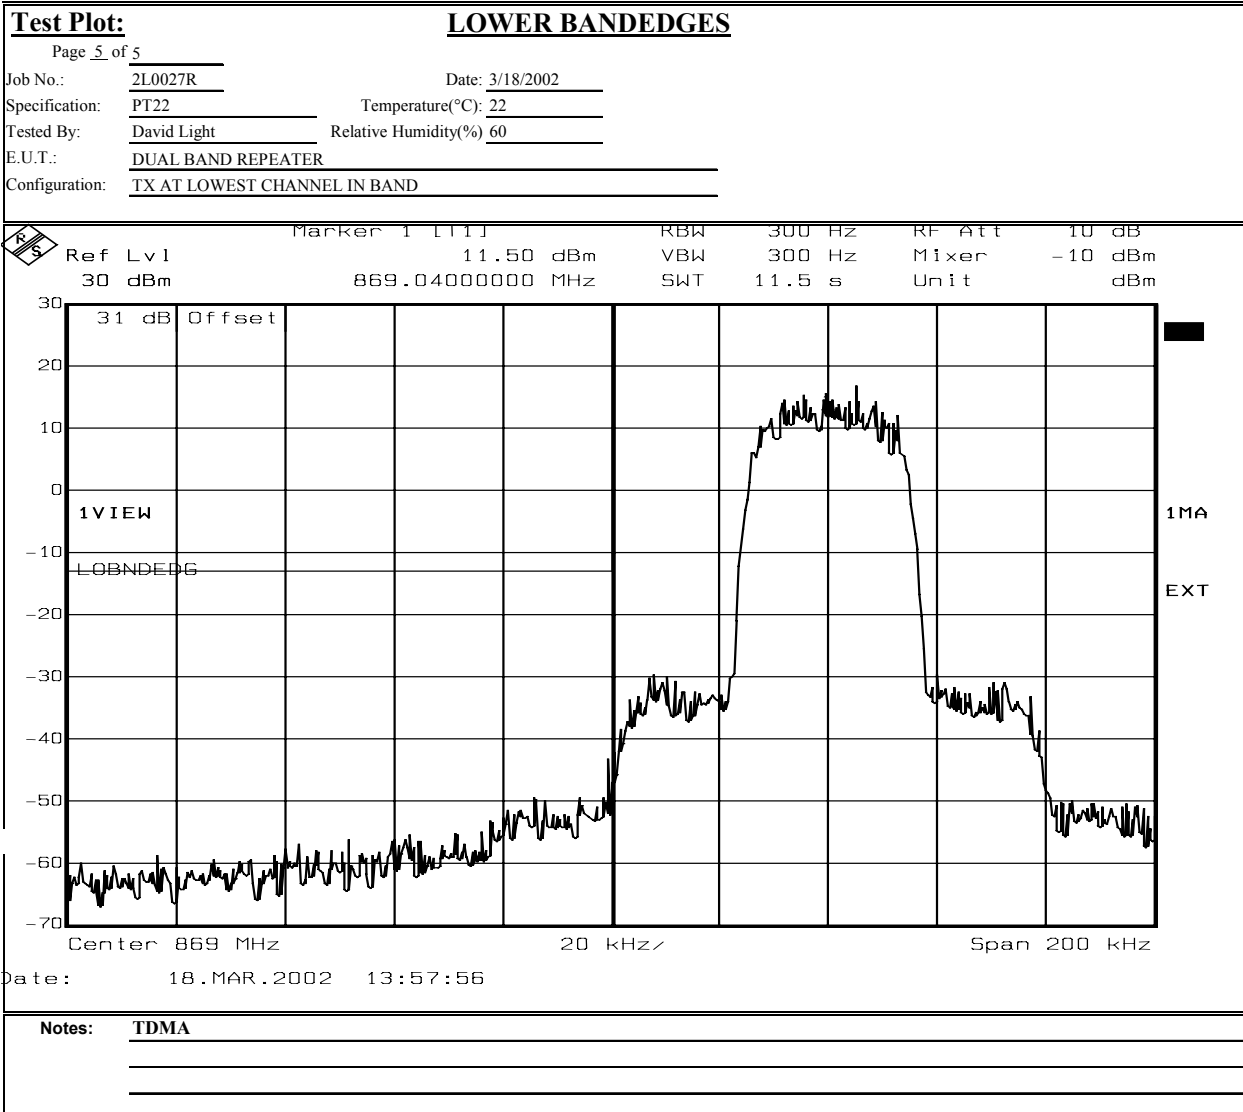802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

EQUIPMENT: Enhanced Remote Antenna Unit
(ERAU)

PROJECT NO.: 2L0027RUS1

Test Data – Spurious Emissions at Antenna Terminals



Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

Data Plot		INTERMODULATION CHARACTERISTICS																								
Page 1 of 6		Complete	X																							
Job No.: 2L0027R	Date: 3/18/2002	Preliminary:																								
Specification: PT22	Temperature(°C): 22																									
Tested By: David Light	Relative Humidity(%): 60																									
E.U.T.: DUAL BAND REPEATER																										
Configuration: TX 2 CARRIERS AT BANDEDGES																										
Sample Number: 1																										
Location: Lab 1	RBW: Refer to plots	Measurement																								
Detector Type: Refer to plot	VBW: Refer to plots	Distance: N/A m																								
Test Equipment Used																										
Antenna:		Directional Coupler:																								
Pre-Amp:		Cable #1:	1627																							
Filter:		Cable #2:	1628																							
Receiver:	1036	Cable #3:	1629																							
Attenuator #1:	1478	Cable #4:																								
Attenuator #2:	1471	Mixer:																								
Additional equipment used:	1052 1051 1092 1053																									
Measurement Uncertainty:	+/-1.7 dB																									
<table border="1"> <thead> <tr> <th>Ref</th> <th>Lvl</th> <th>Marker 2 [T1]</th> <th>RBW</th> <th>20 kHz</th> <th>RF Att</th> <th>10 dB</th> </tr> </thead> <tbody> <tr> <td>30</td> <td>dBm</td> <td>-18.75 dBm</td> <td>VBW</td> <td>300 kHz</td> <td>Mixer</td> <td>-10 dBm</td> </tr> <tr> <td></td> <td></td> <td>894.82164329 MHz</td> <td>SWT</td> <td>125 ms</td> <td>Unit</td> <td>dBm</td> </tr> </tbody> </table>						Ref	Lvl	Marker 2 [T1]	RBW	20 kHz	RF Att	10 dB	30	dBm	-18.75 dBm	VBW	300 kHz	Mixer	-10 dBm			894.82164329 MHz	SWT	125 ms	Unit	dBm
Ref	Lvl	Marker 2 [T1]	RBW	20 kHz	RF Att	10 dB																				
30	dBm	-18.75 dBm	VBW	300 kHz	Mixer	-10 dBm																				
		894.82164329 MHz	SWT	125 ms	Unit	dBm																				
Date: 18.MAR.2002 15:30:09																										
Notes: CDMA - UPPER BANDEDGE 2 CARRIERS																										

EQUIPMENT: Enhanced Remote Antenna Unit
(ERAU)

PROJECT NO.: 2L0027RUS1

Test Data – Spurious Emissions at Antenna Terminals



Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667


Nemko Dallas, Inc.

Data Plot

INTERMODULATION CHARACTERISTICS

Page 2 of 6

Job No.: 2L0027R Date: 3/18/2002
Specification: PT22 Temperature(°C): 22
Tested By: David Light Relative Humidity(%) 60
E.U.T.: DUAL BAND REPEATER
Configuration: TX 2 CARRIERS AT BANDEDGES

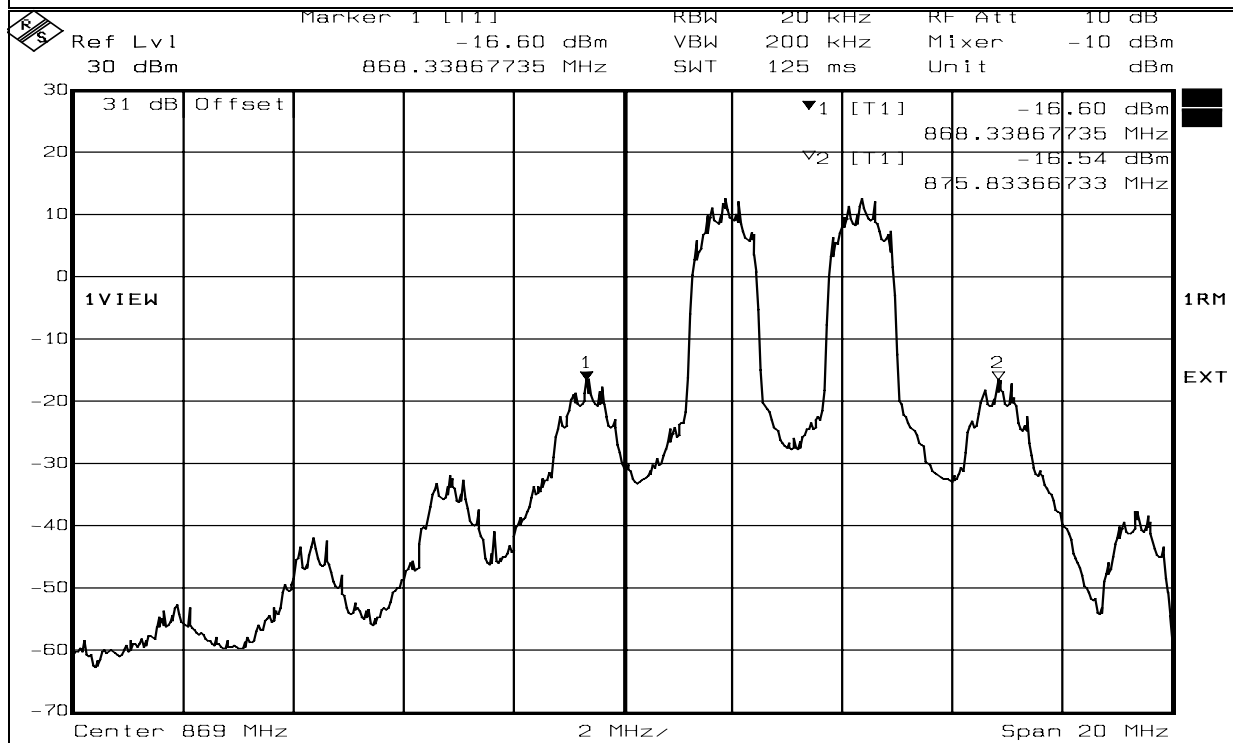

Date: 18.MAR.2002 15:31:37


Notes: CDMA LOWER BANDEDGE
2 CARRIERS

EQUIPMENT: **Enhanced Remote Antenna Unit
(ERAU)**

PROJECT NO.: 2L0027RUS1

Test Data – Spurious Emissions at Antenna Terminals

Nemko Dallas, Inc.

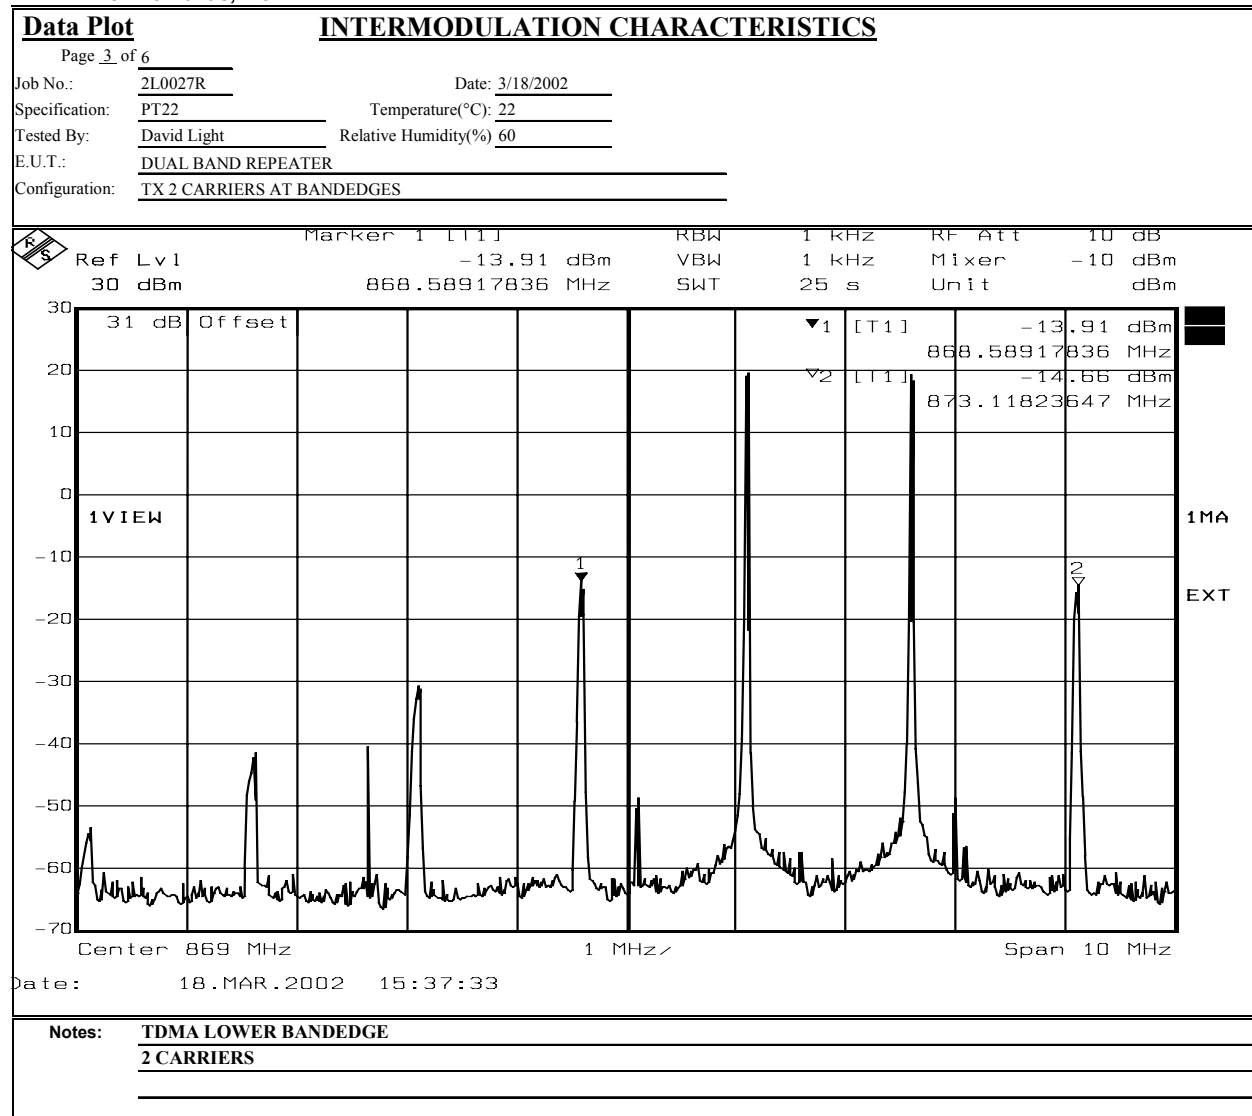Dallas Headquarters:802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

EQUIPMENT: Enhanced Remote Antenna Unit
(ERAU)

PROJECT NO.: 2L0027RUS1


Test Data – Spurious Emissions at Antenna Terminals



Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

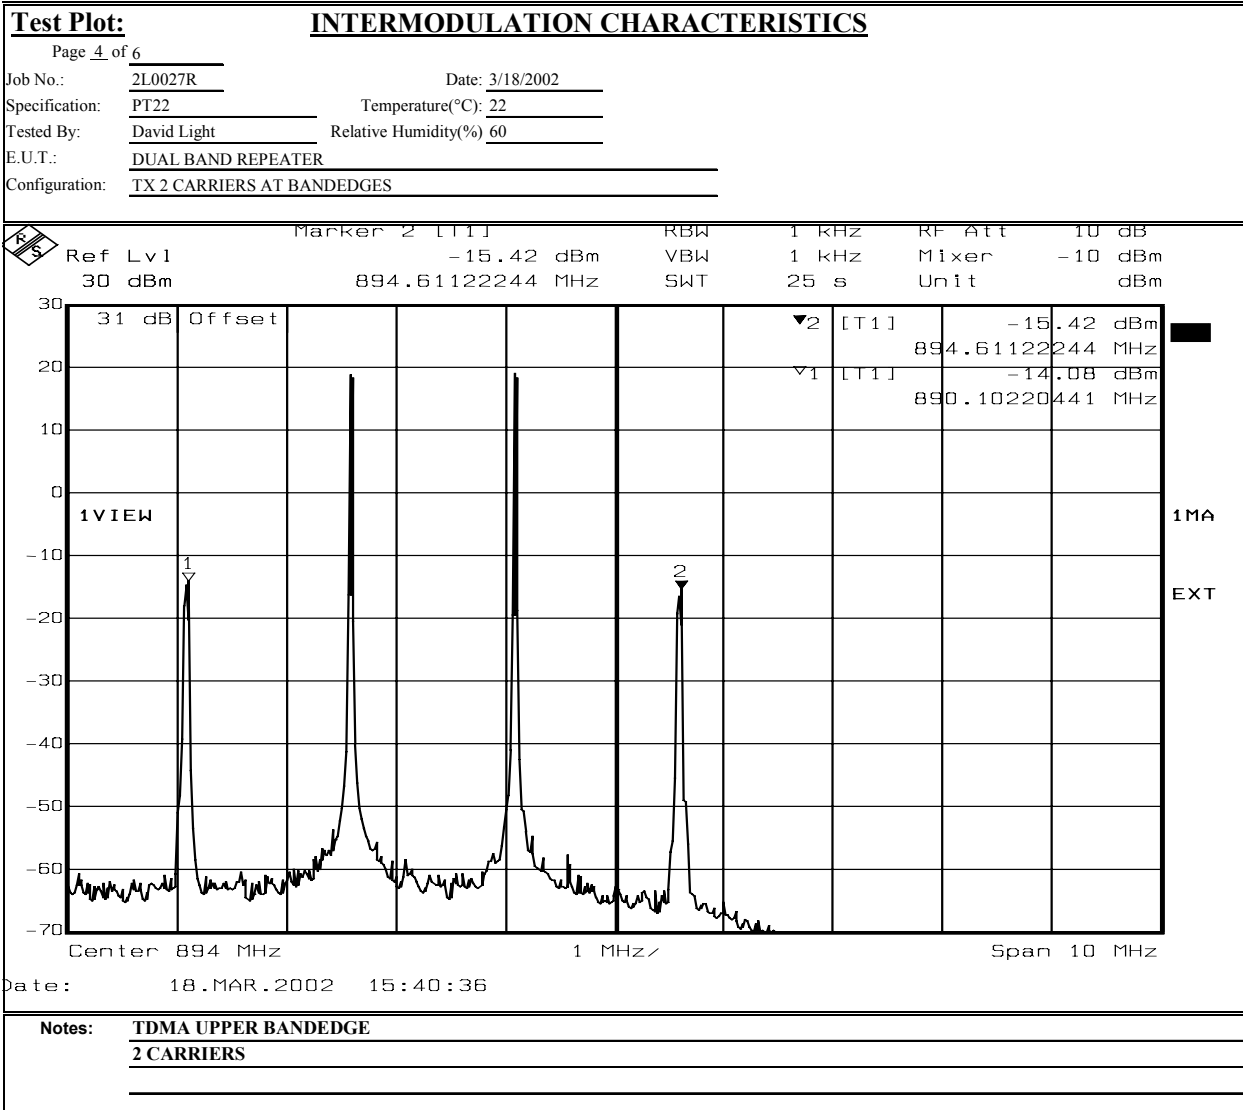

EQUIPMENT: Enhanced Remote Antenna Unit
(ERAU)


PROJECT NO.: 2L0027RUS1

Test Data – Spurious Emissions at Antenna Terminals



Nemko Dallas, Inc.

Dallas Headquarters:

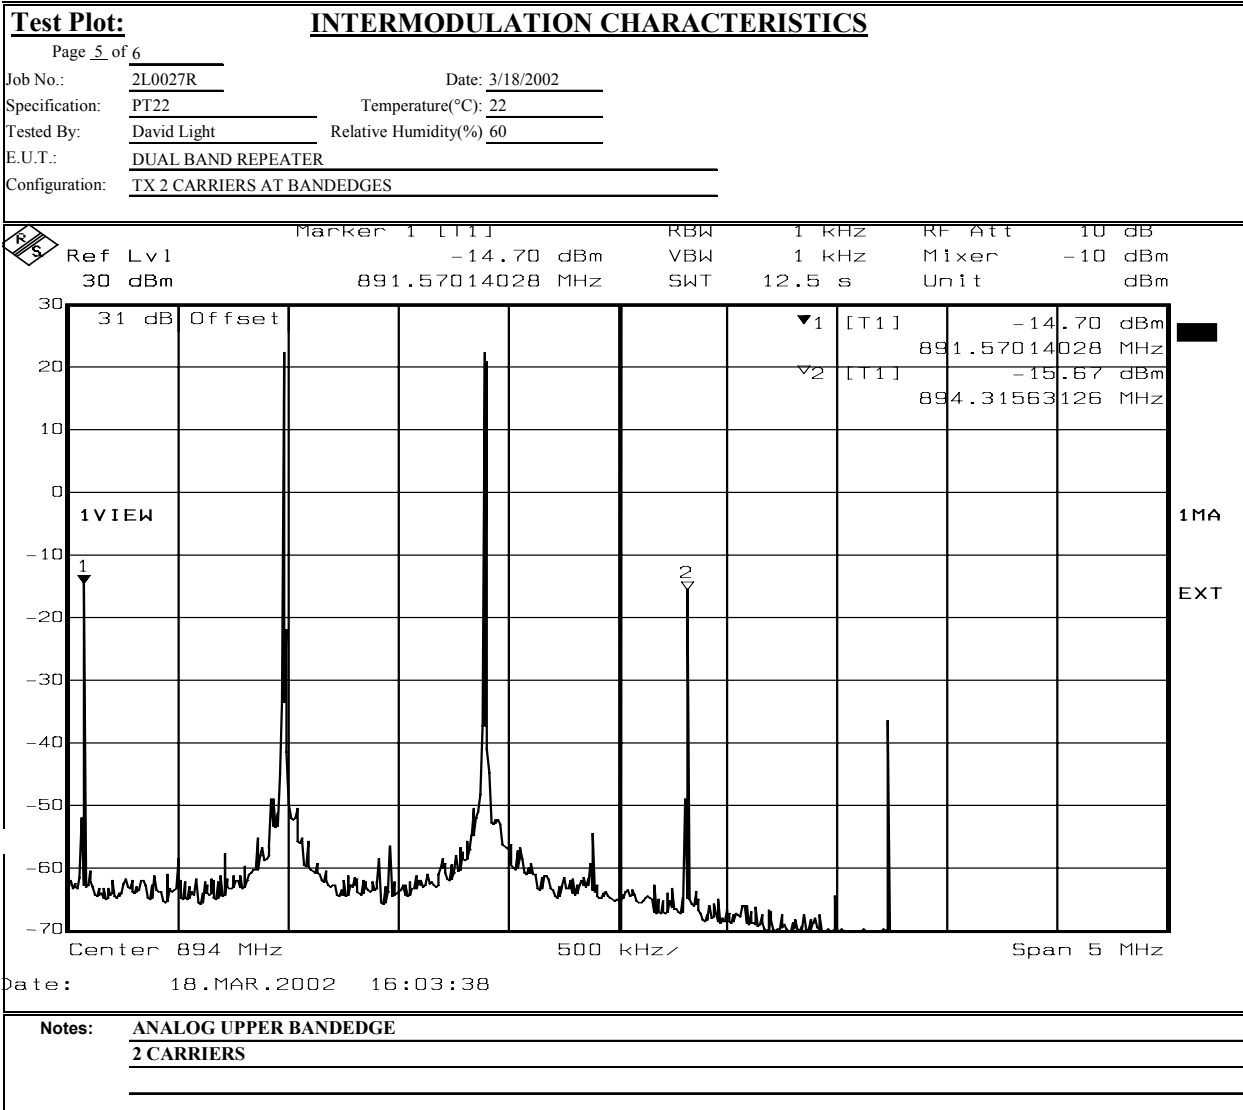802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

EQUIPMENT: Enhanced Remote Antenna Unit
(ERAU)

PROJECT NO.: 2L0027RUS1


Test Data – Spurious Emissions at Antenna Terminals

C



Nemko Dallas, Inc.

Dallas Headquarters:

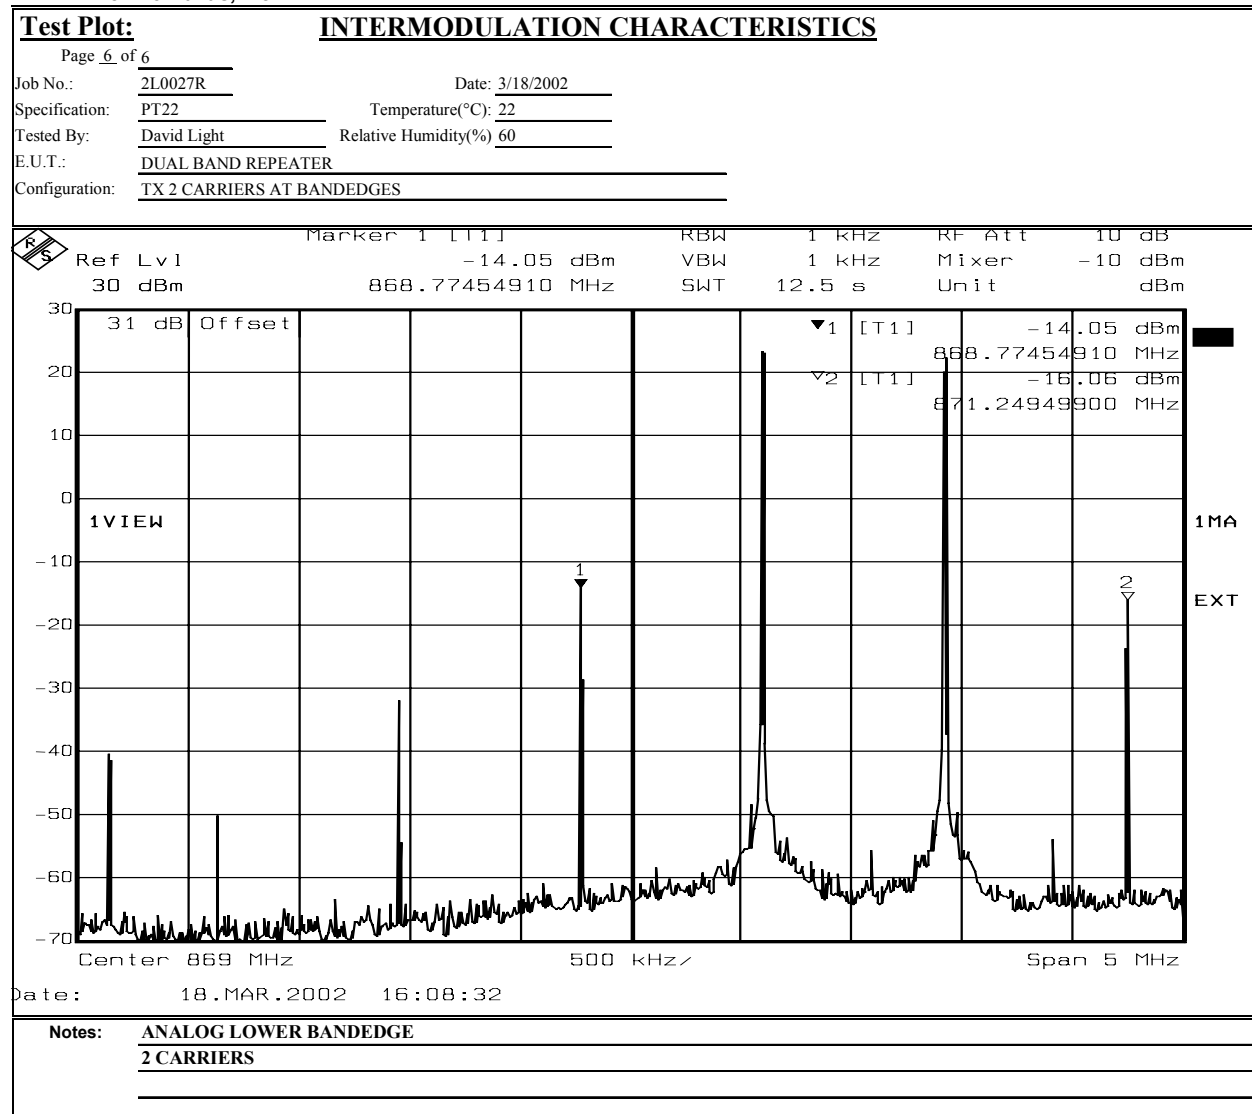802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

EQUIPMENT: [Enhanced Remote Antenna Unit
\(ERAU\)](#)

PROJECT NO.: 2L0027RUS1

Section 6. Field Strength of Spurious

NAME OF TEST: Field Strength of Spurious	PARA. NO.: 2.1053
TESTED BY: David Light	DATE: 3/19/2002

Test Results: [Complies.](#)

Test Data: [See attached table.](#)

Measurement Uncertainty: +/- [3.6](#) dB

EQUIPMENT: Enhanced Remote Antenna Unit
(ERAU)

PROJECT NO.: 2L0027RUS1

Test Data - Field Strength of Spurious Emissions



Nemko Dallas, Inc.

Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Field Strength of Spurious Emissions

Page 1 of 1

Job No.: 2L0027R Date: 3/19/2002 Complete X
Preliminary _____

Specification: PT22 Temperature(°C): 20
Tested By: David Light Relative Humidity(%) 60
E.U.T.: DUAL BAND REPEATER

Configuration: TX @ 880 MHz
Sample No: 1

Location: AC 3 RBW: 1 MHz Measurement
Detector Type: Peak VBW: 1 MHz Distance: 3 m

Test Equipment Used

Antenna: 1304 Directional Coupler: _____
Pre-Amp: 1016 Cable #1: 1484
Filter: _____ Cable #2: 1485
Receiver: 1464 Cable #3: _____
Attenuator #1: _____ Cable #4: _____
Attenuator #2: _____ Mixer: _____
Additional equipment used: _____
Measurement Uncertainty: +/-3.6 dB

Frequency (MHz)	Meter Reading (dBm)	Correction Factor (dB)		Pre-Amp Gain (dB)	Substitution Antenna Gain (dBd)		ERP (dBm)	ERP (mW)	Polarity	Comments
1760	-47.3	31.0		33.3	7.3		-42.4	0.0001	V	
2640	-56.0	35.5		33.8	8.0		-46.4	0.0000	V	
3520	-62.0	43.3		33.6	8.6		-43.7	0.0000	V	Noise floor
4400	-62.0	45.3		33.5	8.2		-42.0	0.0001	V	
8800	-65.0	44.8		34.3	9.4		-45.1	0.0000	V	Noise floor
1760	-54.0	33.0		33.3	7.3		-47.1	0.0000	H	
2640	-58.6	35.5		33.8	8.0		-49.0	0.0000	H	
3520	-62.0	35.5		33.6	8.6		-51.6	0.0000	H	Noise floor
4400	-64.0	34.8		33.5	8.2		-54.5	0.0000	H	Noise floor
8800	-65.0	42.2		34.3	9.4		-47.8	0.0000	H	Noise floor

Notes: Scanned spectrum to the tenth harmonic

EQUIPMENT: [Enhanced Remote Antenna Unit
\(ERAU\)](#)

PROJECT NO.: 2L0027RUS1

Test Setup – Field strength of Spurious Emissions
Front



Rear



EQUIPMENT: Enhanced Remote Antenna Unit
(ERAU)

PROJECT NO.: 2L0027RUS1

Section 7. Test Equipment List

Nemko ID	Description	Manufacturer Model Number	Serial Number	Calibration Date
1304	HORN ANTENNA	ELECTRO METRICS RGA-60	6151	07/30/01
1464	Spectrum analyzer	Hewlett Packard 8563E	3551A04428	01/02/01
1484	Cable 2.0-18.0 Ghz	Storm PR90-010-072	N/A	06/01/01
1485	Cable 2.0-18.0 Ghz	Storm PR90-010-216	N/A	06/01/01
1036	SPECTRUM ANALYZER	ROHDE & SCHWARZ FSEK30	830844/006	12/18/01
1052	I/Q MODULATION GENERATOR	Rhode & Schwarz AMIQ	DE30619	09/25/00
1051	Radio Communication Analyzer	Rhode & Schwarz CMTA-54	835875/002	CBU
1478	20db Attenuator DC 18 Ghz	MCL Inc. BW-S20W6	NONE	CBU
1471	10 db Attenuator DC 18 Ghz	MCL Inc. BW-S10W2 10db-2WDC	NONE	CBU
1628	CABLE, 6 ft	MEGAPHASE TM26 S1S5 72	N/A	CBU
1627	CABLE, 5 ft	MEGAPHASE 10312 1GVT4	N/A	CBU
1629	CABLE, 6 ft	MEGAPHASE 10311 1GVT4	N/A	CBU
1092	COMBINER	MINI-CIRCUITS ZA3PD-1.5	NONE	CBU
1053	SIGNAL GENERATOR	ROHDE & SCHWARZ SMIQ 03	DE22081	08/09/01

EQUIPMENT: [Enhanced Remote Antenna Unit
\(ERAU\)](#)

PROJECT NO.: 2L0027RUS1

ANNEX A - TEST DETAILS

EQUIPMENT: Enhanced Remote Antenna Unit
(ERAU)

PROJECT NO.: 2L0027RUS1

NAME OF TEST: RF Power Output**PARA. NO.: 2.1046**

Minimum Standard: Para. No. 22.913(a). The maximum effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 watts.

Method Of Measurement:Detachable Antenna:

The peak power at antenna terminals is measured using an in-line peak power meter. Power output is measured with the maximum rated input level.

Integral Antenna:

If the antenna is not detachable from the circuit then the Peak Power Output is derived from the peak radiated field strength of the fundamental emission by using the plane wave relation $GP/4\pi R^2 = E^2/120\pi$ and proceeding as follows:

$$P = \frac{E^2 R^2}{30G} = \frac{E^2 3^2}{30G}$$

where,

P = the equivalent isotropic radiated power in watts

E = the maximum measured field strength in V/m

R = the measurement range (3 meters)

G = the numeric gain of the transmit antenna in relation to an isotropic radiator

EQUIPMENT: Enhanced Remote Antenna Unit
(ERAU)

PROJECT NO.: 2L0027RUS1

NAME OF TEST: Occupied Bandwidth (Voice & SAT) PARA. NO.: 2.1049

Minimum Standard: 22.917(c) The mean power of any emission removed from the carrier frequency by a displacement frequency (f_d in kHz) must be attenuated below the mean power of the unmodulated carrier (P) as follows:

- (i) On any frequency removed from the carrier frequency by more than 12 kHz but not more than 20 kHz:

at least $117 \log(f_d/12)$

- (ii) On any frequency removed from the carrier frequency by more than 20 kHz, up to the first multiple of the carrier frequency:

at least $100 \log(f_d/11)$ dB or $43 + 10 \log(P)$ dB, whichever is the lesser attenuation.

Method Of Measurement:

Spectrum Analyzer Settings:

RBW: 300 Hz
VBW: $\geq$ RBW
Span: 100 kHz
Sweep: Auto

Input Signal Characteristics (F3E/F3D):

RF level: Maximum recommended by manufacturer
AF1 frequency: 6 kHz
AF1 level: sufficient to produce 2 kHz deviation
AF2 frequency: 2.5 kHz
AF2 level: sufficient to produce 12 kHz deviation.

EQUIPMENT: Enhanced Remote Antenna Unit
(ERAU)

PROJECT NO.: 2L0027RUS1

NAME OF TEST: Occupied Bandwidth (WB Data)**PARA. NO.: 2.1049**

Minimum Standard: 22.917(c) The mean power of any emission removed from the carrier frequency by a displacement frequency (f_d in kHz) must be attenuated below the mean power of the unmodulated carrier (P) as follows:

(1) On any frequency removed from the carrier frequency by more than 20 kHz but not more than 45 kHz:

at least 26 dB

(2) On any frequency removed from the carrier frequency by more than 45 kHz but not more than 90 kHz:

at least 45 dB

(3) On any frequency removed from the carrier frequency by more than 90 kHz, up to the first multiple of the carrier frequency:

at least 60 dB or $43 + 10 \log (P)$ dB, whichever is the lesser attenuation.

Method Of Measurement:

Spectrum Analyzer Settings:

RBW: 300 Hz

VBW: $\geq$ RBW

Span: 200 kHz

Sweep: Auto

Input Signal Characteristics:

RF level: Maximum recommended by manufacturer

AF1 frequency: 10 kHz, random bit sequence

AF1 level: sufficient to produce 8 kHz deviation

EQUIPMENT: Enhanced Remote Antenna Unit
(ERAU)

PROJECT NO.: 2L0027RUS1

NAME OF TEST: Occupied Bandwidth (ST)**PARA. NO.: 2.1049**

Minimum Standard: 22.917(c) The mean power of any emission removed from the carrier frequency by a displacement frequency (f_d in kHz) must be attenuated below the mean power of the unmodulated carrier (P) as follows:

(1) On any frequency removed from the carrier frequency by more than 20 kHz but not more than 45 kHz:

at least 26 dB

(2) On any frequency removed from the carrier frequency by more than 45 kHz but not more than 90 kHz:

at least 45 dB

(3) On any frequency removed from the carrier frequency by more than 90 kHz, up to the first multiple of the carrier frequency:

at least 60 dB or $43 + 10 \log (P)$ dB, whichever is the lesser attenuation.

Method Of Measurement:

Spectrum Analyzer Settings:

RBW: 300 Hz

VBW: $\geq$ RBW

Span: 200 kHz

Sweep: Auto

Input Signal Characteristics:

RF level: Maximum recommended by manufacturer

AF1 frequency: 10 kHz tone

AF1 level: sufficient to produce 8 kHz deviation

EQUIPMENT: Enhanced Remote Antenna Unit
(ERAU)

PROJECT NO.: 2L0027RUS1

NAME OF TEST: Occupied Bandwidth (Digital Modulation)	PARA. NO.: 2.1049
--	--------------------------

Minimum Standard: Not defined by FCC. Input vs. Output.

Method Of Measurement:

Spectrum Analyzer Settings:

RBW: CDMA (30 kHz), GSM (30 kHz), NADC (1 kHz) and CDPD (1 kHz)

VBW: $\geq$ RBW

Span: As required

Sweep: Auto

Input Signal Characteristics:

RF level: Maximum recommended by manufacturer

EQUIPMENT: Enhanced Remote Antenna Unit
(ERAU)

PROJECT NO.: 2L0027RUS1

**NAME OF TEST: Spurious Emission at Antenna
Terminals****PARA. NO.: 2.1051**

Minimum Standard: Para. No. 22.917(e). The mean power of emissions must be attenuated below the mean power of the unmodulated carrier on any frequency twice or more than twice the fundamental emission by at least $43 + 10 \log P$. This is equivalent to -13 dBm absolute power.

Method Of Measurement:Spectrum Analyzer Settings:

RBW: 30 kHz (AMPS). As required for digital modulations.

VBW: $\geq$ RBW

Start Frequency: 0 MHz

Stop Frequency: 10 GHz

Sweep: Auto

EQUIPMENT: Enhanced Remote Antenna Unit
(ERAU)

PROJECT NO.: 2L0027RUS1

NAME OF TEST: Field Strength of Spurious Radiation	PARA. NO.: 2.1053
---	--------------------------

Minimum Standard: Para. No. 22.917(e). The mean power of emissions must be attenuated below the mean power of the unmodulated carrier on any frequency twice or more than twice the fundamental emission by at least $43 + 10 \log P$. This is equivalent to -13 dBm absolute power.

Test Method: TIA/EIA-603-1992, Section 2.2.12

The antenna substitution method was used to determine the equivalent radiated power at spurious frequencies. The spurious emissions were measured at a distance of 3 meters. The EUT was then replaced with a reference substitution antenna with a known gain referenced to a dipole. This antenna was fed with a signal at the spurious frequency. The level of the signal was adjusted to repeat the previously measured level. The resulting erp is the signal level fed to the reference antenna corrected for gain referenced to a dipole.

The spectrum is searched to the 10th harmonic.

EQUIPMENT: Enhanced Remote Antenna Unit
(ERAU)

PROJECT NO.: 2L0027RUS1

NAME OF TEST: Frequency Stability**PARA. NO.: 2.1055**

Minimum Standard: Para. No. 22.355. The transmitter carrier frequency shall remain within the tolerances given in Table C-1.

Table C-1

Freq. Range (MHz)	Base, fixed	Mobile > 3 W	Mobile ≤ 3 W
821 to 896	1.5	2.5	2.5

Method Of Measurement:Frequency Stability With Voltage Variation:

The E.U.T. is placed in an environmental chamber and allowed to stabilize at +20 degrees Celsius for at least 15 minutes. The frequency counter and signal generator are phase locked with the same 10 MHz reference frequency by connecting the 10 MHz ref. out of the counter to the 10 MHz ref, in of the signal generator. With the voltage input to the E.U.T. set to 85% S.T.V., the frequency is measured in 30 second intervals for a period of 5 minutes. This procedure is repeated at 100% S.T.V. and 115% S.T.V.

Frequency Stability With Temperature Variation:

The input voltage to the E.U.T. is set to S.T.V. and the temperature of the environmental chamber is varied in 10 degree steps from -30 degrees C to +50 degrees C. The E.U.T. is allowed to stabilize at each temperature and the frequency is measured in 30 second intervals for a period of 5 minutes.

EQUIPMENT: [Enhanced Remote Antenna Unit
\(ERAU\)](#)


PROJECT NO.: 2L0027RUS1

ANNEX B - TEST DIAGRAMS


EQUIPMENT: [Enhanced Remote Antenna Unit
\(ERAU\)](#)

PROJECT NO.: 2L0027RUS1

Para. No. 2.1046 - R.F. Power Output

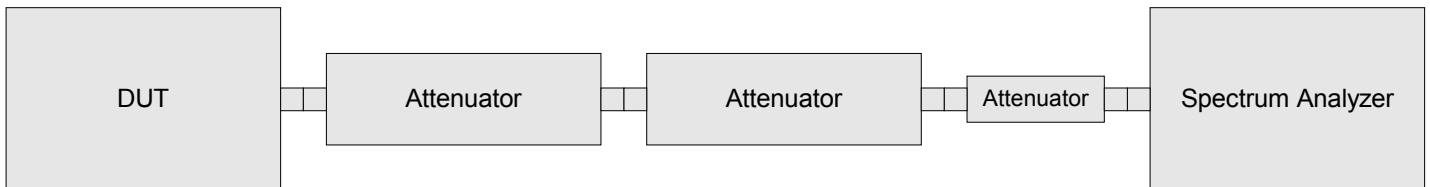


Para. No. 2.1049 - Occupied Bandwidth

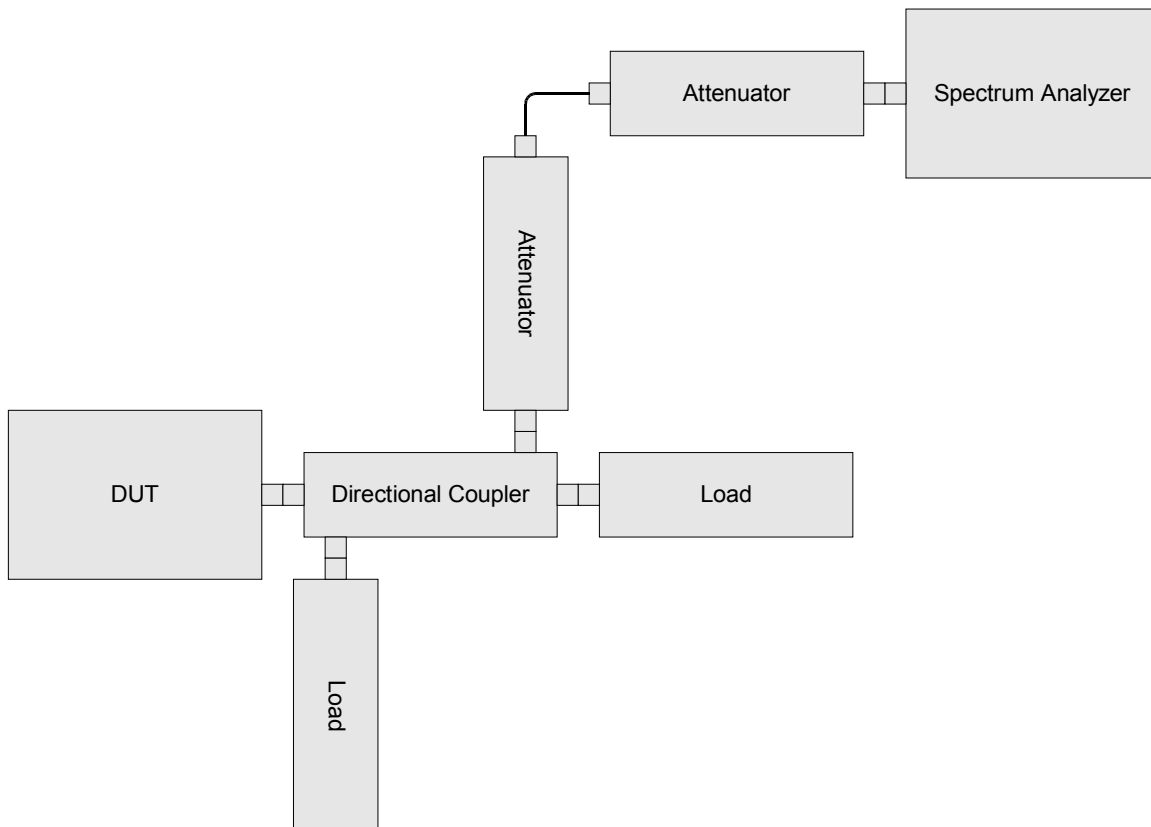

EQUIPMENT: [Enhanced Remote Antenna Unit
\(ERAU\)](#)


PROJECT NO.: 2L0027RUS1

Para. No. 2.1051 Spurious Emissions at Antenna Terminals

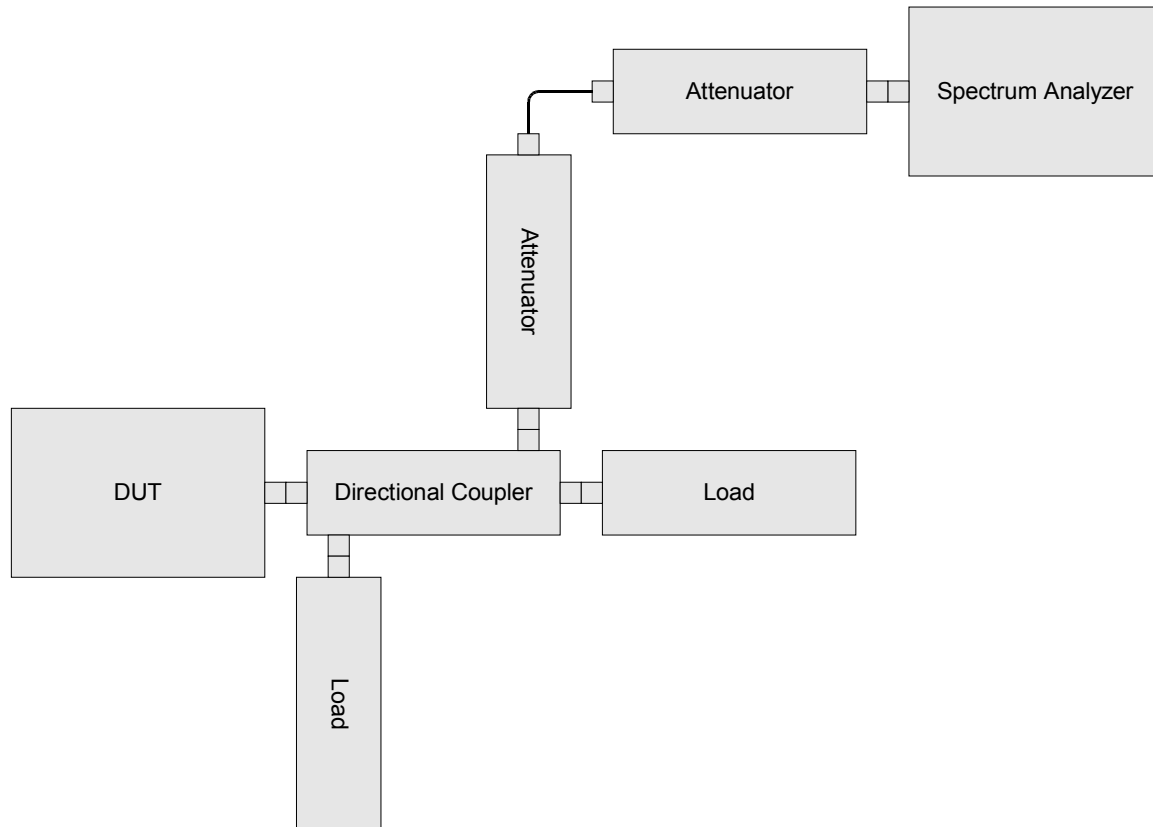

EQUIPMENT: [Enhanced Remote Antenna Unit
\(ERAU\)](#)


PROJECT NO.: 2L0027RUS1

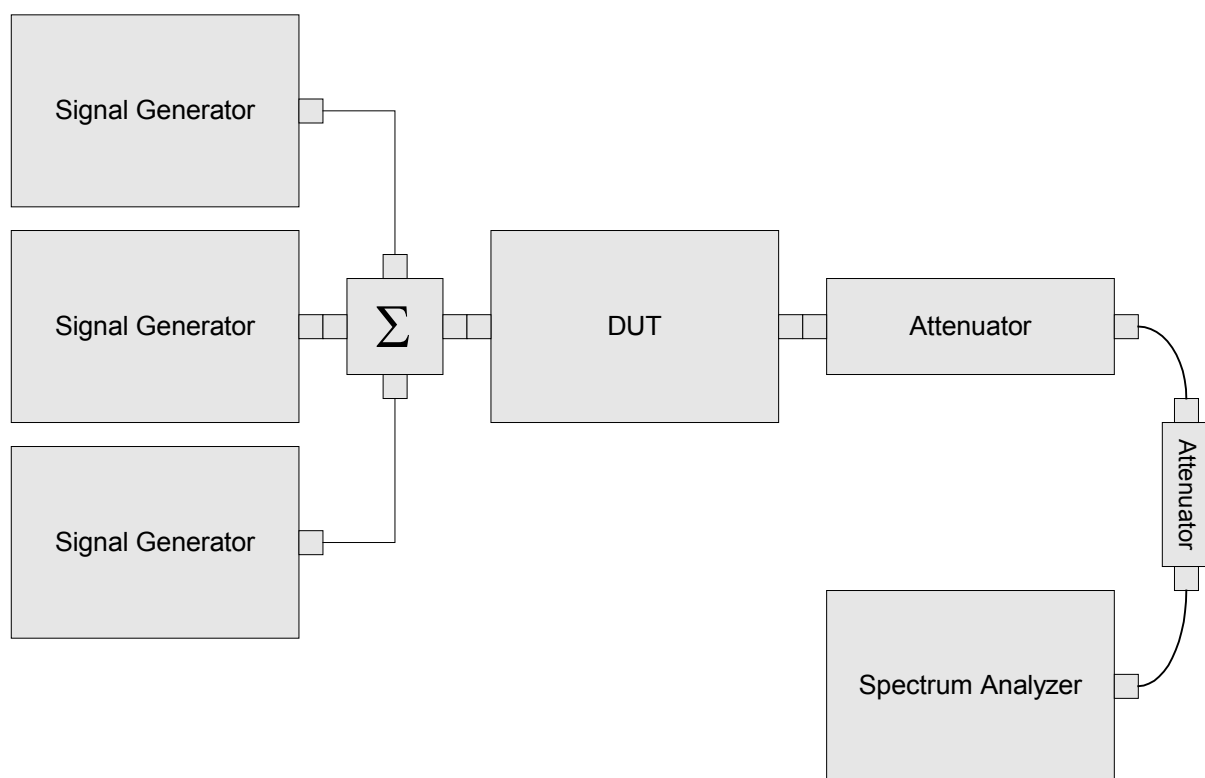

EQUIPMENT: Enhanced Remote Antenna Unit
(ERAU)


PROJECT NO.: 2L0027RUS1

Para. No. 2.1053 - Field Strength of Spurious Radiation

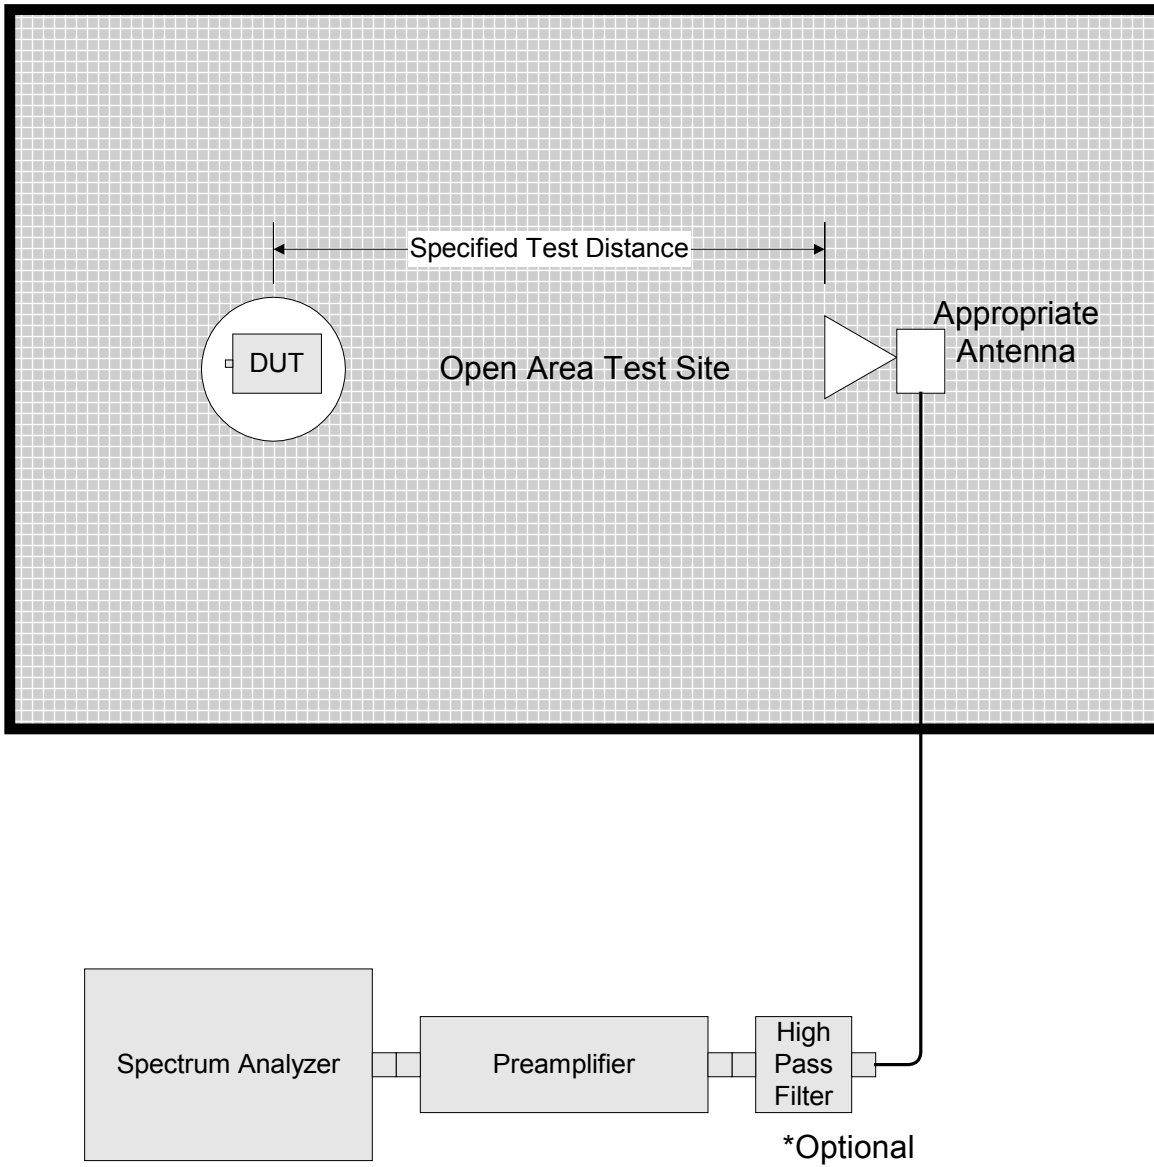

EQUIPMENT: Enhanced Remote Antenna Unit
(ERAU)

PROJECT NO.: 2L0027RUS1

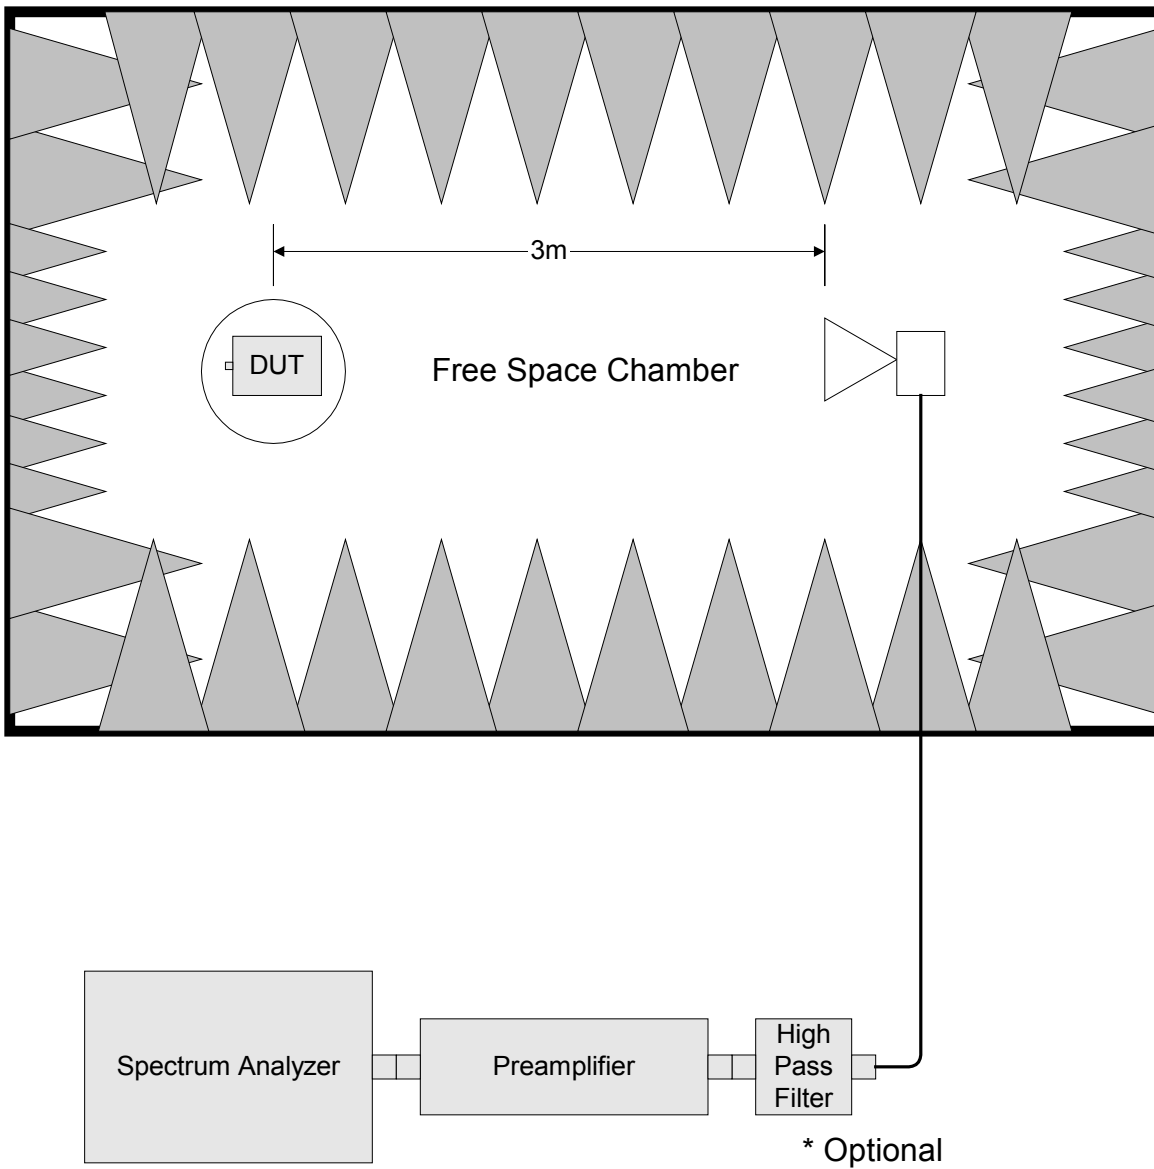

EQUIPMENT: Enhanced Remote Antenna Unit
(ERAU)

PROJECT NO.: 2L0027RUS1

Para. No. 2.1055 - Frequency Stability

