

# WLS929


## Wireless Key

### OPERATING INSTRUCTIONS

The WLS929 wireless key allows you to arm and disarm your alarm system, as well as perform other keypad functions, from a unit small enough to keep in your pocket.

Together with your installer, you can decide which functions you wish to have accessible from your portable key.

To activate any one of the four selected functions, press and hold the appropriate button for two seconds. Your installer will indicate each function by applying a circular label on the rear of the unit or by installing pre-printed buttons.

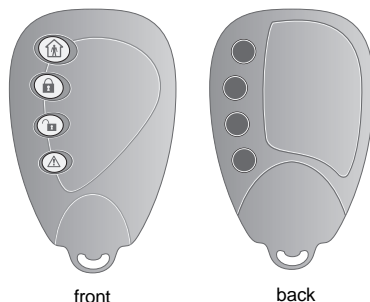

***Signals will not be received if the key is not within the range of the wireless receiver.***

**The default functions are as follows:**



#### **Stay Arming**

Press this button to arm your system in the Stay mode. All perimeter zones will be armed, such as all window and door contacts, but the interior zones will remain inactive, allowing you to stay on the premises without setting off an alarm.



#### **Away Arming**

Press this button to arm your system in the Away mode. Both the interior and exterior zones will be armed, allowing you to exit the premises.



#### **Disarm**

Press this button to disarm your system. You do not have to enter your access code when you use the key to disarm the system.



#### **Panic**

Press this button to notify your central monitoring station of a situation requiring the police, such as a break-in.

**Other available functions (to be programmed by the installer):**

- Fire
- Auxiliary
- No-Entry Delay Arming
- Chime ON/OFF
- System Test
- Command Outputs 1, 3, 4
- Command Output 2
- Quick Exit
- Reactivate Stay/Aways

***Please discuss these options with your installer in order to program the best possible combination to suit your needs.***


---

## Testing the WLS929 Key

To test the batteries on your key, press and hold one of the arm or disarm buttons for five seconds. If the batteries are low, the Trouble light on any of your system's keypads will turn ON. If the Trouble light turns ON, the key's batteries must be replaced.

**NOTE: Pressing another button after completing the test may clear the trouble condition. The key's batteries must still be replaced.**

**Do not use a Fire, Auxiliary or Panic key to test your WLS929 unit as pressing these buttons will *always* notify your monitoring station of a non-medical emergency.**



To replace the batteries, remove the screw on the back of the key and carefully separate the two sides of the key's plastic casing. Remove the old batteries from between the two metal clips. Insert the new batteries according to the diagram at right and reattach the two sides of the key's plastic casing. The WLS929 requires three batteries of type LR44.

**NOTE: The polarity of the batteries must be observed.**

## LIMITED WARRANTY

Digital Security Controls Ltd. warrants that for a period of twelve months from the date of purchase, the product shall be free of defect in materials and workmanship under normal use and that in fulfilment of any breach of such warranty, Digital Security Controls Ltd. shall, at its option, repair or replace the defective equipment upon return of the equipment to its repair depot. This warranty applies only to defects in parts and workmanship and not to damage incurred in shipping or handling, or damage due to causes beyond the control of Digital Security Controls Ltd. such as lightning, excessive voltage, mechanical shock, water damage, or damage arising out of abuse, alteration or improper application of the equipment.

The foregoing warranty shall apply only to the original buyer, and is and shall be in lieu of any and all other warranties, whether expressed or implied and of all other obligations or liabilities on the part of Digital Security Controls Ltd. This warranty contains the entire warranty. Digital Security Controls Ltd. neither assumes, nor authorizes any other person purporting to act on its behalf to modify or to change this warranty, nor to assume for it any other warranty or liability concerning this product.

In no event shall Digital Security Controls Ltd. be liable for any direct, indirect or consequential damages, loss of anticipated profits, loss of time or any other losses incurred by the buyer in connection with the purchase, installation or operation or failure of this product.

**WARNING: Digital Security Controls Ltd. recommends that the entire system be completely tested on a regular basis. However, despite frequent testing, and due to, but not limited to, criminal tampering or electrical disruption, it is possible for this product to fail to perform as expected.**

## FCC COMPLIANCE STATEMENT

**CAUTION:** Changes or modifications not expressly approved by Digital Security Controls Ltd. could void your authority to use this equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Re-orient the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/television technician for help.

The user may find the following booklet prepared by the FCC useful: "How to Identify and Resolve Radio/Television Interference Problems". This booklet is available from the U.S. Government Printing Office, Washington D.C. 20402, Stock # 004-000-00345-4.

Digital Security Controls Ltd. 160 Washburn St., Lockport, NY 14094

This device complies with RSS-210 of Industry Canada. Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Ce dispositif satisfait aux exigences d'Industrie Canada, prescrites dans le document CNR-210. son utilisation est autorisée seulement aux conditions suivantes: (1) il ne doit pas produire de brouillage et (2) l'utilisateur du dispositif doit être prêt à accepter tout brouillage radioélectrique reçu, même si ce brouillage est susceptible de compromettre le fonctionnement du dispositif.