



TEST REPORT

No. I18Z60820-WMD03

for

Wingtech Group (Hong Kong) Limited

Muti-band GSM/WCDMA/LTE phone with Bluetooth.WLAN

Model Name: VFD 525

FCC ID: 2APXWVFD525

with

Hardware Version: 88909_1_12

Software Version: VFD-525-ZA-B23

Issued Date: 2018-06-20



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn

REPORT HISTORY

| Report Number | Revision | Description | Issue Date |
|----------------------|-----------------|--------------------|-------------------|
| I18Z60820-WMD03 | Rev.0 | 1st edition | 2018-06-20 |



CONTENTS

| | |
|---|-----------|
| 1. TEST LABORATORY | 4 |
| 1.1. TESTING LOCATION | 4 |
| 1.2. TESTING ENVIRONMENT | 4 |
| 1.3. PROJECT DATA | 4 |
| 1.4. SIGNATURE..... | 4 |
| 2. CLIENT INFORMATION | 5 |
| 2.1. APPLICANT INFORMATION..... | 5 |
| 2.2. MANUFACTURER INFORMATION..... | 5 |
| 3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) | 6 |
| 3.1. ABOUT EUT..... | 6 |
| 3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST | 6 |
| 3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST..... | 6 |
| 3.4. GENERAL DESCRIPTION | 6 |
| 4. REFERENCE DOCUMENTS..... | 7 |
| 4.1. REFERENCE DOCUMENTS FOR TESTING..... | 7 |
| 5. LABORATORY ENVIRONMENT..... | 8 |
| 6. SUMMARY OF TEST RESULTS..... | 9 |
| 6.1. SUMMARY OF TEST RESULTS | 9 |
| 6.2. STATEMENTS..... | 10 |
| 7. TEST EQUIPMENTS UTILIZED..... | 11 |
| ANNEX A: MEASUREMENT RESULTS | 12 |
| A.1 OUTPUT POWER | 12 |
| A.2 EMISSION LIMIT | 18 |
| A.3 FREQUENCY STABILITY | 22 |
| A.4 OCCUPIED BANDWIDTH..... | 24 |
| A.5 EMISSION BANDWIDTH | 29 |
| A.6 BAND EDGE COMPLIANCE..... | 34 |
| A.7 CONDUCTED SPURIOUS EMISSION | 38 |
| A.8 PEAK-TO-AVERAGE POWER RATIO | 40 |
| ANNEX B: ACCREDITATION CERTIFICATE | 41 |

1. Test Laboratory

1.1. Testing Location

Location 1: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China 100191

Location 2: CTTL(Shouxiang)

Address: No. 51 Shouxiang Science Building, Xueyuan Road,
Haidian District, Beijing, P. R. China 100191

1.2. Testing Environment

Normal Temperature: 15-35°C

Relative Humidity: 20-75%

1.3. Project data

Testing Start Date: 2018-05-09

Testing End Date: 2018-06-19

1.4. Signature



Dong Yuan
(Prepared this test report)



Zhou Yu
(Reviewed this test report)



Zhao Hui Lin
Deputy Director of the laboratory
(Approved this test report)



2. Client Information

2.1. Applicant Information

Company Name: Wingtech Group (Hong Kong) Limited
Address /Post: Flat/RM 1903, 19/F, Podium Plaza 5 Hanoi Road, Tsim Sha Tsui
Kowloon, Hong Kong
Contact: NA
Email: NA
Telephone: NA
Fax: NA

2.2. Manufacturer Information

Company Name: Wingtech Group (Hong Kong) Limited
Address /Post: Flat/RM 1903, 19/F, Podium Plaza 5 Hanoi Road, Tsim Sha Tsui
Kowloon, Hong Kong
Contact: NA
Email: NA
Telephone: NA
Fax: NA

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

| | |
|-------------------------|---|
| Description | Muti-band GSM/WCDMA/LTE phone with Bluetooth.WLAN |
| Model Name | VFD 525 |
| FCC ID | 2APXWVFD525 |
| Antenna | Embedded |
| Output power | 23.99dBm maximum EIRP measured for Band 7 |
| Extreme vol. Limits | 3.6VDC to 4.4VDC (nominal: 3.85VDC) |
| Extreme temp. Tolerance | 0°C to +55°C |

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

3.2. Internal Identification of EUT used during the test

| EUT ID* | IMEI | HW Version | SW Version | Date of receipt |
|----------------|-----------------|-------------------|-------------------|------------------------|
| UT30a | 356984090008975 | 88909_1_12 | VFD-525-ZA-B23 | 2018-05-09 |
| UT63a | 356984090006946 | 88909_1_12 | VFD-525-ZA-B23 | 2018-05-09 |

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

| AE ID* | Description |
|---------------|--|
| AE1 | Battery |
| AE2 | charger |
| AE3 | charger |
| AE1 | |
| Model | Li-ion Polymer, Built-in battery |
| Manufacturer | Jiade Energy Technology (Zhuhai) Co., Ltd. |
| Capacitance | 2800mAh |
| AE2 | |
| Model | A103-050100U-EU1 |
| Manufacturer | DongGuan AoHai Power Technology Co., Ltd |
| AE3 | |
| Model | A103A-050100U-US1 |
| Manufacturer | DongGuan AoHai Power Technology CO., Ltd |

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

The Equipment Under Test (EUT) is a model of Muti-band GSM/WCDMA/LTE phone with Bluetooth.WLAN with embedded antenna. Manual and specifications of the EUT were provided to fulfil the test.



4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

| Reference | Title | Version |
|------------------|---|-----------------|
| FCC Part 27 | MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES | 10-1-17 Edition |
| ANSI/TIA-603-E | Land Mobile FM or PM Communications Equipment Measurement and Performance Standards | 2016 |
| TIA-102.CAAA-E | DIGITAL C4FMCQPSK TRANSCEIVER MEASUREMENT METHODS | 2016 |
| ANSI C63.26 | American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services | 2015 |
| KDB 971168 D01 | Measurement Guidance for Certification of Licensed Digital Transmitters | v03 |

5. LABORATORY ENVIRONMENT

Control room / conducted chamber did not exceed following limits along the EMC testing:

| | |
|--------------------------|----------------------------|
| Temperature | Min. = 15 °C, Max. = 35 °C |
| Relative humidity | Min. = 20 %, Max. = 80 % |
| Shielding effectiveness | > 110 dB |
| Electrical insulation | >2 MΩ |
| Ground system resistance | < 0.5 Ω |

Fully-anechoic chamber 2 (8.6 meters X 6.1 meters X 3.85 meters) did not exceed following limits along the EMC testing:

| | |
|---|---|
| Temperature | Min. = 15 °C, Max. = 30 °C |
| Relative humidity | Min. = 35 %, Max. = 60 % |
| Shielding effectiveness | > 110 dB |
| Electrical insulation | >2 MΩ |
| Ground system resistance | < 1 Ω |
| Site voltage standing-wave ratio (S_{VSWR}) | Between 0 and 6 dB, from 1GHz to 18GHz |
| Uniformity of field strength | Between 0 and 6 dB, from 80 to 4000 MHz |

Semi-anechoic chamber 2 / Fully-anechoic chamber 3 (10 meters X 6.7 meters X 6.15 meters) did not exceed following limits along the EMC testing:

| | |
|---|---|
| Temperature | Min. = 15 °C, Max. = 30 °C |
| Relative humidity | Min. = 35 %, Max. = 60 % |
| Shielding effectiveness | > 100 dB |
| Electrical insulation | >2 MΩ |
| Ground system resistance | < 0.5 Ω |
| Normalised site attenuation (NSA) | < ±3.5 dB, 3 m distance |
| Site voltage standing-wave ratio (S_{VSWR}) | Between 0 and 6 dB, from 1GHz to 18GHz |
| Uniformity of field strength | Between 0 and 6 dB, from 80 to 3000 MHz |

6. SUMMARY OF TEST RESULTS

6.1. Summary of test results

| Abbreviations used in this clause: | | |
|------------------------------------|---------|---|
| Verdict Column | P | Pass |
| | F | Fail |
| | NA | Not applicable |
| | NM | Not measured |
| Location Column | A/B/C/D | The test is performed in test location A, B, C or D which are described in section 1.1 of this report |

LTE Band 7

| Items | Test Name | Clause in FCC rules | Section in this report | Verdict |
|-------|-----------------------------|---------------------|------------------------|---------|
| 1 | Output Power | 27.50(h)(2) | A.1 | P |
| 2 | Emission Limit | 27.53(m), 2.1051 | A.2 | P |
| 3 | Frequency Stability | 27.54, 2.1055 | A.3 | P |
| 4 | Occupied Bandwidth | 2.1049(h)(i) | A.4 | P |
| 5 | Emission Bandwidth | 27.53(m) | A.5 | P |
| 6 | Band Edge Compliance | 27.53(m) | A.6 | P |
| 7 | Conducted Spurious Emission | 27.53(m), 2.1057 | A.7 | P |
| 8 | Peak to Average Power Ratio | 27.50(a) | A.8 | P |



6.2. Statements

The test cases listed in section 6.1 of this report for the EUT specified in section 3 were performed by CTTL according to the standards or reference documents in section 4.1

The EUT met all applicable requirements of the standards or reference documents in section 4.1.

This report only deals with the LTE functions among the features described in section 3.

7. Test Equipments Utilized

| NO. | Description | TYPE | series number | MANUFACTURE | CAL DUE DATE | Calibration interval |
|-----|--------------------------------------|----------|---------------|--------------|--------------|----------------------|
| 1 | Test Receiver | ESU26 | 100235 | R&S | 2019-03-31 | 1 year |
| 2 | Test Receiver | ESU26 | 100376 | R&S | 2018-12-27 | 1 year |
| 3 | EMI Antenna | 3117 | 00058889 | ETS-Lindgren | 2020-05-27 | 3 year |
| 4 | Universal Radio Communication Tester | CMW500 | 159082 | R&S | 2019-01-05 | 1 year |
| 5 | Spectrum Analyzer | FSU26 | 200030 | R&S | 2019-06-04 | 1 year |
| 6 | EMI Antenna | VULB9163 | 9163-235 | Schwarzbeck | 2019-05-10 | 3 year |
| 7 | Signal Generator | SMF100A | 101295 | R&S | 2018-12-23 | 1 year |
| 8 | Climate chamber | SH-242 | 93008556 | ESPEC | 2019-12-21 | 2 year |
| 9 | Loop Antenna | HFH2-Z2 | 829324/007 | R&S | 2018-12-14 | 3 year |

ANNEX A: MEASUREMENT RESULTS

A.1 OUTPUT POWER

A.1.1 Summary

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMW500) to ensure max power transmission and proper modulation. In all cases, output power is within the specified limits.

A.1.2 Conducted

A.1.2.1 Method of Measurements

The EUT was set up for the max output power with pseudo random data modulation. These measurements were done at 3 frequencies (bottom, middle and top of operational frequency range) for each bandwidth.

A.1.2.2 Measurement result

LTE band 7

| Bandwidth | RB size/offset | Frequency (MHz) | Power(dBm) | |
|-----------|----------------|-----------------|------------|-------|
| | | | QPSK | 16QAM |
| 5MHz | 1 RB high | 2567.5 | 23.38 | 21.87 |
| | | 2535 | 23.27 | 22.04 |
| | | 2502.5 | 23.91 | 22.47 |
| | 1 RB low | 2567.5 | 23.52 | 22.03 |
| | | 2535 | 23.23 | 22.09 |
| | | 2502.5 | 23.99 | 22.39 |
| | 50% RB mid | 2567.5 | 22.55 | 21.42 |
| | | 2535 | 22.45 | 21.30 |
| | | 2502.5 | 22.89 | 21.55 |
| | 100% RB | 2567.5 | 22.52 | 21.65 |
| | | 2535 | 22.54 | 21.40 |
| | | 2502.5 | 22.81 | 21.59 |
| 10MHz | 1 RB high | 2565 | 23.69 | 22.66 |
| | | 2535 | 23.56 | 22.99 |
| | | 2505 | 23.57 | 22.66 |
| | 1 RB low | 2565 | 23.71 | 22.96 |
| | | 2535 | 23.50 | 22.84 |
| | | 2505 | 23.76 | 22.92 |
| | 50% RB mid | 2565 | 22.67 | 21.40 |
| | | 2535 | 22.49 | 21.61 |



| | | | | |
|-------|------------|--------|-------|-------|
| | | 2505 | 22.78 | 21.65 |
| | 100% RB | 2565 | 22.62 | 21.42 |
| | | 2535 | 22.56 | 21.37 |
| | | 2505 | 22.76 | 21.69 |
| 15MHz | 1 RB high | 2562.5 | 23.75 | 22.59 |
| | | 2535 | 23.61 | 22.79 |
| | | 2507.5 | 23.48 | 23.20 |
| | 1 RB low | 2562.5 | 23.95 | 22.38 |
| | | 2535 | 23.46 | 22.65 |
| | | 2507.5 | 23.63 | 23.19 |
| | 50% RB mid | 2562.5 | 22.55 | 21.24 |
| | | 2535 | 22.39 | 21.40 |
| | | 2507.5 | 22.78 | 21.54 |
| | 100% RB | 2562.5 | 22.45 | 21.25 |
| | | 2535 | 22.46 | 21.36 |
| | | 2507.5 | 22.76 | 21.66 |
| 20MHz | 1 RB high | 2560 | 23.76 | 22.83 |
| | | 2535 | 23.35 | 23.03 |
| | | 2510 | 23.04 | 22.20 |
| | 1 RB low | 2560 | 23.61 | 22.44 |
| | | 2535 | 23.22 | 22.53 |
| | | 2510 | 23.34 | 22.44 |
| | 50% RB mid | 2560 | 22.48 | 21.37 |
| | | 2535 | 22.55 | 21.32 |
| | | 2510 | 22.67 | 21.50 |
| | 100% RB | 2560 | 22.41 | 21.31 |
| | | 2535 | 22.50 | 21.28 |
| | | 2510 | 22.77 | 21.49 |

A.1.3 Radiated

A.1.3.1 Description


This is the test for the maximum radiated power from the EUT.

Rule Part 27.50(h)(2) specifies “Mobile stations are limited to 2.0 watts EIRP.”.


A.1.3.2 Method of Measurement

The measurements procedures in TIA-603E-2016 are used.

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

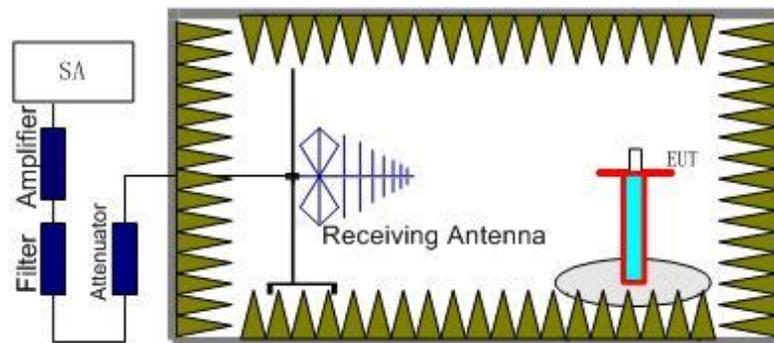

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (P_r).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

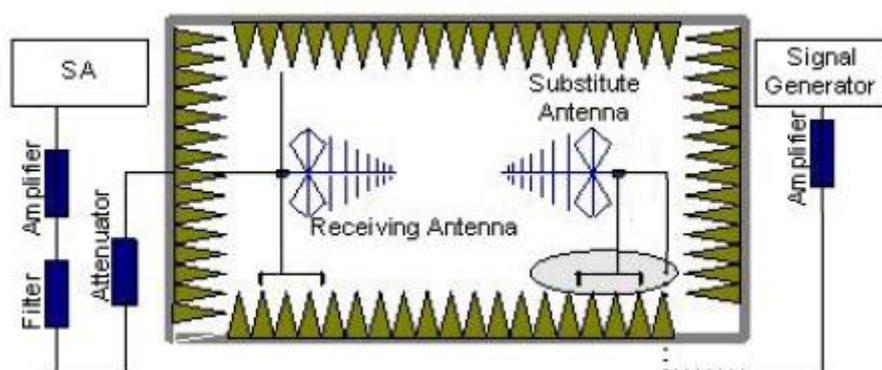

In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna. Adjust the level of the signal generator output until the value of the receiver reaches the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded.

The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. An amplifier should be connected to the Signal Source output port. And the cable should be connected between the amplifier and the substitution antenna.

The cable loss (P_{cl}), the substitution antenna Gain (G_a) and the amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{\text{Mea}} - P_{\text{Ag}} - P_{\text{cl}} - G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15$.

A.1.3.3 Measurement result

LTE Band 7- EIRP 27.50(h)(2)

Limits: ≤ 33 dBm (2W)

LTE Band 7_5MHz_QPSK

| Frequency(MHz) | P _{Mea} (dBm) | P _{cl} (dB) | P _{Ag} (dB) | G _a Antenna Gain(dB) | EIRP(dBm) | Limit(dBm) | Margin(dB) | Polarization |
|----------------|------------------------|----------------------|----------------------|---------------------------------|-----------|------------|------------|--------------|
| 2502.50 | -25.23 | 3.58 | 45.68 | 6.10 | 22.97 | 33.00 | 10.03 | H |
| 2535.00 | -23.83 | 3.63 | 44.82 | 6.16 | 23.52 | 33.00 | 9.48 | H |
| 2567.50 | -23.99 | 3.65 | 44.92 | 6.22 | 23.50 | 33.00 | 9.50 | H |

LTE Band 7_10MHz_QPSK

| Frequency(MHz) | P _{Mea} (dBm) | P _{cl} (dB) | P _{Ag} (dB) | G _a Antenna Gain(dB) | EIRP(dBm) | Limit(dBm) | Margin(dB) | Polarization |
|----------------|------------------------|----------------------|----------------------|---------------------------------|-----------|------------|------------|--------------|
| 2505.00 | -24.97 | 3.59 | 45.64 | 6.11 | 23.19 | 33.00 | 9.81 | H |
| 2535.00 | -23.66 | 3.63 | 44.82 | 6.16 | 23.69 | 33.00 | 9.31 | H |
| 2565.00 | -24.08 | 3.65 | 44.97 | 6.22 | 23.46 | 33.00 | 9.54 | H |

LTE Band 7_15MHz_QPSK

| Frequency(MHz) | P _{Mea} (dBm) | P _{cl} (dB) | P _{Ag} (dB) | G _a Antenna Gain(dB) | EIRP(dBm) | Limit(dBm) | Margin(dB) | Polarization |
|----------------|------------------------|----------------------|----------------------|---------------------------------|-----------|------------|------------|--------------|
| 2507.50 | -24.29 | 3.59 | 44.92 | 6.11 | 23.15 | 33.00 | 9.85 | H |
| 2535.00 | -23.90 | 3.63 | 44.82 | 6.16 | 23.45 | 33.00 | 9.55 | H |
| 2562.50 | -24.41 | 3.65 | 45.67 | 6.21 | 23.82 | 33.00 | 9.18 | H |

LTE Band 7_20MHz_QPSK

| Frequency(MHz) | P _{Mea} (dBm) | P _{cl} (dB) | P _{Ag} (dB) | G _a Antenna Gain(dB) | EIRP(dBm) | Limit(dBm) | Margin(dB) | Polarization |
|----------------|------------------------|----------------------|----------------------|---------------------------------|-----------|------------|------------|--------------|
| 2510.00 | -24.60 | 3.58 | 45.36 | 6.12 | 23.30 | 33.00 | 9.70 | H |
| 2535.00 | -23.81 | 3.63 | 44.82 | 6.16 | 23.54 | 33.00 | 9.46 | H |
| 2560.00 | -24.56 | 3.64 | 45.98 | 6.21 | 23.99 | 33.00 | 9.01 | H |



LTE Band 7_5MHz_16QAM

| Frequency(MHz) | P _{Mea} (dBm) | P _{cl} (dB) | P _{Ag} (dB) | G _a Antenna Gain(dB) | EIRP(dBm) | Limit(dBm) | Margin(dB) | Polarization |
|----------------|------------------------|----------------------|----------------------|---------------------------------|-----------|------------|------------|--------------|
| 2502.50 | -25.87 | 3.58 | 45.68 | 6.10 | 22.33 | 33.00 | 10.67 | H |
| 2535.00 | -24.84 | 3.63 | 44.82 | 6.16 | 22.51 | 33.00 | 10.49 | H |
| 2567.50 | -24.94 | 3.65 | 44.92 | 6.22 | 22.55 | 33.00 | 10.45 | H |

LTE Band 7_10MHz_16QAM

| Frequency(MHz) | P _{Mea} (dBm) | P _{cl} (dB) | P _{Ag} (dB) | G _a Antenna Gain(dB) | EIRP(dBm) | Limit(dBm) | Margin(dB) | Polarization |
|----------------|------------------------|----------------------|----------------------|---------------------------------|-----------|------------|------------|--------------|
| 2505.00 | -25.91 | 3.59 | 45.64 | 6.11 | 22.25 | 33.00 | 10.75 | H |
| 2535.00 | -24.64 | 3.63 | 44.82 | 6.16 | 22.71 | 33.00 | 10.29 | H |
| 2565.00 | -24.87 | 3.65 | 44.97 | 6.22 | 22.67 | 33.00 | 10.33 | H |

LTE Band 7_15MHz_16QAM

| Frequency(MHz) | P _{Mea} (dBm) | P _{cl} (dB) | P _{Ag} (dB) | G _a Antenna Gain(dB) | EIRP(dBm) | Limit(dBm) | Margin(dB) | Polarization |
|----------------|------------------------|----------------------|----------------------|---------------------------------|-----------|------------|------------|--------------|
| 2507.50 | -24.97 | 3.59 | 44.92 | 6.11 | 22.47 | 33.00 | 10.53 | H |
| 2535.00 | -24.75 | 3.63 | 44.82 | 6.16 | 22.60 | 33.00 | 10.40 | H |
| 2562.50 | -25.22 | 3.65 | 45.67 | 6.21 | 23.01 | 33.00 | 9.99 | H |

LTE Band 7_20MHz_16QAM

| Frequency(MHz) | P _{Mea} (dBm) | P _{cl} (dB) | P _{Ag} (dB) | G _a Antenna Gain(dB) | EIRP(dBm) | Limit(dBm) | Margin(dB) | Polarization |
|----------------|------------------------|----------------------|----------------------|---------------------------------|-----------|------------|------------|--------------|
| 2510.00 | -25.62 | 3.58 | 45.36 | 6.12 | 22.28 | 33.00 | 10.72 | H |
| 2535.00 | -24.14 | 3.63 | 44.82 | 6.16 | 23.21 | 33.00 | 9.79 | H |
| 2560.00 | -25.60 | 3.64 | 45.98 | 6.21 | 22.95 | 33.00 | 10.05 | H |

Peak EIRP(dBm) = P_{Mea}(-24.56dBm) - G_a (-6.21dB) - P_{Ag} (-45.98dB) - P_{cl} (3.64dB) = 23.99dBm

ANALYZER SETTINGS:

RBW = VBW = 8MHz for occupied bandwidths equal to or less than 5MHz.

RBW = VBW = 20MHz for occupied bandwidths equal to or greater than 10MHz.

Note: Expanded measurement uncertainty is $U = 0.96$ dB, $k = 2$.

A.2 EMISSION LIMIT


A.2.1 Measurement Method

The measurements procedures in TIA-603E-2016 are used. This measurement is carried out in fully-anechoic chamber FAC-3.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier. The resolution bandwidth is set 1MHz. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the LTE Bands 7.

The procedure of radiated spurious emissions is as follows:

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

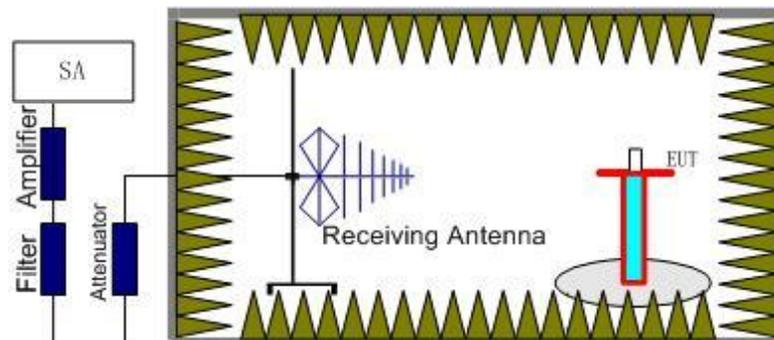

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

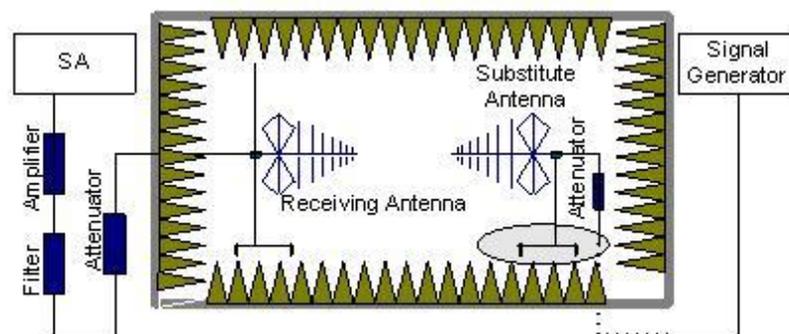

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere

with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna. Adjust the level of the signal generator output until the value of the receiver reaches the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss (P_{pl}) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain (G_a) should be recorded after test.

An amplifier should be connected in for the test.

The Path loss (P_{pl}) is the summation of the cable loss and the gain of the amplifier.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} + P_{pl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit: dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dB}$.

A.2.2 Measurement Limit

Part 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A.2.3 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the LTE Bands 7. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the LTE Bands 7 into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this. The evaluated frequency range is from 30MHz to 26GHz.

LTE Band 7, 5 MHz, QPSK, Channel 20775

| Frequency(M Hz) | P _{Mea} (dBm) | Path Loss | Antenna Gain | Peak EIRP(dBm) | Limit (dBm) | Margin(dB) | Polarization |
|-----------------|------------------------|-----------|--------------|----------------|-------------|------------|--------------|
| 5034.02 | -57.46 | 6.59 | 9.95 | -54.10 | -13.00 | 41.10 | H |
| 7509.01 | -45.70 | 8.36 | 12.21 | -41.85 | -13.00 | 28.85 | V |
| 10014.01 | -50.02 | 9.22 | 12.91 | -46.33 | -13.00 | 33.33 | V |
| 12536.01 | -48.74 | 10.28 | 13.22 | -45.80 | -13.00 | 32.80 | H |
| 15003.00 | -46.02 | 11.22 | 14.00 | -43.24 | -13.00 | 30.24 | H |
| 17504.00 | -43.28 | 12.74 | 14.91 | -41.11 | -13.00 | 28.11 | H |

LTE Band 7, 5 MHz, QPSK, Channel 21100

| Frequency(M Hz) | P _{Mea} (dBm) | Path Loss | Antenna Gain | Peak EIRP(dBm) | Limit (dBm) | Margin(dB) | Polarization |
|-----------------|------------------------|-----------|--------------|----------------|-------------|------------|--------------|
| 5101.02 | -57.38 | 6.78 | 10.04 | -54.12 | -13.00 | 41.12 | V |
| 7607.01 | -51.72 | 8.00 | 12.29 | -47.43 | -13.00 | 34.43 | V |
| 10144.01 | -49.48 | 9.39 | 12.96 | -45.91 | -13.00 | 32.91 | V |
| 12686.01 | -49.59 | 10.32 | 13.31 | -46.60 | -13.00 | 33.60 | H |
| 15238.00 | -46.20 | 11.35 | 13.86 | -43.69 | -13.00 | 30.69 | H |
| 17758.00 | -43.49 | 12.50 | 15.26 | -40.73 | -13.00 | 27.73 | H |

LTE Band 7, 5 MHz, QPSK, Channel 21425

| Frequency(M Hz) | P _{Mea} (dBm) | Path Loss | Antenna Gain | Peak EIRP(dBm) | Limit (dBm) | Margin(dB) | Polarization |
|-----------------|------------------------|-----------|--------------|----------------|-------------|------------|--------------|
| 5147.02 | -57.35 | 6.88 | 10.11 | -54.12 | -13.00 | 41.12 | V |
| 7695.01 | -54.81 | 8.40 | 12.36 | -50.85 | -13.00 | 37.85 | V |
| 10274.01 | -47.23 | 9.55 | 13.01 | -43.77 | -13.00 | 30.77 | V |
| 12823.01 | -49.15 | 10.71 | 13.39 | -46.47 | -13.00 | 33.47 | V |
| 15374.00 | -46.07 | 11.36 | 13.78 | -43.65 | -13.00 | 30.65 | H |
| 17996.00 | -43.73 | 12.90 | 15.59 | -41.04 | -13.00 | 28.04 | H |

LTE Band 7, 5 MHz, 16QAM, Channel 20775

| Frequency(MHz) | P _{Mea} (dBm) | Path Loss | Antenna Gain | Peak EIRP(dBm) | Limit (dBm) | Margin(dB) | Polarization |
|----------------|------------------------|-----------|--------------|----------------|-------------|------------|--------------|
| 4979.02 | -57.72 | 6.64 | 9.88 | -54.48 | -13.00 | 41.48 | V |
| 7509.01 | -47.18 | 8.36 | 12.21 | -43.33 | -13.00 | 30.33 | V |
| 10013.01 | -51.55 | 9.22 | 12.91 | -47.86 | -13.00 | 34.86 | V |
| 12535.01 | -49.17 | 10.28 | 13.22 | -46.23 | -13.00 | 33.23 | H |
| 15038.00 | -45.70 | 11.27 | 13.98 | -42.99 | -13.00 | 29.99 | H |
| 17523.00 | -43.31 | 12.81 | 14.93 | -41.19 | -13.00 | 28.19 | H |

LTE Band 7, 5 MHz, 16QAM, Channel 21100

| Frequency(MHz) | P _{Mea} (dBm) | Path Loss | Antenna Gain | Peak EIRP(dBm) | Limit (dBm) | Margin(dB) | Polarization |
|----------------|------------------------|-----------|--------------|----------------|-------------|------------|--------------|
| 5073.02 | -57.73 | 6.70 | 10.00 | -54.43 | -13.00 | 41.43 | H |
| 7607.01 | -47.67 | 8.00 | 12.29 | -43.38 | -13.00 | 30.38 | H |
| 10144.01 | -50.24 | 9.39 | 12.96 | -46.67 | -13.00 | 33.67 | V |
| 12655.01 | -48.76 | 10.37 | 13.29 | -45.84 | -13.00 | 32.84 | V |
| 15207.00 | -45.97 | 11.39 | 13.88 | -43.48 | -13.00 | 30.48 | V |
| 17749.00 | -43.92 | 12.45 | 15.25 | -41.12 | -13.00 | 28.12 | H |

LTE Band 7, 5 MHz, 16QAM, Channel 21425

| Frequency(MHz) | P _{Mea} (dBm) | Path Loss | Antenna Gain | Peak EIRP(dBm) | Limit (dBm) | Margin(dB) | Polarization |
|----------------|------------------------|-----------|--------------|----------------|-------------|------------|--------------|
| 5126.02 | -57.32 | 6.84 | 10.08 | -54.08 | -13.00 | 41.08 | V |
| 7737.01 | -54.05 | 8.38 | 12.39 | -50.04 | -13.00 | 37.04 | H |
| 10274.01 | -46.86 | 9.55 | 13.01 | -43.40 | -13.00 | 30.40 | V |
| 12862.01 | -49.28 | 10.61 | 13.42 | -46.47 | -13.00 | 33.47 | H |
| 15389.00 | -45.64 | 11.38 | 13.77 | -43.25 | -13.00 | 30.25 | V |
| 17954.00 | -43.91 | 12.89 | 15.54 | -41.26 | -13.00 | 28.26 | H |

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 4.2$ dB, $k = 2$.

A.3 FREQUENCY STABILITY

A.3.1 Method of Measurement

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at 0°C.
3. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on middle channel for LTE band 7, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from 0°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C increments from 0°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

A.3.2 Measurement Limit

A.3.2.1 For Hand carried battery powered equipment

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.6VDC and 4.4VDC, with a nominal voltage of 3.85VDC.

A.3.2.2 For equipment powered by primary supply voltage

The frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

A.3.3 Measurement results

LTE Band 7, 10MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

| Voltage (V) | Frequency error (Hz) | | Frequency error (ppm) | |
|----------------|----------------------|-------|-----------------------|-------|
| | QPSK | 16QAM | QPSK | 16QAM |
| 3.6 | -3.56 | 1.16 | 0.001 | 0.000 |
| 3.85 | 0.13 | 5.61 | 0.000 | 0.002 |
| 4.4 | 2.07 | 5.31 | 0.001 | 0.002 |

Frequency Error vs Temperature

| Temperature (°C) | Frequency error (Hz) | | Frequency error (ppm) | |
|---------------------|----------------------|-------|-----------------------|-------|
| | QPSK | 16QAM | QPSK | 16QAM |
| 50 | -11.67 | 2.80 | 0.005 | 0.001 |
| 40 | -2.85 | 4.55 | 0.001 | 0.002 |
| 30 | -4.52 | 2.99 | 0.002 | 0.001 |
| 20 | -0.47 | 4.12 | 0.000 | 0.002 |
| 10 | -1.62 | 8.73 | 0.001 | 0.003 |
| 0 | 0.47 | 3.59 | 0.000 | 0.001 |

Expanded measurement uncertainty for this test item is 10 Hz, $k = 2$.

A.4 OCCUPIED BANDWIDTH

A.4.1 Occupied Bandwidth Results

Occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the US Cellular/PCS frequency bands. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.


The measurement method is from KDB 971168 4.2:

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (i.e., two to five times the OBW).
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- c) Set the reference level of the instrument as required to keep the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope must be at least $10\log(\text{OBW} / \text{RBW})$ below the reference level.
- d) Set the detection mode to peak, and the trace mode to max hold.
- e) Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

LTE band 7, 5MHz (99%)


| Frequency(MHz) | Occupied Bandwidth (99%)(kHz) | |
|----------------|--------------------------------|---------|
| 2535.0 | QPSK | 16QAM |
| | 4495.19 | 4495.19 |

LTE band 7, 5MHz Bandwidth, QPSK (99% BW)

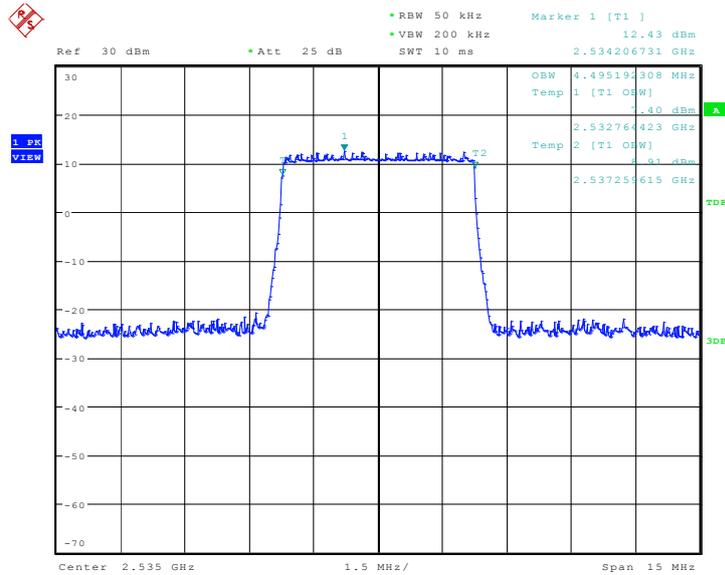

Date: 21.MAY.2018 14:05:06

LTE band 7, 5MHz Bandwidth,16QAM (99% BW)

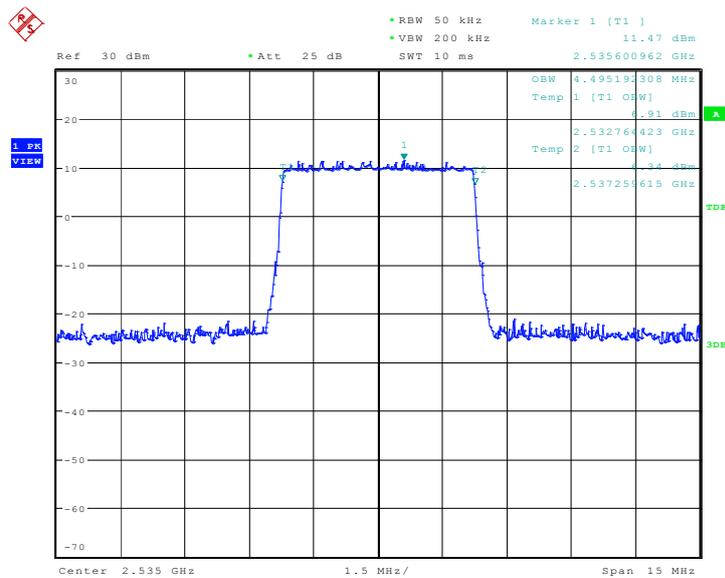


Date: 21.MAY.2018 14:05:22

LTE band 7, 10MHz (99%)


| Frequency(MHz) | Occupied Bandwidth (99%)(kHz) | |
|----------------|--------------------------------|---------|
| 2535.0 | QPSK | 16QAM |
| | 8990.38 | 8942.31 |

LTE band 7, 10MHz Bandwidth, QPSK (99% BW)

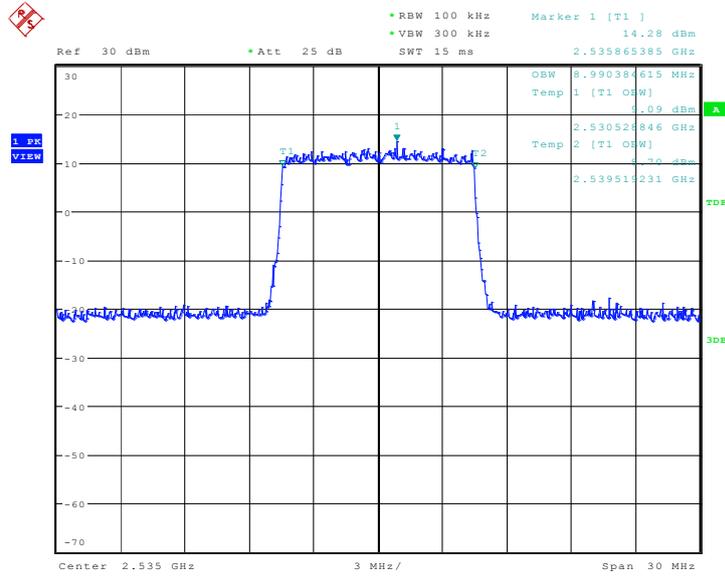

Date: 21.MAY.2018 14:34:44

LTE band 7, 10MHz Bandwidth, 16QAM (99% BW)

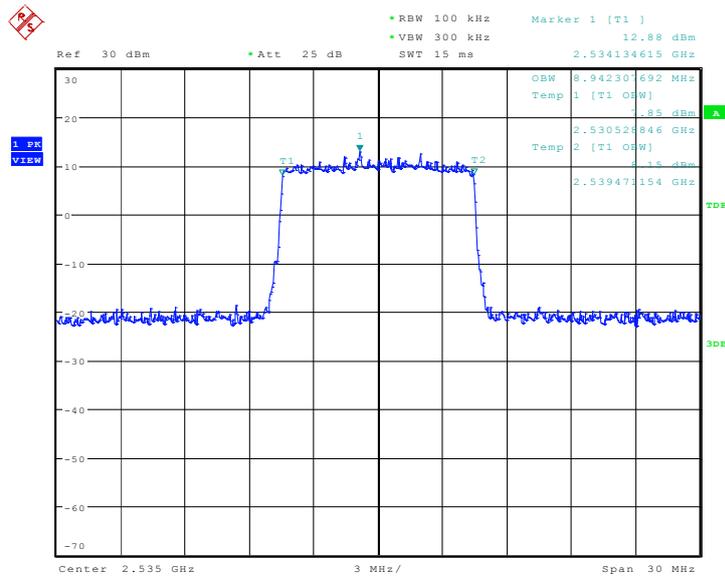


Date: 21.MAY.2018 14:35:00

LTE band 7, 15MHz (99%)


| Frequency(MHz) | Occupied Bandwidth (99%)(kHz) | |
|----------------|--------------------------------|----------|
| 2535.0 | QPSK | 16QAM |
| | 13413.46 | 13485.58 |

LTE band 7, 15MHz Bandwidth, QPSK (99% BW)

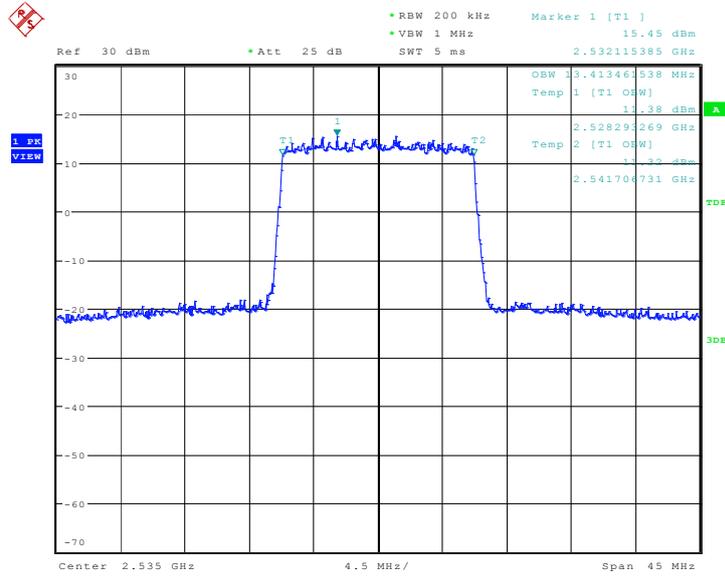

Date: 21.MAY.2018 14:42:21

LTE band 7, 15MHz Bandwidth, 16QAM (99% BW)

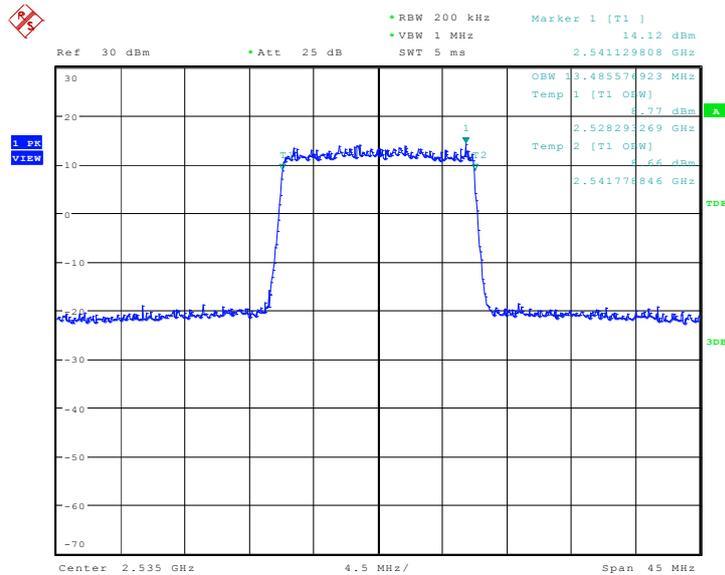


Date: 21.MAY.2018 14:42:36

LTE band 7, 20MHz (99%)


| Frequency(MHz) | Occupied Bandwidth (99%)(kHz) | |
|----------------|--------------------------------|----------|
| 2535.0 | QPSK | 16QAM |
| | 17884.62 | 17980.77 |

LTE band 7, 20MHz Bandwidth, QPSK (99% BW)

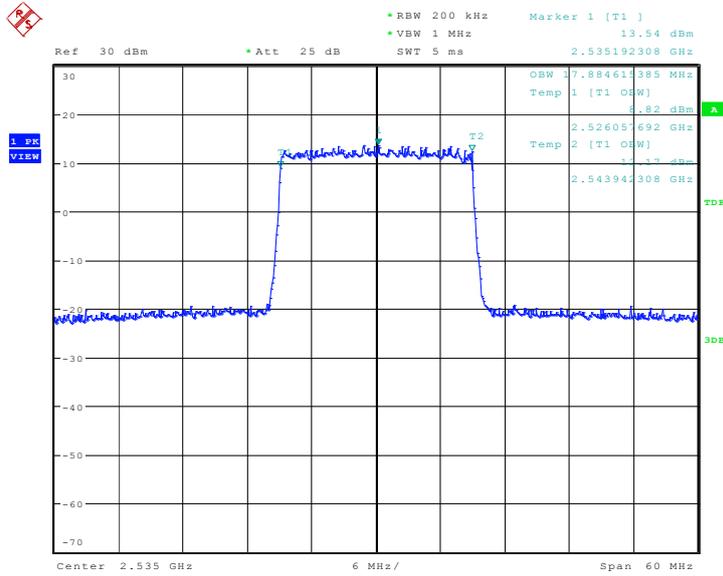

Date: 21.MAY.2018 14:27:12

LTE band 7, 20MHz Bandwidth, 16QAM (99% BW)

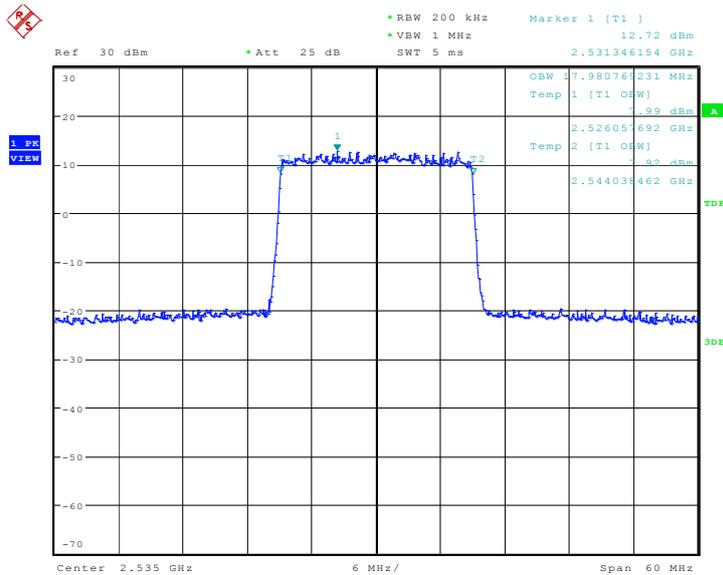

Date: 21.MAY.2018 14:27:27



A.5 EMISSION BANDWIDTH


A.5.1 Emission Bandwidth Results

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. Table below lists the measured -26dBc BW. Spectrum analyzer plots are included on the following pages.

LTE band 7, 5MHz (-26dBc)


| Frequency(MHz) | Occupied Bandwidth (-26dBc)(kHz) | |
|----------------|-----------------------------------|---------|
| 2535.0 | QPSK | 16QAM |
| | 4903.85 | 4951.92 |

LTE band 7, 5MHz Bandwidth, QPSK (-26dBc BW)

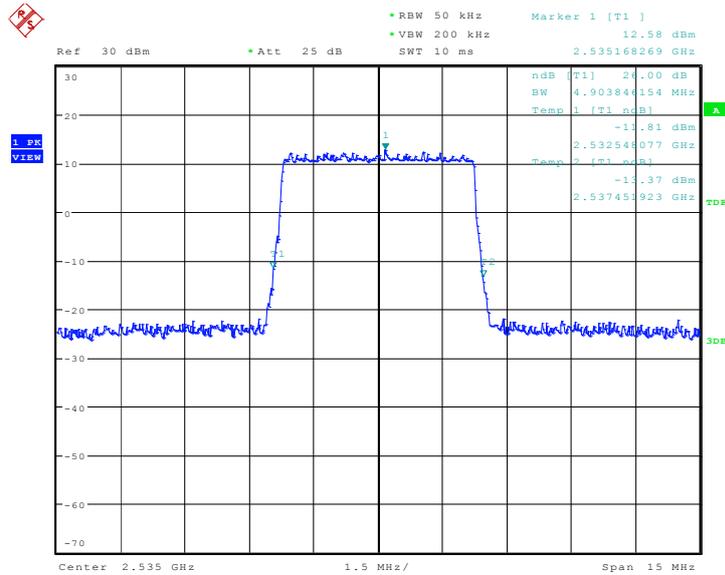

Date: 21.MAY.2018 14:06:17

LTE band 7, 5MHz Bandwidth,16QAM (-26dBc BW)

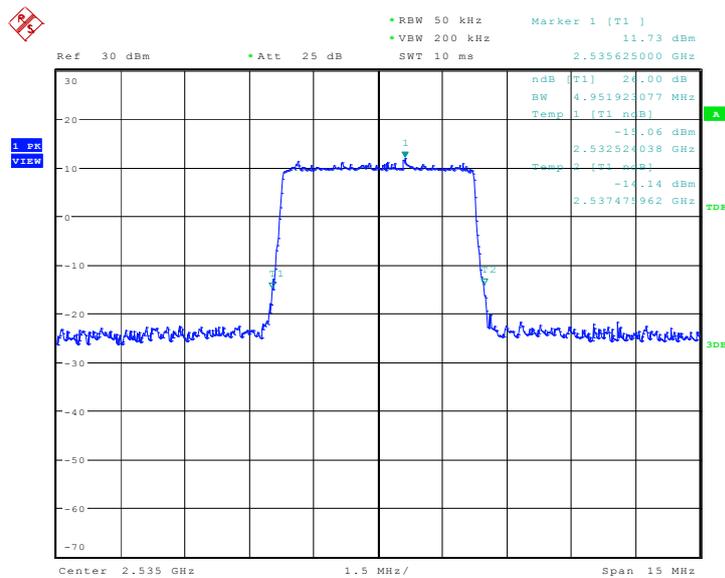


Date: 21.MAY.2018 14:06:34

LTE band 7, 10MHz (-26dBc)


| Frequency(MHz) | Occupied Bandwidth (-26dBc)(kHz) | |
|----------------|-----------------------------------|---------|
| 2535.0 | QPSK | 16QAM |
| | 9807.69 | 9807.69 |

LTE band 7, 10MHz Bandwidth, QPSK (-26dBc BW)

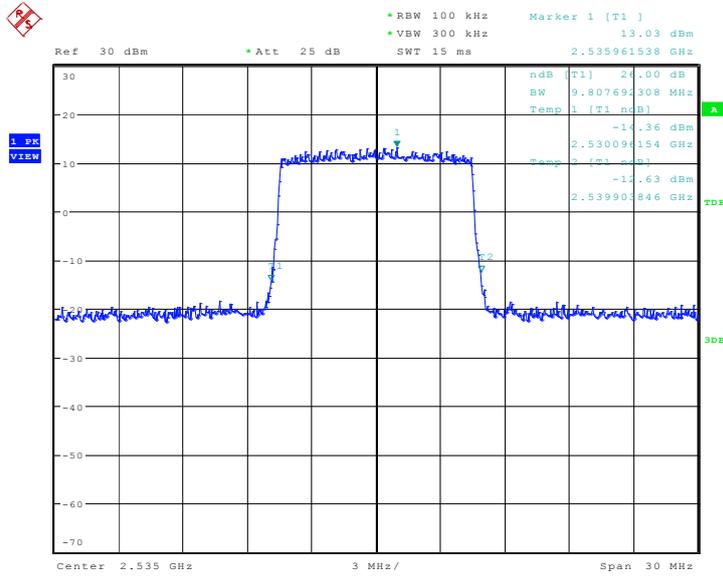

Date: 21.MAY.2018 14:35:55

LTE band 7, 10MHz Bandwidth, 16QAM (-26dBc BW)

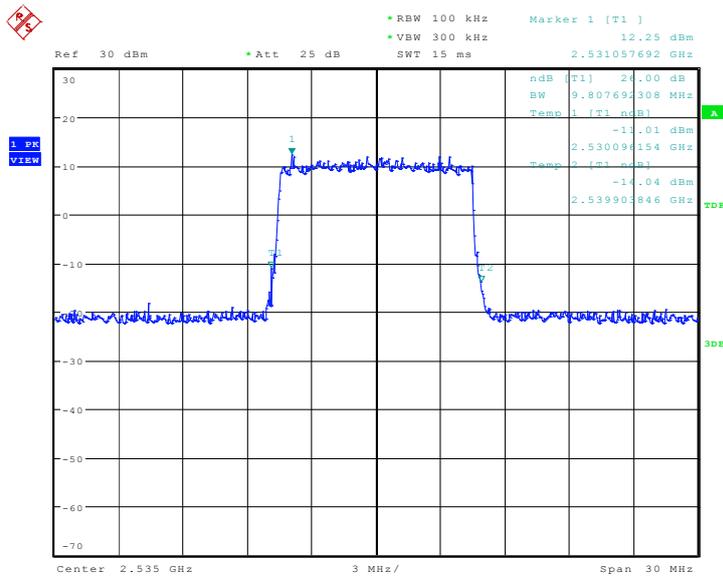


Date: 21.MAY.2018 14:36:12

LTE band 7, 15MHz (-26dBc)


| Frequency(MHz) | Occupied Bandwidth (-26dBc)(kHz) | |
|----------------|-----------------------------------|----------|
| 2535.0 | QPSK | 16QAM |
| | 14567.31 | 14711.54 |

LTE band 7, 15MHz Bandwidth, QPSK (-26dBc BW)

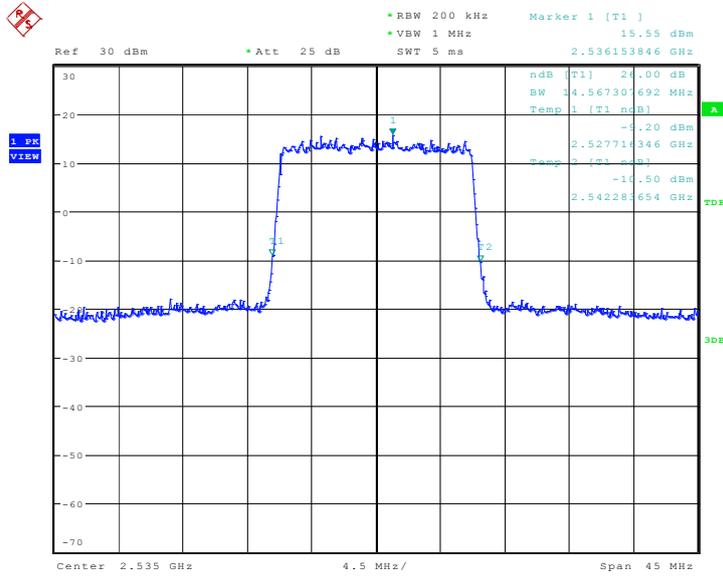

Date: 21.MAY.2018 14:43:30

LTE band 7, 15MHz Bandwidth, 16QAM (-26dBc BW)

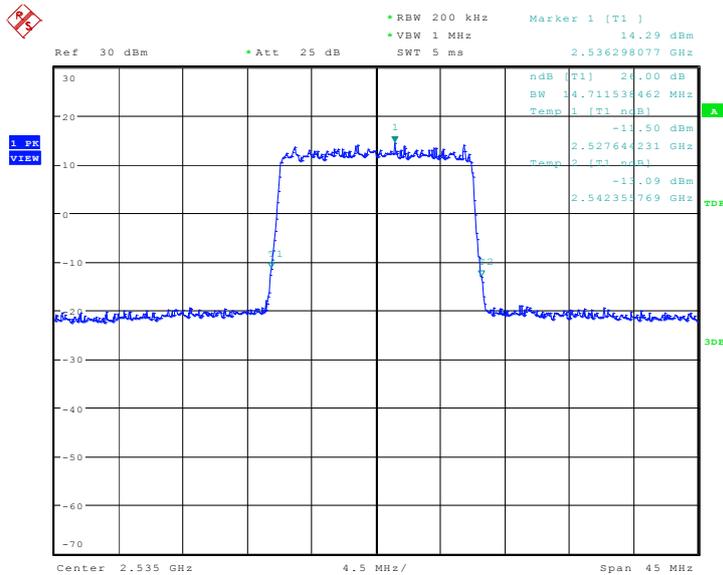


Date: 21.MAY.2018 14:43:47

LTE band 7, 20MHz (-26dBc)


| Frequency(MHz) | Occupied Bandwidth (-26dBc)(kHz) | |
|----------------|-----------------------------------|----------|
| 2535.0 | QPSK | 16QAM |
| | 19230.77 | 19326.92 |

LTE band 7, 20MHz Bandwidth, QPSK (-26dBc BW)

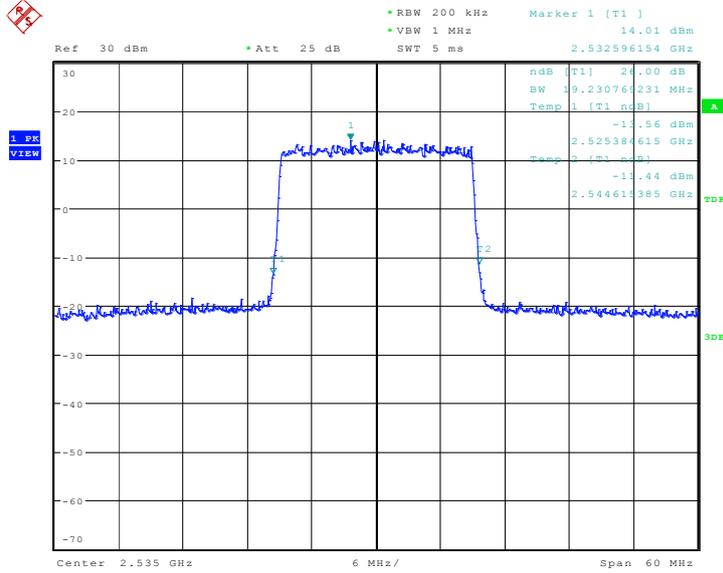

Date: 21.MAY.2018 14:28:22

LTE band 7, 20MHz Bandwidth, 16QAM (-26dBc BW)

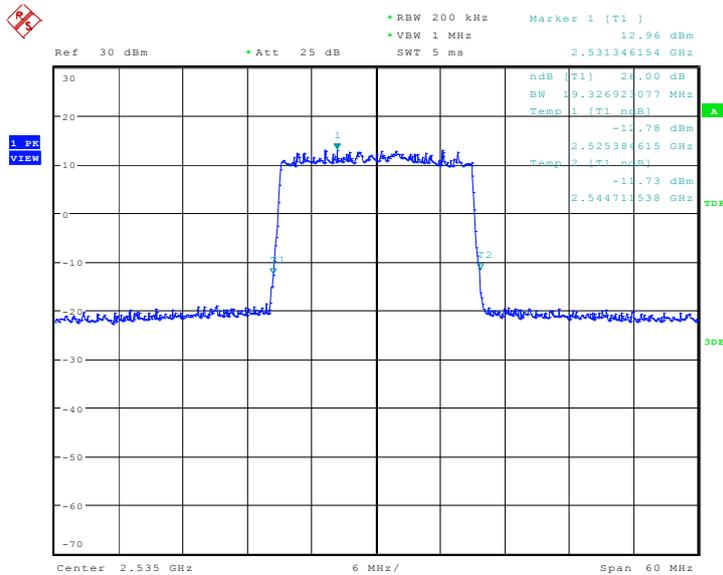

Date: 21.MAY.2018 14:28:39



A.6 BAND EDGE COMPLIANCE

A.6.1 Measurement limit

According to KDB 971168 6.0, a relaxation of the reference bandwidth is often provided for measurements within a specified frequency range at the edge of the authorized frequency block/band. This is often implemented by permitting the use of a narrower RBW (typically limited to a minimum RBW of 1% of the OBW) for measuring the out-of-band emissions without a requirement to integrate the result over the full reference bandwidth.


Part 27.53(m) states that for mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

A.6.2 Measurement result

Only worst case result is given below


LTE band 7

OBW: 1RB-low_offset

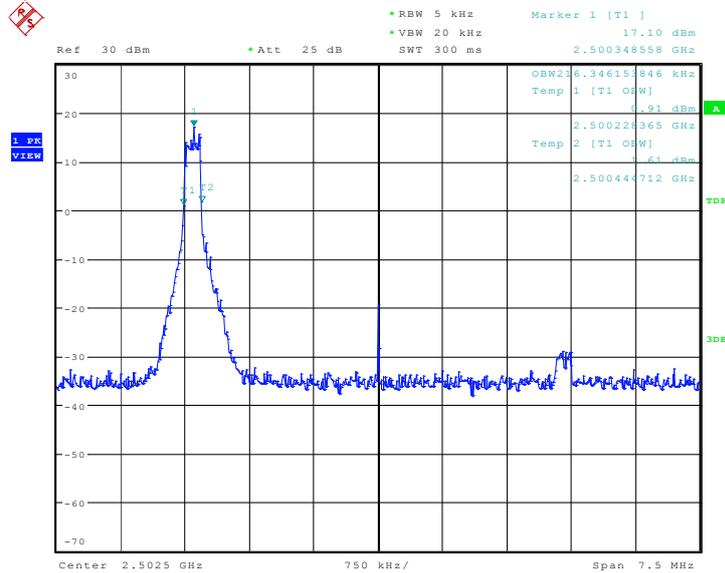


Date: 24.MAY.2018 09:31:03

LOW BAND EDGE BLOCK-1RB-low_offset

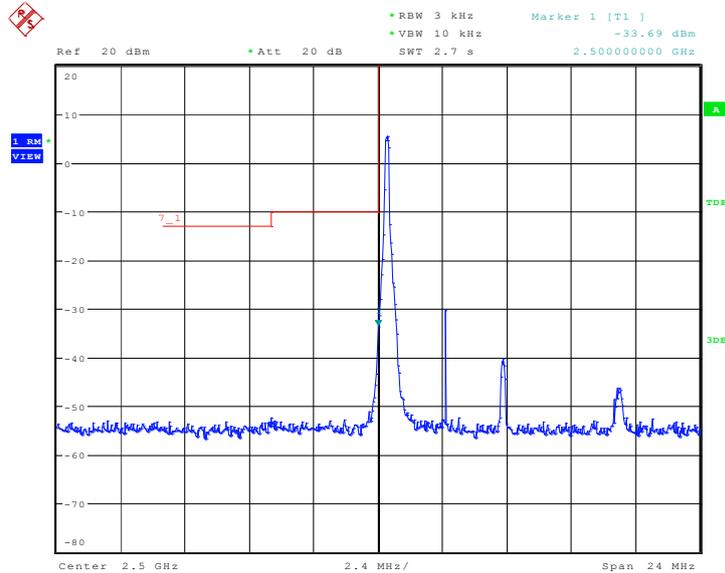


Date: 24.MAY.2018 09:31:56

OBW: 1RB-high_offset

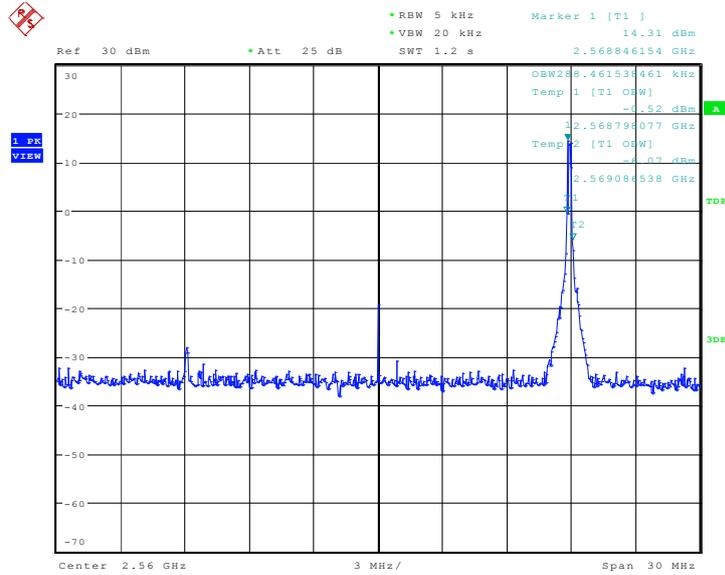


Date: 24.MAY.2018 09:19:37

HIGH BAND EDGE BLOCK-1RB-high_offset

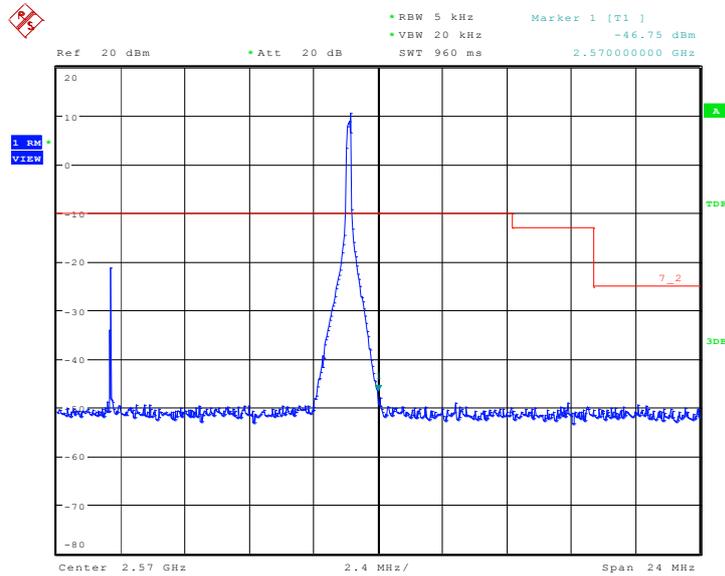


Date: 24.MAY.2018 09:20:28

LOW BAND EDGE BLOCK-20MHz-100%RB

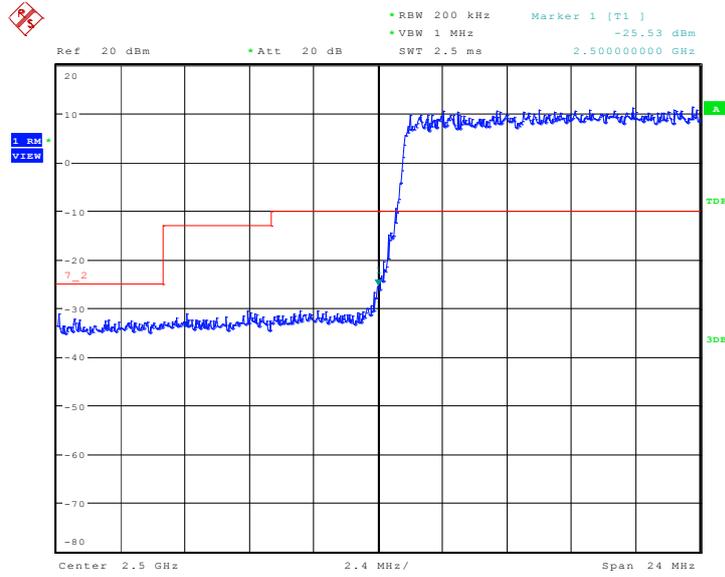

Date: 24.MAY.2018 09:24:49

HIGH BAND EDGE BLOCK-20MHz-100%RB

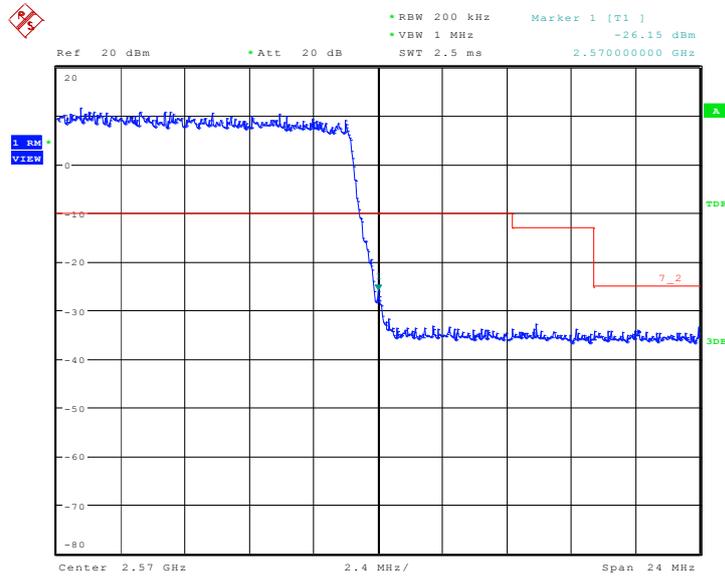

Date: 24.MAY.2018 09:25:43

A.7 CONDUCTED SPURIOUS EMISSION

A.7.1 Measurement Method

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 9 GHz, data taken from 10 MHz to 25 GHz.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.
3. The number of sweep points of spectrum analyzer is set to 30001 which is greater than span/RBW.

A. 7.2 Measurement Limit

Part 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A. 7.3 Measurement result

Only worst case result is given below

LTE band 7: 30MHz – 26GHz

Spurious emission limit –13dBm.

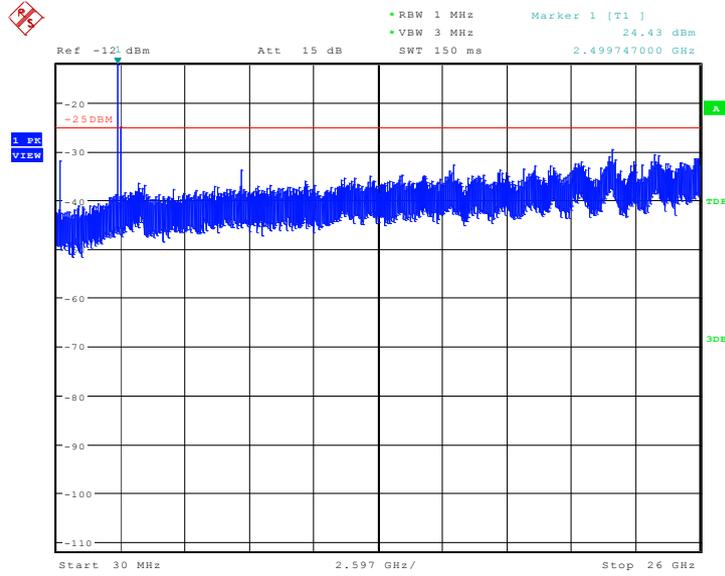

Date: 24.MAY.2018 09:27:44

A.8 PEAK-TO-AVERAGE POWER RATIO

Reference

FCC: CFR Part 27.50(a)

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

According to KDB 971168 5.7.1:

- a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
- b) Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
- c) Set the number of counts to a value that stabilizes the measured CCDF curve;
- d) Set the measurement interval to 1 ms
- e) Record the maximum PAPR level associated with a probability of 0.1%

A.8.1 Measurement limit

not exceed 13 dB

A.8.2 Measurement results

LTE band 7, 20MHz

| Frequency(MHz) | PAPR(dB) | |
|----------------|----------|-------|
| | QPSK | 16QAM |
| 2510.0 | 6.85 | 7.37 |

ANNEX B: Accreditation Certificate

| | | | | | |
|---|---|--|---|---|--|
| <p>United States Department of Commerce National Institute of Standards and Technology</p>  <hr/> <p>Certificate of Accreditation to ISO/IEC 17025:2005</p> <hr/> <p>NVLAP LAB CODE: 600118-0</p> <p>Telecommunication Technology Labs, CAICT Beijing China</p> <p><i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i></p> <p>Electromagnetic Compatibility & Telecommunications</p> <p><i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).</i></p> <hr/> <table border="0" style="width: 100%;"><tr><td style="width: 33%; text-align: center;"><p>2017-08-22 through 2018-09-30 <i>Effective Dates</i></p></td><td style="width: 33%; text-align: center;"></td><td style="width: 33%; text-align: center;"> <i>For the National Voluntary Laboratory Accreditation Program</i></td></tr></table> | | | <p>2017-08-22 through 2018-09-30 <i>Effective Dates</i></p> |  |  <i>For the National Voluntary Laboratory Accreditation Program</i> |
| <p>2017-08-22 through 2018-09-30 <i>Effective Dates</i></p> |  |  <i>For the National Voluntary Laboratory Accreditation Program</i> | | | |

END OF REPORT