

Appendix E. Output Power Measurement

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For HSPA+ devices supporting 16 QAM in the uplink, power measurements procedure is according to the configurations in Table C.11.1.4 of 3GPP TS 34.121-1.
4. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5
Note 1: Δ_{ACK}, Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$. Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$. Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases. Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.							

Setup Configuration

HSUPA Setup Configuration:

- The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- The RF path losses were compensated into the measurements.
- A call was established between EUT and Base Station with following setting * :
 - Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - Set Cell Power = -86 dBm
 - Set Channel Type = 12.2k + HSPA
 - Set UE Target Power
 - Power Ctrl Mode= Alternating bits
 - Set and observe the E-TFCI
 - Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_d/\beta_c = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration

DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

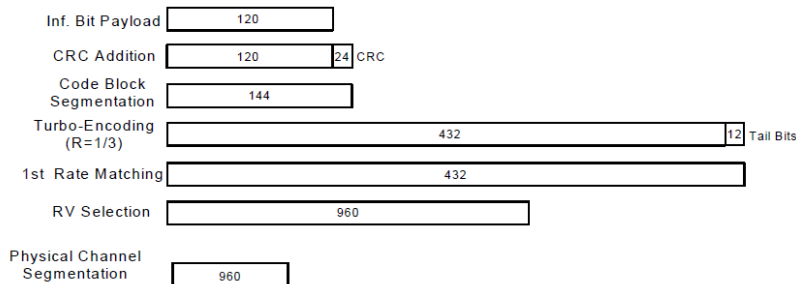


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

Setup Configuration

HSPA+ 3GPP release 7 (uplink category 7) 16QAM, Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2E:HSPA+:UL with 16QAM
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.4, quoted from the TS 34.121-1 s5.2E
 - iii. Set Channel Params
 - iv. Set Cell Power = -86 dBm
 - v. Set Channel Type = HSPA
 - vi. Set UE Target Power =21 dBm
 - vii. Power Ctrl Mode= All Up Bits
 - viii. Set Manual Uplink DPCH Bc/Bd = Manual
 - ix. Set Manual Uplink DPCH Bc and Bd=15,15(for 34.121-1 v8.10.0 table C11.1.4 sub-test 1)
 - x. Set HSPA Conn DL Channel Levels
 - xi. Set HS-SCCH Configs
 - xii. Set RB Test Mode Setup
 - xiii. Set Common HSUPA Parameters
 - xiv. Set Serving Grant
 - xv. Confirm that E-TFCI is equal to the target E-TFCI of 105 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.4: β values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM

Sub-test	β_c (Note 3)	β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105
Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{fs} = 30/15 * \beta_c$. Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0). Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default. Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value. Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signaled to use the extrapolation algorithm.											

Setup Configuration

<WCDMA Conducted Power>

General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA / HSPA+ is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA / HSPA+ to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA / HSPA+) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+.



Full&Default Power Mode

Band		WCDMA II Ant2 Default			Tune-up Limit (dBm)	WCDMA IV Ant2 Default			Tune-up Limit (dBm)	WCDMA V Ant0 Default			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6		826.4	836.4	846.6	
3GPP Rel 99	RMC 12.2Kbps	23.75	23.79	23.72	25.00	23.77	23.88	23.81	25.00	23.51	23.66	23.60	25.00

Reduced Power Mode for DSI 0

Band		WCDMA II Ant2 DSI0			Tune-up Limit (dBm)	WCDMA IV Ant2 DSI0			Tune-up Limit (dBm)	WCDMA V Ant0 DSI0			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6		826.4	836.4	846.6	
3GPP Rel 99	RMC 12.2Kbps	22.71	22.75	22.73	23.20	22.62	22.66	22.59	23.20	23.51	23.66	23.60	25.00

Reduced Power Mode for DSI 1

Band		WCDMA II Ant2 DSI1			Tune-up Limit (dBm)	WCDMA IV Ant2 DSI1			Tune-up Limit (dBm)	WCDMA V Ant0 DSI1			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6		826.4	836.4	846.6	
3GPP Rel 99	RMC 12.2Kbps	20.75	20.77	20.71	21.70	21.43	21.52	21.48	22.90	23.51	23.66	23.60	25.00

Reduced Power Mode for DSI 2

Band		WCDMA II Ant2 DSI2			Tune-up Limit (dBm)	WCDMA IV Ant2 DSI2			Tune-up Limit (dBm)	WCDMA V Ant0 DSI2			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6		826.4	836.4	846.6	
3GPP Rel 99	RMC 12.2Kbps	18.14	18.18	18.16	19.60	18.06	18.12	18.05	19.40	21.28	21.36	21.31	22.70




<LTE Conducted Power>

General Note:


1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE 4 / B5 / B12 / B17 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE band 2 / 4 / 5 / 17 / 38 SAR test was covered by Band 25 / 66 / 26 / 12 / 41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band
10. According to May 2017 TCB workshop, for 16QAM and 64QAM, 256QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 256QAM, 64QAM and 16QAM signal modulation are correct.



16QAM

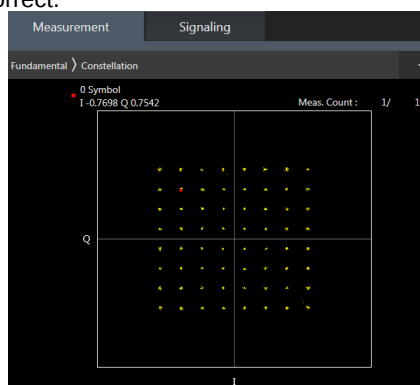

64QAM

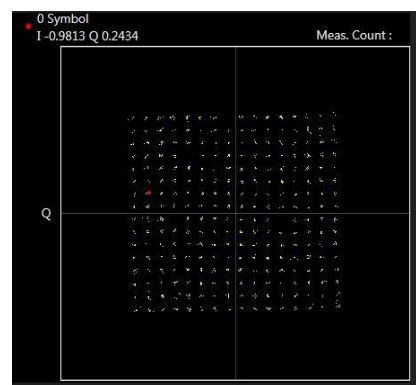

256QAM

Full&Default Power Mode

Band 5 Ant0 Default								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	23.31	23.35	23.32	25	0
10	QPSK	1	25	23.29	23.31	23.31		
10	QPSK	1	49	23.30	23.30	23.30		
10	QPSK	25	0	22.27	22.44	22.39	24	1
10	QPSK	25	12	22.40	22.32	22.28		
10	QPSK	25	25	22.41	22.37	22.36		
10	QPSK	50	0	22.36	22.40	22.29		

Band 14 Ant0 Default								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23330				
Frequency (MHz)				793				
10	QPSK	1	0		23.38		25	0
10	QPSK	1	25		23.34			
10	QPSK	1	49		23.30			
10	QPSK	25	0		22.36		24	1
10	QPSK	25	12		22.32			
10	QPSK	25	25		22.30			
10	QPSK	50	0		22.39			



Band 12 Ant0 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130	25	0
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	23.48	23.65	23.53		
10	QPSK	1	25	23.60	23.56	23.60	24	1
10	QPSK	1	49	23.47	23.63	23.47		
10	QPSK	25	0	22.53	22.54	22.50		
10	QPSK	25	12	22.54	22.56	22.54		
10	QPSK	25	25	22.50	22.55	22.46		
10	QPSK	50	0	22.48	22.55	22.40		

Band 17 Ant0 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800	25	0
Frequency (MHz)				709	710	711		
10	QPSK	1	0	23.40	23.43	23.36		
10	QPSK	1	25	23.33	23.39	23.31	24	1
10	QPSK	1	49	23.30	23.31	23.41		
10	QPSK	25	0	22.34	22.39	22.38		
10	QPSK	25	12	22.34	22.31	22.34		
10	QPSK	25	25	22.10	22.33	22.34		
10	QPSK	50	0	22.33	22.44	22.40		

Band 71 Ant0 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				133222	133297	133372	24	0
Frequency (MHz)				673	680.5	688		
20	QPSK	1	0	22.66	22.72	22.58		
20	QPSK	1	49	22.61	22.67	22.56	23	1
20	QPSK	1	99	22.68	22.63	22.64		
20	QPSK	50	0	21.59	21.70	21.68		
20	QPSK	50	24	21.65	21.66	21.56		
20	QPSK	50	50	21.63	21.66	21.59		
20	QPSK	100	0	21.65	21.68	21.60		



Band 13 Ant0 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23230				
Frequency (MHz)				782				
10	QPSK	1	0		23.31		25	0
10	QPSK	1	25		23.30			
10	QPSK	1	49		23.29			
10	QPSK	25	0		22.40		24	1
10	QPSK	25	12		22.24			
10	QPSK	25	25		22.36			
10	QPSK	50	0		22.35			

Band 26 Ant0 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26765	26865	26965	25	0
Frequency (MHz)				821.5	831.5	841.5		
15	QPSK	1	0	23.18	23.26	23.16		
15	QPSK	1	37	23.15	23.17	23.21	24	1
15	QPSK	1	74	23.09	23.16	23.22		
15	QPSK	36	0	22.11	22.26	22.10		
15	QPSK	36	20	22.19	22.12	22.18		
15	QPSK	36	39	22.20	22.08	22.12		
15	QPSK	75	0	22.17	22.19	22.16		

Band 25 Ant2 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26140	26340	26590	25	0
Frequency (MHz)				1860	1880	1905		
20	QPSK	1	0	23.15	23.19	23.17		
20	QPSK	1	49	23.05	23.08	23.16	24	1
20	QPSK	1	99	23.05	23.16	23.15		
20	QPSK	50	0	22.05	22.17	22.13		
20	QPSK	50	24	22.06	22.01	22.06		
20	QPSK	50	50	22.13	22.16	22.06		
20	QPSK	100	0	22.14	22.15	22.05		



Band 66 Ant2 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				132072	132322	132572		
Frequency (MHz)				1720	1745	1770		
20	QPSK	1	0	23.22	23.28	23.15	25	0
20	QPSK	1	49	23.15	23.14	23.23		
20	QPSK	1	99	23.13	23.20	23.21		
20	QPSK	50	0	22.19	22.26	22.15	24	1
20	QPSK	50	24	22.18	22.10	22.10		
20	QPSK	50	50	22.22	22.20	22.17		
20	QPSK	100	0	22.11	22.13	22.12		

Band 7 Ant3 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	22.55	22.61	22.49	24	0
20	QPSK	1	49	22.53	22.48	22.49		
20	QPSK	1	99	22.52	22.50	22.35		
20	QPSK	50	0	21.48	21.59	21.55	23	1
20	QPSK	50	24	21.54	21.57	21.51		
20	QPSK	50	50	21.54	21.49	21.48		
20	QPSK	100	0	21.51	21.52	21.49		

Band 30 Ant3 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				27710				
Frequency (MHz)				2310				
10	QPSK	1	0		23.43		25	0
10	QPSK	1	25		23.33			
10	QPSK	1	49		23.34			
10	QPSK	25	0		22.45		24	1
10	QPSK	25	12		22.38			
10	QPSK	25	25		22.40			
10	QPSK	50	0		22.50			



Band 2 Ant5 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100	25	0
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	23.31	23.40	23.39		
20	QPSK	1	49	23.35	23.32	23.34	24	1
20	QPSK	1	99	23.37	23.31	23.33		
20	QPSK	50	0	22.27	22.44	22.31		
20	QPSK	50	24	22.32	22.29	22.32		
20	QPSK	50	50	22.40	22.33	22.35		
20	QPSK	100	0	22.24	22.31	22.26		

Band 4 Ant5 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300	25	0
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	23.36	23.45	23.33		
20	QPSK	1	49	23.41	23.33	23.39	24	1
20	QPSK	1	99	23.37	23.35	23.43		
20	QPSK	50	0	22.41	22.45	22.31		
20	QPSK	50	24	22.34	22.37	22.38		
20	QPSK	50	50	22.39	22.42	22.42		
20	QPSK	100	0	22.36	22.37	22.31		

Band 66 Ant5 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				132072	132322	132572	25	0
Frequency (MHz)				1720	1745	1770		
20	QPSK	1	0	23.37	23.40	23.34		
20	QPSK	1	49	23.29	23.34	23.35	24	1
20	QPSK	1	99	23.37	23.32	23.36		
20	QPSK	50	0	22.30	22.33	22.18		
20	QPSK	50	24	22.25	22.25	22.27		
20	QPSK	50	50	22.21	22.32	22.09		
20	QPSK	100	0	22.24	22.29	22.19		

Reduced Power Mode for DSI 0

Band 5 Ant0 DSI0								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	23.31	23.35	23.32	25	0
10	QPSK	1	25	23.29	23.31	23.31		
10	QPSK	1	49	23.30	23.30	23.30		
10	QPSK	25	0	22.27	22.44	22.39	24	1
10	QPSK	25	12	22.40	22.32	22.28		
10	QPSK	25	25	22.41	22.37	22.36		
10	QPSK	50	0	22.36	22.40	22.29		

Band 12 Ant0 DSI0								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130		
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	23.48	23.65	23.53	25	0
10	QPSK	1	25	23.60	23.56	23.60		
10	QPSK	1	49	23.47	23.63	23.47		
10	QPSK	25	0	22.53	22.54	22.50	24	1
10	QPSK	25	12	22.54	22.56	22.54		
10	QPSK	25	25	22.50	22.55	22.46		
10	QPSK	50	0	22.48	22.55	22.40		

Band 13 Ant0 DSI0								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23230				
Frequency (MHz)				782				
10	QPSK	1	0		23.31		25	0
10	QPSK	1	25		23.30			
10	QPSK	1	49		23.29			
10	QPSK	25	0		22.40		24	1
10	QPSK	25	12		22.24			
10	QPSK	25	25		22.36			
10	QPSK	50	0		22.35			



Band 14 Ant0 DSI0

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23330				
Frequency (MHz)				793				
10	QPSK	1	0		23.38		25	0
10	QPSK	1	25		23.34			
10	QPSK	1	49		23.30			
10	QPSK	25	0		22.36		24	1
10	QPSK	25	12		22.32			
10	QPSK	25	25		22.30			
10	QPSK	50	0		22.39			

Band 17 Ant0 DSI0

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800		
Frequency (MHz)				709	710	711		
10	QPSK	1	0	23.40	23.43	23.36	25	0
10	QPSK	1	25	23.33	23.39	23.31		
10	QPSK	1	49	23.30	23.31	23.41		
10	QPSK	25	0	22.34	22.39	22.38	24	1
10	QPSK	25	12	22.34	22.31	22.34		
10	QPSK	25	25	22.10	22.33	22.34		
10	QPSK	50	0	22.33	22.44	22.40		

Band 26 Ant0 DSI0

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26765	26865	26965		
Frequency (MHz)				821.5	831.5	841.5		
15	QPSK	1	0	23.18	23.26	23.16	25	0
15	QPSK	1	37	23.15	23.17	23.21		
15	QPSK	1	74	23.09	23.16	23.22		
15	QPSK	36	0	22.11	22.26	22.10	24	1
15	QPSK	36	20	22.19	22.12	22.18		
15	QPSK	36	39	22.20	22.08	22.12		
15	QPSK	75	0	22.17	22.19	22.16		

Band 71 Ant0 DSI0

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				133222	133297	133372		
Frequency (MHz)				673	680.5	688		
20	QPSK	1	0	22.66	22.72	22.58		
20	QPSK	1	49	22.61	22.67	22.56	24	0
20	QPSK	1	99	22.68	22.63	22.64		
20	QPSK	50	0	21.59	21.70	21.68		
20	QPSK	50	24	21.65	21.66	21.56	23	1
20	QPSK	50	50	21.63	21.66	21.59		
20	QPSK	100	0	21.65	21.68	21.60		

Band 25 Ant2 DSI0

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26140	26340	26590		
Frequency (MHz)				1860	1880	1905		
20	QPSK	1	0	22.50	22.60	22.51		
20	QPSK	1	49	22.48	22.56	22.51	25	0
20	QPSK	1	99	22.52	22.52	22.50		
20	QPSK	50	0	22.58	22.59	22.54		
20	QPSK	50	24	22.54	22.56	22.48	24	1
20	QPSK	50	50	22.51	22.50	22.47		
20	QPSK	100	0	22.50	22.53	22.46		



Band 66 Ant2 DSI0

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				132072	132322	132572	25	0
Frequency (MHz)				1720	1745	1770		
20	QPSK	1	0	22.80	22.88	22.87		
20	QPSK	1	49	22.78	22.76	22.84	24	1
20	QPSK	1	99	22.73	22.73	22.78		
20	QPSK	50	0	22.70	22.79	22.77		
20	QPSK	50	24	22.75	22.71	22.75		
20	QPSK	50	50	22.72	22.71	22.73		
20	QPSK	100	0	22.64	22.65	22.59		

Band 7 Ant3 DSI0

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350	20.9	0
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	20.36	20.42	20.35		
20	QPSK	1	49	20.27	20.36	20.31	20.9	0
20	QPSK	1	99	20.25	20.39	20.27		
20	QPSK	50	0	20.26	20.35	20.33		
20	QPSK	50	24	20.28	20.30	20.28		
20	QPSK	50	50	20.29	20.23	20.28		
20	QPSK	100	0	20.25	20.31	20.26		

Band 30 Ant3 DSI0

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				27710				
Frequency (MHz)				2310				
10	QPSK	1	0		19.74		20.4	0
10	QPSK	1	25		19.72			
10	QPSK	1	49		19.55			
10	QPSK	25	0		19.65		20.4	0
10	QPSK	25	12		19.61			
10	QPSK	25	25		19.63			
10	QPSK	50	0		19.71			



Band 2 Ant5 DSI0

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100	24.4	0
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	24.00	24.06	24.02		
20	QPSK	1	49	24.05	23.99	24.04	24	0.4
20	QPSK	1	99	23.93	23.97	24.01		
20	QPSK	50	0	23.60	23.64	23.55		
20	QPSK	50	24	23.56	23.63	23.63		
20	QPSK	50	50	23.55	23.59	23.49		
20	QPSK	100	0	23.61	23.62	23.60		

Band 66 Ant5 DSI0

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				132072	132322	132572	25	0
Frequency (MHz)				1720	1745	1770		
20	QPSK	1	0	23.89	24.03	23.97		
20	QPSK	1	49	24.01	24.00	23.97	24	1
20	QPSK	1	99	23.98	23.93	23.97		
20	QPSK	50	0	22.90	23.00	22.99		
20	QPSK	50	24	22.86	22.85	22.98		
20	QPSK	50	50	22.94	22.96	22.98		
20	QPSK	100	0	22.86	22.92	22.88		

Reduced Power Mode for DSI 1

Band 5 Ant0 DSI1								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	23.31	23.35	23.32	25	0
10	QPSK	1	25	23.29	23.31	23.31		
10	QPSK	1	49	23.30	23.30	23.30		
10	QPSK	25	0	22.27	22.44	22.39	24	1
10	QPSK	25	12	22.40	22.32	22.28		
10	QPSK	25	25	22.41	22.37	22.36		
10	QPSK	50	0	22.36	22.40	22.29		

Band 12 Ant0 DSI1								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130		
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	23.48	23.65	23.53	25	0
10	QPSK	1	25	23.60	23.56	23.60		
10	QPSK	1	49	23.47	23.63	23.47		
10	QPSK	25	0	22.53	22.54	22.50	24	1
10	QPSK	25	12	22.54	22.56	22.54		
10	QPSK	25	25	22.50	22.55	22.46		
10	QPSK	50	0	22.48	22.55	22.40		

Band 13 Ant0 DSI1								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23230				
Frequency (MHz)				782				
10	QPSK	1	0		23.31		25	0
10	QPSK	1	25		23.30			
10	QPSK	1	49		23.29			
10	QPSK	25	0		22.40		24	1
10	QPSK	25	12		22.24			
10	QPSK	25	25		22.36			
10	QPSK	50	0		22.35			

Band 14 Ant0 DSI1

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23330				
Frequency (MHz)				793				
10	QPSK	1	0		23.38		25	0
10	QPSK	1	25		23.34			
10	QPSK	1	49		23.30			
10	QPSK	25	0		22.36		24	1
10	QPSK	25	12		22.32			
10	QPSK	25	25		22.30			
10	QPSK	50	0		22.39			

Band 17 Ant0 DSI1

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800	25	0
Frequency (MHz)				709	710	711		
10	QPSK	1	0	23.40	23.43	23.36		
10	QPSK	1	25	23.33	23.39	23.31	24	1
10	QPSK	1	49	23.30	23.31	23.41		
10	QPSK	25	0	22.34	22.39	22.38		
10	QPSK	25	12	22.34	22.31	22.34		
10	QPSK	25	25	22.10	22.33	22.34		
10	QPSK	50	0	22.33	22.44	22.40		

Band 26 Ant0 DSI1

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26765	26865	26965	25	0
Frequency (MHz)				821.5	831.5	841.5		
15	QPSK	1	0	23.18	23.26	23.16		
15	QPSK	1	37	23.15	23.17	23.21	24	1
15	QPSK	1	74	23.09	23.16	23.22		
15	QPSK	36	0	22.11	22.26	22.10		
15	QPSK	36	20	22.19	22.12	22.18		
15	QPSK	36	39	22.20	22.08	22.12		
15	QPSK	75	0	22.17	22.19	22.16		

Band 71 Ant0 DSI1

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				133222	133297	133372		
Frequency (MHz)				673	680.5	688		
20	QPSK	1	0	22.66	22.72	22.58	24	0
20	QPSK	1	49	22.61	22.67	22.56		
20	QPSK	1	99	22.68	22.63	22.64		
20	QPSK	50	0	21.59	21.70	21.68	23	1
20	QPSK	50	24	21.65	21.66	21.56		
20	QPSK	50	50	21.63	21.66	21.59		
20	QPSK	100	0	21.65	21.68	21.60		

Band 25 Ant2 DSI1

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26140	26340	26590		
Frequency (MHz)				1860	1880	1905		
20	QPSK	1	0	21.39	21.49	21.39	21.7	0
20	QPSK	1	49	21.38	21.38	21.46		
20	QPSK	1	99	21.42	21.45	21.36		
20	QPSK	50	0	21.46	21.47	21.39	21.7	0
20	QPSK	50	24	21.41	21.43	21.35		
20	QPSK	50	50	21.41	21.45	21.40		
20	QPSK	100	0	21.37	21.42	21.36		



Band 66 Ant2 DSI1

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				132072	132322	132572		
Frequency (MHz)				1720	1745	1770		
20	QPSK	1	0	21.79	21.85	21.80	22.1	0
20	QPSK	1	49	21.76	21.81	21.75		
20	QPSK	1	99	21.70	21.75	21.77		
20	QPSK	50	0	21.67	21.82	21.63	22.1	0
20	QPSK	50	24	21.58	21.81	21.72		
20	QPSK	50	50	21.70	21.71	21.75		
20	QPSK	100	0	21.70	21.71	21.68		

Band 7 Ant3 DSI1

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	18.91	19.01	18.90	19.4	0
20	QPSK	1	49	18.96	18.95	18.83		
20	QPSK	1	99	18.95	18.87	18.85		
20	QPSK	50	0	18.91	18.97	18.88	19.4	0
20	QPSK	50	24	18.94	18.85	18.90		
20	QPSK	50	50	18.88	18.83	18.87		
20	QPSK	100	0	18.84	18.93	18.88		

Band 30 Ant3 DSI1

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				27710				
Frequency (MHz)				2310				
10	QPSK	1	0		19.47		20.4	0
10	QPSK	1	25		19.42			
10	QPSK	1	49		19.34			
10	QPSK	25	0		19.46		20.4	0
10	QPSK	25	12		19.45			
10	QPSK	25	25		19.36			
10	QPSK	50	0		19.45			



Band 2 Ant5 DSI1

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100	23.2	0
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	22.53	22.72	22.63		
20	QPSK	1	49	22.57	22.64	22.48	23.2	0
20	QPSK	1	99	22.47	22.55	22.45		
20	QPSK	50	0	22.26	22.27	22.23		
20	QPSK	50	24	22.10	22.22	22.09		
20	QPSK	50	50	22.19	22.21	22.04		
20	QPSK	100	0	22.22	22.29	22.18		

Band 66 Ant5 DSI1

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				132072	132322	132572	23	0
Frequency (MHz)				1720	1745	1770		
20	QPSK	1	0	22.14	22.37	21.97		
20	QPSK	1	49	22.16	22.24	22.08	23	0
20	QPSK	1	99	21.99	22.18	21.99		
20	QPSK	50	0	21.80	21.87	21.79		
20	QPSK	50	24	21.61	21.78	21.64		
20	QPSK	50	50	21.75	21.77	21.60		
20	QPSK	100	0	21.87	21.89	21.80		

Reduced Power Mode for DSI 2

Band 5 Ant0 DSI2								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	20.99	21.11	20.89	22.4	0
10	QPSK	1	25	20.99	20.96	21.03		
10	QPSK	1	49	20.95	20.92	21.06		
10	QPSK	25	0	21.02	21.04	20.99	22.4	0
10	QPSK	25	12	20.83	20.80	20.71		
10	QPSK	25	25	20.95	20.95	20.85		
10	QPSK	50	0	21.03	21.08	20.96		

Band 12 Ant0 DSI2								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130		
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	21.70	21.80	21.73	22.7	0
10	QPSK	1	25	21.67	21.67	21.78		
10	QPSK	1	49	21.68	21.73	21.72		
10	QPSK	25	0	21.64	21.74	21.67	22.7	0
10	QPSK	25	12	21.58	21.58	21.39		
10	QPSK	25	25	21.67	21.59	21.67		
10	QPSK	50	0	21.63	21.77	21.75		

Band 13 Ant0 DSI2								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23230				
Frequency (MHz)				782				
10	QPSK	1	0		21.30		22.4	0
10	QPSK	1	25		21.19			
10	QPSK	1	49		21.15			
10	QPSK	25	0		21.14		22.4	0
10	QPSK	25	12		21.05			
10	QPSK	25	25		20.99			
10	QPSK	50	0		21.11			



Band 14 Ant0 DSI2

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23330				
Frequency (MHz)				793				
10	QPSK	1	0		21.41		22.4	0
10	QPSK	1	25		21.32			
10	QPSK	1	49		21.32			
10	QPSK	25	0		21.34		22.4	0
10	QPSK	25	12		21.25			
10	QPSK	25	25		21.08			
10	QPSK	50	0		21.26			

Band 17 Ant0 DSI2

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800		
Frequency (MHz)				709	710	711		
10	QPSK	1	0	21.78	21.89	21.67	22.7	0
10	QPSK	1	25	21.65	21.74	21.85		
10	QPSK	1	49	21.67	21.80	21.69		
10	QPSK	25	0	21.65	21.82	21.66	22.7	0
10	QPSK	25	12	21.59	21.56	21.47		
10	QPSK	25	25	21.64	21.55	21.66		
10	QPSK	50	0	21.71	21.77	21.74		

Band 26 Ant0 DSI2

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26765	26865	26965		
Frequency (MHz)				821.5	831.5	841.5		
15	QPSK	1	0	21.07	21.16	20.98	22.4	0
15	QPSK	1	37	20.97	21.03	21.10		
15	QPSK	1	74	21.03	21.03	21.10		
15	QPSK	36	0	21.01	21.12	21.05	22.4	0
15	QPSK	36	20	20.94	20.89	20.83		
15	QPSK	36	39	21.02	20.99	20.95		
15	QPSK	75	0	21.07	21.10	21.09		



Band 71 Ant0 DSI2

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				133222	133297	133372		
Frequency (MHz)				673	680.5	688		
20	QPSK	1	0	21.46	21.59	21.54		
20	QPSK	1	49	21.49	21.58	21.57	22.9	0
20	QPSK	1	99	21.54	21.50	21.42		
20	QPSK	50	0	21.51	21.54	21.49		
20	QPSK	50	24	21.50	21.43	21.52	22.9	0
20	QPSK	50	50	21.37	21.39	21.49		
20	QPSK	100	0	21.46	21.47	21.46		

Band 25 Ant2 DSI2

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26140	26340	26590		
Frequency (MHz)				1860	1880	1905		
20	QPSK	1	0	18.32	18.56	18.39		
20	QPSK	1	49	18.44	18.42	18.34	19.6	0
20	QPSK	1	99	18.23	18.27	18.30		
20	QPSK	50	0	18.28	18.38	18.28		
20	QPSK	50	24	18.30	18.36	18.29	19.6	0
20	QPSK	50	50	18.06	18.14	17.94		
20	QPSK	100	0	18.22	18.26	18.21		



Band 66 Ant2 DSI2

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				132072	132322	132572		
Frequency (MHz)				1720	1745	1770		
20	QPSK	1	0	17.65	17.79	17.71	18.9	0
20	QPSK	1	49	17.71	17.77	17.69		
20	QPSK	1	99	17.54	17.67	17.62		
20	QPSK	50	0	17.68	17.75	17.59	18.9	0
20	QPSK	50	24	17.65	17.74	17.54		
20	QPSK	50	50	17.45	17.49	17.42		
20	QPSK	100	0	17.49	17.69	17.52		

Band 7 Ant3 DSI2

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	15.74	15.93	15.83	16.9	0
20	QPSK	1	49	15.75	15.88	15.75		
20	QPSK	1	99	15.67	15.83	15.77		
20	QPSK	50	0	15.71	15.89	15.64	16.9	0
20	QPSK	50	24	15.79	15.79	15.74		
20	QPSK	50	50	15.55	15.67	15.45		
20	QPSK	100	0	15.69	15.73	15.67		

Band 30 Ant3 DSI2

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				27710				
Frequency (MHz)				2310				
10	QPSK	1	0		15.52		16.2	0
10	QPSK	1	25		15.48			
10	QPSK	1	49		15.31			
10	QPSK	25	0		15.41		16.2	0
10	QPSK	25	12		15.37			
10	QPSK	25	25		15.15			
10	QPSK	50	0		15.38			



Band 2 Ant5 DSI2

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	23.31	23.40	23.39	24.4	0
20	QPSK	1	49	23.35	23.32	23.34		
20	QPSK	1	99	23.37	23.31	23.33		
20	QPSK	50	0	22.27	22.44	22.31	24	0.4
20	QPSK	50	24	22.32	22.29	22.32		
20	QPSK	50	50	22.40	22.33	22.35		
20	QPSK	100	0	22.24	22.31	22.26		

Band 66 Ant5 DSI2

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				132072	132322	132572		
Frequency (MHz)				1720	1745	1770		
20	QPSK	1	0	23.37	23.40	23.34	25	0
20	QPSK	1	49	23.29	23.34	23.35		
20	QPSK	1	99	23.37	23.32	23.36		
20	QPSK	50	0	22.30	22.33	22.18	24	1
20	QPSK	50	24	22.25	22.25	22.27		
20	QPSK	50	50	22.21	22.32	22.09		
20	QPSK	100	0	22.24	22.29	22.19		



<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- “special subframe S” contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

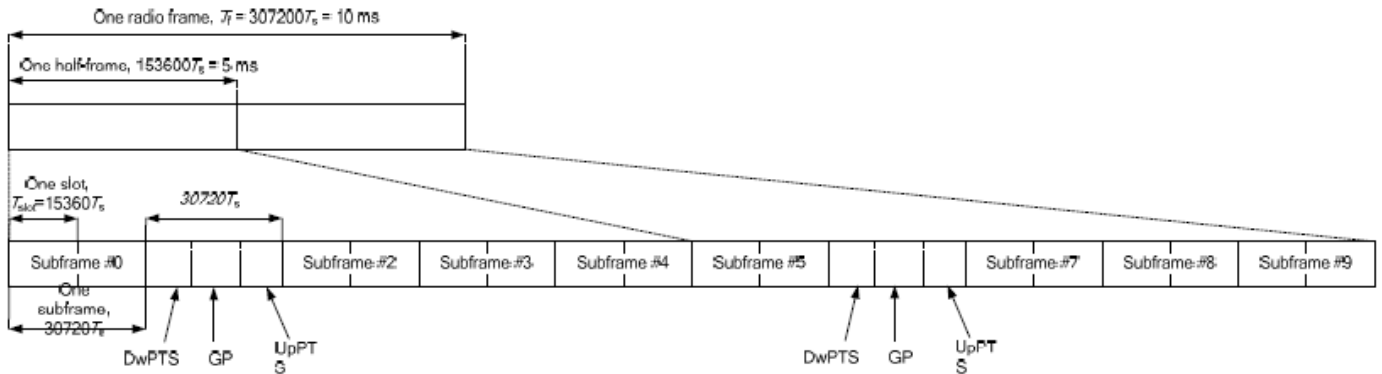


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$	-	-
8	$24144 \cdot T_s$			-		
9	$13168 \cdot T_s$			-		



Special subframe (30720·T _s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T _s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

For LTE TDD Power class 2

- Uplink-downlink configuration: 1. In a half-frame consisted of 5 subframes, uplink operation is in 2 uplink subframes and 1 special subframe.
- special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(2+0.167)/5 = 43.3\%$
- for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(2+0.143)/5 = 42.9\%$
- For TDD LTE SAR measurement, the duty cycle 1:2.33 (42.9 %) was used perform testing and considering the theoretical duty cycle of 43.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 42.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $43.3\%/42.9\% = 1.009$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.

For LTE TDD Power class 3

- Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.167)/5 = 63.3\%$
- for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.143)/5 = 62.9\%$
- For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.

The device can adjust uplink/downlink configuration automatically according to the transmitting power class level, as followings:

LTE TDD Band	Power Class level	support uplink/downlink configuration
LTE Band 41	> 23	1,2,3,4,5
	=23	0,1,2,3,4,5,6
	< 23	0,1,2,3,4,5,6

Full&Default Power Mode

Band 38 Ant3 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150	24	0
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	22.75	22.77	22.69	24	0
20	QPSK	1	49	22.67	22.71	22.69		
20	QPSK	1	99	22.72	22.72	22.74		
20	QPSK	50	0	21.77	21.84	21.77	23	1
20	QPSK	50	24	21.78	21.78	21.79		
20	QPSK	50	50	21.77	21.69	21.70		
20	QPSK	100	0	21.69	21.77	21.69		

Band 41 Ant3 Default

BW [MHz]	Modulation	RB Size	RB Offset	for IC Power Low Ch. / Freq.	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				39790	39750	40185	40620	41055	41490	24	0
Frequency (MHz)				2510	2506	2549.5	2593	2636.5	2680		
20	QPSK	1	0	23.05	23.14	23.01	23.14	23.11	23.08	24	0
20	QPSK	1	49	23.03	23.03	23.04	22.95	22.98	23.08		
20	QPSK	1	99	23.00	23.12	23.01	23.12	23.02	23.07		
20	QPSK	50	0	22.08	22.13	22.13	22.23	22.17	22.19	23	1
20	QPSK	50	24	22.14	22.21	22.21	22.11	22.06	22.13		
20	QPSK	50	50	22.16	22.22	22.12	22.15	22.09	22.16		
20	QPSK	100	0	22.16	22.18	22.15	22.19	22.09	22.09		

Band 41 HPUE Ant3 Default

BW [MHz]	Modulation	RB Size	RB Offset	for IC Power Low Ch. / Freq.	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	25.77	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				39790	39750	40185	40620	41055	41490	27	0
Frequency (MHz)				2510	2506	2549.5	2593	2636.5	2680		
20	QPSK	1	0	25.95	25.97	25.90	26.04	25.96	25.97	27	0
20	QPSK	1	49	25.95	25.92	25.93	25.93	25.90	25.90		
20	QPSK	1	99	25.91	26.01	25.99	25.98	25.91	25.98		
20	QPSK	50	0	24.93	25.05	24.94	25.06	25.05	25.00	26	1
20	QPSK	50	24	24.90	25.01	25.01	24.89	25.02	25.00		
20	QPSK	50	50	24.91	24.96	24.90	24.93	25.03	24.89		
20	QPSK	100	0	24.93	24.94	24.93	25.00	24.96	24.91		



Band 48 Ant4 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				55340	55830	56150	56640	23	0
Frequency (MHz)				3560	3609	3641	3690		
20	QPSK	1	0	21.94	22.05	22.01	22.00		
20	QPSK	1	49	21.96	21.97	21.99	21.92	22	1
20	QPSK	1	99	21.94	21.96	21.91	21.89		
20	QPSK	50	0	21.12	21.28	21.01	21.14		
20	QPSK	50	24	21.15	21.11	21.15	21.12	22	1
20	QPSK	50	50	21.10	21.11	21.17	21.07		
20	QPSK	100	0	21.05	21.22	21.17	21.08		

Reduced Power Mode for DSI 0

Band 38 Ant3 DSI0

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150	22.8	0
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	21.95	21.97	21.79		
20	QPSK	1	49	21.93	21.86	21.95	22.8	0
20	QPSK	1	99	21.89	21.95	21.95		
20	QPSK	50	0	21.85	21.90	21.89		
20	QPSK	50	24	21.88	21.84	21.85		
20	QPSK	50	50	21.89	21.82	21.80		
20	QPSK	100	0	21.83	21.86	21.81		

Band 41 HPUE Ant3 DSI0

BW [MHz]	Modulation	RB Size	RB Offset	for IC Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				39790	40185	40620	41055	41490	23	0
Frequency (MHz)				2510	2549.5	2593	2636.5	2680		
20	QPSK	1	0	21.85	21.88	21.96	21.92	21.95		
20	QPSK	1	49	21.91	21.95	21.91	21.86	21.95	22.8	0
20	QPSK	1	99	21.89	21.94	21.85	21.85	21.91		
20	QPSK	50	0	21.76	21.80	21.83	21.76	21.80		
20	QPSK	50	24	21.72	21.68	21.71	21.75	21.71		
20	QPSK	50	50	21.82	21.69	21.79	21.69	21.71		
20	QPSK	100	0	21.77	21.70	21.82	21.74	21.72		

Band 41 HPUE Ant3 DSI0

BW [MHz]	Modulation	RB Size	RB Offset	for IC Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				39790	40185	40620	41055	41490	24.4	0
Frequency (MHz)				2510	2549.5	2593	2636.5	2680		
20	QPSK	1	0	23.52	23.41	23.54	23.50	23.38		
20	QPSK	1	49	23.44	23.53	23.46	23.45	23.39	24.4	1
20	QPSK	1	99	23.46	23.38	23.51	23.50	23.53		
20	QPSK	50	0	23.44	23.47	23.48	23.44	23.45		
20	QPSK	50	24	23.41	23.44	23.42	23.45	23.46		
20	QPSK	50	50	23.47	23.41	23.43	23.45	23.43		
20	QPSK	100	0	23.46	23.41	23.50	23.46	23.44		



Band 48 Ant4 DSI0

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				55340	55830	56150	56640		
Frequency (MHz)				3560	3609	3641	3690		
20	QPSK	1	0	21.94	22.05	22.01	22.00	23	0
20	QPSK	1	49	21.96	21.97	21.99	21.92		
20	QPSK	1	99	21.94	21.96	21.91	21.89		
20	QPSK	50	0	21.12	21.28	21.01	21.14	22	1
20	QPSK	50	24	21.15	21.11	21.15	21.12		
20	QPSK	50	50	21.10	21.11	21.17	21.07		
20	QPSK	100	0	21.05	21.22	21.17	21.08		

Reduced Power Mode for DSI 1

Band 38 Ant3 DSI1								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	20.26	20.39	20.30	21.3	0
20	QPSK	1	49	20.19	20.34	20.27		
20	QPSK	1	99	20.34	20.29	20.32		
20	QPSK	50	0	19.93	20.29	20.15	21.3	1
20	QPSK	50	24	20.04	20.06	20.09		
20	QPSK	50	50	20.06	20.09	20.09		
20	QPSK	100	0	20.28	20.35	20.14		

Band 41 Ant3 DSI1										
BW [MHz]	Modulation	RB Size	RB Offset	for IC Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				39790	40185	40620	41055	41490		
Frequency (MHz)				2510	2549.5	2593	2636.5	2680		
20	QPSK	1	0	20.26	20.18	20.31	20.19	20.20	21.3	0
20	QPSK	1	49	20.14	20.08	20.24	20.20	20.14		
20	QPSK	1	99	20.30	20.27	20.24	20.27	20.13		
20	QPSK	50	0	20.05	19.89	20.23	20.01	19.92	21.3	0
20	QPSK	50	24	20.00	19.96	20.03	19.98	20.20		
20	QPSK	50	50	20.10	20.04	19.99	20.03	20.19		
20	QPSK	100	0	20.05	20.12	20.19	20.00	20.15		

Band 41 HPUE Ant3 DSI1										
BW [MHz]	Modulation	RB Size	RB Offset	for IC Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				39790	40185	40620	41055	41490		
Frequency (MHz)				2510	2549.5	2593	2636.5	2680		
20	QPSK	1	0	22.08	21.98	22.15	22.11	22.04	22.9	0
20	QPSK	1	49	21.99	21.91	21.99	22.04	22.01		
20	QPSK	1	99	22.08	21.99	21.99	22.08	21.89		
20	QPSK	50	0	21.96	21.78	22.02	21.76	21.71	22.9	0
20	QPSK	50	24	21.83	21.83	21.83	21.82	21.93		
20	QPSK	50	50	21.92	21.86	21.82	21.85	21.93		
20	QPSK	100	0	21.84	21.91	22.02	21.89	21.94		



Band 48 Ant4 DSI1

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				55340	55830	56150	56640	23	0
Frequency (MHz)				3560	3609	3641	3690		
20	QPSK	1	0	21.94	22.05	22.01	22.00		
20	QPSK	1	49	21.96	21.97	21.99	21.92	22	1
20	QPSK	1	99	21.94	21.96	21.91	21.89		
20	QPSK	50	0	21.12	21.28	21.01	21.14		
20	QPSK	50	24	21.15	21.11	21.15	21.12	22	1
20	QPSK	50	50	21.10	21.11	21.17	21.07		
20	QPSK	100	0	21.05	21.22	21.17	21.08		

Reduced Power Mode for DSI 2

Band 38 Ant3 DSI2

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150	18.7	0
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	17.25	17.37	17.30		
20	QPSK	1	49	17.23	17.21	17.25	18.7	0
20	QPSK	1	99	17.07	17.25	17.16		
20	QPSK	50	0	17.12	17.16	17.14		
20	QPSK	50	24	17.08	17.08	17.09		
20	QPSK	50	50	16.80	16.98	16.87		
20	QPSK	100	0	16.98	17.21	17.06		

Band 41 Ant3 DSI2

BW [MHz]	Modulation	RB Size	RB Offset	for IC Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				39790	40185	40620	41055	41490	18.7	0
Frequency (MHz)				2510	2549.5	2593	2636.5	2680		
20	QPSK	1	0	17.11	17.14	17.32	17.21	17.09		
20	QPSK	1	49	17.15	17.24	17.22	17.23	17.11	18.7	0
20	QPSK	1	99	17.04	17.12	17.18	17.11	17.07		
20	QPSK	50	0	16.98	17.12	17.18	17.05	16.98		
20	QPSK	50	24	17.01	17.06	17.12	17.14	17.02		
20	QPSK	50	50	16.79	16.81	17.02	16.86	16.76		
20	QPSK	100	0	16.92	17.02	17.20	17.03	16.86		

Band 41 HPUE Ant3 DSI2

BW [MHz]	Modulation	RB Size	RB Offset	for IC Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	25.77	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				39790	40185	40620	41055	41490	20.3	0
Frequency (MHz)				2510	2549.5	2593	2636.5	2680		
20	QPSK	1	0	18.83	18.92	19.06	18.97	18.83		
20	QPSK	1	49	18.86	18.97	18.99	18.88	18.90	20.3	0
20	QPSK	1	99	18.76	18.80	18.84	18.79	18.77		
20	QPSK	50	0	18.73	18.83	18.88	18.83	18.68		
20	QPSK	50	24	18.75	18.82	18.82	18.84	18.76		
20	QPSK	50	50	18.41	18.58	18.68	18.60	18.51		
20	QPSK	100	0	18.64	18.68	18.88	18.78	18.64		



Band 48 Ant4 DSI2

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				55340	55830	56150	56640	18.2	0
Frequency (MHz)				3560	3609	3641	3690		
20	QPSK	1	0	17.28	17.46	17.33	17.39		
20	QPSK	1	49	17.26	17.29	17.37	17.33	18.2	0
20	QPSK	1	99	17.15	17.15	17.35	17.25		
20	QPSK	50	0	17.15	17.16	17.31	17.25		
20	QPSK	50	24	17.11	17.19	17.31	17.19	18.2	0
20	QPSK	50	50	16.81	16.87	17.13	16.99		
20	QPSK	100	0	16.97	17.08	17.27	17.21		

5G NR Output Power (Unit: dBm)

General Note:

1. 5G NR n2/n5/n7/n12/n13/n14/n25/n26/n30/n66/n38/n41/n48//n71//n77/n78 is SA mode.
2. 5G NR n2/n5/n7/n12/n25/n66/n38/n41/n48//n71//n77/n78 is NSA mode.
3. For 5G NR test procedure was following step similar FCC KDB 941225 D05:
 - a. For DFT-OFDM and CP-OFDM output power measurement reduction, according to 38.101 maximum power reduction for power class2 and 3, the CP-OFDM mode will not higher than DFT-OFDM mode, therefore, similar FCC KDB 941225 D05 procedure for other modulation output power for each RB allocation configuration is > not $\frac{1}{2}$ dB higher than the same configuration in DFT-s QPSK and the reported SAR for the DFT-s QPSK configuration is ≤ 1.45 W/kg; CP-OFDM testing is not required.
 - b. For DFT-OFDM output power measurement reduction, according to 38.101 maximum power reduction for power class2 and 3, for 16QAM/64QAM/256QAM and smaller bandwidth output power will spot check largest channel bandwidth worst RB configuration to ensure the 16QAM/64QAM/256QAM and smaller bandwidth output power will not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth.
 - c. SAR testing start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel
 - d. 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure
 - e. QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested
 - f. PI/2 BPSK/16QAM/64QAM/256QAM output powers according to 3GPP MPR will not $\frac{1}{2}$ dB higher than the same configuration in QPSK, also reported SAR for the QPSK configuration is less than 1.45 W/kg, PI/2 BPSK /16QAM/64QAM/256QAM SAR testing are not required.
 - g. Smaller bandwidth output power for each RB allocation configuration for this device will not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg, smaller bandwidth SAR testing is not required for this device
4. For 5G NR other bands, using FTM to perform SAR with default 100% transmission.
5. NSA and SA mode should perform SAR separately. For the maximum power of NSA mode is the same as SA total power level, so SA SAR can represent NSA mode SAR.
6. 5GNR NSA mode, the power level is the same as 5GNR SA mode, so 5GNR NSA mode and SA mode power table only show one time.
7. 5G NR supports CP-OFDM and DFT-s-OFDM modulation, for DFT-s-OFDM power is higher than CP-OFDM, so only show DFT-s-OFDM power table and chose DFT-s-OFDM to perform SAR testing.
8. For DFT-s-OFDM and CP-OFDM output power measurement reduction, according to 38.101 maximum power reduction for the CP-OFDM mode will not higher than DFT-s-OFDM mode, therefore, CP-OFDM measurement is unnecessary.
9. 5GNR n41/n77 (27O&27Q)/n78 (27O&27Q) is supports HPUE mode and 5GNR n77 (part96) /n78 (part96) is not supports HPUE mode, HPUE power and SAR testing performed separately.
10. For 5GNR n41/n77/n78 HPUE with higher power, so we chose power class 2 full SAR testing.
11. For 5GNR n77/n78 is supports MIMO.



<3GPP 38.101 MPR for EN-DC>

Table 6.2.2-1 Maximum power reduction (MPR) for power class 3

Modulation		MPR (dB)		
		Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM	Pi/2 BPSK	$\leq 3.5^1$	$\leq 1.2^1$	$\leq 0.2^1$
		$\leq 0.5^2$	$\leq 0.5^2$	0 ²
	QPSK	≤ 1		0
	16 QAM	≤ 2		≤ 1
	64 QAM	≤ 2.5		
CP-OFDM	256 QAM	≤ 4.5		
	QPSK	≤ 3		≤ 1.5
	16 QAM	≤ 3		≤ 2
	64 QAM	≤ 3.5		
	256 QAM	≤ 6.5		

NOTE 1: Applicable for UE operating in TDD mode with Pi/2 BPSK modulation and UE indicates support for UE capability *powerBoosting-pi2BPSK* and if the IE *powerBoostPi2BPSK* is set to 1 and 40 % or less slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79. The reference power of 0 dB MPR is 26 dBm.

NOTE 2: Applicable for UE operating in FDD mode, or in TDD mode in bands other than n40, n41, n77, n78 and n79 with Pi/2 BPSK modulation and if the IE *powerBoostPi2BPSK* is set to 0 and if more than 40 % of slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79.

Table 6.2.2-2 Maximum power reduction (MPR) for power class 2

Modulation		MPR (dB)		
		Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM	Pi/2 BPSK	≤ 3.5	≤ 0.5	0
	QPSK	≤ 3.5	≤ 1	0
	16 QAM	≤ 3.5	≤ 2	≤ 1
	64 QAM	≤ 3.5	≤ 2.5	
	256 QAM	≤ 4.5		
CP-OFDM	QPSK	≤ 3.5	≤ 3	≤ 1.5
	16 QAM	≤ 3.5	≤ 3	≤ 2
	64 QAM	≤ 3.5		
	256 QAM	≤ 6.5		

Full&Default Power Mode

n5 Ant0 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				166800	167300	167800	25.0	0.0
Frequency (MHz)				834	836.5	839		
20	QPSK	1	1	23.62	23.69	23.66		
20	QPSK	1	53	23.63	23.61	23.61	24.0	1.0
20	QPSK	1	104	23.65	23.68	23.62		
20	QPSK	50	0	22.67	22.74	22.71		
20	QPSK	50	28	23.59	23.63	23.62	24.0	0.0
20	QPSK	50	56	22.50	22.68	22.63		
20	QPSK	100	0	22.74	22.82	22.78		



n12 Ant0 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				141300	141500	141700	25.0	0.0
Frequency (MHz)				706.5	707.5	708.5		
15	QPSK	1	1	23.74	23.79	23.77		
15	QPSK	1	40	23.58	23.75	23.62	24.0	1.0
15	QPSK	1	77	23.72	23.78	23.74		
15	QPSK	36	0	22.82	22.87	22.80		
15	QPSK	36	22	23.53	23.67	23.59	24.0	1.0
15	QPSK	36	43	22.75	22.78	22.65		
15	QPSK	75	0	22.68	22.75	22.69		

n13 Ant0 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel					156400		25.0	0.0
Frequency (MHz)					782			
10	QPSK	1	1		23.72			
10	QPSK	1	26		23.68		24.0	1.0
10	QPSK	1	50		23.60			
10	QPSK	25	0		22.59			
10	QPSK	25	14		23.55		24.0	1.0
10	QPSK	25	27		22.64			
10	QPSK	50	0		22.62			

n14 Ant0 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel					158600		25.0	0.0
Frequency (MHz)					793			
10	QPSK	1	1		23.69			
10	QPSK	1	26		23.67		24.0	1.0
10	QPSK	1	50		23.58			
10	QPSK	25	0		22.60			
10	QPSK	25	14		23.51		24.0	1.0
10	QPSK	25	27		22.61			
10	QPSK	50	0		22.53			



n26 Ant0 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				164800	166300	167800	25.0	0.0
Frequency (MHz)				824	831.5	839		
20	QPSK	1	1	23.61	23.84	23.82		
20	QPSK	1	53	23.57	23.80	23.76	24.0	1.0
20	QPSK	1	104	23.56	23.81	23.70		
20	QPSK	50	0	22.57	22.90	22.80		
20	QPSK	50	28	23.34	23.81	23.26	25.0	0.0
20	QPSK	50	56	22.67	22.79	22.78	24.0	1.0
20	QPSK	100	0	22.61	22.89	22.82		

n71 Ant0 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				134600	136100	137600	24.0	0.0
Frequency (MHz)				673	680.5	688		
20	QPSK	1	1	22.92	22.95	22.92		
20	QPSK	1	53	22.82	22.89	22.89	23.0	1.0
20	QPSK	1	104	22.81	22.88	22.87		
20	QPSK	50	0	21.95	21.94	21.91		
20	QPSK	50	28	22.85	22.94	22.84	24.0	0.0
20	QPSK	50	56	21.81	21.83	21.90	23.0	1.0
20	QPSK	100	0	21.85	21.88	21.87		



n41 Ant0 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				509202	518598	528000	24.0	0.0
Frequency (MHz)				2546.01	2592.99	2640		
100	QPSK	1	1	23.05	23.09	23.06		
100	QPSK	1	137	22.98	23.01	23.08	23.0	1.0
100	QPSK	1	271	23.02	23.06	23.01		
100	QPSK	135	0	22.05	22.12	22.03		
100	QPSK	135	69	22.88	22.92	22.91	23.0	1.0
100	QPSK	135	138	22.14	22.14	22.03		
100	QPSK	270	0	21.99	22.15	22.14		

n2 Ant2 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				372000	376000	380000	25.0	0.0
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	1	23.62	23.82	23.67		
20	QPSK	1	53	23.53	23.71	23.56	24.0	1.0
20	QPSK	1	104	23.56	23.58	23.57		
20	QPSK	50	0	22.69	22.72	22.68		
20	QPSK	50	28	23.57	23.71	23.65	25.0	0.0
20	QPSK	50	56	22.59	22.69	22.73		
20	QPSK	100	0	22.62	22.80	22.70		

Part270 n77 Ant2 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				650000	656000	662000	23.0	0.0
Frequency (MHz)				3750	3840	3930		
100	QPSK	1	1	21.60	21.78	21.73		
100	QPSK	1	137	21.77	21.71	21.67	23.0	0.0
100	QPSK	1	271	21.59	21.67	21.63		
100	QPSK	135	0	21.69	21.67	21.71		
100	QPSK	135	69	21.70	21.75	21.67	23.0	0.0
100	QPSK	135	138	21.63	21.71	21.74		
100	QPSK	270	0	21.75	21.77	21.75		

Part27Q n77 PC2 Ant2 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel					633334		25.0	0.0
Frequency (MHz)					3500.01			
100	QPSK	1	1		23.54			
100	QPSK	1	137		23.43		24.0	1.0
100	QPSK	1	271		23.36			
100	QPSK	135	0		22.38			
100	QPSK	135	69		23.44		24.0	1.0
100	QPSK	135	138		22.37			
100	QPSK	270	0		22.39			

Part27Q n78 Ant2 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel					633334		22.0	0.0
Frequency (MHz)					3500.01			
100	QPSK	1	1		21.25			
100	QPSK	1	137		21.11		22.0	0.0
100	QPSK	1	271		21.22			
100	QPSK	135	0		21.13			
100	QPSK	135	69		21.23		22.0	0.0
100	QPSK	135	138		21.13			
100	QPSK	270	0		21.23			

Part96 n78 PC3 Ant2 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				640000	641666	643332	23.0	0.0
Frequency (MHz)				3600	3624.99	3649.98		
100	QPSK	1	1	21.39	21.43	21.37		
100	QPSK	1	137	21.35	21.31	21.35	23.0	0.0
100	QPSK	1	271	21.33	21.37	21.29		
100	QPSK	135	0	21.32	21.27	21.25		
100	QPSK	135	69	21.38	21.40	21.34	23.0	0.0
100	QPSK	135	138	21.26	21.26	21.20		
100	QPSK	270	0	21.21	21.41	21.24		



n25 Ant2 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				374000	376500	379000	25.0	0.0
Frequency (MHz)				1870	1882.5	1895		
40	QPSK	1	1	23.61	23.71	23.69		
40	QPSK	1	108	23.58	23.56	23.55	24.0	1.0
40	QPSK	1	214	23.44	23.69	23.53		
40	QPSK	108	0	22.60	22.71	22.61		
40	QPSK	108	54	23.60	23.63	23.62	25.0	0.0
40	QPSK	108	108	22.54	22.66	22.74		
40	QPSK	216	0	22.62	22.74	22.65		

Part270 n77 PC2 Ant2 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				650000	656000	662000	26.0	0.0
Frequency (MHz)				3750	3840	3930		
100	QPSK	1	1	24.64	24.66	24.61		
100	QPSK	1	137	24.49	24.53	24.50	24.0	2.0
100	QPSK	1	271	24.62	24.52	24.57		
100	QPSK	135	0	22.59	22.61	22.69	26.0	0.0
100	QPSK	135	69	24.50	24.53	24.45	25.0	1.0
100	QPSK	135	138	22.61	22.67	22.54		
100	QPSK	270	0	22.55	22.69	22.60		

Part270 n78 Ant2 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				650000	650000	650000	23.0	0.0
Frequency (MHz)				3750	3750	3750		
100	QPSK	1	1		21.90			
100	QPSK	1	137		21.88		23.0	0.0
100	QPSK	1	271		21.71			
100	QPSK	135	0		21.86		23.0	0.0
100	QPSK	135	69		21.87		23.0	0.0
100	QPSK	135	138		21.74			
100	QPSK	270	0		21.78			

Part27Q n78 PC2 Ant2 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel					633334		24.0	0.0
Frequency (MHz)					3500.01			
100	QPSK	1	1		22.93			
100	QPSK	1	137		22.77		23.0	1.0
100	QPSK	1	271		22.74			
100	QPSK	135	0		22.78		24.0	0.0
100	QPSK	135	69		22.89		23.0	1.0
100	QPSK	135	138		22.78			
100	QPSK	270	0		22.92			



n66 Ant2 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				346000	349000	352000	25.0	0.0
Frequency (MHz)				1730	1745	1760		
40	QPSK	1	1	23.54	23.80	23.59		
40	QPSK	1	108	23.45	23.69	23.55	24.0	1.0
40	QPSK	1	214	23.43	23.57	23.57		
40	QPSK	108	0	22.63	22.64	22.58		
40	QPSK	108	54	23.48	23.65	23.60	25.0	0.0
40	QPSK	108	108	22.64	22.71	22.62		
40	QPSK	216	0	22.69	22.80	22.69		

Part27Q n77 Ant2 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel					633334		23.0	0.0
Frequency (MHz)					3500.01			
100	QPSK	1	1		21.49			
100	QPSK	1	137		21.44		23.0	0.0
100	QPSK	1	271		21.37			
100	QPSK	135	0		21.41			
100	QPSK	135	69		21.42		23.0	0.0
100	QPSK	135	138		21.40		23.0	0.0
100	QPSK	270	0		21.32			

Part27O n78 PC2 Ant2 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				650000	650000	650000	25.0	0.0
Frequency (MHz)				3750	3750	3750		
100	QPSK	1	1		24.57			
100	QPSK	1	137		24.46		25.0	0.0
100	QPSK	1	271		24.56			
100	QPSK	135	0		24.40			
100	QPSK	135	69		24.49		25.0	0.0
100	QPSK	135	138		23.57		24.0	1.0
100	QPSK	270	0		23.59			

Part96 n77 PC3 Ant2 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				640000	641666	643332	23.0	0.0
Frequency (MHz)				3600	3624.99	3649.98		
100	QPSK	1	1	21.66	21.76	21.72		
100	QPSK	1	137	21.52	21.71	21.71	23.0	0.0
100	QPSK	1	271	21.59	21.57	21.68		
100	QPSK	135	0	21.59	21.60	21.59		
100	QPSK	135	69	21.55	21.72	21.70	23.0	0.0
100	QPSK	135	138	21.56	21.59	21.65	23.0	0.0
100	QPSK	270	0	21.48	21.70	21.61		



n7 Ant3 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				504000	507000	510000		
Frequency (MHz)				2520	2535	2550		
40	QPSK	1	1	23.29	23.32	23.27	24.0	0.0
40	QPSK	1	108	23.22	23.16	23.21		
40	QPSK	1	214	23.22	23.14	23.13		
40	QPSK	108	0	22.28	22.33	22.34	23.0	1.0
40	QPSK	108	54	23.18	23.22	23.10	24.0	0.0
40	QPSK	108	108	22.26	22.28	22.20	23.0	1.0
40	QPSK	216	0	22.36	22.38	22.20		

n38 Ant3 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				518004	519000	519996	23.0	0.0
Frequency (MHz)				2590.02	2595	2599.98		
40	QPSK	1	1	22.14	22.30	22.24		
40	QPSK	1	53	21.96	22.16	22.21	22.0	1.0
40	QPSK	1	104	21.99	22.16	22.18		
40	QPSK	50	0	21.13	21.28	21.18	23.0	0.0
40	QPSK	50	28	22.09	22.25	22.16	22.0	1.0
40	QPSK	50	56	21.11	21.22	21.24	22.0	1.0
40	QPSK	100	0	21.10	21.31	21.23		

n41 PC2 Ant3 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				509202	518598	528000	27.0	0.0
Frequency (MHz)				2546.01	2592.99	2640		
100	QPSK	1	1	25.34	25.45	25.38		
100	QPSK	1	137	25.25	25.26	25.34	26.0	1.0
100	QPSK	1	271	25.33	25.36	25.37		
100	QPSK	135	0	24.30	24.37	24.31	27.0	0.0
100	QPSK	135	69	25.23	25.44	25.34	26.0	1.0
100	QPSK	135	138	24.36	24.40	24.31		
100	QPSK	270	0	24.41	24.49	24.33		

Part270 n77 PC2 Ant3 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				650000	656000	662000	25.0	0.0
Frequency (MHz)				3750	3840	3930		
100	QPSK	1	1	24.21	24.34	24.25		
100	QPSK	1	137	24.08	24.24	24.10	24.0	1.0
100	QPSK	1	271	24.02	24.28	24.06		
100	QPSK	135	0	23.12	23.31	23.19	25.0	0.0
100	QPSK	135	69	24.15	24.27	24.12	24.0	1.0
100	QPSK	135	138	23.16	23.41	23.24		
100	QPSK	270	0	23.16	23.36	23.28		

Part270 n78 Ant3 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel					650000		23.0	0.0
Frequency (MHz)					3750			
100	QPSK	1	1		22.24			
100	QPSK	1	137		22.20		22.0	1.0
100	QPSK	1	271		22.11			
100	QPSK	135	0		21.23			
100	QPSK	135	69		22.15		23.0	0.0
100	QPSK	135	138		21.28		22.0	1.0
100	QPSK	270	0		21.15			

Part27Q n78 PC2 Ant3 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel					633334		24.0	0.0
Frequency (MHz)					3500.01			
100	QPSK	1.0	1		22.96			
100	QPSK	1	137		22.79		23.0	1.0
100	QPSK	1	271		22.84			
100	QPSK	135	0		21.89			
100	QPSK	135	69		22.83		24.0	0.0
100	QPSK	135	138		21.89		23.0	1.0
100	QPSK	270	0		21.90			

n30 Ant3 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel					462000		25.0	0.0
Frequency (MHz)					2310			
10	QPSK	1	1		23.92			
10	QPSK	1	26		23.80		24.0	1.0
10	QPSK	1	50		23.81			
10	QPSK	25	0		22.77		24.0	1.0
10	QPSK	25	14		22.84		24.0	1.0
10	QPSK	25	27		22.76		24.0	1.0
10	QPSK	50	0		22.79			

n41 Ant3 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				509202	518598	528000	24.0	0.0
Frequency (MHz)				2546.01	2592.99	2640		
100	QPSK	1	1	22.73	22.87	22.80		
100	QPSK	1	137	22.67	22.78	22.63	23.0	1.0
100	QPSK	1	271	22.80	22.84	22.66		
100	QPSK	135	0	21.72	21.92	21.77	24.0	0.0
100	QPSK	135	69	22.71	22.83	22.72	23.0	1.0
100	QPSK	135	138	21.63	21.94	21.77		
100	QPSK	270	0	21.65	21.81	21.72		

Part27Q n77 Ant3 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel					633334			
Frequency (MHz)					3500.01			
100	QPSK	1	1		22.23		23.0	0.0
100	QPSK	1	137		22.11			
100	QPSK	1	271		22.05			
100	QPSK	135	0		22.15		23.0	0.0
100	QPSK	135	69		22.21		23.0	0.0
100	QPSK	135	138		22.18		23.0	0.0
100	QPSK	270	0		22.16			

Part27O n78 PC2 Ant3 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				650000	650000	650000		
Frequency (MHz)				3750	3750	3750		
100	QPSK	1	1		23.56		25.0	0.0
100	QPSK	1	137		23.45			
100	QPSK	1	271		23.39			
100	QPSK	135	0		22.55		24.0	1.0
100	QPSK	135	69		23.40		25.0	0.0
100	QPSK	135	138		22.49		24.0	1.0
100	QPSK	270	0		22.53			



Part96 n77 PC3 Ant3 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				640000	641666	643332	24.0	0.0
Frequency (MHz)				3600	3624.99	3649.98		
100	QPSK	1	1	22.35	22.49	22.48		
100	QPSK	1	137	22.16	22.33	22.44	23.0	1.0
100	QPSK	1	271	22.22	22.38	22.35		
100	QPSK	135	0	21.30	21.54	21.56		
100	QPSK	135	69	22.19	22.45	22.36	23.0	1.0
100	QPSK	135	138	21.34	21.49	21.42		
100	QPSK	270	0	21.37	21.50	21.47		



Part27O n77 Ant3 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				650000	656000	662000	24.0	0.0
Frequency (MHz)				3750	3840	3930		
100	QPSK	1	1	22.80	22.94	22.91		
100	QPSK	1	137	22.78	22.93	22.86	23.0	1.0
100	QPSK	1	271	22.92	22.87	22.84		
100	QPSK	135	0	21.83	21.90	21.89		
100	QPSK	135	69	22.84	22.92	22.88	23.0	1.0
100	QPSK	135	138	21.90	21.87	21.82		
100	QPSK	270	0	21.92	21.96	21.91		

Part27Q n77 PC2 Ant3 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel					633334		25.0	0.0
Frequency (MHz)					3500.01			
100	QPSK	1	1		23.45			
100	QPSK	1	137		23.38		24.0	1.0
100	QPSK	1	271		23.28			
100	QPSK	135	0		22.48			
100	QPSK	135	69		23.39		24.0	1.0
100	QPSK	135	138		22.44			
100	QPSK	270	0		22.46			

Part27Q n78 Ant3 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel					633334		22.0	0.0
Frequency (MHz)					3500.01			
100	QPSK	1	1		21.85			
100	QPSK	1	137		21.77		22.0	0.0
100	QPSK	1	271		21.79			
100	QPSK	135	0		21.74			
100	QPSK	135	69		21.79		22.0	0.0
100	QPSK	135	138		21.66		22.0	0.0
100	QPSK	270	0		21.69			

Part96 n78 PC3 Ant3

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				640000	641666	643332	24.0	0.0
Frequency (MHz)				3600	3624.99	3649.98		
100	QPSK	1	1	22.26	22.37	22.35		
100	QPSK	1	137	22.11	22.19	22.24	23.0	1.0
100	QPSK	1	271	22.22	22.34	22.28		
100	QPSK	135	0	21.18	21.31	21.27		
100	QPSK	135	69	22.08	22.31	22.28	24.0	0.0
100	QPSK	135	138	21.19	21.41	21.32	23.0	1.0
100	QPSK	270	0	21.31	21.43	21.38		

n48 Part96 Ant4 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				638000	641666	645332	23.0	0.0
Frequency (MHz)				3570	3624.99	3679.98		
40	QPSK	1	1	22.47	22.64	22.60		
40	QPSK	1	53	22.32	22.55	22.50	22.0	1.0
40	QPSK	1	104	22.32	22.57	22.55		
40	QPSK	50	0	21.56	21.56	21.52		
40	QPSK	50	28	22.32	22.53	22.41	23.0	0.0
40	QPSK	50	56	21.43	21.72	21.63		
40	QPSK	100	0	21.48	21.69	21.53		

Part27Q n77 Ant4 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel					633334		24.0	0.0
Frequency (MHz)					3500.01			
100	QPSK	1	1		23.05			
100	QPSK	1	137		22.96		24.0	0.0
100	QPSK	1	271		23.00			
100	QPSK	135	0		22.98			
100	QPSK	135	69		23.11		24.0	0.0
100	QPSK	135	138		23.07			
100	QPSK	270	0		23.09			

Part270 n78 PC2 Ant4 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				650000	650000	650000	27.0	0.0
Frequency (MHz)				3750	3750	3750		
100	QPSK	1	1		26.08			
100	QPSK	1	137		26.00		26.0	1.0
100	QPSK	1	271		26.06			
100	QPSK	135	0		25.15			
100	QPSK	135	69		25.92		27.0	0.0
100	QPSK	135	138		25.01		26.0	1.0
100	QPSK	270	0		25.05			

Part96 n77 PC3 Ant4 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				640000	641666	643332	24.0	0.0
Frequency (MHz)				3600	3624.99	3649.98		
100	QPSK	1	1	22.98	23.05	22.96		
100	QPSK	1	137	22.91	22.90	22.77	23.0	1.0
100	QPSK	1	271	22.92	22.97	22.92		
100	QPSK	135	0	22.07	21.96	21.89		
100	QPSK	135	69	22.93	23.03	22.86	24.0	0.0
100	QPSK	135	138	21.97	22.07	22.04	23.0	1.0
100	QPSK	270	0	21.96	22.07	21.90		



Part27O n77 Ant4 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				650000	656000	662000	24.0	0.0
Frequency (MHz)				3750	3840	3930		
100	QPSK	1	1	23.04	23.07	23.05		
100	QPSK	1	137	22.95	22.99	22.97	23.0	1.0
100	QPSK	1	271	22.95	23.01	22.95		
100	QPSK	135	0	22.00	22.01	22.08		
100	QPSK	135	69	22.91	23.01	22.93	23.0	1.0
100	QPSK	135	138	22.09	22.10	22.06		
100	QPSK	270	0	21.99	22.09	22.07		

Part27Q n77 PC2 Ant4 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel					633334		27.0	0.0
Frequency (MHz)					3500.01			
100	QPSK	1	1		26.02			
100	QPSK	1	137		25.93		26.0	1.0
100	QPSK	1	271		25.90			
100	QPSK	135	0		25.00			
100	QPSK	135	69		25.97		26.0	1.0
100	QPSK	135	138		24.95			
100	QPSK	270	0		25.08			

Part27Q n78 Ant4 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel					633334		24.0	0.0
Frequency (MHz)					3500.01			
100	QPSK	1	1		22.76			
100	QPSK	1	137		22.71		24.0	0.0
100	QPSK	1	271		22.72			
100	QPSK	135	0		22.58			
100	QPSK	135	69		22.68		24.0	0.0
100	QPSK	135	138		22.62			
100	QPSK	270	0		22.65			

Part96 n78 PC3 Ant4 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				640000	641666	643332	24.0	0.0
Frequency (MHz)				3600	3624.99	3649.98		
100	QPSK	1	1	22.96	22.99	22.97		
100	QPSK	1	137	22.79	22.83	22.95	23.0	1.0
100	QPSK	1	271	22.78	22.84	22.91		
100	QPSK	135	0	21.93	21.99	22.00	24.0	0.0
100	QPSK	135	69	22.80	22.95	22.81	23.0	1.0
100	QPSK	135	138	21.97	21.97	21.94	23.0	1.0
100	QPSK	270	0	21.95	22.06	21.96		

Part270 n77 PC2 Ant4 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				650000	656000	662000	27.0	0.0
Frequency (MHz)				3750	3840	3930		
100	QPSK	1	1	26.07	26.15	26.09		
100	QPSK	1	137	25.98	26.08	25.98	26.0	1.0
100	QPSK	1	271	25.91	26.09	25.97		
100	QPSK	135	0	25.00	25.21	25.16	27.0	0.0
100	QPSK	135	69	25.99	26.04	25.97	26.0	1.0
100	QPSK	135	138	25.14	25.23	25.04	26.0	1.0
100	QPSK	270	0	25.16	25.19	25.12		

Part27O n78 Ant4 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				650000	650000	650000		
Frequency (MHz)				3750	3750	3750		
100	QPSK	1	1		22.94		24.0	0.0
100	QPSK	1	137		22.79			
100	QPSK	1	271		22.91			
100	QPSK	135	0		22.85		24.0	0.0
100	QPSK	135	69		22.92		24.0	0.0
100	QPSK	135	138		22.75		24.0	0.0
100	QPSK	270	0		22.76			

Part27Q n78 PC2 Ant4 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel					633334			
Frequency (MHz)					3500.01			
100	QPSK	1	1		25.88		27.0	0.0
100	QPSK	1	137		25.82			
100	QPSK	1	271		25.83			
100	QPSK	135	0		24.82		26.0	1.0
100	QPSK	135	69		25.84		27.0	0.0
100	QPSK	135	138		24.82		26.0	1.0
100	QPSK	270	0		24.96			

n25 Ant5 Ant5 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				374000	376500	379000	25.0	0.0
Frequency (MHz)				1870	1882.5	1895		
40	QPSK	1	1	24.45	24.62	24.56		
40	QPSK	1	108	24.42	24.51	24.39	24.0	1.0
40	QPSK	1	214	24.33	24.61	24.46		
40	QPSK	108	0	23.51	23.58	23.60		
40	QPSK	108	54	24.30	24.59	24.48	25.0	0.0
40	QPSK	108	108	23.46	23.60	23.51		
40	QPSK	216	0	23.52	23.59	23.57		

n41 Ant5 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				509202	518598	528000	23.0	0.0
Frequency (MHz)				2546.01	2592.99	2640		
100	QPSK	1	1	22.23	22.45	22.38		
100	QPSK	1	137	22.17	22.36	22.22	22.0	1.0
100	QPSK	1	271	22.22	22.28	22.22		
100	QPSK	135	0	21.15	21.49	21.35		
100	QPSK	135	69	22.18	22.38	22.21	23.0	0.0
100	QPSK	135	138	21.20	21.46	21.30		
100	QPSK	270	0	21.15	21.48	21.38		



n41 PC2 Ant5 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				509202	518598	528000	25.0	0.0
Frequency (MHz)				2546.01	2592.99	2640		
100	QPSK	1	1	23.71	23.88	23.65		
100	QPSK	1	137	23.61	23.83	23.50	24.0	1.0
100	QPSK	1	271	23.52	23.82	23.47		
100	QPSK	135	0	22.64	22.90	22.65		
100	QPSK	135	69	23.69	23.76	23.64	25.0	0.0
100	QPSK	135	138	22.76	22.81	22.62	24.0	1.0
100	QPSK	270	0	22.64	22.82	22.62		

n66 Ant5 Ant5 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				346000	349000	352000	25.0	0.0
Frequency (MHz)				1730	1745	1760		
40	QPSK	1	1	24.44	24.58	24.50		
40	QPSK	1	108	24.27	24.40	24.32	24.0	1.0
40	QPSK	1	214	24.35	24.48	24.42		
40	QPSK	108	0	23.49	23.50	23.50		
40	QPSK	108	54	24.40	24.47	24.46	25.0	0.0
40	QPSK	108	108	23.46	23.63	23.51	24.0	1.0
40	QPSK	216	0	23.41	23.50	23.46		



n41 Ant6 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				509202	518598	528000	23.0	0.0
Frequency (MHz)				2546.01	2592.99	2640		
100	QPSK	1	1	22.44	22.53	22.29		
100	QPSK	1	137	22.38	22.38	22.23	23.0	0.0
100	QPSK	1	271	22.31	22.47	22.11		
100	QPSK	135	0	22.31	22.44	22.21		
100	QPSK	135	69	22.43	22.47	22.15	23.0	0.0
100	QPSK	135	138	22.43	22.44	22.17	23.0	0.0
100	QPSK	270	0	22.28	22.44	22.28		

Part27Q n77 Ant6 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel					633334		23.0	0.0
Frequency (MHz)					3500.01			
100	QPSK	1	1		22.32			
100	QPSK	1	137		22.23		22.0	1.0
100	QPSK	1	271		22.21			
100	QPSK	135	0		21.23			
100	QPSK	135	69		22.17		23.0	0.0
100	QPSK	135	138		21.30			
100	QPSK	270	0		21.37			

Part27O n78 PC2 Ant6 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				650000	650000	650000	26.0	0.0
Frequency (MHz)				3750	3750	3750		
100	QPSK	1	1		24.94			
100	QPSK	1	137		24.82		25.0	1.0
100	QPSK	1	271		24.77			
100	QPSK	135	0		23.83			
100	QPSK	135	69		24.92		26.0	0.0
100	QPSK	135	138		23.80			
100	QPSK	270	0		23.77			

Part96 n77 PC3 Ant6 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				640000	641666	643332	23.0	0.0
Frequency (MHz)				3600	3624.99	3649.98		
100	QPSK	1	1	21.75	21.84	21.71		
100	QPSK	1	137	21.76	21.72	21.53	23.0	0.0
100	QPSK	1	271	21.77	21.69	21.58		
100	QPSK	135	0	21.71	21.67	21.56		
100	QPSK	135	69	21.68	21.74	21.63	23.0	0.0
100	QPSK	135	138	21.55	21.54	21.54		
100	QPSK	270	0	21.59	21.76	21.69		

Part27O n77 Ant6 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				650000	656000	662000	23.0	0.0
Frequency (MHz)				3750	3840	3930		
100	QPSK	1	1	21.96	22.01	21.84		
100	QPSK	1	137	21.94	21.93	21.69	23.0	0.0
100	QPSK	1	271	21.85	21.81	21.82		
100	QPSK	135	0	21.91	21.97	21.65		
100	QPSK	135	69	21.86	21.93	21.66	23.0	0.0
100	QPSK	135	138	21.86	21.88	21.82	23.0	0.0
100	QPSK	270	0	21.80	21.88	21.71		

Part27Q n77 PC2 Ant6 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel					633334		26.0	0.0
Frequency (MHz)					3500.01			
100	QPSK	1	1		24.49			
100	QPSK	1	137		24.42		25.0	1.0
100	QPSK	1	271		24.38			
100	QPSK	135	0		23.44			
100	QPSK	135	69		24.41		26.0	0.0
100	QPSK	135	138		23.53		25.0	1.0
100	QPSK	270	0		23.53			

Part27Q n78 Ant6 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel					633334		23.0	0.0
Frequency (MHz)					3500.01			
100	QPSK	1	1		22.05			
100	QPSK	1	137		21.88		22.0	1.0
100	QPSK	1	271		21.97			
100	QPSK	135	0		21.06			
100	QPSK	135	69		21.99		23.0	0.0
100	QPSK	135	138		21.08		22.0	1.0
100	QPSK	270	0		21.06			



Part96 n78 PC3 Ant6 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				640000	641666	643332		
Frequency (MHz)				3600	3624.99	3649.98		
100	QPSK	1	1	21.60	21.67	21.60	23.0	0.0
100	QPSK	1	137	21.51	21.44	21.45		
100	QPSK	1	271	21.55	21.48	21.49		
100	QPSK	135	0	21.51	21.43	21.42	23.0	0.0
100	QPSK	135	69	21.48	21.53	21.51	23.0	0.0
100	QPSK	135	138	21.48	21.48	21.47	23.0	0.0
100	QPSK	270	0	21.43	21.47	21.41		

n41 PC2 Ant6 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				509202	518598	528000	25.0	0.0
Frequency (MHz)				2546.01	2592.99	2640		
100	QPSK	1	1	24.06	24.49	24.36		
100	QPSK	1	137	23.84	24.47	24.31	24.0	1.0
100	QPSK	1	271	23.85	24.39	24.30		
100	QPSK	135	0	23.05	23.57	23.52		
100	QPSK	135	69	23.96	24.37	24.26	25.0	0.0
100	QPSK	135	138	22.91	23.51	23.50		
100	QPSK	270	0	22.91	23.45	23.39		

Part270 n77 PC2 Ant6 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				650000	656000	662000	26.0	0.0
Frequency (MHz)				3750	3840	3930		
100	QPSK	1	1	25.02	25.12	24.78		
100	QPSK	1	137	25.03	24.89	24.75	25.0	1.0
100	QPSK	1	271	24.98	24.99	24.74		
100	QPSK	135	0	24.14	23.99	23.72		
100	QPSK	135	69	24.99	25.10	24.69	25.0	1.0
100	QPSK	135	138	24.06	23.95	23.84		
100	QPSK	270	0	23.99	24.10	23.73		

Part270 n78 Ant6 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				650000	650000	650000	23.0	0.0
Frequency (MHz)				3750	3750	3750		
100	QPSK	1	1		21.99			
100	QPSK	1	137		21.84		23.0	0.0
100	QPSK	1	271		21.93			
100	QPSK	135	0		21.96			
100	QPSK	135	69		21.97		23.0	0.0
100	QPSK	135	138		21.90			
100	QPSK	270	0		21.92			

Part27Q n78 PC2 Ant6 Default

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel					633334		26.0	0.0
Frequency (MHz)					3500.01			
100	QPSK	1	1		24.69			
100	QPSK	1	137		24.65		25.0	1.0
100	QPSK	1	271		24.66			
100	QPSK	135	0		23.64		26.0	0.0
100	QPSK	135	69		24.62		25.0	1.0
100	QPSK	135	138		23.65			
100	QPSK	270	0		23.75			

Reduced Power Mode for DSI 0

n5 Ant0 DSI0

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				166800	167300	167800	25.0	0.0
Frequency (MHz)				834	836.5	839		
20	QPSK	1	1	23.62	23.69	23.66		
20	QPSK	1	53	23.63	23.61	23.61	24.0	1.0
20	QPSK	1	104	23.65	23.68	23.62		
20	QPSK	50	0	22.67	22.74	22.71	25.0	0.0
20	QPSK	50	28	23.59	23.63	23.62	24.0	1.0
20	QPSK	50	56	22.50	22.68	22.63		
20	QPSK	100	0	22.74	22.82	22.78		

n14 Ant0 DSI0

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel					158600		25.0	0.0
Frequency (MHz)					793			
10	QPSK	1	1		23.69			
10	QPSK	1	26		23.67		24.0	1.0
10	QPSK	1	50		23.58			
10	QPSK	25	0		22.60		25.0	0.0
10	QPSK	25	14		23.51		24.0	1.0
10	QPSK	25	27		22.61			
10	QPSK	50	0		22.53			



n71 Ant0 DSI0								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				134600	136100	137600		
Frequency (MHz)				673	680.5	688		
20	QPSK	1	1	22.92	22.95	22.92	24.0	0.0
20	QPSK	1	53	22.82	22.89	22.89		
20	QPSK	1	104	22.81	22.88	22.87		
20	QPSK	50	0	21.95	21.94	21.91	23.0	1.0
20	QPSK	50	28	22.85	22.94	22.84	24.0	0.0
20	QPSK	50	56	21.81	21.83	21.90	23.0	1.0
20	QPSK	100	0	21.85	21.88	21.87		

n41 Ant0 DSI0								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				509202	518598	528000		
Frequency (MHz)				2546.01	2592.99	2640		
100	QPSK	1	1	23.05	23.09	23.06	24.0	0.0
100	QPSK	1	137	22.98	23.01	23.08		
100	QPSK	1	271	23.02	23.06	23.01		
100	QPSK	135	0	22.05	22.12	22.03	23.0	1.0
100	QPSK	135	69	22.88	22.92	22.91	24.0	0.0
100	QPSK	135	138	22.14	22.14	22.03	23.0	1.0
100	QPSK	270	0	21.99	22.15	22.14		

n41 PC2 Ant0 DSI0								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				509202	518598	528000		
Frequency (MHz)				2546.01	2592.99	2640		
100	QPSK	1	1	24.39	24.42	24.40	26.0	0.0
100	QPSK	1	137	24.20	24.35	24.27		
100	QPSK	1	271	24.27	24.36	24.35		
100	QPSK	135	0	23.44	23.54	23.25	25.0	1.0
100	QPSK	135	69	24.31	24.34	24.30	26.0	0.0
100	QPSK	135	138	23.33	23.46	23.44	25.0	1.0
100	QPSK	270	0	23.42	23.49	23.32		

n12 Ant0 DSI0								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				141300	141500	141700		
Frequency (MHz)				706.5	707.5	708.5		
15	QPSK	1	1	23.74	23.79	23.77	25.0	0.0
15	QPSK	1	40	23.58	23.75	23.62		
15	QPSK	1	77	23.72	23.78	23.74		
15	QPSK	36	0	22.82	22.87	22.80	24.0	1.0
15	QPSK	36	22	23.53	23.67	23.59	25.0	0.0
15	QPSK	36	43	22.75	22.78	22.65	24.0	1.0
15	QPSK	75	0	22.68	22.75	22.69		

n26 Ant0 DSI0								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				164800	166300	167800		
Frequency (MHz)				824	831.5	839		
20	QPSK	1	1	23.61	23.84	23.82	25.0	0.0
20	QPSK	1	53	23.57	23.80	23.76		
20	QPSK	1	104	23.56	23.81	23.70		
20	QPSK	50	0	22.57	22.90	22.80	24.0	1.0
20	QPSK	50	28	23.34	23.81	23.26	25.0	0.0
20	QPSK	50	56	22.67	22.79	22.78	24.0	1.0
20	QPSK	100	0	22.61	22.89	22.82		



n13 Ant0 DSI0

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel					156400		25.0	0.0
Frequency (MHz)					782			
10	QPSK	1	1		23.72			
10	QPSK	1	26		23.68		24.0	1.0
10	QPSK	1	50		23.60			
10	QPSK	25	0		22.59			
10	QPSK	25	14		23.55		25.0	0.0
10	QPSK	25	27		22.64		24.0	1.0
10	QPSK	50	0		22.62			

n2 Ant2 DSI0

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				372000	376000	380000	23.2	0.0
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	1	22.19	22.34	22.18		
20	QPSK	1	53	21.99	22.17	22.01	23.2	0.0
20	QPSK	1	104	22.01	22.07	21.98		
20	QPSK	50	0	21.83	21.72	21.92		
20	QPSK	50	28	21.98	22.08	21.95	23.2	0.0
20	QPSK	50	56	21.75	21.84	21.68	23.2	0.0
20	QPSK	100	0	21.70	22.00	21.82		

Part270 n77 PC2 Ant2 DSI0

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				650000	656000	662000		
Frequency (MHz)				3750	3840	3930		
100	QPSK	1	1	22.58	22.60	22.41		
100	QPSK	1	137	22.55	22.57	22.37	23.6	0.0
100	QPSK	1	271	22.53	22.43	22.29		
100	QPSK	135	0	20.62	20.63	20.45	21.6	2.0
100	QPSK	135	69	22.55	22.57	22.29	23.6	0.0
100	QPSK	135	138	22.48	22.48	22.33	23.6	0.0
100	QPSK	270	0	22.42	22.49	22.24		

n25 Ant2 DSI0

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				374000	376500	379000		
Frequency (MHz)				1870	1882.5	1895		
40	QPSK	1	1	22.48	22.59	22.45	23.2	0.0
40	QPSK	1	108	22.37	22.47	22.35		
40	QPSK	1	214	22.30	22.49	22.45		
40	QPSK	108	0	22.41	22.41	22.40	23.2	0.0
40	QPSK	108	54	22.36	22.52	22.30	23.2	0.0
40	QPSK	108	108	22.33	22.42	22.32	23.2	0.0
40	QPSK	216	0	22.40	22.53	22.34		

Part27Q n77 PC2 Ant2 DSI0

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel					633334		23.6	0.0
Frequency (MHz)					3500.01			
100	QPSK	1	1		22.35			
100	QPSK	1	137		22.17		23.6	0.0
100	QPSK	1	271		22.25			
100	QPSK	135	0		22.17			
100	QPSK	135	69		22.21		23.6	0.0
100	QPSK	135	138		22.20		23.6	0.0
100	QPSK	270	0		22.34			

n66 Ant2 DSI0

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				346000	349000	352000	23.6	0.0
Frequency (MHz)				1730	1745	1760		
40	QPSK	1	1	23.16	23.20	23.15		
40	QPSK	1	108	23.13	23.09	23.16	23.6	0.0
40	QPSK	1	214	23.03	23.14	23.03		
40	QPSK	108	0	23.07	23.09	23.14		
40	QPSK	108	54	23.08	23.17	23.07	23.6	0.0
40	QPSK	108	108	23.10	23.08	23.07	23.6	0.0
40	QPSK	216	0	23.02	23.08	23.01		

Part96 n77 PC3 Ant2 DSI0

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				640000	641666	643332	23.0	0.0
Frequency (MHz)				3600	3624.99	3649.98		
100	QPSK	1	1	21.66	21.76	21.72		
100	QPSK	1	137	21.52	21.71	21.71	23.0	0.0
100	QPSK	1	271	21.59	21.57	21.68		
100	QPSK	135	0	21.59	21.60	21.59		
100	QPSK	135	69	21.55	21.72	21.70	23.0	0.0
100	QPSK	135	138	21.56	21.59	21.65	23.0	0.0
100	QPSK	270	0	21.48	21.70	21.61		

n7 Ant3 DSI0								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				504000	507000	510000		
Frequency (MHz)				2520	2535	2550		
40	QPSK	1	1	21.05	21.13	21.09	21.8	0.0
40	QPSK	1	108	20.91	20.95	20.97		
40	QPSK	1	214	20.99	21.11	21.03		
40	QPSK	108	0	21.03	20.94	21.04	21.8	0.0
40	QPSK	108	54	20.89	21.10	20.96	21.8	0.0
40	QPSK	108	108	20.95	21.08	20.93	21.8	0.0
40	QPSK	216	0	20.96	20.99	20.98		

n38 Ant3 DSI0								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				518004	519000	519996		
Frequency (MHz)				2590.02	2595	2599.98		
40	QPSK	1	1	19.82	19.87	19.69	20.8	0.0
40	QPSK	1	53	19.63	19.78	19.62		
40	QPSK	1	104	19.61	19.79	19.64		
40	QPSK	50	0	19.43	19.61	19.53	20.8	0.0
40	QPSK	50	28	19.55	19.77	19.70	20.8	0.0
40	QPSK	50	56	19.50	19.54	19.60	20.8	0.0
40	QPSK	100	0	19.41	19.45	19.43		

Part270 n77 PC2 Ant3 DSI0								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				650000	656000	662000		
Frequency (MHz)				3750	3840	3930		
100	QPSK	1	1	18.46	18.56	18.50	18.9	0.0
100	QPSK	1	137	18.30	18.42	18.36		
100	QPSK	1	271	18.35	18.44	18.29		
100	QPSK	135	0	18.07	18.20	18.18	18.9	0.0
100	QPSK	135	69	18.34	18.44	18.35	18.9	0.0
100	QPSK	135	138	18.10	18.26	18.23	18.9	0.0
100	QPSK	270	0	18.04	18.22	18.10		

n30 Ant3 DSI0								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel					462000			
Frequency (MHz)					2310			
10	QPSK	1	1		20.01		20.7	0.0
10	QPSK	1	26		19.98			
10	QPSK	1	50		19.86			
10	QPSK	25	0		19.99		20.7	0.0
10	QPSK	25	14		18.89		19.7	1.0
10	QPSK	25	27		19.88		20.7	0.0
10	QPSK	50	0		19.81			

n41 PC2&PC3 Ant3 DSI0								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				509202	518598	528000		
Frequency (MHz)				2546.01	2592.99	2640		
100	QPSK	1	1	20.11	20.12	20.03	20.8	0.0
100	QPSK	1	137	19.94	20.07	19.97		
100	QPSK	1	271	20.01	19.95	19.98		
100	QPSK	135	0	20.00	19.92	19.88	20.8	0.0
100	QPSK	135	69	19.98	20.01	19.96	20.8	0.0
100	QPSK	135	138	19.94	20.00	20.00	20.8	0.0
100	QPSK	270	0	19.93	19.95	19.91		

Part27Q n77 PC2 Ant3 DSI0

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel					633334		18.9	0.0
Frequency (MHz)					3500.01			
100	QPSK	1	1		18.51			
100	QPSK	1	137		18.49		18.9	0.0
100	QPSK	1	271		18.44			
100	QPSK	135	0		18.38			
100	QPSK	135	69		18.46		18.9	0.0
100	QPSK	135	138		18.40		18.9	0.0
100	QPSK	270	0		18.50			

Part96 n77 PC3 Ant3 DSI0

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				640000	641666	643332	24.0	0.0
Frequency (MHz)				3600	3624.99	3649.98		
100	QPSK	1	1	18.40	18.52	18.33		
100	QPSK	1	137	18.41	18.41	18.32	23.0	1.0
100	QPSK	1	271	18.32	18.48	18.42		
100	QPSK	135	0	18.29	18.47	18.48		
100	QPSK	135	69	18.33	18.49	18.44	24.0	0.0
100	QPSK	135	138	18.48	18.33	18.46	23.0	1.0
100	QPSK	270	0	18.37	18.39	18.22		

n48 Part96 Ant4 DSI0

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				638000	641666	645332	22.3	0.0
Frequency (MHz)				3570	3624.99	3679.98		
40	QPSK	1	1	21.66	21.72	21.62		
40	QPSK	1	53	21.62	21.71	21.50	22.0	0.3
40	QPSK	1	104	21.64	21.70	21.58		
40	QPSK	50	0	20.54	20.65	20.51		
40	QPSK	50	28	21.62	21.71	21.60	22.3	0.0
40	QPSK	50	56	20.64	20.57	20.50		
40	QPSK	100	0	20.48	20.71	20.58		

Part96 n77 PC3 Ant4 DSI0

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				640000	641666	643332	23.2	0.0
Frequency (MHz)				3600	3624.99	3649.98		
100	QPSK	1	1	22.04	22.06	21.97		
100	QPSK	1	137	21.85	21.92	21.87	23.2	0.0
100	QPSK	1	271	21.91	21.97	21.88		
100	QPSK	135	0	21.99	21.93	21.94		
100	QPSK	135	69	22.02	22.04	21.78	23.2	0.0
100	QPSK	135	138	21.97	21.88	21.91		
100	QPSK	270	0	21.95	21.99	21.92		

Part270 n77 PC2 Ant4 DSI0

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				650000	656000	662000	23.2	0.0
Frequency (MHz)				3750	3840	3930		
100	QPSK	1	1	21.76	21.95	21.87		
100	QPSK	1	137	21.70	21.87	21.75	23.2	0.0
100	QPSK	1	271	21.73	21.87	21.71		
100	QPSK	135	0	21.62	21.82	21.80		
100	QPSK	135	69	21.67	21.88	21.69	23.2	0.0
100	QPSK	135	138	21.62	21.80	21.72		
100	QPSK	270	0	21.69	21.84	21.83		

Part27Q n77 PC2 Ant4 DSI0

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel					633334		23.2	0.0
Frequency (MHz)					3500.01			
100	QPSK	1	1		21.93			
100	QPSK	1	137		21.90		23.2	0.0
100	QPSK	1	271		21.91			
100	QPSK	135	0		21.83			
100	QPSK	135	69		21.86		23.2	0.0
100	QPSK	135	138		21.73		23.2	0.0
100	QPSK	270	0		21.88			

n25 Ant5 Ant5 DSI0

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				374000	376500	379000	24.4	0.0
Frequency (MHz)				1870	1882.5	1895		
40	QPSK	1	1	23.56	23.58	23.57		
40	QPSK	1	108	23.54	23.41	23.46	24.0	0.4
40	QPSK	1	214	23.50	23.41	23.56		
40	QPSK	108	0	23.18	23.15	23.09		
40	QPSK	108	54	23.46	23.54	23.52	24.4	0.0
40	QPSK	108	108	23.16	23.10	23.25	24.0	0.4
40	QPSK	216	0	23.25	23.27	23.18		



n66 Ant5 Ant5 DSI0								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				346000	349000	352000		
Frequency (MHz)				1730	1745	1760		
40	QPSK	1	1	24.61	24.64	24.48	25.0	0.0
40	QPSK	1	108	24.56	24.61	24.31		
40	QPSK	1	214	24.51	24.52	24.29		
40	QPSK	108	0	23.67	23.66	23.53	24.0	1.0
40	QPSK	108	54	24.44	24.57	24.34	25.0	0.0
40	QPSK	108	108	23.61	23.61	23.49	24.0	1.0
40	QPSK	216	0	23.65	23.67	23.47		

n41 PC2 Ant6 DSI0

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				509202	518598	528000	20.3	0.0
Frequency (MHz)				2546.01	2592.99	2640		
100	QPSK	1	1	19.59	19.65	19.42		
100	QPSK	1	137	19.55	19.64	19.39	20.3	0.0
100	QPSK	1	271	19.53	19.62	19.44		
100	QPSK	135	0	19.56	19.59	19.42		
100	QPSK	135	69	19.52	19.63	19.50	20.3	0.0
100	QPSK	135	138	19.48	19.60	19.46		
100	QPSK	270	0	19.55	19.63	19.40		

Part270 n77 PC2 Ant6 DSI0

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				650000	656000	662000	20.1	0.0
Frequency (MHz)				3750	3840	3930		
100	QPSK	1	1	19.52	19.54	19.26		
100	QPSK	1	137	19.38	19.27	19.14	20.1	0.0
100	QPSK	1	271	19.43	19.29	19.18		
100	QPSK	135	0	19.36	19.29	19.19		
100	QPSK	135	69	19.36	19.39	19.12	20.1	0.0
100	QPSK	135	138	19.38	19.25	19.18		
100	QPSK	270	0	19.27	19.37	19.08		

30

Part96 n77 PC3 Ant6 DSI0

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				640000	641666	643332	20.1	0.0
Frequency (MHz)				3600	3624.99	3649.98		
100	QPSK	1	1	19.35	19.40	19.19		
100	QPSK	1	137	19.20	19.30	19.13	20.1	0.0
100	QPSK	1	271	19.23	19.29	19.19		
100	QPSK	135	0	19.27	19.22	19.20		
100	QPSK	135	69	19.35	19.24	19.20	20.1	0.0
100	QPSK	135	138	19.29	19.14	19.17		
100	QPSK	270	0	19.27	19.17	19.13		

Part27Q n77 PC2 Ant6 DSI0

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel					633334		20.1	0.0
Frequency (MHz)					3500.01			
100	QPSK	1	1		19.88			
100	QPSK	1	137		19.75		20.1	0.0
100	QPSK	1	271		19.76			
100	QPSK	135	0		19.73			
100	QPSK	135	69		19.82		20.1	0.0
100	QPSK	135	138		19.80		20.1	0.0
100	QPSK	270	0		19.85			

Reduced Power Mode for DSI 1

n5 Ant0 DSI1

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				166800	167300	167800	25.0	0.0
Frequency (MHz)				834	836.5	839		
20	QPSK	1	1	23.62	23.69	23.66		
20	QPSK	1	53	23.63	23.61	23.61	24.0	1.0
20	QPSK	1	104	23.65	23.68	23.62		
20	QPSK	50	0	22.67	22.74	22.71		
20	QPSK	50	28	23.59	23.63	23.62	25.0	0.0
20	QPSK	50	56	22.50	22.68	22.63	24.0	1.0
20	QPSK	100	0	22.74	22.82	22.78		

n14 Ant0 DSI1

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel					158600		25.0	0.0
Frequency (MHz)					793			
10	QPSK	1	1		23.69			
10	QPSK	1	26		23.67		24.0	1.0
10	QPSK	1	50		23.58			
10	QPSK	25	0		22.60			
10	QPSK	25	14		23.51		25.0	0.0
10	QPSK	25	27		22.61		24.0	1.0
10	QPSK	50	0		22.53			



n71 Ant0 DSI1

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				134600	136100	137600	24.0	0.0
Frequency (MHz)				673	680.5	688		
20	QPSK	1	1	22.92	22.95	22.92		
20	QPSK	1	53	22.82	22.89	22.89	23.0	1.0
20	QPSK	1	104	22.81	22.88	22.87		
20	QPSK	50	0	21.95	21.94	21.91		
20	QPSK	50	28	22.85	22.94	22.84	23.0	1.0
20	QPSK	50	56	21.81	21.83	21.90		
20	QPSK	100	0	21.85	21.88	21.87		

n41 PC2 Ant0 DSI1

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				509202	518598	528000	26.0	0.0
Frequency (MHz)				2546.01	2592.99	2640		
100	QPSK	1	1	21.48	21.58	21.32		
100	QPSK	1	137	21.45	21.56	21.22	25.0	1.0
100	QPSK	1	271	21.46	21.53	21.26		
100	QPSK	135	0	21.42	21.41	21.24		
100	QPSK	135	69	21.32	21.54	21.21	25.0	1.0
100	QPSK	135	138	21.33	21.41	21.31		
100	QPSK	270	0	21.32	21.46	21.15		

n12 Ant0 DSI1

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				141300	141500	141700	25.0	0.0
Frequency (MHz)				706.5	707.5	708.5		
15	QPSK	1	1	23.74	23.79	23.77		
15	QPSK	1	40	23.58	23.75	23.62	24.0	1.0
15	QPSK	1	77	23.72	23.78	23.74		
15	QPSK	36	0	22.82	22.87	22.80		
15	QPSK	36	22	23.53	23.67	23.59	24.0	1.0
15	QPSK	36	43	22.75	22.78	22.65		
15	QPSK	75	0	22.68	22.75	22.69		



n26 Ant0 DSI1

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				164800	166300	167800	25.0	0.0
Frequency (MHz)				824	831.5	839		
20	QPSK	1	1	23.61	23.84	23.82		
20	QPSK	1	53	23.57	23.80	23.76	24.0	1.0
20	QPSK	1	104	23.56	23.81	23.70		
20	QPSK	50	0	22.57	22.90	22.80		
20	QPSK	50	28	23.34	23.81	23.26	25.0	0.0
20	QPSK	50	56	22.67	22.79	22.78	24.0	1.0
20	QPSK	100	0	22.61	22.89	22.82		

n13 Ant0 DSI1

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel					156400		25.0	0.0
Frequency (MHz)					782			
10	QPSK	1	1		23.72			
10	QPSK	1	26		23.68		24.0	1.0
10	QPSK	1	50		23.60			
10	QPSK	25	0		22.59			
10	QPSK	25	14		23.55		25.0	0.0
10	QPSK	25	27		22.64		24.0	1.0
10	QPSK	50	0		22.62			



n25 Ant2 DSI1

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				374000	376500	379000		
Frequency (MHz)				1870	1882.5	1895		
40	QPSK	1	1	20.46	20.60	20.40		
40	QPSK	1	108	20.19	20.26	20.21	21.7	0.0
40	QPSK	1	214	20.29	20.48	20.22		
40	QPSK	108	0	20.31	20.41	20.25		
40	QPSK	108	54	20.28	20.51	20.31	21.7	0.0
40	QPSK	108	108	20.13	20.37	20.25	21.7	0.0
40	QPSK	216	0	20.20	20.47	20.25		

Part270 n77 PC2 Ant2 DSI1

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				650000	656000	662000		
Frequency (MHz)				3750	3840	3930		
100	QPSK	1	1	23.01	23.21	23.00		
100	QPSK	1	137	22.95	23.09	23.01	23.6	0.0
100	QPSK	1	271	23.12	23.11	22.86		
100	QPSK	135	0	23.03	23.00	22.87		
100	QPSK	135	69	23.02	23.12	22.88	23.6	0.0
100	QPSK	135	138	23.11	23.11	22.96	23.6	0.0
100	QPSK	270	0	23.09	23.10	22.90		

n66 Ant2 DSI1

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				346000	349000	352000	22.1	0.0
Frequency (MHz)				1730	1745	1760		
40	QPSK	1	1	20.86	21.01	20.95		
40	QPSK	1	108	20.85	20.99	20.70	22.1	0.0
40	QPSK	1	214	20.59	20.79	20.85		
40	QPSK	108	0	20.77	20.82	20.86		
40	QPSK	108	54	20.66	20.94	20.70	22.1	0.0
40	QPSK	108	108	20.64	20.85	20.83		
40	QPSK	216	0	20.71	20.85	20.74		

Part27Q n77 PC2 Ant2 DSI1

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel					633334		23.6	0.0
Frequency (MHz)					3500.01			
100	QPSK	1	1		22.52			
100	QPSK	1	137		22.42		23.6	0.0
100	QPSK	1	271		22.45			
100	QPSK	135	0		22.44			
100	QPSK	135	69		22.46		23.6	0.0
100	QPSK	135	138		22.44			
100	QPSK	270	0		22.47			

Part96 n77 PC3 Ant2 DSI1

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				640000	641666	643332	23.0	0.0
Frequency (MHz)				3600	3624.99	3649.98		
100	QPSK	1	1	22.26	22.36	22.32		
100	QPSK	1	137	22.12	22.31	22.31	23.0	0.0
100	QPSK	1	271	22.19	22.17	22.28		
100	QPSK	135	0	22.19	22.20	22.19		
100	QPSK	135	69	22.15	22.32	22.30	23.0	0.0
100	QPSK	135	138	22.16	22.19	22.25		
100	QPSK	270	0	22.08	22.30	22.21		

n7 Ant3 DSI1								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				504000	507000	510000		
Frequency (MHz)				2520	2535	2550		
40	QPSK	1	1	18.04	18.17	18.11	18.7	0.0
40	QPSK	1	108	17.97	17.95	18.04		
40	QPSK	1	214	17.97	18.04	17.92		
40	QPSK	108	0	18.05	17.99	17.94	18.7	0.0
40	QPSK	108	54	18.04	18.07	18.06	18.7	0.0
40	QPSK	108	108	18.03	17.99	17.99	18.7	0.0
40	QPSK	216	0	17.99	18.04	17.91		

n41 PC2&PC3 Ant3 DSI1								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				509202	518598	528000		
Frequency (MHz)				2546.01	2592.99	2640		
100	QPSK	1	1	17.96	18.05	17.85	18.9	0.0
100	QPSK	1	137	17.82	17.97	17.68		
100	QPSK	1	271	17.84	17.91	17.75		
100	QPSK	135	0	17.75	17.90	17.61	18.9	0.0
100	QPSK	135	69	17.83	17.91	17.76	18.9	0.0
100	QPSK	135	138	17.71	17.90	17.63	18.9	0.0
100	QPSK	270	0	17.70	17.96	17.66		

Part270 n77 PC2 Ant3 DSI1								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				650000	656000	662000		
Frequency (MHz)				3750	3840	3930		
100	QPSK	1	1	18.78	18.79	18.77	18.9	0.0
100	QPSK	1	137	18.62	18.76	18.64		
100	QPSK	1	271	18.63	18.71	18.69		
100	QPSK	135	0	18.64	18.69	18.68	18.9	0.0
100	QPSK	135	69	18.66	18.74	18.63	18.9	0.0
100	QPSK	135	138	18.67	18.71	18.58	18.9	0.0
100	QPSK	270	0	18.66	18.67	18.61		

n30 Ant3 DSI1								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel					462000			
Frequency (MHz)					2310			
10	QPSK	1	1		19.96		20.6	0.0
10	QPSK	1	26		19.86			
10	QPSK	1	50		19.82			
10	QPSK	25	0		19.90		20.6	0.0
10	QPSK	25	14		18.90		19.6	1.0
10	QPSK	25	27		19.88		20.6	0.0
10	QPSK	50	0		19.78			

Part27Q n77 PC2 Ant3 DSI1

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel					633334		18.9	0.0
Frequency (MHz)					3500.01			
100	QPSK	1	1		18.45			
100	QPSK	1	137		18.33		18.9	0.0
100	QPSK	1	271		18.41			
100	QPSK	135	0		18.36			
100	QPSK	135	69		18.39		18.9	0.0
100	QPSK	135	138		18.29		18.9	0.0
100	QPSK	270	0		18.30			

Part96 n77 PC3 Ant3 DSI1

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				640000	641666	643332	18.9	0.0
Frequency (MHz)				3600	3624.99	3649.98		
100	QPSK	1	1	18.46	18.61	18.58		
100	QPSK	1	137	18.37	18.43	18.46	18.9	0.0
100	QPSK	1	271	18.31	18.49	18.36		
100	QPSK	135	0	18.31	18.44	18.43		
100	QPSK	135	69	18.34	18.46	18.38	18.9	0.0
100	QPSK	135	138	18.40	18.38	18.37	18.9	0.0
100	QPSK	270	0	18.44	18.49	18.35		

n48 Part96 Ant4 DSI1

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				638000	641666	645332	22.3	0.0
Frequency (MHz)				3570	3624.99	3679.98		
40	QPSK	1	1	21.66	21.72	21.62		
40	QPSK	1	53	21.62	21.71	21.50	22.0	0.3
40	QPSK	1	104	21.64	21.70	21.58		
40	QPSK	50	0	20.54	20.65	20.51		
40	QPSK	50	28	21.62	21.71	21.60	22.0	0.0
40	QPSK	50	56	20.64	20.57	20.50		
40	QPSK	100	0	20.48	20.71	20.58		

Part96 n77 PC3 Ant4 DSI1

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				640000	641666	643332	23.2	0.0
Frequency (MHz)				3600	3624.99	3649.98		
100	QPSK	1	1	22.04	22.06	21.97		
100	QPSK	1	137	21.85	21.92	21.87	23.2	0.0
100	QPSK	1	271	21.91	21.97	21.88		
100	QPSK	135	0	21.99	21.93	21.94		
100	QPSK	135	69	22.02	22.04	21.78	23.2	0.0
100	QPSK	135	138	21.97	21.88	21.91	23.2	0.0
100	QPSK	270	0	21.95	21.99	21.92		

Part270 n77 PC2 Ant4 DSI1

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				650000	656000	662000	23.2	0.0
Frequency (MHz)				3750	3840	3930		
100	QPSK	1	1	21.76	21.95	21.87		
100	QPSK	1	137	21.70	21.87	21.75	23.2	0.0
100	QPSK	1	271	21.73	21.87	21.71		
100	QPSK	135	0	21.62	21.82	21.80		
100	QPSK	135	69	21.67	21.88	21.69	23.2	0.0
100	QPSK	135	138	21.62	21.80	21.72	23.2	0.0
100	QPSK	270	0	21.69	21.84	21.83		

Part27Q n77 PC2 Ant4 DSI1

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel					633334		23.2	0.0
Frequency (MHz)					3500.01			
100	QPSK	1	1		21.93			
100	QPSK	1	137		21.90		23.2	0.0
100	QPSK	1	271		21.91			
100	QPSK	135	0		21.83			
100	QPSK	135	69		21.86		23.2	0.0
100	QPSK	135	138		21.73		23.2	0.0
100	QPSK	270	0		21.88			

n25 Ant5 Ant5 DSI1

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				374000	376500	379000	23.7	0.0
Frequency (MHz)				1870	1882.5	1895		
40	QPSK	1	1	22.50	22.55	22.49		
40	QPSK	1	108	22.39	22.51	22.35	23.7	0.0
40	QPSK	1	214	22.48	22.49	22.31		
40	QPSK	108	0	22.35	22.38	22.30		
40	QPSK	108	54	22.41	22.45	22.37	23.7	0.0
40	QPSK	108	108	22.42	22.36	22.38	23.7	0.0
40	QPSK	216	0	22.32	22.51	22.33		

n66 Ant5 Ant5 DSI1

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				346000	349000	352000		
Frequency (MHz)				1730	1745	1760		
40	QPSK	1	1	23.59	23.73	23.52		
40	QPSK	1	108	23.38	23.67	23.57	24.2	0.0
40	QPSK	1	214	23.40	23.62	23.43		
40	QPSK	108	0	23.46	23.59	23.43		
40	QPSK	108	54	23.36	23.63	23.53	24.2	0.0
40	QPSK	108	108	23.41	23.58	23.43	24.0	0.2
40	QPSK	216	0	23.49	23.67	23.56		

n41 PC2 Ant6 DSI1

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				509202	518598	528000		
Frequency (MHz)				2546.01	2592.99	2640		
100	QPSK	1	1	19.26	19.27	18.94	20.1	0.0
100	QPSK	1	137	19.19	19.18	18.87		
100	QPSK	1	271	19.17	19.13	18.75		
100	QPSK	135	0	19.16	19.13	18.82	20.1	0.0
100	QPSK	135	69	19.17	19.23	18.76	20.1	0.0
100	QPSK	135	138	19.12	19.10	18.77	20.1	0.0
100	QPSK	270	0	19.08	19.21	18.79		

Part270 n77 PC2 Ant6 DSI1

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				650000	656000	662000	21.3	0.0
Frequency (MHz)				3750	3840	3930		
100	QPSK	1	1	20.42	20.51	20.29		
100	QPSK	1	137	20.44	20.37	20.10	21.3	0.0
100	QPSK	1	271	20.46	20.33	20.20		
100	QPSK	135	0	20.27	20.27	20.19		
100	QPSK	135	69	20.41	20.44	20.24	21.3	0.0
100	QPSK	135	138	20.39	20.41	20.26	21.3	0.0
100	QPSK	270	0	20.33	20.41	20.12		

30

Part96 n77 PC3 Ant6 DSI1

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				640000	641666	643332	21.3	0.0
Frequency (MHz)				3600	3624.99	3649.98		
100	QPSK	1	1	20.46	20.50	20.40		
100	QPSK	1	137	20.36	20.44	20.22	21.3	0.0
100	QPSK	1	271	20.44	20.32	20.35		
100	QPSK	135	0	20.39	20.38	20.26		
100	QPSK	135	69	20.28	20.46	20.29	21.3	0.0
100	QPSK	135	138	20.37	20.34	20.25	21.3	0.0
100	QPSK	270	0	20.35	20.39	20.30		

Part27Q n77 PC2 Ant6 DSI1								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel					633334			
Frequency (MHz)					3500.01			
100	QPSK	1	1		20.75		21.3	0.0
100	QPSK	1	137		20.64			
100	QPSK	1	271		20.59			
100	QPSK	135	0		20.68		21.3	0.0
100	QPSK	135	69		20.69		21.3	0.0
100	QPSK	135	138		20.59		21.3	0.0
100	QPSK	270	0		20.65			

Reduced Power Mode for DSI 2

n12 Ant0 DSI2								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				141300	141500	141700		
Frequency (MHz)				706.5	707.5	708.5		
15	QPSK	1	1	21.47	21.48	21.44	22.4	0.0
15	QPSK	1	40	21.34	21.35	21.31		
15	QPSK	1	77	21.44	21.31	21.28		
15	QPSK	36	0	21.35	21.36	21.40	22.4	0.0
15	QPSK	36	22	21.43	21.46	21.34	22.4	0.0
15	QPSK	36	43	21.43	21.42	21.25	22.4	0.0
15	QPSK	75	0	21.41	21.45	21.36		

n14 Ant0 DSI2								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel					158600			
Frequency (MHz)					793			
10	QPSK	1	1		21.78		22.4	0.0
10	QPSK	1	26		21.72			
10	QPSK	1	50		21.65			
10	QPSK	25	0		21.62		22.4	0.0
10	QPSK	25	14		21.66		22.4	0.0
10	QPSK	25	27		21.63		22.4	0.0
10	QPSK	50	0		21.69			

n71 Ant0 DSI2								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				134600	136100	137600		
Frequency (MHz)				673	680.5	688		
20	QPSK	1	1	21.55	21.58	21.53	22.4	0.0
20	QPSK	1	53	21.48	21.38	21.48		
20	QPSK	1	104	21.37	21.43	21.52		
20	QPSK	50	0	21.44	21.46	21.49	22.4	0.0
20	QPSK	50	28	21.38	21.54	21.41	22.4	0.0
20	QPSK	50	56	21.50	21.45	21.39	22.4	0.0
20	QPSK	100	0	21.49	21.50	21.44		

n41 PC2 Ant0 DSI2

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				509202	518598	528000	17.3	0.0
Frequency (MHz)				2546.01	2592.99	2640		
100	QPSK	1	1	16.56	16.62	16.32		
100	QPSK	1	137	16.38	16.57	16.23	17.3	0.0
100	QPSK	1	271	16.39	16.43	16.19		
100	QPSK	135	0	16.44	16.47	16.15		
100	QPSK	135	69	16.53	16.58	16.31	17.3	0.0
100	QPSK	135	138	16.46	16.44	16.29	17.3	0.0
100	QPSK	270	0	16.44	16.48	16.23		

n13 Ant0 DSI2

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel					156400		22.4	0.0
Frequency (MHz)					782			
10	QPSK	1	1		21.62			
10	QPSK	1	26		21.56		22.4	0.0
10	QPSK	1	50		21.57			
10	QPSK	25	0		21.45			
10	QPSK	25	14		21.48		22.4	0.0
10	QPSK	25	27		21.46		22.4	0.0
10	QPSK	50	0		21.58			

n26 Ant0 DSI2

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				164800	166300	167800	22.0	0.0
Frequency (MHz)				824	831.5	839		
20	QPSK	1	1	21.09	21.11	21.03		
20	QPSK	1	53	21.04	21.04	20.94	22.0	0.0
20	QPSK	1	104	21.02	21.08	20.96		
20	QPSK	50	0	21.06	21.02	20.89		
20	QPSK	50	28	21.05	21.07	20.84	22.0	0.0
20	QPSK	50	56	21.03	20.96	20.85	22.0	0.0
20	QPSK	100	0	20.97	21.05	20.88		



n25 Ant2 DSI2								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				374000	376500	379000		
Frequency (MHz)				1870	1882.5	1895		
40	QPSK	1	1	19.09	19.18	19.08	19.6	0.0
40	QPSK	1	108	19.00	19.13	18.98		
40	QPSK	1	214	19.01	19.15	18.95		
40	QPSK	108	0	19.03	19.13	19.04	19.6	0.0
40	QPSK	108	54	18.92	19.16	19.01	19.6	0.0
40	QPSK	108	108	18.99	19.03	18.99	19.6	0.0
40	QPSK	216	0	18.94	19.04	18.98		

Part270 n77 PC2 Ant2 DSI2

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				650000	656000	662000	16.6	0.0
Frequency (MHz)				3750	3840	3930		
100	QPSK	1	1	16.13	16.15	15.87		
100	QPSK	1	137	16.01	16.05	15.80	14.6	2.0
100	QPSK	1	271	16.09	16.14	15.73		
100	QPSK	135	0	13.97	14.07	13.78		
100	QPSK	135	69	16.04	16.12	15.71	16.6	0.0
100	QPSK	135	138	15.98	15.98	15.81	16.6	0.0
100	QPSK	270	0	16.01	16.08	15.75		

n66 Ant2 DSI2

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				346000	349000	352000	19.7	0.0
Frequency (MHz)				1730	1745	1760		
40	QPSK	1	1	19.11	19.19	19.10		
40	QPSK	1	108	18.98	19.05	19.07	19.7	0.0
40	QPSK	1	214	19.00	19.05	19.09		
40	QPSK	108	0	19.07	19.00	19.08		
40	QPSK	108	54	19.07	19.13	19.09	19.7	0.0
40	QPSK	108	108	19.07	19.12	18.93	19.7	0.0
40	QPSK	216	0	19.07	19.18	19.04		

Part27Q n77 PC2 Ant2 DSI2

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel					633334		16.6	0.0
Frequency (MHz)					3500.01			
100	QPSK	1	1		15.65			
100	QPSK	1	137		15.60		16.6	0.0
100	QPSK	1	271		15.63			
100	QPSK	135	0		15.68			
100	QPSK	135	69		15.69		16.6	0.0
100	QPSK	135	138		15.55		16.6	0.0
100	QPSK	270	0		15.55			

Part96 n77 PC3 Ant2 DSI2

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				640000	641666	643332	16.6	0.0
Frequency (MHz)				3600	3624.99	3649.98		
100	QPSK	1	1	16.08	16.09	15.96		
100	QPSK	1	137	16.02	16.02	15.92	16.6	0.0
100	QPSK	1	271	15.97	15.94	15.79		
100	QPSK	135	0	16.05	16.07	15.82		
100	QPSK	135	69	16.03	15.92	15.88	16.6	0.0
100	QPSK	135	138	15.89	16.00	15.90	16.6	0.0
100	QPSK	270	0	16.00	16.01	15.79		

n7 Ant3 DSI2

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				504000	507000	510000	17.4	0.0
Frequency (MHz)				2520	2535	2550		
40	QPSK	1	1	17.02	17.08	17.06		
40	QPSK	1	108	16.97	17.04	17.04	17.4	0.0
40	QPSK	1	214	16.84	16.97	17.01		
40	QPSK	108	0	16.95	17.02	16.98		
40	QPSK	108	54	16.85	17.07	16.93	17.4	0.0
40	QPSK	108	108	16.86	17.05	17.01	17.4	0.0
40	QPSK	216	0	16.95	16.97	16.93		

n41 PC2&PC3 Ant3 DSI2

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				509202	518598	528000	17.1	0.0
Frequency (MHz)				2546.01	2592.99	2640		
100	QPSK	1	1	16.50	16.67	16.35		
100	QPSK	1	137	16.46	16.48	16.36	17.1	0.0
100	QPSK	1	271	16.46	16.48	16.35		
100	QPSK	135	0	16.41	16.46	16.26		
100	QPSK	135	69	16.42	16.53	16.34	17.1	0.0
100	QPSK	135	138	16.40	16.46	16.26	17.1	0.0
100	QPSK	270	0	16.50	16.61	16.39		

Part270 n77 PC2 Ant3 DSI2

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				650000	656000	662000	17.7	0.0
Frequency (MHz)				3750	3840	3930		
100	QPSK	1	1	17.15	17.31	17.23		
100	QPSK	1	137	17.15	17.24	17.16	17.7	0.0
100	QPSK	1	271	17.07	17.20	17.26		
100	QPSK	135	0	17.15	17.14	17.17		
100	QPSK	135	69	17.16	17.18	17.14	17.7	0.0
100	QPSK	135	138	17.14	17.14	17.16	17.7	0.0
100	QPSK	270	0	17.15	17.22	17.21		



n30 Ant3 DSI2								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel					462000			
Frequency (MHz)					2310			
10	QPSK	1	1		15.61		16.2	0.0
10	QPSK	1	26		15.59			
10	QPSK	1	50		15.55			
10	QPSK	25	0		15.58		16.2	0.0
10	QPSK	25	14		14.51		15.2	0.0
10	QPSK	25	27		15.46		16.2	0.0
10	QPSK	50	0		15.50			

Part27Q n77 PC2 Ant3 DSI2								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel					633334			
Frequency (MHz)					3500.01			
100	QPSK	1	1		16.97		17.7	0.0
100	QPSK	1	137		16.91			
100	QPSK	1	271		16.94			
100	QPSK	135	0		16.87		17.7	0.0
100	QPSK	135	69		16.93		17.7	0.0
100	QPSK	135	138		16.81		17.7	0.0
100	QPSK	270	0		16.87			

Part96 n77 PC3 Ant3 DSI2

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				640000	641666	643332	17.7	0.0
Frequency (MHz)				3600	3624.99	3649.98		
100	QPSK	1	1	17.42	17.46	17.31		
100	QPSK	1	137	17.32	17.34	17.41	17.7	0.0
100	QPSK	1	271	17.36	17.39	17.40		
100	QPSK	135	0	17.39	17.42	17.40		
100	QPSK	135	69	17.39	17.46	17.28	17.7	0.0
100	QPSK	135	138	17.36	17.38	17.28		
100	QPSK	270	0	17.34	17.38	17.42		

n48 Part96 Ant4 DSI2

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				638000	641666	645332	15.9	0.0
Frequency (MHz)				3570	3624.99	3679.98		
40	QPSK	1	1	15.63	15.71	15.67		
40	QPSK	1	53	15.58	15.57	15.53	15.9	0.0
40	QPSK	1	104	15.59	15.58	15.62		
40	QPSK	50	0	15.60	15.62	15.50		
40	QPSK	50	28	15.63	15.69	15.57	15.9	0.0
40	QPSK	50	56	15.66	15.61	15.59		
40	QPSK	100	0	15.54	15.61	15.59		

Part96 n77 PC3 Ant4 DSI2

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				640000	641666	643332	15.4	0.0
Frequency (MHz)				3600	3624.99	3649.98		
100	QPSK	1	1	14.54	14.59	14.56		
100	QPSK	1	137	14.52	14.45	14.41	15.4	0.0
100	QPSK	1	271	14.40	14.50	14.41		
100	QPSK	135	0	14.37	14.50	14.43		
100	QPSK	135	69	14.53	14.56	14.50	15.4	0.0
100	QPSK	135	138	14.38	14.51	14.55		
100	QPSK	270	0	14.41	14.49	14.39		

Part27O n77 PC2 Ant4 DSI2

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				650000	656000	662000	15.4	0.0
Frequency (MHz)				3750	3840	3930		
100	QPSK	1	1	14.53	14.68	14.63		
100	QPSK	1	137	14.39	14.57	14.57	15.4	0.0
100	QPSK	1	271	14.40	14.47	14.59		
100	QPSK	135	0	14.49	14.59	14.51		
100	QPSK	135	69	14.48	14.62	14.55	15.4	0.0
100	QPSK	135	138	14.41	14.46	14.56		
100	QPSK	270	0	14.45	14.56	14.52		

Part27Q n77 PC2 Ant4 DSI2

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel					633334		15.4	0.0
Frequency (MHz)					3500.01			
100	QPSK	1	1		14.52			
100	QPSK	1	137		14.51		15.4	0.0
100	QPSK	1	271		14.44			
100	QPSK	135	0		14.33			
100	QPSK	135	69		14.47		15.4	0.0
100	QPSK	135	138		14.43			
100	QPSK	270	0		14.41			



n25 Ant5 Ant5 DSI2								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				374000	376500	379000		
Frequency (MHz)				1870	1882.5	1895		
40	QPSK	1	1	23.51	23.56	23.55	24.4	0.0
40	QPSK	1	108	23.50	23.52	23.40		
40	QPSK	1	214	23.47	23.47	23.52		
40	QPSK	108	0	23.04	22.96	23.05	24.0	0.4
40	QPSK	108	54	23.41	23.48	23.39	24.4	0.0
40	QPSK	108	108	23.38	23.46	23.41	24.0	0.4
40	QPSK	216	0	23.41	23.46	23.40		

n66 Ant5 Ant5 DSI2								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				346000	349000	352000		
Frequency (MHz)				1730	1745	1760		
40	QPSK	1	1	24.44	24.58	24.50	25.0	0.0
40	QPSK	1	108	24.35	24.46	24.46		
40	QPSK	1	214	24.33	24.44	24.48		
40	QPSK	108	0	23.45	23.56	23.50	24.0	1.0
40	QPSK	108	54	24.29	24.46	24.44	25.0	0.0
40	QPSK	108	108	23.41	23.50	23.51	24.0	1.0
40	QPSK	216	0	23.49	23.64	23.58		

n41 PC2 Ant6 DSI2								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				509202	518598	528000		
Frequency (MHz)				2546.01	2592.99	2640		
100	QPSK	1	1	19.50	19.72	19.49	20.3	0.0
100	QPSK	1	137	19.63	19.70	19.46		
100	QPSK	1	271	19.55	19.65	19.45		
100	QPSK	135	0	19.64	19.66	19.38	20.3	0.0
100	QPSK	135	69	19.63	19.69	19.40	20.3	0.0
100	QPSK	135	138	19.56	19.63	19.41	20.3	0.0
100	QPSK	270	0	19.50	19.61	19.55		

Part270 n77 PC2 Ant6 DSI2								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				650000	656000	662000		
Frequency (MHz)				3750	3840	3930		
100	QPSK	1	1	19.49	19.59	19.34	20.1	0.0
100	QPSK	1	137	19.41	19.46	19.26		
100	QPSK	1	271	19.39	19.48	19.26		
100	QPSK	135	0	19.33	19.55	19.23	20.1	0.0
100	QPSK	135	69	19.36	19.56	19.23	20.1	0.0
100	QPSK	135	138	19.43	19.49	19.32	20.1	0.0
100	QPSK	270	0	19.37	19.40	19.17		



Part96 n77 PC3 Ant6 DSI2

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				640000	641666	643332	20.1	0.0
Frequency (MHz)				3600	3624.99	3649.98		
100	QPSK	1	1	19.45	19.47	19.38		
100	QPSK	1	137	19.44	19.45	19.36	20.1	0.0
100	QPSK	1	271	19.44	19.40	19.33		
100	QPSK	135	0	19.41	19.36	19.33		
100	QPSK	135	69	19.35	19.42	19.19	20.1	0.0
100	QPSK	135	138	19.32	19.38	19.31	20.1	0.0
100	QPSK	270	0	19.38	19.33	19.17		

Part27Q n77 PC2 Ant6 DSI2

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel					633334		20.1	0.0
Frequency (MHz)					3500.01			
100	QPSK	1	1		19.98			
100	QPSK	1	137		19.86		20.1	0.0
100	QPSK	1	271		19.93			
100	QPSK	135	0		19.87			
100	QPSK	135	69		19.95		20.1	0.0
100	QPSK	135	138		19.89		20.1	0.0
100	QPSK	270	0		19.83			

<WLAN Conducted Power>

General Note:

1. The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures. For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration. Additional output power measurements were not necessary.
2. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
3. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
4. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
5. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
6. 802.11 ax supports both full tone size mode and partial tone size mode, after verification on partial tone size mode that partial size tone mode power will not be higher than full tone size mode, therefore, full tone mode power was chosen to be measured in this report.
7. For WLAN2.4GHz/5GHz SISO & MIMO(CDD) &TX Beamforming mode of 802.11ax, and WLAN SISO & TX Beamforming mode is not higher than WLAN MIMO(CDD) mode, so conducted power of WLAN2.4GHz/5GHz SISO &Tx Beamforming mode is not required.
8. SISO and MIMO all supported by WLAN2.4GHz/WLAN5GHz, for SISO mode power is less than per chain power of MIMO mode. For WLAN SISO & MIMO mode, the whole testing has assessed only MIMO mode by referring to their higher conducted power, so only chose MIMO mode to perform SAR testing. However, in order to do SISO simultaneous transmission, additional tested the WLAN 2.4GHz SISO antenna 9.
9. For the conducted power measurement is MIMO chains transmitting simultaneously and measured the separately conducted power for both chains and then based on the conducted power of two antennas respectively to calculate sum of the power for MIMO mode.

<WLAN2.4GHz>

				Ant 7 Full Power Body-Worn&Extremity Standalone Non DBS		Ant 9 Full Power Body-Worn&Extremity Standalone Non DBS		Ant 7+9 Full Power Body-Worn&Extremity Standalone Non DBS		Ant 7 Head Standalone Non DBS		Ant 9 Head Standalone Non DBS		Ant 7+9 Head Standalone Non DBS		Duty Cycle %
2.4GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	
802.11b 1Mbps		1	2412	18.45	20.00	18.28	20.00	21.37	23.00	16.51	18.00	16.60	18.00	19.56	21.00	98.35
		6	2437	17.62	19.50	17.69	19.50	20.66	22.50	16.65	18.00	16.58	18.00	19.62	21.00	
		11	2462	19.59	21.00	19.62	21.00	22.61	24.00	16.71	18.00	16.62	18.00	19.67	21.00	

				Ant 7 Hotspot Standalone Non DBS		Ant 9 Hotspot Standalone Non DBS		Ant 7+9 Hotspot Standalone Non DBS		Duty Cycle %
2.4GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	
802.11b 1Mbps		1	2412	18.94	20.00	18.67	20.00	21.81	23.00	98.35
		6	2437	18.04	19.00	18.08	19.00	21.06	22.00	
		11	2462	18.97	20.00	18.95	20.00	21.96	23.00	

		Ant 9 Full Power Body-Worn&Extremity Standalone Non DBS Hotspot Standalone Non DBS				Ant 9 Head Standalone Non DBS Body-Worn&Extremity Simultaneous DBS		Duty Cycle %
2.4GHz WLAN	Mode	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit			
	802.11b 1Mbps	18.28	20.00	17.60	19.00	98.35		
		17.69	19.50	17.55	19.00			
		19.62	21.00	17.61	19.00			

<WLAN5.2GHz>

				Ant 8 Full Power Body-Worn&Extremity Standalone Non DBS		Ant 10 Full Power Body-Worn&Extremity Standalone Non DBS		Ant 8+10 Full Power Body-Worn&Extremity Standalone Non DBS		Duty Cycle %
5.2GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	
	802.11a 6Mbps	36	5180	19.54	21.00	19.01	20.50	22.28	23.80	99.32
		40	5200	19.33	21.00	19.04	20.50	22.19	23.80	
		44	5220	19.32	21.00	18.94	20.50	22.13	23.80	
		48	5240	19.59	21.00	19.47	21.00	22.53	24.00	

				Ant 8 Head Standalone Non DBS		Ant 10 Head Standalone Non DBS		Ant 8+10 Head Standalone Non DBS		Ant 8 Hotspot Standalone Non DBS		Ant 10 Hotspot Standalone Non DBS		Ant 8+10 Hotspot Standalone Non DBS		Duty Cycle %
5.2GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	
	802.11a 6Mbps	36	5180	Not Required		Not Required		Not Required		18.74	20.00	18.20	19.50	21.48	22.80	99.32
		40	5200							18.85	20.00	18.31	19.50	21.59	22.80	
		44	5220							18.89	20.00	18.32	19.50	21.61	22.80	
		48	5240							18.85	20.00	18.39	19.50	21.63	22.80	
	802.11ac-VHT80 MCS0	42	5210	15.59	17.00	15.11	16.50	18.36	19.80							100.00

<WLAN5.3GHz>

				Ant 8 Full Power Body-Worn&Extremity Standalone Non DBS		Ant 10 Full Power Body-Worn&Extremity Standalone Non DBS		Ant 8+10 Full Power Body-Worn&Extremity Standalone Non DBS		Duty Cycle %
5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	
	802.11a 6Mbps	52	5260	19.88	21.50	18.75	20.50	22.35	24.00	99.32
		56	5280	19.89	21.50	18.79	20.50	22.38	24.00	
		60	5300	19.78	21.00	18.35	19.50	22.12	23.30	
		64	5320	20.05	21.50	18.89	20.50	22.51	24.00	

				Ant 8 Head Standalone Non DBS		Ant 10 Head Standalone Non DBS		Ant 8+10 Head Standalone Non DBS		Duty Cycle %
5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	
	802.11ac-VHT160 MCS0	50	5250	15.71	17.00	15.10	16.5	18.42	19.80	100.00

<WLAN5.5GHz>

				Ant 8 Full Power Body-Worn&Extremity Standalone Non DBS		Ant 10 Full Power Body-Worn&Extremity Standalone Non DBS		Ant 8+10 Full Power Body-Worn&Extremity Standalone Non DBS		Duty Cycle %
5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	
	802.11a 6Mbps	100	5500	20.19	21.50	19.05	20.00	22.66	23.80	99.32
		116	5580	20.41	21.50	19.26	20.50	22.87	24.00	
		124	5620	20.19	21.50	19.31	20.50	22.77	24.00	
		132	5660	20.12	21.50	19.51	20.50	22.83	24.00	
		140	5700	20.09	21.50	19.27	20.50	22.70	24.00	
		144	5720	20.04	21.50	19.61	21.00	22.63	24.30	

				Ant 8 Head Standalone Non DBS		Ant 10 Head Standalone Non DBS		Ant 8+10 Head Standalone Non DBS		Duty Cycle %
5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	
	802.11ac-VHT160 MCS0	114	5570	16.14	17.50	15.47	17.00	18.82	20.30	100.00

<WLAN5.8GHz>



				Ant 8 Full Power BodyWorn&Extremity Standalone Non DBS		Ant 10 Full Power BodyWorn&Extremity Standalone Non DBS		Ant 8+10 Full Power BodyWorn&Extremity Standalone Non DBS		Ant 8 Head Standalone Non DBS		Ant 10 Head Standalone Non DBS		Ant 8+10 Head Standalone Non DBS		Duty Cycle %
5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	
	802.11a 6Mbps	149	5745	19.71	21.50	19.31	21.00	22.31	24.30	Not Required		Not Required		Not Required		99.32
		157	5785	19.63	21.50	19.23	20.50	22.23	24.00							
		165	5825	19.75	21.50	19.11	20.50	22.24	24.00							
	802.11ac-VHT80 MCS0	155	5775							15.78	17.50	15.32	17.00	18.56	20.30	100.00

				Ant 8 Hotspot Standalone Non DBS		Ant 10 Hotspot Standalone Non DBS		Ant 8+10 Hotspot Standalone Non DBS		Ant 8 Hotspot Simultaneous DBS		Ant 10 Hotspot Simultaneous DBS		Ant 8+10 Hotspot Simultaneous DBS		Duty Cycle %
5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	
	802.11a 6Mbps	149	5745	18.41	20.00	17.66	19.50	21.05	22.80	Not Required		Not Required		Not Required		99.32
		157	5785	18.30	20.00	17.11	19.00	20.75	22.50							
		165	5825	18.51	20.50	17.61	19.50	21.08	23.00							
	802.11ac-VHT80 MCS0	155	5775							9.91	11.50	9.55	11.50	12.73	14.50	100.00

<WLAN6GHz>

Standard Client

					Ant 8 For Default / Full Power Head Standalone Non DBS		Ant 10 For Default / Full Power Head Standalone Non DBS		Ant 8+10 For Default / Full Power Head Standalone Non DBS		Duty Cycle %
WiFi 6E	Band	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	
	UNII 5 (5.925-6.425GHz)	802.11ax-HE160 MCS0	15	6025	13.71	15.50	13.57	15.50	16.63	18.50	100.00
			47	6185	14.11	15.50	13.59	15.50	16.65	18.50	
	UNII 7 (6.525-6.885GHz)	802.11ax-HE160 MCS0	143	6665	13.48	15.50	13.13	15.00	16.31	18.30	100.00

					Ant 8 Body-Worn&Extremity Standalone Non DBS&Standalone DBS only&Simultaneous non DBS& Simultaneous DBS		Ant 10 Body-Worn&Extremity Standalone Non DBS&Standalone DBS only&Simultaneous non DBS& Simultaneous DBS		Ant 8+10 Body-Worn&Extremity Standalone Non DBS&Standalone DBS only&Simultaneous non DBS& Simultaneous DBS		Duty Cycle %
WiFi 6E	Band	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	
	UNII 5 (5.925-6.425GHz)	802.11ax-HE160 MCS0	15	6025	11.01	12.50	10.54	12.50	13.79	15.50	100.00
			47	6185	11.35	13.00	10.74	12.50	14.01	15.80	
	UNII 7 (6.525-6.885GHz)	802.11ax-HE160 MCS0	143	6665	10.69	12.50	9.74	11.50	13.25	15.00	100.00

Indoor Client


					Ant 8 Head Standalone Non DBS		Ant 10 Head Standalone Non DBS		Ant 8+10 Head Standalone Non DBS		Duty Cycle %
	Band	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	
WiFi 6E	UNII 6 (6.425-6.525GHz)	802.11ax-HE160 MCS0	111	6505	13.62	14.00	13.11	13.50	15.38	16.80	100.00
	UNII 8 (6.885-7.125GHz)	802.11ax-HE160 MCS0	207	6985	13.64	14.00	13.51	14.00	16.50	17.00	100.00

					Ant 8 Body-Worn&Extremity Standalone Non DBS&Standalone DBS only&Simultaneous non DBS& Simultaneous DBS		Ant 10 Body-Worn&Extremity Standalone Non DBS&Standalone DBS only&Simultaneous non DBS& Simultaneous DBS		Ant 8+10 Body-Worn&Extremity Standalone Non DBS&Standalone DBS only&Simultaneous non DBS& Simultaneous DBS		Duty Cycle %
WiFi 6E	Band	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	
	UNII 6 (6.425-6.525GHz)	802.11ax-HE160 MCS0	111	6505	10.81	12.50	10.01	11.50	13.43	15.00	100.00
	UNII 8 (6.885-7.125GHz)	802.11ax-HE160 MCS0	207	6985	11.01	12.50	10.75	12.50	13.89	15.50	100.00

<2.4GHz Bluetooth>

General Note:

- For 2.4GHz Bluetooth SAR testing was selected 1Mbps, due to its highest average power.
- The Bluetooth duty cycle are 76.78 % as following figure, according to Oct. 2016 TCB workshop for Bluetooth SAR scaling need further consideration and the maximum duty cycle is 83.3%, therefore the actual duty cycle will be scaled up to 100% for Bluetooth reported SAR calculation.

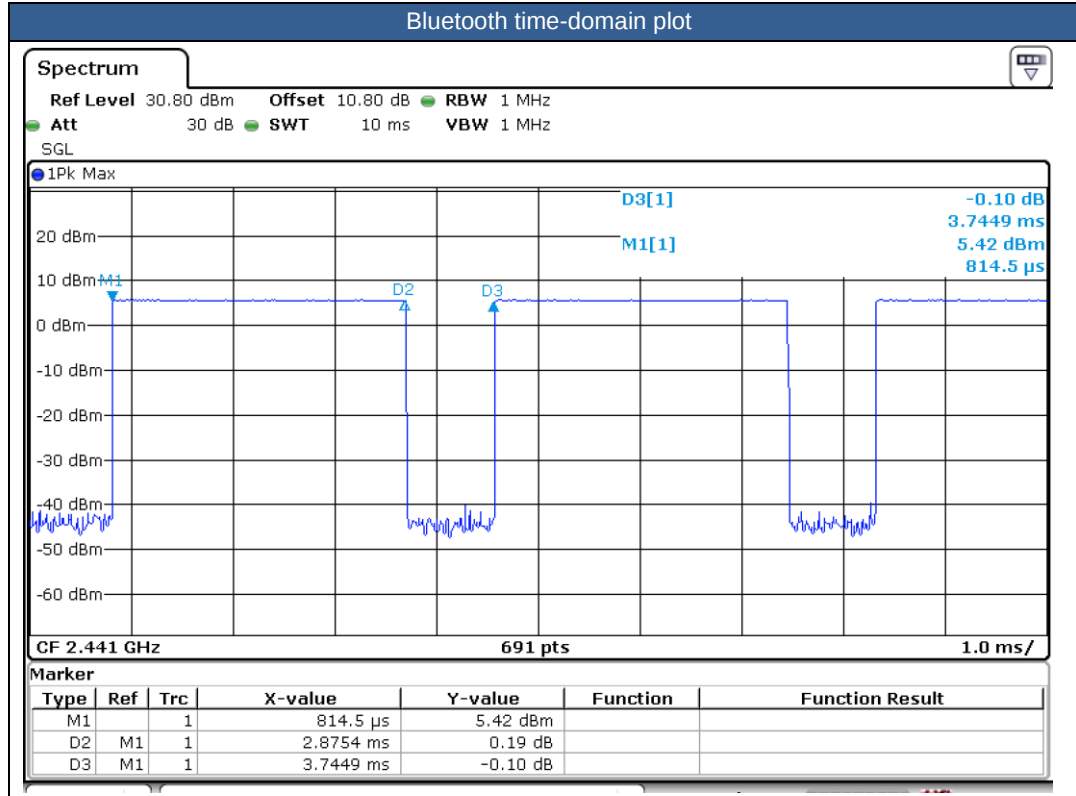

Class1

Mode	Channel	Frequency (MHz)	Average power (dBm)		
			1Mbps	2Mbps	3Mbps
BR / EDR	CH 00	2402	9.34		
	CH 39	2441	9.55		
	CH 78	2480	9.22		
Tune-up Limit			11		