

TEST REPORT

Reference No..... : WTX21X01000159W-4
FCC ID : 2AYPD-H11
Applicant : VIDERI Inc.
Address..... : 151 Lafayette St, (3rd floor), New York, NY, USA 10013
Product Name : Digital Canvas
Test Model. : H11
Standards : FCC Part 15.247
Date of Receipt sample : Jan.04, 2021
Date of Test..... : Jan.04, 2021 to Jan.20, 2021
Date of Issue : Jan.20, 2021
Test Result..... : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308

Fax.: +86-755-33663309


Tested by:

Reviewed By:

Approved & Authorized By:



Jason Su / Project Engineer



Lion Cai / RF Manager



Silin Chen / Manager

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 TEST STANDARDS	5
1.3 TEST METHODOLOGY	5
1.4 TEST FACILITY	5
1.5 EUT SETUP AND TEST MODE	6
1.6 MEASUREMENT UNCERTAINTY	6
1.7 TEST EQUIPMENT LIST AND DETAILS	7
2. SUMMARY OF TEST RESULTS	9
3. ANTENNA REQUIREMENT	10
3.1 STANDARD APPLICABLE	10
3.2 EVALUATION INFORMATION	10
4. POWER SPECTRAL DENSITY	11
4.1 STANDARD APPLICABLE	11
4.2 TEST SETUP BLOCK DIAGRAM	11
4.3 TEST PROCEDURE	11
4.4 SUMMARY OF TEST RESULTS/PLOTS	11
5. DTS BANDWIDTH	12
5.1 STANDARD APPLICABLE	12
5.2 TEST SETUP BLOCK DIAGRAM	12
5.3 TEST PROCEDURE	12
5.4 SUMMARY OF TEST RESULTS/PLOTS	12
6. RF OUTPUT POWER	13
6.1 STANDARD APPLICABLE	13
6.2 TEST SETUP BLOCK DIAGRAM	13
6.3 TEST PROCEDURE	13
6.4 SUMMARY OF TEST RESULTS/PLOTS	13
7. FIELD STRENGTH OF SPURIOUS EMISSIONS	14
7.1 STANDARD APPLICABLE	14
7.2 TEST PROCEDURE	14
7.3 CORRECTED AMPLITUDE & MARGIN CALCULATION	16
7.4 SUMMARY OF TEST RESULTS/PLOTS	16
8. OUT OF BAND EMISSIONS	31
8.1 STANDARD APPLICABLE	31
8.2 TEST PROCEDURE	31
8.3 SUMMARY OF TEST RESULTS/PLOTS	32
9. CONDUCTED EMISSIONS	37
9.1 TEST PROCEDURE	37
9.2 BASIC TEST SETUP BLOCK DIAGRAM	37
9.3 TEST RECEIVER SETUP	37
9.4 SUMMARY OF TEST RESULTS/PLOTS	37
APPENDIX SUMMARY	40
APPENDIX A	41
APPENDIX B	44
APPENDIX C	47
APPENDIX D	50
APPENDIX PHOTOGRAPHS	54

Report version

Version No.	Date of issue	Description
Rev.00	Jan.20, 2021	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: VIDERI Inc.
Address of applicant: 151 Lafayette St, (3rd floor), New York, NY, USA 10013

Manufacturer: VIDERI Inc.
Address of manufacturer: 151 Lafayette St, (3rd floor), New York, NY, USA 10013

General Description of EUT	
Product Name:	Digital Canvas
Trade Name	VIDERI
Model No.:	H11
Adding Model(s):	/
Rated Voltage:	DC3.8V
Battery Capacity:	8000mAh
Power Adapter:	/
Note: The test data is gathered from a production sample, provided by the manufacturer.	

Technical Characteristics of EUT	
Bluetooth Version:	V5.0 (BLE mode)
Frequency Range:	2402-2480MHz
RF Output Power:	0.236dBm (Conducted)
Data Rate:	1Mbps
Modulation:	GFSK
Quantity of Channels:	40
Channel Separation:	2MHz
Type of Antenna:	Integral Antenna
Antenna Gain:	1.2dBi

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

558074 D01 15.247 Meas Guidance v05r02: Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under section 15.247 of the Fcc rules.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Low	2402MHz
TM2	Middle	2440MHz
TM3	High	2480MHz

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	50~55 %
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB Cable	1.0	Shielded	Without Ferrite

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
		30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-26GHz $\pm 3.92\text{dB}$
Transmitter Spurious Emissions	Radiated	

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2020-04-28	2021-04-27
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2020-04-28	2021-04-27
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2020-04-28	2021-04-27
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2020-04-28	2021-04-27
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2020-04-28	2021-04-27
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2019-05-05	2021-05-04
SEMT-1042	Horn Antenna	ETS	3117	00086197	2019-05-05	2021-05-04
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2019-05-05	2021-05-04
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2019-05-05	2021-05-04
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2020-04-28	2021-04-27
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2020-04-28	2021-04-27
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2020-04-28	2021-04-27
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2020-04-28	2021-04-27
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2020-04-28	2021-04-27
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2020-04-28	2021-04-27
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2019-05-05	2021-05-04
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2020-04-28	2021-04-27
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2020-04-28	2021-04-27
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2020-04-28	2021-04-27
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2020-03-17	2021-03-16
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2020-03-17	2021-03-16
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2020-03-17	2021-03-16
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2020-03-17	2021-03-16
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2020-03-17	2021-03-16
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2020-03-17	2021-03-16

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203; §15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.207(a)	Conducted Emission	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.247(a)(2)	DTS Bandwidth	Compliant
§15.247(b)(3)	RF Output Power	Compliant
§15.209(a)	Radiated Emission	Compliant
§15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: Not applicable

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Evaluation Information


This product has an Integral Antenna, fulfill the requirement of this section.

4. Power Spectral Density

4.1 Standard Applicable

According to 15.247(a)(1)(iii), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.2 Test Setup Block Diagram

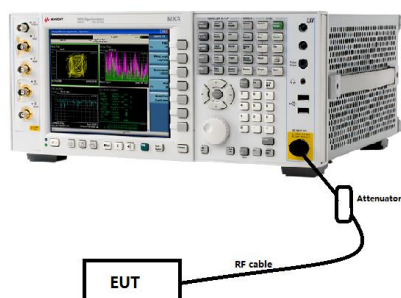

4.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.10.2, the test method of power spectral density as below:

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

4.4 Summary of Test Results/Plots


Please refer to Appendix A

5. DTS Bandwidth

5.1 Standard Applicable

According to 15.247(a)(2), systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

5.2 Test Setup Block Diagram

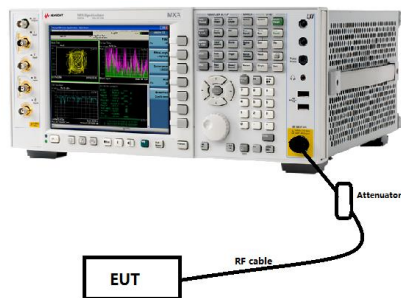

5.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.2 and ANSI C63.10-2013 Subclause 11.8.1, the test method of DTS Bandwidth as below:

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.4 Summary of Test Results/Plots


Please refer to Appendix B

6. RF Output Power

6.1 Standard Applicable

According to 15.247(b)(3), for systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

6.2 Test Setup Block Diagram

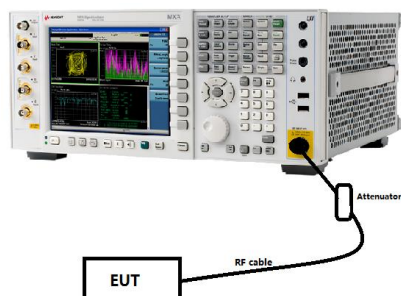

6.3 Test Procedure

According to the KDB-558074 D01 v05r02 Subclause 8.3.1.1 and ANSI C63.10-2013 Subclause 11.9.1.1, this procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- Set the $RBW \geq DTS$ bandwidth.
- Set $VBW \geq 3 \times RBW$.
- Set $span \geq 3 \times RBW$.
- Sweep time = auto couple.
- Detector = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.

6.4 Summary of Test Results/Plots

Please refer to Appendix C

7. Field Strength of Spurious Emissions

7.1 Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.


7.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.


The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.


The test setup for emission measurement below 30MHz..

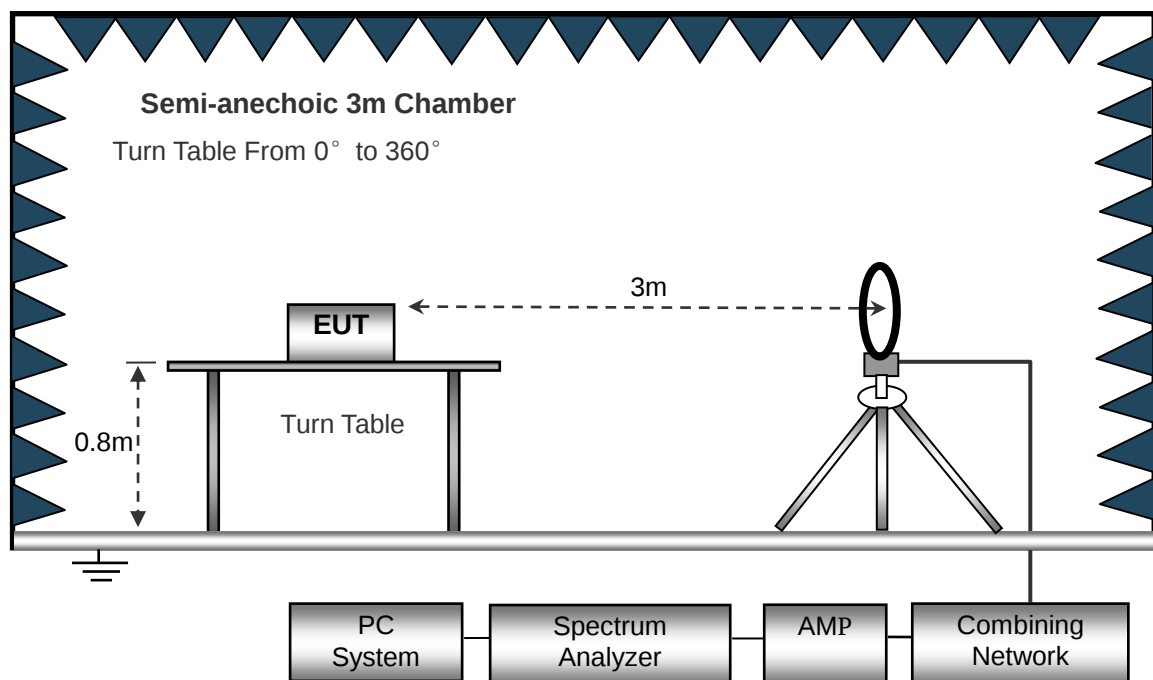

The test setup for emission measurement from 30 MHz to 1 GHz..

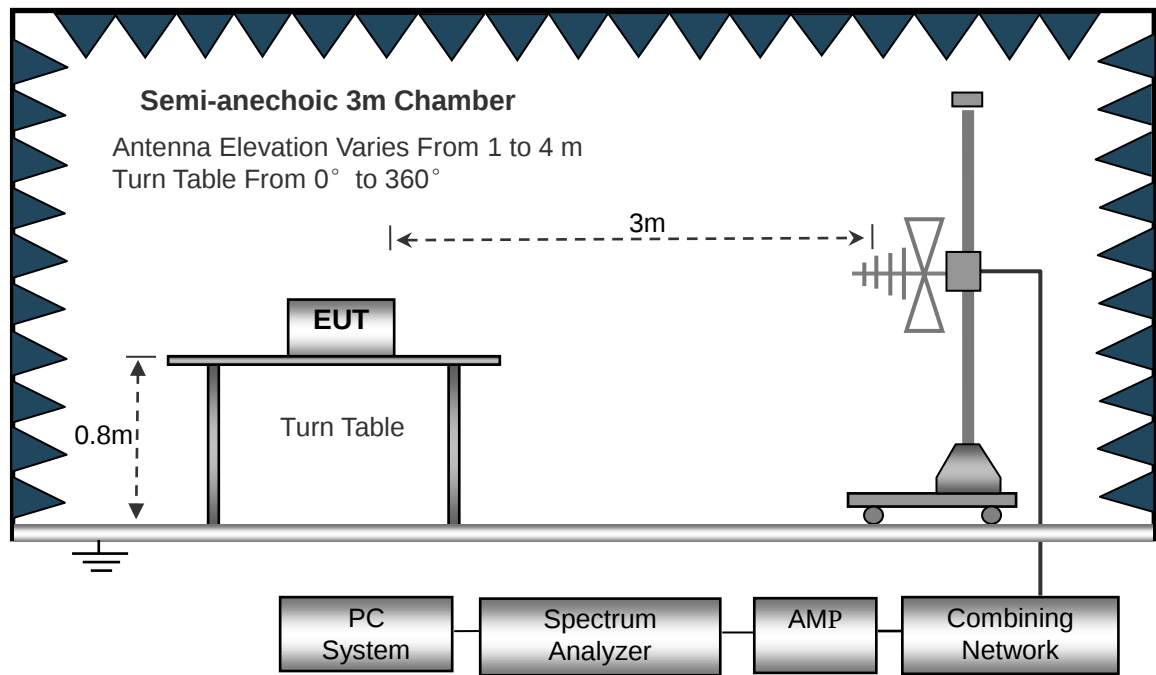

The test setup for emission measurement above 1 GHz..

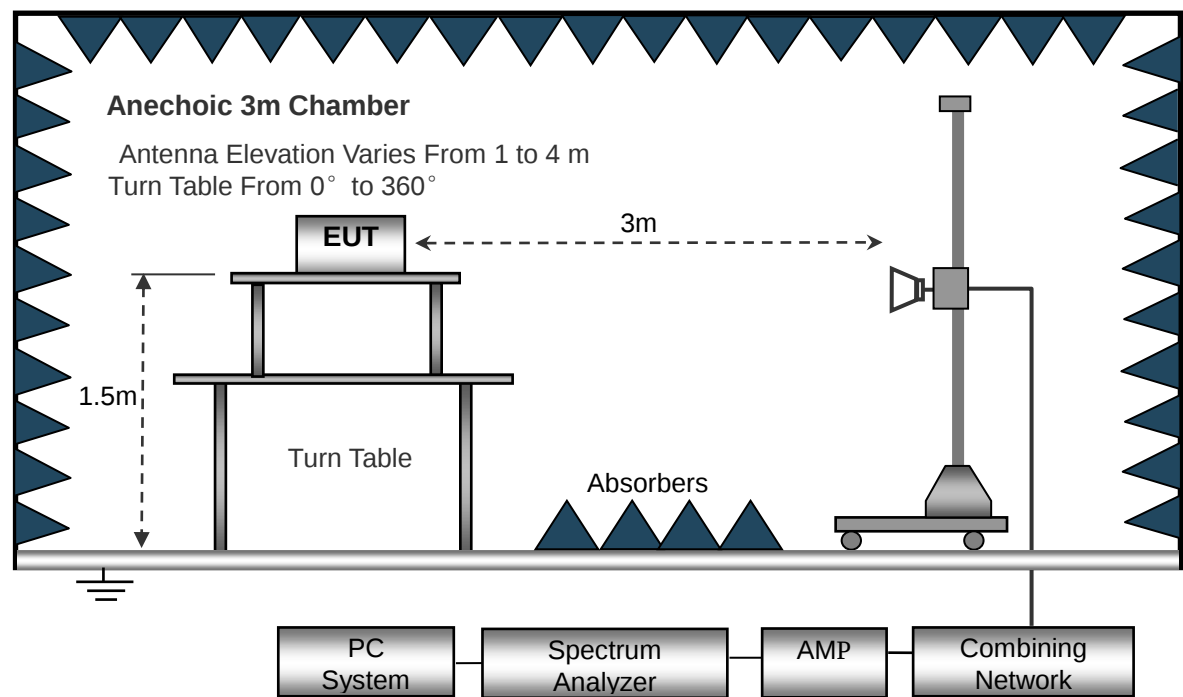

Frequency :9kHz-30MHz
RBW=10KHz,
VBW =30KHz
Sweep time= Auto
Trace = max hold
Detector function = peak

Frequency :30MHz-1GHz
RBW=120KHz,
VBW=300KHz
Sweep time= Auto
Trace = max hold
Detector function = peak, QP

Frequency :Above 1GHz
RBW=1MHz,
VBW=3MHz(Peak), 10Hz(AV)
Sweep time= Auto
Trace = max hold
Detector function = peak, AV

7.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dBμV means the emission is 6dBμV below the maximum limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

7.4 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.


- Spurious Emissions Below 1GHz
- 1Mbps

Test Channel	Low	Polarity:	Horizontal
--------------	-----	-----------	------------

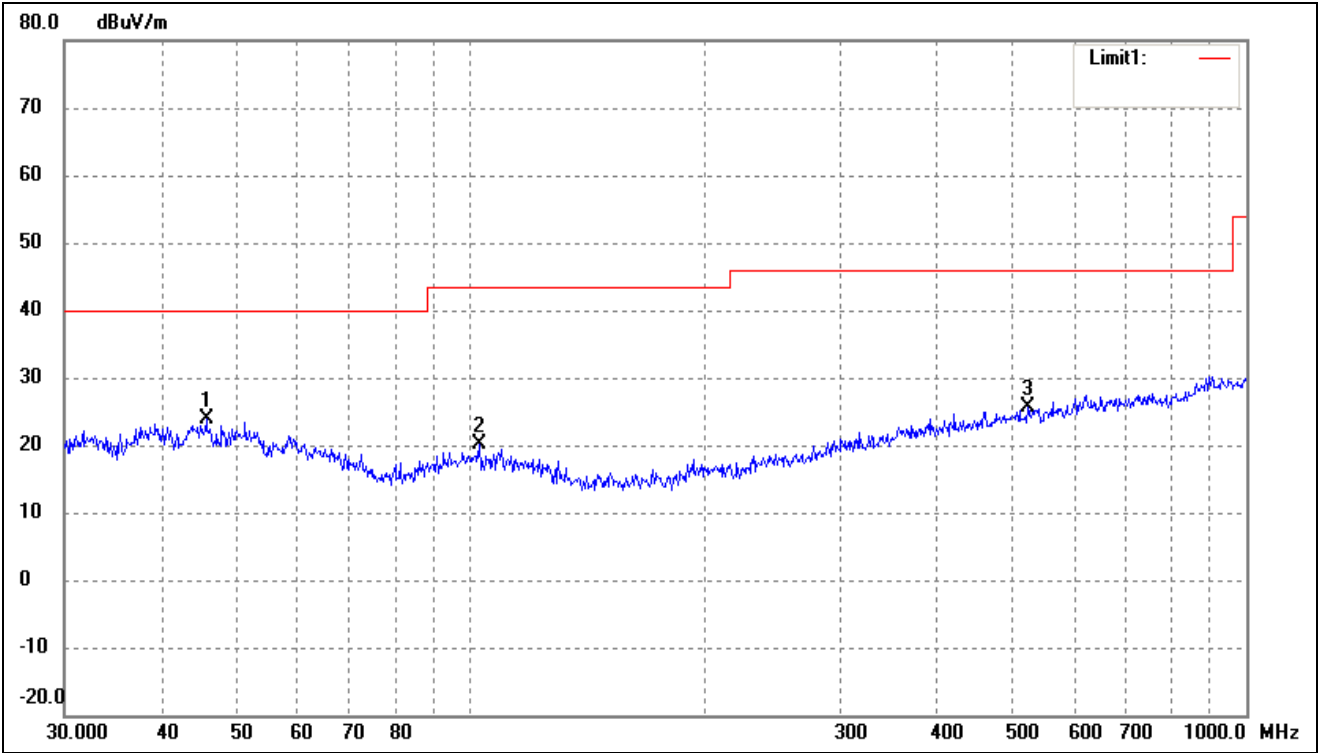


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	45.6948	35.64	-11.76	23.88	40.00	-16.12	-	-	peak
2	102.7192	33.48	-13.32	20.16	43.50	-23.34	-	-	peak
3	522.7180	29.90	-4.16	25.74	46.00	-20.26	-	-	peak

Test Channel	Low	Polarity:	Vertical
--------------	-----	-----------	----------

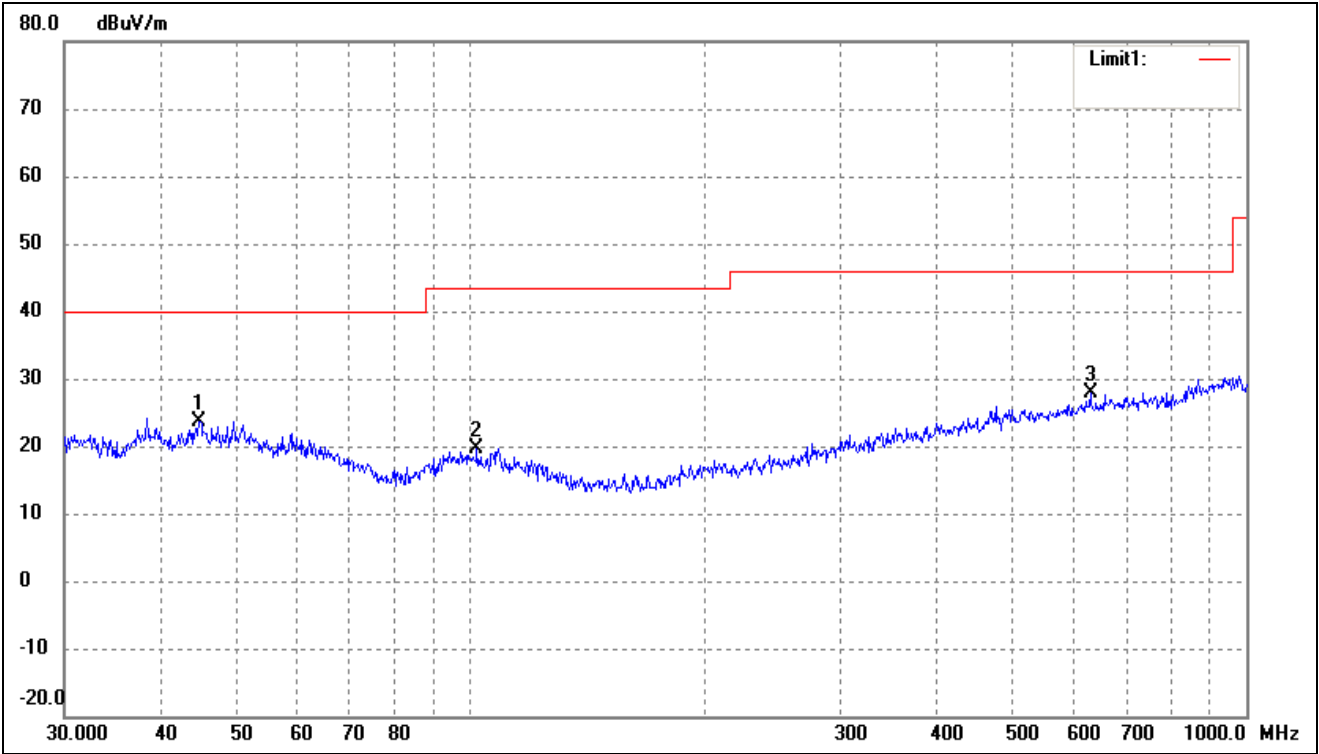


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	44.7434	35.41	-11.81	23.60	40.00	-16.40	-	-	peak
2	102.0014	33.01	-13.32	19.69	43.50	-23.81	-	-	peak
3	629.4772	30.19	-2.19	28.00	46.00	-18.00	-	-	peak

Test Channel	Middle	Polarity:	Horizontal
--------------	--------	-----------	------------

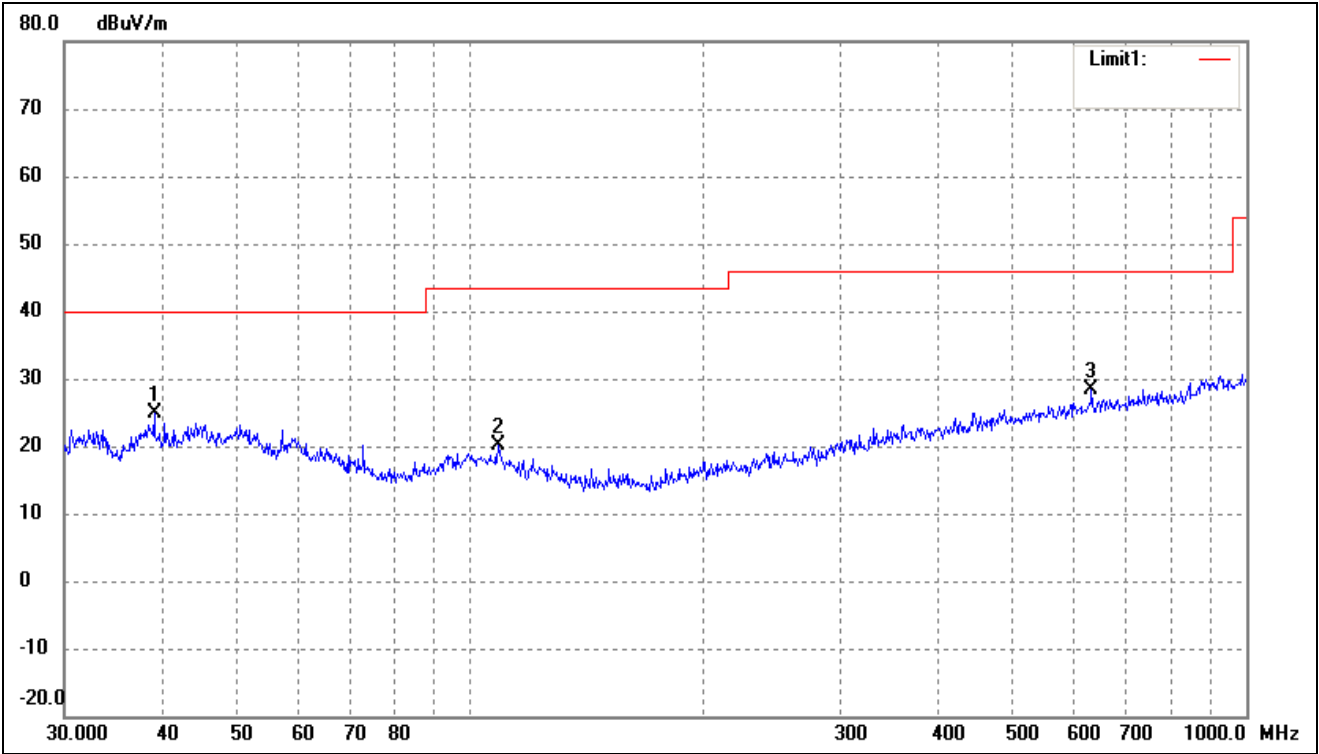


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	39.1616	37.25	-12.30	24.95	40.00	-15.05	-	-	peak
2	108.6470	33.33	-13.31	20.02	43.50	-23.48	-	-	peak
3	631.6884	30.58	-2.21	28.37	46.00	-17.63	-	-	peak

Test Channel	Middle	Polarity:	Vertical
--------------	--------	-----------	----------

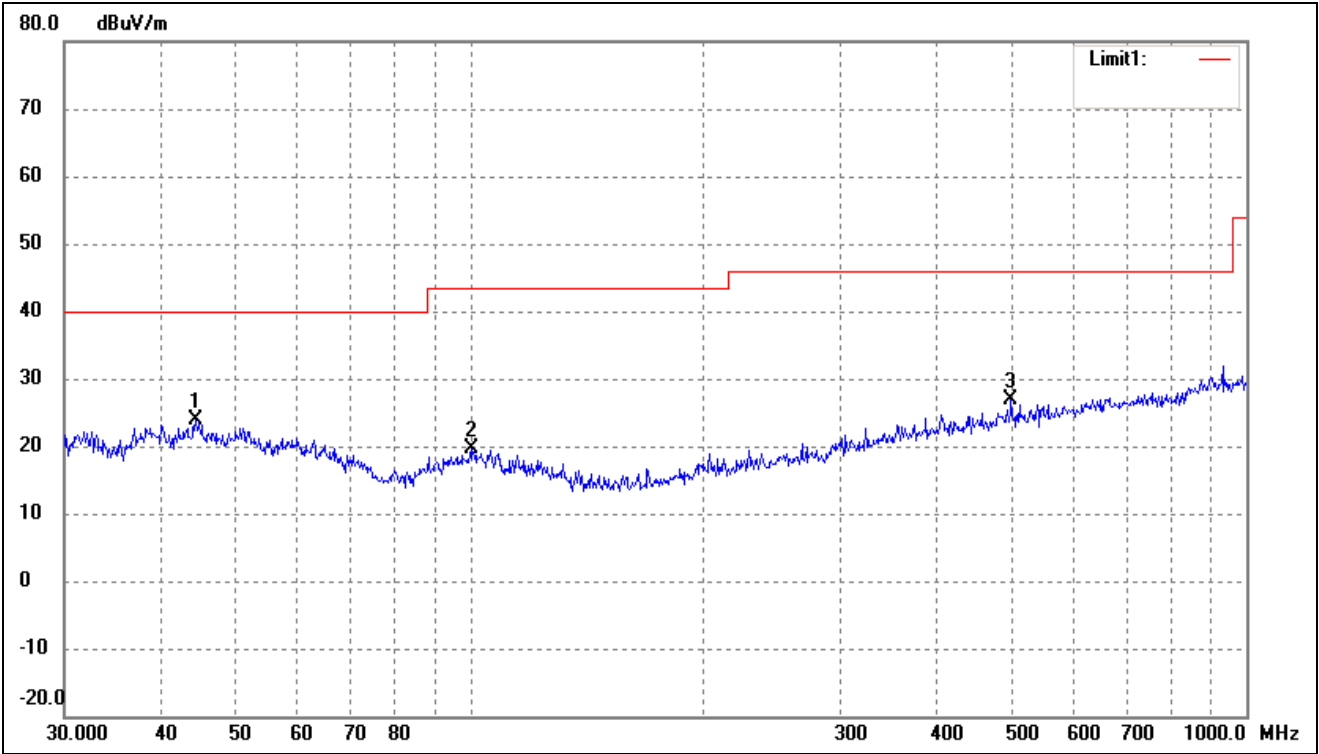


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	44.2752	35.67	-11.83	23.84	40.00	-16.16	-	-	peak
2	100.2286	33.02	-13.32	19.70	43.50	-23.80	-	-	peak
3	497.6765	31.01	-4.12	26.89	46.00	-19.11	-	-	peak

Test Channel	High	Polarity:	Horizontal
--------------	------	-----------	------------

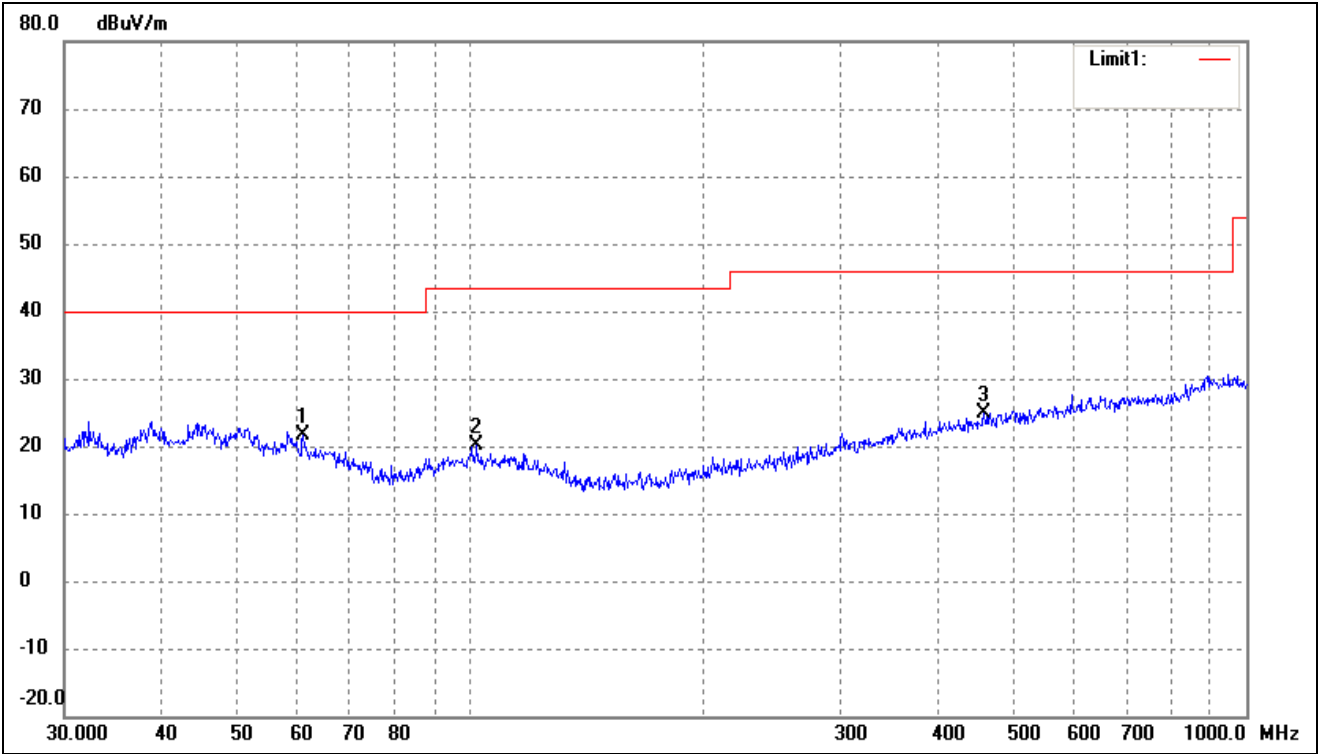

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	60.9176	34.70	-13.15	21.55	40.00	-18.45	-	-	peak
2	102.0014	33.37	-13.32	20.05	43.50	-23.45	-	-	peak
3	459.1144	30.10	-5.32	24.78	46.00	-21.22	-	-	peak


Test Channel	High	Polarity:	Vertical
--------------	------	-----------	----------

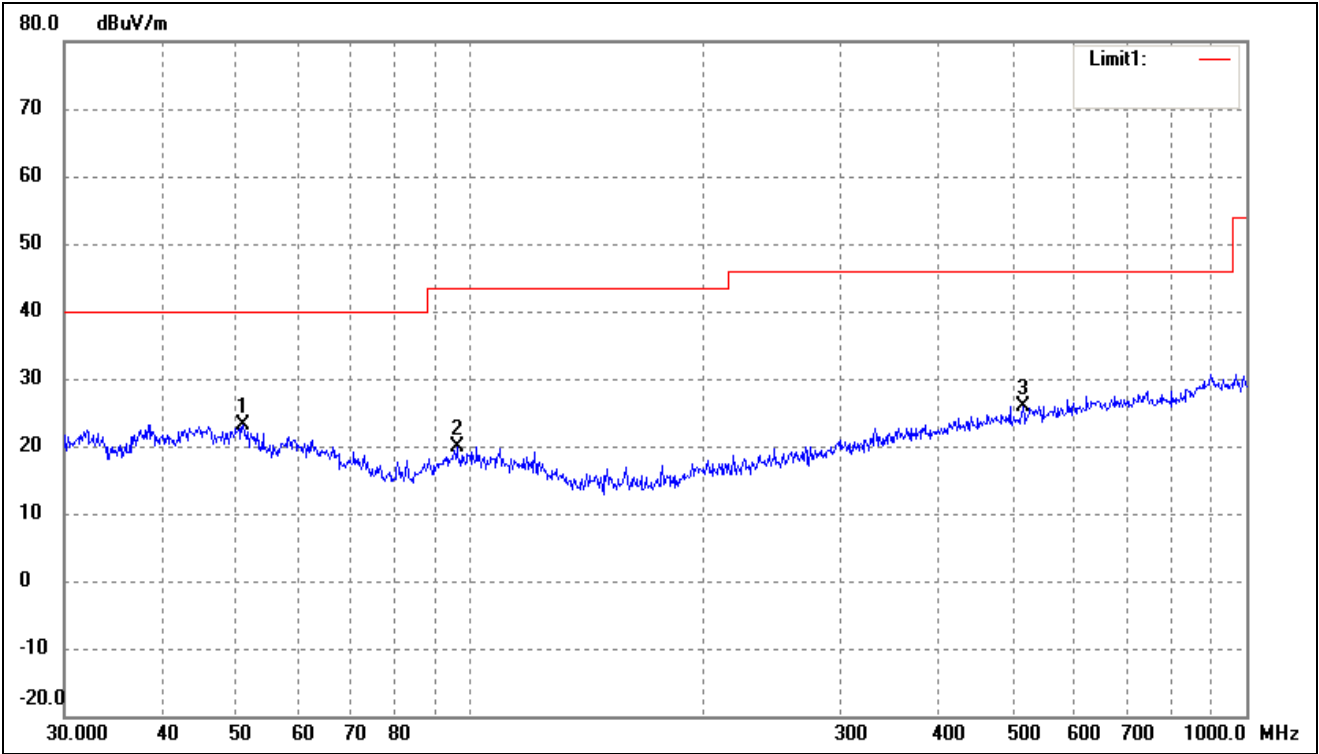

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	50.9420	34.86	-11.80	23.06	40.00	-16.94	-	-	peak
2	96.0986	33.83	-13.96	19.87	43.50	-23.63	-	-	peak
3	515.4374	30.12	-4.12	26.00	46.00	-20.00	-	-	peak


➤ 2Mbps

Test Channel	Low	Polarity:	Horizontal
--------------	-----	-----------	------------

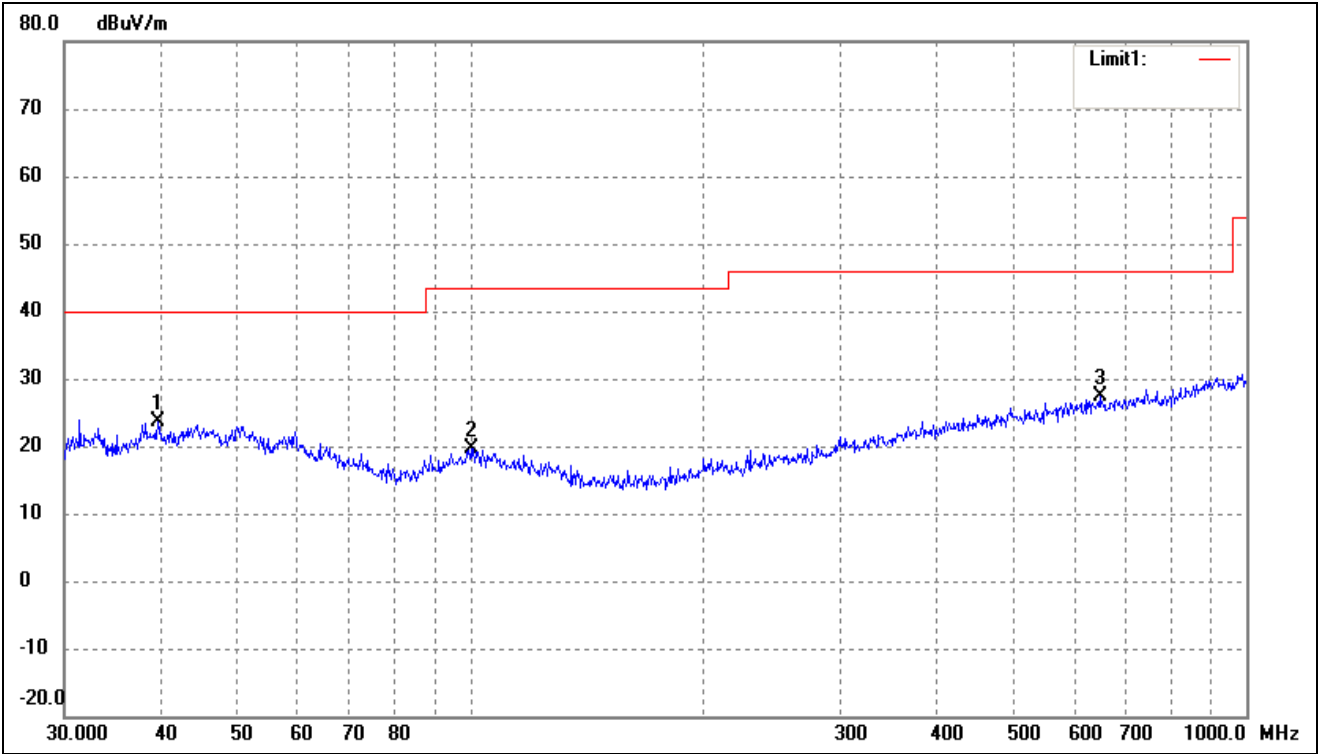


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	39.5757	35.79	-12.14	23.65	40.00	-16.35	-	-	peak
2	100.2286	32.83	-13.32	19.51	43.50	-23.99	-	-	peak
3	647.3856	29.77	-2.34	27.43	46.00	-18.57	-	-	peak

Test Channel	Low	Polarity:	Vertical
--------------	-----	-----------	----------

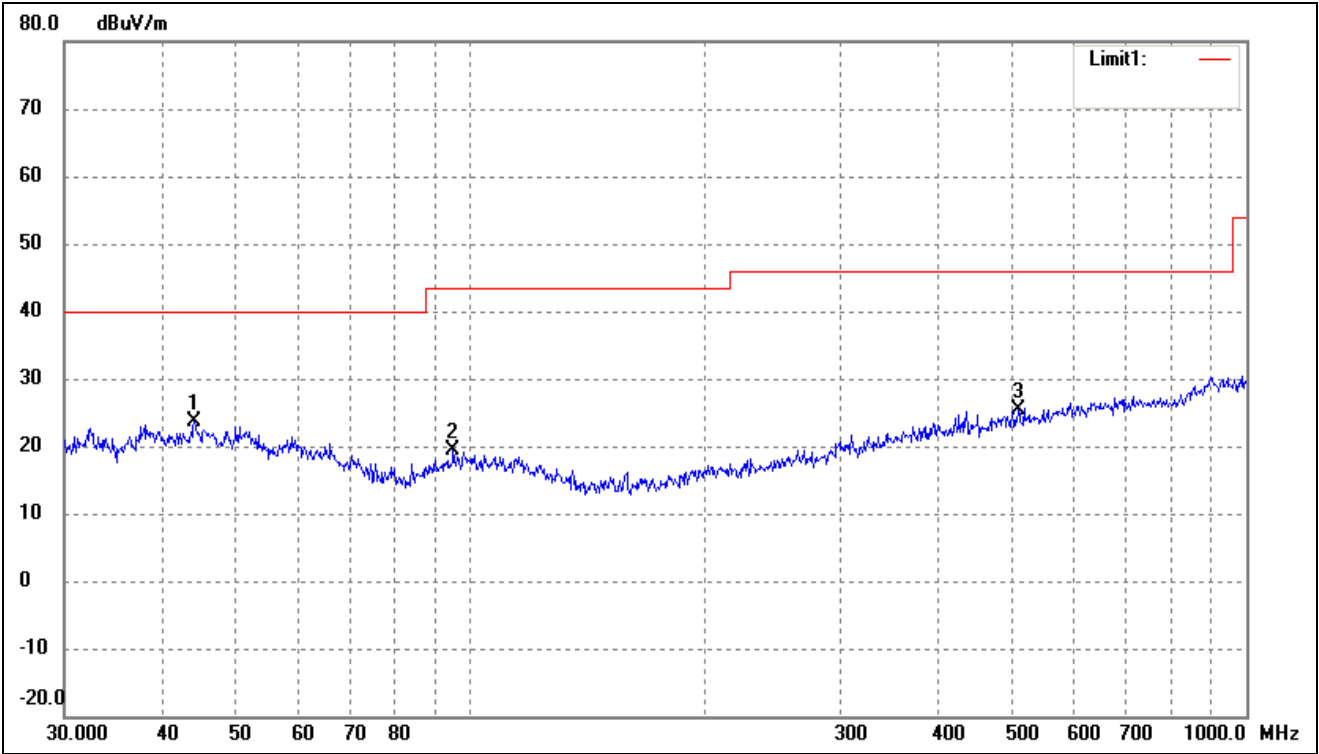


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	44.1202	35.39	-11.84	23.55	40.00	-16.45	-	-	peak
2	95.0930	33.41	-14.13	19.28	43.50	-24.22	-	-	peak
3	508.2582	29.40	-4.09	25.31	46.00	-20.69	-	-	peak

Test Channel	Middle	Polarity:	Horizontal
--------------	--------	-----------	------------

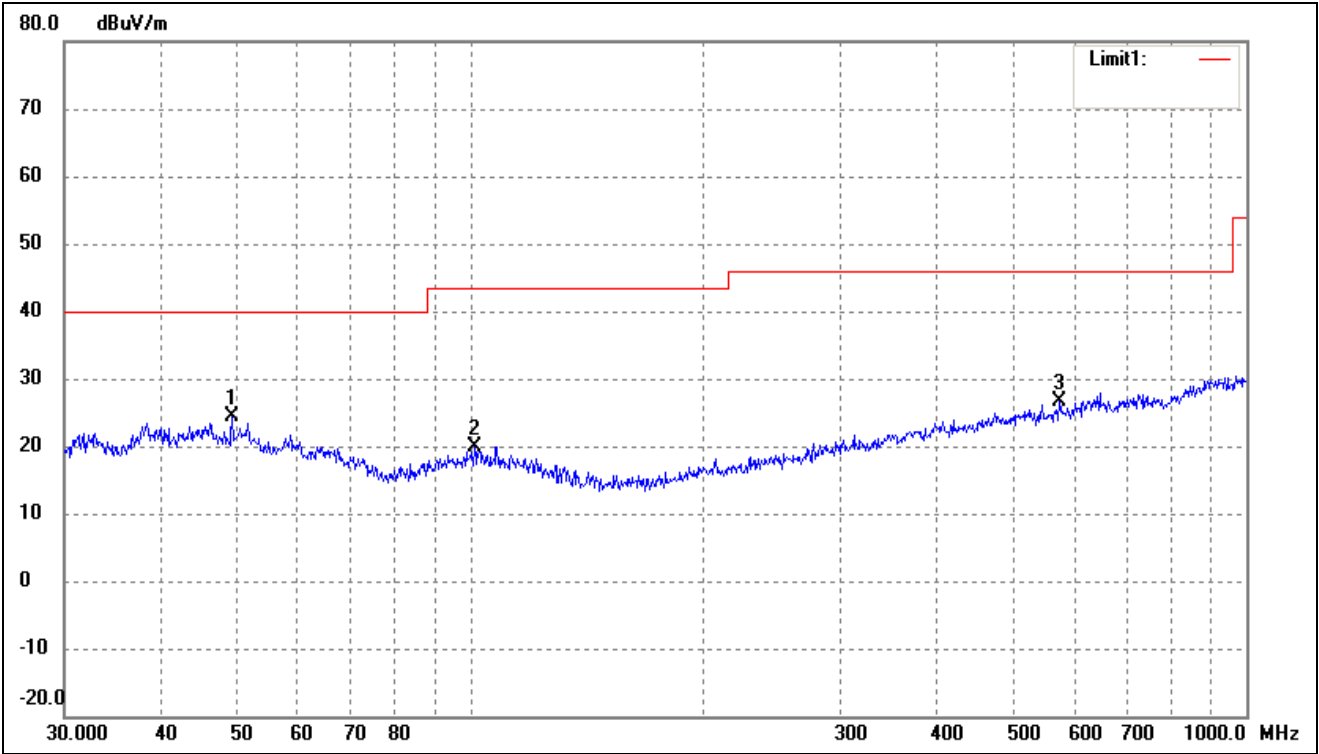


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	49.3594	35.84	-11.57	24.27	40.00	-15.73	-	-	peak
2	101.2885	33.27	-13.31	19.96	43.50	-23.54	-	-	peak
3	574.6258	29.13	-2.58	26.55	46.00	-19.45	-	-	peak

Test Channel	Middle	Polarity:	Vertical
--------------	--------	-----------	----------

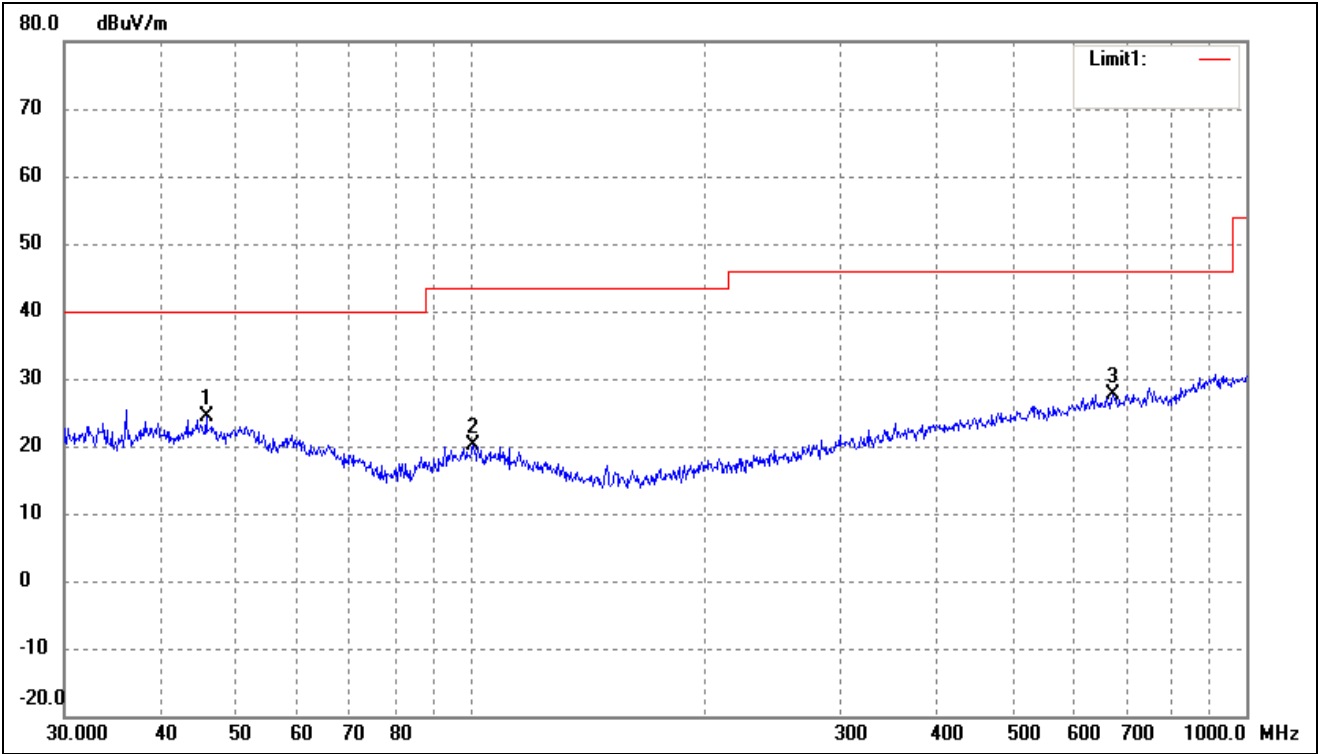


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	45.6948	36.14	-11.76	24.38	40.00	-15.62	-	-	peak
2	100.9340	33.40	-13.32	20.08	43.50	-23.42	-	-	peak
3	672.8445	29.51	-1.91	27.60	46.00	-18.40	-	-	peak

Test Channel	High	Polarity:	Horizontal
--------------	------	-----------	------------

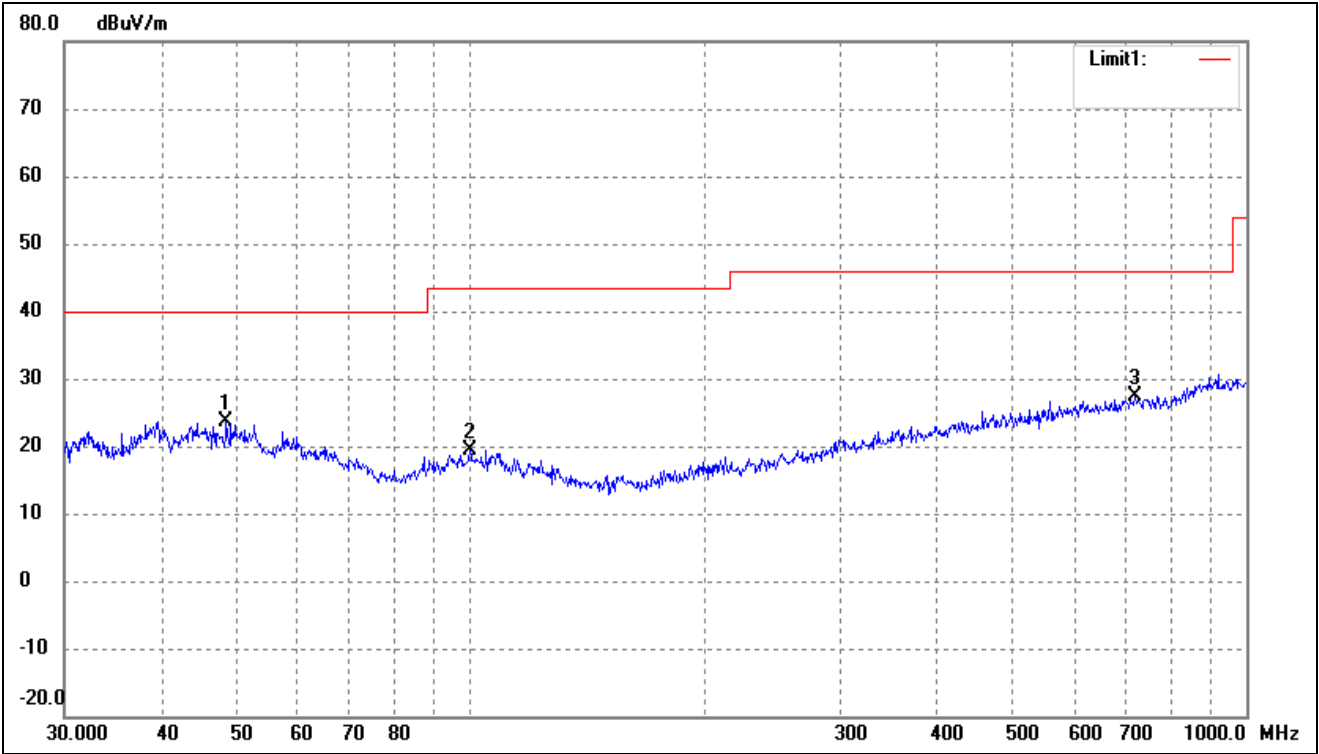

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	48.5016	35.27	-11.61	23.66	40.00	-16.34	-	-	peak
2	99.8777	32.72	-13.34	19.38	43.50	-24.12	-	-	peak
3	719.1995	28.58	-1.18	27.40	46.00	-18.60	-	-	peak

Test Channel	High	Polarity:	Vertical
--------------	------	-----------	----------

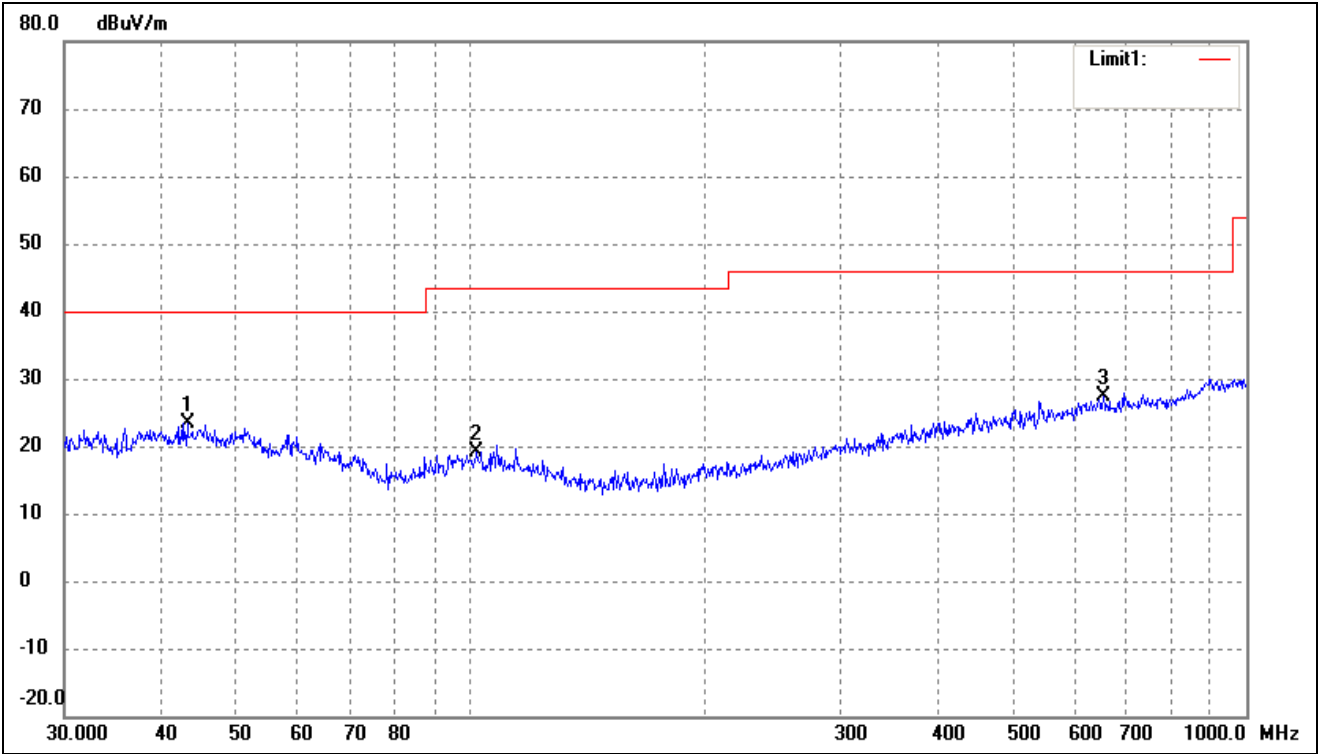

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	43.2017	35.17	-11.86	23.31	40.00	-16.69	-	-	peak
2	102.0014	32.43	-13.32	19.11	43.50	-24.39	-	-	peak
3	654.2318	29.57	-2.29	27.28	46.00	-18.72	-	-	peak

Remark: ‘-’Means’ the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

- Spurious Emissions Above 1GHz
- 1Mbps

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2402MHz							
4804	59.58	-3.59	55.99	74	-18.01	H	PK
4804	40.46	-3.59	36.87	54	-17.13	H	AV
7206	56.34	-0.52	55.82	74	-18.18	H	PK
7206	40.28	-0.52	39.76	54	-14.24	H	AV
4804	55.53	-3.59	51.94	74	-22.06	V	PK
4804	39.50	-3.59	35.91	54	-18.09	V	AV
7206	56.44	-0.52	55.92	74	-18.08	V	PK
7206	39.00	-0.52	38.48	54	-15.52	V	AV
Middle Channel-2440MHz							
4880	58.50	-3.49	55.01	74	-18.99	H	PK
4880	39.07	-3.49	35.58	54	-18.42	H	AV
7320	59.09	-0.47	58.62	74	-15.38	H	PK
7320	40.92	-0.47	40.45	54	-13.55	H	AV
4880	60.73	-3.49	57.24	74	-16.76	V	PK
4880	41.96	-3.49	38.47	54	-15.53	V	AV
7320	59.14	-0.47	58.67	74	-15.33	V	PK
7320	38.60	-0.47	38.13	54	-15.87	V	AV
High Channel-2480MHz							
4960	60.79	-3.41	57.38	74	-16.62	H	PK
4960	38.76	-3.41	35.35	54	-18.65	H	AV
7440	58.76	-0.42	58.34	74	-15.66	H	PK
7440	41.89	-0.42	41.47	54	-12.53	H	AV
4960	60.79	-3.41	57.38	74	-16.62	V	PK
4960	41.6	-3.41	38.19	54	-15.81	V	AV
7440	59.57	-0.42	59.15	74	-14.85	V	PK
7440	40.53	-0.42	40.11	54	-13.89	V	AV

➤ 2Mbps

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2402MHz							
4804	60.5	-3.59	56.91	74	-17.09	H	PK
4804	41.52	-3.59	37.93	54	-16.07	H	AV
7206	58.75	-0.52	58.23	74	-15.77	H	PK
7206	38.33	-0.52	37.81	54	-16.19	H	AV
4804	56.66	-3.59	53.07	74	-20.93	V	PK
4804	38.35	-3.59	34.76	54	-19.24	V	AV
7206	57.33	-0.52	56.81	74	-17.19	V	PK
7206	40.02	-0.52	39.50	54	-14.50	V	AV
Middle Channel-2440MHz							
4880	58.11	-3.49	54.62	74	-19.38	H	PK
4880	39.16	-3.49	35.67	54	-18.33	H	AV
7320	58.12	-0.47	57.65	74	-16.35	H	PK
7320	41.26	-0.47	40.79	54	-13.21	H	AV
4880	61.81	-3.49	58.32	74	-15.68	V	PK
4880	40.68	-3.49	37.19	54	-16.81	V	AV
7320	61.08	-0.47	60.61	74	-13.39	V	PK
7320	38.92	-0.47	38.45	54	-15.55	V	AV
High Channel-2480MHz							
4960	61.22	-3.41	57.81	74	-16.19	H	PK
4960	38.98	-3.41	35.57	54	-18.43	H	AV
7440	58.42	-0.42	58.00	74	-16.00	H	PK
7440	41.07	-0.42	40.65	54	-13.35	H	AV
4960	61.96	-3.41	58.55	74	-15.45	V	PK
4960	39.46	-3.41	36.05	54	-17.95	V	AV
7440	59.50	-0.42	59.08	74	-14.92	V	PK
7440	40.89	-0.42	40.47	54	-13.53	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

8. Out of Band Emissions

8.1 Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

8.2 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.11, the Emissions in nonrestricted frequency bands test method as follows:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

According to the KDB 558074 D01 v05r02 Subclause 8.5 and ANSI C63.10-2013 Subclause 11.12, the Emissions in restricted frequency bands test method as follows:

A. Radiated emission measurements:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement

KDB publication number: 913591 may be used for the radiated bandedge measurements.

B. Antenna-port conducted measurements

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 9.
- b) $VBW \geq [3 \times RBW]$.
- c) Detector = peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

RBW as a function of frequency

Frequency	RBW
9kHz to 150kHz	200Hz to 300Hz
0.15MHz to 30MHz	9kHz to 10kHz
30MHz to 1000MHz	100kHz to 120kHz
>1000MHz	1MHz


If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

8.3 Summary of Test Results/Plots


- Radiated test
- 1Mbps

Test Channel	Low	Polarity:	Vertical(worst case)
--------------	-----	-----------	----------------------

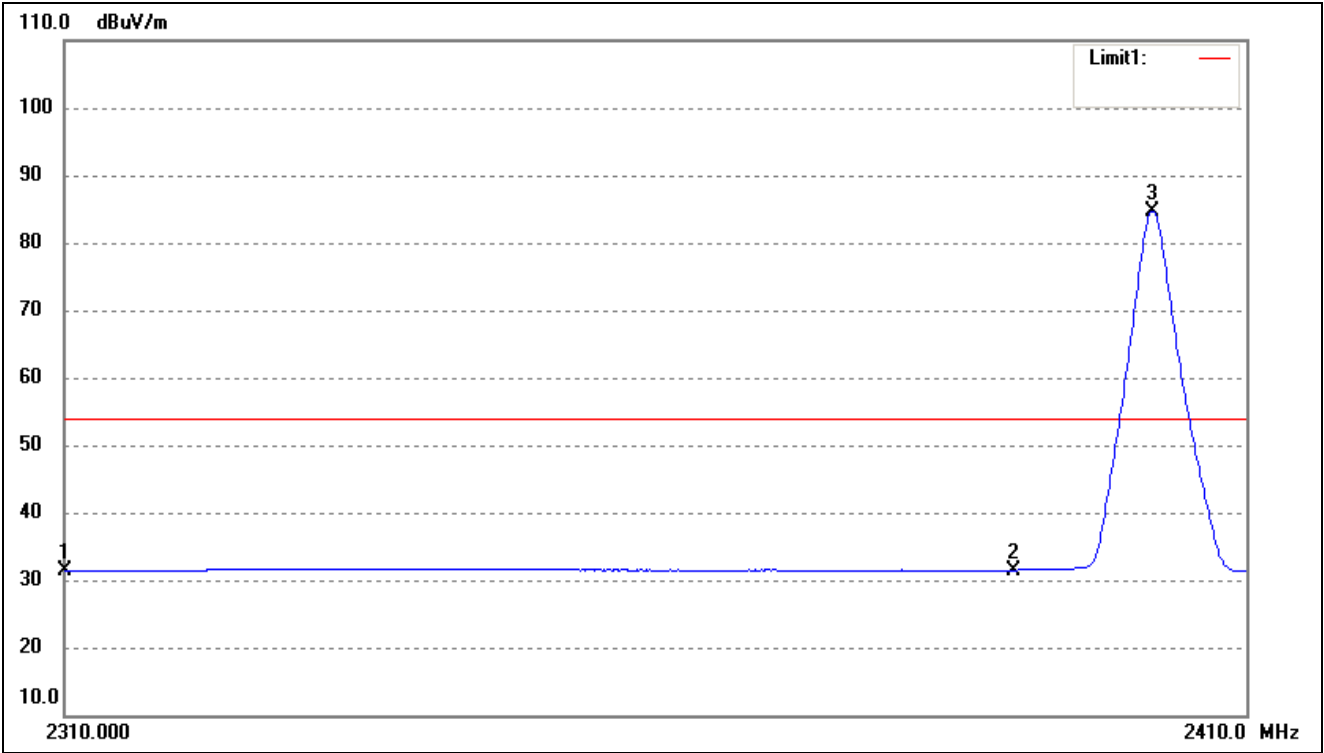

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	41.04	-9.66	31.38	54.00	-22.62	Average Detector
	2310.000	54.77	-9.66	45.11	74.00	-28.89	Peak Detector
2	2390.000	40.96	-9.50	31.46	54.00	-22.54	Average Detector
	2390.000	53.53	-9.50	44.03	74.00	-29.97	Peak Detector
3	2401.945	94.21	-9.47	84.74	/	/	Average Detector
	2402.047	104.04	-9.47	94.57	/	/	Peak Detector


Test Channel	High	Polarity:	Vertical(worst case)
--------------	------	-----------	----------------------

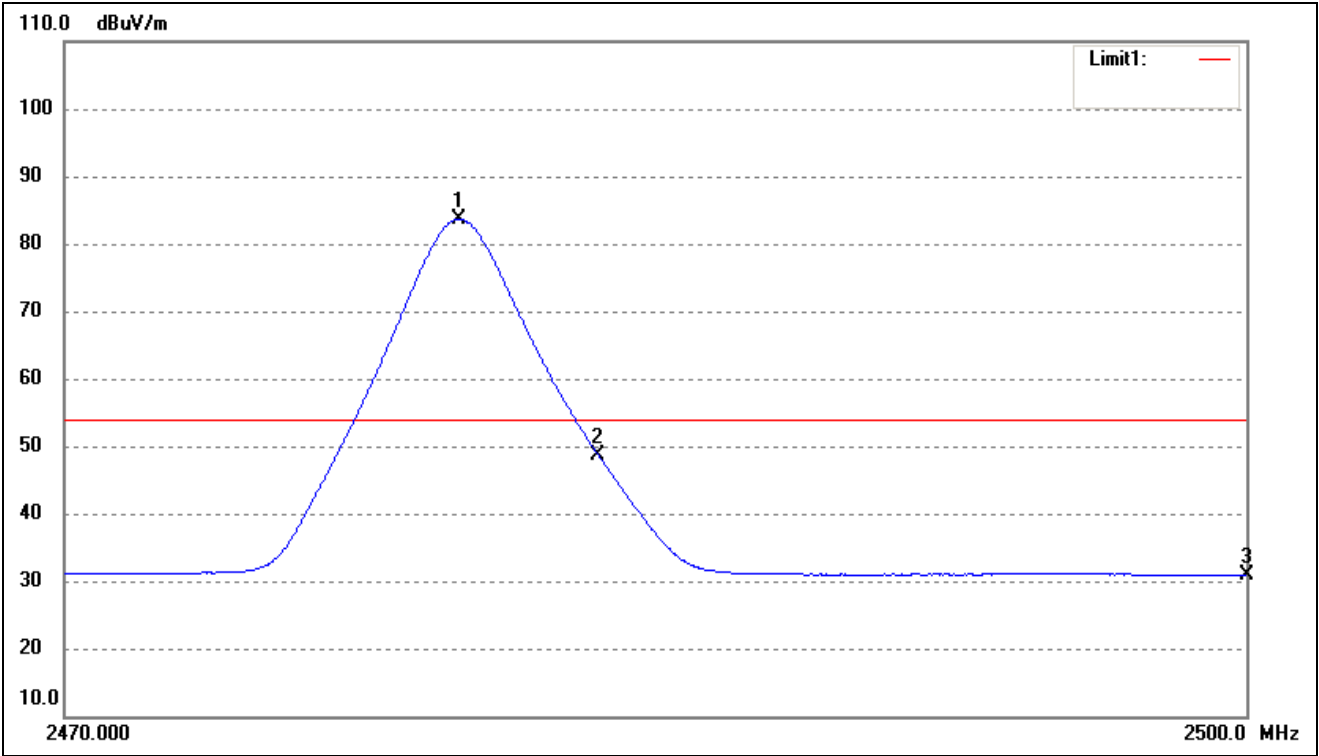

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.980	92.99	-9.32	83.67	/	/	Average Detector
	2480.099	102.91	-9.32	93.59	/	/	Peak Detector
2	2483.500	57.92	-9.31	48.61	54.00	-5.39	Average Detector
	2483.500	64.89	-9.31	55.58	74.00	-18.42	Peak Detector
3	2500.000	40.08	-9.28	30.80	54.00	-23.20	Average Detector
	2500.000	52.39	-9.28	43.11	74.00	-30.89	Peak Detector


➤ 2Mbps

Test Channel	Low	Polarity:	Vertical(worst case)
--------------	-----	-----------	----------------------

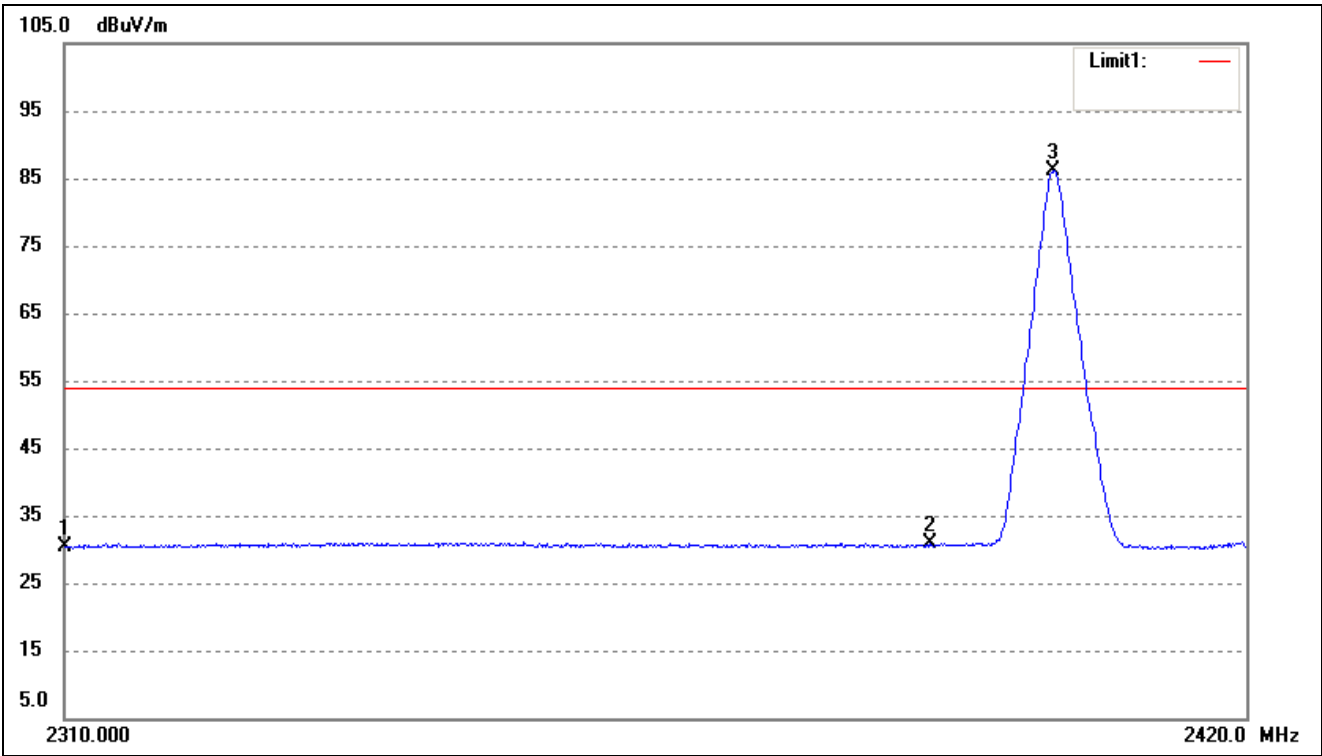

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	40.13	-9.66	30.47	54.00	-23.53	Average Detector
	2310.000	53.78	-9.66	44.12	74.00	-29.88	Peak Detector
2	2390.000	40.33	-9.50	30.83	54.00	-23.17	Average Detector
	2390.000	53.22	-9.50	43.72	74.00	-30.28	Peak Detector
3	2401.719	95.62	-9.48	86.14	/	/	Average Detector
	2402.166	100.45	-9.47	90.98	/	/	Peak Detector

Test Channel	High	Polarity:	Vertical(worst case)
--------------	------	-----------	----------------------

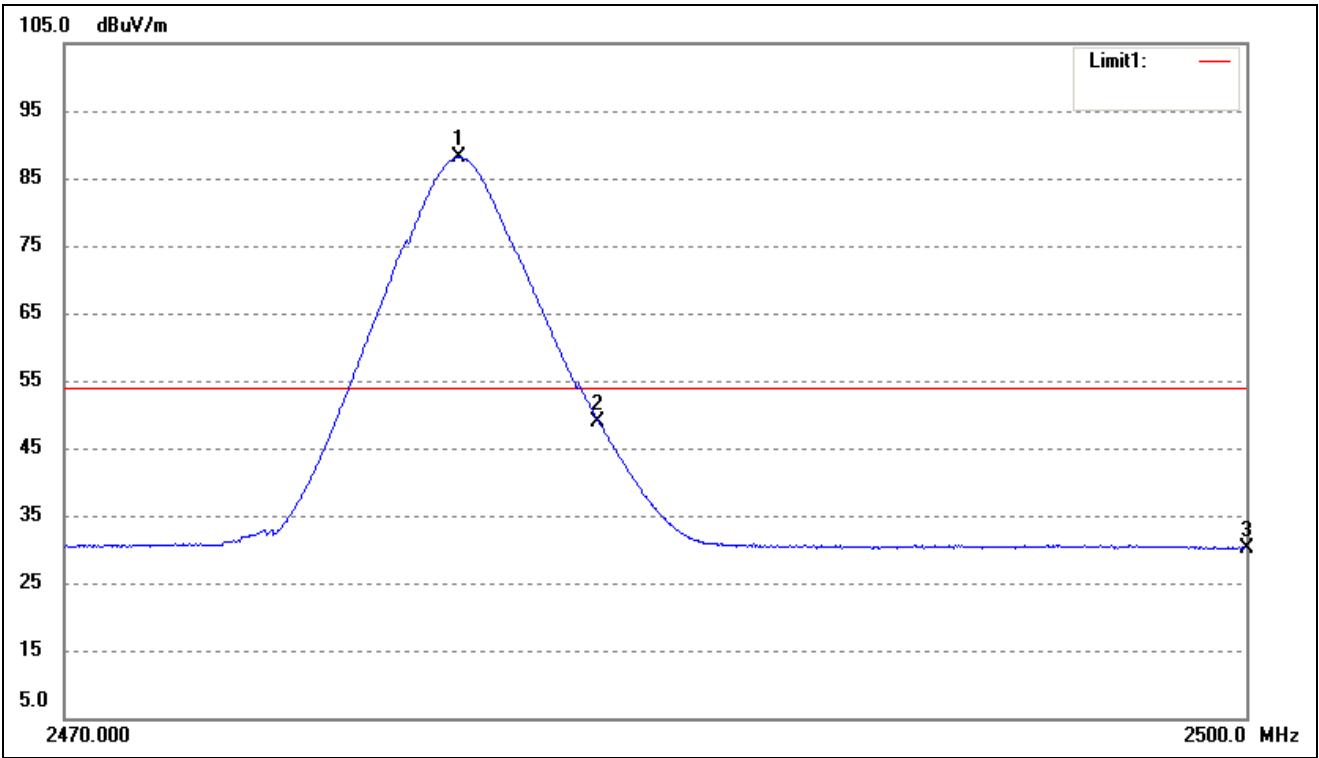

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.950	97.40	-9.32	88.08	/	/	Average Detector
	2480.399	100.55	-9.32	91.23	/	/	Peak Detector
2	2483.500	58.28	-9.31	48.97	54.00	-5.03	Average Detector
	2483.500	65.36	-9.31	56.05	74.00	-17.95	Peak Detector
3	2500.000	39.48	-9.28	30.20	54.00	-23.80	Average Detector
	2500.000	52.76	-9.28	43.48	74.00	-30.52	Peak Detector

➤ Conducted test
Please refer to Appendix D

9. Conducted Emissions


9.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

9.2 Basic Test Setup Block Diagram

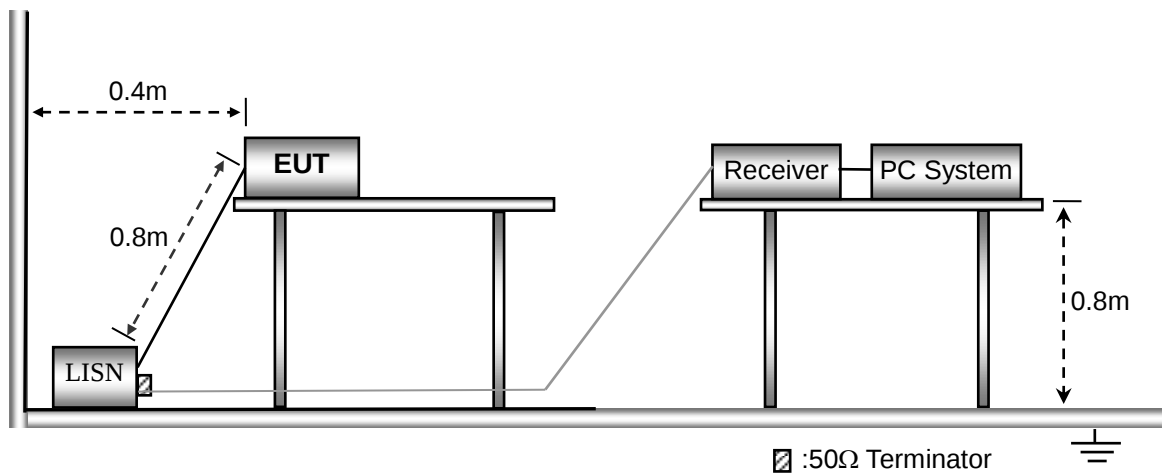


9.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150 kHz
Stop Frequency	30 MHz
Sweep Speed	Auto
IF Bandwidth.....	10 kHz
Quasi-Peak Adapter Bandwidth	9 kHz
Quasi-Peak Adapter Mode	Normal


9.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

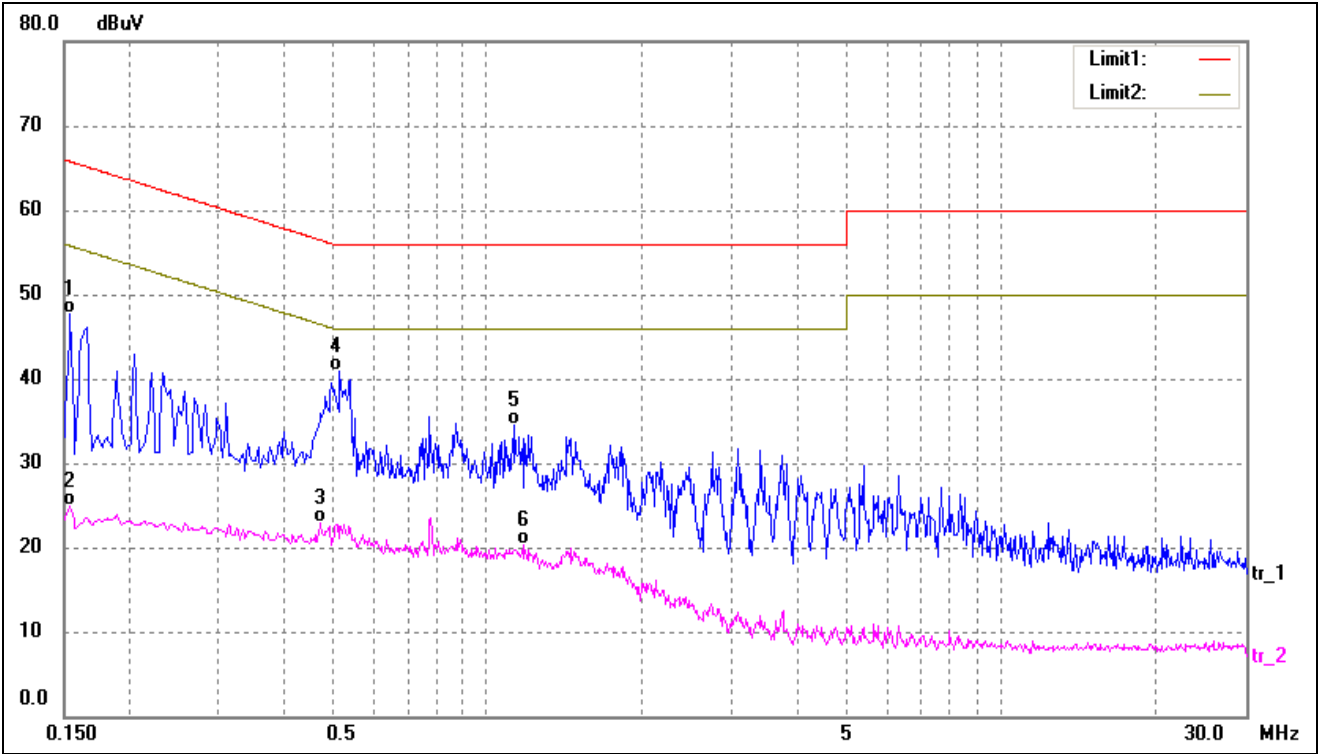

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1539	37.42	10.25	47.67	65.78	-18.11	QP
2	0.1539	14.70	10.25	24.95	55.78	-30.83	AVG
3	0.4740	12.72	10.23	22.95	46.44	-23.49	AVG
4	0.5180	30.59	10.22	40.81	56.00	-15.19	QP
5	1.1300	24.34	10.21	34.55	56.00	-21.45	QP
6	1.1740	10.05	10.22	20.27	46.00	-25.73	AVG

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

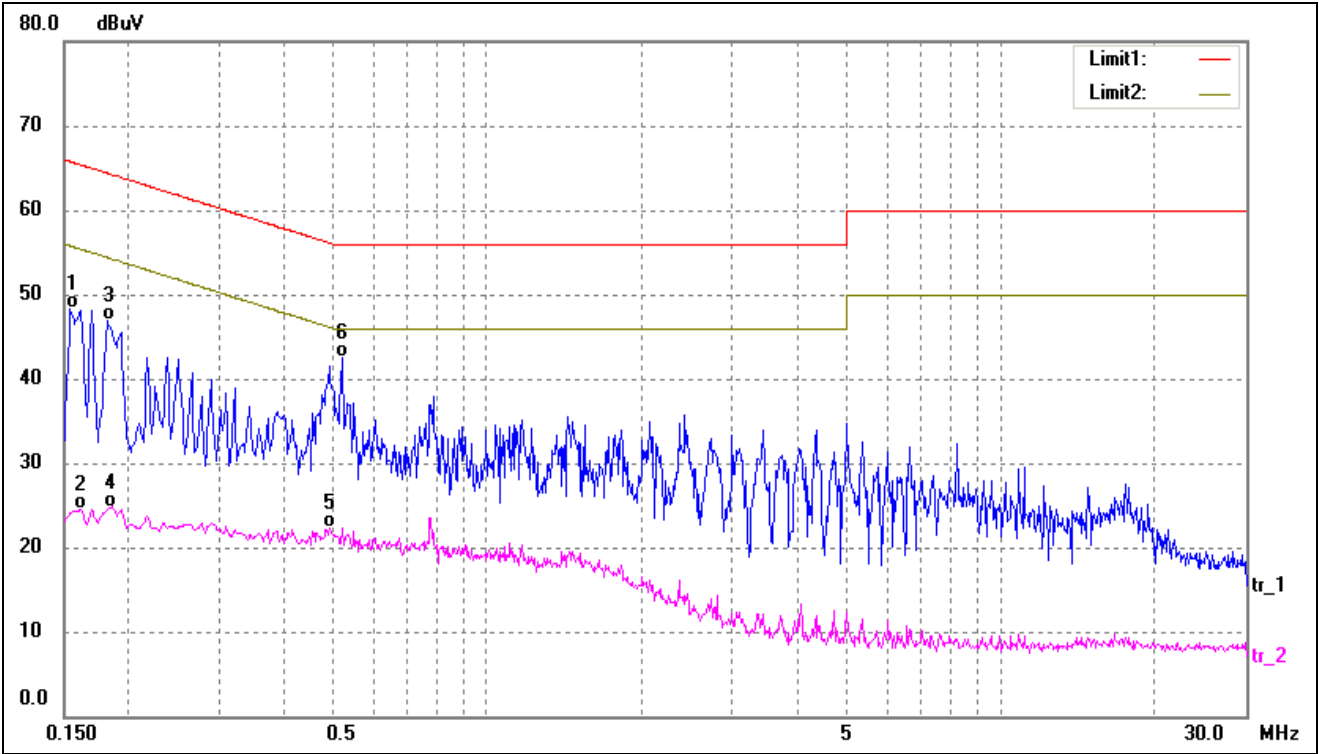

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1539	38.12	10.25	48.37	65.78	-17.41	QP
2	0.1620	14.29	10.26	24.55	55.36	-30.81	AVG
3	0.1819	36.64	10.26	46.90	64.39	-17.49	QP
4	0.1844	14.46	10.26	24.72	54.28	-29.56	AVG
5	0.4940	12.04	10.22	22.26	46.10	-23.84	AVG
6	0.5220	32.33	10.22	42.55	56.00	-13.45	QP

APPENDIX SUMMARY

Project No.	WTX21X01000159W	Test Engineer	Shaw
Start date	2021/1/11	Finish date	2021/1/11
Temperature	23℃	Humidity	54%
RF specifications	BT-BLE		

APPENDIX	Description of Test Item	Result
A	Power Spectral Density	Compliant
B	DTS Bandwidth	Compliant
C	RF Output Power	Compliant
D	Conducted Out of Band Emissions	Compliant

APPENDIX A

Power Spectral Density			
Test Mode	Test Channel	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
BLE(1Mbps)	Low	-16.06	8
	Middle	-15.57	8
	High	-15.42	8
BLE(2Mbps)	Low	-19.58	8
	Middle	-19.25	8
	High	-18.50	8




BLE(1Mbps)-Low	Agilent R T Ref 10 dBm Atten 20 dB Mkr1 2.4020015 GHz -16.06 dBm #Peak Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.402001500 GHz -16.06 dBm Center 2.402 GHz Span 1.5 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 171.5 ms (1001 pts) Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
BLE(1Mbps)-Middle	Agilent R T Ref 10 dBm Atten 20 dB Mkr1 2.4400165 GHz -15.57 dBm #Peak Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Center 2.44 GHz Span 1.5 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 171.5 ms (1001 pts) Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
BLE(1Mbps)-High	Agilent R T Ref 10 dBm Atten 20 dB Mkr1 2.4800030 GHz -15.42 dBm #Peak Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.480003000 GHz -15.42 dBm Center 2.48 GHz Span 1.5 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 171.5 ms (1001 pts) Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2

BLE(2Mbps)-Low	Agilent R T Ref 10 dBm Atten 20 dB Mkr1 2.402030 GHz -19.58 dBm #Peak Log 10 dB/ Offset 1 dB M1 S2 S3 FC AA Marker 2.402030000 GHz -19.58 dBm Center 2.402 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 343.1 ms (1001 pts) Span 3 MHz Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
BLE(2Mbps)-Middle	Agilent R T Ref 10 dBm Atten 20 dB Mkr1 2.440000 GHz -19.25 dBm #Peak Log 10 dB/ Offset 1 dB M1 S2 S3 FC AA Center 2.44 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 343.1 ms (1001 pts) Span 3 MHz Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
BLE(2Mbps)-High	Agilent R T Ref 10 dBm Atten 20 dB Mkr1 2.479973 GHz -18.5 dBm #Peak Log 10 dB/ Offset 1 dB M1 S2 S3 FC AA Marker 2.479973000 GHz -18.5 dBm Center 2.48 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 343.1 ms (1001 pts) Span 3 MHz Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2

APPENDIX B




Test Mode	Test Channel	6 dB Bandwidth kHz	Limit kHz
BLE(1Mbps)	Low	720.515	≥ 500
	Middle	714.101	≥ 500
	High	709.216	≥ 500
BLE(2Mbps)	Low	1201	≥ 500
	Middle	1177	≥ 500
	High	1197	≥ 500

BLE(1Mbps)-High

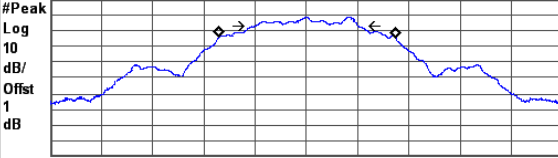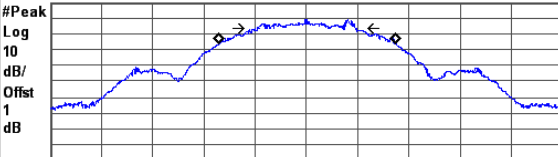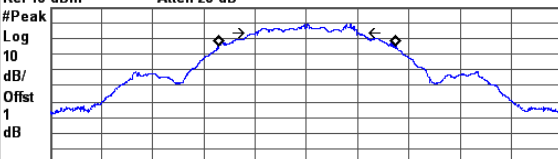BLE(2Mbps)-Low	Agilent R T Ch Freq 2.402 GHz Trig Free Occupied Bandwidth Ref 10 dBm Atten 20 dB #Peak Log 10 dB/ Offset 1 dB  Center 2.402 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 6 MHz Occupied Bandwidth 2.0664 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 4.172 kHz x dB Bandwidth 1.201 MHz Span Span 6.00000000 MHz Span Zoom Full Span Zero Span Last Span Zone ▶
BLE(2Mbps)-Middle	Agilent R T Ch Freq 2.44 GHz Trig Free Occupied Bandwidth Center 2.44000000 GHz Ref 10 dBm Atten 20 dB #Peak Log 10 dB/ Offset 1 dB  Center 2.44 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 6 MHz Occupied Bandwidth 2.0648 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 4.825 kHz x dB Bandwidth 1.177 MHz Freq/Channel Center Freq 2.44000000 GHz Start Freq 2.43700000 GHz Stop Freq 2.44300000 GHz CF Step 600.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
BLE(2Mbps)-High	Agilent R T Ch Freq 2.48 GHz Trig Free Occupied Bandwidth Center 2.48000000 GHz Ref 10 dBm Atten 20 dB #Peak Log 10 dB/ Offset 1 dB  Center 2.48 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 6 MHz Occupied Bandwidth 2.0650 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 2.916 kHz x dB Bandwidth 1.197 MHz Freq/Channel Center Freq 2.48000000 GHz Start Freq 2.47700000 GHz Stop Freq 2.48300000 GHz CF Step 600.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin

APPENDIX C




RF Output Power			
Test Mode	Test Channel	Reading dBm	Limit dBm
BLE(1Mbps)	Low	-0.425	30.00
	Middle	-0.067	30.00
	High	0.107	30.00
BLE(2Mbps)	Low	-0.292	30.00
	Middle	0.099	30.00
	High	0.236	30.00

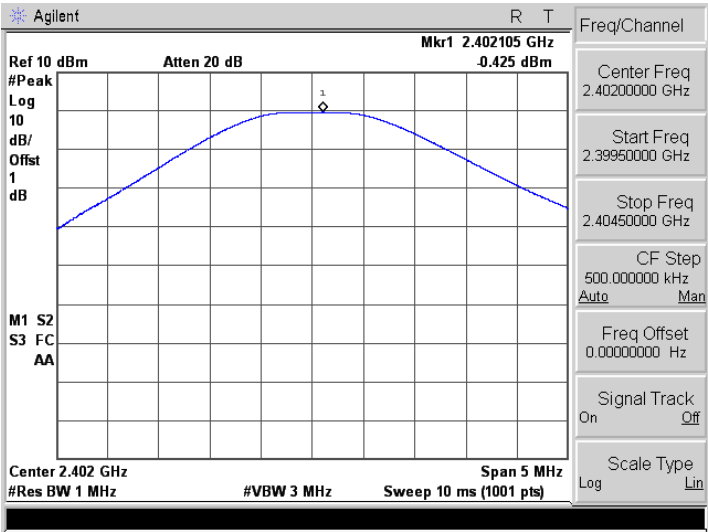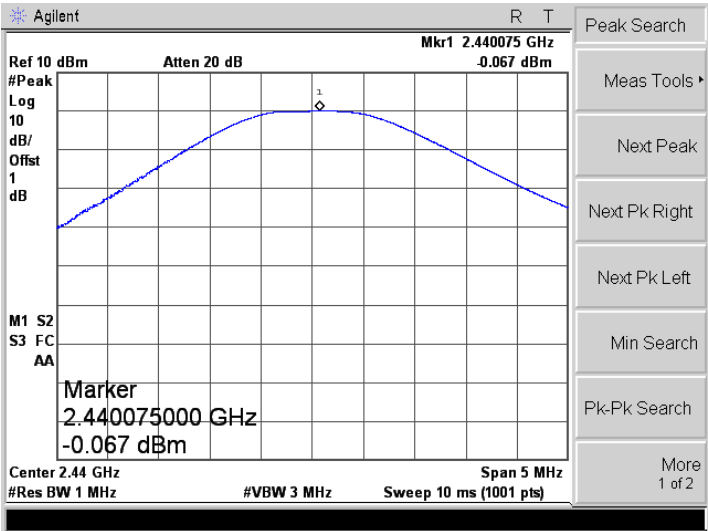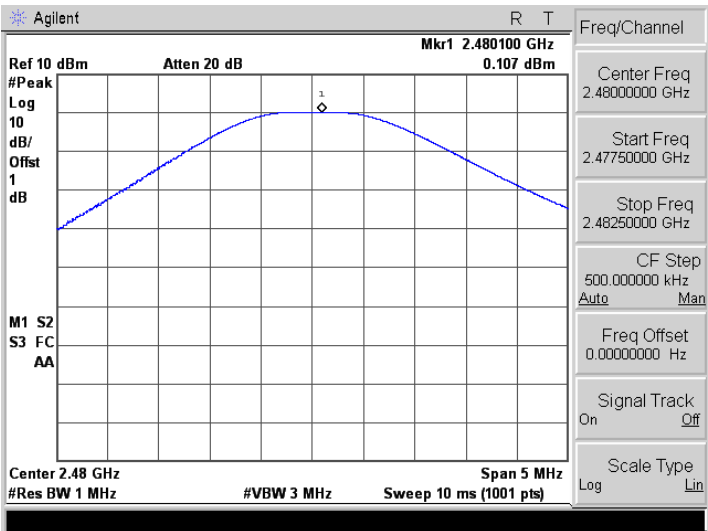
BLE(1Mbps)-Low	
BLE(1Mbps)-Middle	
BLE(1Mbps)-High	

BLE(2Mbps)-Low	Agilent R T Ref 10 dBm Atten 20 dB Mkr1 2.40217 GHz -0.292 dBm #Peak Log 10 dB/ Offset 1 dB M1 S2 S3 FC AA Marker 2.402170000 GHz -0.292 dBm Center 2.402 GHz #Res BW 3 MHz #VBW 3 MHz Sweep 10 ms (1001 pts) Span 10 MHz Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
BLE(2Mbps)-Middle	Agilent R T Ref 10 dBm Atten 20 dB Mkr1 2.44016 GHz 0.099 dBm #Peak Log 10 dB/ Offset 1 dB M1 S2 S3 FC AA Marker 2.440160000 GHz 0.099 dBm Center 2.44 GHz #Res BW 3 MHz #VBW 3 MHz Sweep 10 ms (1001 pts) Span 10 MHz Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
BLE(2Mbps)-High	Agilent R T Ref 10 dBm Atten 20 dB Mkr1 2.48011 GHz 0.236 dBm #Peak Log 10 dB/ Offset 1 dB M1 S2 S3 FC AA Marker 2.480110000 GHz 0.236 dBm Center 2.48 GHz #Res BW 3 MHz #VBW 3 MHz Sweep 10 ms (1001 pts) Span 10 MHz Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2


APPENDIX D

Conducted Out of Band Emissions

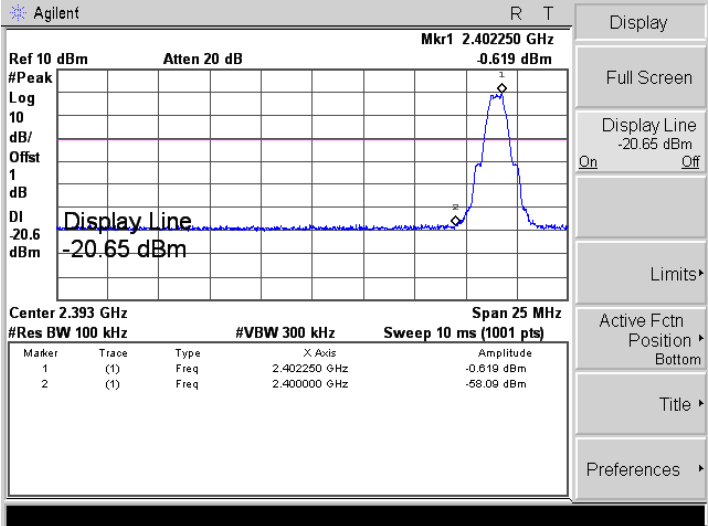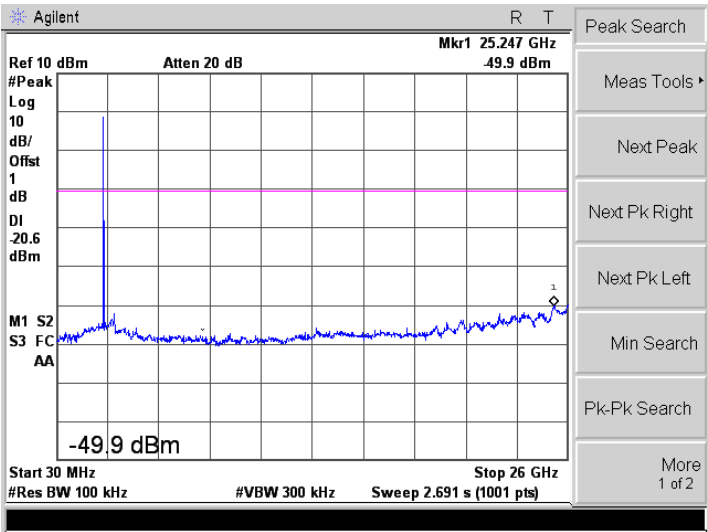
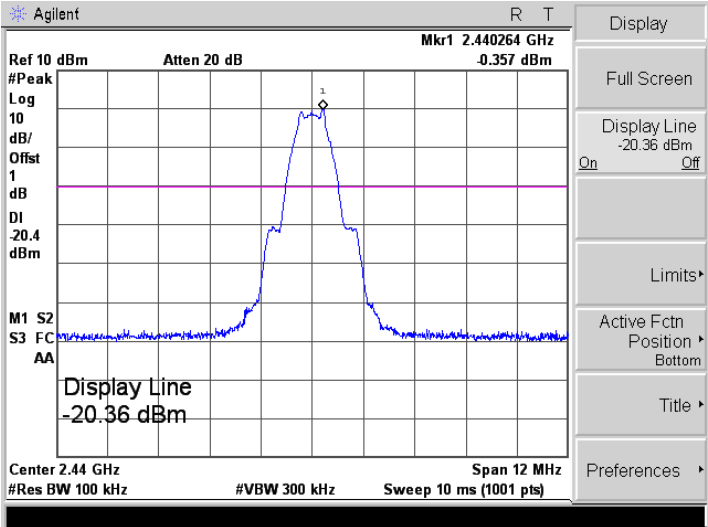
BLE(1Mbps)-Low	
	
BLE(1Mbps)-Middle	

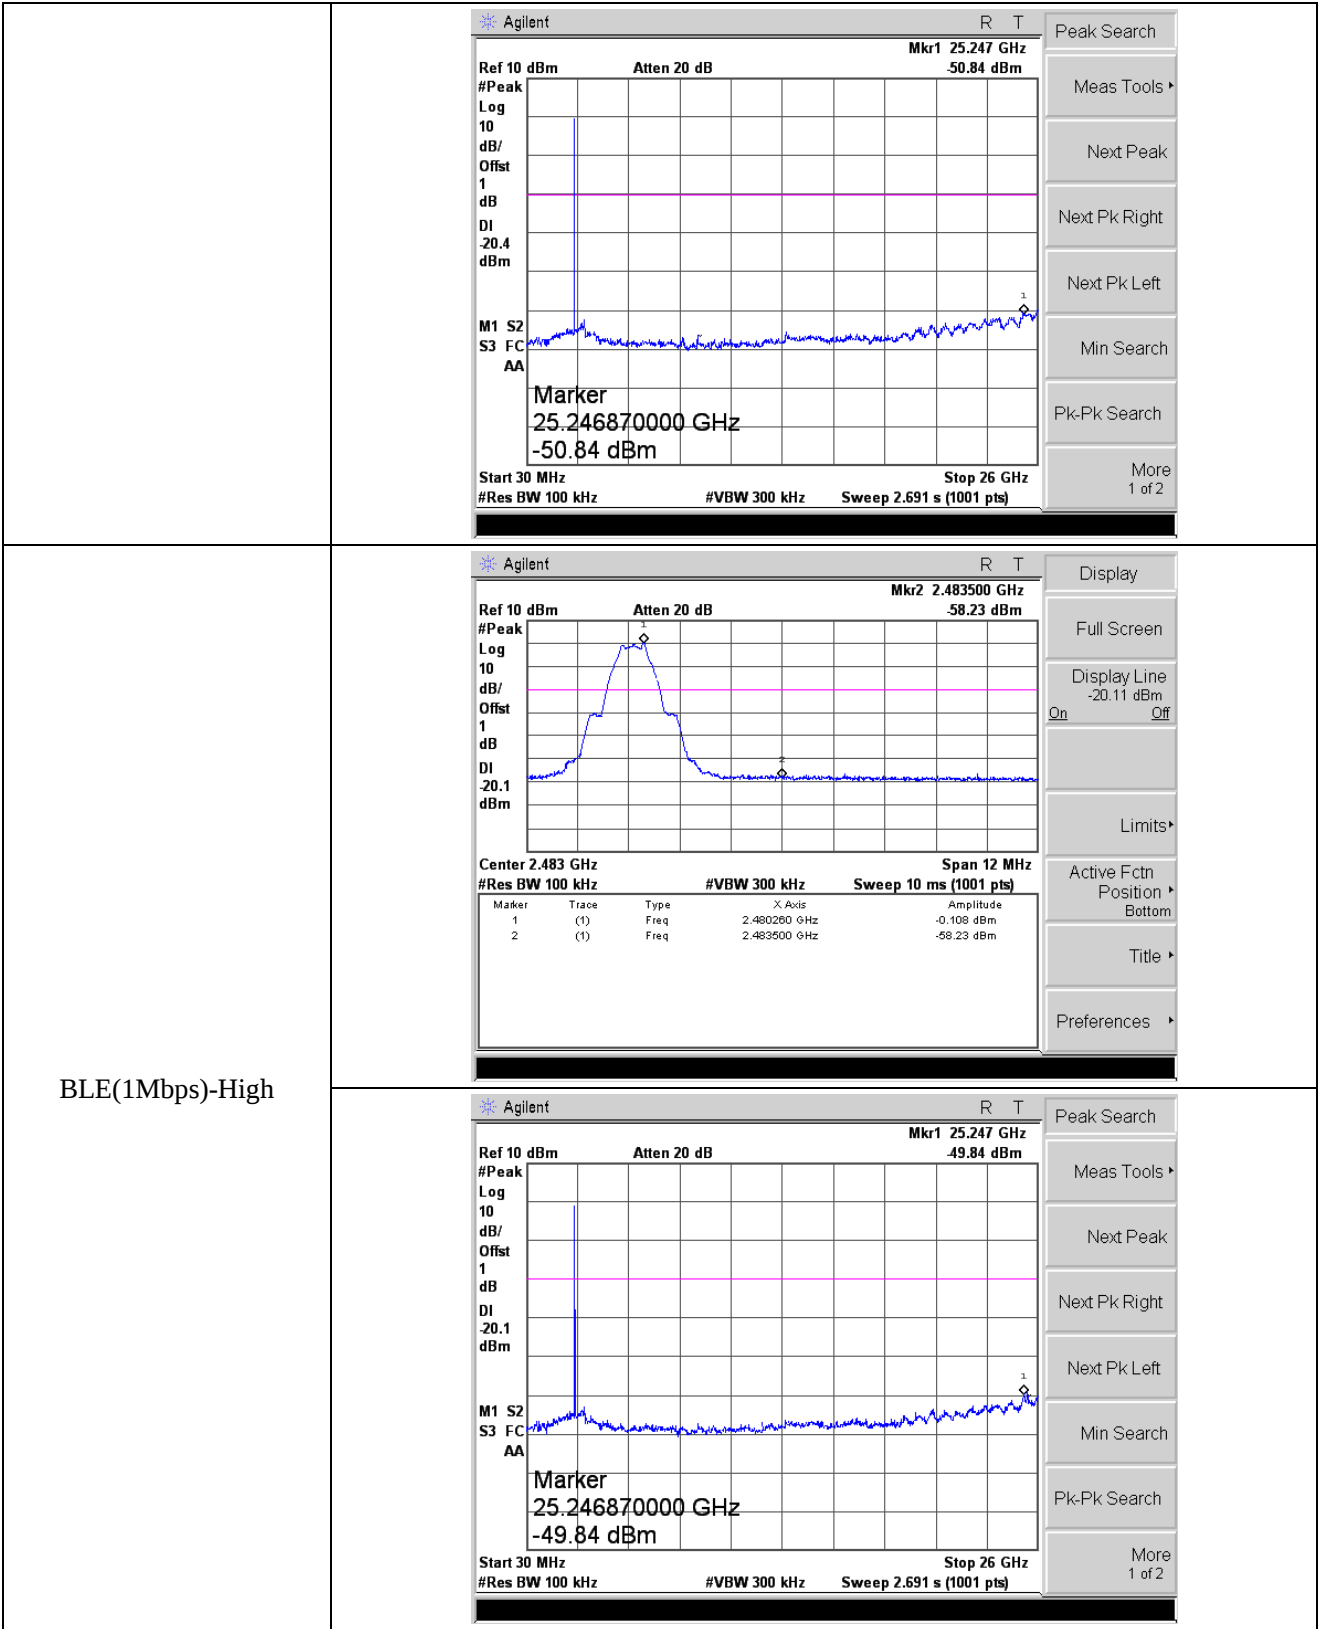


BLE(2Mbps)-Low

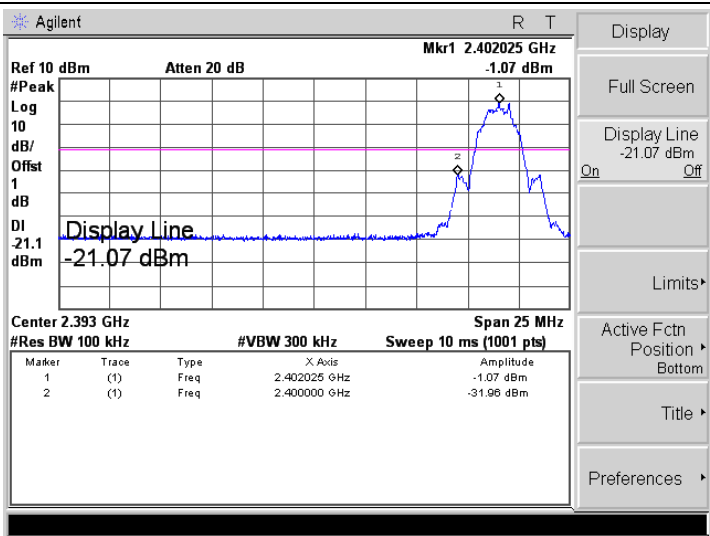

BLE(2Mbps)-Middle

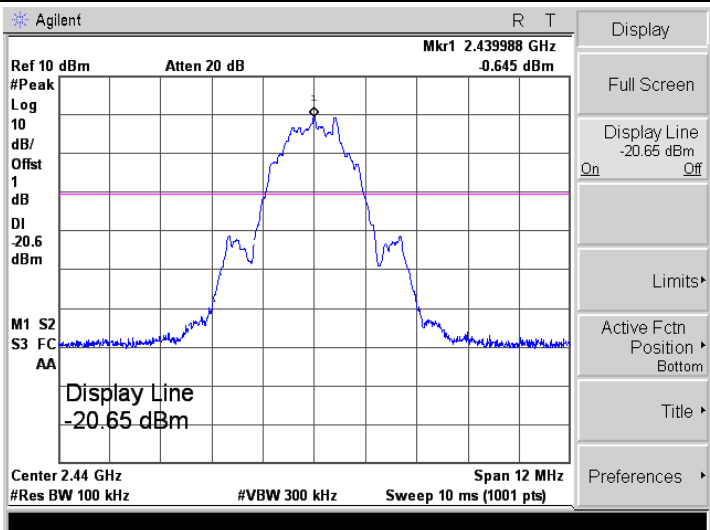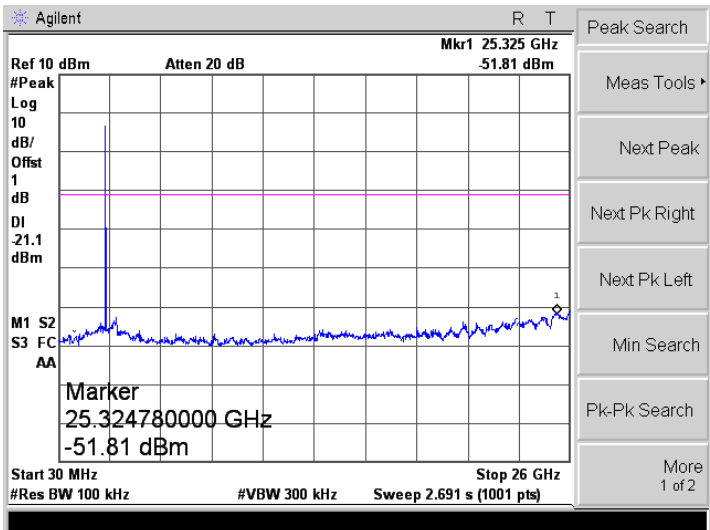

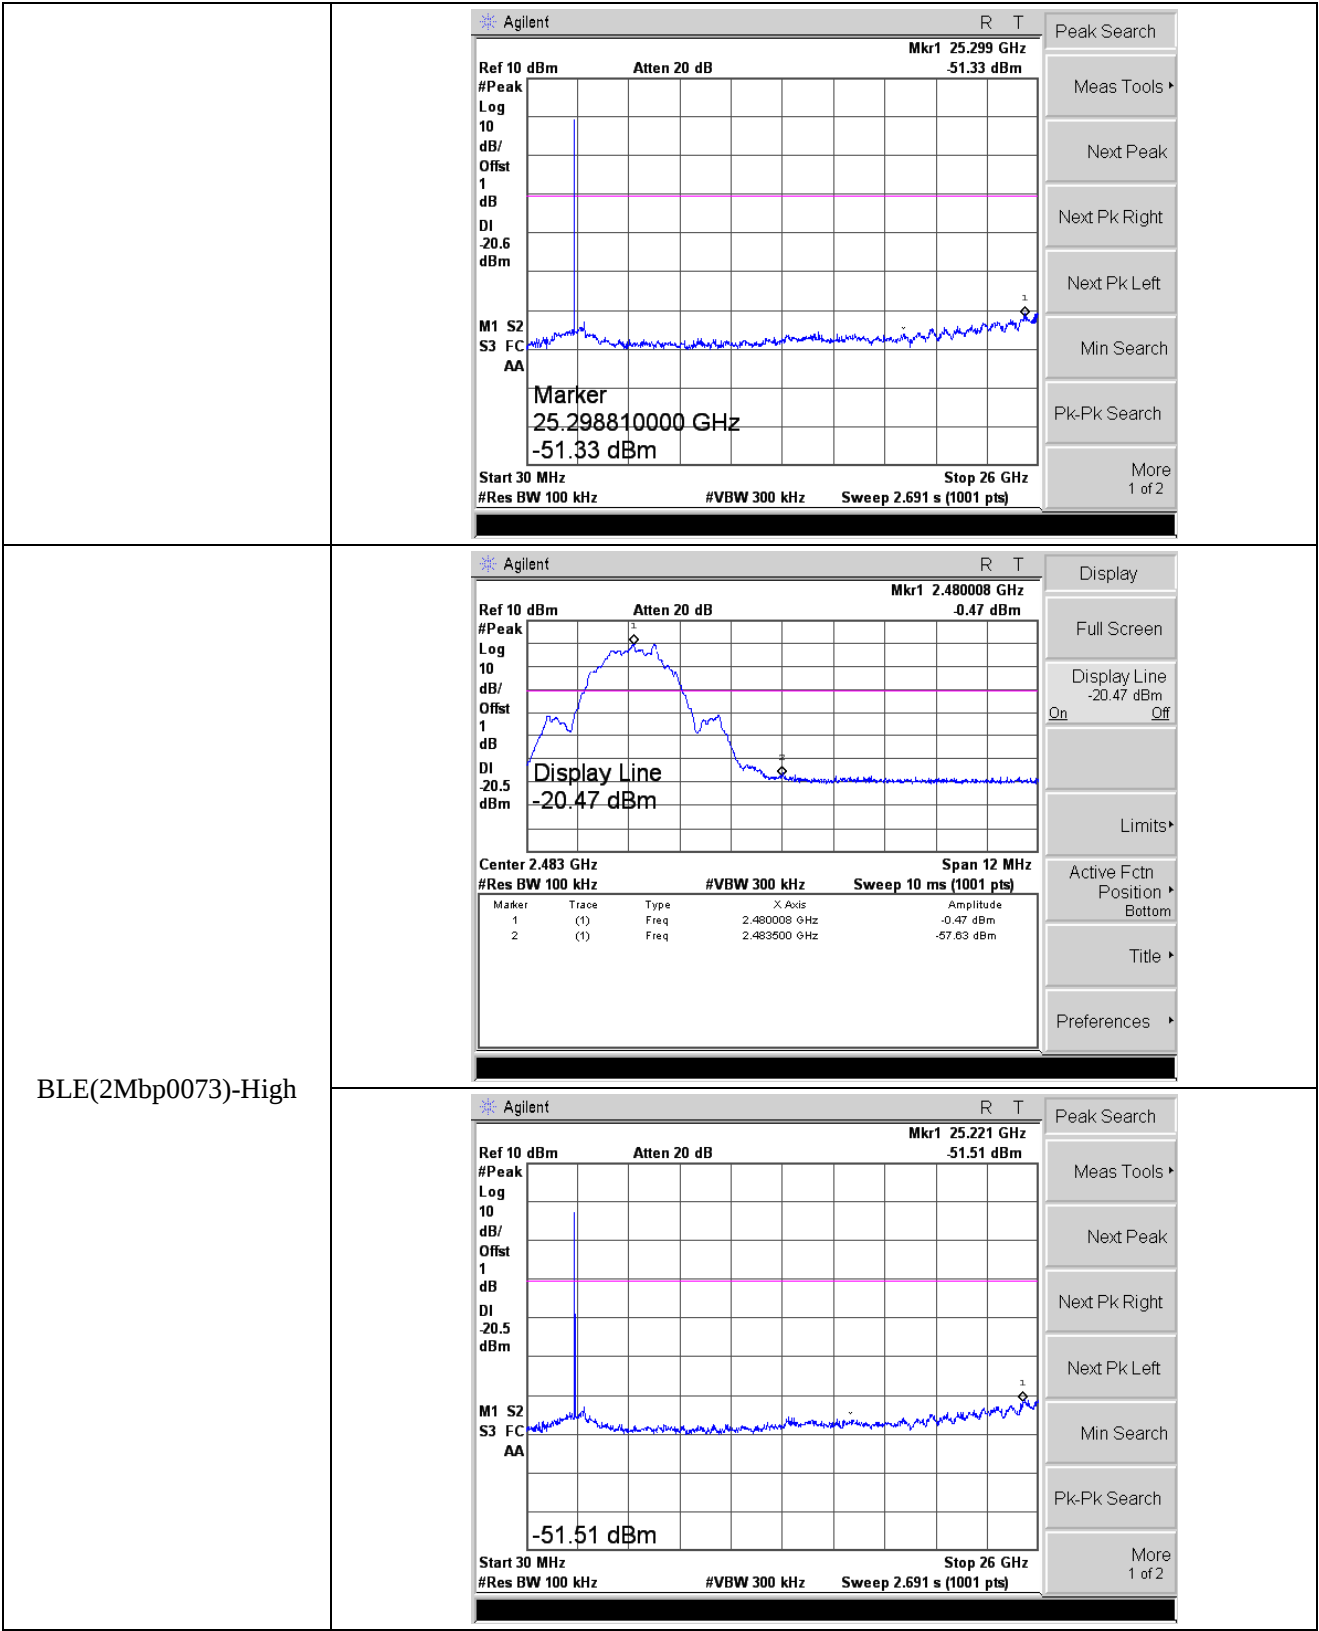

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

******* END OF REPORT *******