


7.4.3 Test Mode: Mode 3 TX- WLAN CH06 (2437 MHz)

- Test Distance : 3 m
- Temperature : 26 °C
- Relative Humidity :53 %
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

■ The test that passed at minimum margin was marked by the frame in the following table.

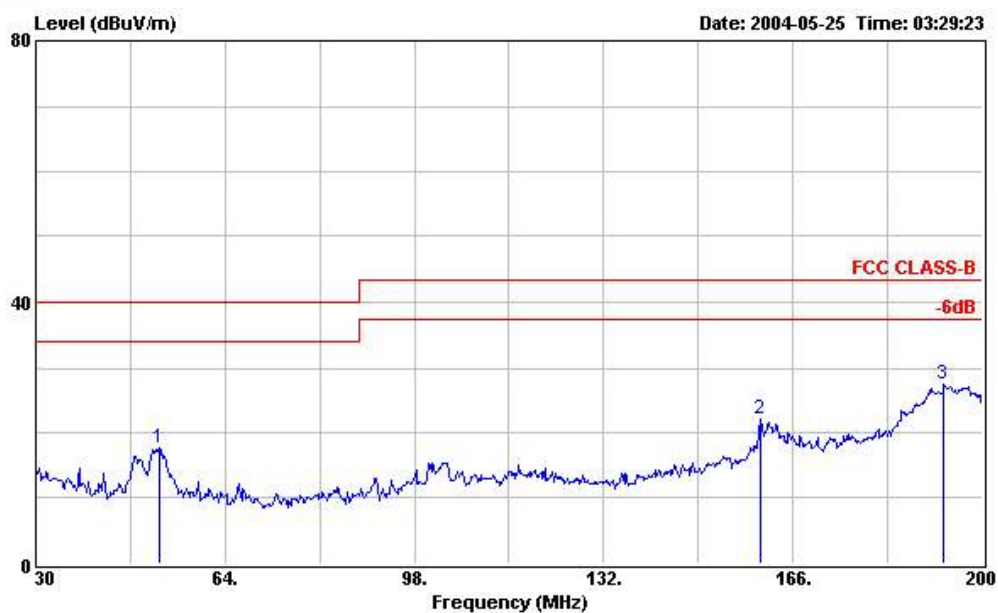


Site : 03CH03-HY
 Condition : FCC CLASS-B 3m BIC-9124--301 HORIZONTAL
 EUT
 Power : 120V/60Hz
 Model
 Memo : WLAN TX CH06 2437MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	52.270	17.78	-22.22	40.00	34.42	10.13	1.22	27.99	Peak	---	---
2	160.220	22.16	-21.34	43.50	34.93	12.70	2.31	27.78	Peak	---	---
3	193.030	27.42	-16.08	43.50	38.00	14.64	2.49	27.71	Peak	---	---


FCC TEST REPORT

Report No. :F451503

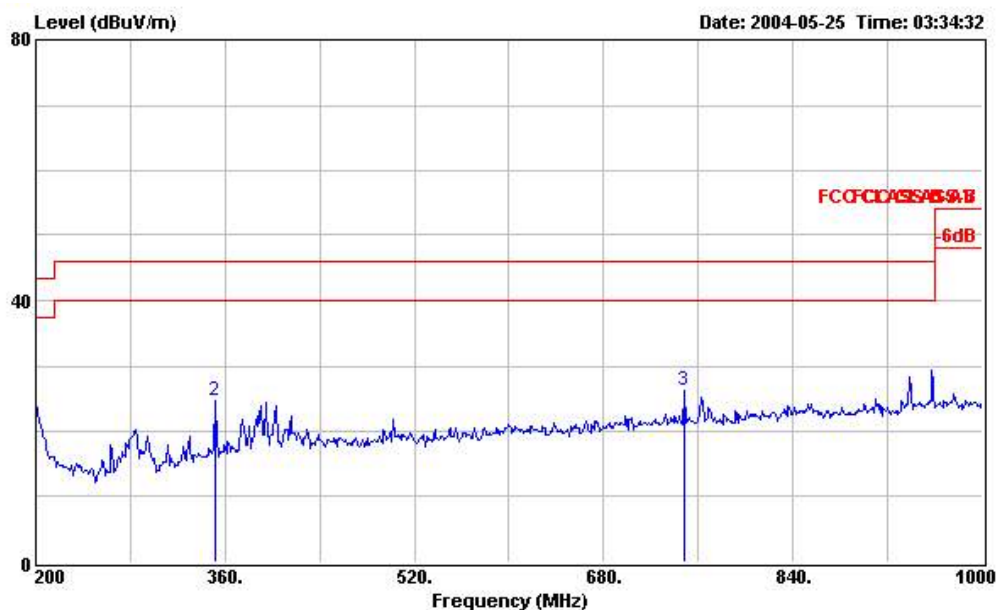


Site : 03CH03-HY
 Condition : FCC CLASS-B 3m LOG-9111-221 HORIZONTAL
 EUT :
 Power : 120V/60Hz
 Model :
 Memo : WLAN TX CH06 2437MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	200.000	23.87	-19.63	43.50	33.61	15.39	2.57	27.70	Peak	---	---
2	352.000	24.73	-21.27	46.00	33.76	15.26	3.27	27.56	Peak	---	---
3	748.800	26.23	-19.77	46.00	30.14	20.00	4.84	28.75	Peak	---	---

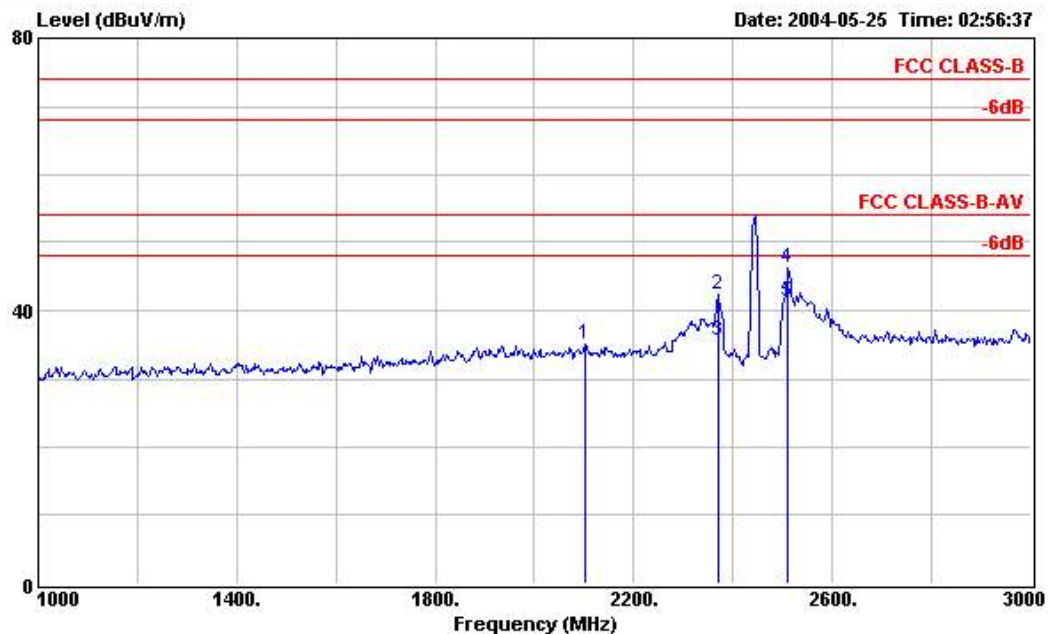


Site : 03CH03-HY
 Condition : FCC CLASS-B 3m HORN-ANT-6741 HORIZONTAL
 EUT
 Power : 120V/60Hz
 Model
 Memo : WLAN TX CH06 2437MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2102.000	35.12	-38.88	74.00	46.80	27.62	1.67	40.97	Peak	---	---
2	2372.000	42.21	-31.79	74.00	53.48	28.16	1.70	41.13	Peak	---	---
3	2372.000	35.52	-18.48	54.00	46.79	28.16	1.70	41.13	Average	---	---
4	2510.000	46.14	-27.86	74.00	57.01	28.47	1.86	41.20	Peak	---	---
5	2510.000	41.28	-12.72	54.00	52.15	28.47	1.86	41.20	Average	---	---

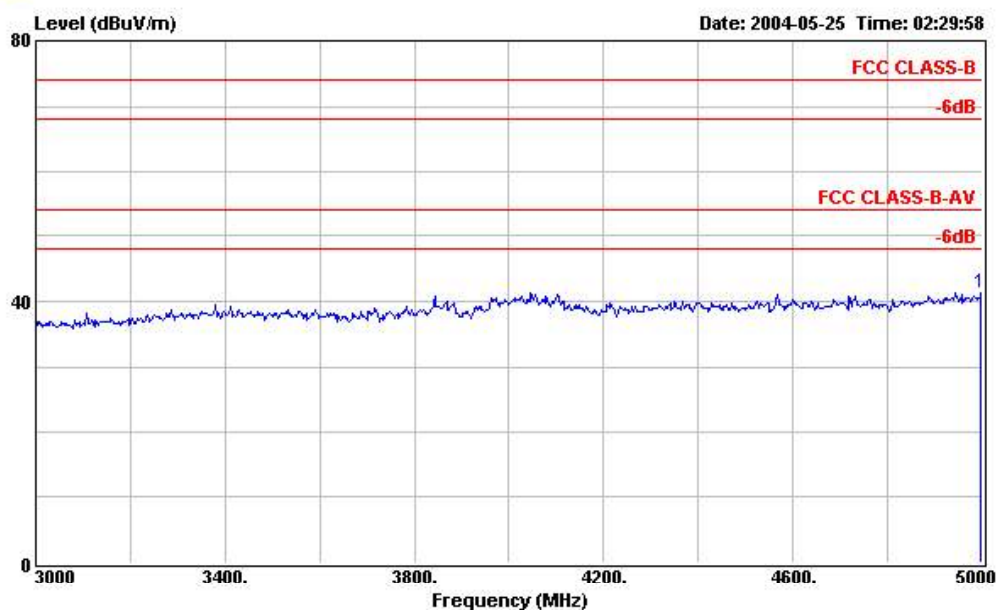


Site : 03CH03-HY
Condition : FCC CLASS-B 3m HORN-ANT-6741 HORIZONTAL
EUT :
Power : 120V/60Hz
Model :
Memo : WLAN TX CH06 2437MHz

	Freq	Level	Over	Limit	Read	Probe	Cable	Preamp	Remark	Ant	Table
			Limit	Line							
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	4998.000	41.34	-32.66	74.00	47.91	33.40	2.63	42.60	Peak	---	---

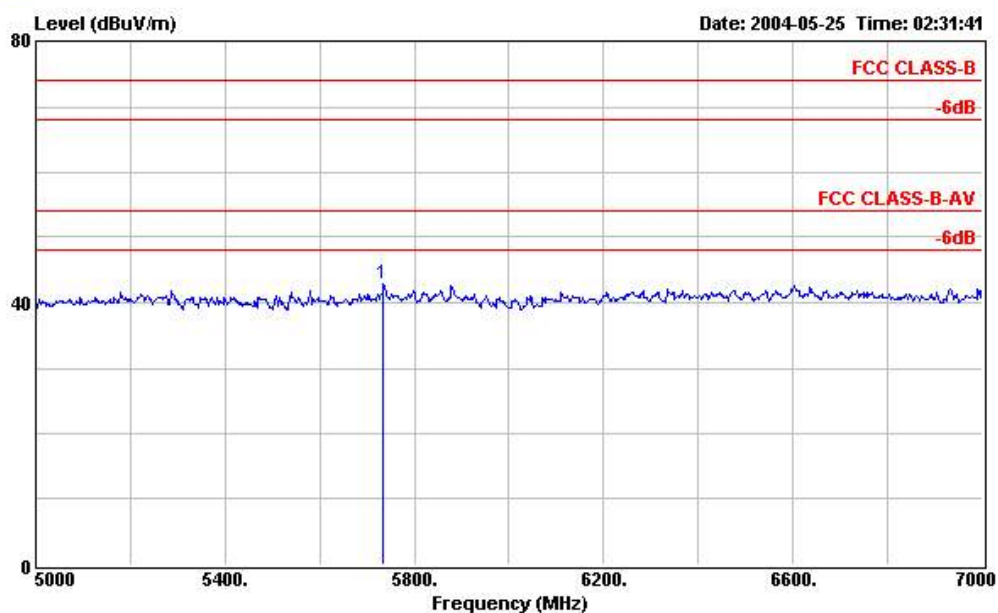


Site : 03CH03-HY
 Condition : FCC CLASS-B 3m HORN-ANT-6741 HORIZONTAL
 EUT :
 Power : 120V/60Hz
 Model :
 Memo : WLAN TX CH06 2437MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	5734.000	42.94	-31.06	74.00	49.38	34.10	2.66	43.20	Peak	---	---

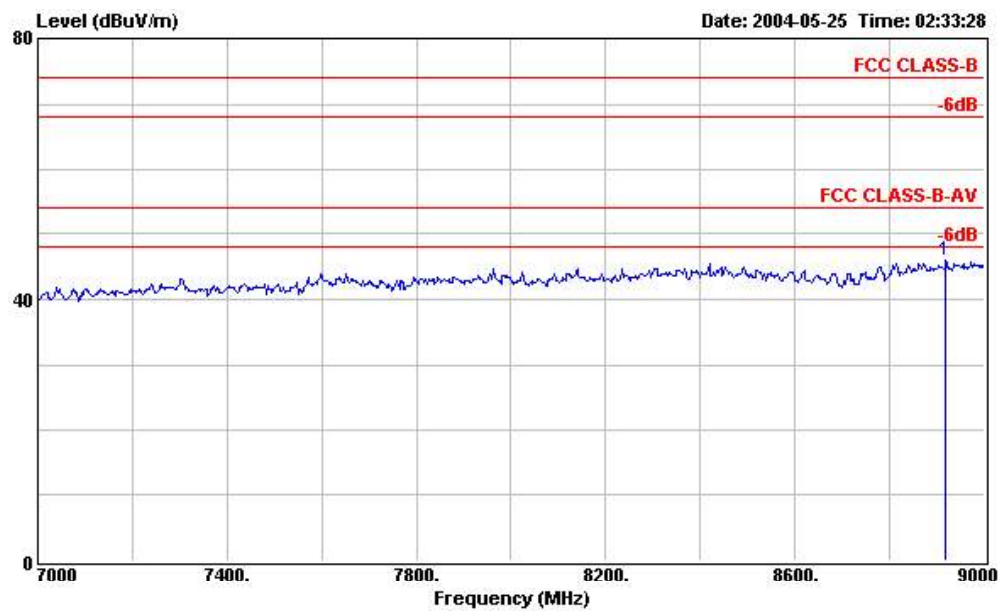


Site : 03CH03-HY
 Condition : FCC CLASS-B 3m HORN-ANT-6741 HORIZONTAL
 EUT :
 Power : 120V/60Hz
 Model :
 Memo : WLAN TX CH06 2437MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	8918.000	46.00	-28.00	74.00	45.68	38.07	3.25	41.00	Peak	---	---

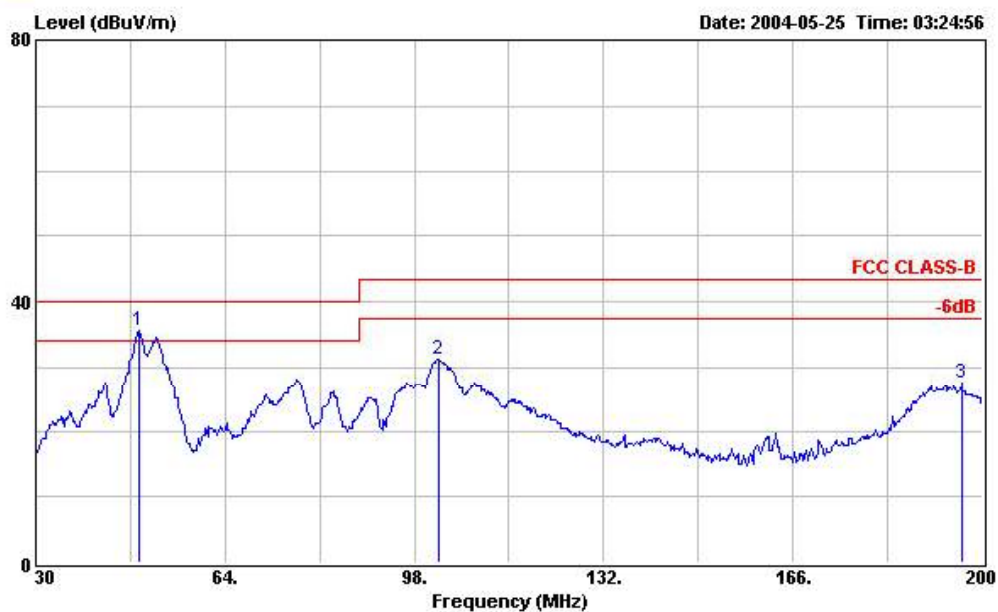


Site : 03CH03-HY
 Condition : FCC CLASS-B 3m BIC-9124--301 VERTICAL
 EUT :
 Power : 120V/60Hz
 Model :
 Memo : WLAN TX CH06 2437MHz

	Freq	Level	Over	Limit	Read	Probe	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	48.700	35.71	-4.29	40.00	52.32	10.22	1.17	28.00	Peak	---	---
2	102.420	31.16	-12.34	43.50	47.29	9.95	1.81	27.89	Peak	---	---
3	196.260	27.65	-15.85	43.50	38.11	14.72	2.53	27.71	Peak	---	---

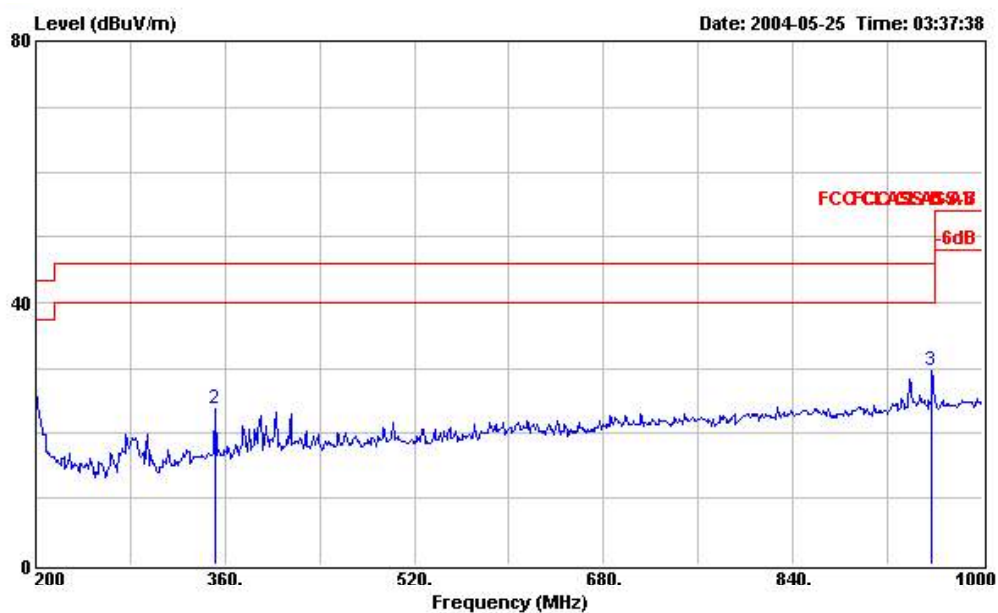


Site : 03CH03-HY
 Condition : FCC CLASS-B 3m LOG-9111-221 VERTICAL
 EUT
 Power : 120V/60Hz
 Model
 Memo : WLAN TX CH06 2437MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	200.000	25.90	-17.60	43.50	35.64	15.39	2.57	27.70	Peak	---	---
2	352.000	23.71	-22.29	46.00	32.74	15.26	3.27	27.56	Peak	---	---
3	957.600	29.50	-16.50	46.00	30.19	21.90	5.65	28.24	Peak	---	---

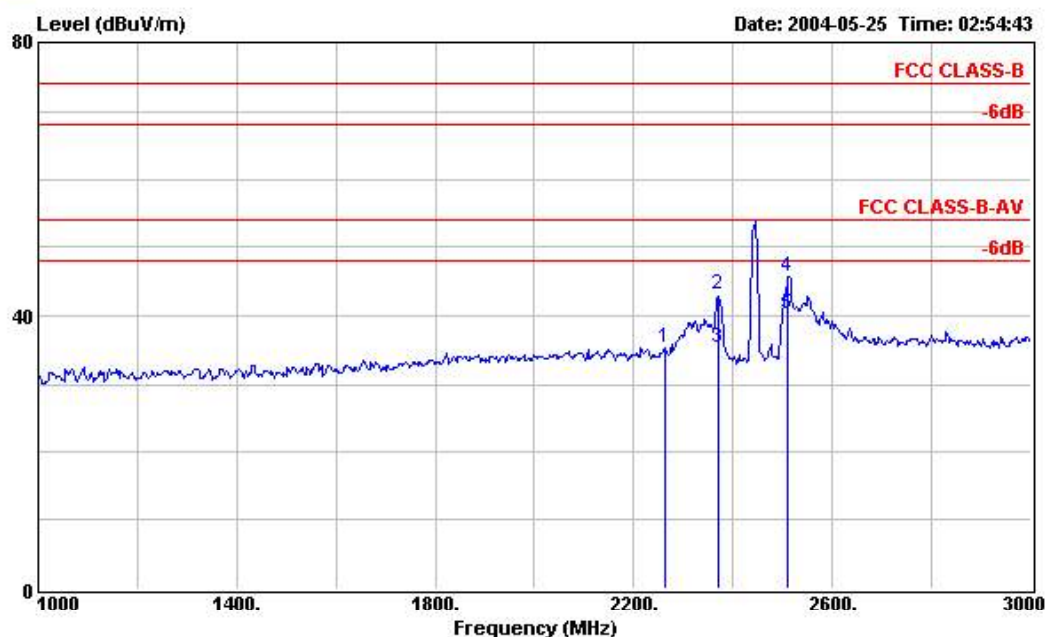


Site : 03CH03-HY
 Condition : FCC CLASS-B 3m HORN-ANT-6741 VERTICAL
 EUT :
 Power : 120V/60Hz
 Model :
 Memo : WLAN TX CH06 2437MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2262.000	35.28	-38.72	74.00	46.67	27.94	1.73	41.06	Peak	---	---
2	2372.000	42.99	-31.01	74.00	54.26	28.16	1.70	41.13	Peak	---	---
3	2372.000	35.43	-18.57	54.00	46.70	28.16	1.70	41.13	Average	---	---
4	2510.000	45.79	-28.21	74.00	56.66	28.47	1.86	41.20	Peak	---	---
5	2510.000	40.38	-13.62	54.00	51.25	28.47	1.86	41.20	Average	---	---

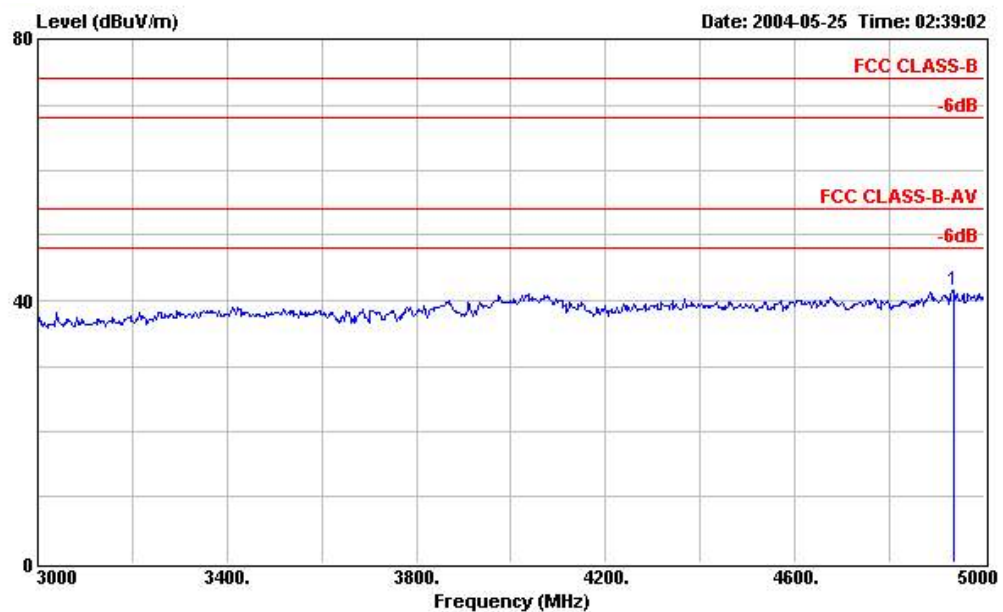


Site : 03CH03-HY
Condition : FCC CLASS-B 3m HORN-ANT-6741 VERTICAL
EUT
Power : 120V/60Hz
Model
Memo : WLAN TX CH06 2437MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	4934.000	41.55	-32.45	74.00	48.32	33.29	2.46	42.52	Peak	---	---

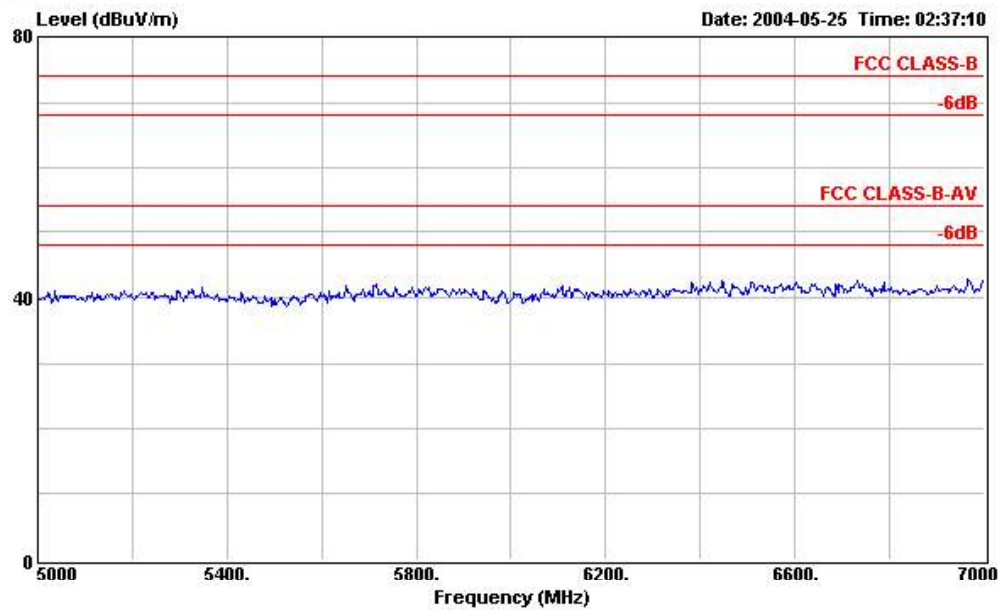

Site : 03CH03-HY
Condition : FCC CLASS-B 3m HORN-ANT-6741 VERTICAL
EUT
Power : 120W/60Hz
Model
Memo : WLAN TX CH06 2437MHz

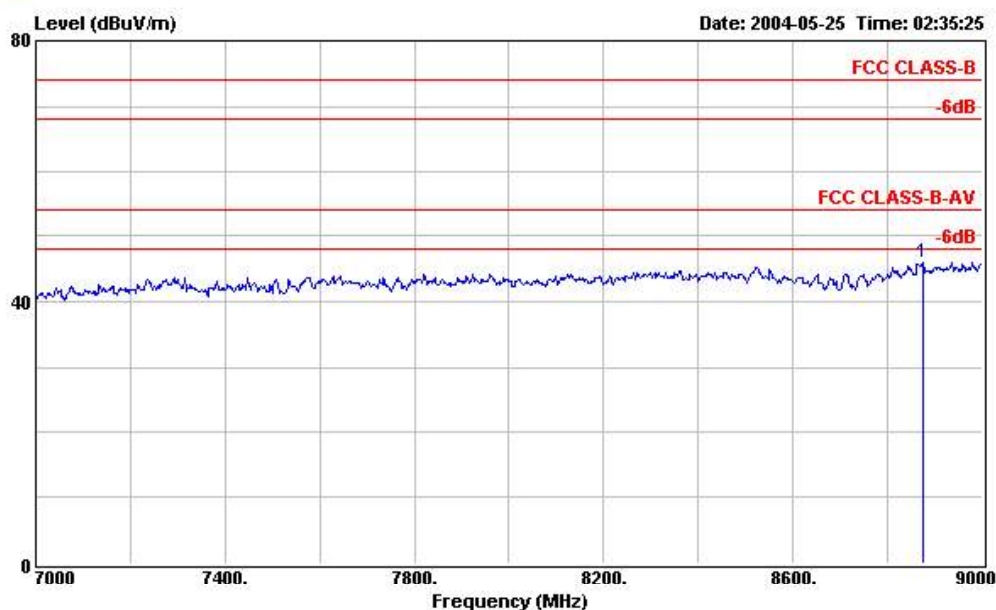

Site : 03CH03-HY
Condition : FCC CLASS-B 3m HORN-ANT-6741 VERTICAL
EUT :
Power : 120V/60Hz
Model :
Memo : WLAN TX CH06 2437MHz

Freq	Level	Over	Limit	Read	Probe	Cable	Preamp	Remark	Ant	Table
		Limit	Line							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1 8876.000	46.09	-27.91	74.00	45.78	38.05	3.32	41.06	Peak	---	---


Mark:

Frequency from 9000MHz to 25000MHz, the emission emitted by the EUT is too low to be measured

FCC TEST REPORT

Report No. :F451503

BT TX CH39 2441 MHz

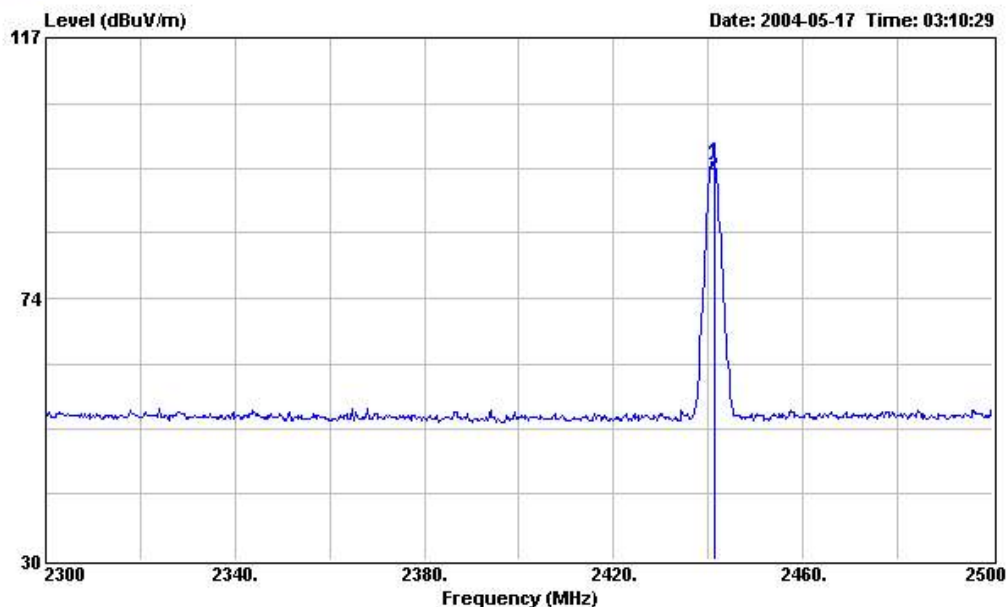

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 HORIZONTAL
 EUT :
 Power : 120V/60Hz
 Model :
 Memo : BT TX CH39 2441MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamplifier Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2441.200	96.27	-----	-----	66.19	28.31	1.77	0.00	Peak	---	---
2	2441.200	94.22	-----	-----	64.14	28.31	1.77	0.00	Average	---	---

SPORTON International Inc.


TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

FCC ID : NM8BALI

Page No. : 96 of 132


Issued Date : May 25, 2004

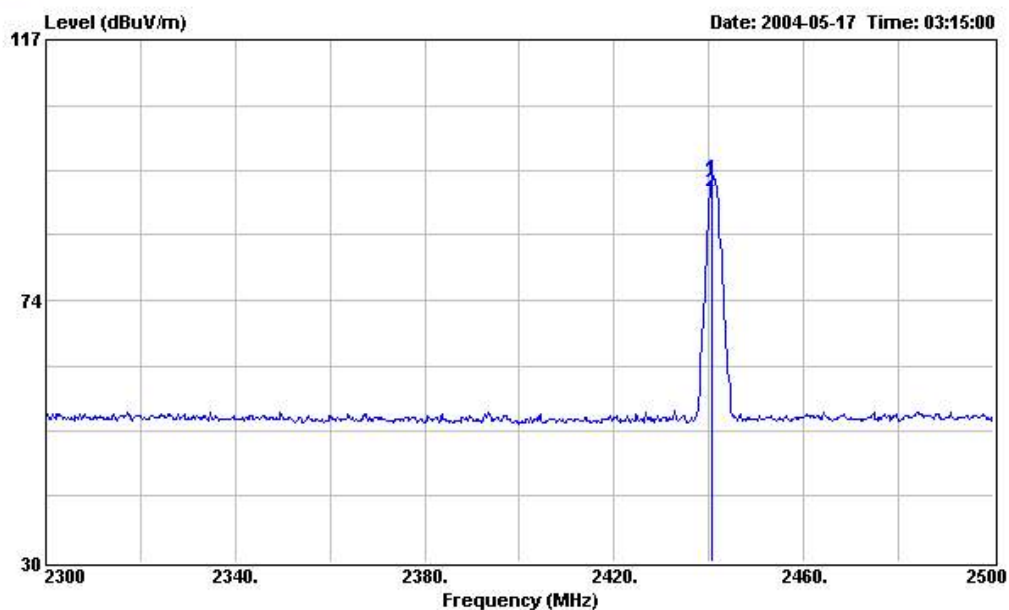

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 VERTICAL
 EUT
 Power : 120V/60Hz
 Model
 Memo : BT TX CH39 2441MHz


	Freq	Level	Over	Limit	Read	Probe	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
			dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2440.600	93.96	-----	-----	63.89	28.30	1.77	0.00	Peak	---	---
2	2440.600	91.68	-----	-----	61.61	28.30	1.77	0.00	Average	---	---

WLAN TX CH06 2437 MHz

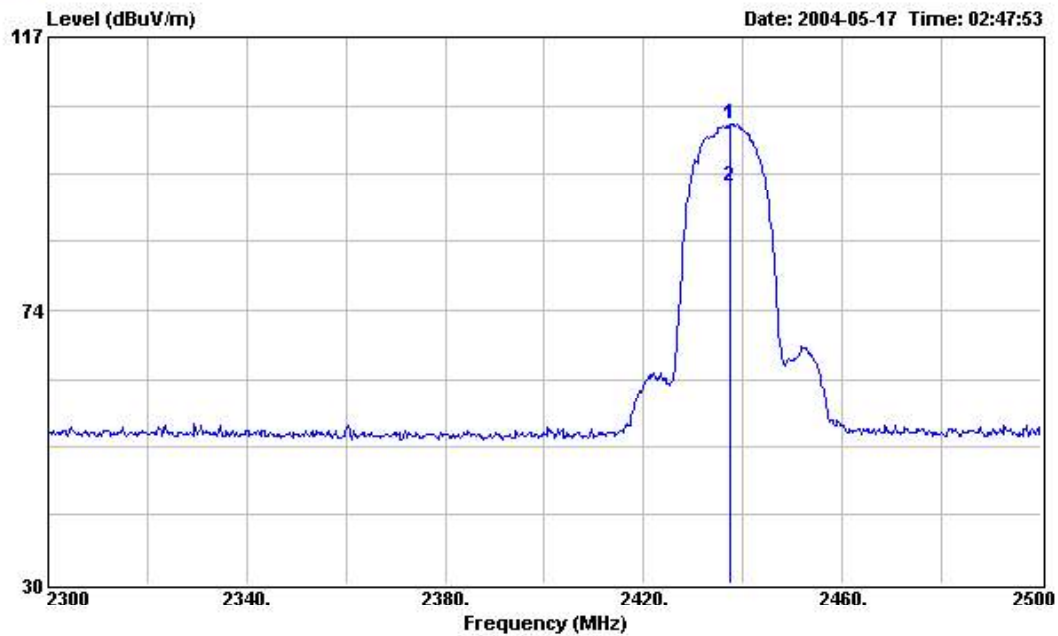

Site : 03CH03-HY
Condition : 3m HORN-ANT-6741 HORIZONTAL
EUT :
Power : 120V/60Hz
Model :
Memo : WLAN TX CH06 2437MHz

Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
------	-------	------------	------------	------------	--------------	------------	---------------	--------	---------	-----------

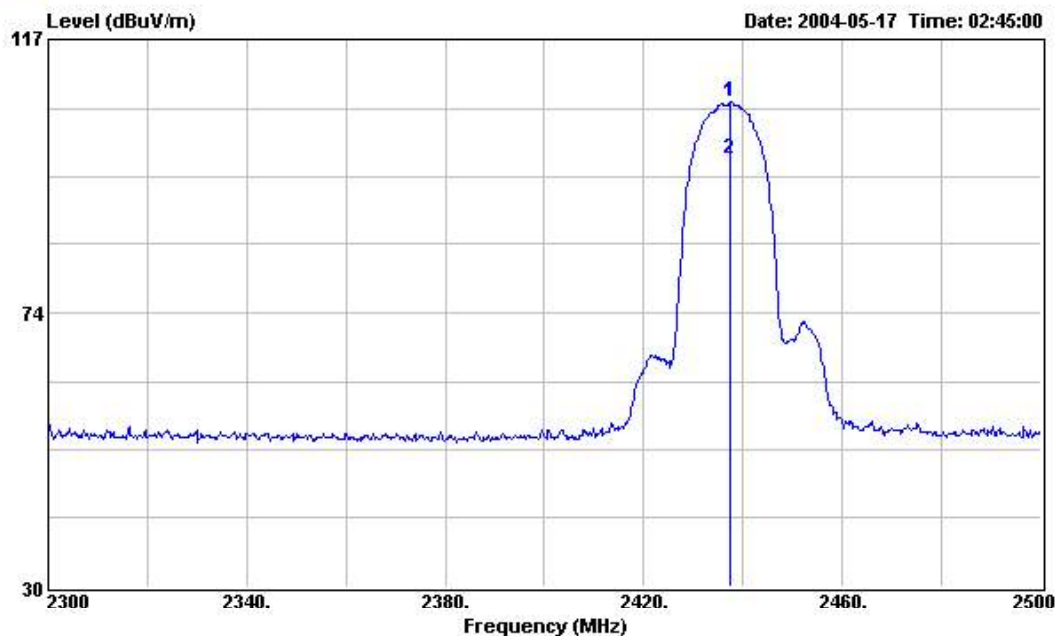

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 VERTICAL
 EUT :
 Power : 120V/60Hz
 Model :
 Memo : WLAN TX CH06 2437MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2437.400	107.06	-----	-----	77.00	28.30	1.76	0.00	Peak	---	---
2	2437.400	97.97	-----	-----	67.91	28.30	1.76	0.00	Average	---	---

FCC TEST REPORT

Report No. :F451503

■ Field strength of fundamental and harmonics

Test Item	Frequency	Antenna	Cable	Reading	Preamp	Limits	Emission	Margin	Detect
	Polarity	Factor	Loss		Factor				
	(MHz)	(dB/m)	(dB)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	Mode
Bluetooth	2441.200	H	28.31	1.77	66.19	0.00	-	96.27	- Peak
	2441.200	V	28.30	1.77	63.89	0.00	-	93.96	- AV
	4882.000	V/H	-	-	-	-	-	-	- AV/Peak
	7323.000	V/H	-	-	-	-	-	-	- AV/Peak
	9764.000	V/H	-	-	-	-	-	-	- AV/Peak
	12205.000	V/H	-	-	-	-	-	-	- AV/Peak
	14646.000	V/H	-	-	-	-	-	-	- AV/Peak
	17087.000	V/H	-	-	-	-	-	-	- AV/Peak
	19528.000	V/H	-	-	-	-	-	-	- AV/Peak
	21969.000	V/H	-	-	-	-	-	-	- AV/Peak
	24410.000	V/H	-	-	-	-	-	-	- AV/Peak
WLAN	2437.400	H	28.30	1.76	73.24	0.00	-	103.30	- Peak
	2437.400	V	28.30	1.76	77.00	0.00	-	107.06	- AV
	4874.000	V/H	-	-	-	-	-	-	- AV/Peak
	7311.000	V/H	-	-	-	-	-	-	- AV/Peak
	9748.000	V/H	-	-	-	-	-	-	- AV/Peak
	12185.000	V/H	-	-	-	-	-	-	- AV/Peak
	14622.000	V/H	-	-	-	-	-	-	- AV/Peak
	17059.000	V/H	-	-	-	-	-	-	- AV/Peak
	19496.000	V/H	-	-	-	-	-	-	- AV/Peak
	21933.000	V/H	-	-	-	-	-	-	- AV/Peak
	24370.000	V/H	-	-	-	-	-	-	- AV/Peak

Remark:

1. The emission emitted by the EUT is too low to be measured except the emission listed above,

Test Engineer : 

Jay

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

FCC ID : NM8BALI


Page No. : 100 of 132

Issued Date : May 25, 2004

7.4.4 Test Mode: Mode 4 TX- BT CH78 (2480 MHz), WLAN CH11 (2462 MHz)


- Test Distance : 3 m
- Temperature : 26 °C
- Relative Humidity :53 %
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

■ The test that passed at minimum margin was marked by the frame in the following table.

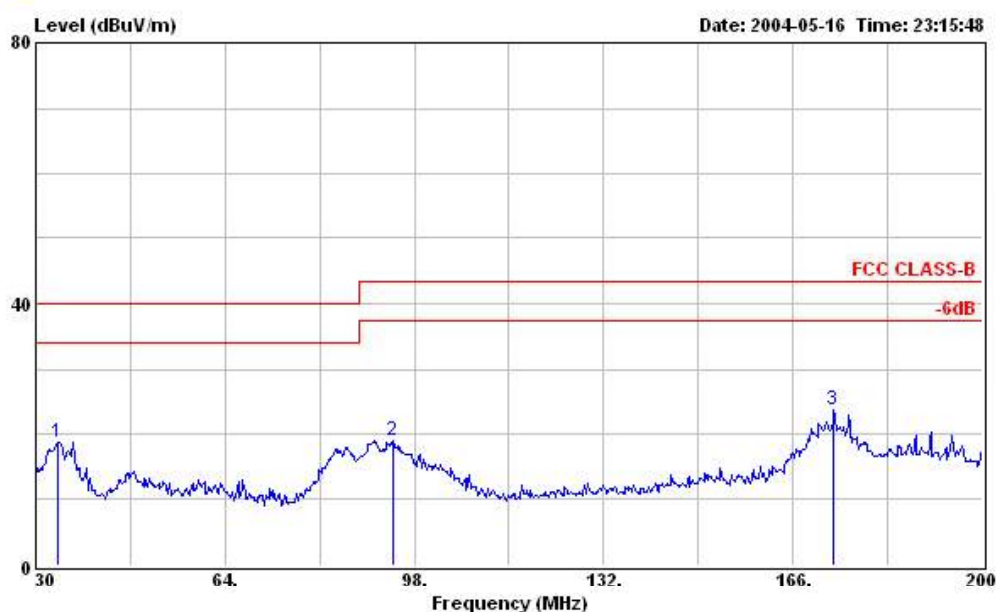


Site : 03CH03-HY
 Condition : FCC CLASS-B 3m BIC-9124--301 HORIZONTAL
 EUT
 Power : 120V/60Hz
 Model
 Memo : BT TX CH78 2480MHz
 : WLAN TX CH11 2462MHz
 : Cradle +USB

	Freq	Level	Over	Limit	Read	Probe	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	33.910	18.80	-21.20	40.00	32.57	13.27	1.00	28.04	Peak	---	---
2	94.260	19.05	-24.45	43.50	35.97	9.34	1.65	27.91	Peak	---	---
3	173.310	23.68	-19.82	43.50	35.69	13.36	2.38	27.75	Peak	---	---

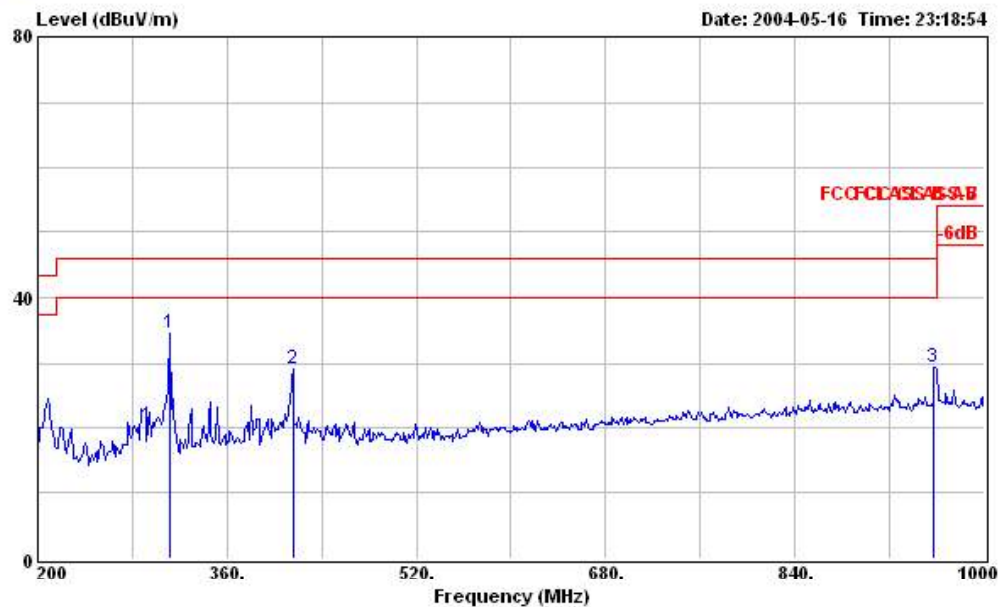


Site : 03CH03-HY
 Condition : FCC CLASS-B 3m LOG-9111-221 HORIZONTAL
 EUT
 Power : 120V/60Hz
 Model
 Memo : BT TX CH78 2480MHz
 : WLAN TX CH11 2462MHz
 : Cradle +USB

	Freq	Level	Over	Limit	Read	Probe	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	311.200	34.44	-11.56	46.00	44.80	13.86	3.14	27.36	Peak	---	---
2	416.000	29.13	-16.87	46.00	37.47	16.05	3.55	27.94	Peak	---	---
3	957.600	29.34	-16.66	46.00	30.03	21.90	5.65	28.24	Peak	---	---

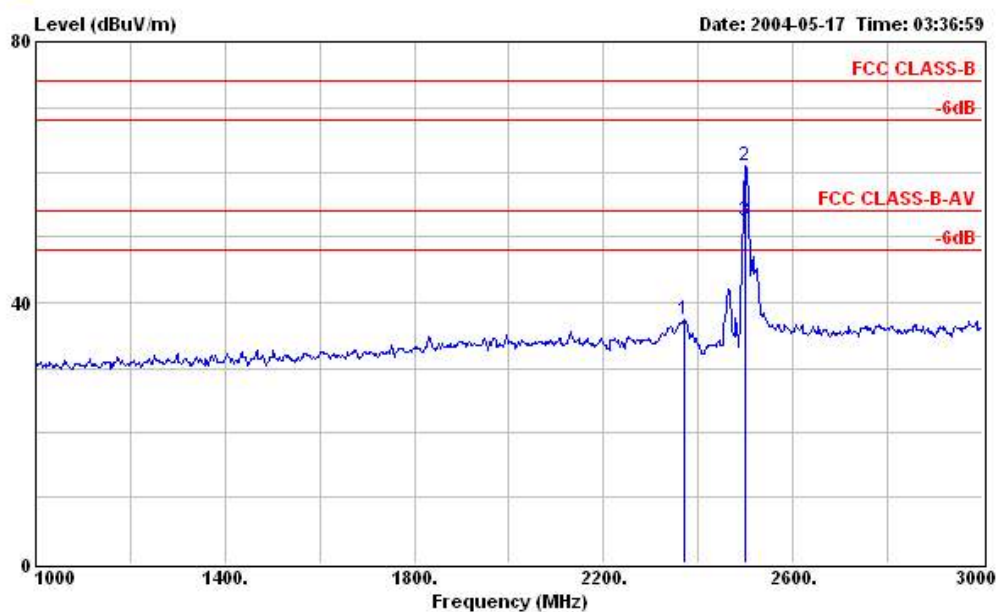


Site : 03CH03-HY
 Condition : FCC CLASS-B 3m HORN-ANT-6741 HORIZONTAL
 EUT
 Power : 120V/60Hz
 Model :
 Memo : BT TX CH78 2480MHz
 : WLAN TX CH11 2462MHz
 : Cradle +USB

	Freq	Level	Over	Limit	Read	Probe	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2372.000	37.28	-36.72	74.00	48.55	28.16	1.70	41.13	Peak	---	---
2	2500.000	61.07	-12.93	74.00	71.98	28.44	1.85	41.20	Peak	100	360
3	2500.000	52.45	-1.55	54.00	63.36	28.44	1.85	41.20	Average	100	360

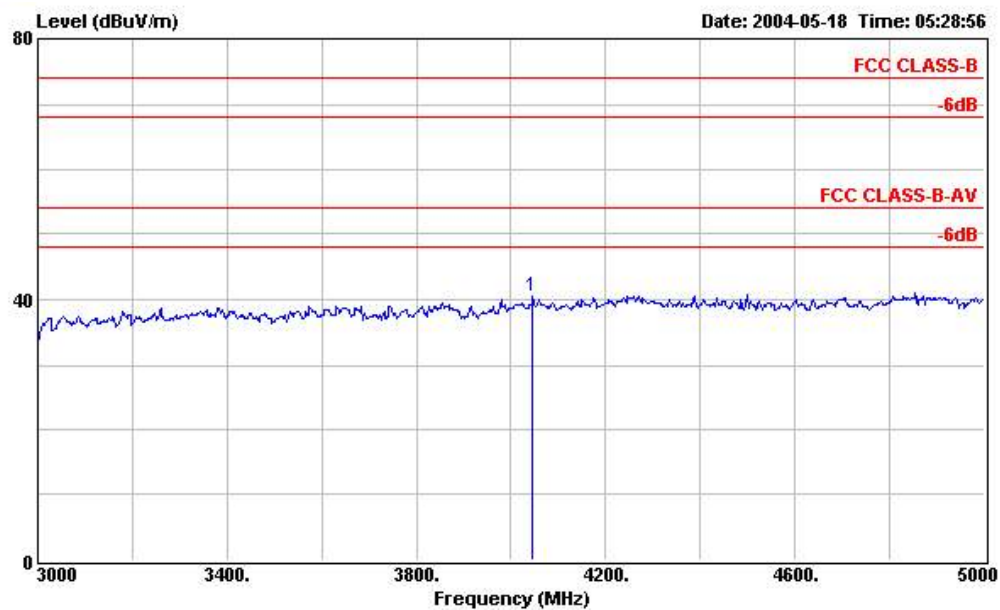


Site : 03CH03-HY
Condition : FCC CLASS-B 3m HORN-ANT-6741 HORIZONTAL
EUT
Power : 120V/60Hz
Model
Memo : BT TX CH78 2480MHz
: WLAN TX CH11 2462MHz
: Cradle +USB

Freq	Level	Over	Limit	Read	Probe	Cable	Preamp	Remark	Ant	Table
		Limit	Line							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1 4046.000	40.56	-33.44	74.00	47.05	32.58	2.48	41.55	Peak	---	---

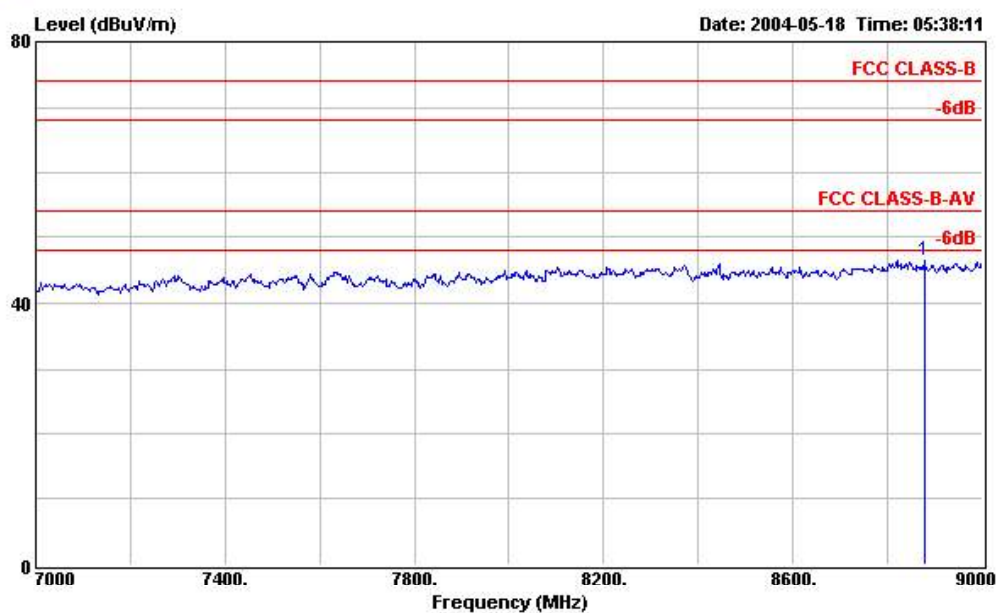


Site : 03CH03-HY
Condition : FCC CLASS-B 3m HORN-ANT-6741 HORIZONTAL
EUT :
Power : 120V/60Hz
Model :
Memo : BT TX CH78 2480MHz
: WLAN TX CH11 2462MHz
: Cradle +USB

	Freq	Level	Over	Limit	Read	Probe	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
			dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	8878.000	46.55	-27.45	74.00	46.24	38.05	3.31	41.05	Peak	---	---

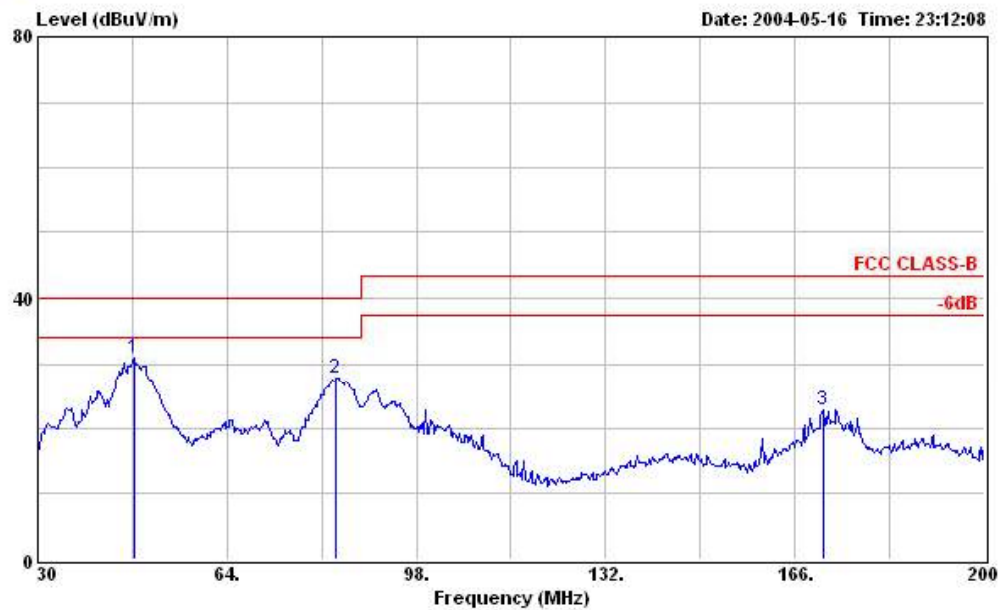


Site : 03CH03-HY
 Condition : FCC CLASS-B 3m BIC-9124--301 VERTICAL
 EUT
 Power : 120V/60Hz
 Model
 Memo : BT TX CH78 2480MHz
 : WLAN TX CH11 2462MHz
 : Cradle +USB

	Freq	Level	Over	Limit	Read	Probe	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	47.340	30.93	-9.07	40.00	47.47	10.30	1.16	28.00	Peak	---	---
2	83.550	27.88	-12.12	40.00	44.56	9.69	1.56	27.93	Peak	---	---
3	171.100	22.95	-20.55	43.50	35.05	13.29	2.37	27.76	Peak	---	---

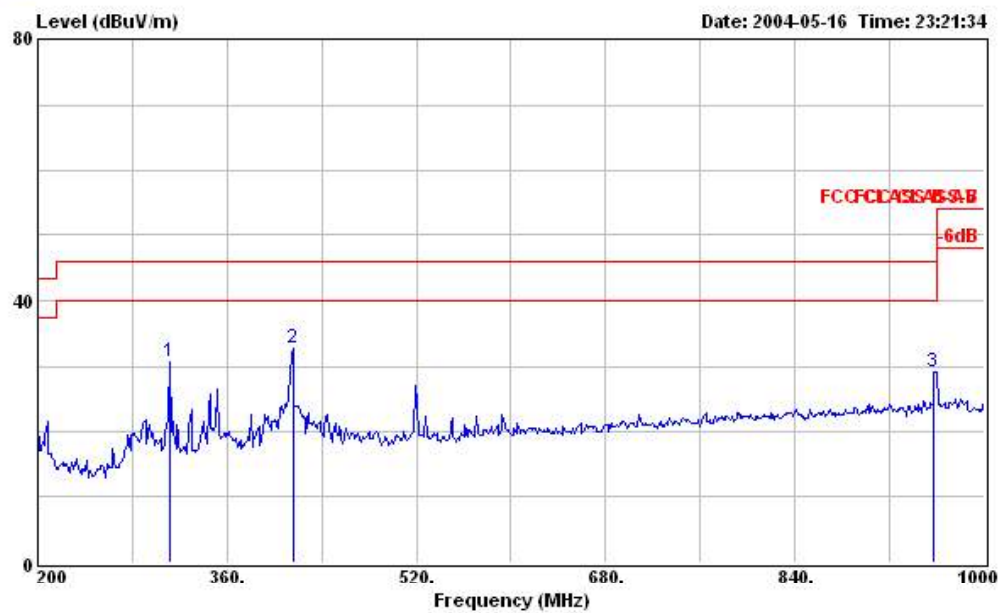


Site : 03CH03-HY
 Condition : FCC CLASS-B 3m LOG-9111-221 VERTICAL
 EUT :
 Power : 120V/60Hz
 Model :
 Memo : BT TX CH78 2480MHz
 : WLAN TX CH11 2462MHz
 : Cradle +USB

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamplifier	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	311.200	30.67	-15.33	46.00	41.03	13.86	3.14	27.36	Peak	---	---
2	416.000	32.63	-13.37	46.00	40.97	16.05	3.55	27.94	Peak	---	---
3	957.600	29.18	-16.82	46.00	29.87	21.90	5.65	28.24	Peak	---	---

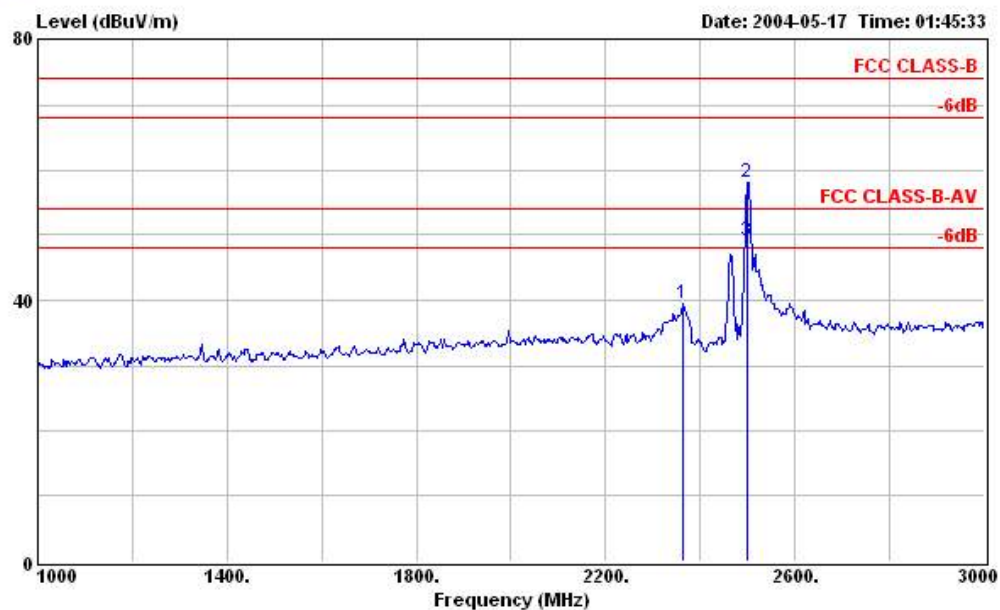


Site : 03CH03-HY
 Condition : FCC CLASS-B 3m HORN-ANT-6741 VERTICAL
 EUT
 Power : 120V/60Hz
 Model
 Memo : BT TX CH78 2480MHz
 : WLAN TX CH11 2462MHz
 : Cradle +USB

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2364.000	39.38	-34.62	74.00	50.65	28.15	1.70	41.12	Peak	---	---
2	2500.000	58.30	-15.70	74.00	69.21	28.44	1.85	41.20	Peak	100	360
3	2500.000	49.01	-4.99	54.00	59.92	28.44	1.85	41.20	Average	100	360

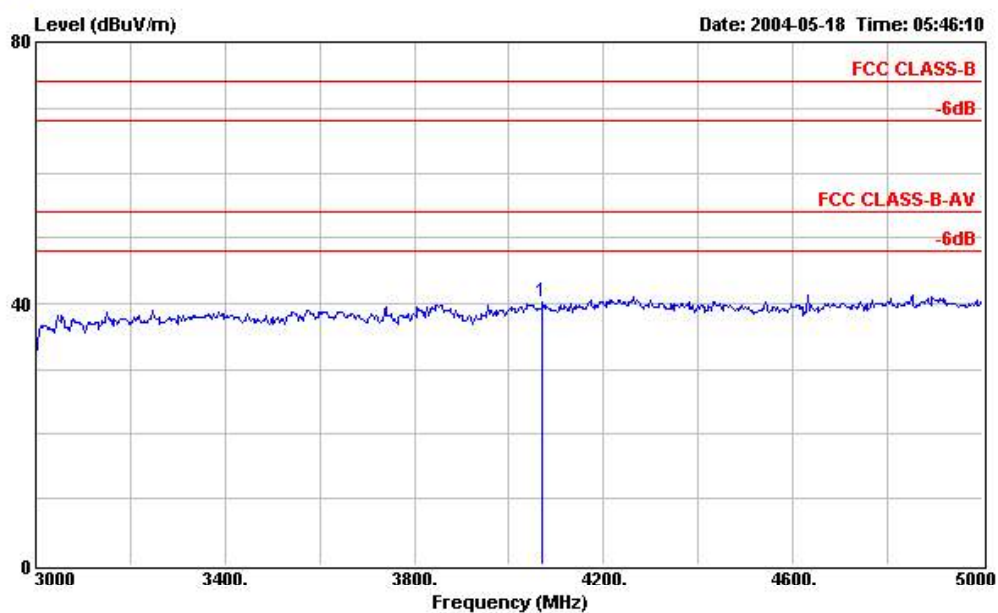


Site : 03CH03-HY
 Condition : FCC CLASS-B 3m HORN-ANT-6741 VERTICAL
 EUT :
 Power : 120V/60Hz
 Model :
 Memo : BT TX CH78 2480MHz
 : WLAN TX CH11 2462MHz
 : Cradle +USB

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	4070.000	40.18	-33.82	74.00	46.62	32.57	2.56	41.57	Peak	---	---

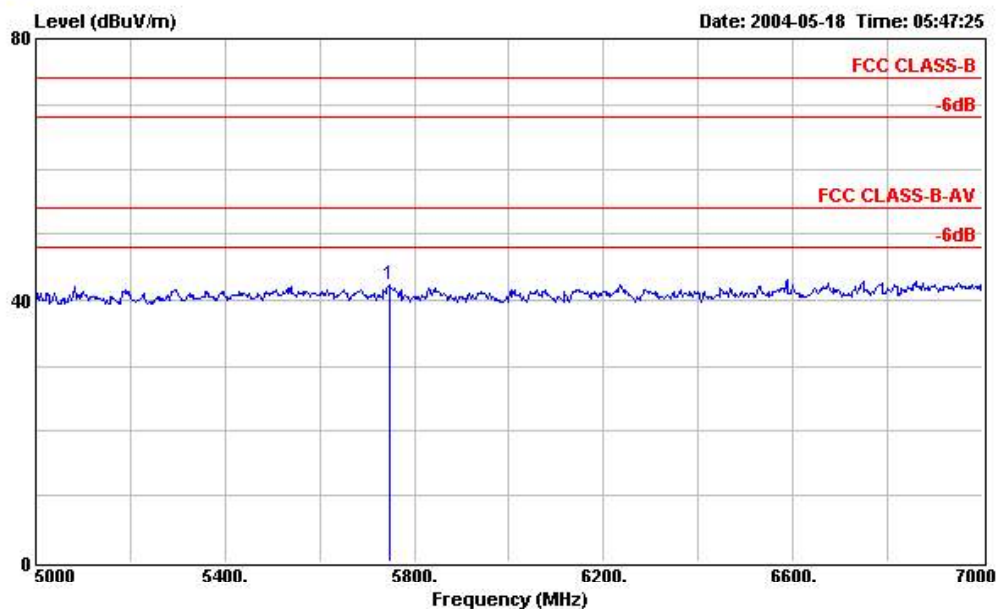

Site : 03CH03-HY
 Condition : FCC CLASS-B 3m HORN-ANT-6741 VERTICAL
 EUT :
 Power : 120W/60Hz
 Model :
 Memo : BT TX CH78 2480MHz
 : WLAN TX CH11 2462MHz
 : Cradle +USB

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	5748.000	42.43	-31.57	74.00	48.92	34.10	2.61	43.20	Peak	---	---

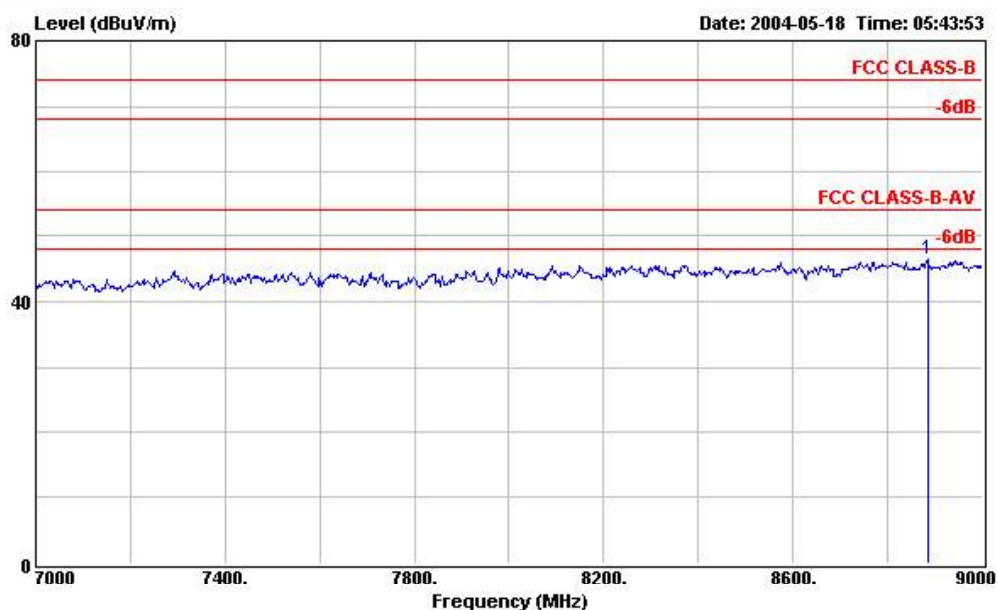

Site : 03CH03-HY
Condition : FCC CLASS-B 3m HORN-ANT-6741 VERTICAL
EUT :
Power : 120V/60Hz
Model :
Memo : BT TX CH78 2480MHz
WLAN TX CH11 2462MHz
Cradle +USB

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	8884.000	46.57	-27.43	74.00	46.28	38.05	3.29	41.05	Peak	---	---


Mark:

Frequency from 9000MHz to 25000MHz, the emission emitted by the EUT is too low to be measured

7.4.5 Test Mode: Mode 5 TX- BT CH78 (2480 MHz)


- Test Distance : 3 m
- Temperature : 26 °C
- Relative Humidity :53 %
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

■ The test that passed at minimum margin was marked by the frame in the following table.

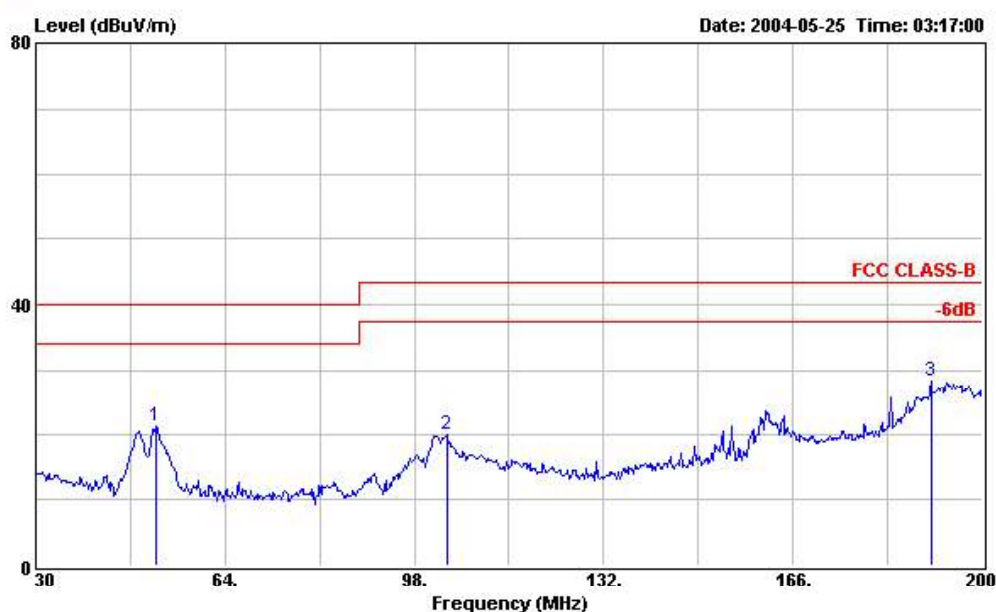


Site : 03CH03-HY
 Condition : FCC CLASS-B 3m BIC-9124--301 HORIZONTAL
 EUT
 Power : 120V/60Hz
 Model
 Memo : BT TX CH78 2480MHz

	Freq	Level	Over	Limit	Read	Probe	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	51.590	21.24	-18.76	40.00	37.89	10.13	1.21	27.99	Peak	---	---
2	103.780	20.07	-23.43	43.50	36.10	10.04	1.82	27.89	Peak	---	---
3	190.820	28.30	-15.20	43.50	38.95	14.59	2.48	27.72	Peak	---	---

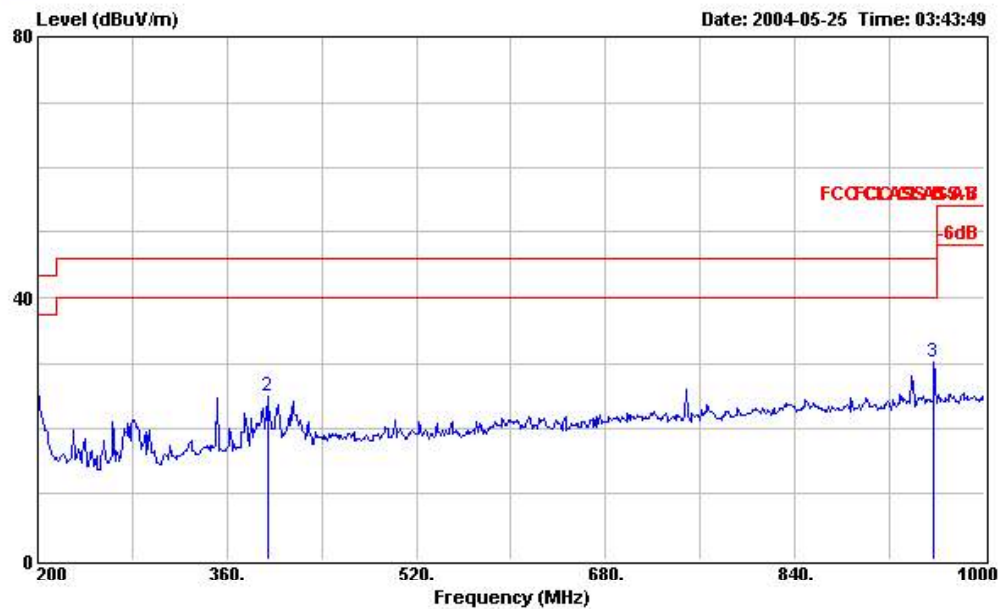

Site : 03CH03-HY
 Condition : FCC CLASS-B 3m LOG-9111-221 HORIZONTAL
 EUT
 Power : 120V/60Hz
 Model
 Memo : BT TX CH78 2480MHz

	Freq	Level	Over	Limit	Read	Probe	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	200.000	25.67	-17.83	43.50	35.41	15.39	2.57	27.70	Peak	---	---
2	394.400	24.93	-21.07	46.00	33.57	15.68	3.45	27.77	Peak	---	---
3	957.600	30.04	-15.96	46.00	30.73	21.90	5.65	28.24	Peak	---	---

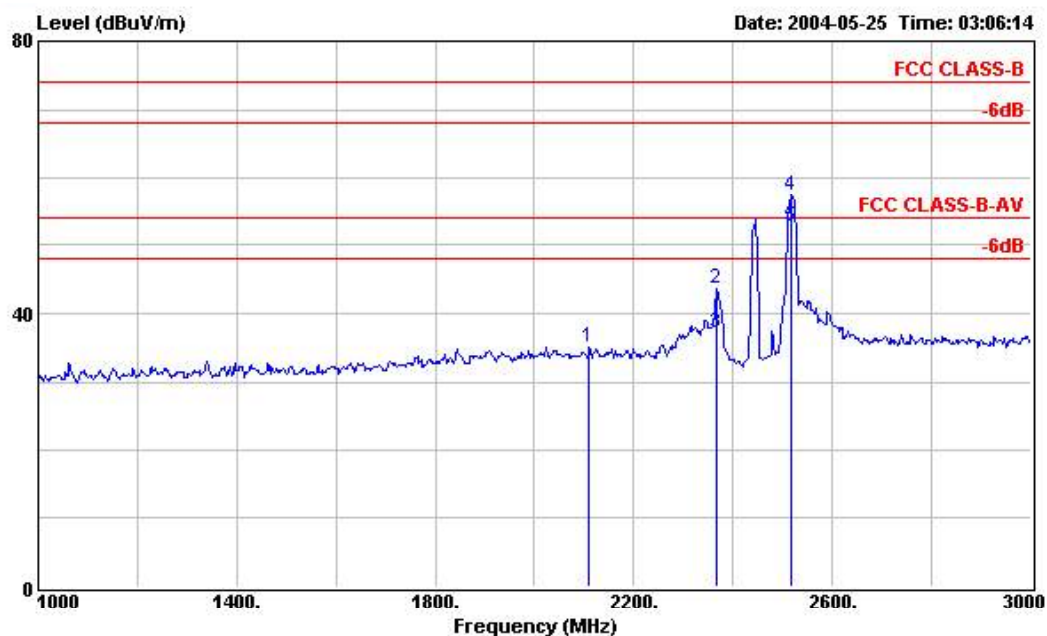

Site : 03CH03-HY
 Condition : FCC CLASS-B 3m HORN-ANT-6741 HORIZONTAL
 EUT
 Power : 120V/60Hz
 Model
 Memo : BT TX CH78 2480MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2110.000	35.19	-38.81	74.00	46.86	27.63	1.67	40.97	Peak	---	---
2	2366.000	43.58	-30.42	74.00	54.86	28.15	1.70	41.13	Peak	---	---
3	2366.000	37.22	-16.78	54.00	48.50	28.15	1.70	41.13	Average	---	---
4	2518.000	57.53	-16.47	74.00	68.38	28.49	1.86	41.20	Peak	---	---
5	2518.000	52.73	-1.27	54.00	63.58	28.49	1.86	41.20	Average	---	---