

# FCC Test Report

Report No.: AGC07434241006FR01

FCC ID	:	2ARXB-B4A
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	Smart Label Printer
BRAND NAME	:	NIIMBOT
MODEL NAME	:	NIIMBOT B4
APPLICANT	:	Wuhan Jingchen Intelligent Identification Technology Co., Ltd.
DATE OF ISSUE	:	Nov. 14, 2024
STANDARD(S)	:	FCC Part 15 Subpart C §15.247
<b>REPORT VERSION</b>	:	V1.0







# **Report Revise Record**

Report Version	Revise Time	Issued Date	Valid Version	Notes	
V1.0	/	Nov. 14, 2024	Valid	Initial Release	



# **Table of Contents**

1. General Information	5
2. Product Information	6
2.1 Product Technical Description	6
2.2 Test Frequency List	6
2.3 Related Submittal(S) / Grant (S)	7
2.4 Test Methodology	7
2.5 Receiver Input Bandwidth	7
2.6 Equally Average Use of Frequencies And Behaviour	7
2.7 Pseudorandom Frequency Hopping Sequence	
2.8 Special Accessories	
2.9 Equipment Modifications	
2.10 Antenna Requirement	
3. Test Environment	
3.1 Address of The Test Laboratory	
3.2 Test Facility	
3.3 Environmental Conditions	
3.4 Measurement Uncertainty	
3.5 List of Equipment Used	
4.System Test Configuration	
4.1 EUT Configuration	
4.2 EUT Exercise	
4.3 Configuration of Tested System	
4.4 Equipment Used in Tested System	
4.5 Summary of Test Results	
5. Description of Test Modes	
6. RF Output Power Measurement	
6.1 Provisions Applicable	
6.2 Measurement Procedure	
6.3 Measurement Setup (Block Diagram of Configuration)	
6.4 Measurement Result	
7. 20dB Bandwidth and 99% Occupied Bandwidth Measurement	
7.1 Provisions Applicable	
7.2 Measurement Procedure	
7.3 Measurement Setup (Block Diagram of Configuration)	
7.4 Measurement Results	
8. Conducted Band Edge and Out-of-Band Emissions	
8.1 Provisions Applicable	
8.2 Measurement Procedure	
8.3 Measurement Setup (Block Diagram of Configuration)	
8 / Measurement Results	21



9. Radiated Spurious Emission	22
9.1 Measurement Limit	22
9.2 Measurement Procedure	22
9.3 Measurement Setup (Block Diagram of Configuration)	25
9.4 Measurement Result	26
10. Number of Hopping Frequency Measurement	44
10.1 Provisions Applicable	44
10.2 Measurement Procedure	44
10.3 Measurement Setup (Block Diagram of Configuration)	44
10.4 Measurement Result	44
11. Time of Occupancy (Dwell Time) Measurement	45
11.1 Provisions Applicable	45
11.2 Measurement Procedure	45
11.3 Measurement Setup (Block Diagram of Configuration)	45
11.4 Measurement Result	45
12. Frequency Separation Measurement	46
12.1 Provisions Applicable	46
12.2 Measurement Procedure	46
12.3 Measurement Setup (Block Diagram of Configuration)	46
12.4 Measurement Result	46
13. AC Power Line Conducted Emission Test	47
13.1 Measurement Limit	47
13.2 Measurement Setup (Block Diagram of Configuration)	47
13.3 Preliminary Procedure of Line Conducted Emission Test	48
13.4 Final Procedure of Line Conducted Emission Test	48
13.5 Measurement Results	48
Appendix I: Photographs of Test Setup	51
Appendix II: Photographs of Test EUT	51



# **1. General Information**

Applicant	Wuhan Jingchen Intelligent Identification Technology Co., Ltd.
Address	No. 5, Creative Workshop, Creative World, Yezhihu West Road, Hongshan District, Wuhan, China
Manufacturer	Wuhan Jingchen Intelligent Identification Technology Co., Ltd.
Address	No. 5, Creative Workshop, Creative World, Yezhihu West Road, Hongshan District, Wuhan, China
Factory	Dongxihu branch of Wuhan Jingchen Intelligent Identification Technology Co., Ltd.
Address	No. 20, Xincheng Shiba Road, Changqing Street, Dongxihu District, Wuhan, Hubei Province, China
Product Designation	Smart Label Printer
Brand Name	NIIMBOT
Test Model	NIIMBOT B4
Series Model(s)	N/A
Difference Description	N/A
Date of receipt of test item	Oct. 16, 2024
Date of Test	Oct. 16, 2024~Nov. 14, 2024
Deviation from Standard	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Test Report Form No	AGCER-FCC-BR_EDR-V1

Note: The test results of this report relate only to the tested sample identified in this report.

トー Prepared By Cici Li Nov. 14, 2024 (Project Engineer) Calvin Lin **Reviewed By** Calvin Liu Nov. 14, 2024 (Reviewer) Approved By Angela Li Nov. 14, 2024 (Authorized Officer)



# 2. Product Information

# 2.1 Product Technical Description

Frequency Band	2400MHz-2483.5MHz			
Operation Frequency Range	2402MHz-2480MHz			
Bluetooth Version	V5.0			
Modulation Type	BR ⊠GFSK, EDR ⊠π /4-DQPSK, ⊠8DPSK			
Number of channels	79 Channels			
Channel Separation	1 MHz			
Maximum Transmitter Power	2.634dBm			
Hardware Version	B01			
Software Version	1.04			
Antenna Designation	PCB Antenna			
Antenna Gain	-1.028dBi			
Power Supply	DC 7.4V by battery or DC 5V by adapter			
Note: This Product Contains Bluetooth Module (Model: BT-BR8051-A-MODULE /FCC ID: 2ARXB-051A). The RF part data can refer to the reference report number AGC07434240809FR01, only for re-evaluation of AC Power Line Conducted Emission and Radiated Spurious Emission.				

# 2.2 Test Frequency List

Frequency Band	Channel Number	Frequency		
	0	2402 MHz		
	1	2403 MHz		
	:	:		
2400~2483.5MHz	39	2441MHz		
	:	:		
	77	2479 MHz		
	78	2480 MHz		

Note: f = 2402 + 1k MHz, k = 0, ..., 78 ; "f "is the operating frequency (MHz); "k" is the operating channel.



# 2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: 2ARXB-B4A, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

# 2.4 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules

#### 2.5 Receiver Input Bandwidth

The input bandwidth of the receiver is 1.3MHz, in every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally, the type of connection (e.g. single of multi slot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also, the slave of the connection will use these settings. Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

# 2.6 Equally Average Use of Frequencies and Behaviour.

The generation of the hopping sequence in connection mode depends essentially on two input values:

1. LAP/UAP of the master of the connection.

2. Internal master clock.

The LAP (lower address part) are the 24 LSB's of the 48 BD\_ADDRESS. The BD\_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP (upper address part) are the 24MSB's of the 48BD\_ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For behavior action with other units only offset is used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about one day(23h30).

In most case it is implemented as 28 bits counter. For the deriving of the hopping sequence the entire. LAP (24 bits),4LSB's(4bits) (Input 1) and the 27MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR-operations) are performed to generate the Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behavior:


The first connection between the two devices is established, a hopping sequence was generated. For Transmitting the wanted data the complete hopping sequence was not used. The connection ended. The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer (and it Cannot be shorter) than the minimum resolution of the clock(312.5us). The hopping sequence will always differ from the first one.



# 2.7 Pseudorandom Frequency Hopping Sequence

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: 29 1 = 511 bits
- Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of The PRBS Sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

44	35	78	03	20	76	02	19		21	64	75
								1	1		
			li						:		
						; ;			i i		
				i		<u></u>		1	i		

Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.



#### 2.8 Special Accessories

Not available for this EUT intended for grant.

# 2.9 Equipment Modifications

Not available for this EUT intended for grant.

#### 2.10 Antenna Requirement

#### Standard Requirement

#### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

#### EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is -1.028dBi.



# 3. Test Environment

# 3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

# 3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

# CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories.)

#### A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

#### FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

#### IC-Registration No.: 24842(CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



# **3.3 Environmental Conditions**

	Normal Conditions
Temperature range (°C)	15 - 35
Relative humidity range	20 % - 75 %
Pressure range (kPa)	86 - 106
Power supply	DC 7.4V by battery or DC 5V by adapter

#### **3.4 Measurement Uncertainty**

The reported uncertainty of measurement y  $\pm$ U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$



#### 3.5 List of Equipment Used

• F	Radiated Spurious Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2024-02-01	2025-01-31	
$\boxtimes$	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2024-05-24	2025-05-23	
$\boxtimes$	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2024-05-28	2025-05-27	
$\boxtimes$	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04	
$\boxtimes$	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10	
$\boxtimes$	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2024-03-31	2025-03-30	
$\boxtimes$	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23	
$\boxtimes$	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2024-07-24	2026-07-23	
$\boxtimes$	AGC-EM-A119	2.4G Filter	SongYi	N/A	N/A	2024-05-23	2025-05-22	
$\boxtimes$	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	

• A	AC Power Line Conducted Emission									
Used	Equipment No.	Test Equipment	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)						
$\boxtimes$	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2024-05-28	2025-05-27			
$\boxtimes$	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2023-06-09	2025-06-08			
$\boxtimes$	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2024-05-28	2025-05-27			

• Te:	Test Software								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information				
	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71				
	AGC-EM-S003	RE Test System	FARA	EZ-EMC	VRA-03A				
	AGC-EM-S004	RE Test System	Tonscend	TS+Ver2.1(JS32-RE)	4.0.0.0				
$\square$	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0				



# **4.System Test Configuration**

# **4.1 EUT Configuration**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

# 4.2 EUT Exercise


The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

# 4.3 Configuration of Tested System

Radiated Emission Configure:



Conducted Emission Configure:



# 4.4 Equipment Used in Tested System

The following peripheral devices and interface cables were connected during the measurement:

#### ☐ Test Accessories Come From The Laboratory

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1	Adapter	Huawei	HW-200440C00		
2	Control Box	RISYM	USB-TTL		
	Test Accessories	Come From The	Manufacturer		

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1					



#### 4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.203&15.247(b)(4)	Antenna Equipment	Pass
2	§15.247 (b)(1)	RF Output Power	Pass
3	§15.247 (a)(1)	20 dB Bandwidth	Pass
4	§15.247 (d)	Conducted Band Edge and Out-of-Band Emissions	Pass
5	§15.209	Radiated Spurious Emission	Pass
6	§15.247 (a)(1)(iii)	Number of Hopping Frequency	Pass
7	§15.247 (a)(1)(iii)	Time of Occupancy	Pass
8	§15.247 (a)(1)	Frequency Separation	Pass
9	§15.207	AC Power Line Conducted Emission	Pass

Note: There are two prototypes (Prototype 1 and Prototype 2). They are only different from the motor. In response to this difference, both prototypes were tested for Radiated Spurious Emission a difference test and the data was recorded in the report.



# 5. Description of Test Modes

	Summary tab	le of Test Cases	
		Data Rate / Mo	dulation
Test Item	Bluetooth –	- BR EDR (GFSK	/π /4-DQPSK/8DPSK)
Radiated & Conducted Test Cases	Mode 1: Bluetooth Tx CH00 Mode 2: Bluetooth Tx CH39 Mode 3: Bluetooth Tx CH78 Mode 4: Bluetooth Tx CH39 Mode 5: Bluetooth Tx CH39 Mode 6: Bluetooth Tx CH39 Mode 7: Bluetooth Tx CH39 Mode 8: Bluetooth Tx CH39 Mode 8: Bluetooth Tx CH39 Mode 9: Bluetooth Tx CH78 Mode10: Bluetooth Tx H	2402 MHz_1Mbp 2441 MHz_1Mbp 2480 MHz_1Mbp 2402 MHz_2Mbp 2441 MHz_2Mbp 2480 MHz_2Mbp 2402 MHz_3Mbp 2440 MHz_3Mbp 2480 MHz_3Mbp 10pping-1Mbps (B Hopping-2Mbps(B	bs (Battery powered or AC/DC adapter) os (Battery powered or AC/DC adapter) attery powered or AC/DC adapter) attery powered or AC/DC adapter) attery powered or AC/DC adapter)
AC Conducted Emission	Mode 1: Bluetooth Link	+ Battery + USB (	Cable (Charging from AC Adapter)
<ol> <li>The battery is full-cha</li> <li>For Radiated Emission</li> </ol>	on, 3axis were chosen for tes nethod, a temporary antenna Software Se BR BlueletSuite COMM UART Disconnect config_type = 1 version_num = BR8051A01 fw_date_num = 202104072057 esm_type = QFLASH	sting for each appl	icable mode. vided by the manufacture.
	Program       Configurate       Test       Parameter         RF       Test Mode:       BR_TX       Chann         Packet Type:       DH5       Packet Lengt         TX Power:       7       LT Add         Pattern Type:       PRBS9       Pattern         BR DUT Control       E       E         BLE DTM Control       Chann       E	dr: 1 ~ Start	RF Calibration TX Power Offset: Up Dn Freq Offset Offset: Up Dn Save



# 6. RF Output Power Measurement

# 6.1 Provisions Applicable

The maximum out power permissible output power is 1 Watt for all frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels.

The maximum out power permissible output power is 0.125 watts for all other frequency hopping systems in the 2400-2483.5 MHz band.

# 6.2 Measurement Procedure

⊠For Peak power test:


- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
- 3. RBW > 20 dB bandwidth of the emission being measured.
- 4. VBW  $\geq$ RBW.
- 5. Sweep: Auto.
- 6. Detector function: Peak.
- 7. Trace: Max hold.
- 8. Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

# For Average power test:

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required


# 6.3 Measurement Setup (Block Diagram of Configuration)

For Average power test setup

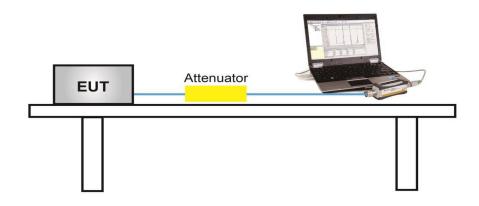



# For peak power test setup

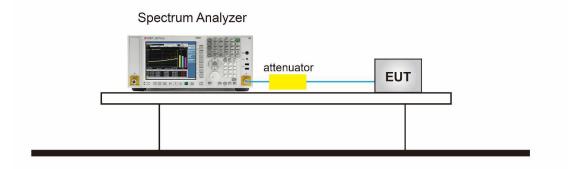

#### 6.4 Measurement Result

Note: Please refer to the Bluetooth module RF report No.: (AGC07434240809FR01)



# 7. 20dB Bandwidth and 99% Occupied Bandwidth Measurement

# 7.1 Provisions Applicable


There is no corresponding limit requirement for this test item.

# 7.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 6.9.2 (20dB BW).

- The 20dB bandwidth spectrum analyzer setting reference is as follows:
- 1. Set RBW  $\geq$  1% to 5% of the 20dB bandwidth
- 2. VBW = Approximately three times RBW
- 3. Span = Approximately 2 to 5 times the 20dB bandwidth, centered on a hopping channel
- 4. Detector = Peak
- 5. Trace mode = Max hold
- 6. Sweep = Auto couple
- 7. Allow the trace to stabilize
- 8. Measure the maximum width of the emission that is constrained by the frequencies associated
- 9. with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20
- 10. dB relative to the maximum level in the fundamental emission.
- The 99% bandwidth spectrum analyzer setting reference is as follows:
- 1. Span = 1.5 times to 5 times the OBW
- 2. Set RBW = 1% to 5% the OBW
- 3. VBW  $\geq$  3 × RBW
- 4. Detector = Peak
- 5. Trace mode = Max hold
- 6. Sweep = Auto couple
- 7. Allow the trace was allowed to stabilize

# 7.3 Measurement Setup (Block Diagram of Configuration)

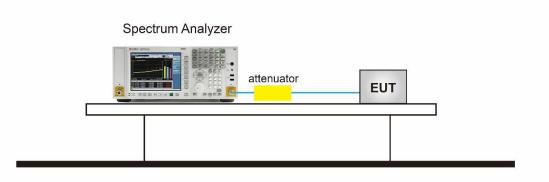



# 7.4 Measurement Results

Note: Please refer to the Bluetooth module RF report No.: (AGC07434240809FR01)



# 8. Conducted Band Edge and Out-of-Band Emissions

# 8.1 Provisions Applicable


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

#### 8.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 6.10.4 and 7.8.8:

- Reference level measurement
- 1. Span = Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation.
- 2. RBW = 100kHz
- 3. VBW = 300kHz
- 4. Detector = Peak
- 5. Sweep time = Auto couple
- 6. Trace mode = Max hold
- 7. Allow the trace to stabilize. Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission.
- Emission level measurement
- 1. Span = Wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
- 2. RBW = 100kHz
- 3. VBW = 300kHz
- 4. Detector = Peak
- 5. Sweep time = Auto couple
- 6. Trace mode = Max hold
- 7. Trace was allowed to stabilize
- 8. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this section.

#### 8.3 Measurement Setup (Block Diagram of Configuration)

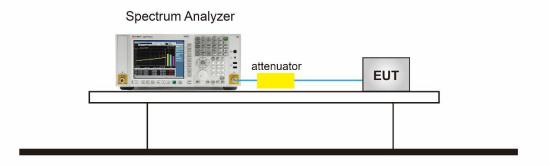



# **8.4 Measurement Results**

Note: Please refer to the Bluetooth module RF report No.: (AGC07434240809FR01)





# 9. Radiated Spurious Emission

# 9.1 Measurement Limit

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

# 9.2 Measurement Procedure

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average



absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz
Start ~Stop Trequency	1MHz/3MHz for Peak, 1MHz/3MHz for Average

#### The following table is the setting of spectrum analyzer and receiver.

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP



# • Quasi-Peak Measurements below 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

# • Peak Measurements above 1GHz


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize

# <u>Average Measurements above 1GHz</u>


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW  $\geq$  [3 × RBW]
- 4. Detector = Power averaging (rms)
- 5. Averaging type = power (i.e., rms)
- 6. Sweep time = auto
- 7. Perform a trace average of at least 100 traces.
- 8. The applicable correction factor is [10\*log (1 / D)], where D is the duty cycle. The factor had been edited in the "Input Correction" of the Spectrum Analyzer.




# 9.3 Measurement Setup (Block Diagram of Configuration)

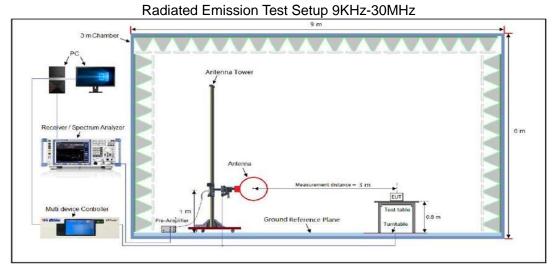

#### Radiated Emission Test Setup 30MHz-1000MHz

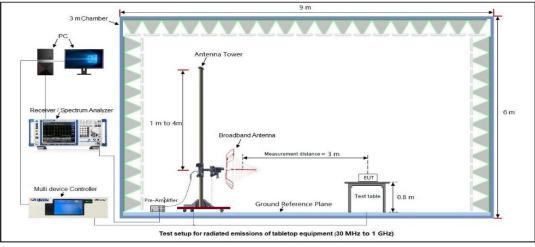

#### Radiated Emission Test Setup Above 1000MHz

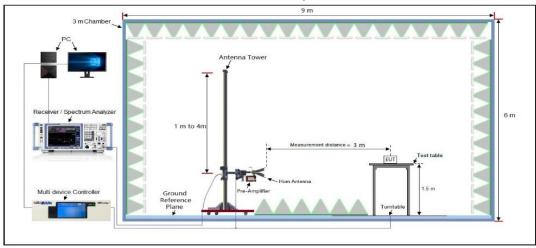

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com




#### 9.4 Measurement Result

#### **Radiated Emission Below 30MHz**

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

		Radiated E	mission Te	st Results a	at 30MHz-	IGHZ (Pro	ototype1	)	
EUT Name	Sma	rt Label Print	ter		Mod	el Name		NIIMBOT B4	
Temperature	22.6	°C				Relative Humidity		56.3%	
Pressure	960h	Pa			Test	Test Voltage		DC 5V by adapter	
Test Mode	e 1			Ante	enna Pola	rity	Horizont	tal	
72.0 d	BuV/m								
32								Limit: - Margin: -	
yardh	stooth white	ennonnennen	inner and with the same	while while the second and	2 3 m <sup>unun</sup> huide	hall have been and have be		hand a second	
		50 60 70		Mill & which the second state of the second st		300 400			000.000
-8 30.000		50 60 70			Measure- ment	300 400			
-8 30.000	D 40	50 60 70	Reading	(MH₂) Correct	Measure	300 400	500 60		000.000
-8 30.000	D 40	50 60 70 k. Freq.	Reading Level	( <sup>MH₂)</sup> Correct Factor	Measurement	300 400 - Limit	500 60 Over	0 700 1	000.000
-8 30.000	) 40 No. MI	50 60 70 k. Freq. MHz	Reading Level dBuV	(MH₂) Correct Factor dB	Measure- ment dBuV/m	300 400 - Limit dBuV/m	500 60 Over dB	0 700 1 Detector	000.000
-8 30.000	) 40 No. MI	50 60 70 k. Freq. MHz 102.0014	Reading Level dBuV 7.53	(MH₂) Correct Factor dB 16.22	Measure- ment dBuV/m 23.75	300 400 - Limit dBuV/m 43.50	500 60 Over dB -19.75	0 700 1 Detector peak	000.000
-8 30.000	0 40 No. MI 1 2	50 60 70 k. Freq. MHz 102.0014 222.9501	Reading Level dBuV 7.53 14.68	(MH₂) Correct Factor dB 16.22 14.55	Measure- ment dBuV/m 23.75 29.23	300 400 Limit dBuV/m 43.50 46.00	500 60 Over dB -19.75 -16.77	0 700 1 Detector peak peak	000.000
-8 30.000	1 2 3	50 60 70 k. Freq. MHz 102.0014 222.9501 277.0935	0 80 Reading Level dBuV 7.53 14.68 13.06	(MH₂) Correct Factor dB 16.22 14.55 14.89	Measure- ment dBuV/m 23.75 29.23 27.95	300 400 Limit dBuV/m 43.50 46.00 46.00	500 60 Over dB -19.75 -16.77 -18.05	00 700 1 Detector peak peak peak	






		Radiated E	mission Te	st Results a	at 30MHz-	1GHz (Pro	ototype	I)	
EUT Name	Sma	rt Label Print	er		Mod	el Name		NIIMBOT	B4
Temperature	22.6	Ĉ			Rela	tive Humi	dity	56.3%	
Pressure	960h	Pa			Test	Test Voltage		DC 5V by	adapter
Test Mode	Mode	e 1			Ante	enna Polar	rity	Vertical	
72.0 dBuV/m									
32				Jerrogetheindernebingeter		and and an and and			
-8 30.00	10 40	50 60 70	) 80	(MHz)	3	300 400	500 600	D 700 1000.	000
٨	lo. Mi	k. Freq.	Reading Level	Correct Factor	Measure- ment	- Limit	Over		
_		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	
	1	74.1351	8.38	16.96	25.34	40.00	-14.66	peak	
	2 *	107.5101	22.11	15.51	37.62	43.50	-5.88	peak	
	3	250.3012	15.54	17.09	32.63	46.00	-13.37	peak	
	4	454.3100	6.01	25.46	31.47	46.00	-14.53	<u> </u>	
	5	665.8035					-12.67	· · ·	
	6	945.4399	5.37	30.78	36.15	46.00	-9.85	peak	

#### **RESULT: Pass**



EUT Name       Smart Label Printer       Model Name       NIIMBOT B4         Temperature       22.6 °C       Relative Humidity       56.3%         Pressure       960hPa       Test Voltage       DC 5V by ada         Test Mode       Mode 1       Antenna Polarity       Horizontal	
Pressure     960hPa     Test Voltage     DC 5V by ada       Test Mode     Mode 1     Antenna Polarity     Horizontal	
Test Mode     Mode 1     Antenna Polarity     Horizontal       72.0     dBuV/m     Limit: —	
72.0 dBuV/m	apter
Limit: —	
Limit: —	
-8 30.000 40 50 60 70 80 (MH2) 300 400 500 600 700 1000.000 Reading Correct Measure-	1
No. Mk. Freq. Level Factor ment Limit Over	
MHz         dBuV         dB         dBuV/m         dBuV/m         dB         Detector           1         100.5806         10.77         16.21         26.98         43.50         -16.52         peak	
·	
2 222.9501 12.68 14.55 27.23 46.00 -18.77 peak 3 277.0935 13.13 14.89 28.02 46.00 -17.98 peak	
4         434.0650         7.35         23.82         31.17         46.00         -14.83         peak           5         719.1994         6.29         24.77         31.06         46.00         -14.94         peak	
6 * 900.1473 4.66 31.78 36.44 46.00 -9.56 peak	





			Radia	ated E	Emiss	sion T	est Results	at 30	MHz-	1GHz (P	rototype2	2)	
EUT Name	S	Smar	t Labe	el Prin	iter				Mod	lel Name		NIIMBOT	Г B4
Temperature	2	2.6°	С						Relative Humidity			56.3%	
Pressure	9	60h	Pa						Test Voltage			DC 5V b	y adapter
Test Mode	st Mode Mode			Mode 1					Antenna Polarity		Vertical		
72.0	dBuV	dBuV/m											
32	adreew			444	*	Solution of the second se	haft berned triby any barrow	undada	made	unin frakulturia Alapha		Limit: - Margin: -	
-8 30.0	000	40	50	60 7	0 80		(MH2)	Mar		300 40	0 500 6	00 700 10	
	No.	Mk	. F	Freq.		ading evel	Correct Factor		asure ent	- Limit	Over		
				MHz	C	BuV	dB	dBu	uV/m	dBuV/r	n dB	Detector	_
	1		74.	1351	1	2.11	16.96	29	.07	40.00	-10.93	peak	_
	2		94.	7601	1	6.54	14.91	31	.45	43.50	-12.05	peak	_
	3		100.	2286	1	7.83	14.24	32	.07	43.50	-11.43	peak	-
	4		457.	5073		6.42	25.31	31	.73	46.00	-14.27	peak	_
	5		721.	7259		5.72	28.64	34	.36	46.00	-11.64	peak	-
	6	*	938.	8326		5.41	30.84	36	.25	46.00	-9.75	peak	-
													_

#### RESULT: Pass

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. All test modes had been pre-tested. The mode 1 is the worst case and recorded in the report.



# Radiated Emissions Test Results Above 1GHz (Prototype1)

EUT Name	Smart Label Printer				el Name	NIIMBO	NIIMBOT B4	
Temperature	<b>22.6</b> ℃	22.6°C				56.3%	56.3%	
Pressure	960hPa			Test Voltage		DC 5V	DC 5V by adapter	
Test Mode	Mode 1			Ante	nna Polarity	Horizor	ntal	
Frequency	Meter Reading	Factor	Emission	Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/	′m)	(dBµV/m)	(dB)	value Type	
4804.000	47.53	0.08	47.6	1	74	-26.39	peak	
4804.000	38.45	0.08	38.53	3	54	-15.47	AVG	
7206.000	42.16	2.21	44.37	7	74	-29.63	peak	
7206.000	31.36	2.21	33.57	7	54	-20.43	AVG	
Remark:								
Factor = Ante	nna Factor + Cable	e Loss – Pre-	amplifier.					
			Model Name					
EUT Name	Smart Label	Printer		Mode	el Name	NIIMBO	OT B4	
	Smart Label	Printer			el Name ive Humidity	NIIMB0	OT B4	
Temperature		Printer		Relat		56.3%	DT B4	
EUT Name Temperature Pressure Test Mode	22.6°C	Printer		Relat Test	ive Humidity	56.3%	by adapter	
Temperature Pressure Test Mode	22.6°C 960hPa Mode 1		Emionica	Relat Test <sup>v</sup> Anter	ive Humidity Voltage nna Polarity	56.3% DC 5V Vertica	by adapter	
Temperature Pressure Test Mode Frequency	22.6°C 960hPa Mode 1 Meter Reading	Factor	Emission	Relat	voltage	56.3% DC 5V Vertica Margin	by adapter	
Temperature Pressure Test Mode Frequency (MHz)	22.6°C 960hPa Mode 1 Meter Reading (dBµV)	Factor (dB)	(dBµV/	Relat Test <sup>v</sup> Anter Level (m)	tive Humidity Voltage nna Polarity Limits (dBµV/m)	56.3% DC 5V Vertica Margin (dB)	by adapter	
Temperature Pressure Test Mode Frequency (MHz) 4804.000	22.6°C 960hPa Mode 1 Meter Reading (dBµV) 47.26	Factor (dB) 0.08	(dBµV/ 47.34	Relat Test <sup>v</sup> Anter Level (m) 4	tive Humidity Voltage nna Polarity Limits (dBµV/m) 74	56.3% DC 5V Vertica Margin (dB) -26.66	by adapter I Value Type peak	
Temperature Pressure Test Mode Frequency (MHz) 4804.000 4804.000	22.6°C 960hPa Mode 1 Meter Reading (dBµV) 47.26 38.49	Factor (dB) 0.08 0.08	(dBµV/ 47.34 38.57	Relat Test <sup>v</sup> Anter Level (m) 4 7	Limits (dBµV/m) 74 54	56.3% DC 5V Vertica Margin (dB) -26.66 -15.43	by adapter I Value Type peak AVG	
Temperature           Pressure           Test Mode           Frequency           (MHz)           4804.000           4804.000           7206.000	22.6°C 960hPa Mode 1 Meter Reading (dBµV) 47.26 38.49 42.33	Factor (dB) 0.08 0.08 2.21	(dBµV/ 47.34 38.55 44.54	Relat Test V Anter Level (m) 4 4 4	tive Humidity Voltage nna Polarity Limits (dBµV/m) 74 54 74	56.3% DC 5V Vertica Margin (dB) -26.66 -15.43 -29.46	by adapter I Value Type peak AVG peak	
Frequency           (MHz)           4804.000           4804.000	22.6°C 960hPa Mode 1 Meter Reading (dBµV) 47.26 38.49	Factor (dB) 0.08 0.08	(dBµV/ 47.34 38.57	Relat Test V Anter Level (m) 4 4 4	Limits (dBµV/m) 74 54	56.3% DC 5V Vertica Margin (dB) -26.66 -15.43	by adapter I Value Type peak AVG	
Temperature           Pressure           Test Mode           Frequency           (MHz)           4804.000           4804.000           7206.000           7206.000	22.6°C 960hPa Mode 1 Meter Reading (dBµV) 47.26 38.49 42.33	Factor (dB) 0.08 0.08 2.21	(dBµV/ 47.34 38.55 44.54	Relat Test V Anter Level (m) 4 4 4	tive Humidity Voltage nna Polarity Limits (dBµV/m) 74 54 74	56.3% DC 5V Vertica Margin (dB) -26.66 -15.43 -29.46	by adapter I Value Type peak AVG peak	
Temperature Pressure Test Mode Frequency (MHz) 4804.000 4804.000 7206.000 7206.000	22.6°C 960hPa Mode 1 Meter Reading (dBµV) 47.26 38.49 42.33	Factor (dB) 0.08 0.08 2.21 2.21	(dBµV/ 47.34 38.57 44.54 33.48	Relat Test V Anter Level (m) 4 4 4	tive Humidity Voltage nna Polarity Limits (dBµV/m) 74 54 74	56.3% DC 5V Vertica Margin (dB) -26.66 -15.43 -29.46	by adapter I Value Type peak AVG peak	

#### **RESULT: Pass**



EU	T Name	Smart Label		Mode	el Name	NIIMBO	NIIMBOT B4	
Ter	nperature	<b>22.6</b> ℃			Relative Humidity		56.3%	
Pre	ssure	960hPa	960hPa				DC 5V by adapter	
Tes	t Mode	Mode 2	Mode 2				Horizor	ntal
	Frequency	Meter Reading	eading Factor		n Level	Limits	Margin	Value Type
	(MHz)	(dBµV)	(dB)	(dBµV/	/m)	(dBµV/m)	(dB)	value Type
	4882.000	46.53	0.14	46.6	37	74	-27.33	peak
	4882.000	37.19	0.14	37.3	3	54	-16.67	AVG
	7323.000	42.53	2.36	44.8	9	74	-29.11	peak
	7323.000	31.25	2.36	33.6	1	54	-20.39	AVG
	Remark:							
	Easter - Antor	wa Fastan I Cabla						
		nna Factor + Cable	e Loss – Pre-	amplifier.				
EU.	<b>Factor – Anter</b>	Smart Label		amplifier.	Mode	el Name	NIIMBO	DT B4
				amplifier.		el Name	NIIMB0	 DT B4
Ten	T Name	Smart Label			Relat		56.3%	DT B4
Ten Pre	Г Name nperature	Smart Label 22.6℃			Relat Test	ive Humidity	56.3%	by adapter
Ten Pre	Γ Name nperature ssure t Mode	Smart Label 22.6℃ 960hPa Mode 2	Printer		Relat	ive Humidity Voltage nna Polarity	56.3% DC 5V Vertica	by adapter
Ten Pre	T Name nperature ssure t Mode Frequency	Smart Label 22.6℃ 960hPa Mode 2 Meter Reading	Printer	Emission	Relat	voltage	56.3% DC 5V Vertica Margin	by adapter
Ten Pre	T Name nperature ssure t Mode Frequency (MHz)	Smart Label 22.6℃ 960hPa Mode 2 Meter Reading (dBµV)	Printer Factor (dB)	Emission (dBµV/	Relat Test <sup>v</sup> Anter h Level /m)	tive Humidity Voltage nna Polarity Limits (dBµV/m)	56.3% DC 5V Vertica Margin (dB)	by adapter
Ten Pre	T Name nperature ssure t Mode Frequency (MHz) 4882.000	Smart Label 22.6℃ 960hPa Mode 2 Meter Reading (dBµV) 47.54	Printer Factor (dB) 0.14	Emission (dBµV) 47.6	Relat Test Anter Level /m) 8	tive Humidity Voltage nna Polarity Limits (dBµV/m) 74	56.3% DC 5V Vertica Margin (dB) -26.32	by adapter
Ten Pre	T Name  perature ssure t Mode  Frequency (MHz) 4882.000	Smart Label           22.6 °C           960hPa           Mode 2           Meter Reading           (dBµV)           47.54           37.66	Printer Factor (dB) 0.14 0.14	Emission (dBµV/ 47.6 37.8	Relat Test Anter Level /m) 8 3	tive Humidity Voltage nna Polarity Limits (dBµV/m) 74 54	56.3% DC 5V Vertica Margin (dB) -26.32 -16.2	by adapter
Ten Pre	T Name nperature ssure t Mode Frequency (MHz) 4882.000 4882.000 7323.000	Smart Label         22.6 °C         960hPa         Mode 2         Meter Reading         (dBµV)         47.54         37.66         42.18	Printer Factor (dB) 0.14 0.14 2.36	Emission (dBµV/ 47.6 37.8 44.5	Relat	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74 54 74	56.3% DC 5V Vertica Margin (dB) -26.32 -16.2 -29.46	by adapter
Ten Pre	T Name  perature ssure t Mode  Frequency (MHz) 4882.000	Smart Label           22.6 °C           960hPa           Mode 2           Meter Reading           (dBµV)           47.54           37.66	Printer Factor (dB) 0.14 0.14	Emission (dBµV/ 47.6 37.8	Relat	tive Humidity Voltage nna Polarity Limits (dBµV/m) 74 54	56.3% DC 5V Vertica Margin (dB) -26.32 -16.2	by adapter
Ten Pre	T Name nperature ssure t Mode Frequency (MHz) 4882.000 4882.000 7323.000	Smart Label         22.6 °C         960hPa         Mode 2         Meter Reading         (dBµV)         47.54         37.66         42.18	Printer Factor (dB) 0.14 0.14 2.36	Emission (dBµV/ 47.6 37.8 44.5	Relat	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74 54 74	56.3% DC 5V Vertica Margin (dB) -26.32 -16.2 -29.46	by adapter
Ten Pre	F Name           nperature           ssure           t Mode           Frequency           (MHz)           4882.000           7323.000           7323.000	Smart Label         22.6 °C         960hPa         Mode 2         Meter Reading         (dBµV)         47.54         37.66         42.18	Printer Factor (dB) 0.14 0.14 2.36	Emission (dBµV/ 47.6 37.8 44.5	Relat	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74 54 74	56.3% DC 5V Vertica Margin (dB) -26.32 -16.2 -29.46	by adapter
Ten Pre	T Name nperature ssure t Mode Frequency (MHz) 4882.000 4882.000 7323.000 7323.000 7323.000 Remark:	Smart Label         22.6 °C         960hPa         Mode 2         Meter Reading         (dBµV)         47.54         37.66         42.18	Printer Factor (dB) 0.14 0.14 2.36 2.36	Emission (dBµV/ 47.6 37.8 44.5 33.6	Relat	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74 54 74	56.3% DC 5V Vertica Margin (dB) -26.32 -16.2 -29.46	by adapter

#### **RESULT: Pass**



# Radiated Emissions Test Results for Above 1GHz (Prototype1)

EUT Name	Smart Label I	Printer	Model	Name	NIIMBO	NIIMBOT B4	
Temperature	<b>22.6</b> ℃		Relati	ve Humidity	56.3%	56.3%	
Pressure	ure 960hPa Test Voltage			/oltage	DC 5V by adapter		
Test Mode	Mode 3		Anten	Antenna Polarity		al	
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
4960.000	47.53	0.22	47.75	74	-26.25	peak	
4960.000	37.59	0.22	37.81	54	-16.19	AVG	
7440.000	42.34	2.64	44.98	74	-29.02	peak	
7440.000	31.56	2.64	34.2	54	-19.8	AVG	
Remark:							
Factor = Ante	enna Factor + Cable	e Loss – Pre-	amplifier.				
EUT Name	enna Factor + Cable Smart Label I			Name	NIIMBO	Т В4	
			Model	Name ve Humidity	NIIMBO	Т В4	
EUT Name	Smart Label		Model Relati		56.3%	T B4 y adapter	
EUT Name Temperature	Smart Label		Model Relati Test V	ve Humidity	56.3%		
EUT Name Temperature Pressure Test Mode	Smart Label I 22.6°C 960hPa Mode 3	Printer	Model Relati Test V Anten	ve Humidity /oltage na Polarity	56.3% DC 5V b Vertical		
EUT Name Temperature Pressure Test Mode	Smart Label I 22.6℃ 960hPa Mode 3 Meter Reading	Printer	Model Relati Test V Anten Emission Level	ve Humidity /oltage na Polarity Limits	56.3% DC 5V b Vertical		
EUT Name Temperature Pressure Test Mode Frequency (MHz)	Smart Label I 22.6℃ 960hPa Mode 3 Meter Reading (dBµV)	Printer Factor (dB)	Model Relati Test V Anten Emission Level (dBµV/m)	ve Humidity foltage na Polarity Limits (dBµV/m)	56.3% DC 5V b Vertical Margin (dB)	y adapter Value Type	
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000	Smart Label I         22.6 °C         960hPa         Mode 3         Meter Reading         (dBµV)         47.52	Printer Factor (dB) 0.22	Model Relati Test V Anten Emission Level (dBµV/m) 47.74	ve Humidity foltage na Polarity Limits (dBµV/m) 74	56.3% DC 5V b Vertical Margin (dB) -26.26	y adapter Value Type peak	
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000 4960.000	Smart Label I           22.6 °C           960hPa           Mode 3           Meter Reading           (dBµV)           47.52           38.54	Printer Factor (dB) 0.22 0.22	Model Relati Test V Anten Emission Level (dBµV/m) 47.74 38.76	ve Humidity foltage na Polarity Limits (dBµV/m) 74 54	56.3% DC 5V b Vertical Margin (dB) -26.26 -15.24	y adapter Value Type peak AVG	
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000 4960.000 7440.000	Smart Label I         22.6 °C         960hPa         Mode 3         Meter Reading         (dBµV)         47.52         38.54         42.94	Printer Factor (dB) 0.22 0.22 2.64	Model Relati Test V Anten Emission Level (dBµV/m) 47.74 38.76 45.58	ve Humidity foltage na Polarity Limits (dBµV/m) 74 54 74	56.3% DC 5V b Vertical Margin (dB) -26.26 -15.24 -28.42	y adapter Value Type peak AVG peak	
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000 4960.000	Smart Label I           22.6 °C           960hPa           Mode 3           Meter Reading           (dBµV)           47.52           38.54	Printer Factor (dB) 0.22 0.22	Model Relati Test V Anten Emission Level (dBµV/m) 47.74 38.76	ve Humidity foltage na Polarity Limits (dBµV/m) 74 54	56.3% DC 5V b Vertical Margin (dB) -26.26 -15.24	y adapter Value Type peak AVG	
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000 4960.000 7440.000	Smart Label I 22.6 ℃ 960hPa Mode 3 Meter Reading (dBµV) 47.52 38.54 42.94	Printer Factor (dB) 0.22 0.22 2.64	Model Relati Test V Anten Emission Level (dBµV/m) 47.74 38.76 45.58	ve Humidity foltage na Polarity Limits (dBµV/m) 74 54 74	56.3% DC 5V b Vertical Margin (dB) -26.26 -15.24 -28.42	y adapter Value Type peak AVG peak	
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000 4960.000 7440.000 7440.000	Smart Label I 22.6 ℃ 960hPa Mode 3 Meter Reading (dBµV) 47.52 38.54 42.94	Printer Factor (dB) 0.22 0.22 2.64 2.64	Model           Relati           Test V           Anten           Emission Level           (dBµV/m)           47.74           38.76           45.58           34.23	ve Humidity foltage na Polarity Limits (dBµV/m) 74 54 74	56.3% DC 5V b Vertical Margin (dB) -26.26 -15.24 -28.42	y adapter Value Type peak AVG peak	

#### **RESULT: Pass**



# Radiated Emissions Test Results Above 1GHz (Prototype2)

EUT Name	Smart Label	Smart Label Printer				NIIMBO	NIIMBOT B4	
Temperature	<b>22.6</b> ℃			Relative Humidity		56.3%	56.3%	
Pressure	ssure 960hPa			Test Voltage		DC 5V b	DC 5V by adapter	
Test Mode	Mode 1			Antenna Polarity		Horizon	tal	
Frequency	Meter Reading	Factor	Emission	on Level Limits		Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/r	m)	(dBµV/m)	(dB)	value Type	
4804.000	46.89	0.08	46.97	7	74	-27.03	peak	
4804.000	37.12	0.08	37.2		54	-16.8	AVG	
7206.000	42.07	2.21	44.28	3	74	-29.72	peak	
7206.000	31.53	2.21	33.74	Ļ	54	-20.26	AVG	
Remark:								
Factor = Anter	nna Factor + Cabl	e Loss – Pre-	amplifier.					
EUT Name	Smart Label	Printer		Model Name		NIIMBOT B4		
Temperature	<b>22.6</b> ℃			Relative Humidity		56.3%		
Pressure	960hPa	960hPa			Test Voltage		by adapter	
Test Mode	Mode 1	Mode 1			na Polarity	Vertical		
<b>Fragman</b> au	Matar Dagding	Fastar	<b>E</b> mission	Laval	Linsite	Manain		
Frequency (MHz)	Meter Reading (dBµV)	Factor (dB)	Emission (dBµV/r		Limits (dBµV/m)	Margin (dB)	Value Type	
4804.000	(dBµV) 46.32	(ub) 0.08	(uBµV/i 46.4	,	(ubµv/iii) 74	-27.6	peak	
4804.000	37.42	0.08	37.5		54	-27.6	AVG	
7206.000	41.35	2.21	43.56		74	-30.44	peak	
7206.000	32.48	2.21	34.69		54	-30.44	AVG	
7200.000	02.40	2.21	54.08	,	<u> </u>	-10.01	,,,,,,	
Remark:								

# **RESULT: Pass**



EUT Name	Smart Label		Mode	I Name	NIIMBO	NIIMBOT B4	
Temperature	<b>22.6</b> ℃			Relative Humidity		56.3%	
Pressure	960hPa		Test Voltage		DC 5V by adapter		
Test Mode	Mode 2			Antenna Polarity		Horizor	ntal
Frequency	Meter Reading	ling Factor E		on Level Limits		Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/	//m) (dBµV/m)		(dB)	value Type
4882.000	47.58	0.14	47.72	72 74	-26.28	peak	
4882.000	38.42	0.14	38.5	6	54	-15.44	AVG
7323.000	41.53	2.36	43.8	9	74	-30.11	peak
7323.000	32.98	2.36	35.3	4	54	-18.66	AVG
Remark:							
	nna Factor + Cable	e Loss – Pre-	amplifier.				
	nna Factor + Cable Smart Label		amplifier.	Mode	I Name	NIIMBO	DT B4
Factor = Ante			amplifier.		el Name ive Humidity	NIIMB0 56.3%	DT B4
Factor = Ante EUT Name Temperature	Smart Label		amplifier.	Relat		56.3%	DT B4
Factor = Ante EUT Name Temperature Pressure	Smart Label		amplifier.	Relat	ive Humidity	56.3%	by adapter
Factor = Ante	Smart Label 22.6°C 960hPa Mode 2	Printer		Relat Test V Anter	ive Humidity Voltage nna Polarity	56.3% DC 5V Vertica	by adapter
Factor = Ante	Smart Label 22.6°C 960hPa Mode 2 Meter Reading	Printer Factor	Emission	Relat Test V Anter	ive Humidity Voltage nna Polarity Limits	56.3% DC 5V Vertica Margin	by adapter
Factor = Ante	Smart Label 22.6℃ 960hPa Mode 2 Meter Reading (dBµV)	Printer Factor (dB)	Emission (dBµV/	Relat Test V Anter	ive Humidity Voltage nna Polarity Limits (dBµV/m)	56.3% DC 5V Vertica Margin (dB)	by adapter I Value Type
Factor = Ante         EUT Name         Temperature         Pressure         Test Mode         Frequency         (MHz)         4882.000	Smart Label 22.6°C 960hPa Mode 2 Meter Reading (dBµV) 48.65	Printer Factor (dB) 0.14	Emission (dBµV/ 48.7	Relat Test V Anter	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74	56.3% DC 5V Vertica Margin (dB) -25.21	by adapter I Value Type peak
Factor = Ante         EUT Name         Temperature         Pressure         Test Mode         Frequency         (MHz)         4882.000         4882.000	Smart Label           22.6 ℃           960hPa           Mode 2           Meter Reading           (dBµV)           48.65           37.54	Printer Factor (dB) 0.14 0.14	Emission (dBµV/ 48.7 37.6	Relat Test V Anter Level /m) 9 8	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74 54	56.3% DC 5V Vertica Margin (dB) -25.21 -16.32	by adapter I Value Type peak AVG
Factor = Ante         EUT Name         Temperature         Pressure         Test Mode         Frequency         (MHz)         4882.000         4882.000         7323.000	Smart Label 22.6°C 960hPa Mode 2 Meter Reading (dBµV) 48.65 37.54 42.53	Printer Factor (dB) 0.14 0.14 2.36	Emission (dBµV/ 48.79 37.60 44.81	Relat Test V Anter h Level /m) 9 8 9	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74	56.3% DC 5V Vertica Margin (dB) -25.21 -16.32 -29.11	by adapter I Value Type peak
Factor = Ante         EUT Name         Temperature         Pressure         Test Mode         Frequency         (MHz)         4882.000         4882.000	Smart Label           22.6 ℃           960hPa           Mode 2           Meter Reading           (dBµV)           48.65           37.54	Printer Factor (dB) 0.14 0.14	Emission (dBµV/ 48.7 37.6	Relat Test V Anter h Level /m) 9 8 9	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74 54 74	56.3% DC 5V Vertica Margin (dB) -25.21 -16.32	by adapter I Value Type peak AVG peak
Factor = Ante         EUT Name         Temperature         Pressure         Test Mode         Frequency         (MHz)         4882.000         4882.000         7323.000	Smart Label 22.6°C 960hPa Mode 2 Meter Reading (dBµV) 48.65 37.54 42.53	Printer Factor (dB) 0.14 0.14 2.36	Emission (dBµV/ 48.79 37.60 44.81	Relat Test V Anter h Level /m) 9 8 9	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74 54 74	56.3% DC 5V Vertica Margin (dB) -25.21 -16.32 -29.11	by adapter I Value Type peak AVG peak
Factor = Ante           EUT Name           Temperature           Pressure           Test Mode           Frequency           (MHz)           4882.000           7323.000	Smart Label 22.6°C 960hPa Mode 2 Meter Reading (dBµV) 48.65 37.54 42.53	Printer Factor (dB) 0.14 0.14 2.36	Emission (dBµV/ 48.79 37.60 44.81	Relat Test V Anter h Level /m) 9 8 9	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74 54 74	56.3% DC 5V Vertica Margin (dB) -25.21 -16.32 -29.11	by adapter I Value Type peak AVG peak

#### **RESULT: Pass**



# Radiated Emissions Test Results for Above 1GHz (Prototype2)

EUT	Name	Smart Label F	Printer	Model	Name	NIIMBOT B4		
Tem	perature	<b>22.6</b> ℃		Relativ	Relative Humidity Test Voltage		56.3%	
Pres	sure	960hPa		Test V			y adapter	
Test Mode		Mode 3		Anten	Antenna Polarity		al	
	Frequency	Meter Reading	Factor	Emission Level	on Level Limits		Value Type	
	(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
	4960.000	47.56	0.22	47.78	74	-26.22	peak	
Γ	4960.000	37.54	0.22	37.76	54	-16.24	AVG	
	7440.000	42.19	2.64	44.83	74	-29.17	peak	
F	7440.000	31.25	2.64	33.89	54	-20.11	AVG	
-								
L		1					1	
	Remark:	· ·						
-		nna Factor + Cable	e Loss – Pre-	amplifier.				
[		nna Factor + Cable			Name	NIIMBO	 T B4	
EUT	Factor = Anter	· · ·		Model	Name ve Humidity	NIIMBO	T B4	
EUT Tem	Factor = Anter	Smart Label F		Model		56.3%	T B4	
EUT Tem Pres	Factor = Anter Name perature	Smart Label F		Model Relativ Test V	ve Humidity	56.3%		
EUT Tem Pres	Factor = Anter Name perature ssure Mode	Smart Label F 22.6°C 960hPa Mode 3	Printer	Model Relativ Test V Anten	ve Humidity oltage na Polarity	56.3% DC 5V b Vertical		
EUT Tem Pres	Factor = Anter Name perature ssure Mode Frequency	Smart Label F 22.6°C 960hPa Mode 3 Meter Reading	Printer	Model Relativ Test V Anten Emission Level	ve Humidity foltage na Polarity Limits	56.3% DC 5V b Vertical		
EUT Tem Pres	Factor = Anter Name perature ssure Mode Frequency (MHz)	Smart Label F 22.6°C 960hPa Mode 3 Meter Reading (dBµV)	Printer Factor (dB)	Model Relativ Test V Anten Emission Level (dBµV/m)	ve Humidity foltage na Polarity Limits (dBµV/m)	56.3% DC 5V b Vertical Margin (dB)	vy adapter Value Type	
EUT Tem Pres	Factor = Anter Name perature ssure Mode Frequency (MHz) 4960.000	Smart Label F           22.6 °C           960hPa           Mode 3           Meter Reading           (dBµV)           46.98	Printer Factor (dB) 0.22	Model Relativ Test V Anten Emission Level (dBµV/m) 47.2	ve Humidity /oltage na Polarity Limits (dBµV/m) 74	56.3% DC 5V b Vertical Margin (dB) -26.8	v adapter Value Type peak	
EUT Tem Pres	Factor = Anter Name perature ssure Mode Frequency (MHz) 4960.000	Smart Label F           22.6°C           960hPa           Mode 3           Meter Reading           (dBµV)           46.98           37.43	Printer Factor (dB) 0.22 0.22	Model Relativ Test V Anten Emission Level (dBµV/m) 47.2 37.65	ve Humidity foltage na Polarity Limits (dBµV/m) 74 54	56.3% DC 5V b Vertical Margin (dB) -26.8 -16.35	vy adapter Value Type peak AVG	
EUT Tem Pres	Factor = Anter Name perature sure Mode Frequency (MHz) 4960.000 4960.000 7440.000	Smart Label F         22.6 °C         960hPa         Mode 3         Meter Reading         (dBµV)         46.98         37.43         42.35	Printer Factor (dB) 0.22 0.22 2.64	Model           Relative           Test V           Anten           Emission Level           (dBµV/m)           47.2           37.65           44.99	ve Humidity foltage na Polarity Limits (dBµV/m) 74 54 74	56.3% DC 5V b Vertical Margin (dB) -26.8 -16.35 -29.01	vy adapter Value Type peak AVG peak	
EUT Tem Pres	Factor = Anter Name perature ssure Mode Frequency (MHz) 4960.000	Smart Label F           22.6°C           960hPa           Mode 3           Meter Reading           (dBµV)           46.98           37.43	Printer Factor (dB) 0.22 0.22	Model Relativ Test V Anten Emission Level (dBµV/m) 47.2 37.65	ve Humidity foltage na Polarity Limits (dBµV/m) 74 54	56.3% DC 5V b Vertical Margin (dB) -26.8 -16.35	vy adapter Value Type peak AVG	
EUT Tem Pres	Factor = Anter Name perature sure Mode Frequency (MHz) 4960.000 4960.000 7440.000	Smart Label F         22.6 °C         960hPa         Mode 3         Meter Reading         (dBµV)         46.98         37.43         42.35	Printer Factor (dB) 0.22 0.22 2.64	Model           Relative           Test V           Anten           Emission Level           (dBµV/m)           47.2           37.65           44.99	ve Humidity foltage na Polarity Limits (dBµV/m) 74 54 74	56.3% DC 5V b Vertical Margin (dB) -26.8 -16.35 -29.01	vy adapter Value Type peak AVG peak	
EUT Tem Pres Test	Factor = Anter Name perature sure Mode Frequency (MHz) 4960.000 4960.000 7440.000	Smart Label F         22.6 °C         960hPa         Mode 3         Meter Reading         (dBµV)         46.98         37.43         42.35	Printer Factor (dB) 0.22 0.22 2.64	Model           Relative           Test V           Anten           Emission Level           (dBµV/m)           47.2           37.65           44.99	ve Humidity foltage na Polarity Limits (dBµV/m) 74 54 74	56.3% DC 5V b Vertical Margin (dB) -26.8 -16.35 -29.01	vy adapter Value Type peak AVG peak	

#### **RESULT: Pass**

Note:

- 1. The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.



EUT Name	Smart Label Printer	Model Name	NIIMBOT B4
Temperature	<b>26</b> ℃	Relative Humidity	50%
Pressure	960hPa	Test Voltage	DC 5V by adapter
Test Mode	Mode 7	Antenna Polarity	Horizontal

Band Edge Emission Test Results for Restricted Bands (Prototype1)

Test Graph for Peak Measurement



Test Graph for Average Measurement



# **RESULT: Pass**



EUT Name	Smart Label Printer	Model Name	NIIMBOT B4
Temperature	<b>26</b> ℃	Relative Humidity	50%
Pressure	960hPa	Test Voltage	DC 5V by adapter
Test Mode	Mode 7	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement




## **RESULT: Pass**




EUT Name	Smart Label Printer	Model Name	NIIMBOT B4
Temperature	<b>26</b> °C	Relative Humidity	50%
Pressure	960hPa	Test Voltage	DC 5V by adapter
Test Mode	Mode 9	Antenna Polarity	Horizontal

Test Graph for Peak Measurement

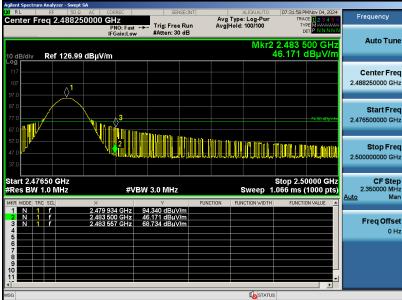

Test Graph for Average Measurement

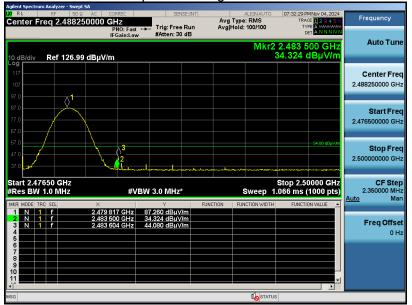


## **RESULT: Pass**




EUT Name	Smart Label Printer	Model Name	NIIMBOT B4
Temperature	<b>26</b> ℃	Relative Humidity	50%
Pressure	960hPa	Test Voltage	DC 5V by adapter
Test Mode	Mode 9	Antenna Polarity	Vertical

Test Graph for Peak Measurement

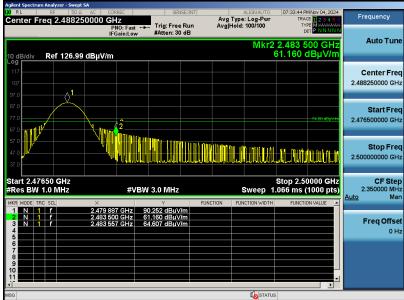

Test Graph for Average Measurement

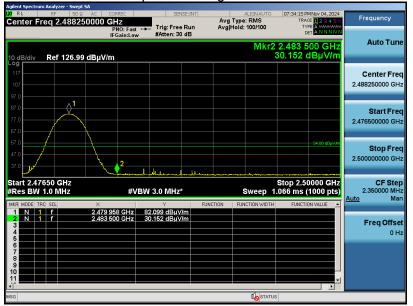


## **RESULT: Pass**



EUT Name	Smart Label Printer	Model Name	NIIMBOT B4
Temperature	<b>26</b> ℃	Relative Humidity	50%
Pressure	960hPa	Test Voltage	DC 5V by adapter
Test Mode	Mode 7	Antenna Polarity	Horizontal

Test Graph for Peak Measurement

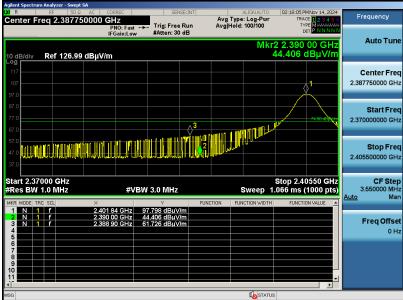

Test Graph for Average Measurement



# **RESULT: Pass**



	-	•	
EUT Name	Smart Label Printer	Model Name	NIIMBOT B4
Temperature	<b>26</b> ℃	Relative Humidity	50%
Pressure	960hPa	Test Voltage	DC 5V by adapter
Test Mode	Mode 7	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement



# **RESULT: Pass**



EUT Name	Smart Label Printer	Model Name	NIIMBOT B4
Temperature	<b>26</b> °C	Relative Humidity	50%
Pressure	960hPa	Test Voltage	DC 5V by adapter
Test Mode	Mode 9	Antenna Polarity	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement



## **RESULT: Pass**



EUT Name	Smart Label Printer	Model Name	NIIMBOT B4
Temperature	<b>26</b> ℃	Relative Humidity	50%
Pressure	960hPa	Test Voltage	DC 5V by adapter
Test Mode	Mode 9	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement



#### **RESULT: Pass**

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.



# **10. Number of Hopping Frequency Measurement**

## **10.1 Provisions Applicable**


This frequency hopping system must employ a minimum of 15 hopping channels.

## **10.2 Measurement Procedure**

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- 1. Span = The frequency band of operation. Depending on the number of channels the device
- 2. supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- 3. RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- 4. VBW  $\geq$  RBW
- 5. Sweep time = Auto couple
- 6. Detector = Peak
- 7. Trace mode = Max hold
- 8. Allow the trace to stabilize

## 10.3 Measurement Setup (Block Diagram of Configuration)

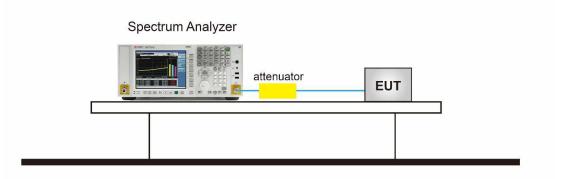

#### **10.4 Measurement Result**

Note: Please refer to the Bluetooth module RF report No.: (AGC07434240809FR01)



# 11. Time of Occupancy (Dwell Time) Measurement

### **11.1 Provisions Applicable**


The maximum permissible time of occupancy is 400ms within a period of 400ms multiplied by the number of hopping channels employed.

## **11.2 Measurement Procedure**

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- 1. Span = Zero span, centered on a hopping channel.
- 2. RBW shall be  $\leq$  channel spacing and where possible RBW should be set >> 1 / T, where T is the expected dwell time per channel.
- 3. VBW  $\geq$  RBW
- 4. Sweep time = As necessary to capture the entire dwell time per hopping channel
- 5. Detector = Peak
- 6. Trace mode = Free Run
- 7. Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time. An oscilloscope may be used instead of a spectrum analyzer. The EUT shall show compliance with the appropriate regulatory limit for the number of hopping channels. A plot of the data shall be included in the test report.

## 11.3 Measurement Setup (Block Diagram of Configuration)

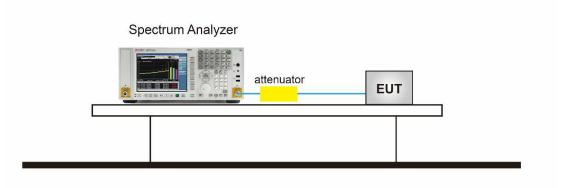

## **11.4 Measurement Result**

Note: Please refer to the Bluetooth module RF report No.: (AGC07434240809FR01)



## **12. Frequency Separation Measurement**

### **12.1 Provisions Applicable**

When the power is less than 0.125W: The minimum permissible channel separation for this system is 2/3 the value of the 20dB BW.


When the power is less than 1W: The minimum permissible channel separation for this system is 20dB BW.

### **12.2 Measurement Procedure**

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- 1. Span: Wide enough to capture the peaks of two adjacent channels.
- 2. RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- 3. Video (or average) bandwidth (VBW)  $\geq$  RBW.
- 4. Sweep: Auto.
- 5. Detector function: Peak.
- 6. Trace: Max hold. g) Allow the trace to stabilize.
- 7. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

## 12.3 Measurement Setup (Block Diagram of Configuration)

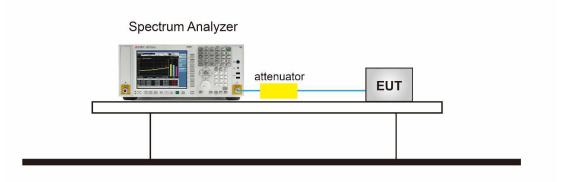

#### **12.4 Measurement Result**

Note: Please refer to the Bluetooth module RF report No.: (AGC07434240809FR01)



# **13. AC Power Line Conducted Emission Test**

## 13.1 Measurement Limit


Frequency	Maximum RF	Line Voltage
Frequency	Q.P. (dBµV)	Average (dBµV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

## 13.2 Measurement Setup (Block Diagram of Configuration)

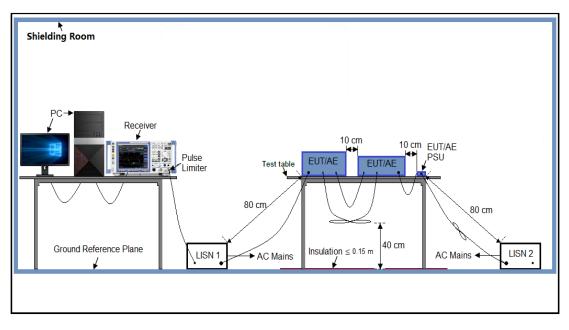



## **13.3 Preliminary Procedure of Line Conducted Emission Test**

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

## **13.4 Final Procedure of Line Conducted Emission Test**

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

## **13.5 Measurement Results**



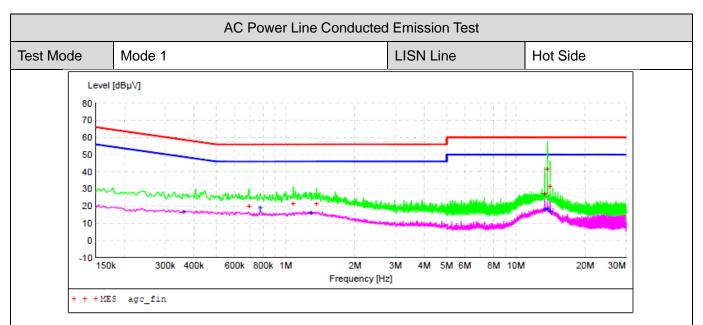


## MEASUREMENT RESULT: "agc\_fin"

2024/10/23 23	:52					
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.694000 1.078000 1.362000 13.314000 13.686000 14.062000	20.10 21.50 21.30 27.40 41.50 31.70	6.2 6.2 6.8 6.8 6.8	56 56 60 60	35.9 34.5 34.7 32.6 18.5 28.3	QP QP QP	L1 L1 L1 L1 L1 L1


## MEASUREMENT RESULT: "agc\_fin2"

2024/10/23 23 Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line
0.362000	16.70	6.1	49	32.0	AV	L1
0.774000	19.10	6.2	46	26.9	AV	L1
1.286000	16.10	6.2	46	29.9	AV	L1
13.314000	18.20	6.8	50	31.8	AV	L1
13.690000	18.80	6.8	50	31.2	AV	L1
14.066000	17.20	6.8	50	32.8	AV	L1





2

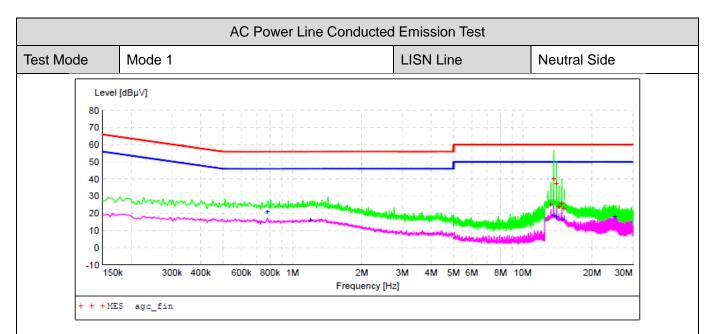

#### MEASUREMENT RESULT: "agc\_fin"

024/10/24 0:08							
quency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	
226000	25.30	6.8	60	34.7	QP	N	
610000	40.10	6.8	60	19.9	QP	N	
986000	37.40	6.8	60	22.6	QP	N	
362000	23.90	6.8	60	36.1	QP	N	
742000	25.90	6.8	60	34.1	QP	N	
118000	22.80	6.9	60	37.2	QP	N	
	quency MHz 226000 610000 986000 362000 742000	quency         Level           MHz         dBµV           226000         25.30           610000         40.10           986000         37.40           362000         23.90           742000         25.90	quency         Level         Transd           MHz         dBµV         dB           226000         25.30         6.8           610000         40.10         6.8           986000         37.40         6.8           362000         23.90         6.8           742000         25.90         6.8	quency         Level         Transd         Limit           MHz         dBµV         dB         dBµV           226000         25.30         6.8         60           610000         40.10         6.8         60           986000         37.40         6.8         60           362000         23.90         6.8         60           742000         25.90         6.8         60	quency MHzLevel dBµVTransd dBLimit dBµVMargin dB22600025.306.86034.761000040.106.86019.998600037.406.86022.636200023.906.86036.174200025.906.86034.1	quency         Level         Transd         Limit         Margin         Detector           MHz         dBµV         dB         dBµV         dB         dBµV         dB           226000         25.30         6.8         60         34.7         QP           610000         40.10         6.8         60         19.9         QP           986000         37.40         6.8         60         22.6         QP           362000         23.90         6.8         60         36.1         QP           742000         25.90         6.8         60         34.1         QP	

#### MEASUREMENT RESULT: "agc\_fin2"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.778000	21.00	6.2	46	25.0	AV	N
1.198000	16.30	6.2	46	29.7	AV	N
13.606000	18.90	6.8	50	31.1	AV	N
13.986000	18.40	6.8	50	31.6	AV	N
14.742000	16.60	6.8	50	33.4	AV	N
25.122000	18.00	8.0	50	32.0	AV	N



Report No.: AGC07434241006FR01 Page 51 of 51

# Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC07434241006AP02

# Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC07434241006AP03

-----End of Report-----



## Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.