

FCC TAS validation – Part 2: Tests under dynamic transmit power scenarios

FCC ID : 2AFZZPC0AG
Equipment : Mobile Phone
Brand Name : POCO
Model Name : 2412DPC0AG
Applicant : Xiaomi Communications Co., Ltd.
#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road,
Haidian District, Beijing, China, 100085
Manufacturer : Xiaomi Communications Co., Ltd.
#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road,
Haidian District, Beijing, China, 100085
Standard : FCC 47 CFR Part 2 (2.1093)

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.



Approved by: Si Zhang

Sporton International Inc. (Shenzhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



Table of Contents

1. Overview	4
2. Operating Parameters for Algorithm Validation	5
3. Overview of TA-SAR Test Proposal	6
4. TA-SAR Test Scenarios and Test Procedures	7
4.1 Test Sequences for All Scenarios	8
4.2 Test Configuration and Procedure for Scenario 1: Range of TA-SAR Parameters via Conducted Power Measurements	12
4.2.1 Configuration	12
4.2.2 Procedure	12
4.3 Test Configuration and Procedure for Scenario 2: Time-Varying TX Power via Conducted Power Measurements	14
4.3.1 Configuration	14
4.3.2 Procedure	15
4.4 Test Configuration and Procedure for Scenario 3: Call Disconnection and Re-establishment via Conducted Power Measurements	17
4.4.1 Configuration	17
4.4.2 Procedure	17
4.5 Test Configuration and Procedure for Scenario 4: Band Handover via Conducted Power Measurements	19
4.5.1 Configuration	19
4.5.2 Procedure	19
4.6 Test Configuration and Procedure for Scenario 5: Exposure Condition Index (ECI) Change via Conducted Power Measurements	21
4.6.1 Configuration	21
4.6.2 Procedure	21
4.7 Test Configuration and Procedure for Scenario 6: Antenna Switching via Conducted Power Measurements	22
4.7.1 Configuration	22
4.7.2 Procedure	22
4.8 Test Configuration and Procedure for Scenario 7: Time Window Switching via Conducted Power Measurements	23
4.8.1 Configuration	23
4.8.2 Procedure	23
4.9 Test Configuration and Procedure for Scenario 8: SAR Exposure Switching via Conducted Power Measurements	26
4.9.1 Configuration	26
4.9.2 Procedure	27
4.10 Test Configuration and Procedure for Scenario 2: Time-Varying TX Power via SAR Measurements	29
4.10.1 Configuration	29
4.10.2 Procedure	29
5. TA-SAR Validation via Conducted Power Measurements	31
5.1 Measurement Setup	31
5.1.1 Test Bench Introduction	31
5.1.2 Sub6 NR/LTE/3G/2G Power Limit Table and Test Configurations	34
5.2 Conducted Power Measurement Results for Scenario1: Range of TA-SAR Parameters	40
5.3 Conducted Power Measurement Results for Scenario 2: Time-Varying TX Power	42
5.3.1 Measurement results for 2G	42
5.3.2 Measurement results for 3G	47
5.3.3 Measurement results for LTE	52
5.3.4 Measurement results for NR	57
5.4 Conducted Power Measurement Results for Scenario 3: Call Disconnection and Re-establishment	62
5.5 Conducted Power Measurement Results for Scenario 4: Band Handover	64
5.6 Conducted Power Measurement Results for Scenario 5: ECI Change	66
5.7 Conducted Power Measurement Results for Scenario 7: Time Window Switching	68
5.7.1 Measurement results for Time window switching 60s-100s-60s	68
5.7.2 Measurement results for Time window switching 100s-60s-100s	70
5.8 Conducted Power Measurement Results for Scenario 8: SAR Exposure Switching (EN-DC Combination in the same time window)	72
5.9 Conducted Power Measurement Results for Scenario 8: SAR Exposure Switching (EN-DC Combination in the different time window)	74
6. TA-SAR Validation via SAR Measurements	76
6.1 Measurement Setup	76
6.2 SAR Measurement Results for Scenario 2: Time-Varying TX Power	77
6.2.1 SAR Measurement results for 2G	78
6.2.2 SAR Measurement results for 3G	82
6.2.3 SAR Measurement results for LTE	86
6.2.4 SAR Measurement results for NR	90
7. Conclusions	94
8. cDASY6 System Verification	95
8.1 The system to be used for the near field power density measurement	95
8.2 Test Site Location	95
8.3 SAR E-Field Probe	96
8.4 Data Acquisition Electronics (DAE)	96
9. Test Equipment List	97
10. System verification and validation	98
10.1 Tissue Verification	98
10.2 System Verification	98
11. Uncertainty Assessment	99
Appendix A. Plots of System Performance Check	101
Appendix B. DASY Calibration Certificate	101
Appendix C. Test Setup Photos	101



History of this test report

Report No.	Version	Description	Issued Date
FA4O0803B	01	Initial issue of report	Nov. 14, 2024



1. Overview

FCC regulation allows time averaged RF power to demonstrate compliance to RF exposure safety limits. Because RF exposure is correlated to transmission power (TX power), e.g., lower RF exposure is correlated to lower TX power, the TX power can be controlled to meet FCC RF exposure limits defined specific absorption rate (SAR) limit for transmit frequencies < 6GHz. For SAR limit, the proposed Time-Averaged Specific Absorption Rate (TA-SAR) algorithm manages TX power to ensure that at all times the time-averaged RF exposure is compliant with the FCC SAR requirement. In the FCC regulation, the averaging window of SAR is 100 seconds for transmit frequencies less than 3GHz, 60 seconds for transmit frequencies between 3GHz and 6GHz.

This purpose of the Part 2 report is to demonstrate the EUT complies with FCC RF exposure requirement under Tx varying transmission scenarios, thereby validity of MediaTek's TA feature for FCC equipment authorization. It serves to compliment the Part 0 and Part 1 Test Reports to justify compliance per FCC.

The Plimit used in this report is determined in Part 0 report.

<Test Lab Information>

Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm Name	Sporton International Inc. (Shenzhen)
Test Firm Information	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595
FCC Designation No.	CN1256
Test Firm Registration Number for FCC	421272
Test Site No.	SAR02-SZ
IMEI Code	Conducted: IMEI1: 862842070043122 IMEI2: 862842070043130 Radiated: IMEI1: 862842070043163 IMEI2: 862842070043171
Date of Start during the Test	11/2/2024
Date of End during the Test	11/10/2024
Test Engineers	Johnny Chen/Bran Yin

2. Operating Parameters for Algorithm Validation

Mediatek developed the TA-SAR algorithm v2.2439.1 to control instantaneous TX power for transmit frequencies less and larger than 6GHz respectively, so that the total time-averaged RF exposures are less than FCC requirement.

TA-SAR algorithm validation has been performed for 2G, 3G, LTE, NR FR1 according to cases with different combinations of operating parameters listed in Table 2-1.

Table 2-1 TA-SAR operating parameters

Operating parameters	Description
P_{sub6_limit}	The time-averaged maximum power level limit for different bands for 2G, 3G, LTE, and NR FR1.
$P_{LowThresh_offset}$	To calculate $P_{LowThresh}$. ($P_{LowThresh} = P_{sub6_limit} - P_{LowThresh_offset}$)
$P_{UE_backoff_offset}$	To calculate $P_{UE_backoff}$. ($P_{UE_backoff} = P_{sub6_limit} - P_{UE_backoff_offset}$)
$P_{UE_max_cust_offset}$	To calculate $P_{UE_max_cust}$. P_{UE_max} is maximum TX power at which a UE can possibly transmit. $P_{UE_max_cust} = \min(P_{UE_max}, P_{sub6_limit} + P_{UE_max_cust_offset})$

3. Overview of TA-SAR Test Proposal

For the completeness of verifying that the proposed TA-SAR algorithm can realize FCC compliance regarding RF exposure, several test scenarios are constructed as below:

- **Scenario 1:** test under different TA-SAR parameters to verify that the TA-SAR algorithm meets compliance requirements with different combinations of operating parameters.
- **Scenario 2:** test under time-varying TX power to verify that the TA-SAR algorithm ensures SAR compliance through dynamic TX power.
- **Scenario 3:** test under call drop and re-establishment conditions to ensure the TA-SAR algorithm control continuity and SAR compliance.
- **Scenario 4:** test under RAT/band handover to ensure the TA-SAR algorithm control continuity and correctness.
- **Scenario 5:** test under different ECIs (Exposure Condition Index) to ensure the TA-SAR algorithm control behaves as expected during ECI switching from one ECI to another. (e.g., head→ body worn)
- **Scenario 6:** test under different transmission antennae to ensure the TA-SAR algorithm control works correctly during antenna switching from one antenna to another.
- **Scenario 7:** test under different time windows to ensure the TA-SAR algorithm control functions correctly during time window switching from one time window setting to another. (e.g., time window 100s→60s)
- **Scenario 8:** test under SAR exposure switching between two active radios (radio#1 only, radio#1+radio#2, and radio#2 only) to ensure the TA-SAR algorithm control continuity and SAR compliance.

For TA-SAR validation, description of the conducted power measurement test procedures is included in section 4.2~4.9, and description of the SAR measurement test procedures is included in section 4.10. In each of the test scenarios, certain test sequence, described in section 4.1, is applied.

4. TA-SAR Test Scenarios and Test Procedures

In order to demonstrate that TA-SAR algorithm performs as expected under various operating scenarios, Table 4-1 lists the test scenarios and expected test sequences to validate TA-SAR algorithm in these scenarios. The test sequences 0, 1, 2 are defined in section 4.1. The details of each test procedures via conducted power and SAR measurements are described in section 4.2~4.9 and section 4.10, respectively.

Table 4-1 Test scenario list of TA-SAR validation

Test scenario		Test sequences #	Description
1	Range of TA-SAR parameters	0	Adjust parameters
2	Time-varying TX power	1 and 2	Test under time-varying TX power
3	Call disconnection and re-establishment	0	Test call drop and re-establishment
4	Band handover	0	Test band change
5	ECI (Exposure Condition Index) change	0	Test under ECI transition (e.g., head→ body worn)
6	Antenna switching	0	Change antenna
7	Time window switching	0	Switch frequency bands with larger frequency separation (e.g., time window 100s→60s)
8	SAR exposure switching	0	Switch RATs when testing (e.g., LTE→NR)

4.1 Test Sequences for All Scenarios

Three test sequences having possibly time-varying TX power are predefined for TA-SAR validation:

- **Test sequence 0:** EUT's TX power is requested to be maximum.
- **Test sequence 1:** EUT's TX power is requested to be at power less than $P_{LowThresh}$ for 300s, then at maximum power for 200s, and finally at $P_{LowThresh} - 2\text{dB}$ for the remaining time.
- **Test sequence 2:** EUT's TX power to vary with time. This sequence is generated relative to measured P_{UE_max} , measured P_{sub6_limit} and calculated $P_{UE_backoff}$ (= measured P_{sub6_limit} in dBm - $P_{UE_backoff_offset}$ in dB) of EUT based on measured P_{sub6_limit} .
- Test sequence is generated based on below parameters of the EUT:
 - A. Measured maximum power (P_{UE_max})
 - B. Measured Tx_power_at_SAR_design_limit (P_{sub6_limit})
 - C. Threshold of dynamic power reduction status determination: reserve hysteresis margin for instantaneous power ($P_{LowThresh}$)
 - D. SAR_time_window (FCC: 100s for $f < 3\text{GHz}$, 60s for $3\text{GHz} < f < 6\text{GHz}$)

The test sequence 0, 1, and 2 are illustrated in Figure 4-1, Figure 4-2, and Figure 4-3, respectively. The waveforms of the three test sequences are listed in Table 4-2, Table 4-3, and Table 4-4.

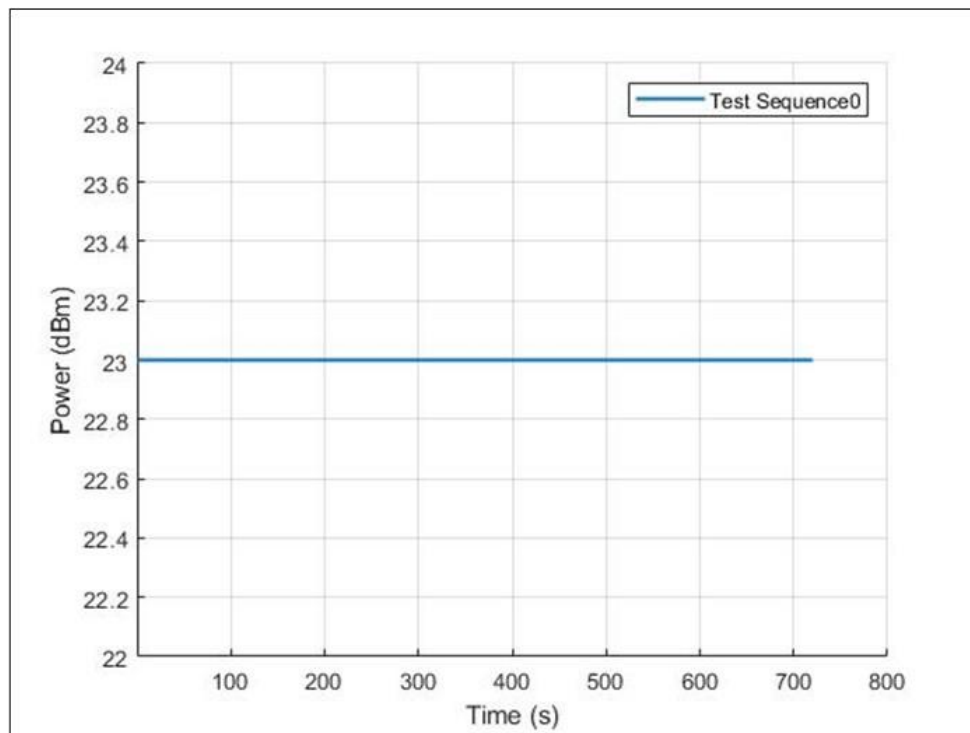


Figure 4-1 Test sequence 0

Table 4-2 Test sequence 0

Time	Duration	Power (dBm)	Note
720	720	23	P_{UE_max}

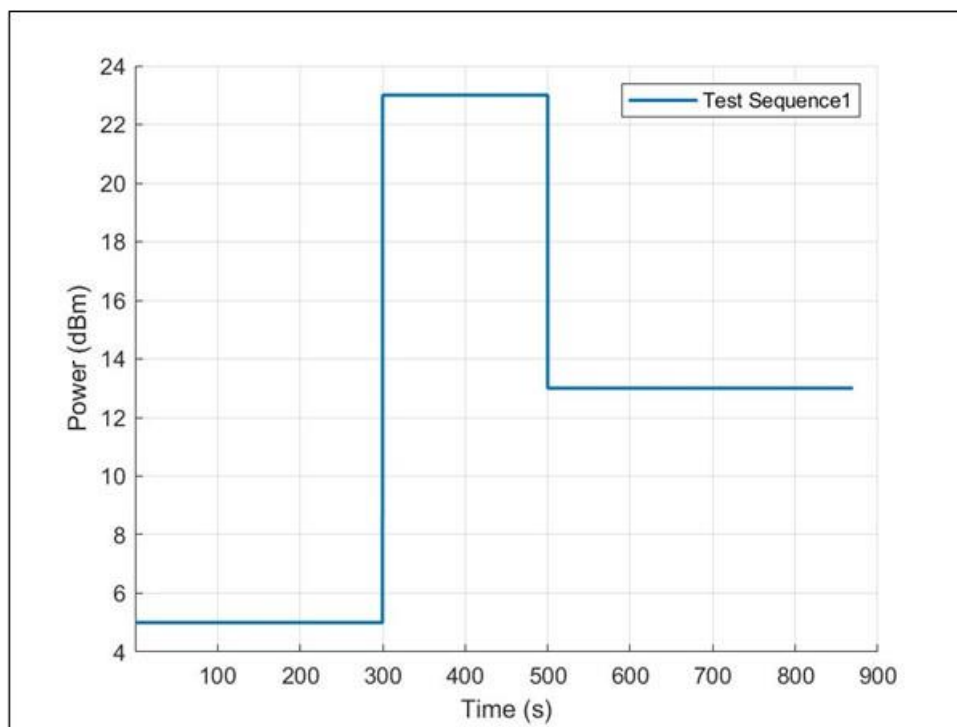
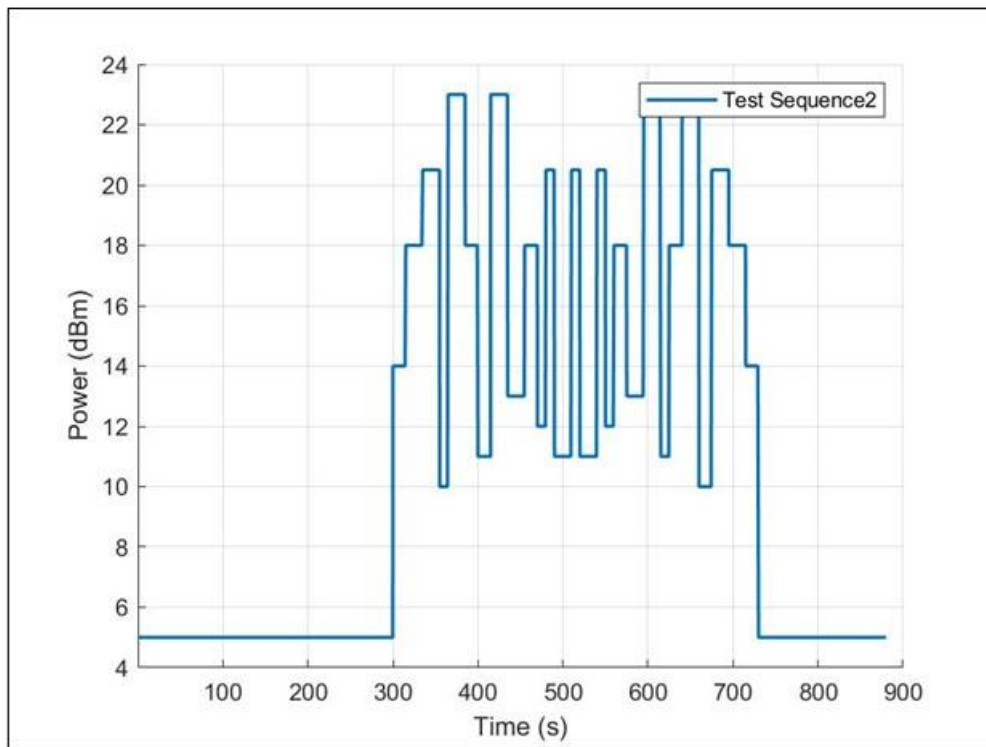


Figure 4-2 Test sequence 1

Table 4-3 Test sequence 1

Time	Duration	Power (dBm)	Note
300	300	5	$< P_{LowThresh}$
500	200	23	P_{UE_max}
870	370	13	$P_{LowThresh} - 2dB$


Figure 4-3 Test sequence 2
Table 4-4 Test sequence 2

Time	Duration	Power (dBm)	Note
300	300	5	$< P_{LowThresh}$
315	15	14	$P_{sub6_limit} - 4dB$
335	20	18	P_{sub6_limit}
355	20	20.5	$(P_{sub6_limit} + P_{UE_max})/2$
365	10	10	$P_{sub6_limit} - 8dB$
385	20	23	P_{UE_max}
400	15	18	P_{sub6_limit}
415	15	11	$P_{sub6_limit} - 7dB$
435	20	23	P_{UE_max}
455	20	13	$P_{sub6_limit} - 5dB$
470	15	18	P_{sub6_limit}
480	10	12	$P_{sub6_limit} - 6dB$
490	10	20.5	$(P_{sub6_limit} + P_{UE_max})/2$
510	20	11	$P_{sub6_limit} - 7dB$
520	10	20.5	$(P_{sub6_limit} + P_{UE_max})/2$
540	20	11	$P_{sub6_limit} - 7dB$
550	10	20.5	$(P_{sub6_limit} + P_{UE_max})/2$
560	10	12	$P_{sub6_limit} - 6dB$
575	15	18	P_{sub6_limit}
595	20	13	$P_{sub6_limit} - 5dB$
615	20	23	P_{UE_max}
625	10	11	$P_{sub6_limit} - 7dB$
640	15	18	P_{sub6_limit}
660	20	23	P_{UE_max}
675	15	10	$P_{sub6_limit} - 8dB$

695	20	20.5	$(P_{sub6_limit} + P_{UE_max})/2$
715	20	18	P_{sub6_limit}
730	15	14	$P_{sub6_limit} - 4\text{dB}$
870	140	5	$< P_{LowThresh}$

4.2 Test Configuration and Procedure for Scenario 1: Range of TA-SAR Parameters via Conducted Power Measurements


4.2.1 Configuration

This test is performed by changing the parameters ($P_{LowThresh_offset}$, $P_{UE_backoff_offset}$, $P_{UE_max_cust_offset}$) for the selected RAT (Radio Access Technologies) and band. Since Mediatek's TA algorithm operation is independent of RATs/bands/channels, any one RAT can be selected for this test and the selected band of the RAT has the least P_{sub6_limit} . In principle, two sets of the parameters are determined for this test (if applicable). If the parameters of the EUT are fixed (without a support of dynamic change), only the set of the default parameters needs to be tested.

4.2.2 Procedure

TX power is measured, recorded, and processed by the following steps:


- Step 1~4: measure and record TX power versus time for test scenario 1

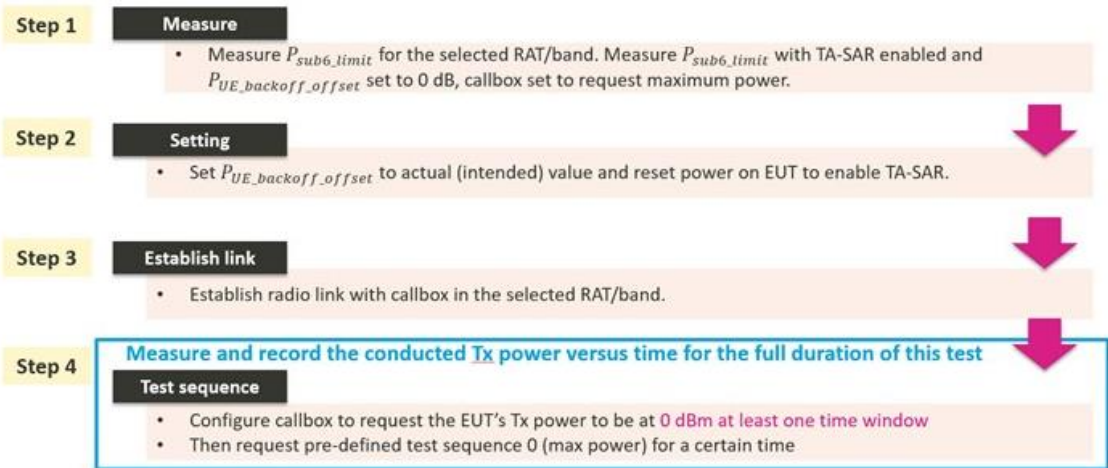

- Step 5: convert the measured conducted TX power into SAR

Convert the measured conducted TX power from step 4 into 1gSAR or 10gSAR value using the following equation.

Perform the running time average to power and 1gSAR or 10g SAR to determine time-averaged value versus time as follows,

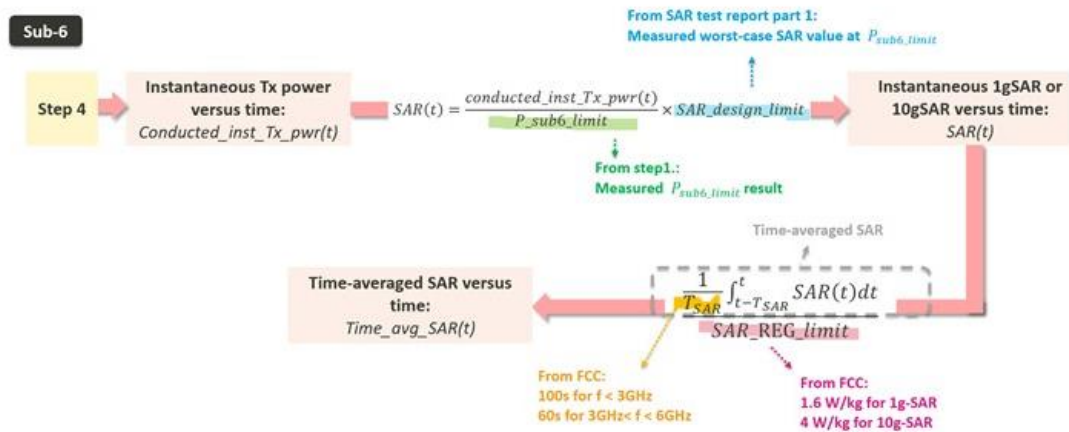

- Step 6: plot results
 - A. Make one power perspective plot containing
 1. Instantaneous TX power
 2. Requested power
 3. Calculated time-averaged power
 4. Calculated time-averaged power limits
 - B. Make one SAR perspective plot containing
 1. Calculated time-averaged 1gSAR or 10gSAR
 2. FCC limit of 1.6 W/kg (1gSAR) or 4.0 W/kg (10gSAR)

4.3 Test Configuration and Procedure for Scenario 2: Time-Varying TX Power via Conducted Power Measurements

4.3.1 Configuration


Since Mediatek's TA-SAR feature operation is independent of bands and channels for a given RAT, selecting one band per RAT is sufficient to validate this feature. Two bands per RAT are proposed for this test. The criteria for band selection for each RAT is based on the P_{sub6_limit} values (corresponding to SAR_design_limit) and is described as below:

- Select two bands, among the ones whose P_{sub6_limit} values are below P_{UE_max} , which correspond to least and highest P_{sub6_limit} values respectively.
 - Only one band needs to be tested if all the bands have same P_{sub6_limit} .
 - Only one band needs to be tested if only the band has P_{sub6_limit} below P_{UE_max} .
 - If the same least P_{sub6_limit} applies to multiple bands, select the band with the highest measured 1gSAR at P_{sub6_limit} .
 - If P_{sub6_limit} values of all bands are all over P_{UE_max} (i.e., TA-SAR feature is not enabled), there is no need to test this RAT.

4.3.2 Procedure

TX power is measured, recorded, and processed by the following steps:


- Step 1~4: measure and record TX power versus time for test scenario 2

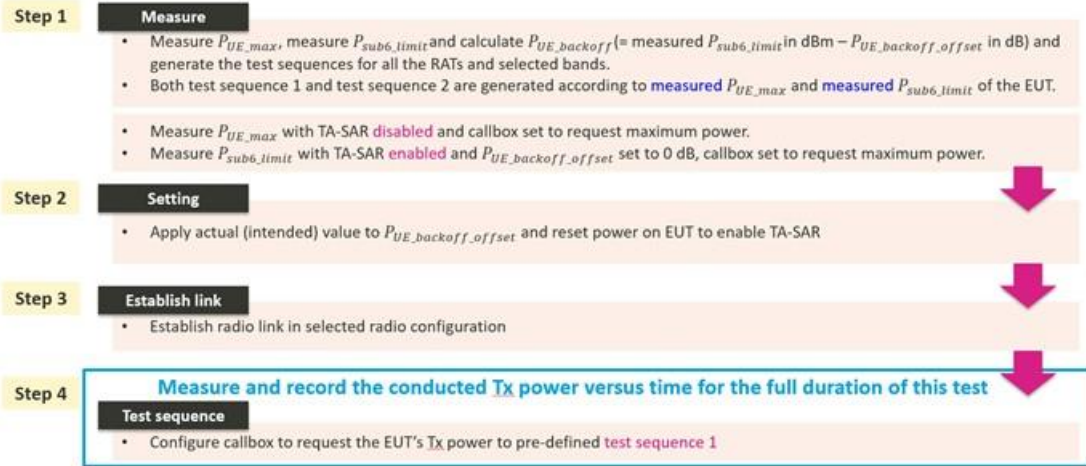


- Step 5: convert the measured conducted TX power into SAR

Convert the measured conducted TX power from step 4 into 1gSAR or 10gSAR value using the following equation.

Perform the running time average to power and 1gSAR or 10g SAR to determine time-averaged value versus time as below:

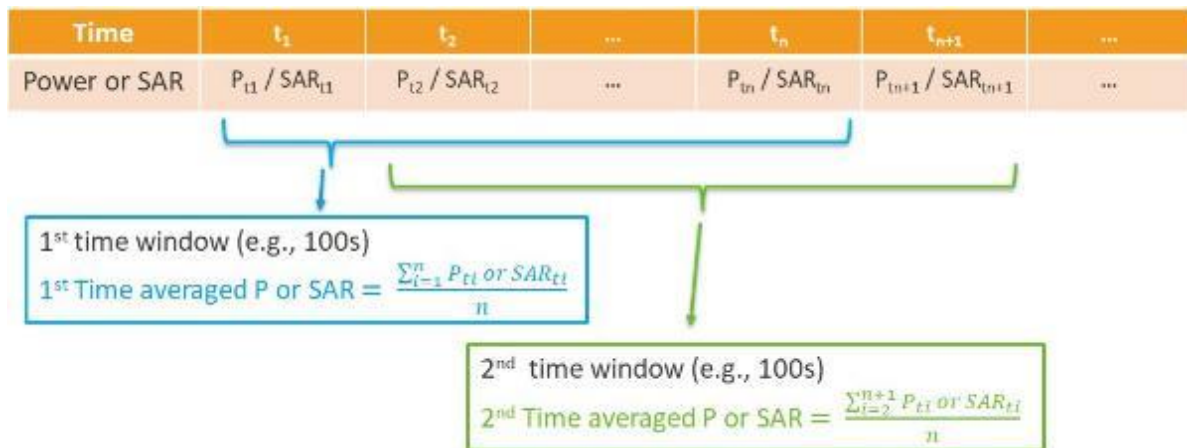

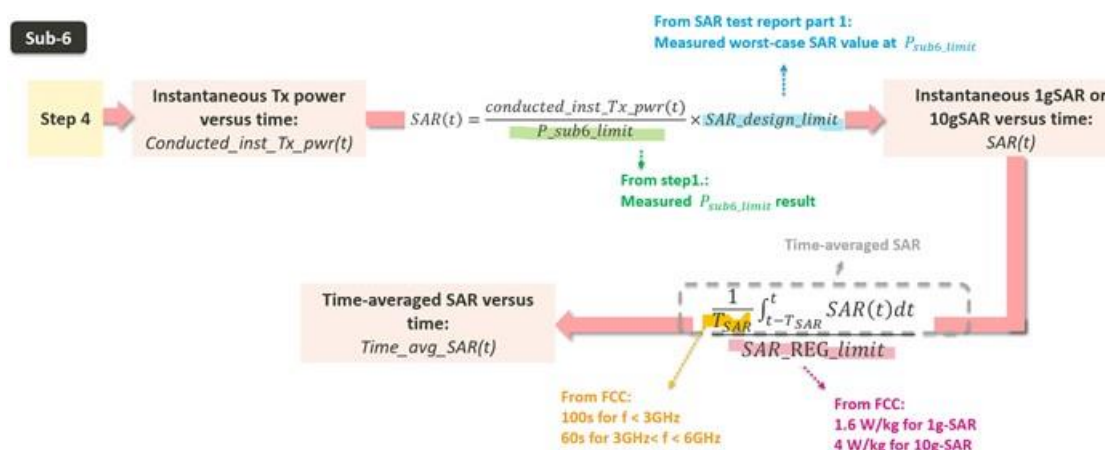

- Step 6: plot results
 - A. Make one power perspective plot containing
 1. Instantaneous TX power
 2. Requested power (test sequence1)
 3. Calculated time-averaged power
 4. Calculated time-averaged power limits
 - B. Make one SAR perspective plot containing
 1. Calculated time-averaged 1gSAR or 10gSAR
 2. FCC limit of 1.6 W/kg (1gSAR) or 4.0 W/kg (10gSAR)

- Step 7: repeat steps 2~6 for test sequence 2

Repeat steps 2 ~ 6 for pre-defined test sequence 2 and replace test sequence 1 in step 4 with test sequence 2.

- Step 8: repeat steps 2~7 for different bands

4.4 Test Configuration and Procedure for Scenario 3: Call Disconnection and Re-establishment via Conducted Power Measurements

4.4.1 Configuration


For call disconnection measurement, the criteria of selecting the test configuration is:

- Select the RAT/band with least P_{sub6_limit} among all supported RATs/bands.
- Select the RAT/band having the highest measured 1gSAR at P_{sub6_limit} if multiple RATs/bands having same least P_{sub6_limit} .
- Select the radio configuration in this RAT/band that corresponds to the highest measured 1gSAR at P_{sub6_limit} .

4.4.2 Procedure

TX power is measured, recorded, and processed by the following steps:


- Step 1~4: measure and record TX power versus time for test scenario 3

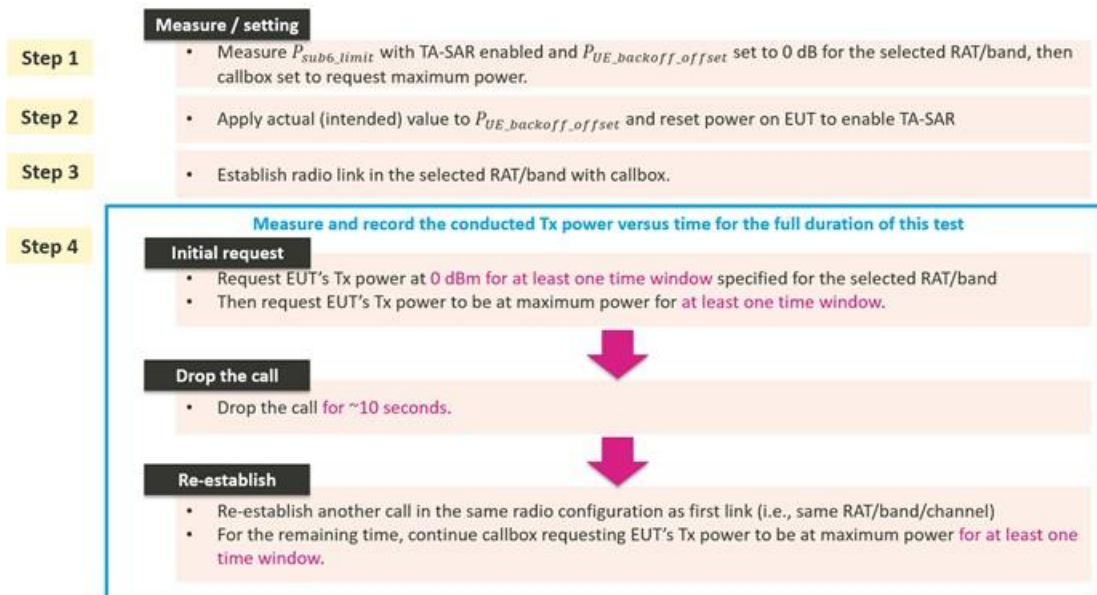

- Step 5: convert the measured conducted TX power into SAR

Convert the measured conducted TX power from step 4 into 1gSAR or 10gSAR value using the following equation.

Perform the running time average to power and 1gSAR or 10g SAR to determine time-averaged value versus time as follows,

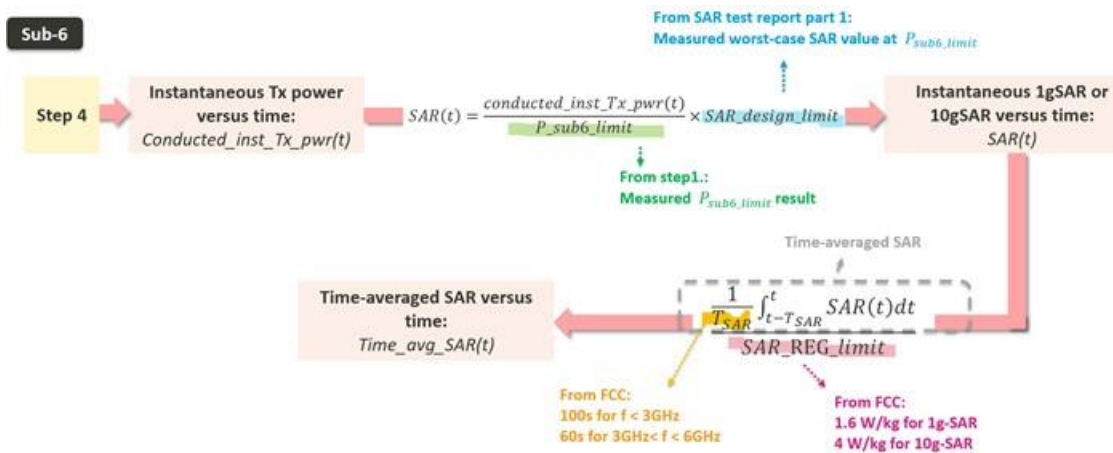

- Step 6: plot results
 - Make one power perspective plot containing
 - Instantaneous TX power
 - Requested power
 - Calculated time-averaged power
 - Calculated time-averaged power limits
 - Make one SAR perspective plot containing
 - Calculated time-averaged 1gSAR or 10gSAR
 - FCC limit of 1.6 W/kg (1gSAR) or 4.0 W/kg (10gSAR)

4.5 Test Configuration and Procedure for Scenario 4: Band Handover via Conducted Power Measurements

4.5.1 Configuration


For a given TX antenna, select a RAT/band with the lowest P_{sub6_limit} and the other RAT/band with the highest P_{sub6_limit} . Both of them have P_{sub6_limit} values less than P_{UE_max} if possible.

- Select the RAT/band having the highest measured 1gSAR at P_{sub6_limit} if multiple RATs/bands have the same lowest P_{sub6_limit} .
- Select the RAT/band having the lowest measured 1gSAR at P_{sub6_limit} if multiple RATs/bands have the same highest P_{sub6_limit} .

4.5.2 Procedure


TX power is measured, recorded, and processed by the following steps:

- Step 1~4: measure and record TX power versus time for test scenario 4

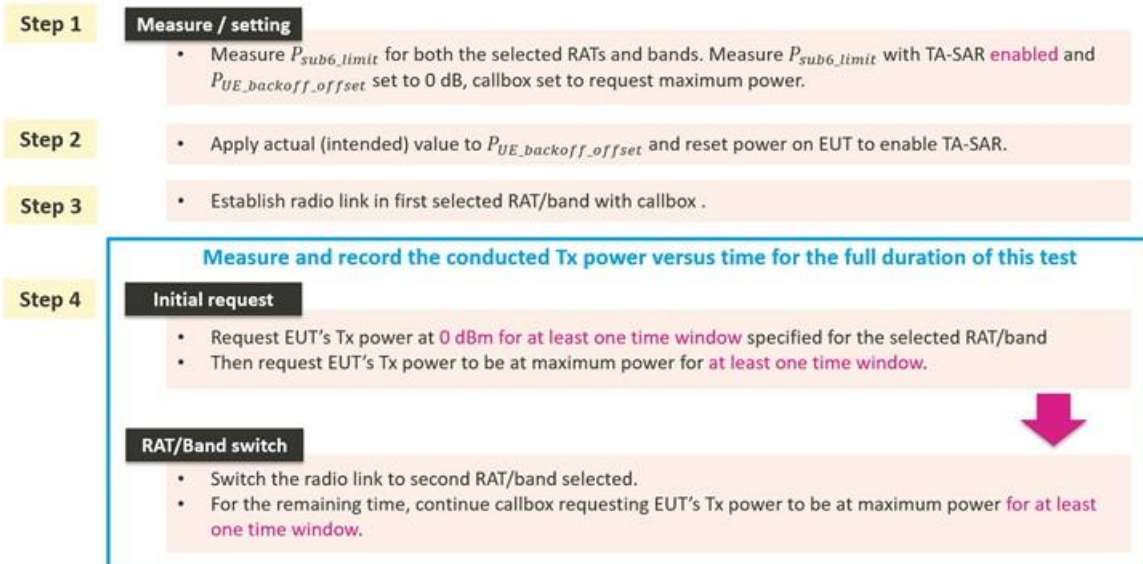

- Step 5: convert the measured conducted TX power into SAR

Convert the measured conducted TX power from step 4 into 1gSAR or 10gSAR value using the following equation. Perform the running time average to power and 1gSAR or 10g SAR to determine time-averaged value versus time as follows,

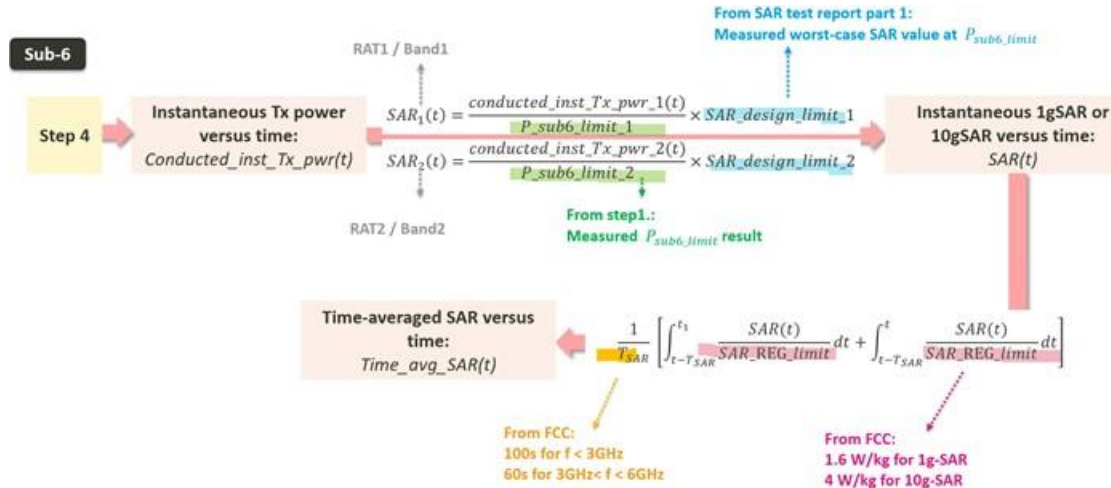

- Step 6: plot results
 - Make one power perspective plot containing
 - Instantaneous TX power
 - Requested power
 - Calculated time-averaged power
 - Calculated time-averaged power limits
 - Make one SAR perspective plot containing
 - Calculated time-averaged 1gSAR or 10gSAR
 - FCC limit of 1.6 W/kg (1gSAR) or 4.0 W/kg (10gSAR)
 - Normalized time-averaged 1gSAR/1.6 or 10gSAR/4.0

4.6 Test Configuration and Procedure for Scenario 5: Exposure Condition Index (ECI) Change via Conducted Power Measurements

4.6.1 Configuration

Select any one RAT/band, which has at least two ECIs whose Psub6_limit values are different and are below PUE_max.

4.6.2 Procedure

The test procedure is identical to section 4.5.2 except the following 2 changes:

1. Replace band switch operation with ECI switch.
2. In Step 4, the second ECI switching is arranged after the first one lasts for at least one time window, i.e., switch the second ECI back to the first ECI, and then continue with callbox requesting EUT's Tx power to be at maximum power for at least one time window.

It is noted that the following operations are done as well for this scenario:

- The correct power control is controlled by TA_SAR during ECI switches from one ECI to another.
- The validation criteria are, at all times, the time-averaged 1gSAR or 10gSAR versus time shall not exceed FCC limit of 1.6 W/kg for 1gSAR or 4.0 W/kg for 10gSAR.

4.7 Test Configuration and Procedure for Scenario 6: Antenna Switching via Conducted Power Measurements

4.7.1 Configuration

Among RATs/bands supporting TX antenna switches, select the RAT/band with the highest Psub6_limit difference between a pair of supported TX antennas.

- Select the RAT/band having the highest measured 1gSAR at Psub6_limit if multiple RATs/bands having the same Psub6_limit difference between the supported TX antennas.
- Antenna selection order
 - Select the configuration with two antennas having P_{sub6_limit} values less than P_{UE_max} .
 - If the previous configuration does not exist, select the configuration with one antenna having P_{sub6_limit} value less than P_{UE_max} .
 - If the above two cannot be found, select one configuration with the two antennas having the least difference between their Psub6_limit and PUE_max (i.e., Psub6_limit can be greater than PUE_max).

4.7.2 Procedure

The test procedure is identical to section 4.5.2 except the following 2 changes:

1. Replace band switch operation with antenna switch.
2. In Step 4, the second antenna switching is arranged after the first one lasts for at least one time window, i.e., switch the second antenna back to the first antenna, and then continue with callbox requesting EUT's Tx power to be at maximum power for at least one time window.

It is noted that the following operations are done as well for this scenario:

- The correct power control is controlled by TA_SAR during antenna switches from one antenna to another.
- The validation criteria are, at all times, the time-averaged 1gSAR or 10gSAR versus time shall not exceed FCC limit of 1.6 W/kg for 1gSAR or 4.0 W/kg for 10gSAR.

4.8 Test Configuration and Procedure for Scenario 7: Time Window Switching via Conducted Power Measurements

4.8.1 Configuration


Select one RAT/band with 60-second time averaging window, and the other RAT/band with 100-second time averaging window. Both of them have P_{sub6_limit} values less than P_{UE_max} if possible.

- At least one of the selected RAT/band has its P_{sub6_limit} less than P_{UE_max} .

4.8.2 Procedure

TX power is measured, recorded, and processed by the following steps:


- Step 1~4: measure and record TX power versus time for test scenario 7

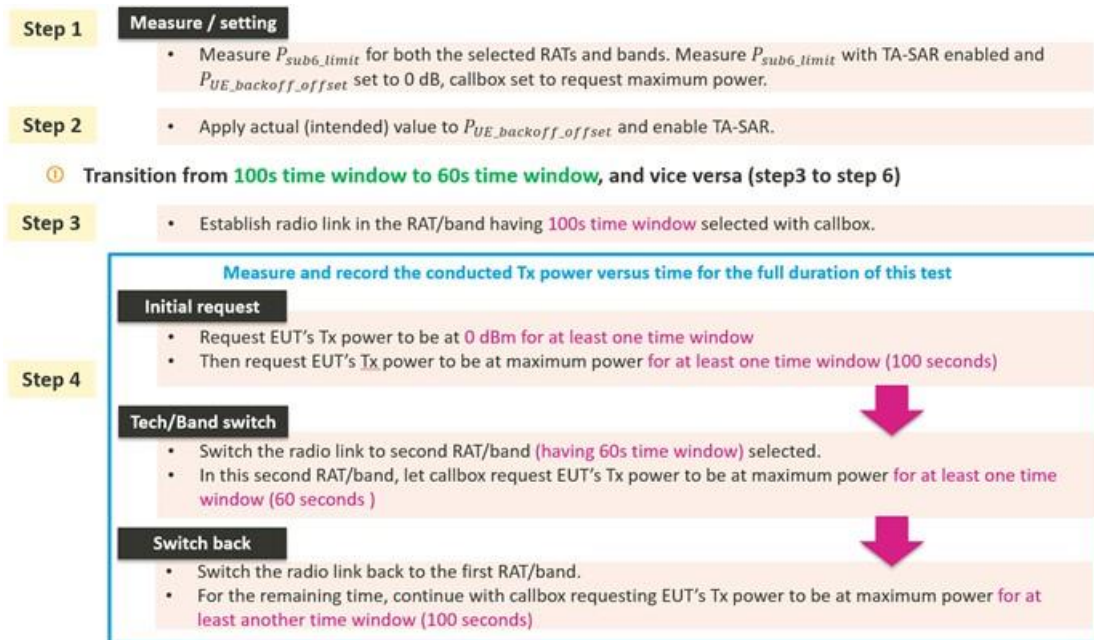

- Step 5: convert the measured conducted TX power into SAR

Convert the measured conducted TX power from step 4 into 1gSAR or 10gSAR value using the following equation.

Perform the running time average to power and 1gSAR or 10g SAR to determine time-averaged value versus time as follows,

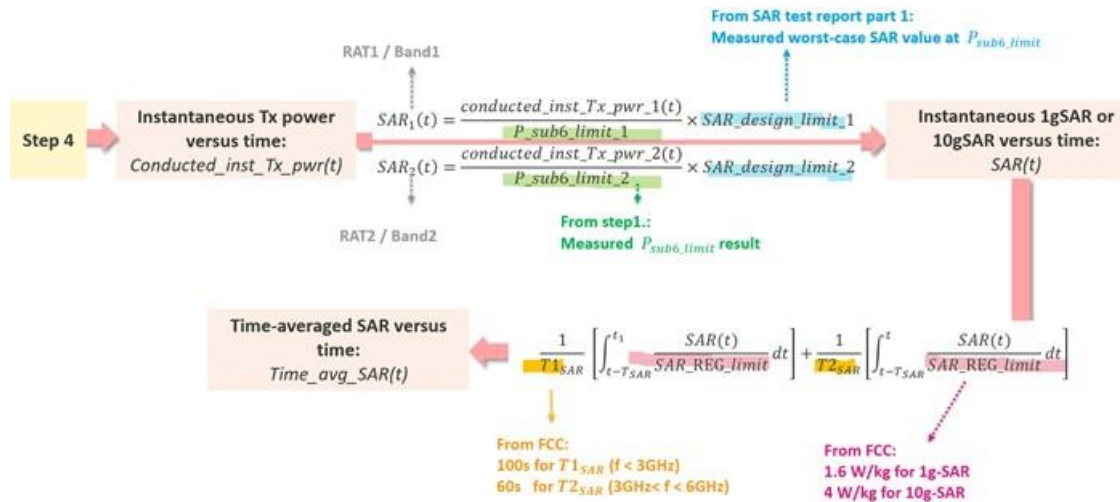

- Step 6: plot results
 - Make one power perspective plot containing
 - Instantaneous TX power
 - Requested power
 - Calculated time-averaged power
 - Calculated time-averaged power limits
 - Make one SAR perspective plot containing
 - Calculated time-averaged 1gSAR or 10gSAR
 - FCC limit of 1.6 W/kg (1gSAR) or 4.0 W/kg (10gSAR)
 - Normalized time-averaged 1gSAR/1.6 or 10gSAR/4.0

- Step 7~8: measure and record TX power versus time in another time window change

🕒 Transition from 60s time window to 100s time window, and vice versa (step7 to step 9)

Step 7

- Establish radio link with callbox in the RAT/band having 60s time window selected.

Measure and record the conducted Tx power versus time for the full duration of this test

Initial request

- Request EUT's Tx power to be at 0 dBm for at least one time window
- Then request EUT's Tx power to be at maximum power for at least one time window (60 seconds)

Step 8

Tech/Band switch

- Switch the radio link to second RAT/band (having 100s time window) selected.
- In this second RAT/band, let callbox request EUT's Tx power to be at maximum power for at least one time window (100 seconds).

Switch back

- Switch the radio link back to the first RAT/band.
- For the remaining time, continue with callbox requesting EUT's Tx power to be at maximum power for at least another time window (60 seconds)

- Step 9: convert the measurement and plot results

Convert the measured conducted TX power from step 8 into 1gSAR or 10gSAR value using the equation in step 5.

Repeat step 6 to generate the plots.

4.9 Test Configuration and Procedure for Scenario 8: SAR Exposure Switching via Conducted Power Measurements


4.9.1 Configuration

If supported, SAR exposure switch with two active radios having the same and different time averaging windows should be covered in this test. TA algorithm operation is independent of the source of SAR exposure (e.g., LTE vs. NR FR1) and ensures total time-averaged RF exposure compliance for SAR exposure among the scenarios of radio 1 only, radio 1 + radio 2, and radio 2 only.

- Select any two < 6GHz RATs/bands that the EUT supports for simultaneous transmission (e.g., LTE+NR FR1).
- The selection order among all supported simultaneous transmission configurations is
 - Select one configuration with P_{sub6_limit} values of radio1 and radio2 less than their corresponding P_{UE_max} , and their P_{sub6_limit} values are different if possible.
 - If the previous configuration does not exist, at least one radio has its P_{sub6_limit} less than P_{UE_max} .
 - If above two cannot be found, select one configuration that has P_{sub6_limit} of radio1 and radio2 with the least difference between P_{sub6_limit} and P_{UE_max} (i.e., P_{sub6_limit} can be greater than P_{UE_max}).
- One test with two active radios in any two different time windows is sufficient to cover this scenario.
- One SAR switching is sufficient because the TA algorithm operation is the same.

4.9.2 Procedure


- Step 1~3: measure and record TX power versus time for test scenario 8
 - A. Measure conducted TX power corresponding to radio1 P_{sub6_limit}
 - Establish device in call with the callbox for radio1 band.
 - Measure conducted TX power corresponding to radio1 P_{sub6_limit} with TA_SAR enabled and $P_{UE_backoff_offset}$ set to 0 dB, callbox set to request maximum power.
 - B. measure conducted TX power corresponding to radio2 P_{sub6_limit}
 - Repeat above step to measure conducted TX power corresponding to radio2 P_{sub6_limit} .
 - If radio2 is dependent on radio1 (for example, non-standalone mode of NR FR1 requiring radio1 LTE as anchor), then establish radio1 + radio2 call with callbox, and request all down bits for radio1 LTE.
 - In this scenario, with callbox requesting maximum power from radio2 NR FR1, measured conducted TX power corresponds to radio2 P_{sub6_limit} (as radio1 LTE is at all-down bits)

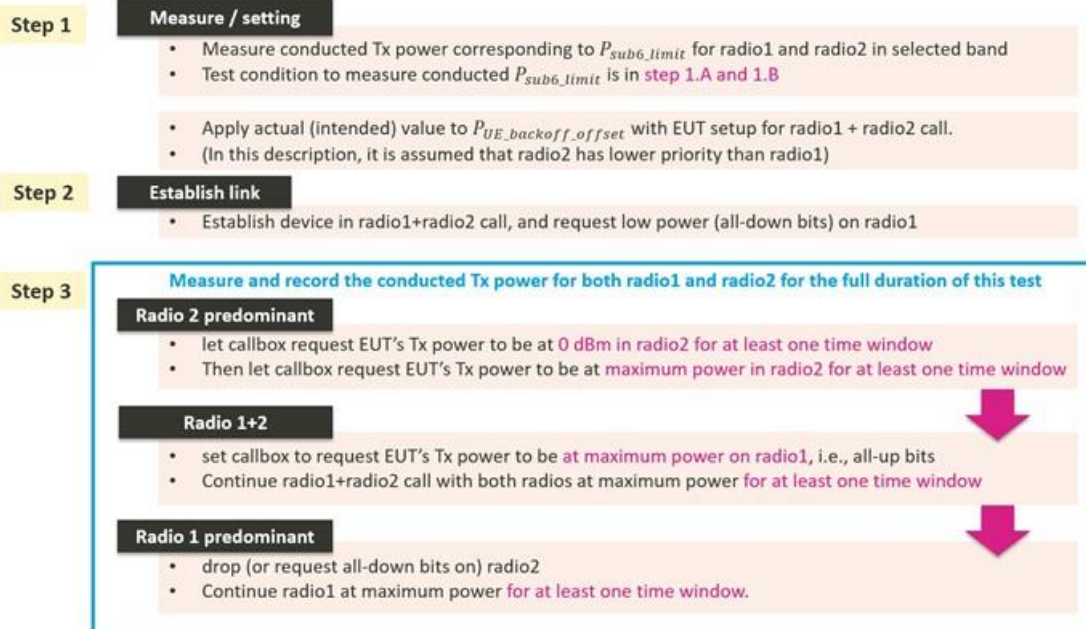

- Step 4: convert the measured conducted TX power into SAR

Convert the measured conducted TX power from step 3 into 1gSAR or 10gSAR value using the following equation.

Perform the running time average to power and 1gSAR or 10g SAR to determine time-averaged value versus time as follows,

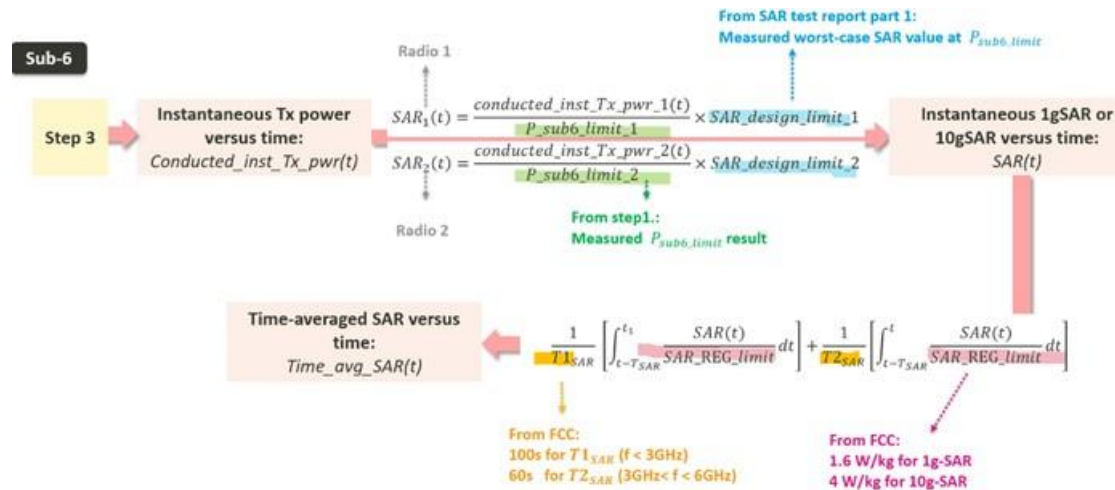

- Step 5: plot results
 - Make one power perspective plot containing
 - Instantaneous TX power
 - Requested power
 - Calculated time-averaged power
 - Calculated time-averaged power limits
 - Make one SAR perspective plot containing
 - Calculated time-averaged 1gSAR or 10gSAR
 - FCC limit of 1.6 W/kg (1gSAR) or 4.0 W/kg (10gSAR)
 - Normalized time-averaged 1gSAR/1.6 or 10gSAR/4.0

4.10 Test Configuration and Procedure for Scenario 2: Time-Varying TX Power via SAR Measurements


4.10.1 Configuration

Sections 4.2 to 4.9 focus on Mediatek's TA feature compliance validation via conducted TX power measurements. This section further provides a SAR measurement procedure for time-varying TX power scenario described in section 4.3. Hence, this section follows the test configuration of section 4.3, and uses test sequences 1 and 2 defined in section 4.1.

4.10.2 Procedure


SAR is measured and recorded by the following steps:

- Step 1~4: measure and record SAR versus time

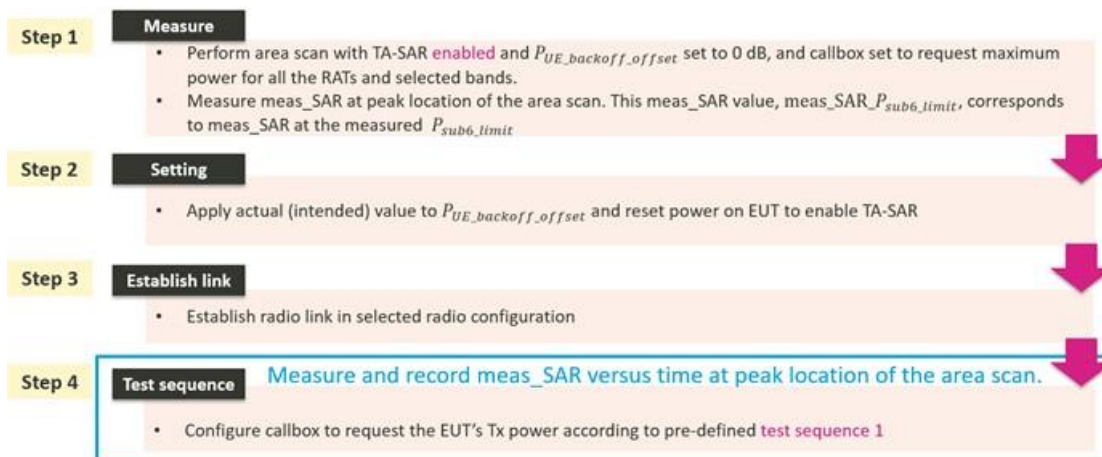

- Step 5: convert the measured SAR into time-averaged SAR

Convert the instantaneous measured SAR from step 4 into 1gSAR or 10gSAR value. Perform the running time average to 1gSAR or 10g SAR to determine time-averaged value versus time as follows,

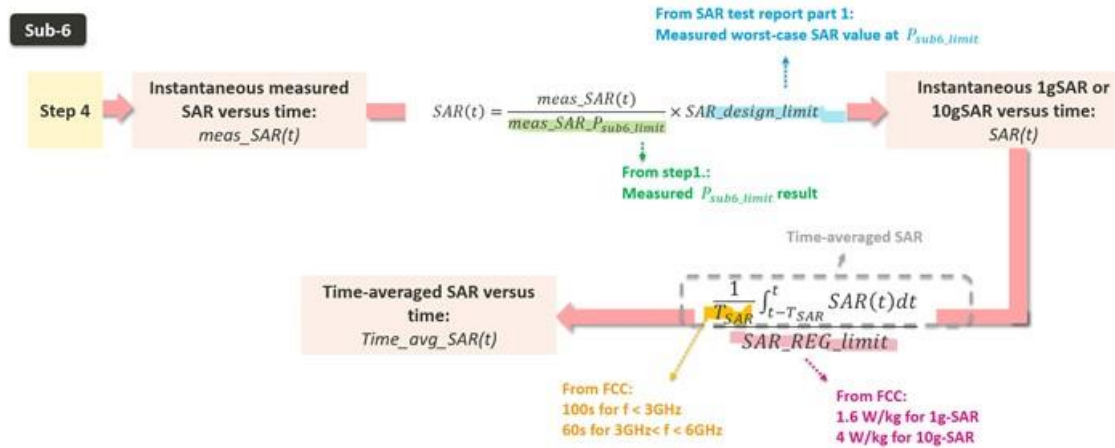

where, $meas_SAR_P_{sub6_limit}$ is the value determined in step 1, and $meas_SAR(t)$ is the instantaneous measured SAR measured in step 4.

- Step 6: plot result
 - Calculated time-averaged 1gSAR or 10gSAR
 - FCC limit of 1.6 W/kg (1gSAR) or 4.0 W/kg (10gSAR)
- Step 7: repeat steps 2 ~ 6 for pre-defined test sequence 2

Repeat steps 2 ~ 6 for pre-defined test sequence 2 and replace test sequence 1 in step 4 with test sequence 2.

- Step 8: repeat steps 2 ~ 7 for all the selected bands

The time-averaged SAR versus time shall not exceed FCC limit at all times.

5. TA-SAR Validation via Conducted Power Measurements

5.1 Measurement Setup

5.1.1 Test Bench Introduction

The call boxes Keysight UXM (supporting sub6 NR and LTE) and Rohde & Schwarz CMW500 (supporting LTE, WCDMA, C2K and 2G) are used to validate the proposed TA-SAR mechanism. Figure 6-1 shows the block diagram of the measurement bench, which supports the following test scenarios.

- Test scenario 1: range of TA-SAR parameters
- Test scenario 2: time-varying TX power
- Test scenario 3: call disconnection and re-establishment
- Test scenario 5: ECI change

For these measurements, RF port of the call box is connected to the EUT's antenna port, and the call box establishes a connection link through the test script console tool and the power meter measures the conducted output power of the EUT.

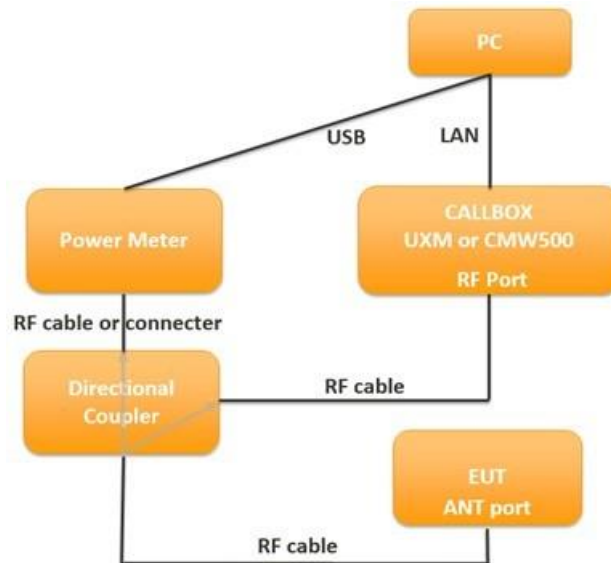


Figure 6- 1 TA-SAR conductive power test setup block diagram for scenarios 1/2/3/5

Figure 6-2 shows the block diagram of the measurement bench, which support test scenario 4 (band handover) and scenario 7 (time window switching). For these measurements, the RF port of the call box is connected with a 1-to-2 power divider, which allows the call box to transmit/receive signals from the two different system configurations set in these two test scenarios. Figure 6-3 shows the setup, which is highly similar to Figure 6-2, to support test scenario 6 (antenna switching); as seen in the figure, two EUT's antenna ports are individually connected with a RF cable.

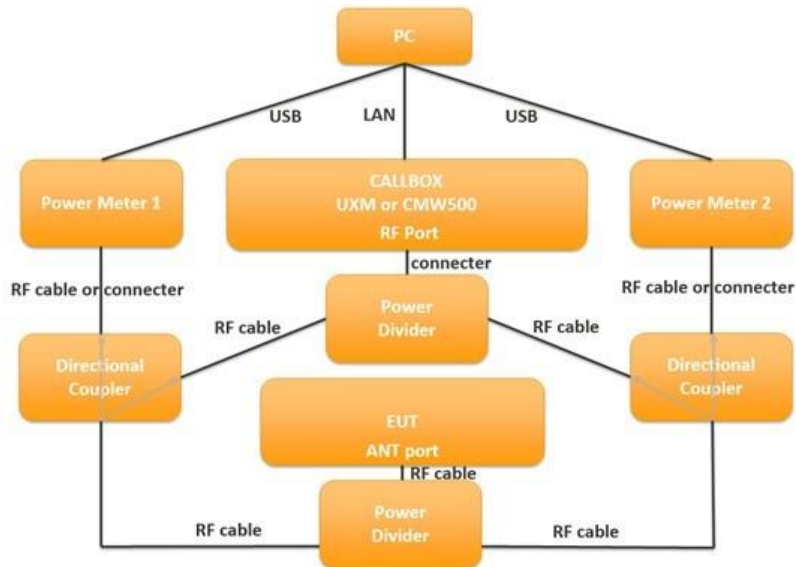


Figure 6- 2 TA-SAR conductive power test setup block diagram for scenarios 4 and 7

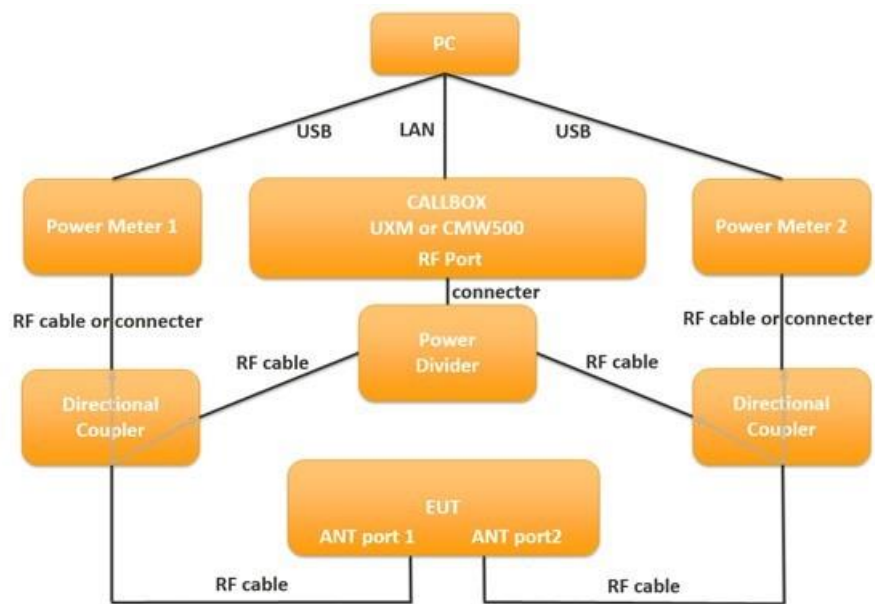


Figure 6- 3 TA-SAR conductive power test setup block diagram for scenario 6

Figure 6-4 shows the setup for test scenario 4 (RAT handover) and scenario 8 (SAR exposure switching). Since two RATs need to be controlled in these two scenarios, RF port of RAT #1 and RF port of RAT #2 of the call box are individually connected to an antenna port of the EUT through a directional coupler. It is noted that each of the two RATs individually transmit signals though one antenna port. The antenna port assignment of each RAT for these two scenarios is described in Antenna position with Appendix D of Part 1.

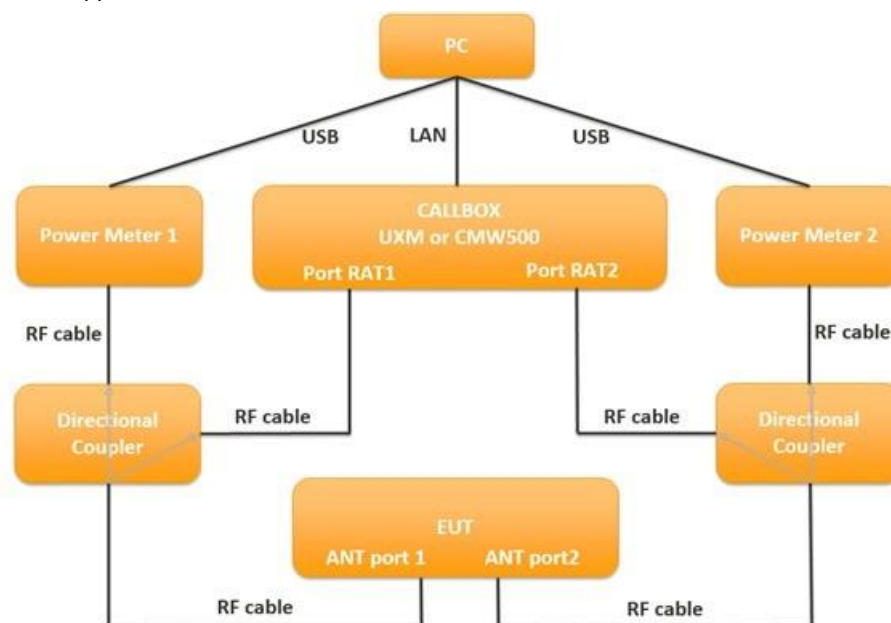


Figure 6- 4 TA-SAR conductive power test setup block diagram for scenarios 4/8

5.1.2 Sub6 NR/LTE/3G/2G Power Limit Table and Test Configurations

For the supported bands/channels/antennas of each technology, the measured power limit (P_{sub6_limit}), corresponding to SAR_design_limit , is listed in the table 6-1. The SAR_design_limit is determined by taking +Total uncertainty into consideration. Please note that for TDD bands with TX duty cycles less than or equal to 100%, the measured power limit corresponds to the burst averaged power level which does not account for TX duty cycle.

Table 6-1 Summary table of power limit (P_{sub6_limit}) for all supported RAT

Band	Antenna	Head ECI1	Extremity ECI3	Bodyworn ECI4	Hotspot ECI5	Pmax	Total Uncertainty dB (k=2)
GSM850	Ant 0	30.1	24.0	24.0	28.4	24.0	1.00
GSM850	Ant 1	21.5	24.0	24.0	21.5	24.0	1.50
GSM1900	Ant 2	31.8	19.0	19.0	19.0	21.0	1.00
GSM1900	Ant 4	18.0	19.5	26.6	18.0	21.5	1.50
WCDMA V	Ant 0	29.9	24.0	24.0	28.8	24.0	1.00
WCDMA V	Ant 1	21.0	21.0	21.0	21.0	24.0	1.50
WCDMA IV	Ant 2	31.8	23.0	23.0	22.5	24.0	1.00
WCDMA IV	Ant 4	17.2	22.2	26.5	17.2	24.2	1.50
WCDMA II	Ant 2	31.5	21.0	21.0	20.5	24.0	1.00
WCDMA II	Ant 4	17.2	22.2	26.3	17.2	24.2	1.50
LTE Band 5	Ant 0	29.9	25.0	25.0	28.7	25.0	0.70
LTE Band 5_Other PA	Ant 0	29.9	25.0	25.0	29.3	25.0	0.70
LTE Band 5	Ant 1	22.5	21.5	21.5	21.5	25.0	0.70
LTE Band 5_Other PA	Ant 1	22.5	21.5	21.5	21.5	25.0	0.70
LTE Band 26	Ant 0	30.0	25.0	25.0	29.1	25.0	0.70
LTE Band 26	Ant 1	22.0	24.0	24.0	22.0	25.0	0.70
LTE Band 4	Ant 4	18.0	22.5	25.8	18.0	25.0	0.70
LTE Band 4	Ant 2	33.0	23.5	23.5	23.5	25.0	0.70
LTE Band 4	Ant 5	19.5	22.0	22.0	19.5	23.0	1.50
LTE Band 66	Ant 4	20.5	23.0	29.2	20.5	25.0	0.70
LTE Band 66	Ant 2	32.4	23.0	23.0	22.5	25.0	0.70
LTE Band 66	Ant 5	19.0	22.0	22.0	19.0	23.0	1.50
LTE Band 2	Ant 4	18.0	23.0	26.0	18.0	24.5	1.00
LTE Band 2	Ant 2	30.0	20.5	20.5	20.0	24.0	1.50
LTE Band 2	Ant 3	16.5	21.0	21.0	16.5	24.0	1.50
LTE Band 2	Ant 5	18.0	22.5	22.5	18.0	22.5	1.50
LTE Band 7	Ant 4	16.5	20.0	26.7	16.5	25.0	0.70
LTE Band 7_Other PA	Ant 4	16.5	20.0	27.1	16.5	25.0	0.70
LTE Band 7	Ant 2	31.1	21.0	21.0	21.0	25.0	0.70
LTE Band 7_Other PA	Ant 2	31.3	20.5	20.5	20.5	24.5	1.00
LTE Band 7	Ant 3	18.5	19.5	19.5	18.5	24.0	1.50
LTE Band 7_Other PA	Ant 3	18.5	19.5	19.5	18.5	24.0	1.20
LTE Band 7	Ant 5	20.0	20.0	20.0	20.0	22.5	1.50
LTE Band 7_Other PA	Ant 5	19.5	19.5	19.5	19.5	22.0	1.50
LTE Band 38	Ant 4	15.0	19.5	27.0	15.0	23.0	0.70
LTE Band 38_Other PA	Ant 4	17.0	19.5	26.6	17.0	23.0	0.70
LTE Band 38	Ant 2	29.2	18.5	18.5	18.5	22.5	1.20
LTE Band 38_Other PA	Ant 2	29.2	20.5	20.5	20.5	22.5	1.00
LTE Band 38	Ant 3	17.0	17.0	17.0	17.0	22.0	1.50
LTE Band 38_Other PA	Ant 3	17.0	19.0	19.0	17.0	22.0	1.20
LTE Band 38	Ant 5	20.8	20.0	20.0	23.9	20.0	1.50
LTE Band 38_Other PA	Ant 5	20.2	20.0	20.0	24.6	20.0	1.50
LTE Band 41	Ant 4	15.0	18.5	26.6	15.0	23.0	0.70



FCC TAS Validation Report

Report No. : FA4O0803B

LTE Band 41_Other PA	Ant 4	17.0	18.5	26.6	17.0	23.0	0.70
LTE Band 41	Ant 2	29.3	18.5	18.5	18.5	22.5	1.20
LTE Band 41_Other PA	Ant 2	29.4	20.5	20.5	20.5	22.5	1.00
LTE Band 41	Ant 3	17.0	18.5	18.5	17.0	22.0	1.50
LTE Band 41_Other PA	Ant 3	17.5	19.0	19.0	17.5	22.5	1.20
LTE Band 41	Ant 5	16.5	18.5	18.5	16.5	20.0	1.50
LTE Band 41_Other PA	Ant 5	19.0	19.0	19.0	19.0	20.5	1.50
LTE Band 42	Ant 6	18.0	17.5	27.7	17.5	23.0	0.70
LTE Band 42	Ant 8	18.0	18.5	18.5	18.0	21.5	1.50
LTE Band 42	Ant 7	17.0	18.0	26.4	17.0	22.0	1.50
LTE Band 42	Ant 9	28.6	15.5	15.5	15.5	21.0	1.50
LTE Band 48	Ant 6	16.0	18.5	25.0	16.0	23.0	0.70
LTE Band 48	Ant 8	17.5	19.5	19.5	17.5	21.5	1.50
LTE Band 48	Ant 7	15.0	18.0	23.6	15.0	22.0	1.50
LTE Band 48	Ant 9	29.6	17.0	17.0	17.0	21.0	1.50
FR1 n5	Ant 0	30.1	25.0	25.0	28.9	25.0	0.70
FR1 n5	Ant 1	22.0	21.5	21.5	21.5	25.0	0.70
FR1 n26	Ant 0	30.1	25.0	25.0	29.4	25.0	0.70
FR1 n26	Ant 1	22.0	25.0	25.0	22.0	25.0	0.70
FR1 n66	Ant 4	21.0	22.5	27.2	21.0	25.0	0.70
FR1 n66	Ant 2	31.2	20.0	20.0	20.0	24.5	1.20
FR1 n66	Ant 5	19.5	22.0	22.0	19.5	23.0	1.50
FR1 n2	Ant 4	18.0	23.0	26.6	18.0	24.5	1.00
FR1 n2	Ant 2	31.1	21.5	21.5	20.5	24.5	1.20
FR1 n2	Ant 3	16.0	20.0	20.0	16.0	24.0	1.50
FR1 n2	Ant 5	18.5	20.5	20.5	18.5	22.5	1.50
FR1 n7	Ant 4	16.5	19.5	27.6	16.5	25.0	0.70
FR1 n7	Ant 2	29.7	20.5	20.5	20.5	25.0	0.70
FR1 n7	Ant 3	18.5	20.0	20.0	18.5	24.5	1.20
FR1 n7	Ant 5	18.5	20.0	20.0	18.5	22.5	1.50
FR1 n38	Ant 4	16.5	19.5	27.1	16.5	25.0	0.70
FR1 n38	Ant 2	30.5	21.5	21.5	21.5	25.0	0.70
FR1 n38	Ant 3	17.0	19.5	19.5	17.0	24.0	1.50
FR1 n38	Ant 5	19.0	21.0	21.0	19.0	22.5	1.50
FR1 n41	Ant 4	16.0	18.0	25.9	16.0	23.5	1.00
FR1 n41 HPUE	Ant 4	16.0	18.0	25.9	16.0	23.0	1.00
FR1 n41	Ant 2	29.0	20.0	20.0	20.0	23.5	1.50
FR1 n41 HPUE	Ant 2	29.0	20.0	20.0	20.0	23.0	1.50
FR1 n41	Ant 3	16.5	18.5	18.5	16.5	22.5	1.50
FR1 n41 HPUE	Ant 3	16.5	18.5	18.5	16.5	22.5	1.50
FR1 n41	Ant 5	17.0	20.0	20.0	17.0	21.0	1.50
FR1 n41 HPUE	Ant 5	17.0	20.0	20.0	17.0	20.5	1.50
FR1 n48	Ant 6	15.0	17.0	23.5	15.0	25.0	0.70
FR1 n48	Ant 8	14.0	21.0	21.0	14.0	22.5	1.50
FR1 n48	Ant 7	15.0	18.0	22.5	15.0	24.0	1.50
FR1 n48	Ant 9	28.8	16.5	16.5	15.0	22.5	1.50
FR1 n77_PC3	Ant 6	16.0	16.5	24.3	16.0	22.5	1.00
FR1 n77_PC2	Ant 6	16.0	16.5	24.3	16.0	22.0	1.00
FR1 n77_PC3	Ant 8	13.0	16.0	16.0	13.0	20.5	1.50
FR1 n77_PC2	Ant 8	13.0	16.0	16.0	13.0	20.5	1.50
FR1 n77_PC3	Ant 7	15.0	18.0	24.2	15.0	21.5	1.50
FR1 n77_PC2	Ant 7	15.0	18.0	24.2	15.0	21.5	1.50
FR1 n77_PC3	Ant 9	24.9	14.5	14.5	14.5	20.0	1.50
FR1 n77_PC2	Ant 9	24.9	14.5	14.5	14.5	20.0	1.50
FR1 n78_PC3	Ant 6	14.0	16.0	22.5	14.0	23.0	1.00
FR1 n78_PC2	Ant 6	14.0	16.0	22.5	14.0	23.0	1.00

FR1 n78_PC3	Ant 8	12.5	16.5	16.5	12.5	21.0	1.50
FR1 n78_PC2	Ant 8	12.5	16.5	16.5	12.5	21.0	1.50
FR1 n78_PC3	Ant 7	14.0	17.0	22.2	14.0	22.0	1.50
FR1 n78_PC2	Ant 7	14.0	17.0	22.2	14.0	22.0	1.50
FR1 n78_PC3	Ant 9	25.7	15.0	15.0	15.0	21.0	1.50
FR1 n78_PC2	Ant 9	25.7	15.0	15.0	15.0	21.0	1.50

Mediatek developed the TA-SAR algorithm to control instantaneous TX power for transmit frequencies less and larger than 6GHz respectively, so that the total time-averaged RF exposures are less than FCC requirement.

TA-SAR algorithm validation has been performed for 2G, 3G, LTE, NR FR1 according to cases with different combinations of operating parameters listed in Table 2-1.

Table 2-1 TA-SAR operating parameters

Operating parameters	Description
P_{sub6_limit}	The time-averaged maximum power level limit for different bands for 2G, 3G, LTE, and NR FR1.
$P_{LowThresh_offset}$	To calculate $P_{LowThresh}$. ($P_{LowThresh} = P_{sub6_limit} - P_{LowThresh_offset}$)
$P_{UE_backoff_offset}$	To calculate $P_{UE_backoff}$. ($P_{UE_backoff} = P_{sub6_limit} - P_{UE_backoff_offset}$)
$P_{UE_max_cust_offset}$	To calculate $P_{UE_max_cust}$. P_{UE_max} is maximum TX power at which a UE can possibly transmit. $P_{UE_max_cust} = \min(P_{UE_max}, P_{sub6_limit} + P_{UE_max_cust_offset})$

Table for Sub-6GHz TA-SAR validation test case list

Test Case #	Test Scenario	Test Configuration
1	1.Range of TA-SAR-parameters	FR1 n78
2	2.Time-varying TX power	GSM850
3		GSM1900
4		WCDMA IV
5		WCDMA II
6		LTE Band 4
7		LTE Band 48
8		FR1 n66
9		FR1 n78
10	3.Call disconnection and re-establishment	FR1 n78
11	4. Band handover / 6. Antenna Switch	LTE Band 48 Ant7 to FR1 n78 Ant 8
12	5. ECI(Exposure Condition Index)	FR1 n78 ECI 5 to ECI 4
13	7.Time window switching 100s-60s-100s	LTE B66 to LTE B42
14	7.Time window switching 60s-100s-60s	LTE B42 to LTE B66
15	8.SAR exposure switching	LTE B5 to FR1 n7
16	8.SAR exposure switching	LTE B7 to FR1 n78

Table 6-2 summarizes the test configurations of all RATs, and the corresponding worst-case measured SAR for each RAT under the power limit.

Table 6-2 Test configurations of radio technologies and worst-case measured SAR

Test case #	Test scenario	Tech	Band	Ant	ANT state (TX/RX)	EIRP	Channel	Freq (MHz)	BW	RB size	RB offset	Mode	Duty cycle	Position	Position details	Part 1 worst-case radio config 1g SAR measured @Plimit (W/kg)
1	Range of TA-SAR parameters	5G NR	n78	8	2/1	5	633332	3499.98	100	135	69	DFT-30,QPSK	100.0%	Left Side	10mm	0.180
2	Time-varying TX power	GSM	850	1	1/1	5	189	836.4	-	-	-	GPRS (4 Tx slots)	50.0%	Left Side	10mm	0.647
3		GSM	1900	4	1/1	5	661	1880	-	-	-	GPRS (4 Tx slots)	50.0%	Top Side	10mm	0.252
4		WCDMA	4	2	0/0	4	1413	1732.6	-	-	-	RMC 12.2Kbps	100.0%	Back	15mm	0.287
5		WCDMA	2	4	1/1	5	9400	1880	-	-	-	RMC 12.2Kbps	100.0%	Top Side	10mm	0.227
6		LTE	4	2	1/1	4	20175	1732.5	20	1	0	QPSK	100.0%	Back	15mm	0.355
7		LTE	48	7	3/1	5	55830	3609	20	1	0	QPSK	63.3%	Right Side	10mm	0.205
8		5G NR	n66	5	3/3	4	349000	1745	40	108	54	DFT-15,QPSK	100.0%	Back	15mm	0.241
9		5G NR	n78	8	2/1	5	633332	3499.98	100	135	69	DFT-30,QPSK	100.0%	Left Side	10mm	0.180
10	Call disconnection and re-establishment	5G NR	n78	8	2/1	5	633332	3499.98	100	135	69	DFT-30,QPSK	100.0%	Left Side	10mm	0.180
11	Band handover	LTE	48	7	3/1	5	55830	3609	20	1	0	QPSK	63.3%	Right Side	10mm	0.205
		5G NR	n78	8	2/1	5	633332	3499.98	100	135	69	DFT-30,QPSK	100.0%	Left Side	10mm	0.180
12	Change in operating state	5G NR	n78	8	2/1	5	633332	3499.98	100	135	69	DFT-30,QPSK	100.0%	Left Side	10mm	0.180
		5G NR	n78	8	2/1	4	633332	3499.98	100	1	1	DFT-30,QPSK	100.0%	Back	15mm	0.095
13	Time window switching (100s-60s-100s)	LTE	66	5	3/3	5	132322	1745	20	1	0	QPSK	100.0%	Right Side	10mm	0.367
		LTE	42	9	4/1	5	42590	3500	20	1	0	QPSK	63.3%	Back	10mm	0.285
14	Time window switching (60s-100s-60s)	LTE	42	9	4/1	5	42590	3500	20	1	0	QPSK	63.3%	Back	10mm	0.285
		LTE	66	5	3/3	5	132322	1745	20	1	0	QPSK	100.0%	Right Side	10mm	0.367
15	SAR exposure switching (ENDC)	LTE	5	1	1/1	5	20525	836.5	10	1	0	QPSK	100.0%	Left Side	10mm	0.843
		5G NR	n7	4	0/0	5	507000	2535	50	135	68	DFT-15,QPSK	100.0%	Top Side	10mm	0.142
16	SAR exposure switching (ENDC)	LTE	7	3	1/1	1	21100	2535	20	1	0	QPSK	100.0%	Right Cheek	0mm	0.552
		5G NR	n78	6	0/1	1	650000	3750	100	1	1	DFT-30,QPSK	100.0%	Left Tilted	0mm	0.863



Table 6-3 Test configurations of radio technologies and worst-case measured Plimit and Pmax

Test case #	Test scenario	Tech	Band	Ant	ANT state (TX/RX)	EIRP	Channel	Freq (MHz)	BW	RB size	RB offset	Mode	Duty cycle	Position	Position details	Plimit Setting (dBm)	Target Pmax (dBm)	Measured Plimit (dBm)	Measured Pmax (dBm)	PUE_max_cust_offset	PUE_backoff_offset
1	Range of TA-SAR parameters	5G NR	n78	8	2/1	5	633332	3499.98	100	135	69	DFT-30,QPSK	100.0%	Left Side	10mm	12.5	21	12.04	20.71	5	2
2	Time-varying	GSM	850	1	1/1	5	189	836.4	-	-	-	GPRS (4 Tx slots)	50.0%	Left Side	10mm	21.5	24	22.1	24.57	3	2
3		GSM	1900	4	1/1	5	661	1880	-	-	-	GPRS (4 Tx slots)	50.0%	Top Side	10mm	18	21.5	17.48	20.81	3	2
4		WCDMA	4	2	0/0	4	1413	1732.6	-	-	-	RMC 12.2Kbps	100.0%	Back	15mm	23	24	23.29	24.04	4	2
5		WCDMA	2	4	1/1	5	9400	1880	-	-	-	RMC 12.2Kbps	100.0%	Top Side	10mm	17.2	24.2	17.15	23.81	4	2
6		LTE	4	2	1/1	4	20175	1732.5	20	1	0	QPSK	100.0%	Back	15mm	23.5	25	23.29	24.67	4	2
7		LTE	48	7	3/1	5	55830	3609	20	1	0	QPSK	63.3%	Right Side	10mm	15	22	15.09	21.94	5	2
8		5G NR	n66	5	3/3	4	349000	1745	40	108	54	DFT-15,QPSK	100.0%	Back	15mm	22	23	22.32	23.3	4	2
9		5G NR	n78	8	2/1	5	633332	3499.98	100	135	69	DFT-30,QPSK	100.0%	Left Side	10mm	12.5	21	12.04	20.71	5	2
10	Call disconnection and re-establishment	5G NR	n78	8	2/1	5	633332	3499.98	100	135	69	DFT-30,QPSK	100.0%	Left Side	10mm	12.5	21	12.04	20.71	5	2
11	Band handover	LTE	48	7	3/1	5	55830	3609	20	1	0	QPSK	63.3%	Right Side	10mm	15	22	15.09	21.94	5	2
		5G NR	n78	8	2/1	5	633332	3499.98	100	135	69	DFT-30,QPSK	100.0%	Left Side	10mm	12.5	21	12.04	20.71	5	2
12	Change in operating state	5G NR	n78	8	2/1	5	633332	3499.98	100	135	69	DFT-30,QPSK	100.0%	Left Side	10mm	12.5	21	12.04	20.71	5	2
		5G NR	n78	8	2/1	4	633332	3499.98	100	1	1	DFT-30,QPSK	100.0%	Back	15mm	16.5	21	16.07	20.71	5	2
13	Time window switching (100s-60s-100s)	LTE	66	5	3/3	5	132322	1745	20	1	0	QPSK	100.0%	Right Side	10mm	19	23	19.14	23.07	4	2
		LTE	42	9	4/1	5	42590	3500	20	1	0	QPSK	63.3%	Back	10mm	15.5	21	15.03	20.61	5	2
14	Time window switching (60s-100s-60s)	LTE	42	9	4/1	5	42590	3500	20	1	0	QPSK	63.3%	Back	10mm	15.5	21	15.03	20.61	5	2
		LTE	66	5	3/3	5	132322	1745	20	1	0	QPSK	100.0%	Right Side	10mm	19	23	19.14	23.07	4	2
15	SAR exposure switching (ENDC)	LTE	5	1	1/1	5	20525	836.5	10	1	0	QPSK	100.0%	Left Side	10mm	21.5	25	22.07	25.58	4	2
		5G NR	n7	4	0/0	5	507000	2535	50	135	68	DFT-15,QPSK	100.0%	Top Side	10mm	16.5	25	16.2	24.61	4	2
16	SAR exposure switching (ENDC)	LTE	7	3	1/1	1	21100	2535	20	1	0	QPSK	100.0%	Right Cheek	0mm	18.5	24	18.22	23.82	4	2
		5G NR	n78	6	0/1	1	650000	3750	100	1	1	DFT-30,QPSK	100.0%	Left Tilted	0mm	14	23	13.56	23.88	5	2

5.2 Conducted Power Measurement Results for Scenario1: Range of TA-SAR Parameters

In this scenario, two TA-SAR parameters are swept to validate Mediatek's TA-SAR algorithm. The parameter sets are summarized in Table 6-3, and the test procedure follows section 4.2.2. The measurement setup is shown in Figure 6-1. The high-level summary of the final validation results are also listed in the last column of the table, which concludes that Mediatek's TA-SAR algorithm can maintain the time-averaged SAR is always below the FCC requirement for all test cases. The following section will demonstrate case-by-case to show how Mediatek's TA-SAR algorithm behaves for different parameters.

● Case1: FR1 n78 result for Range of TA-SAR

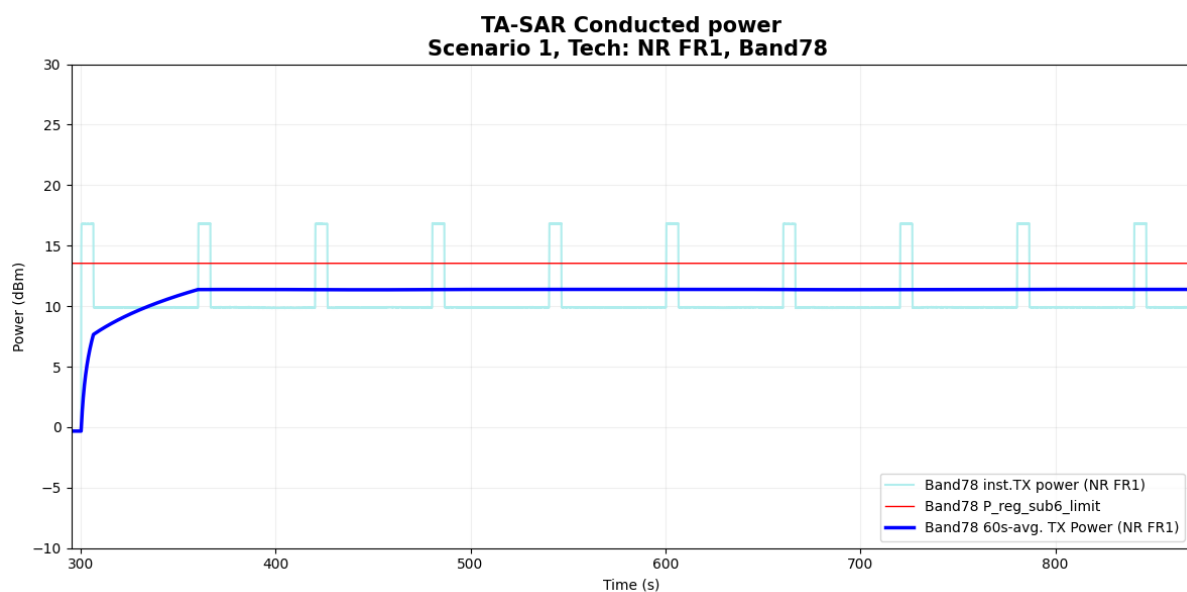


Figure 6- 5 Time-averaged conducted TX power over time

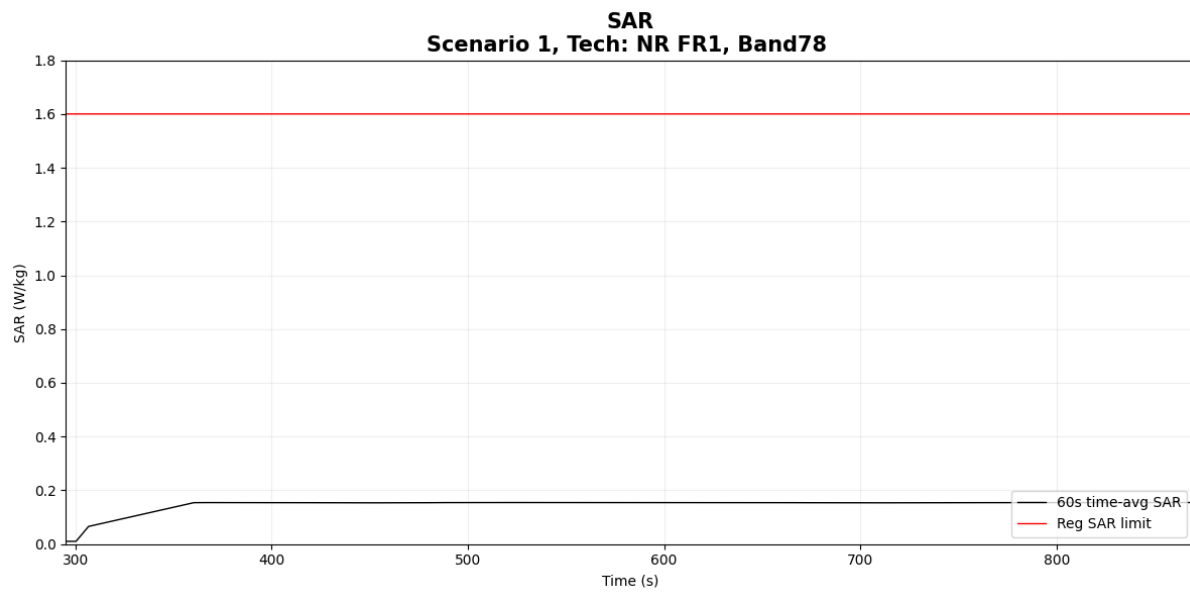


Figure 6- 6 Time-averaged SAR

FCC 1gSAR limit	1.6 W/kg
Max time averaged 1gSAR	0.155 W/kg
Validation result: pass	

5.3 Conducted Power Measurement Results for Scenario 2: Time-Varying TX Power

In this scenario, Mediatek's TA-SAR algorithm is tested under more dynamic power test sequences. The test sequence #1 is shown in section 4.1 and test sequence #2 is tabulated in table 4.4. All of the test cases for this scenario are relegated in Table 6-3, and the test procedure follows section 4.3.2. The measurement setup is shown in Figure 6-1. The high-level summary of the final validation results are also listed in the last column of the table, which concludes that Mediatek's TA-SAR algorithm can maintain the time-averaged SAR is always below the FCC requirement for all test cases. The following sections will demonstrate case-by-case to show how Mediatek's TA-SAR algorithm behaves for each RAT.

5.3.1 Measurement results for 2G

The corresponding detailed test procedure is described in 4.3.2. For the figure set of each case, the first figure demonstrates the EUT's instantaneous conducted TX power, the time-averaged conducted TX power behavior over time, and the power limit ($P_{reg_sub6_limit} = P_{sub6_limit} + \text{Total uncertainty}$). The second figure illustrates the corresponding time-averaged SAR over time converted from the TX time-averaged power by using the equation listed in section 4.3.2.

● Case2-1: GSM850 result for test sequence 1

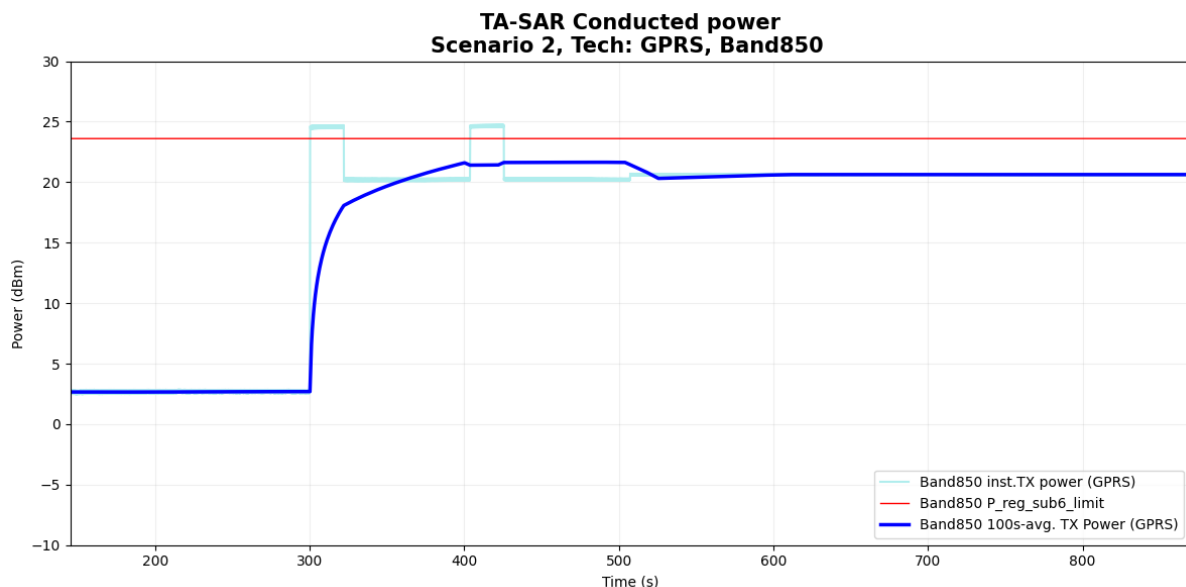


Figure 6- 7 Time-averaged conducted TX power over time

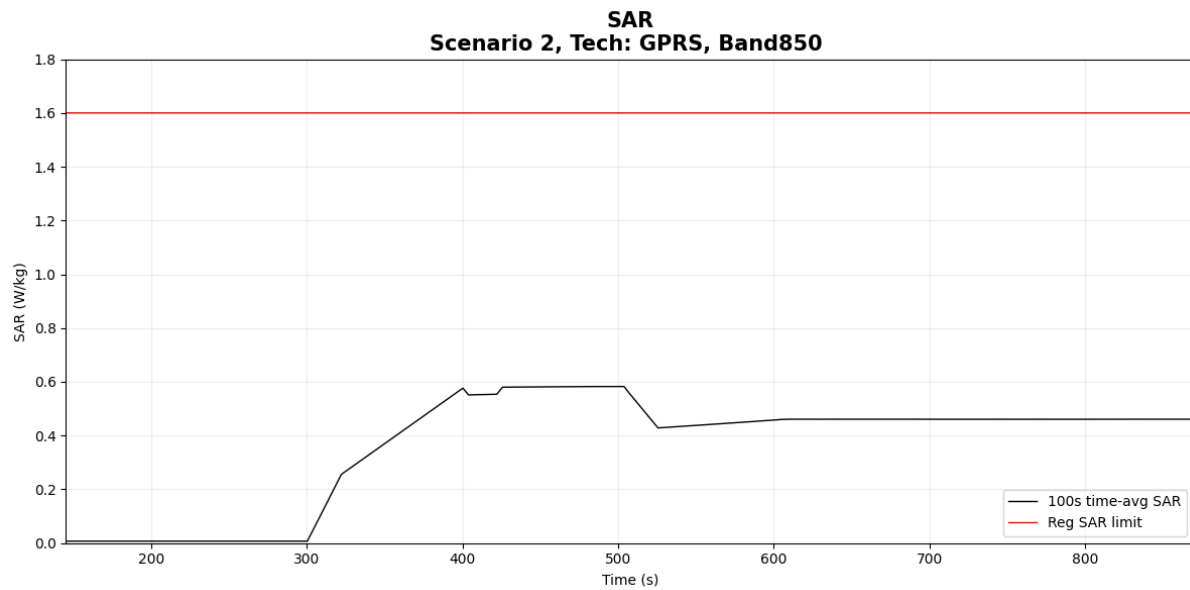


Figure 6- 8 Time-averaged SAR

FCC 1gSAR limit	1.6 W/kg
Max time averaged 1gSAR	0.583 W/kg
Validation result: pass	

● Case2-2: GSM850 result for test sequence 2

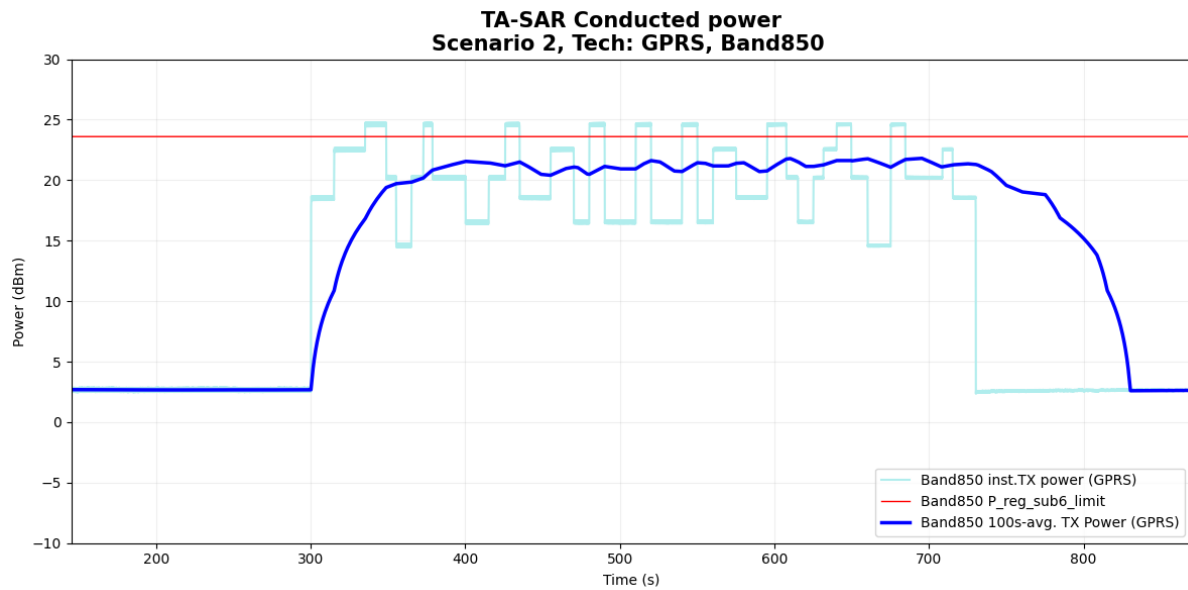


Figure 6- 9 Time-averaged conducted TX power over time

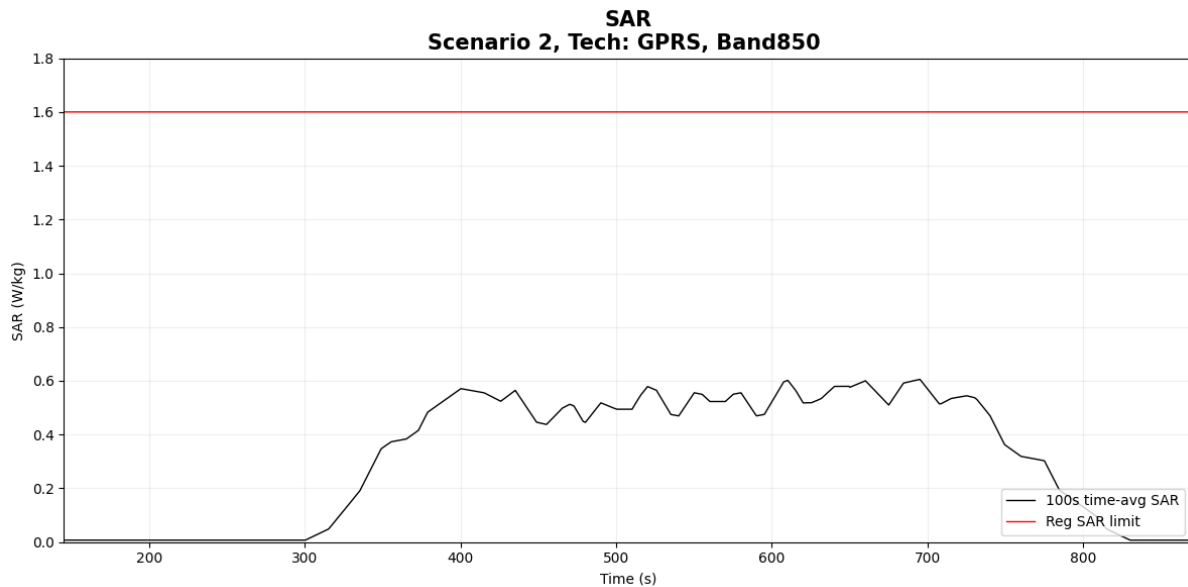


Figure 6- 10 Time-averaged SAR

FCC 1gSAR limit	1.6 W/kg
Max time averaged 1gSAR	0.606 W/kg
Validation result: pass	

● Case3-1: GSM1900 result for test sequence 1

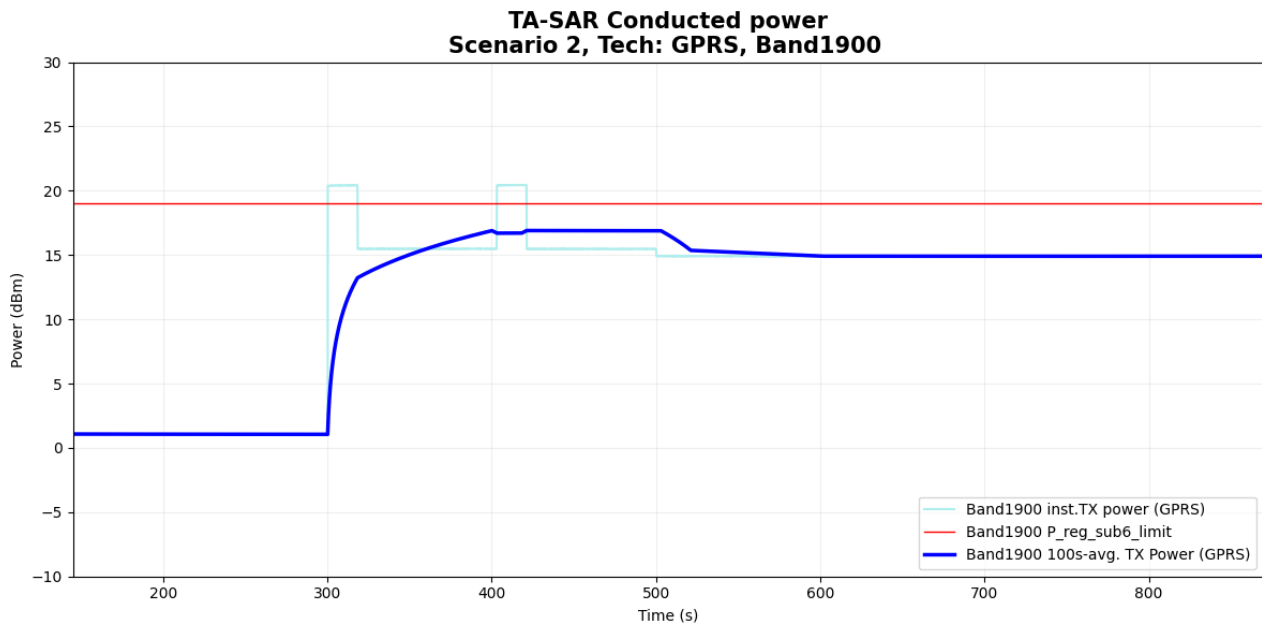


Figure 6- 11 Time-averaged conducted TX power over time

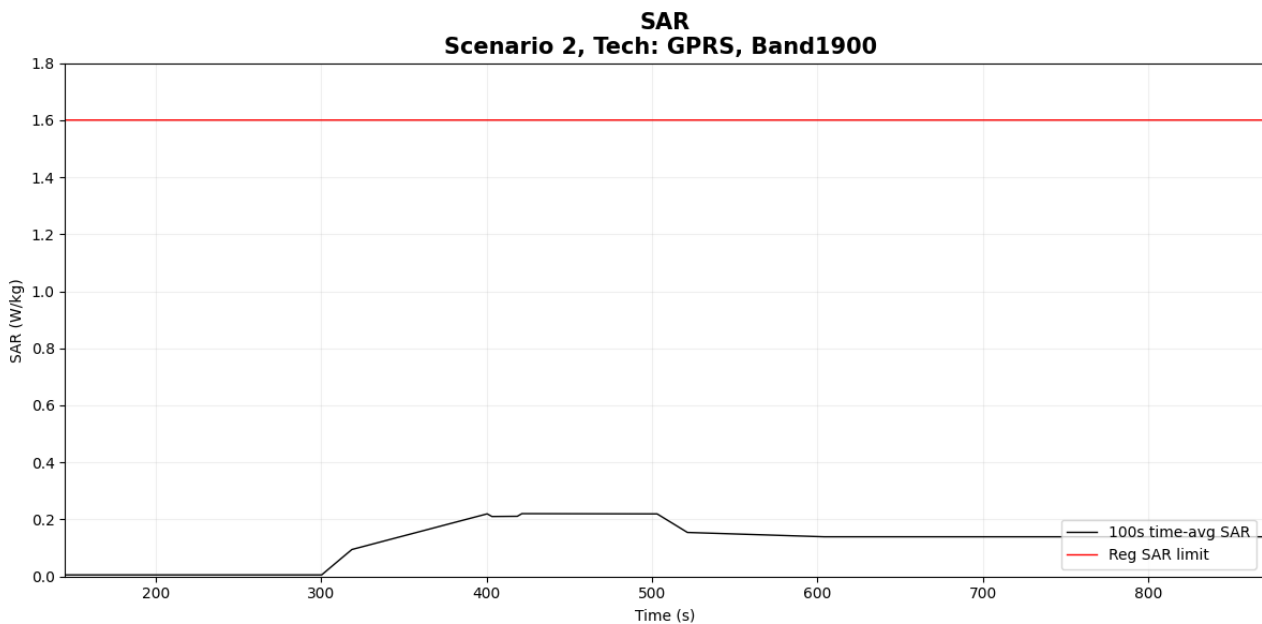


Figure 6- 12 Time-averaged SAR

FCC 1gSAR limit	1.6 W/kg
Max time averaged 1gSAR	0.220 W/kg
Validation result: pass	

● **Case3-2: GSM1900 result for test sequence 2**

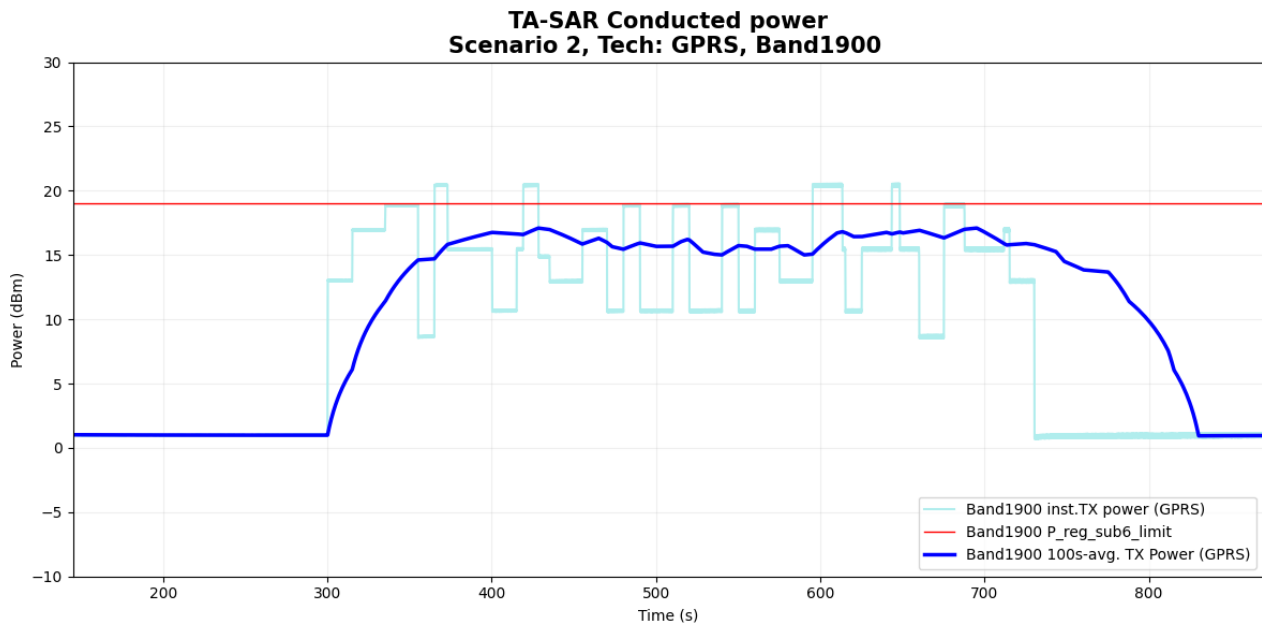


Figure 6- 13 Time-averaged conducted TX power over time

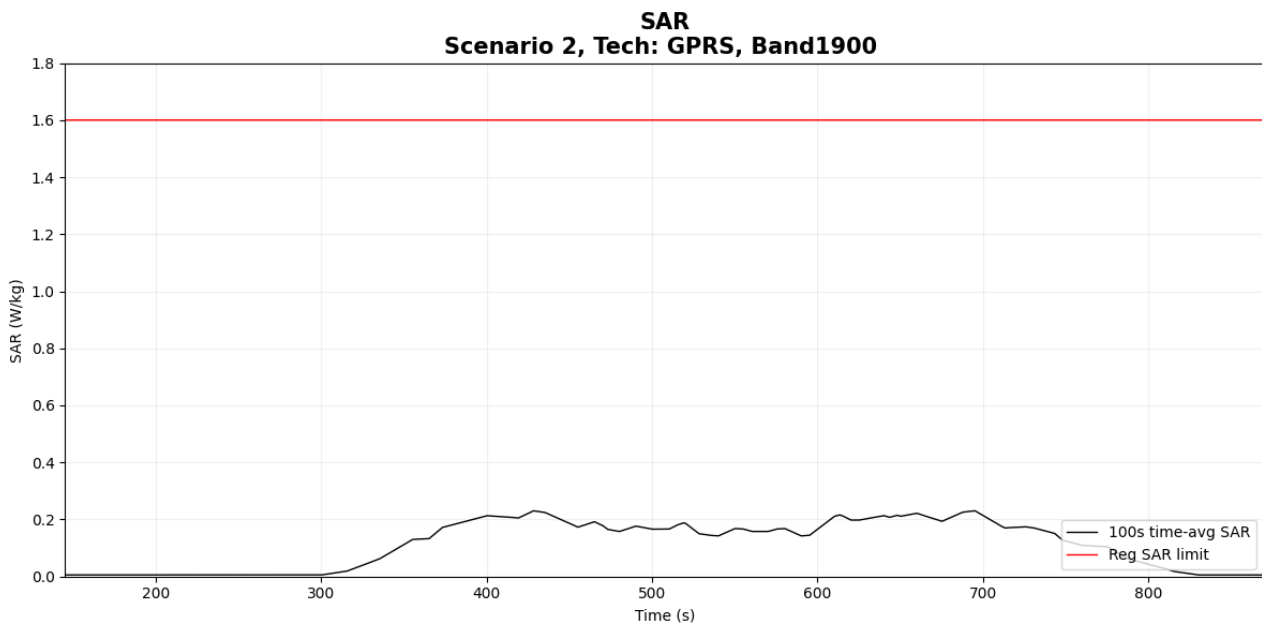


Figure 6- 14 Time-averaged SAR

FCC 1gSAR limit	1.6 W/kg
Max time averaged 1gSAR	0.231 W/kg
Validation result: pass	

5.3.2 Measurement results for 3G

The corresponding detailed test procedure is described in 4.3.2. For the figure set of each case, the first figure demonstrates the EUT's instantaneous conducted TX power, the time-averaged conducted TX power behavior over time, and the power limit ($P_{reg_sub6_limit} = P_{sub6_limit} + \text{Total uncertainty}$). The second figure illustrates the corresponding time-averaged SAR over time converted from the TX time-averaged power by using the equation listed in section 4.3.2. For all test cases, the time-averaged SAR does not exceed the FCC limit.

● Case4-1: WCDMA B4 result for test sequence 1

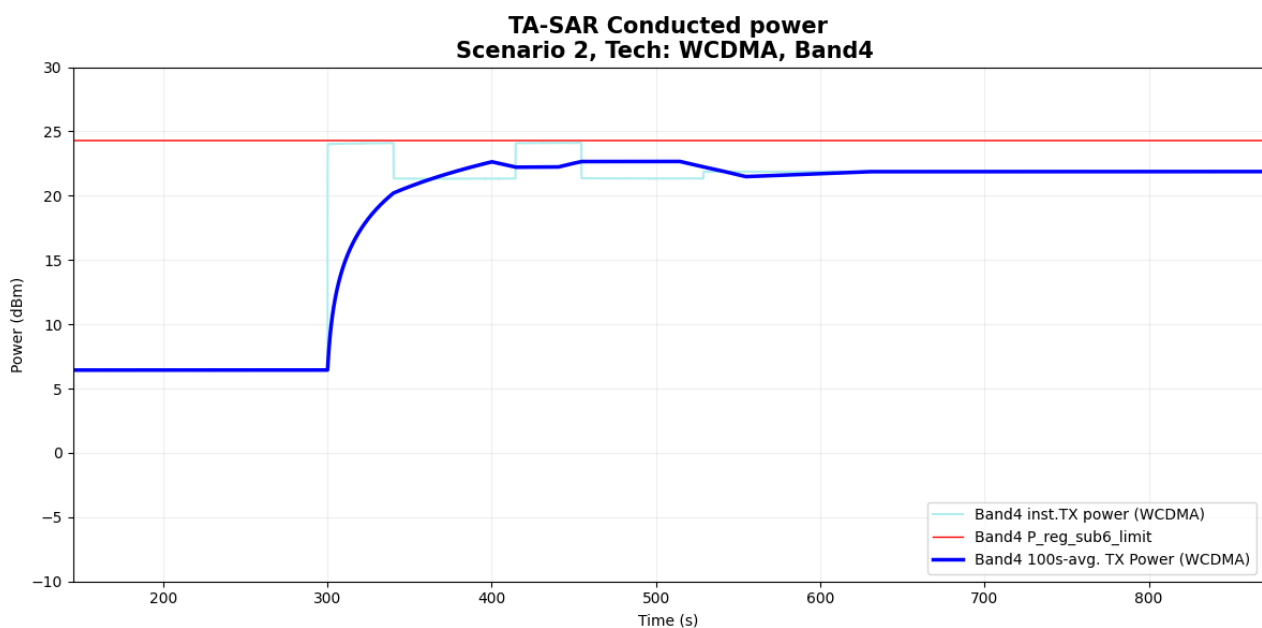


Figure 6- 15 Time-averaged conducted TX power over time

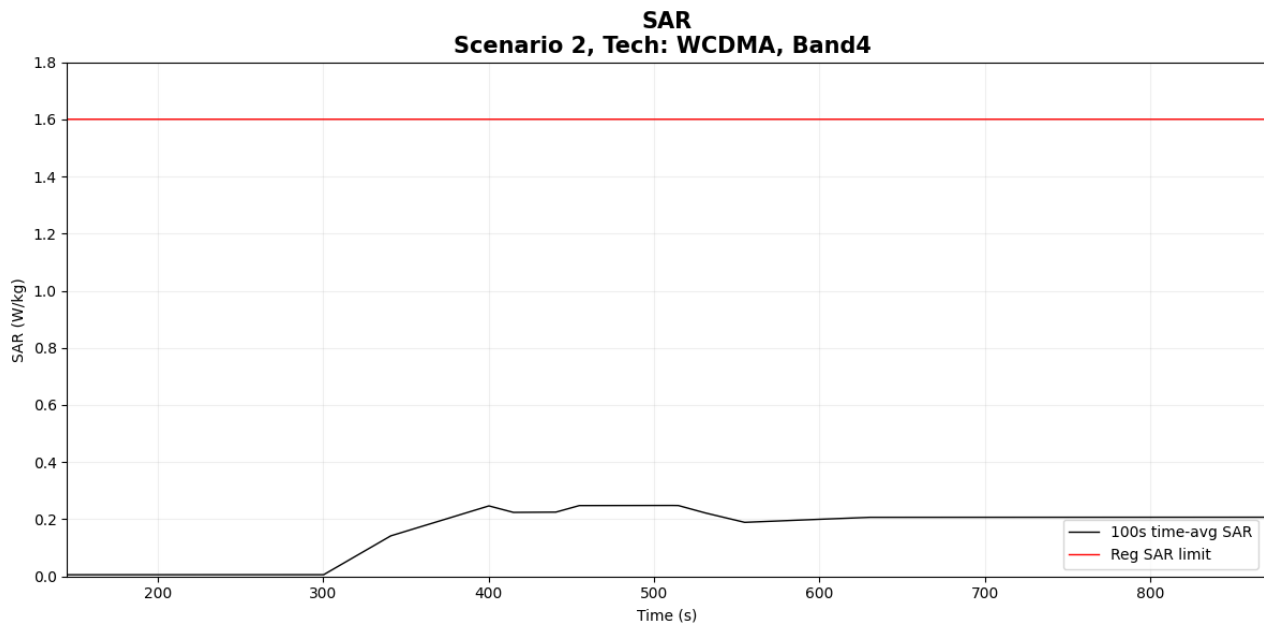


figure 6- 16 Time-averaged SAR

FCC 1gSAR limit	1.6 W/kg
Max time averaged 1gSAR	0.248 W/kg
Validation result: pass	

● Case4-2: WCDMA B4 result for test sequence 2

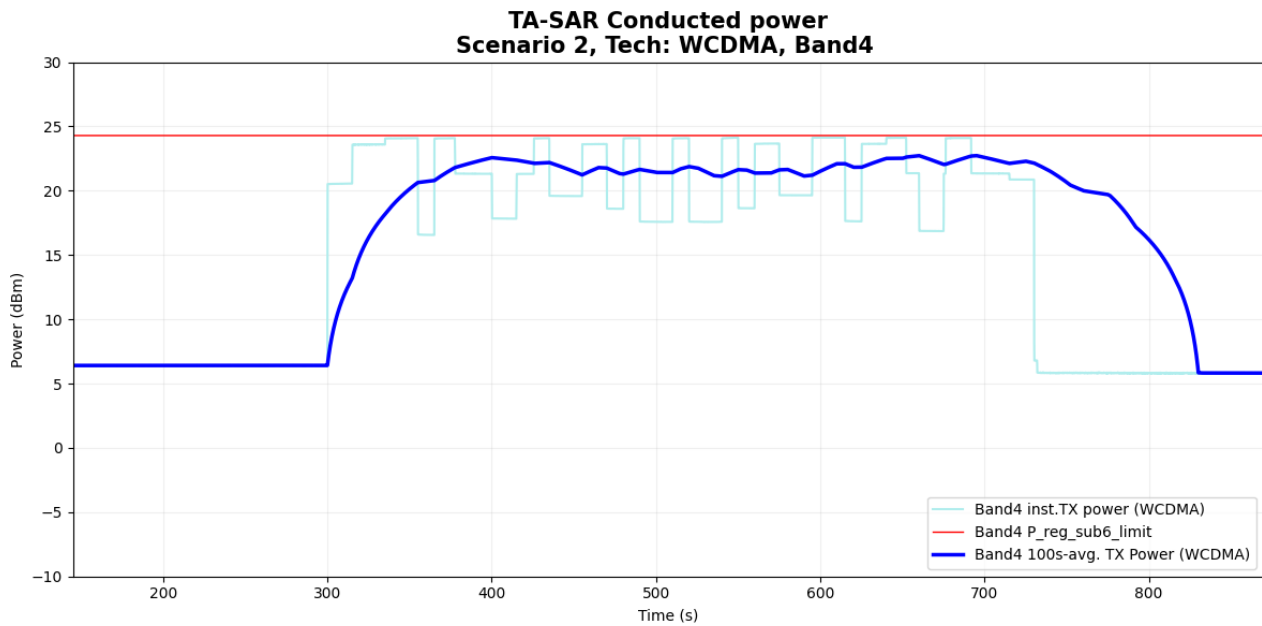


Figure 6- 17 Time-averaged conducted TX power over time

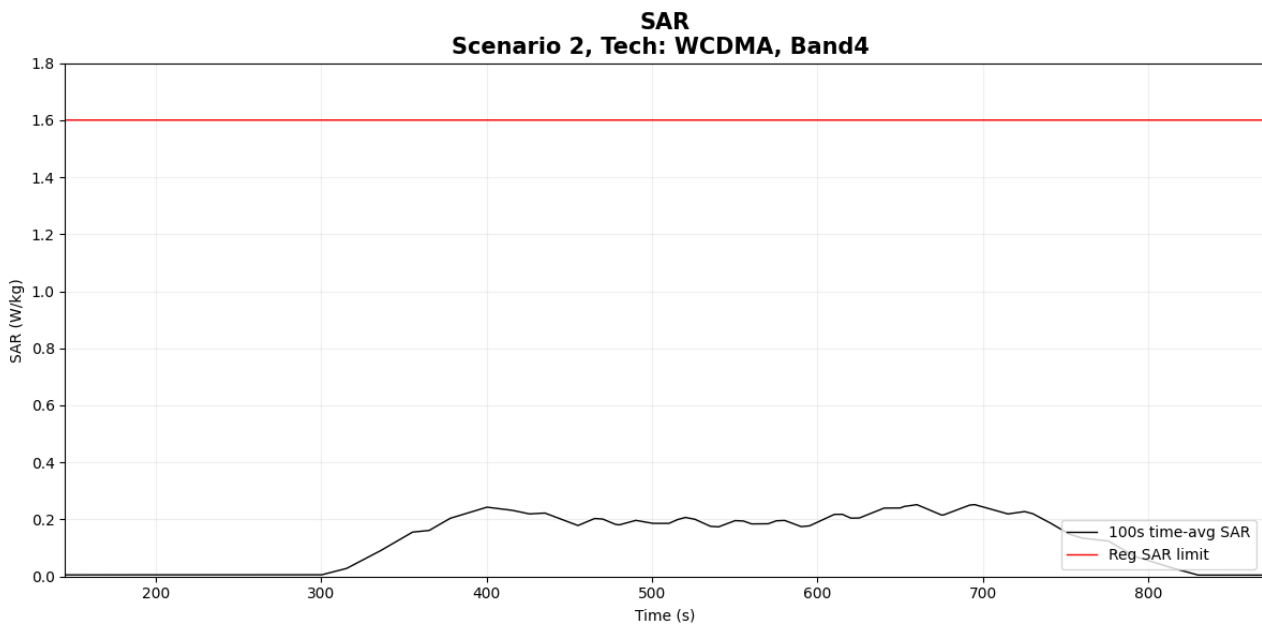


Figure 6- 18 Time-averaged SAR

FCC 1gSAR limit	1.6 W/kg
Max time averaged 1gSAR	0.252 W/kg
Validation result: pass	

● Case5-1: WCDMA B2 result for test sequence 1

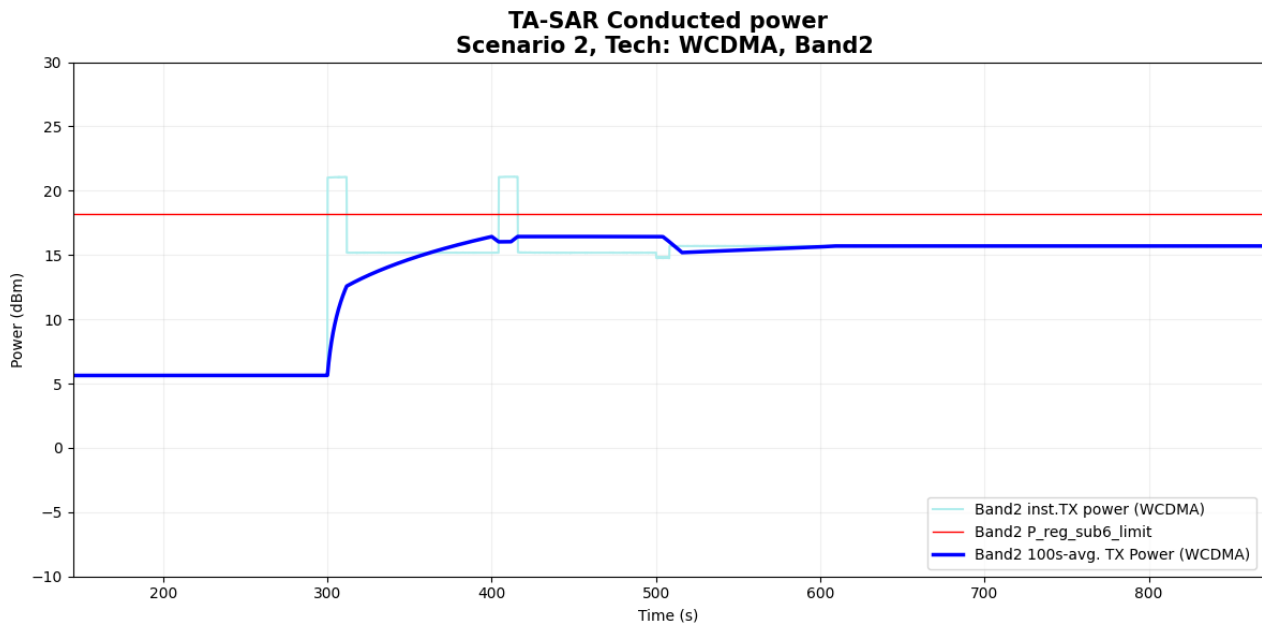


Figure 6- 19 Time-averaged conducted TX power over time

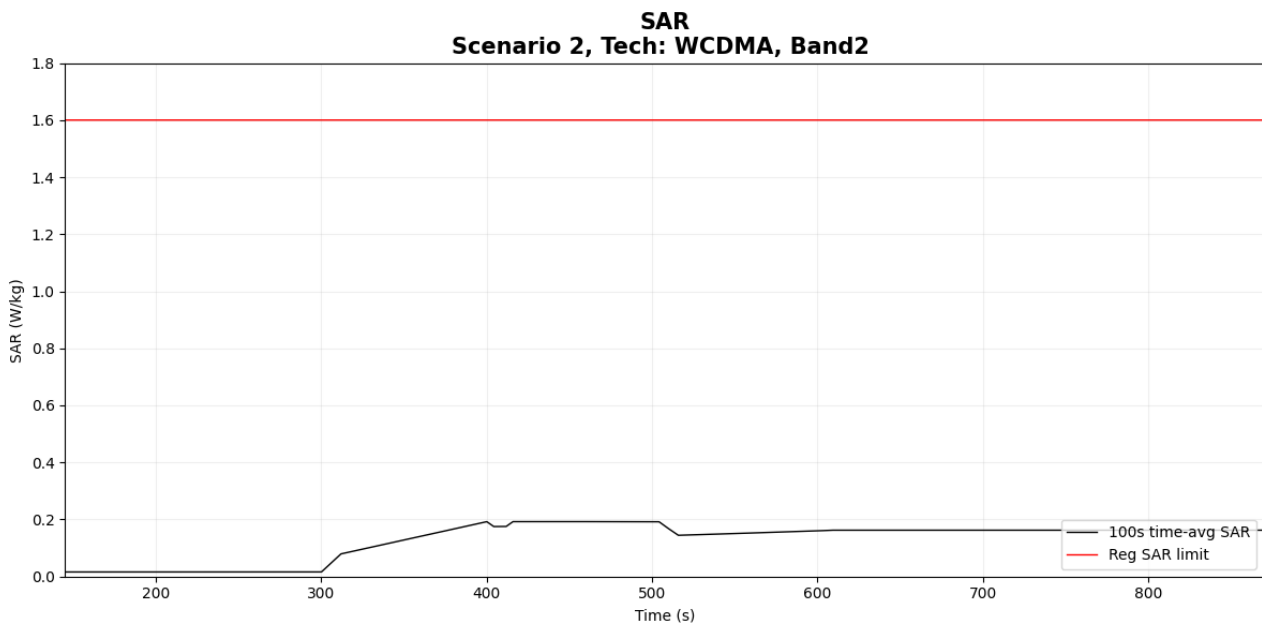


Figure 6- 20 Time-averaged SAR

FCC 1gSAR limit	1.6 W/kg
Max time averaged 1gSAR	0.192 W/kg
Validation result: pass	

● Case5-2: WCDMA B2 result for test sequence 2

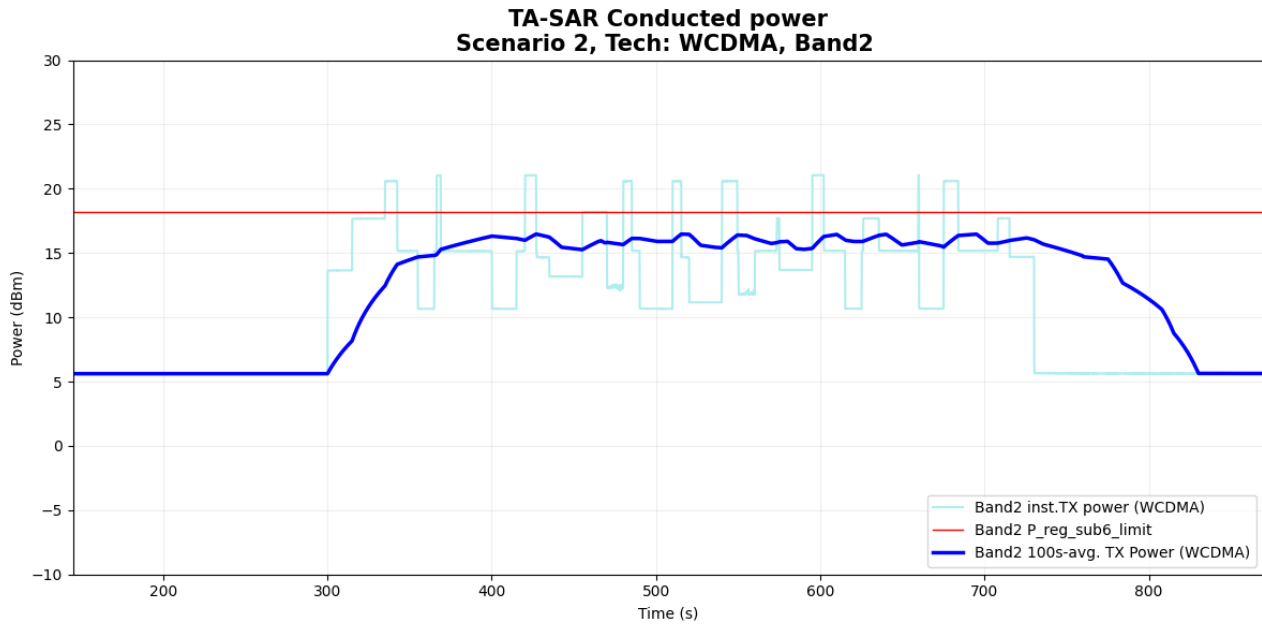


Figure 6- 21 Time-averaged conducted TX power over time

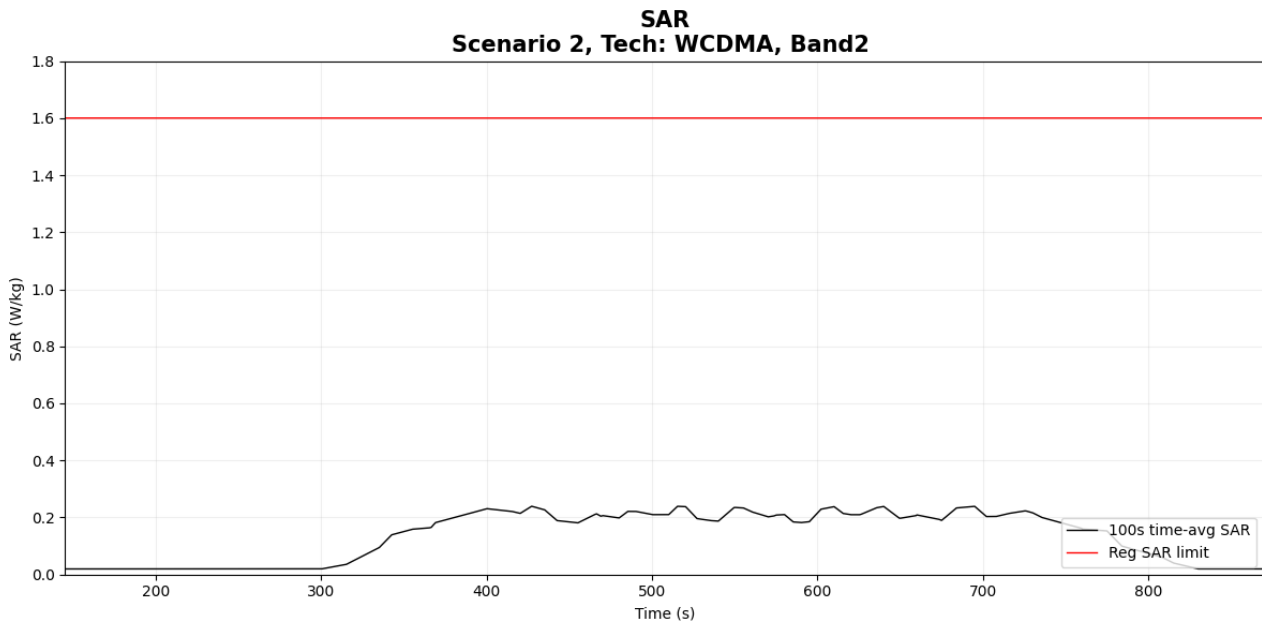


Figure 6- 22 Time-averaged SAR

FCC 1gSAR limit	1.6 W/kg
Max time averaged 1gSAR	0.239 W/kg
Validation result: pass	

5.3.3 Measurement results for LTE

The corresponding detailed test procedure is described in 4.3.2. For the figure set of each case, the first figure demonstrates the EUT's instantaneous conducted TX power, the time-averaged conducted TX power behavior over time, and the power limit ($P_{reg_sub6_limit} = P_{sub6_limit} + \text{Total uncertainty}$). The second figure illustrates the corresponding time-averaged SAR over time converted from the TX time-averaged power by using the equation listed in section 4.3.2. For all test cases, the time-averaged SAR does not exceed the FCC limit.

● Case6-1: LTE Band 4 result for test sequence 1

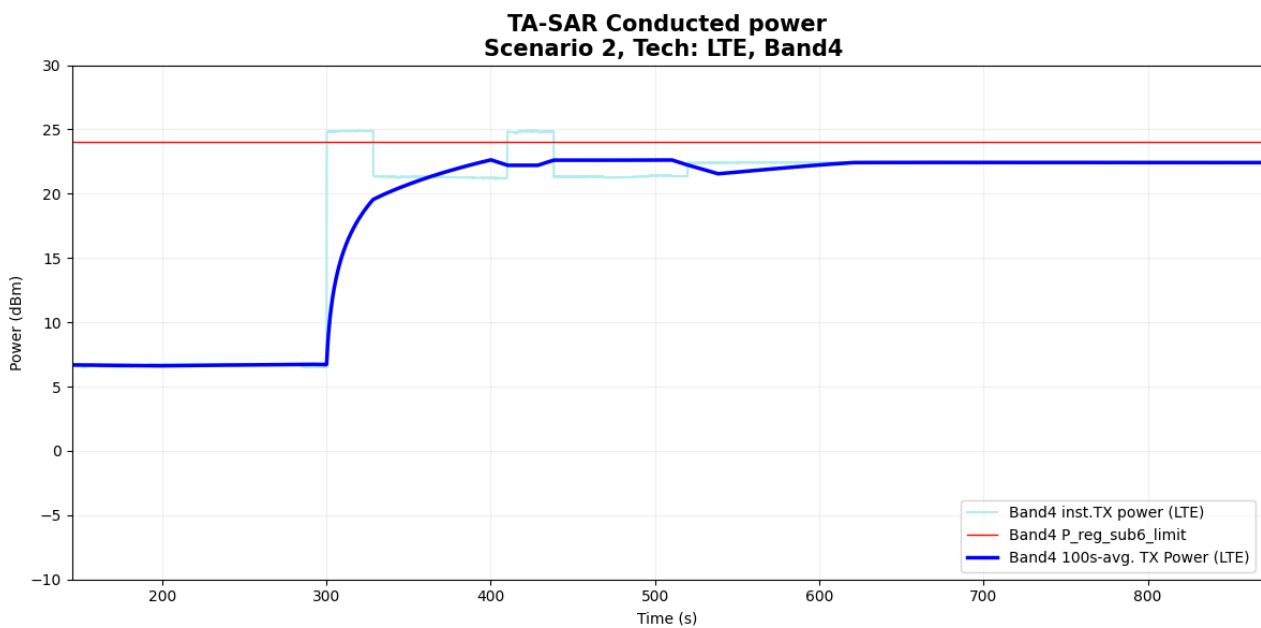


Figure 6- 23 Time-averaged conducted TX power over time

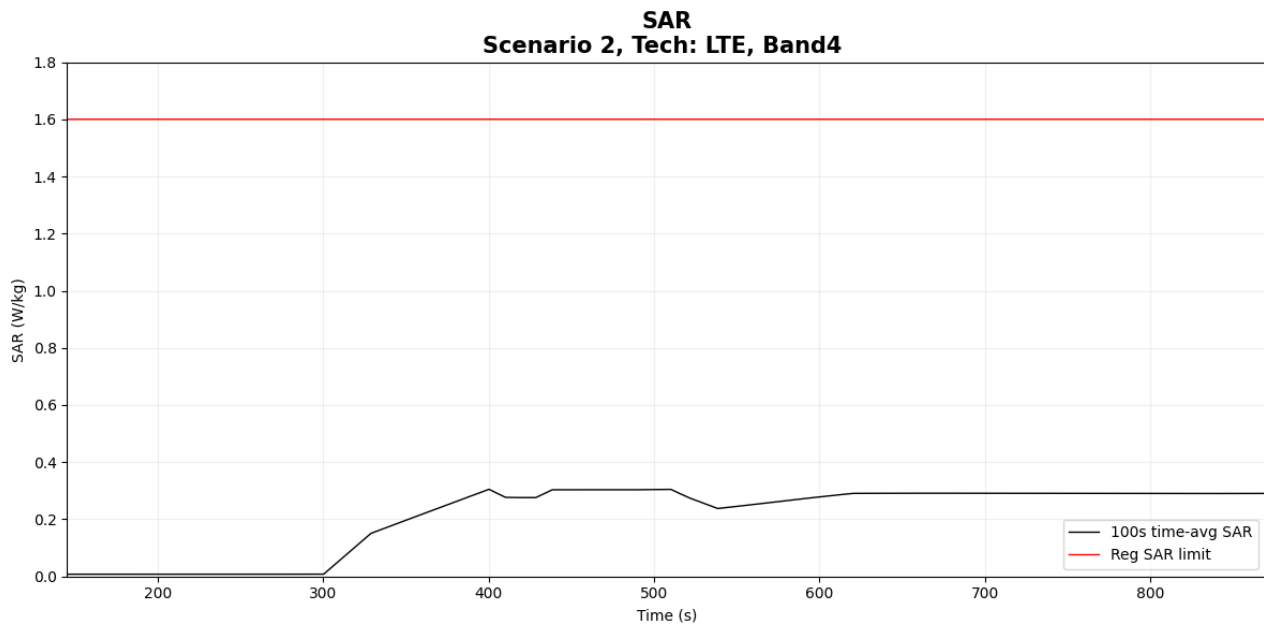


Figure 6- 24 Time-averaged SAR

FCC 1gSAR limit	1.6 W/kg
Max time averaged 1gSAR	0.305 W/kg
Validation result: pass	

● Case6-2: LTE Band 4 result for test sequence 2

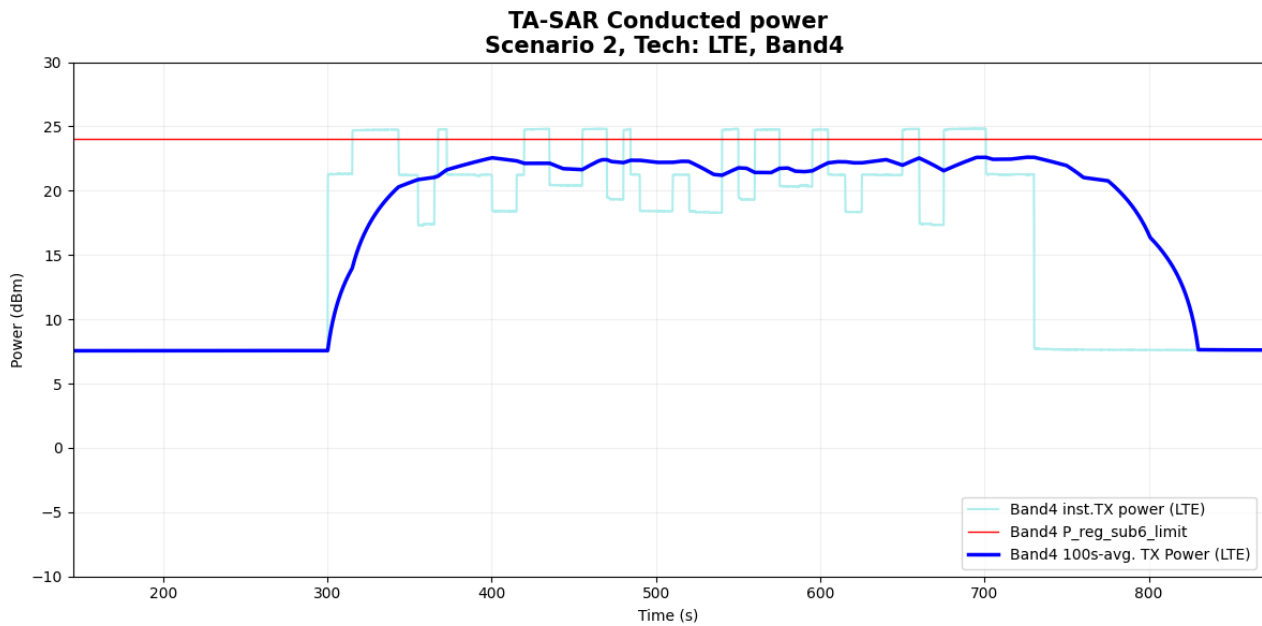


Figure 6- 25 Time-averaged conducted TX power over time

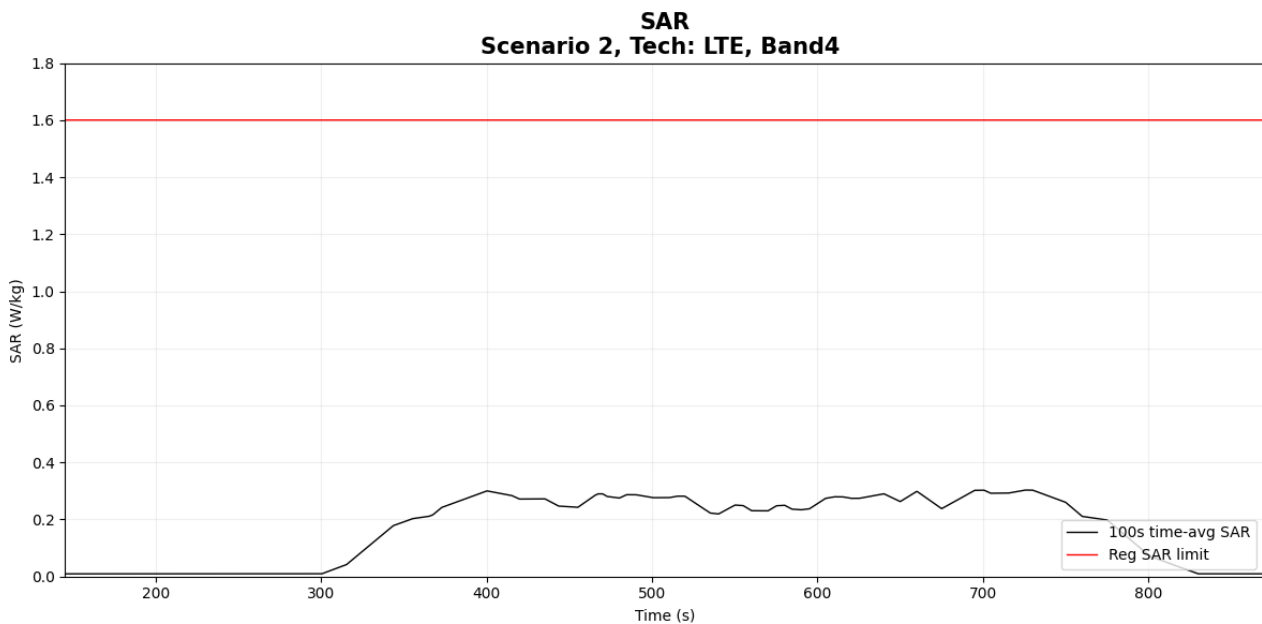


Figure 6- 26 Time-averaged SAR

FCC 1gSAR limit	1.6 W/kg
Max time averaged 1gSAR	0.303 W/kg
Validation result: pass	

● Case7-1: LTE Band 48 result for test sequence 1

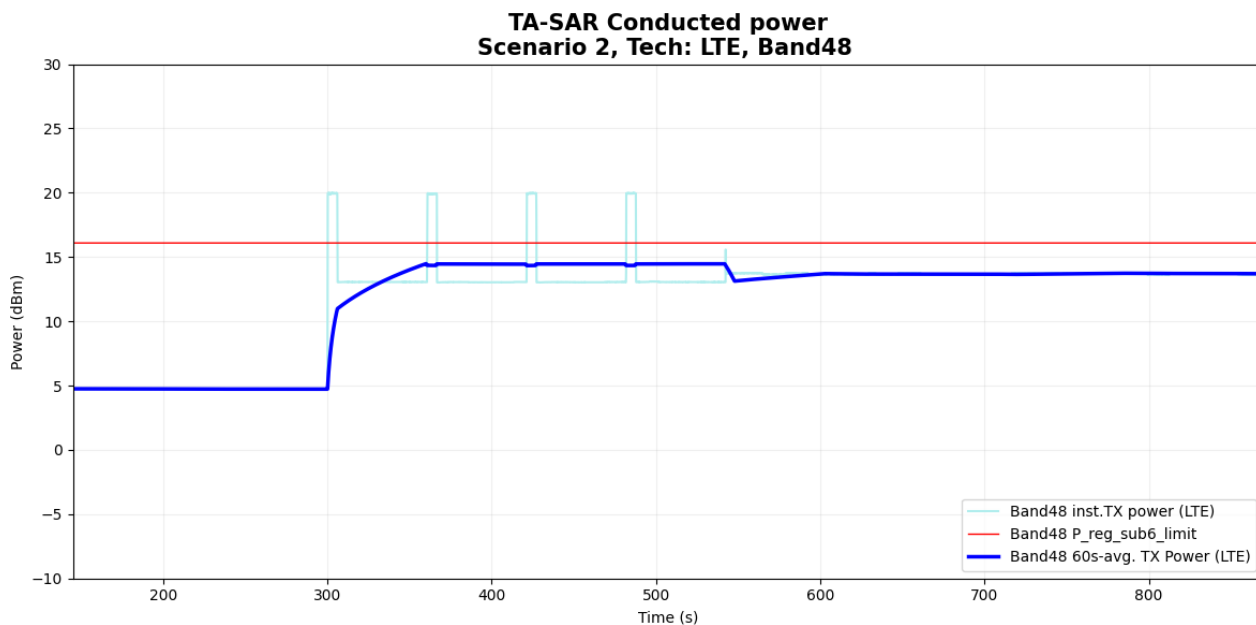


Figure 6- 27 Time-averaged conducted TX power over time

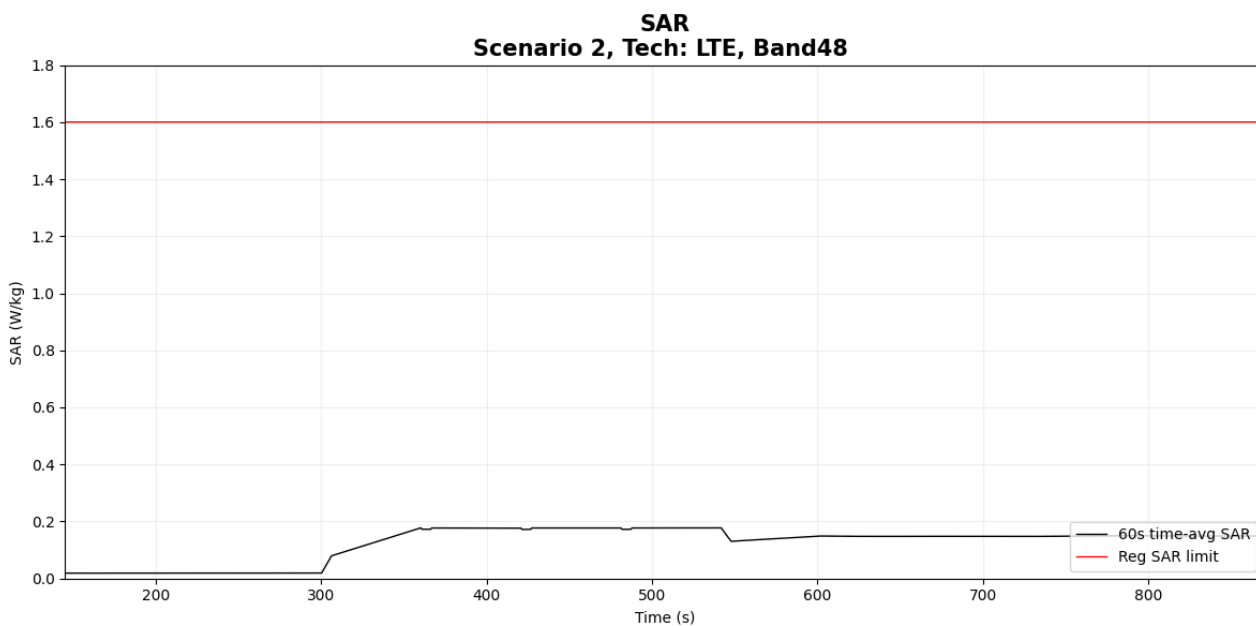


Figure 6- 28 Time-averaged SAR

FCC 1gSAR limit	1.6 W/kg
Max time averaged 1gSAR	0.178 W/kg
Validation result: pass	

● Case7-2: LTE Band 48 result for test sequence 2

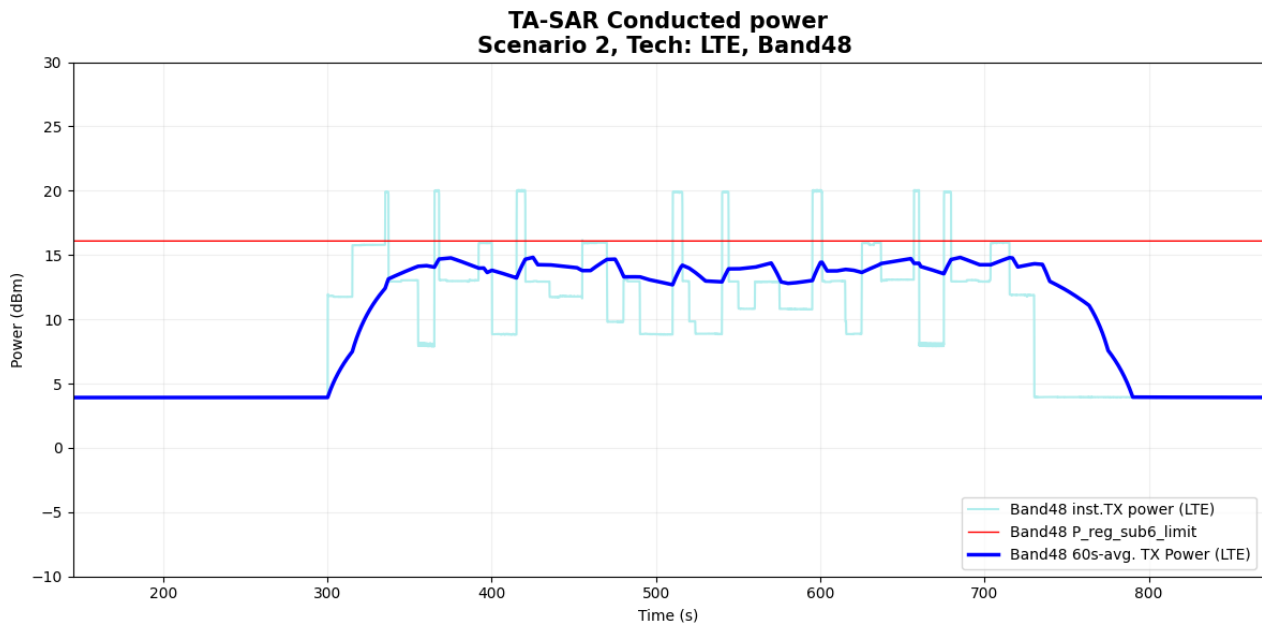


Figure 6- 29 Time-averaged conducted TX power over time

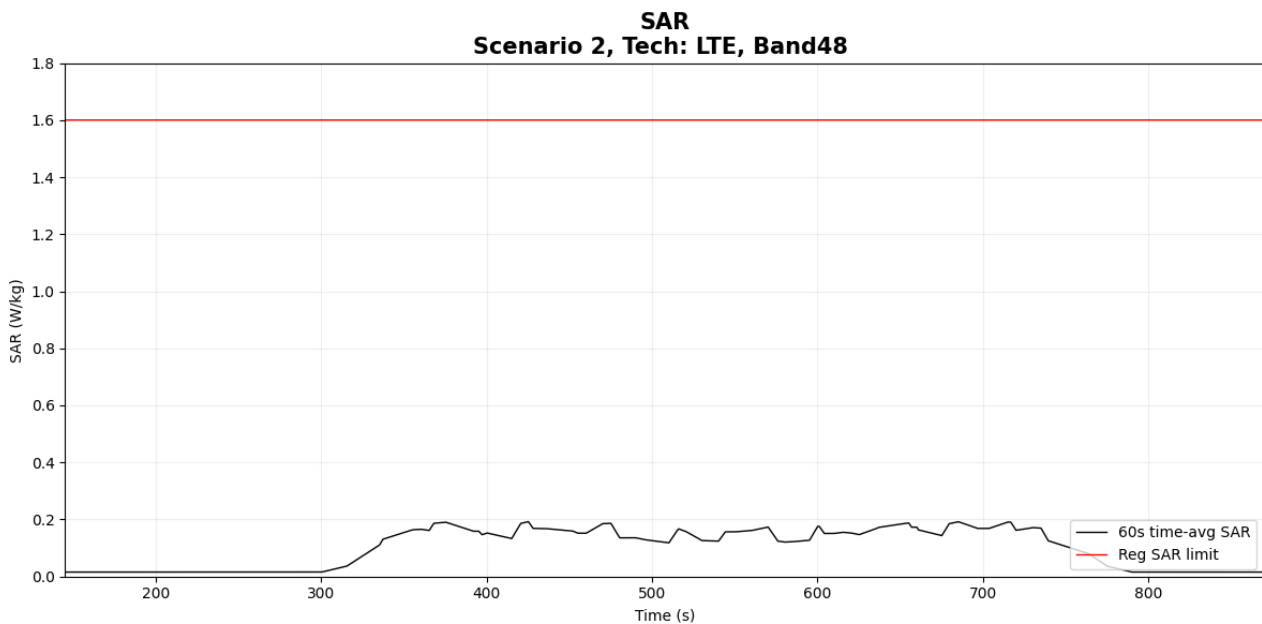


Figure 6- 30 Time-averaged SAR

FCC 1gSAR limit	1.6 W/kg
Max time averaged 1gSAR	0.193 W/kg
Validation result: pass	

5.3.4 Measurement results for NR

The corresponding detailed test procedure is described in 4.3.2. For the figure set of each case, the first figure demonstrates the EUT's instantaneous conducted TX power, the time-averaged conducted TX power behavior over time, and the power limit ($P_{reg_sub6_limit} = P_{sub6_limit} + \text{Total uncertainty}$). The second figure illustrates the corresponding time-averaged SAR over time converted from the TX time-averaged power by using the equation listed in section 4.3.2. For all test cases, the time-averaged SAR does not exceed the FCC limit.

- Case8-1: NR n66 result for test sequence 1

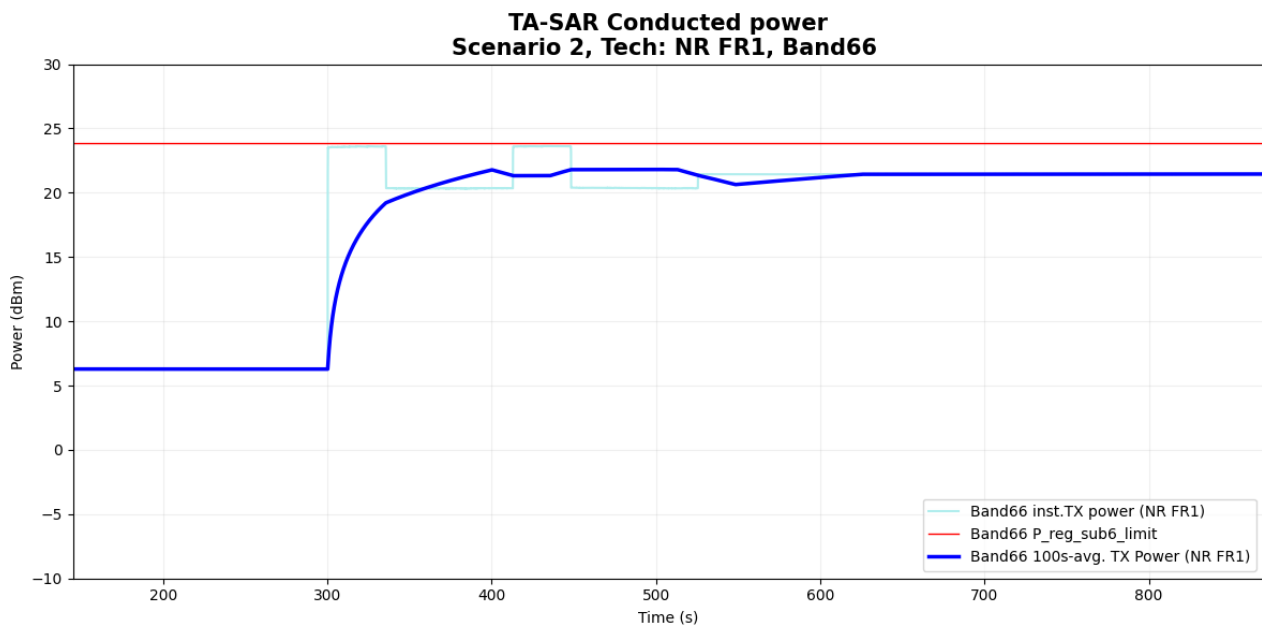


Figure 6- 31 Time-averaged conducted TX power over time

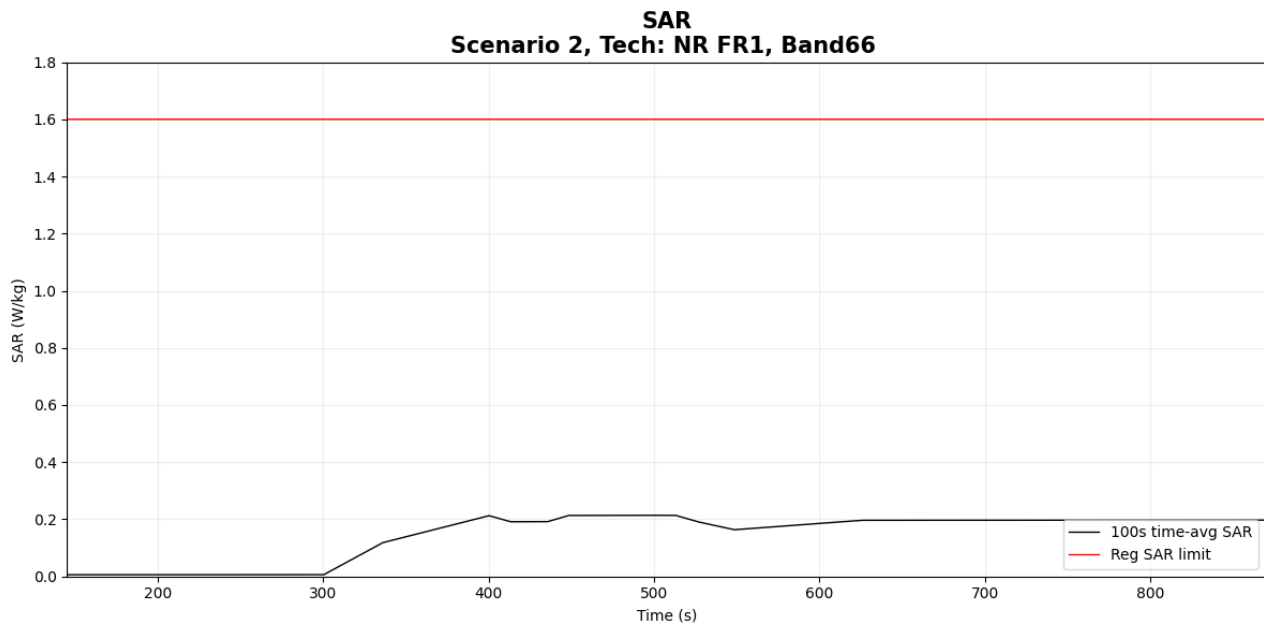


Figure 6- 32 Time-averaged SAR

FCC 1gSAR limit	1.6 W/kg
Max time averaged 1gSAR	0.214 W/kg
Validation result: pass	

● Case8-2: NR n66 result for test sequence 2

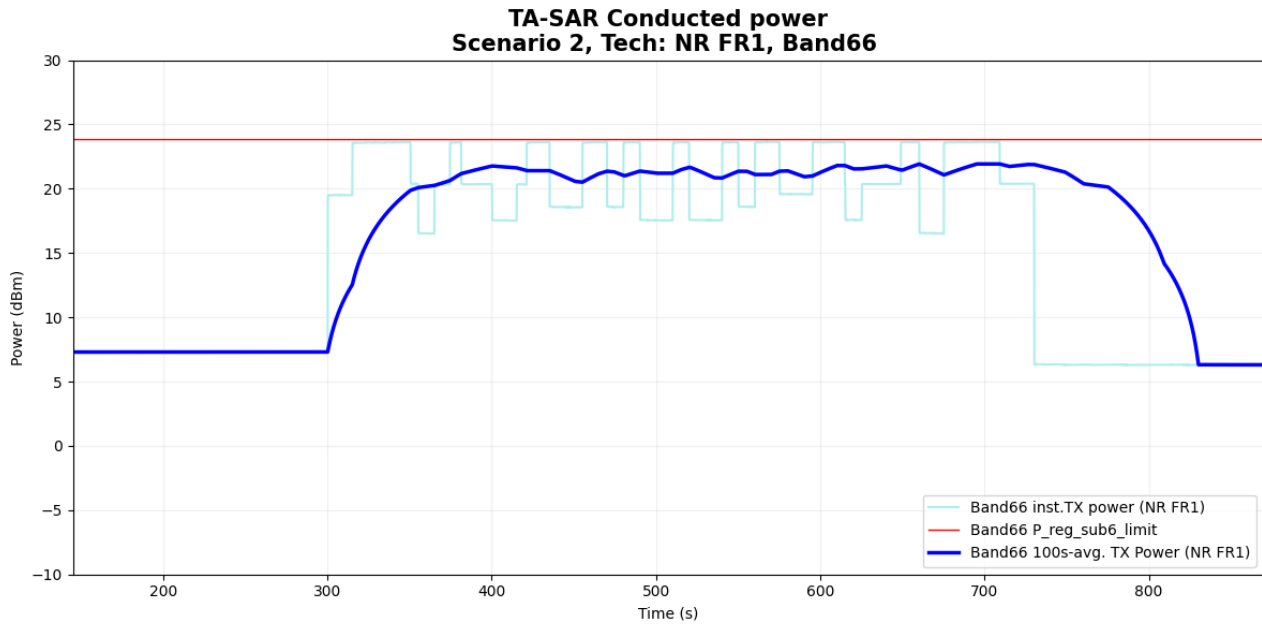


Figure 6- 33 Time-averaged conducted TX power over time

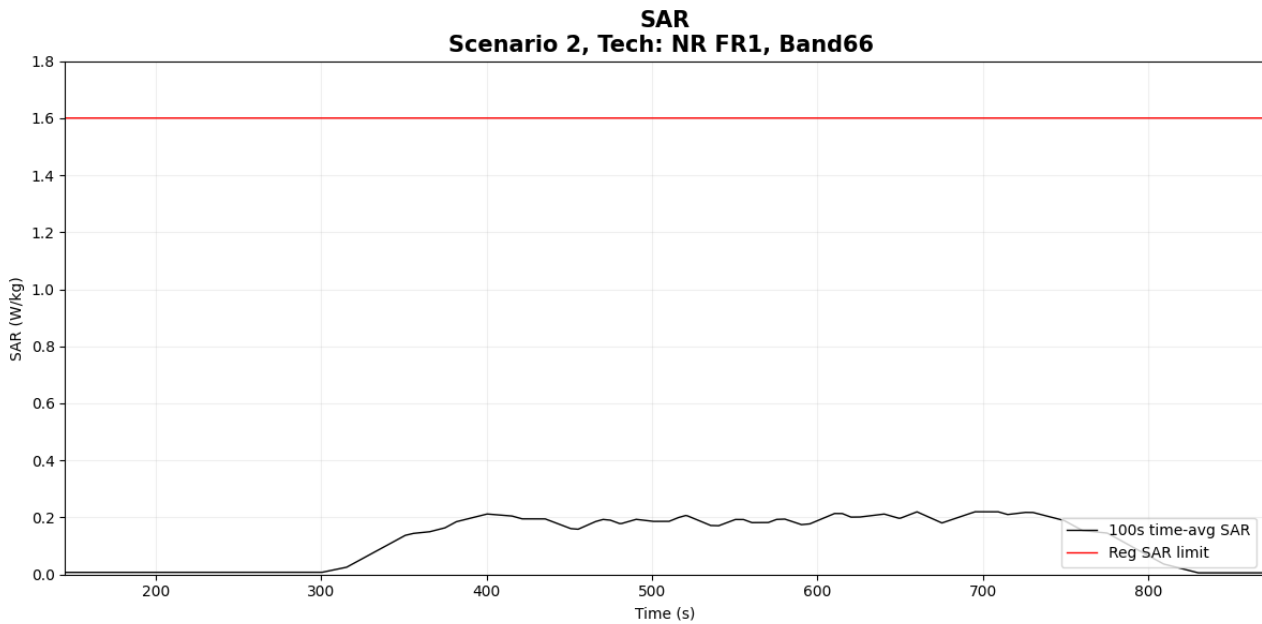


Figure 6- 34 Time-averaged SAR

FCC 1gSAR limit	1.6 W/kg
Max time averaged 1gSAR	0.220 W/kg
Validation result: pass	

● Case9-1: NR n78 result for test sequence 1

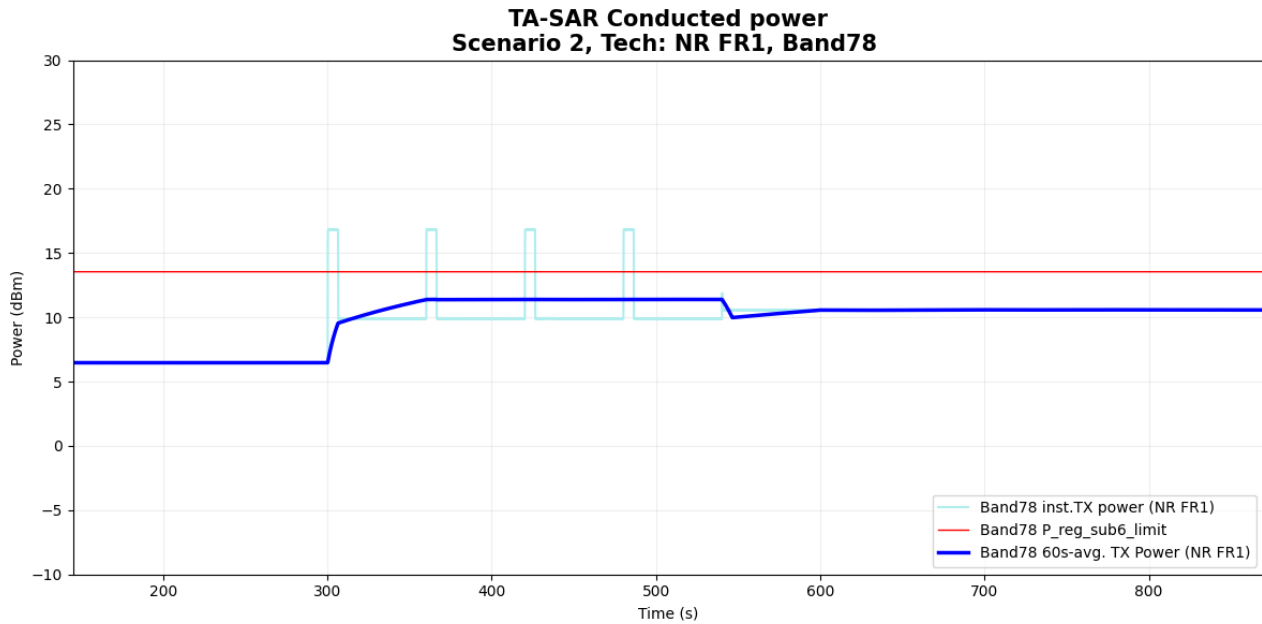


Figure 6- 35 Time-averaged conducted TX power over time

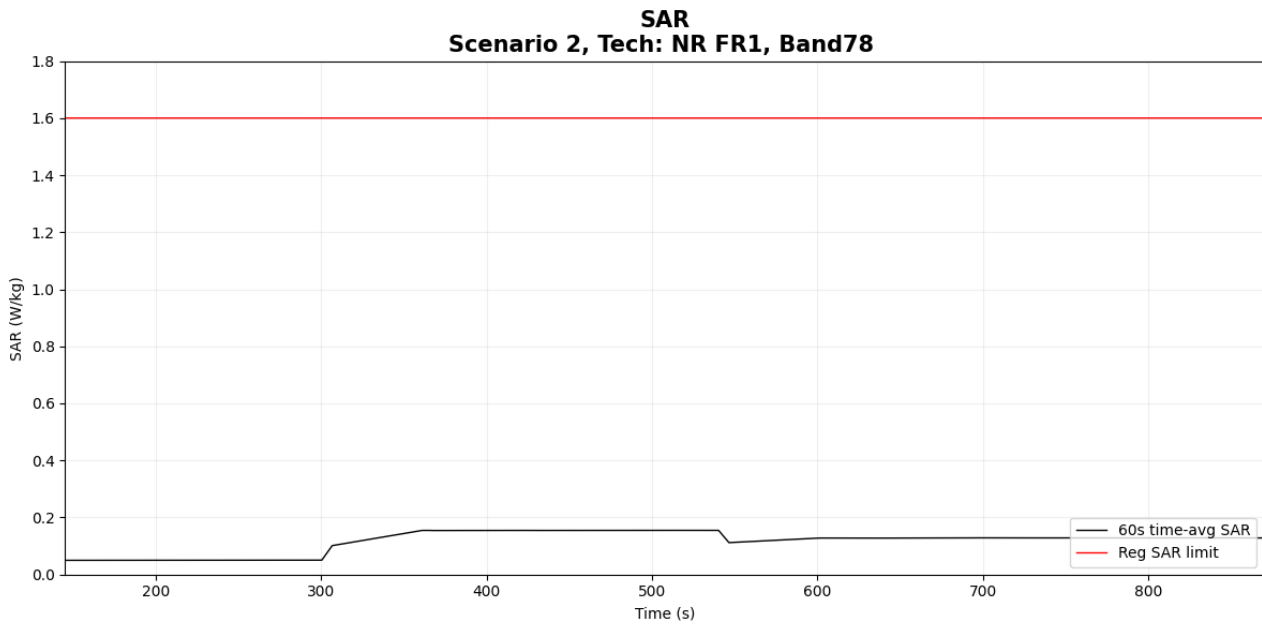


Figure 6- 36 Time-averaged SAR

FCC 1gSAR limit	1.6 W/kg
Max time averaged 1gSAR	0.155 W/kg
Validation result: pass	

● **Case9-2: NR n78 result for test sequence 2**

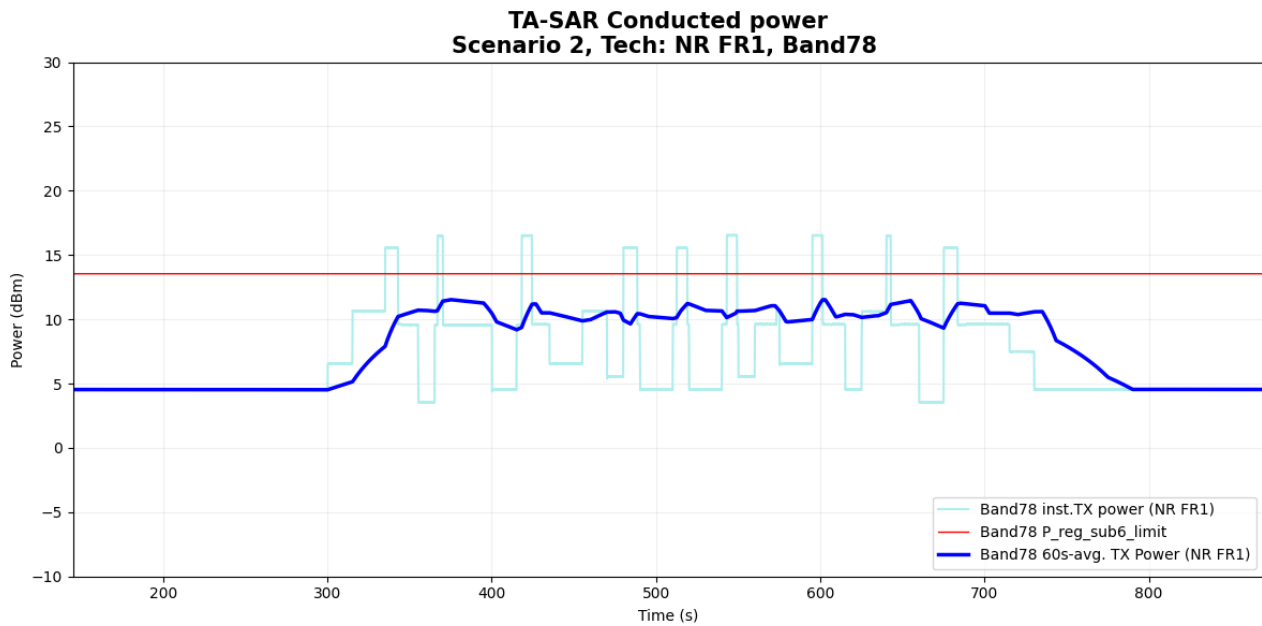


Figure 6- 37 Time-averaged conducted TX power over time

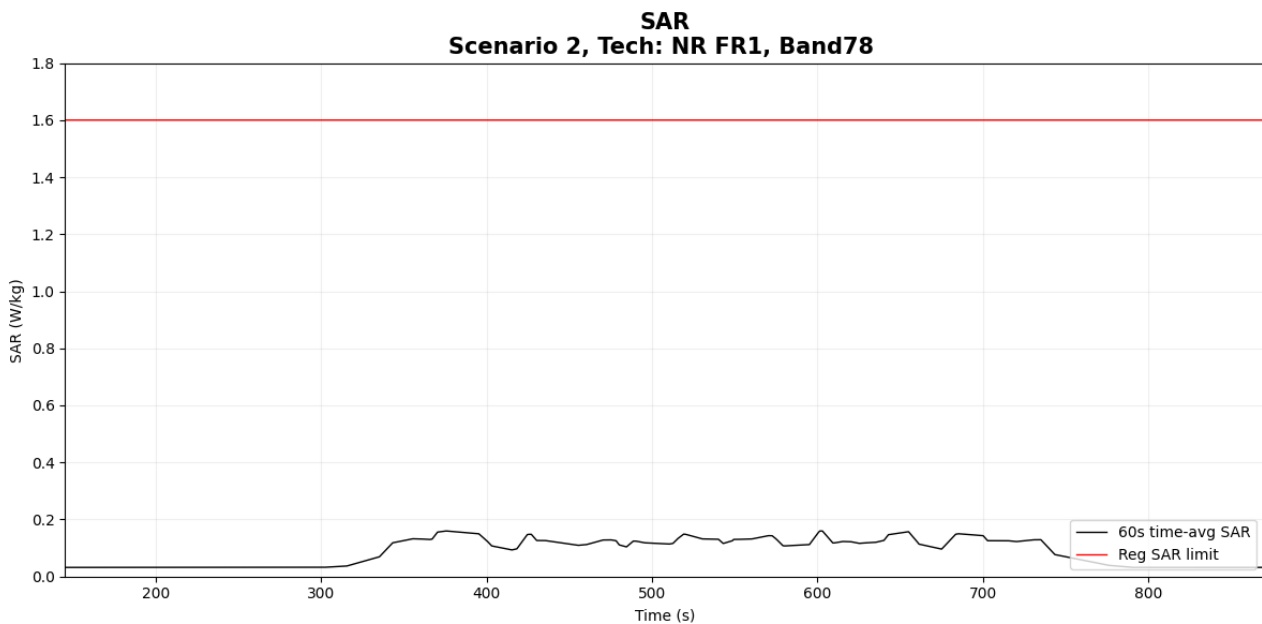


Figure 6- 38 Time-averaged SAR

FCC 1gSAR limit	1.6 W/kg
Max time averaged 1gSAR	0.160 W/kg
Validation result: pass	

5.4 Conducted Power Measurement Results for Scenario 3: Call Disconnection and Re-establishment

In this scenario, the test power sequence #0 (i.e., maximum TX power is requested by a call box for each RAT) is used, and the call drop is manually configured for a pre-defined period and then the call is re-established to continue data transmission. The test case for this scenario is relegated in Table 6-3, and the test procedure follows section 4.4.2. The measurement setup is shown in Figure 6-1. The high-level summary of the final validation results is also listed in the last column of the table, which concludes that Mediatek's TA-SAR algorithm can maintain the time-averaged SAR is always below the FCC requirement. The following section will demonstrate how Mediatek's TA-SAR algorithm behaves.

The corresponding detailed test procedure is described in 4.4.2. The first figure demonstrates the EUT's instantaneous conducted TX power, the time-averaged conducted TX power behavior over time, and the power limit ($P_{reg_sub6_limit} = P_{sub6_limit} + \text{Total uncertainty}$). The second figure illustrates the corresponding time-averaged SAR over time converted from the TX time-averaged power by using the equation listed in section 4.4.2. As seen in this figure, the time-averaged SAR does not exceed the FCC limit.

- Case10: FR1 n78 call drop happens at the time instance of 500 seconds.

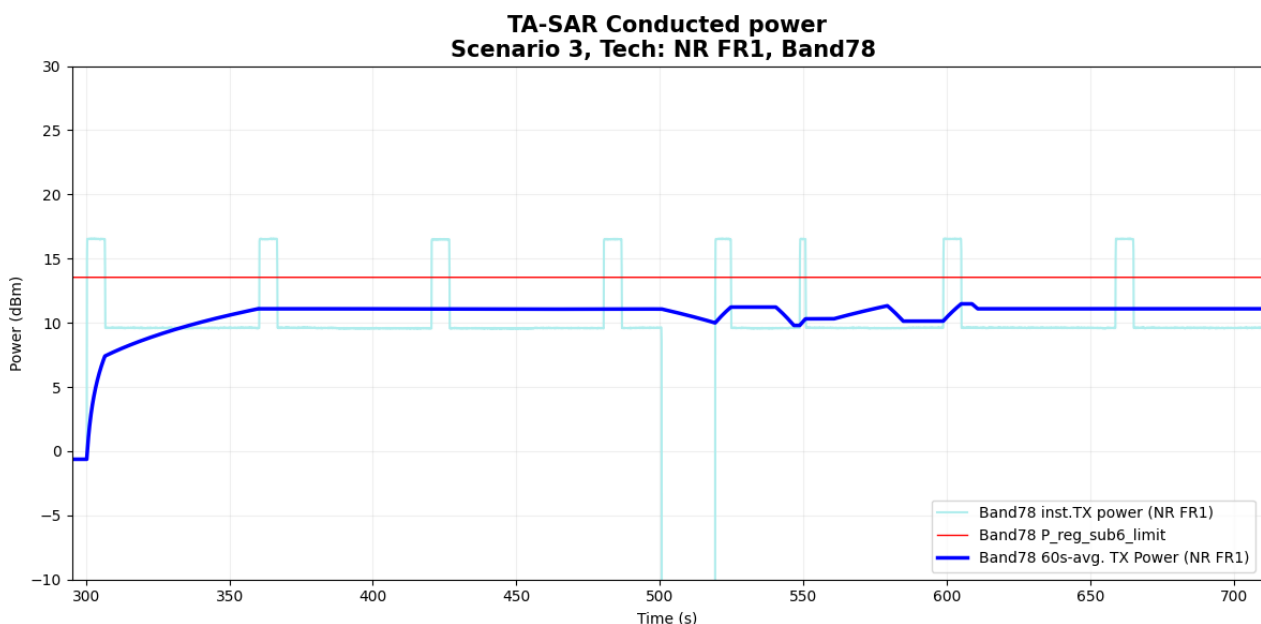


Figure 6- 39 Time-averaged conducted TX power over time

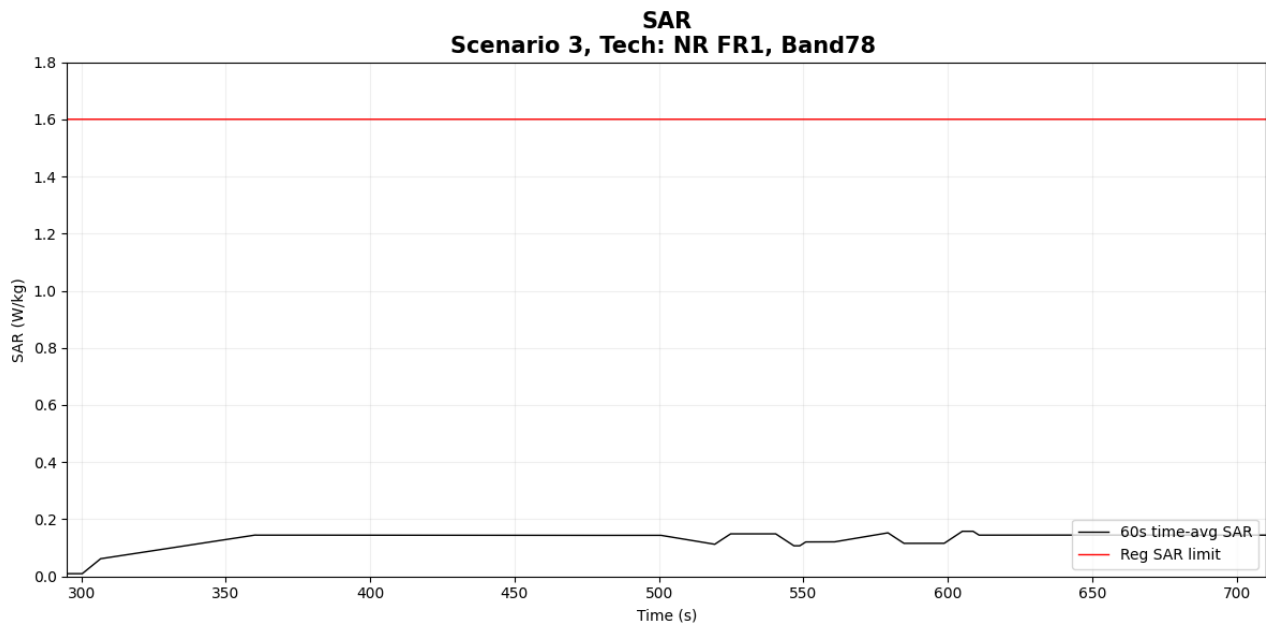


Figure 6- 40 Time-averaged SAR

FCC 1gSAR limit	1.6 W/kg
Max time averaged 1gSAR	0.158 W/kg
Validation result: pass	

5.5 Conducted Power Measurement Results for Scenario 4: Band Handover

In this scenario, the test power sequence #0 (i.e., maximum TX power is requested by a call box for each RAT) is used, and band (and RAT) handover is manually configured at a specific time instance. The test case widely cover handover scenarios between two RATs. The test case for this scenario is relegated in Table 6-3, and the test procedure follows section 4.5.2. The measurement setup is shown in Figure 6-2 (band handover) and Figure 6-4 (RAT handover). The high-level summary of the final validation results is also listed in the last column of the table, which concludes that Mediatek's TA-SAR algorithm can maintain the time-averaged SAR is always below the FCC requirement. The following section will demonstrate how Mediatek's TA-SAR algorithm behaves.

This test case to validate the TA-SAR algorithm with a handover from LTE Band 48 to FR1 n78 and ECI = 5. The corresponding detailed test procedure is described in 4.5.2. The first figure demonstrates the EUT's instantaneous conducted TX power and the time-averaged conducted TX power behavior over time, and the power limit ($P_{reg_sub6_limit} = P_{sub6_limit} + \text{Total uncertainty}$). The handover is configured at the time instance of 500 seconds. It is observed in the figure that the time-averaged TX power of the individual RAT is below its own P_{sub6_limit} . The second figure illustrates the corresponding time-averaged normalized SAR over time converted from the TX time-averaged power by using the equation listed in section 4.5.2. The figure shows that the time-averaged normalized SAR does not exceed the normalized FCC limit of 1.

- **Case11: band handover happens at the time instance of 500 seconds.**

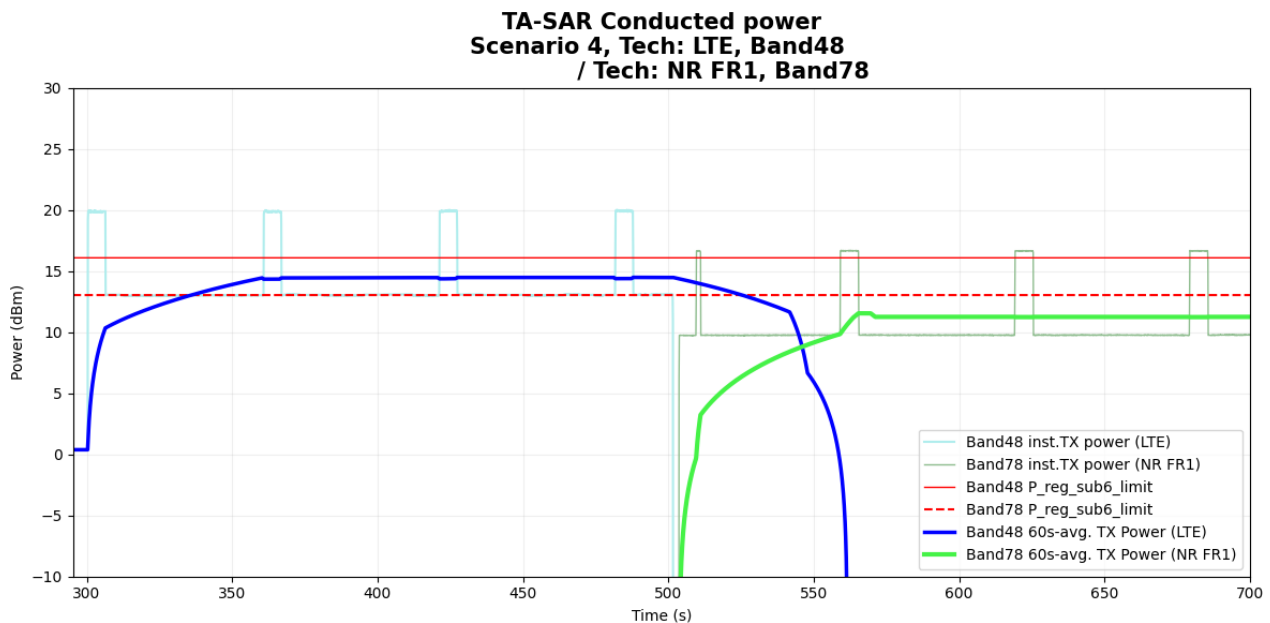


Figure 6- 41 Time-averaged conducted TX power over time

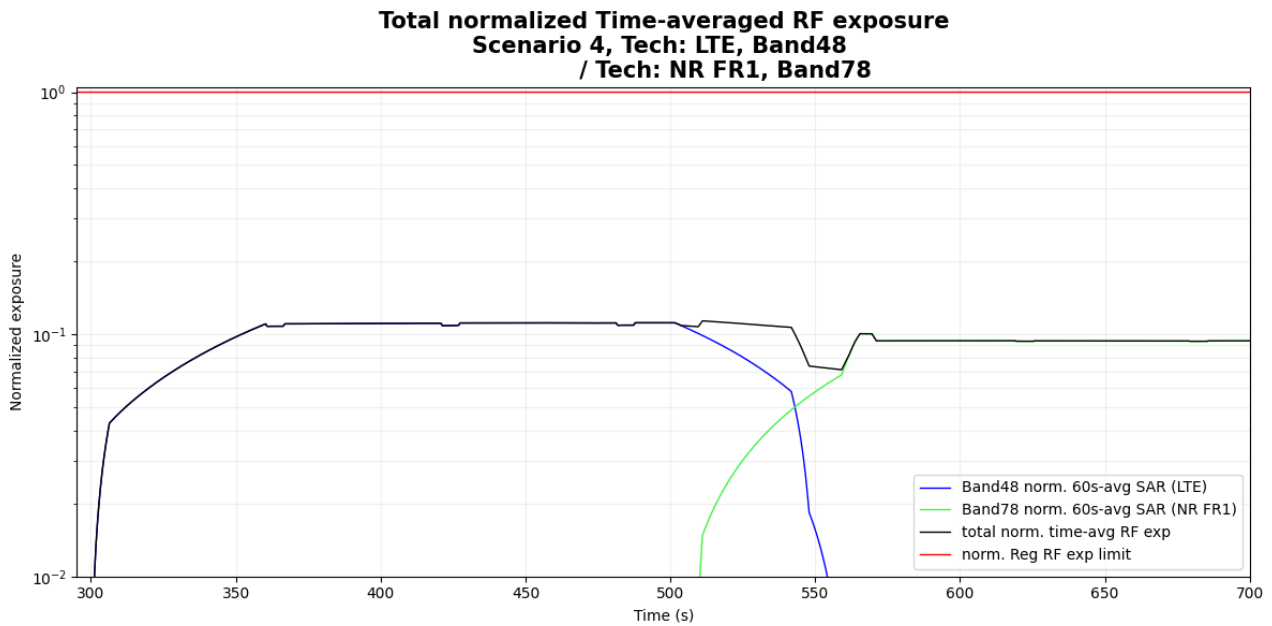


Figure 6- 42 Normalized time-averaged SAR

FCC limit of total RF exposure (normalized)	1.0
Max total normalized time-averaged RF exposure	0.114
Validation result: pass	

5.6 Conducted Power Measurement Results for Scenario 5: ECI Change

In this scenario, the test power sequence #0 (i.e., maximum TX power is requested by a call box for each RAT) is used, and ECI change at the EUT side is manually configured at a specific time instance. The test case cover ECI switching scenario between two ECIs. The test case for this scenario is relegated in Table 6-3, and the test procedure follows section 4.6.2. The measurement setup is shown in Figure 6-1. The high-level summary of the final validation results is also listed in the last column of the table, which concludes that Mediatek's TA-SAR algorithm can maintain the time-averaged SAR is always below the FCC requirement. The following section will demonstrate how Mediatek's TA-SAR algorithm behaves.

The corresponding detailed test procedure is described in 4.6.2. The first figure demonstrates the EUT's instantaneous conducted TX power and the time-averaged conducted TX power behavior over time, and the power limit ($P_{reg_sub6_limit} = P_{sub6_limit} + \text{Total uncertainty}$). During the test period, there are two ECI change events configured individually at the time instances 500 seconds and 700 seconds. The 1st change is from ECI = 5 to ECI = 4 and the 2nd change is from ECI = 4 back to ECI = 5. It is observed in the figure that the time-averaged TX power of the individual RAT is below its own P_{sub6_limit} . The second figure illustrates the corresponding time-averaged normalized SAR over time converted from the TX time-averaged power by using the equation listed in section 4.6.2. The figure shows that the time-averaged normalized SAR does not exceed the normalized FCC limit of 1.

- **Case12: FR1 n78 ECI 5 changes to ECI 4 happen at the time instances of 500 and 700 seconds, respectively**

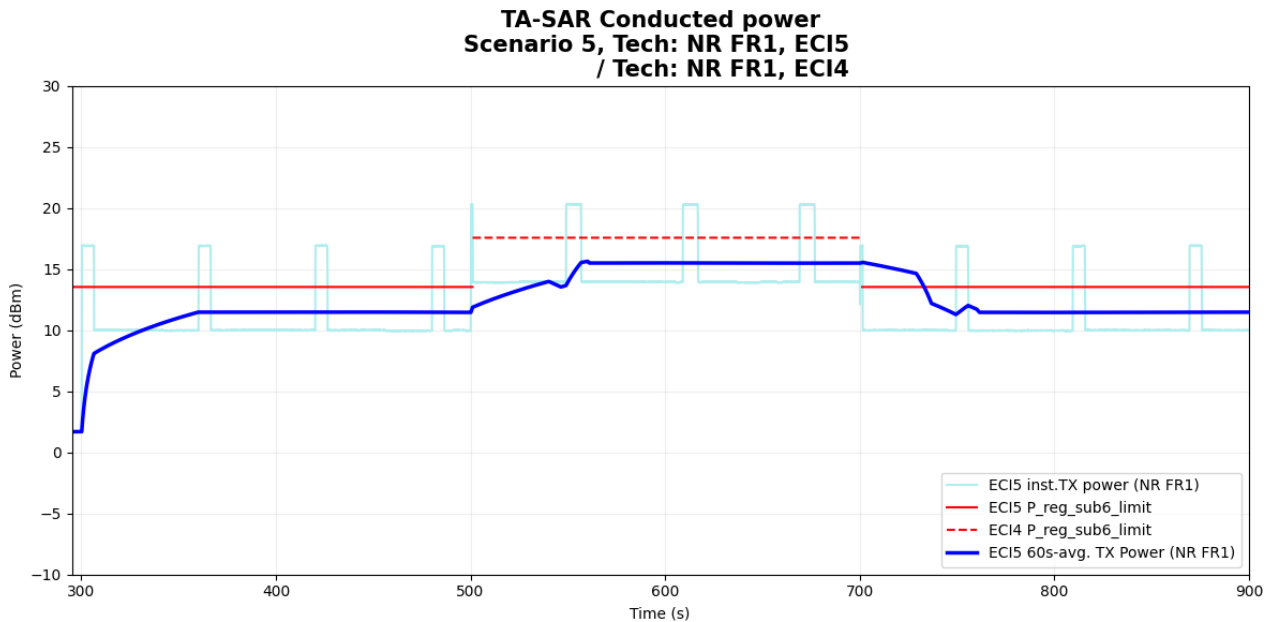


Figure 6- 43 Time-averaged conducted TX power over time

NOTE : The inst. TX power should be compared with $P_{reg_sub6_limit}$ of the corresponding configuration, i.e. 13.5 dBm for ECI 5 and 17.6 dBm for ECI 4, then transformed and averaged in SAR perspective to check compliance. Therefore, even though the time-averaged TX power seems to exceed $P_{reg_sub6_limit}$ after configuration changed (from 700s to 730s), the time-averaged SAR pass regulation as a matter of fact.

Total normalized Time-averaged RF exposure Scenario 5, Tech: NR FR1, ECI5 / Tech: NR FR1, ECI4

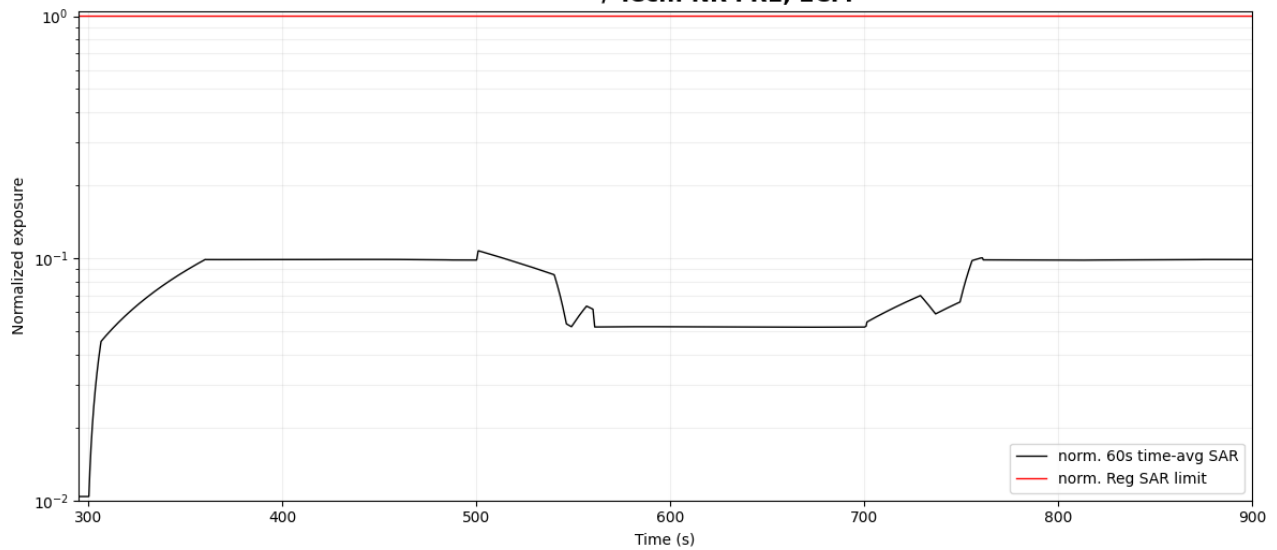


Figure 6- 44 Normalized time-averaged SAR

FCC limit of total RF exposure (normalized)	1.0
Max total normalized time-averaged RF exposure	0.107
Validation result: pass	

5.7 Conducted Power Measurement Results for Scenario 7: Time Window Switching

In this scenario, the test power sequence #0 (i.e., maximum TX power is requested by a call box for each RAT) is used, and band handover events within a RAT are manually configured at specific time instances. This scenario aims to validate the correctness of the TA-SAR algorithm with existence of moving average time window change. The two test cases for this scenario are relegated in Table 6-3, and the test procedure follows section 4.8.2. The measurement setup is shown in Figure 6-2. The high-level summary of the final validation results are also listed in the last column of the table, which concludes that Mediatek's TA-SAR algorithm can maintain the time-averaged SAR is always below the FCC requirement for all the cases. The following sections will demonstrate how Mediatek's TA-SAR algorithm behaves.

5.7.1 Measurement results for Time window switching 60s-100s-60

The corresponding detailed test procedure is described in 4.8.2. During the test period, there are two band handover events configured individually at the time instances 420 seconds and 620 seconds. The 1st handover is from LTE Band 42 to LTE Band 66 and the 2nd handover is from LTE Band 66 back to LTE Band 42. The first figure demonstrates the EUT's instantaneous conducted TX power and the time-averaged conducted TX power behavior over time, and the power limit ($P_{reg_sub6_limit} = P_{sub6_limit} + \text{Total uncertainty}$). It is observed in the figure that the time-averaged TX power during the transitions of the band changes is maintained below the power limitation. The second figure illustrates the corresponding time-averaged normalized SAR over time converted from the TX time-averaged power by using the equation listed in section 4.8.2. The figure shows that the time-averaged normalized SAR does not exceed the normalized FCC limit of 1.

- Case14: LTE Band 42 handover to LTE Band 66 happens at the time instances of 420 and 620 seconds.

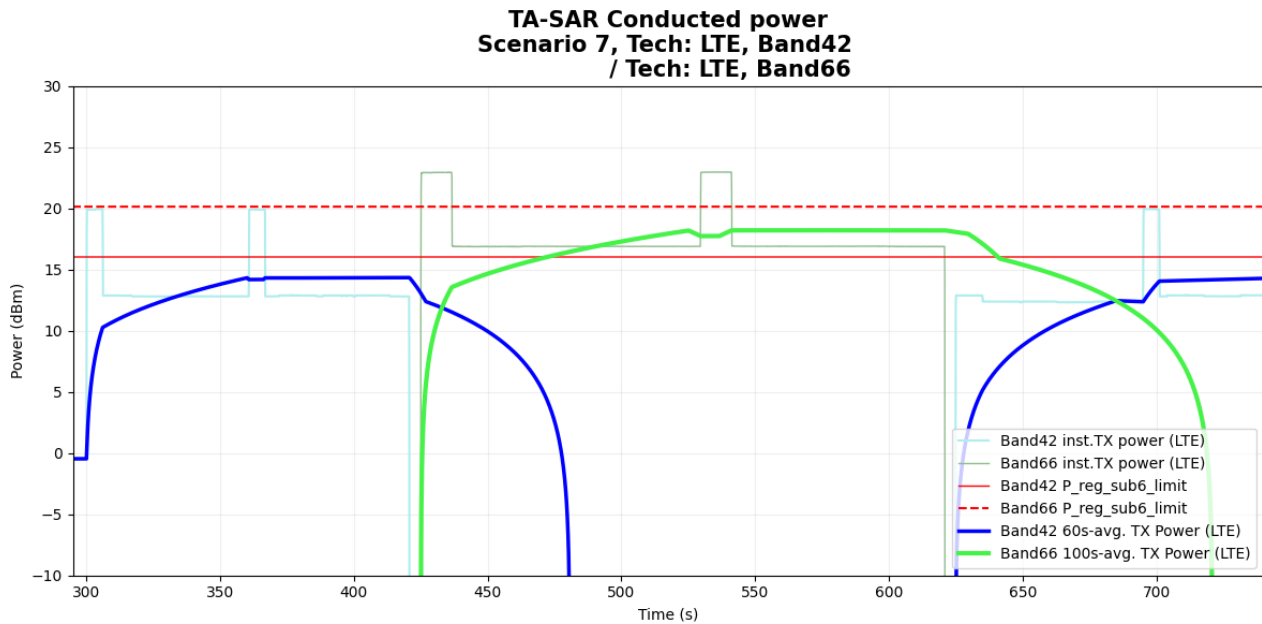


Figure 6- 45 Time-averaged conducted TX power over time

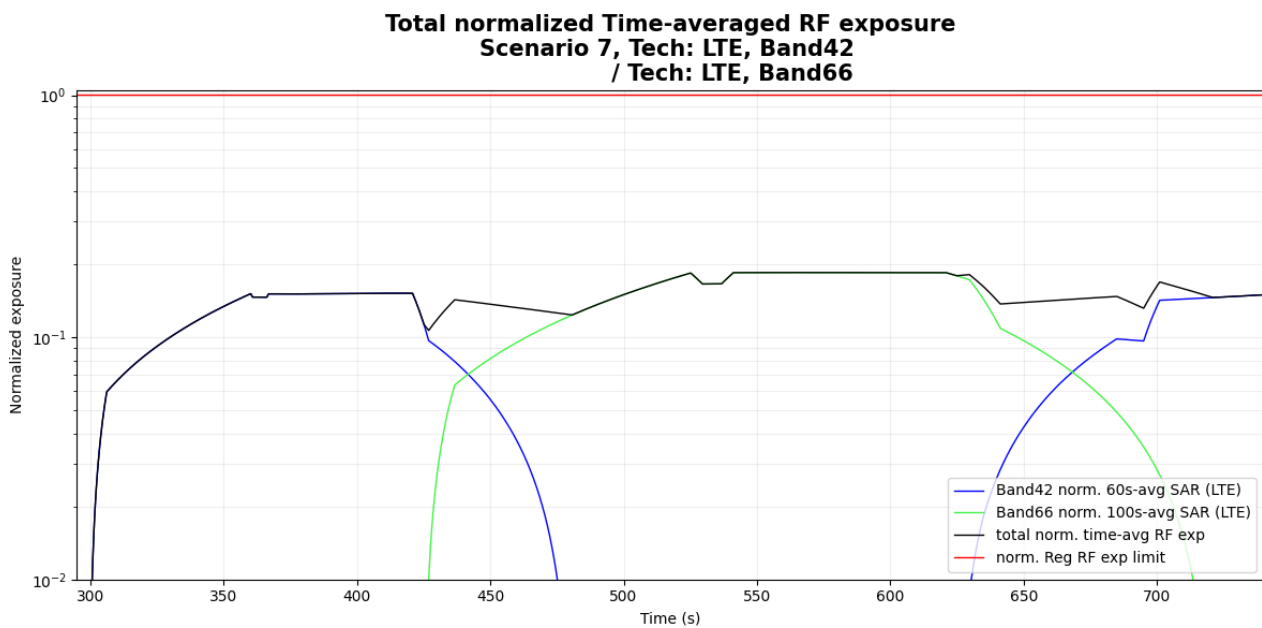


Figure 6- 46 Normalized time-averaged SAR

FCC limit of total RF exposure (normalized)	1.0
Max total normalized time-averaged RF exposure	0.185
Validation result: pass	

5.7.2 Measurement results for Time window switching 100s-60s-100s

The corresponding detailed test procedure is described in 4.8.2. During the test period, there are two band handover events configured individually at the time instances 500 seconds and 620 seconds. The 1st handover is from LTE Band 66 to LTE Band 42 and the 2nd handover is from LTE Band 42 back to LTE Band 66. The first figure demonstrates the EUT's instantaneous conducted TX power and the time-averaged conducted TX power behavior over time, and the power limit ($P_{reg_sub6_limit} = P_{sub6_limit} + \text{Total uncertainty}$). It is observed in the figure that the time-averaged TX power during the transitions of the band changes is maintained below the power limitation. The second figure illustrates the corresponding time-averaged normalized SAR over time converted from the TX time-averaged power by using the equation listed in section 4.8.2. The figure shows that the time-averaged normalized SAR does not exceed the normalized FCC limit of 1.

- **Case13: LTE Band 66 handover to LTE Band 42 happens at the time instances of 500 and 620 seconds.**

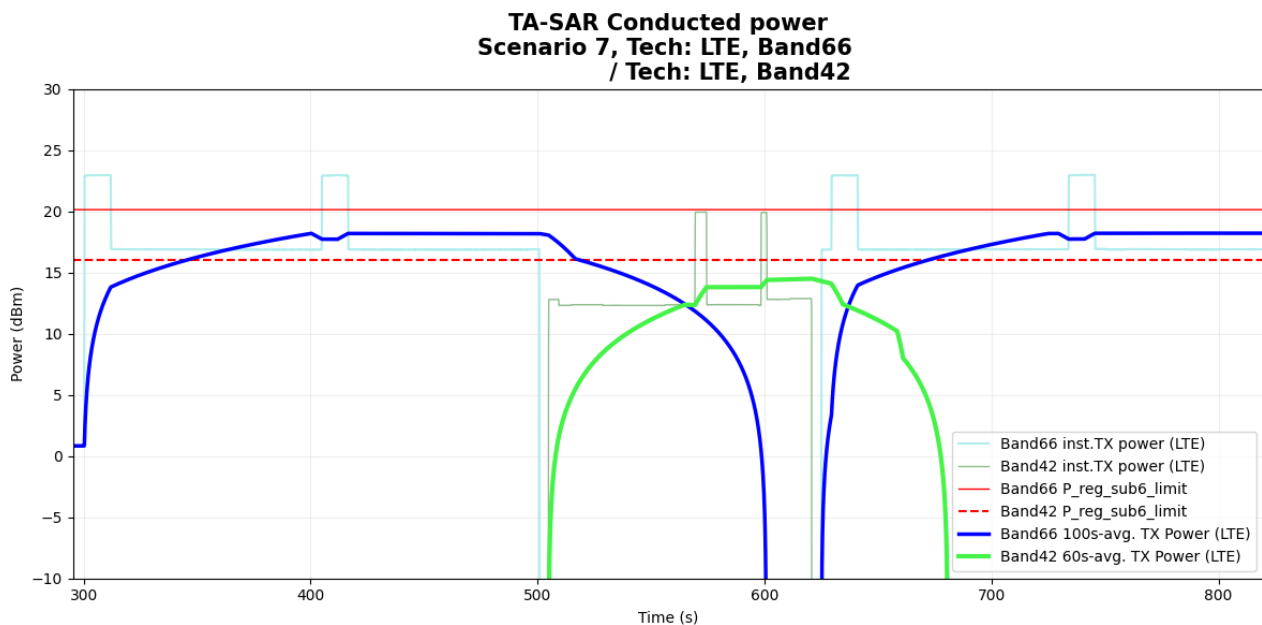


Figure 6- 47 Time-averaged conducted TX power over time

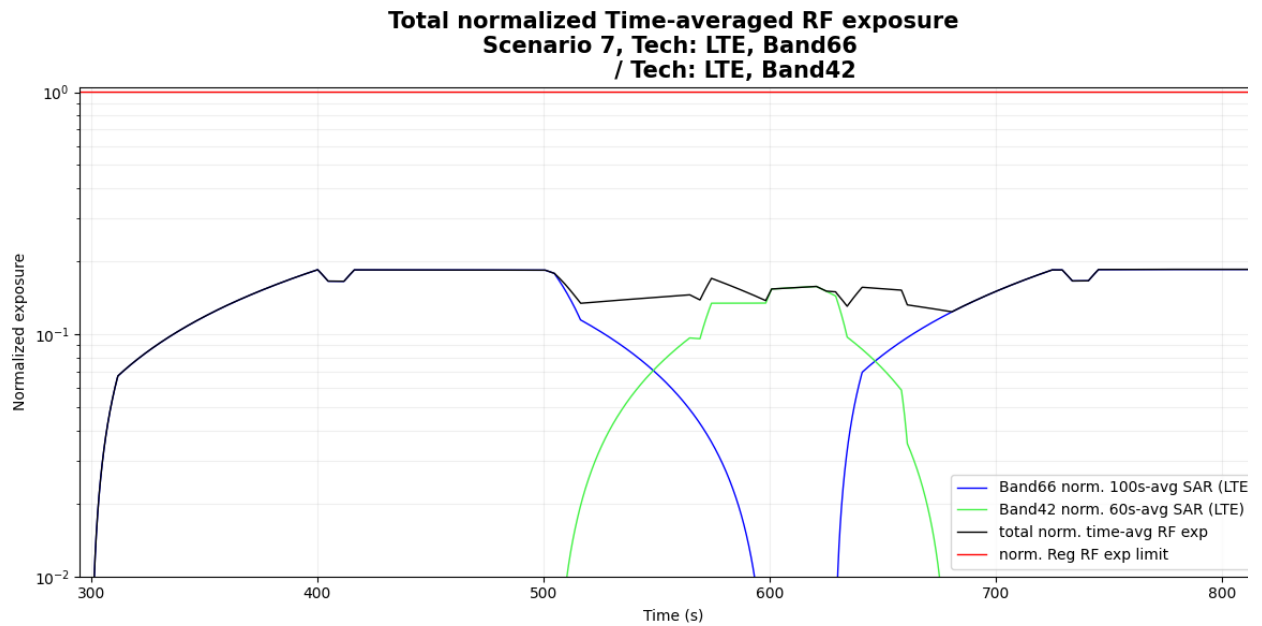


Figure 6- 48 Normalized time-averaged SAR

FCC limit of total RF exposure (normalized)	1.0
Max total normalized time-averaged RF exposure	0.186
Validation result: pass	

5.8 Conducted Power Measurement Results for Scenario 8: SAR Exposure Switching (EN-DC Combination in the same time window)

In this scenario, the test power sequence #0 (i.e., maximum TX power is requested by a call box for each RAT) is used, and FR1 n7 and LTE Band 5 are turned on at the same time for a pre-defined period during the test. This scenario aims to validate whether the TA-SAR algorithm is able to maintain TER below the FCC limit when the two radios change TX power dynamically. The experiment parameters are summarized in Table 6-3, and the test procedure follows section 4.9.2. The measurement setup is shown in Figure 6-4.

During the test period,

- Time = 300s~500s: FR1 n7 predominant scenario.
- Time = 500s~700s: LTE Band 5 + FR1 n7 scenario.
- Time = 700s~900s: LTE Band 5 predominant scenario.

The first figure demonstrates the EUT's instantaneous conducted TX power and the time-averaged conducted TX power behavior over time, and the power limit ($P_{reg_sub6_limit} = P_{sub6_limit} + \text{Total uncertainty}$). It is observed in the figure that the time-averaged TX power in all time periods is maintained below the power limitation. The second figure illustrates the corresponding time-averaged normalized SAR over time converted from the TX time-averaged power by using the equation listed in section 4.9.2. The figure shows that the time-averaged normalized SAR does not exceed the normalized FCC limit of 1.

- Case15: SAR Exposure Switch for FR1 n7 to LTE Band 5

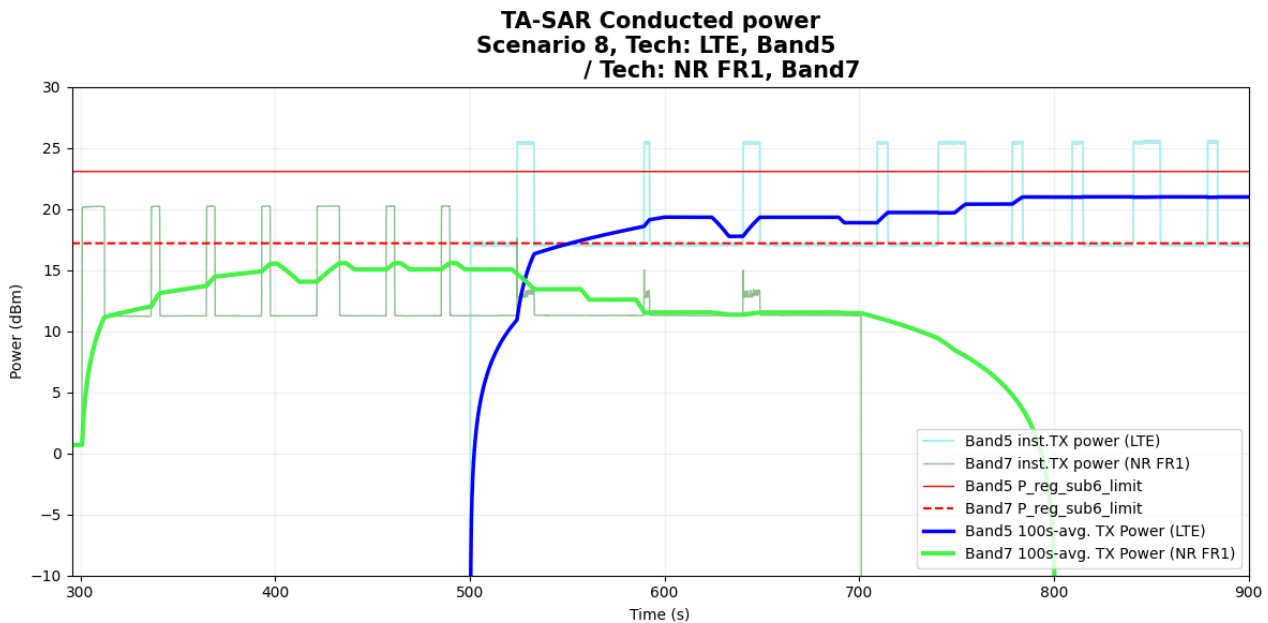


Figure 6- 49 Time-averaged conducted TX power over time

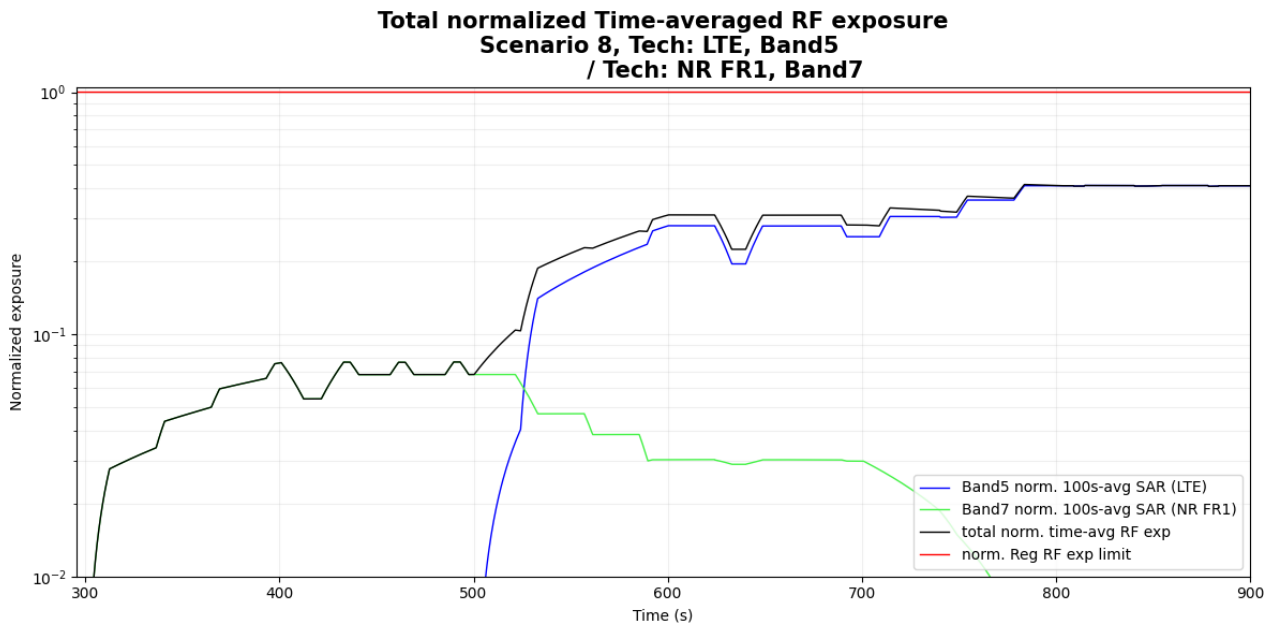


Figure 6- 50 Normalized time-averaged SAR

FCC limit of total RF exposure (normalized)	1.0
Max total normalized time-averaged RF exposure	0.416
Validation result: pass	

5.9 Conducted Power Measurement Results for Scenario 8: SAR Exposure Switching (EN-DC Combination in the different time window)

In this scenario, the test power sequence #0 (i.e., maximum TX power is requested by a call box for each RAT) is used, and FR1 n78 and LTE Band 7 a are turned on at the same time for a pre-defined period during the test. This scenario aims to validate whether the TA-SAR algorithm is able to maintain TER below the FCC limit when the two radios change TX power dynamically. The experiment parameters are summarized in Table 6-3, and the test procedure follows section 4.9.2. The measurement setup is shown in Figure 6-4.

During the test period,

- Time = 300s~500s: FR1 n78 predominant scenario.
- Time = 500s~700s: LTE Band 7 + FR1 n78 scenario.
- Time = 700s~900s: LTE Band 7 predominant scenario.

The first figure demonstrates the EUT's instantaneous conducted TX power and the time-averaged conducted TX power behavior over time, and the power limit ($P_{reg_sub6_limit} = P_{sub6_limit} + \text{Total uncertainty}$). It is observed in the figure that the time-averaged TX power in all time periods is maintained below the power limitation. The second figure illustrates the corresponding time-averaged normalized SAR over time converted from the TX time-averaged power by using the equation listed in section 4.9.2. The figure shows that the time-averaged normalized SAR does not exceed the normalized FCC limit of 1.

● Case16: SAR Exposure Switch for FR1 n78 to LTE Band 7

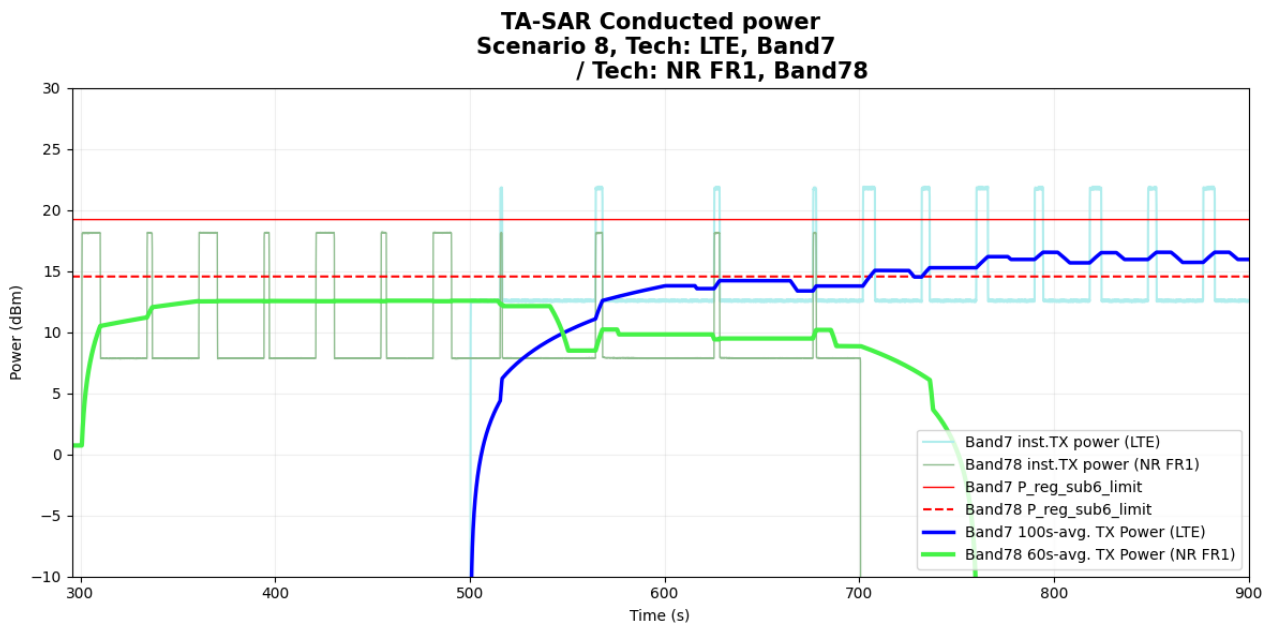


Figure 6- 51 Time-averaged conducted TX power over time

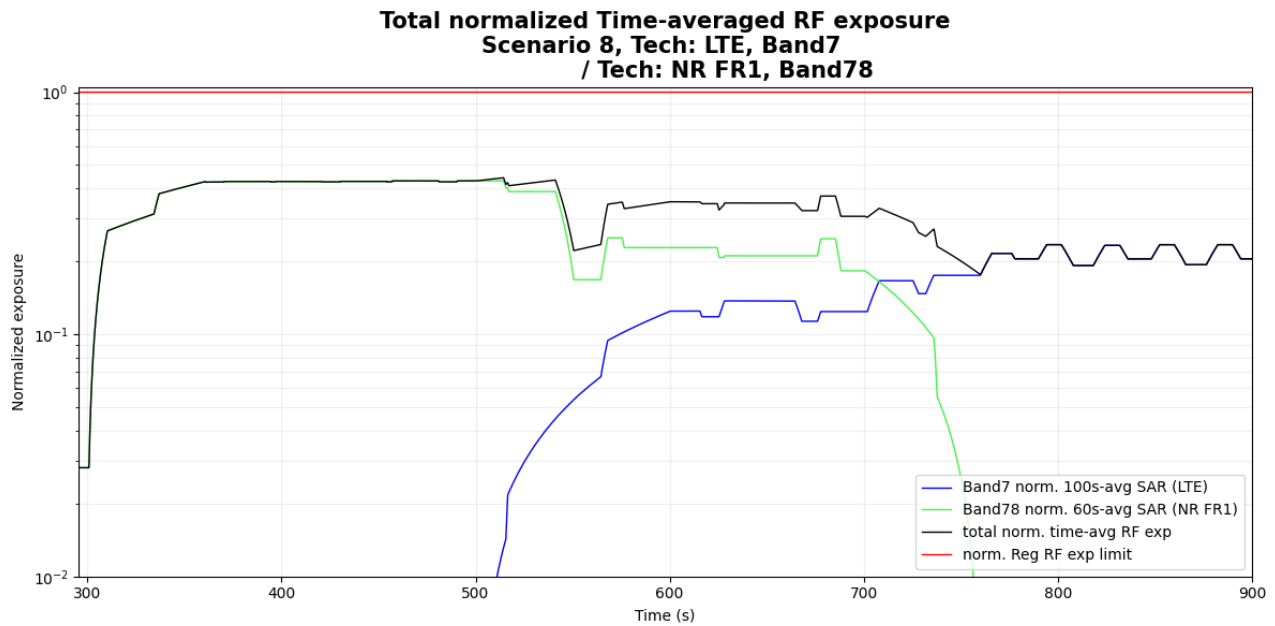


Figure 6- 52 Normalized time-averaged SAR

FCC limit of total RF exposure (normalized)	1.0
Max total normalized time-averaged RF exposure	0.443
Validation result: pass	

6. TA-SAR Validation via SAR Measurements

6.1 Measurement Setup

The measurement setup is similar to normal fixed power SAR measurement. The difference in SAR measurement setup for time averaging feature validation is that the call box operates under the close loop power control mode and is connected to the PC, so that the PC can control the call box based on the test sequence to configure EUT's TX target power. The same test procedure used in conducted power setup for time-varying TX power measurement is also used in this section for time-averaging SAR measurements. Since the SAR chamber is an uncontrolled environment, the path loss between call box antenna and the EUT are well calibrated. The test setup is illustrated in Figure 7-1, and its photos are shown in Setup Photos.

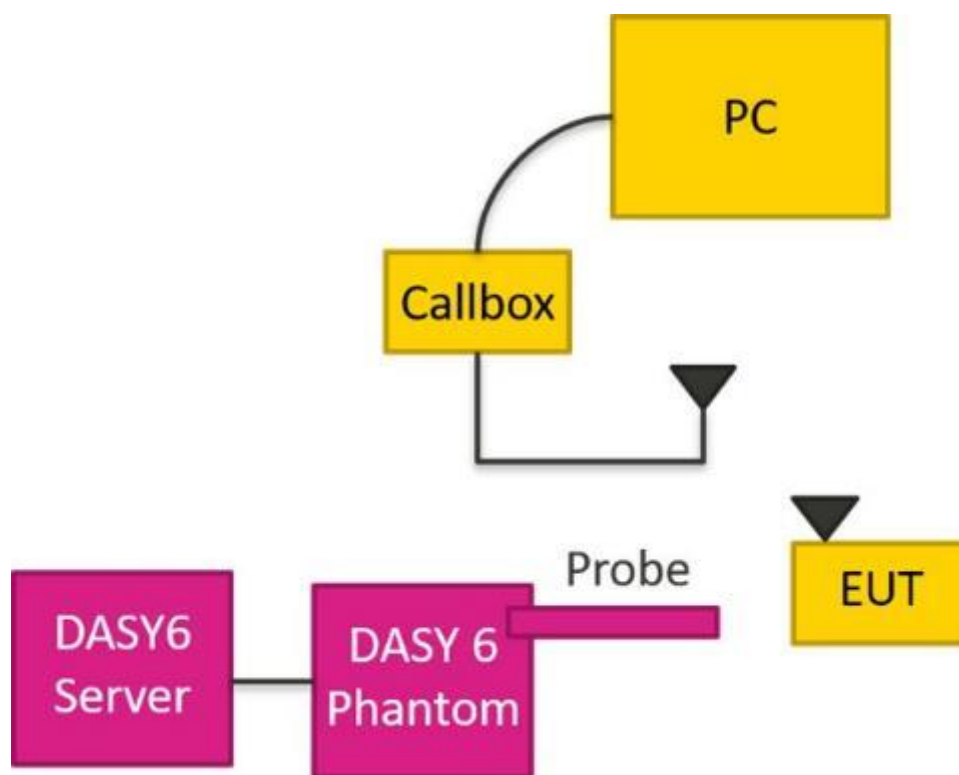


Figure 7-1 TA-SAR wireless test environment

6.2 SAR Measurement Results for Scenario 2: Time-Varying TX Power

In this scenario, Mediatek's TA-SAR algorithm is tested under more dynamic power test sequences. The test sequence #1 is shown in section 4.1 and test sequence #2 is tabulated in table 4.4. All of the test cases for this scenario are relegated in Table 7-1, and the test procedure follows section 4.10.2. The measurement setup is shown in Figure 7-1. All of the measurements are conduct in SPORTON (i.e., an FCC certified lab) by using DASY6. The high-level summary of the final validation results is given in the last column of the table, which concludes that Mediatek's TA-SAR algorithm can maintain the time-averaged SAR is always below the FCC requirement for all test cases. The following sections will demonstrate case-by-case to show how Mediatek's TA-SAR algorithm behaves for each RAT.

Table 7-1 Operating parameters for different TA-SAR parameters setting

Test case#	Test scenario	Tech	Band	Ant	ANT state (TX/RX)	ECI	Channel	Freq (MHz)	BW	RB size	RB offset	Mode	Duty cycle	Position	Position details	PUE_max_cust_offset	PUE_backoff_offset
1	2. Time-varying TX power	GSM	850	1	1/1	5	189	836.4	-	-	-	GPRS (4 Tx slots)	50.0%	Left Side	10mm	3	2
2		GSM	1900	4	1/1	5	661	1880	-	-	-	GPRS (4 Tx slots)	50.0%	Top Side	10mm	3	2
3		WCDMA	4	2	0/0	4	1413	1732.6	-	-	-	RMC 12.2Kbps	100.0%	Back	15mm	4	2
4		WCDMA	2	4	1/1	5	9400	1880	-	-	-	RMC 12.2Kbps	100.0%	Top Side	10mm	4	2
5		LTE	4	2	1/1	4	20175	1732.5	20	1	0	QPSK	100.0%	Back	15mm	4	2
6		LTE	48	7	3/1	5	55830	3609	20	1	0	QPSK	63.3%	Right Side	10mm	5	2
7		5G NR	n66	5	3/3	4	349000	1745	40	108	54	DFT-15,QPSK	100.0%	Back	15mm	4	2
8		5G NR	n78	8	2/1	5	633332	3499.98	100	135	69	DFT-30,QPSK	100.0%	Left Side	10mm	5	2

6.2.1 SAR Measurement results for 2G

- Case1-1: 2G GSM850 result for test sequence 1

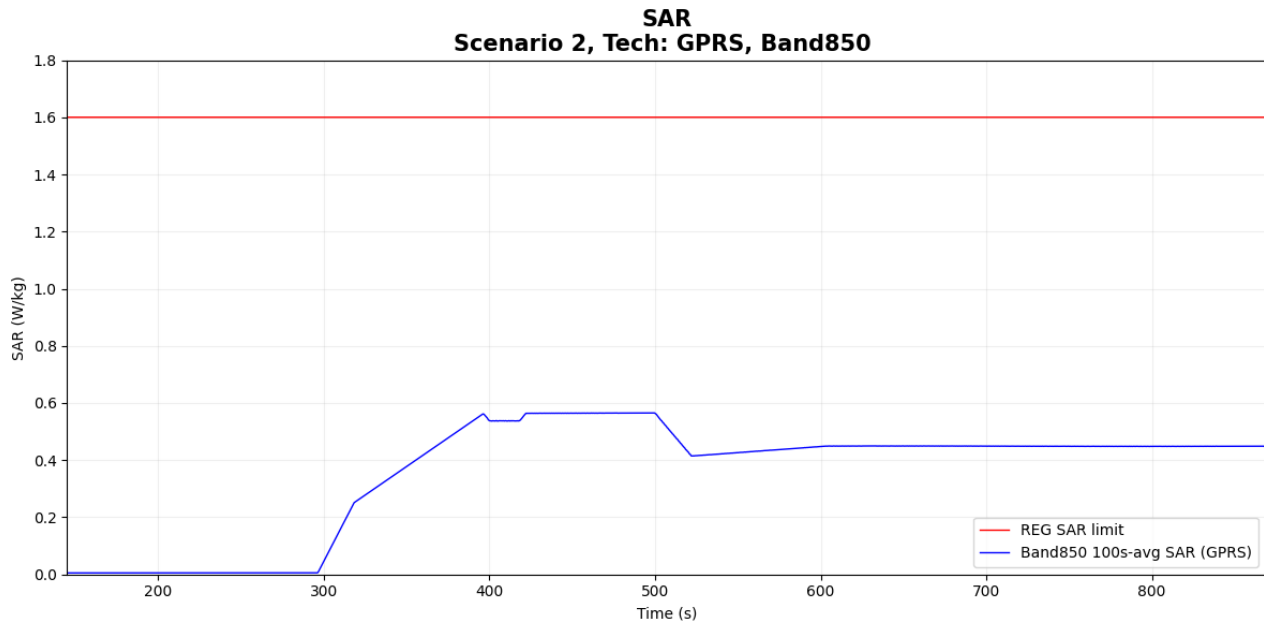


Figure 7-2 Time-averaged SAR

FCC 1gSAR limit	1.6 W/kg
Max time averaged 1gSAR	0.565 W/kg
Validation result: pass	

● Case1-2: GSM850 result for test sequence 2

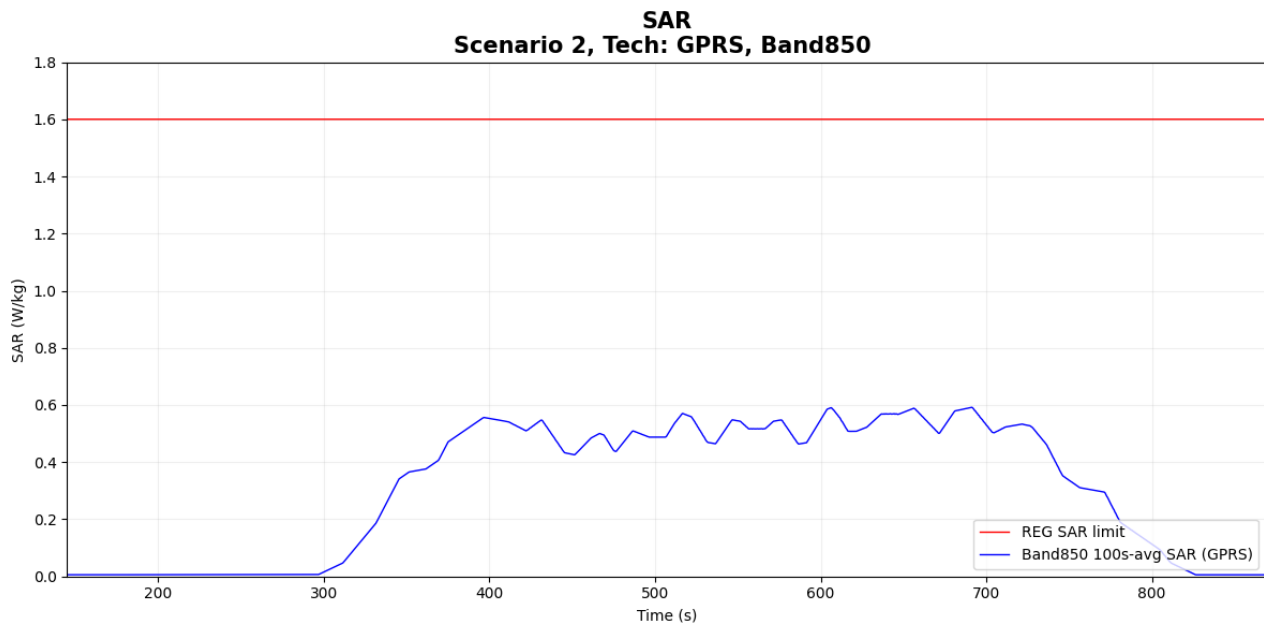


Figure 7-3 Time-averaged SAR

FCC 1gSAR limit	1.6 W/kg
Max time averaged 1gSAR	0.592 W/kg
Validation result: pass	

● Case2-1: 2G GSM1900 result for test sequence 1

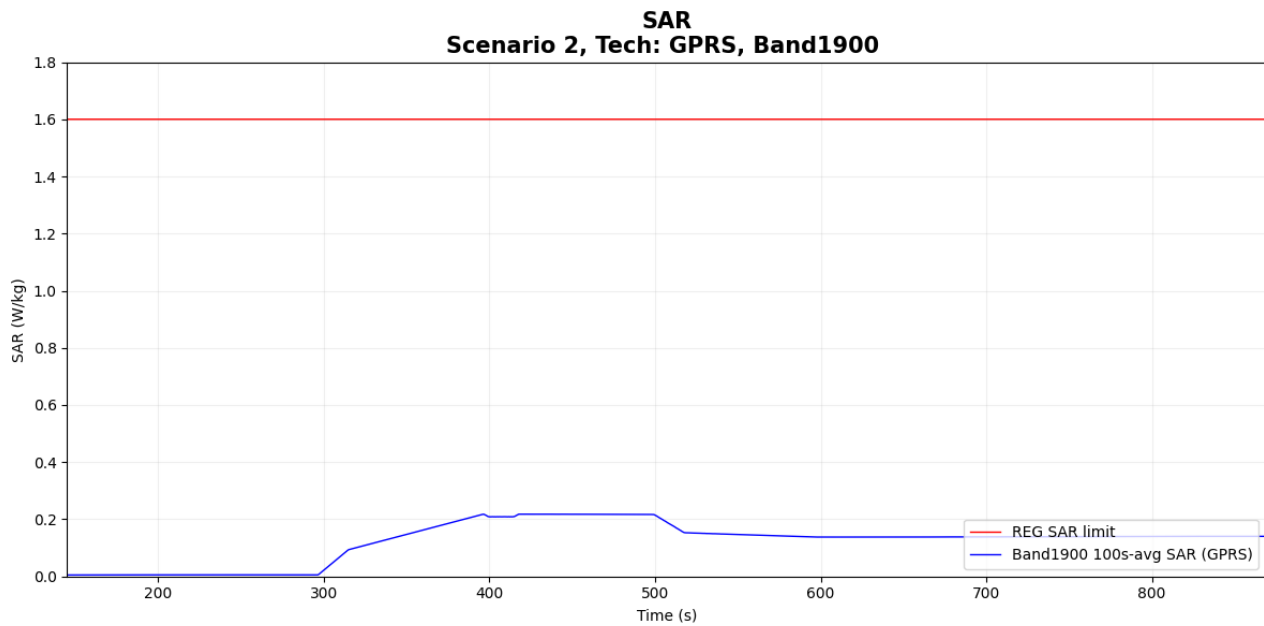


Figure 7-4 Time-averaged SAR

FCC 1gSAR limit	1.6 W/kg
Max time averaged 1gSAR	0.218 W/kg
Validation result: pass	

● Case2-2: GSM1900 result for test sequence 2

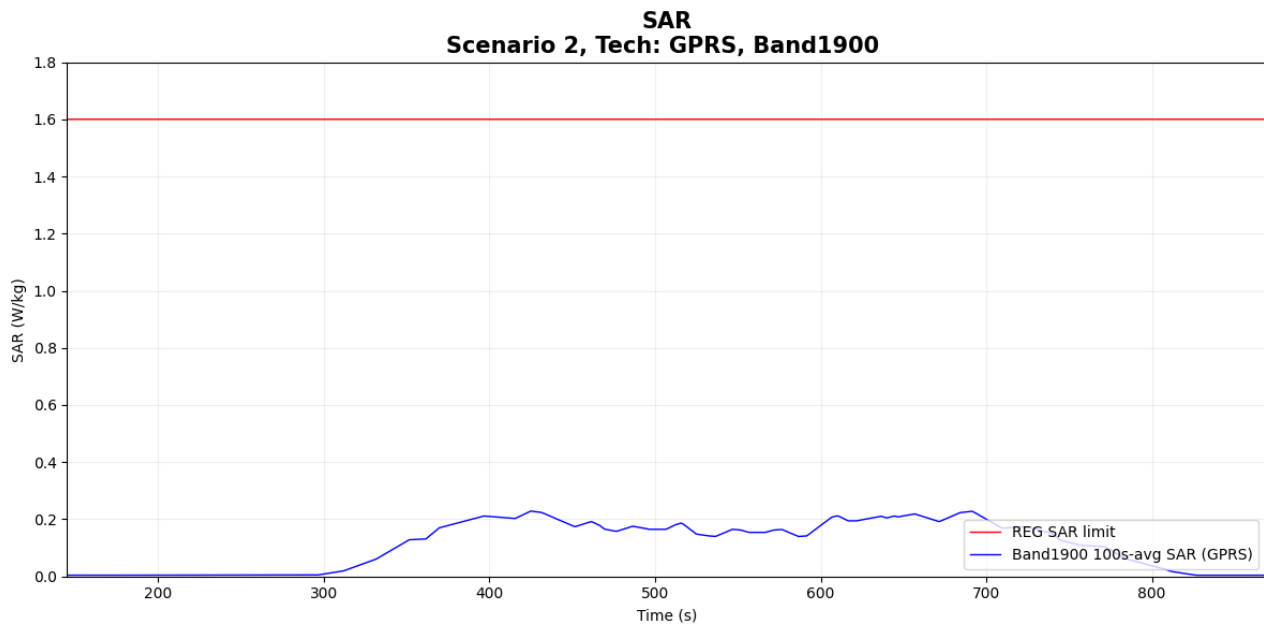


Figure 7-5 Time-averaged SAR

FCC 1gSAR limit	1.6 W/kg
Max time averaged 1gSAR	0.228 W/kg
Validation result: pass	

6.2.2 SAR Measurement results for 3G

- Case3-1: WCDMA B4 result for test sequence 1

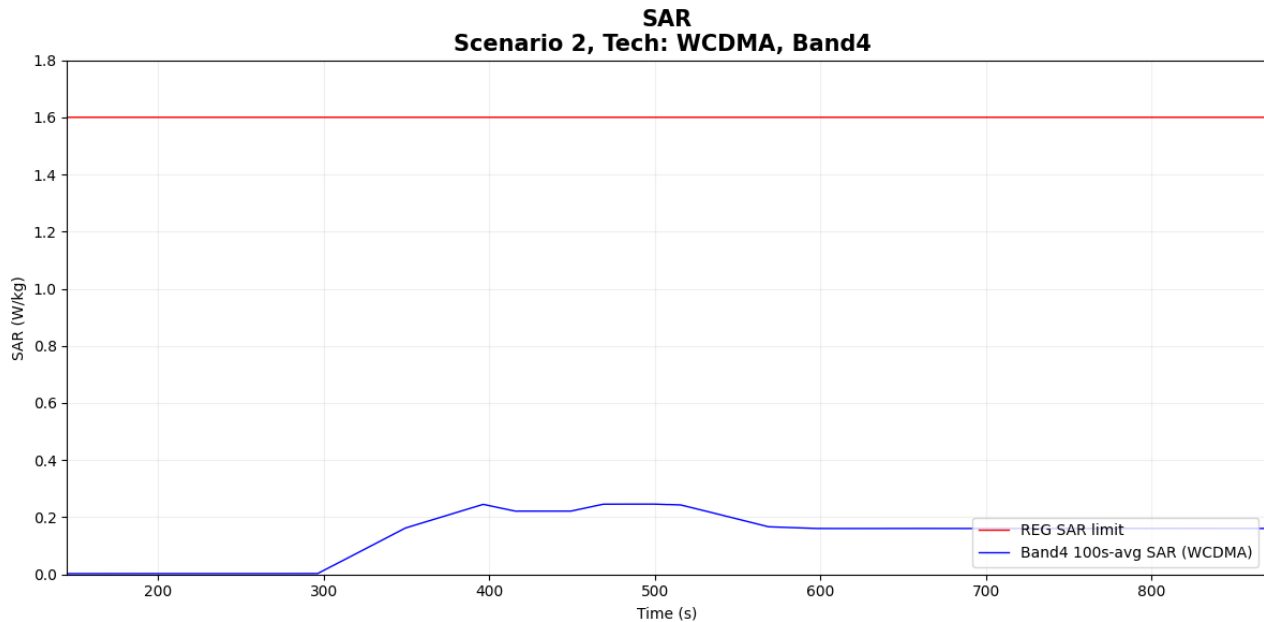


Figure 7-6 Time-averaged SAR

FCC 1gSAR limit	1.6 W/kg
Max time averaged 1gSAR	0.247 W/kg
Validation result: pass	

● Case3-2: WCDMA B4 result for test sequence 2

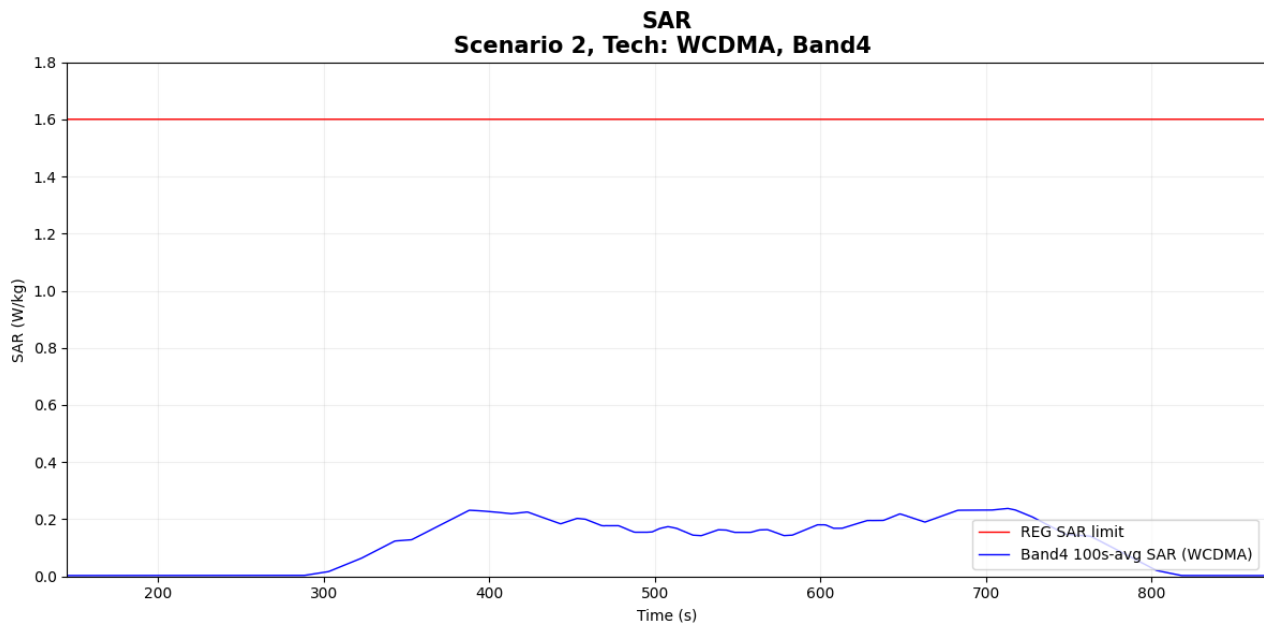


Figure 7-7 Time-averaged SAR

FCC 1gSAR limit	1.6 W/kg
Max time averaged 1gSAR	0.238 W/kg
Validation result: pass	

● Case4-1: WCDMA B2 result for test sequence 1

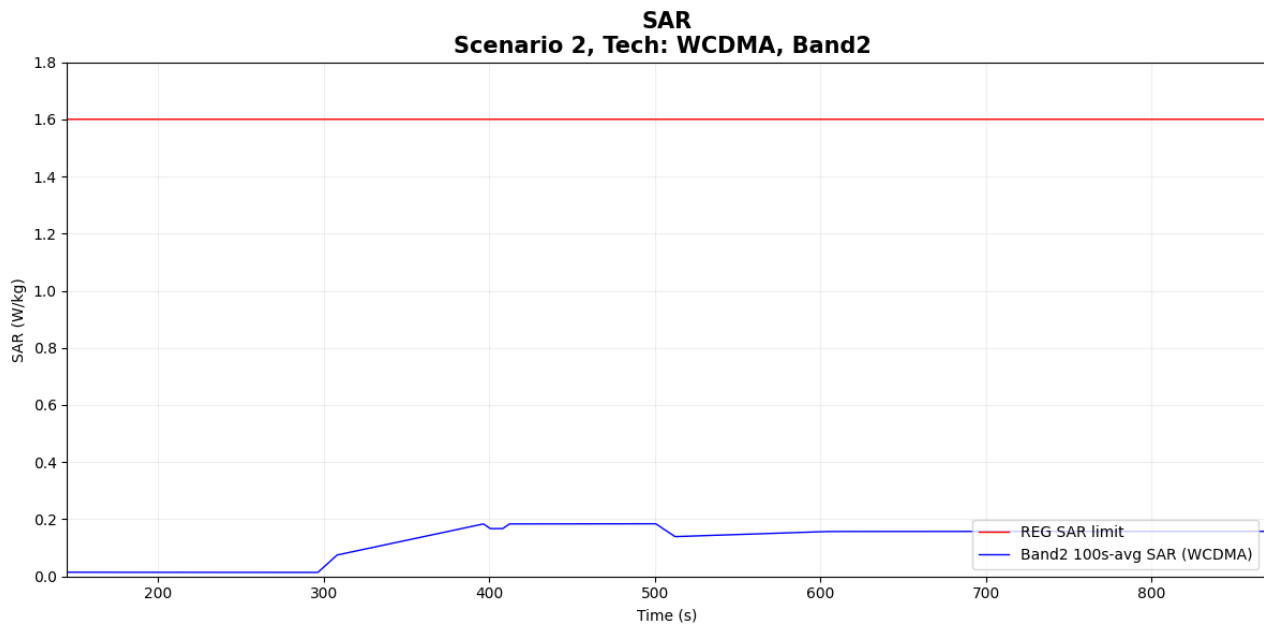


Figure 7-8 Time-averaged SAR

FCC 1gSAR limit	1.6 W/kg
Max time averaged 1gSAR	0.184 W/kg
Validation result: pass	

● Case4-2: WCDMA B2 result for test sequence 2

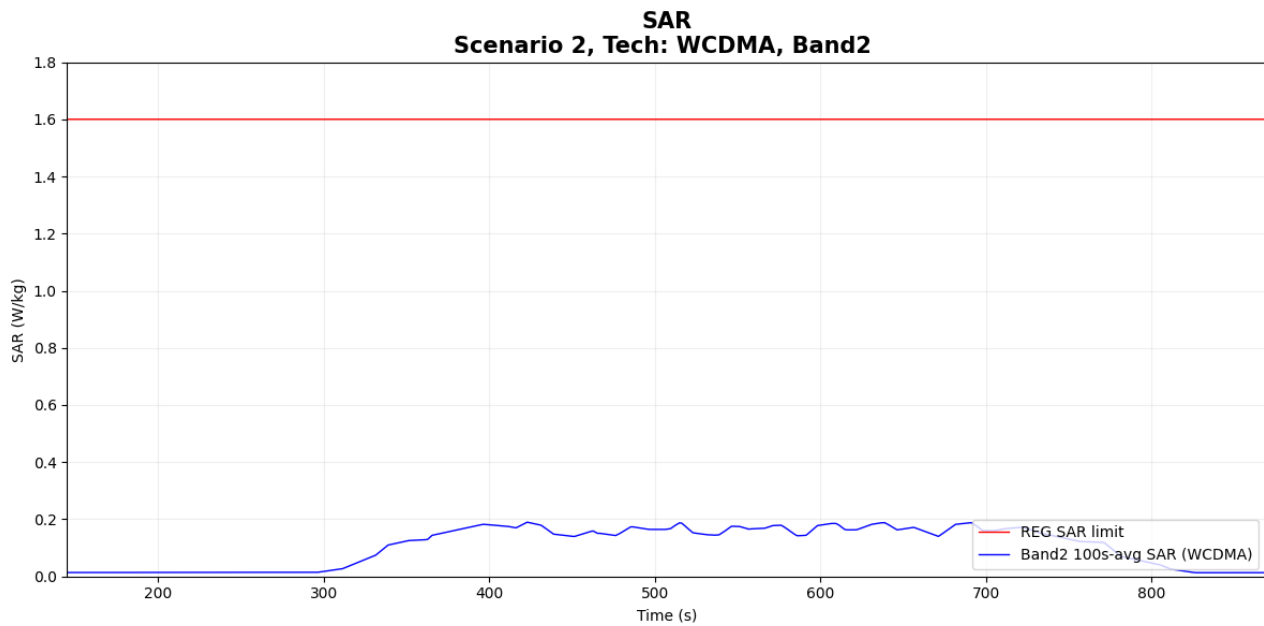


Figure 7-9 Time-averaged SAR

FCC 1gSAR limit	1.6 W/kg
Max time averaged 1gSAR	0.190 W/kg
Validation result: pass	

6.2.3 SAR Measurement results for LTE

- Case5-1: LTE Band 4 result for test sequence 1

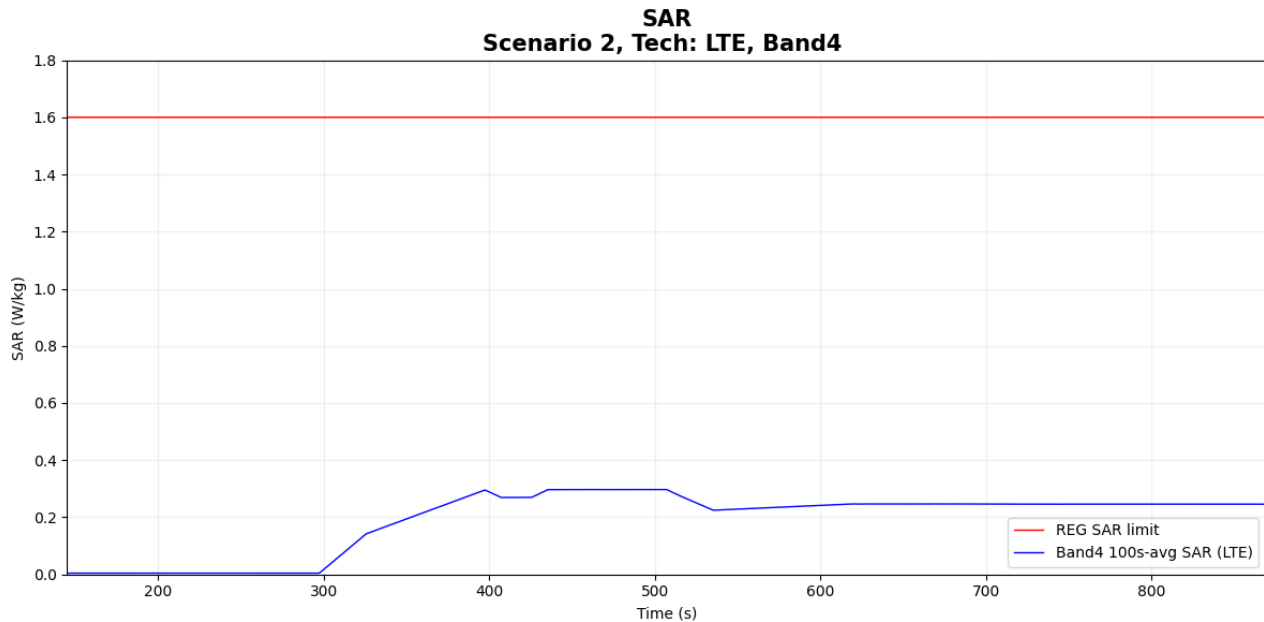


Figure 7-10 Time-averaged SAR

FCC 1gSAR limit	1.6 W/kg
Max time averaged 1gSAR	0.297 W/kg
Validation result: pass	

- Case5-2: LTE Band 4 result for test sequence 2

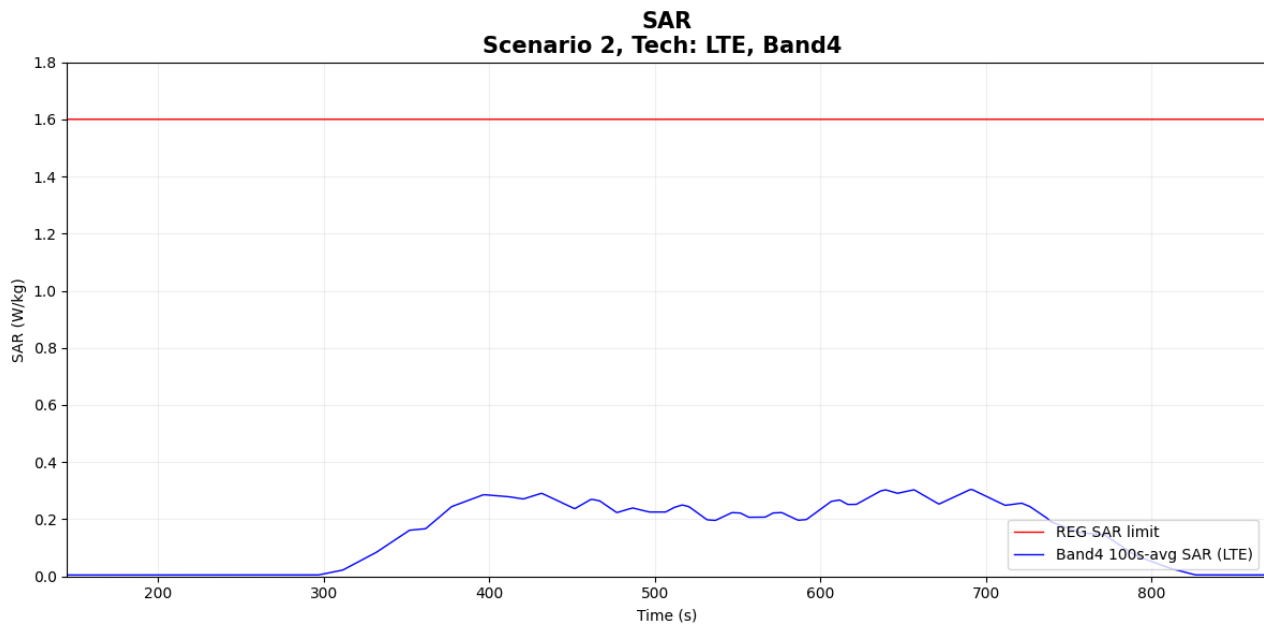


Figure 7-11 Time-averaged SAR

FCC 1gSAR limit	1.6 W/kg
Max time averaged 1gSAR	0.304 W/kg
Validation result: pass	

● Case6-1: LTE Band 48 result for test sequence 1

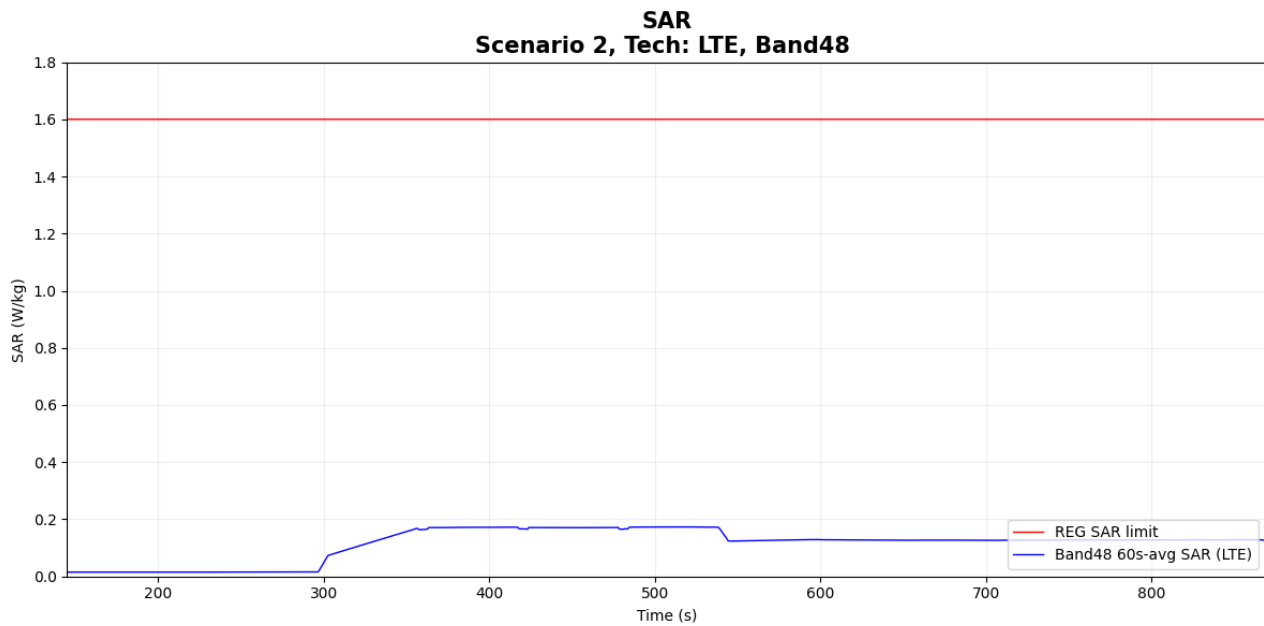


Figure 7-12 Time-averaged SAR

FCC 1gSAR limit	1.6 W/kg
Max time averaged 1gSAR	0.173 W/kg
Validation result: pass	

● Case6-2: LTE Band 48 result for test sequence 2

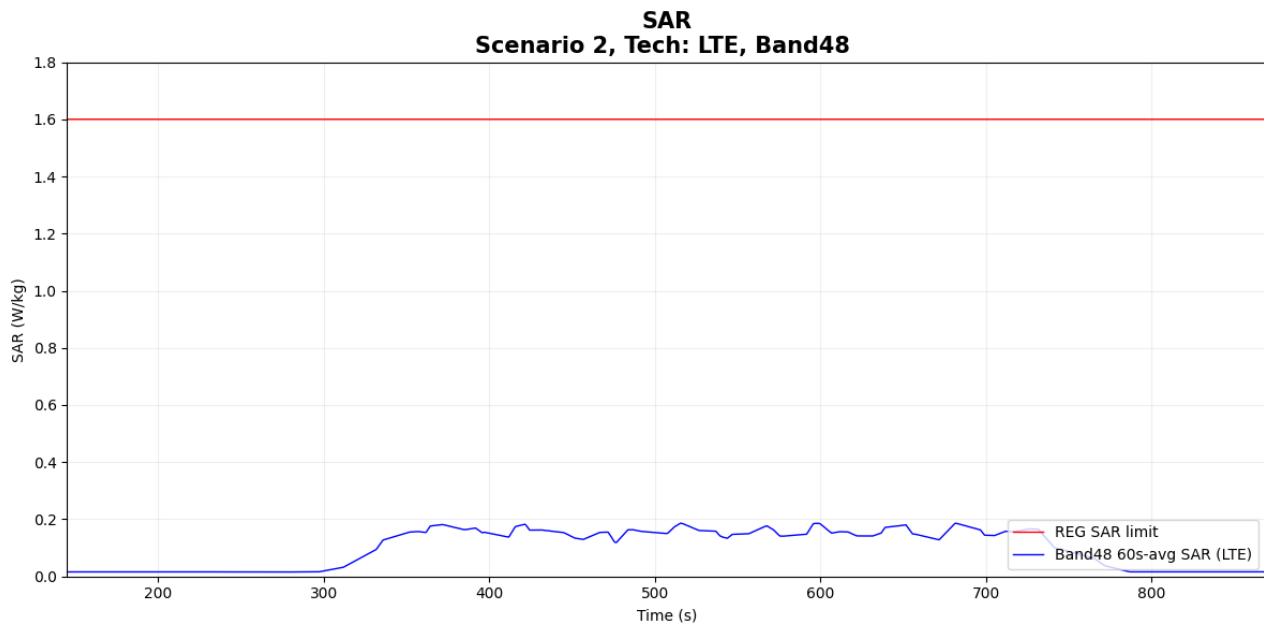


Figure 7-13 Time-averaged SAR

FCC 1gSAR limit	1.6 W/kg
Max time averaged 1gSAR	0.186 W/kg
Validation result: pass	

6.2.4 SAR Measurement results for NR

- Case7-1: NR n66 result for test sequence 1

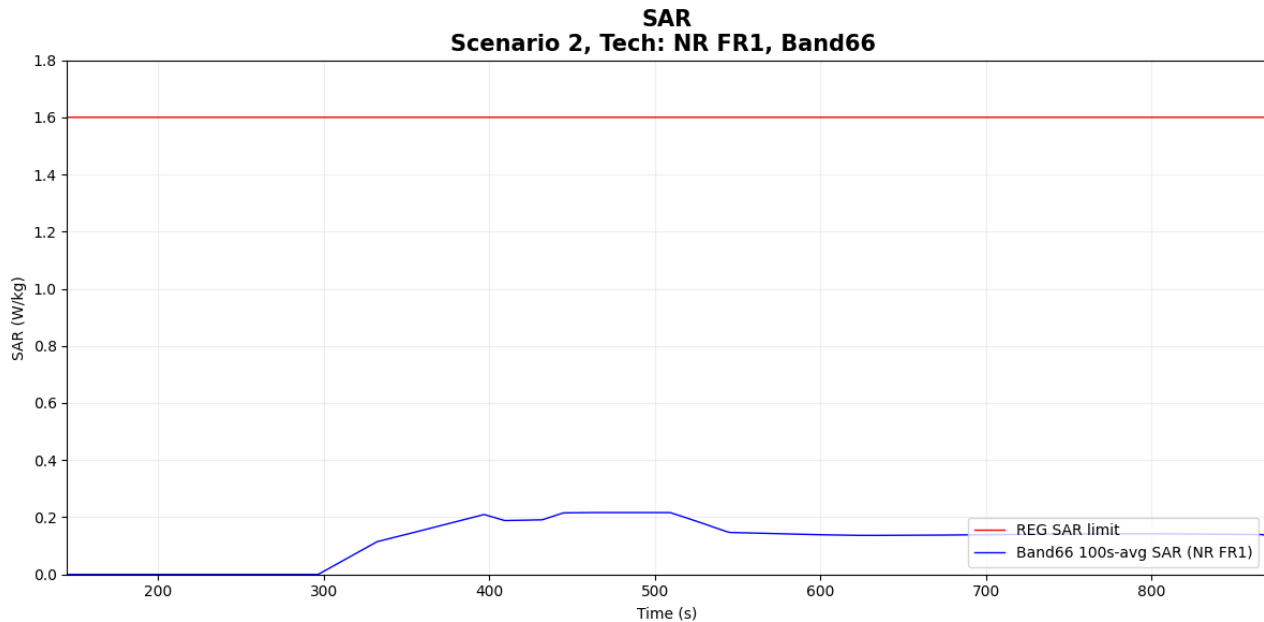


Figure 7-14 Time-averaged SAR

FCC 1gSAR limit	1.6 W/kg
Max time averaged 1gSAR	0.217 W/kg
Validation result: pass	

● Case7-2: NR n66 result for test sequence 2

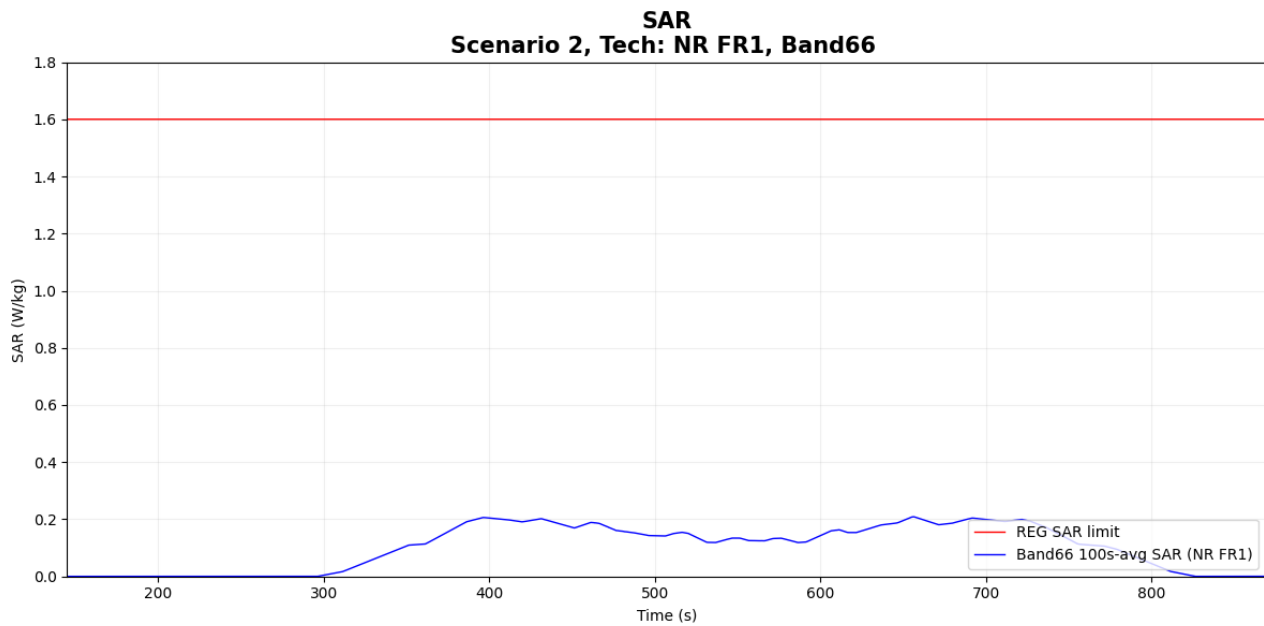


Figure 7-15 Time-averaged SAR

FCC 1gSAR limit	1.6 W/kg
Max time averaged 1gSAR	0.209 W/kg
Validation result: pass	

● Case8-1: NR n78 result for test sequence 1

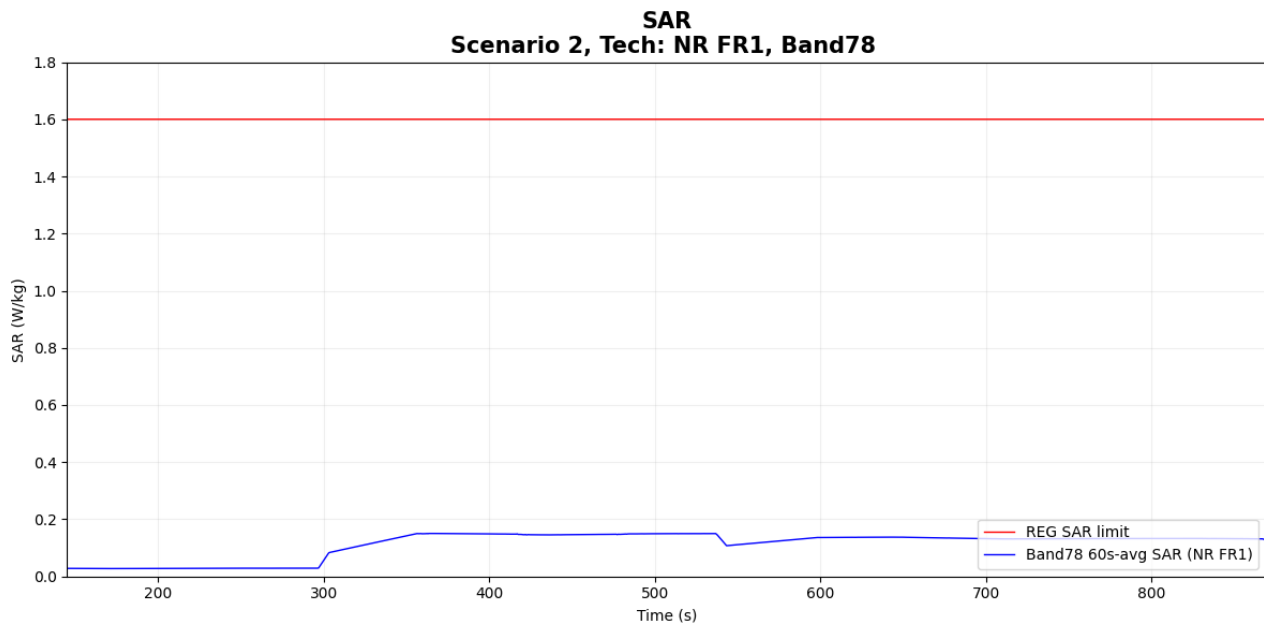


Figure 7-16 Time-averaged SAR

FCC 1gSAR limit	1.6 W/kg
Max time averaged 1gSAR	0.151 W/kg
Validation result: pass	

● Case8-2: NR n78 result for test sequence 2

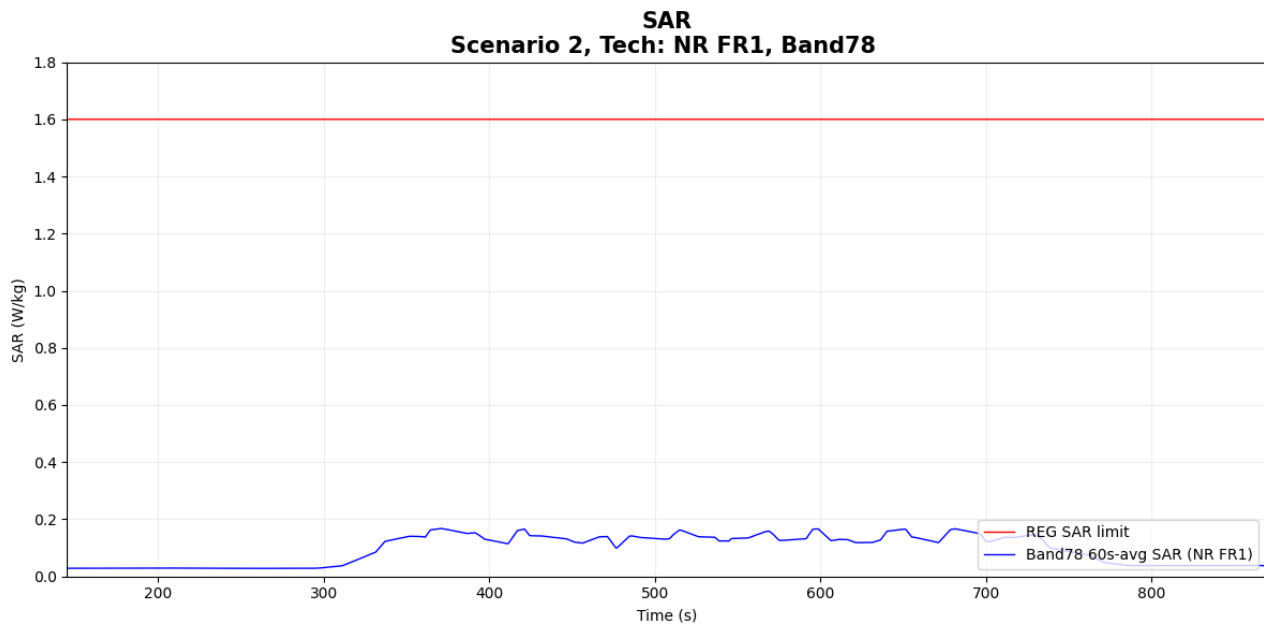


Figure 7-17 Time-averaged SAR for case

FCC 1gSAR limit	1.6 W/kg
Max time averaged 1gSAR	0.168 W/kg
Validation result: pass	


7. Conclusions

This document proposes TA-SAR test scenarios and procedures, and further proves Mediatek's TA-SAR algorithms can meet the FCC SAR regulations with the proposed test scenarios and procedures. As shown in Chapters 5, Mediatek's TA-SAR algorithms are able to maintain SAR over time below the FCC regulatory limits (based on the agreed TX-power-to-SAR translation). Furthermore, the near-field measurements are also done in an FCC certified lab (i.e., SPORTON) to further validate the proposed test methodologies, and the results shown in Chapters 6 demonstrate that Mediatek's TA-SAR algorithms really can maintain SAR over time below the FCC regulatory limits under the proposed test procedures. Based on the provided measurement evidences, it is concluded that Mediatek's TA-SAR algorithms can be tested by using the proposed test methodology for FCC compliance.

8. cDASY6 System Verification

8.1 The system to be used for the near field power density measurement

- SPEAG DASY6 system
- SPEAG cDASY6 5G module software
- EUmmWVx probe
- 5G Phantom cover
- SAR phantom (SAM-Twin/ELI Phantom)
- SAR probe (EX3D, ES3D probes)

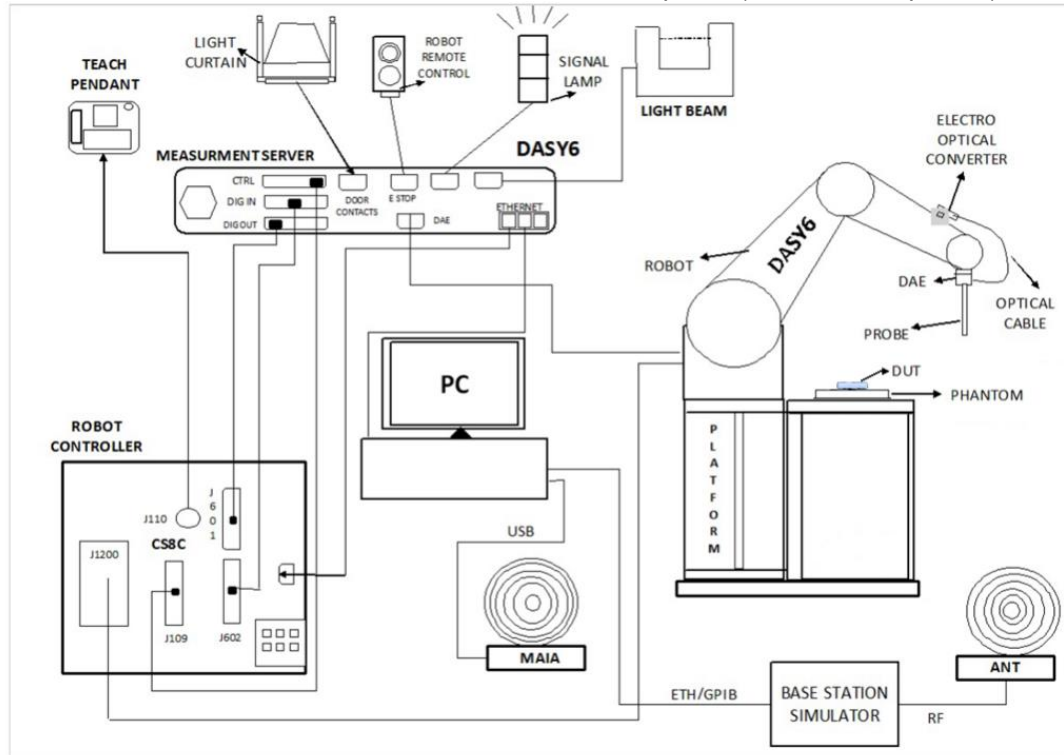


8.2 Test Side Location

Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Testing Laboratory			
Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	SAR02-SZ	CN1256	421272


8.3 SAR E-Field Probe

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	4 MHz – >10 GHz Linearity: ± 0.2 dB (30 MHz – 10 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

8.4 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

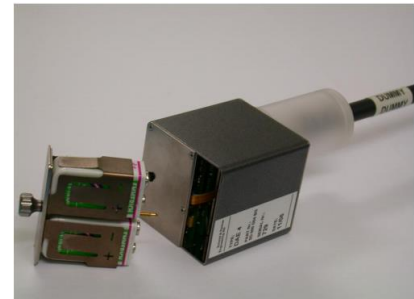

9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	835MHz System Validation Kit	D835V2	4d162	Dec. 17, 2021	Dec. 15, 2024
SPEAG	1750MHz System Validation Kit	D1750V2	1137	Oct. 15, 2024	Oct. 13, 2025
SPEAG	1900MHz System Validation Kit	D1900V2	5d182	Dec. 20, 2021	Dec. 18, 2024
SPEAG	3500MHz System Validation Kit	D3500V2	1076	May 09, 2022	May 07, 2025
SPEAG	3700MHz System Validation Kit	D3700V2	1037	May 09, 2022	May 07, 2025
SPEAG	Data Acquisition Electronics	DAE4	1664	Jul. 10, 2024	Jul. 09, 2025
SPEAG	Dosimetric E-Field Probe	EX3DV4	3819	Aug. 22, 2024	Aug. 21, 2025
SPEAG	SAM Twin Phantom	QD 000 P40 CD	1670	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
R&S	Wideband Radio Communication Tester	CMW500	157651	Dec. 28, 2023	Dec. 27, 2024
Keysight	UXM 5G Wireless Test Platform	E7515B	MY59321532	Aug. 14, 2024	Aug. 13, 2025
Keysight	Network Analyzer	E5071C	MY46523671	Oct. 15, 2024	Oct. 14, 2025
Speag	Dielectric Assessment KIT	DAK-3.5	1071	Feb. 19, 2024	Feb. 18, 2025
Agilent	Signal Generator	N5181A	MY50145381	Dec. 28, 2023	Dec. 27, 2024
Anritsu	Power Sensor	MA2411B	1542004	Dec. 28, 2023	Dec. 27, 2024
Anritsu	Power Meter	ML2495A	1339473	Dec. 28, 2023	Dec. 27, 2024
R&S	Power Sensor	NRP50S	101254	Apr. 08, 2024	Apr. 07, 2025
R&S	Power Sensor	NRP50S	101548	Dec. 27, 2023	Dec. 26, 2024
R&S	Power Sensor	NRP8S	109228	Apr. 08, 2024	Apr. 07, 2025
TES	Hygrometer	1310	200505600	Jul. 08, 2024	Jul. 07, 2025
Anymetre	Thermo-Hygrometer	JR593	2015030904	Jul. 09, 2024	Jul. 08, 2025
AR	Amplifier	5S1G4	0333096	Apr. 08, 2024	Apr. 07, 2025
Mini-Circuits	Amplifier	ZVE-3W-83+	599201528	Apr. 08, 2024	Apr. 07, 2025
SPEAG	Device Holder	N/A	N/A	N/A	N/A
ARRA	Power Divider	A3200-2	N/A	Note 1	
TRM	Directional Coupler	DCS1070	50021	Note 1	
PE	Directional Coupler	2214-10	53919	Note 1	
Jinkexinhua	Attenuator	10db-8G	N/A	Note 1	
TRM	Directional Coupler	DCS1070	50021-1	Note 1	
TRM	Directional Coupler	DCS1070	50021-2	Note 1	
AGILENT	Directional Coupler	0955-0148	116232-1	Note 1	
AGILENT	Directional Coupler	0955-0148	116232-2	Note 1	
AGILENT	Directional Coupler	8494B	MY42148574	Note 1	

General Note:

- Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
- The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix B can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.

10. System verification and validation

10.1 Tissue Verification

The tissue dielectric parameters of tissue-equivalent media used for SAR measurements must be characterized within a temperature range of 18°C to 25°C, measured with calibrated instruments and apparatuses, such as network analyzers and temperature probes. The temperature of the tissue-equivalent medium during SAR measurement must also be within 18°C to 25°C and within $\pm 2^{\circ}\text{C}$ of the temperature when the tissue parameters are characterized. The tissue dielectric measurement system must be calibrated before use. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements.

The liquid tissue depth was at least 15cm in the phantom for all SAR testing

<Tissue Check Results>

Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
835	22.3	0.919	43.100	0.90	41.50	2.11	3.86	± 5	2024/11/10
1750	22.4	1.340	41.500	1.37	40.10	-2.19	3.49	± 5	2024/11/10
1900	22.3	1.440	41.700	1.40	40.00	2.86	4.25	± 5	2024/11/10
3500	22.2	2.850	39.200	2.91	37.90	-2.06	3.43	± 5	2024/11/10
3700	22.5	3.100	38.900	3.12	37.70	-0.64	3.18	± 5	2024/11/10

10.2 System Verification

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A.

<System Verification Results>

Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2024/11/10	835	250	4d162	3819	1664	2.540	9.640	10.16	5.39
2024/11/10	1750	250	1137	3819	1664	9.580	36.800	38.32	4.13
2024/11/10	1900	250	5d182	3819	1664	10.500	39.600	42	6.06
2024/11/10	3500	100	1076	3819	1664	6.120	66.200	61.2	-7.55
2024/11/10	3700	100	1037	3819	1664	7.080	66.700	70.8	6.15

Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2024/11/10	835	250	4d162	3819	1664	1.670	6.260	6.68	6.71
2024/11/10	1750	250	1137	3819	1664	5.180	19.600	20.72	5.71
2024/11/10	1900	250	5d182	3819	1664	5.430	20.200	21.72	7.52
2024/11/10	3500	100	1076	3819	1664	2.350	25.500	23.5	-7.84
2024/11/10	3700	100	1037	3819	1664	2.630	24.600	26.3	6.91

11. Uncertainty Assessment

Declaration of Conformity:

The test results with all measurement uncertainty excluded is presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the ufacturer takes all the responsibilities for the accuracy of product specification.

The component of uncertainly may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainly by the statistical analysis of a series of observations is termed a Type An evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	1/k ^(b)	1/√3	1/√6	1/√2

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) κ is the coverage factor

Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

The judgment of conformity in the report is based on the measurement results excluding the measurement uncertainty.

Uncertainty Budget (Frequency band: 4 MHz - 10 GHz range)							
Error Description	Uncert. Value (±%)	Prob. Dist.	Div.	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
Measurement System errors							
Probe calibration	18.6	N	2	1	1	9.3	9.3
Probe calibration drift	1.7	R	1.732	1	1	1.0	1.0
Probe linearity and detection Limit	4.7	R	1.732	1	1	2.7	2.7
Broadband signal	2.8	R	1.732	1	1	1.6	1.6
Probe isotropy	7.6	R	1.732	1	1	4.4	4.4
Other probe and data acquisition errors	2.4	N	1	1	1	2.4	2.4
RF ambient and noise	1.8	N	1	1	1	1.8	1.8
Probe positioning errors	0.006	N	1	0.5	0.5	0.0	0.0
Data processing errors	4.0	N	1	1	1	4.0	4.0
Phantom and Device Errors							
Measurement of phantom conductivity (σ)	2.5	N	1	0.78	0.71	2.0	1.8
Temperature effects (medium)	5.4	R	1.732	0.78	0.71	2.4	2.2
Shell permittivity	14.0	R	1.732	0.5	0.5	4.0	4.0
Distance between the radiating element of the DUT and the phantom medium	2.0	N	1	2	2	4.0	4.0
Repeatability of positioning the DUT or source against the phantom	1.0	N	1	1	1	1.0	1.0
Device holder effects	3.6	N	1	1	1	3.6	3.6
Effect of operating mode on probe sensitivity	2.4	R	1.732	1	1	1.4	1.4
Time-average SAR	1.7	R	1.732	1	1	1.0	1.0
Variation in SAR due to drift in output of DUT	2.5	N	1	1	1	2.5	2.5
Validation antenna uncertainty (validation measurement only)	0.0	N	1	1	1	0.0	0.0
Uncertainty in accepted power (validation measurement only)	0.0	N	1	1	1	0.0	0.0
Correction to the SAR results							
Phantom deviation from target (ϵ', σ)	1.9	N	1	1	0.84	1.9	1.6
SAR scaling	0.0	R	1.732	1	1	0.0	0.0
Combined Std. Uncertainty						14.5%	14.4%
Coverage Factor for 95 %						K=2	K=2
Expanded STD Uncertainty						29.0%	28.8%



Appendix A. Plots of System Performance Check

Appendix B. DASY Calibration Certificate

Appendix C. Test Setup Photos

-----THE END-----