



11.6. APPENDIX F: DUTY CYCLE

11.6.1. Test Result

Test Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
11A-CDD	2.10	2.25	0.9333	93.33	0.30	0.48	0.5
11AX20MIMO	5.45	6.80	0.8015	80.15	0.96	0.18	0.5
11AX40MIMO	5.45	6.81	0.8003	80.03	0.97	0.18	0.5
11AX80MIMO	5.45	6.82	0.7991	79.91	0.97	0.18	0.5
11AX160MIMO	5.45	6.83	0.7980	79.80	0.98	0.18	0.5
11BE20MIMO	5.45	6.81	0.8003	80.03	0.97	0.18	0.5
11BE40MIMO	5.44	6.82	0.7977	79.77	0.98	0.18	0.5
11BE80MIMO	5.45	6.81	0.8003	80.03	0.97	0.18	0.5
11BE160MIMO	5.44	6.82	0.7977	79.77	0.98	0.18	0.5
11BE240MIMO	4.00	4.08	0.9804	98.04	0.09	0.25	0.5

Note:

Duty Cycle Correction Factor=10log (1/x).

Where: x is Duty Cycle (Linear)


Where: T is On Time


If that calculated VBW is not available on the analyzer then the next higher value should be used.




11.6.2. Test Graphs



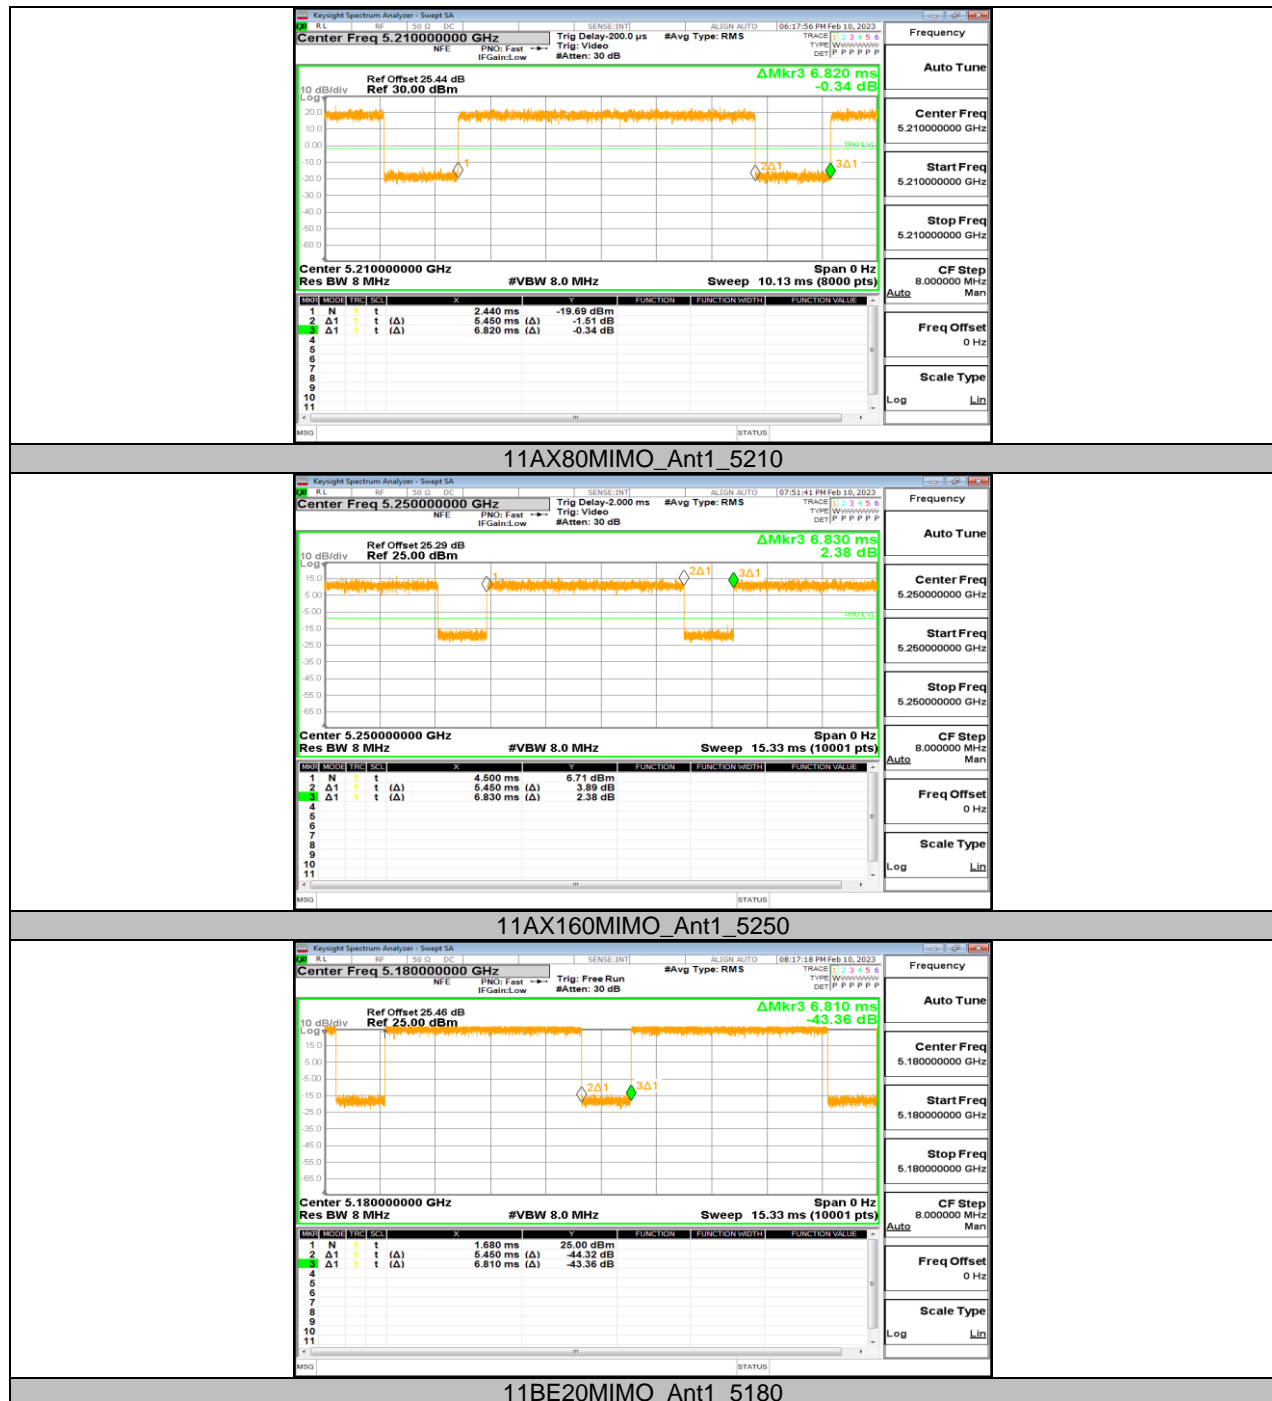

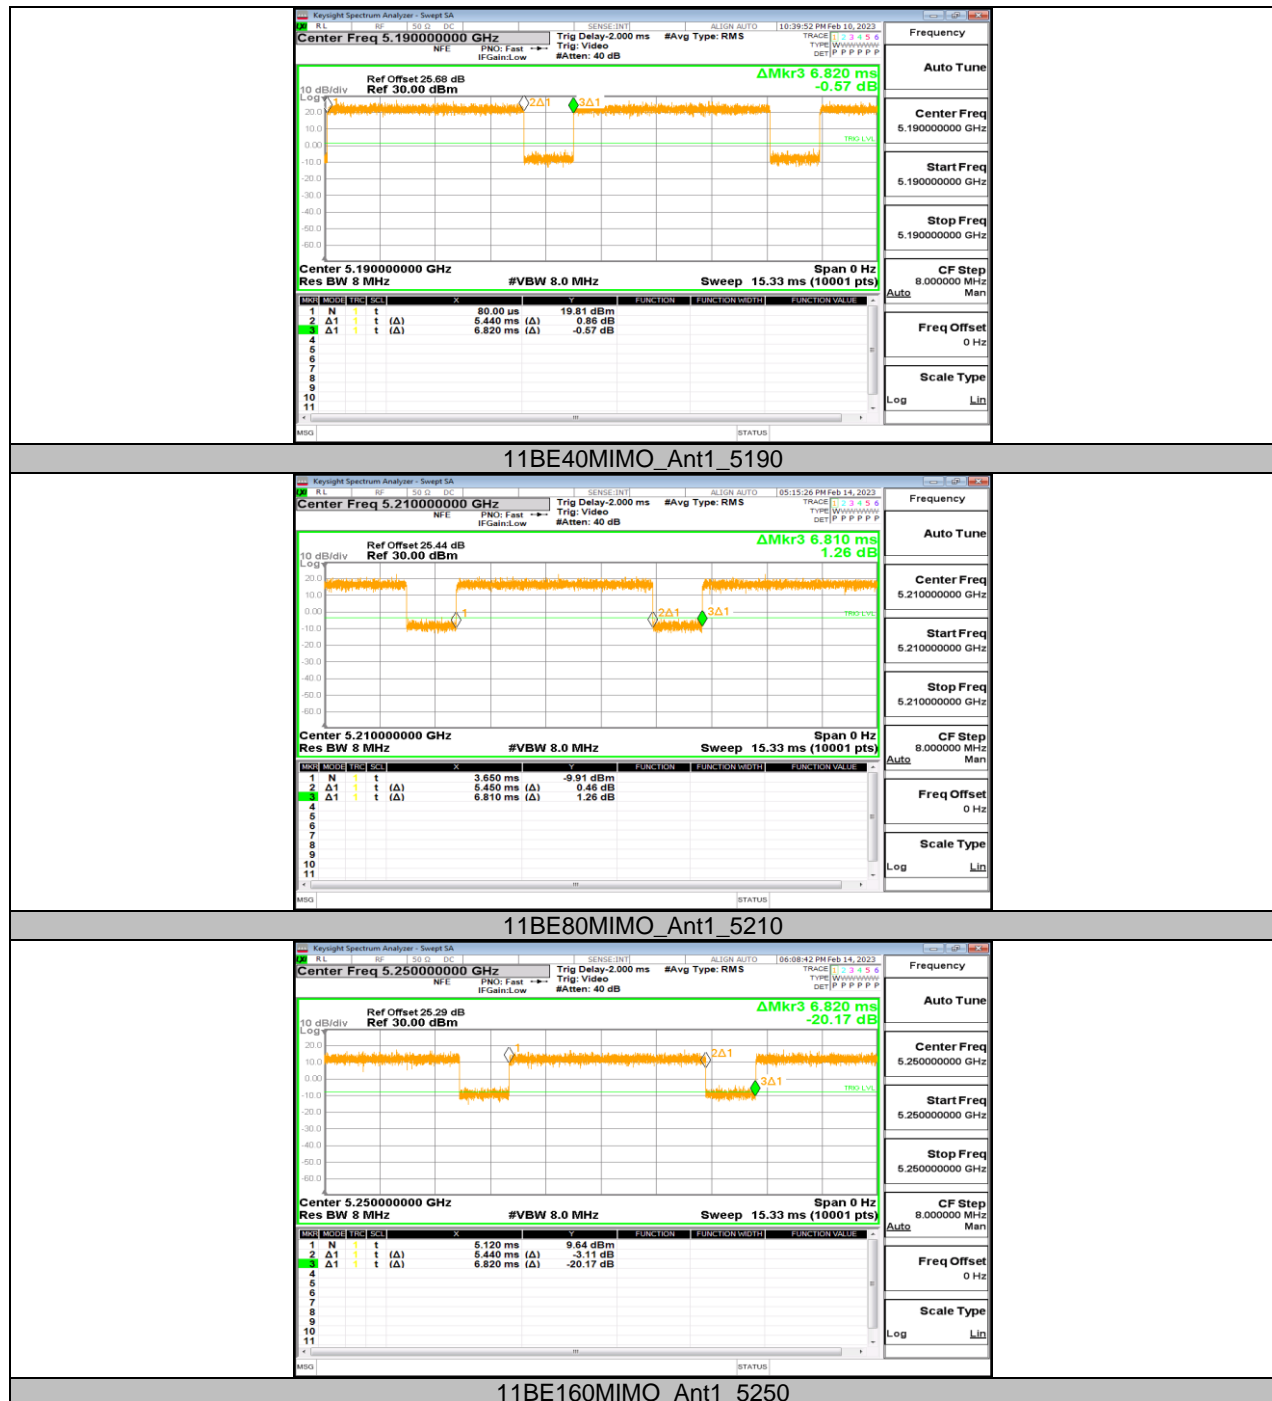

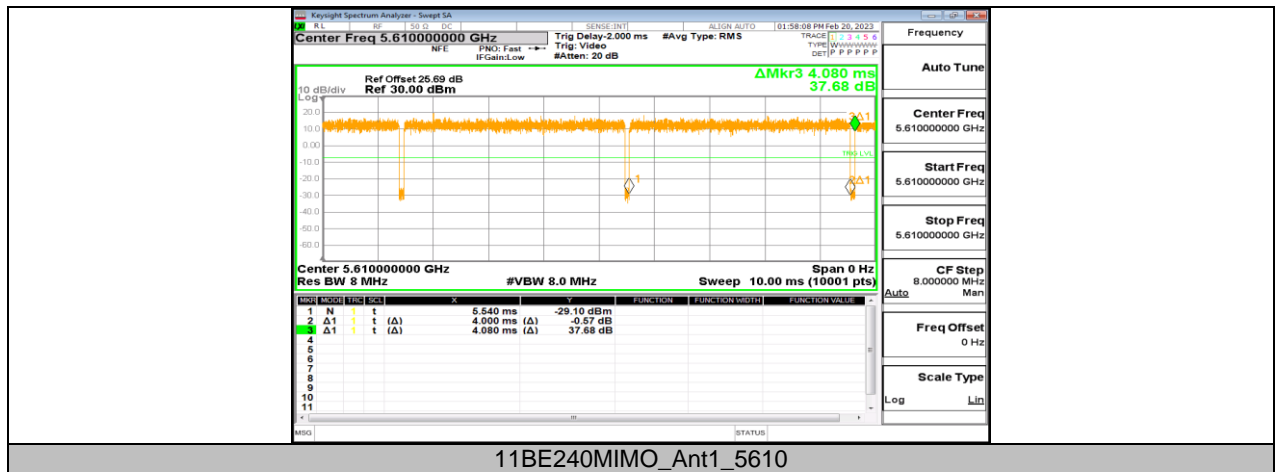

**11.7. APPENDIX G: FREQUENCY STABILITY****11.7.1. Test Result**

Frequency Error vs. Voltage									
802.11a:5200MHz									
Temp.	Volt.	0 Minute		2 Minute		5 Minute		10 Minute	
		Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)
TN	VL	5200.0246	4.72	5199.9940	-1.16	5199.9784	-4.16	5199.9814	-3.58
TN	VN	5199.9859	-2.71	5200.0003	0.06	5200.0209	4.01	5200.0211	4.05
TN	VH	5200.0181	3.48	5200.0082	1.58	5200.0006	0.11	5199.9825	-3.37
Frequency Error vs. Temperature									
802.11a:5200MHz									
Temp.	Volt.	0 Minute		2 Minute		5 Minute		10 Minute	
		Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)
40	VN	5199.9808	-3.68	5199.9969	-0.59	5200.0202	3.88	5200.0250	4.80
30	VN	5199.9884	-2.23	5200.0083	1.59	5199.9898	-1.96	5200.0229	4.40
20	VN	5199.9940	-1.15	5199.9869	-2.52	5200.0124	2.39	5200.0049	0.94
10	VN	5200.0078	1.49	5200.0017	0.32	5200.0053	1.03	5200.0092	1.76
0	VN	5200.0014	0.27	5199.9794	-3.95	5199.9964	-0.70	5199.9766	-4.49

Note:

1. All antennas, test modes and test channels have been tested, only the worst data record in the report.
2. For the detail Test Conditions, please refer to section 7.5 TEST ENVIRONMENT.



Frequency Error vs. Voltage									
802.11a:5825MHz									
Temp.	Volt.	0 Minute		2 Minute		5 Minute		10 Minute	
		Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)
TN	VL	5824.9752	-4.26	5825.0106	1.82	5824.9834	-2.86	5824.9971	-0.50
TN	VN	5825.0022	0.37	5825.0072	1.23	5824.9780	-3.78	5824.9755	-4.21
TN	VH	5824.9900	-1.72	5825.0141	2.41	5825.0045	0.77	5825.0048	0.83
Frequency Error vs. Temperature									
802.11a:5825MHz									
Temp.	Volt.	0 Minute		2 Minute		5 Minute		10 Minute	
		Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)
40	VN	5825.0078	1.34	5824.9904	-1.66	5825.0104	1.78	5825.0149	2.56
30	VN	5825.0176	3.02	5825.0058	0.99	5824.9927	-1.25	5824.9917	-1.42
20	VN	5824.9808	-3.30	5825.0141	2.42	5824.9993	-0.13	5824.9947	-0.91
10	VN	5825.0031	0.53	5825.0038	0.65	5824.9909	-1.56	5825.0028	0.49
0	VN	5824.9971	-0.49	5825.0016	0.27	5825.0146	2.51	5824.9855	-2.49

Note:

1. All antennas, test modes and test channels have been tested, only the worst data record in the report.
2. For the detail Test Conditions, please refer to section 7.5 TEST ENVIRONMENT.

END OF REPORT