



# FCC PART 15C TEST REPORT

**BLUETOOTH LOW ENERGY (BLE) PART**

**No. I19Z61716-IOT04**

**for**

**HMD Global Oy**

**Multi-band GSM/WCDMA/LTE phone with Bluetooth, WLAN**

**Model Name: TA-1211**

**FCC ID: 2AJOTTA-1211**

**with**

**Hardware Version: 99621\_1\_11**

**Software Version: 000T\_0\_130**

**Issued Date: 2019-10-23**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

**Test Laboratory:**

**CTTL, Telecommunication Technology Labs, CAICT**

No.52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: [cttl\\_terminals@caict.ac.cn](mailto:cttl_terminals@caict.ac.cn), website: [www.chinattl.com](http://www.chinattl.com)

## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Description</b>	<b>Issue Date</b>
I19Z61716-IOT04	Rev.0	1st edition	2019-10-23

## **CONTENTS**

<b>1. TEST LABORATORY.....</b>	<b>5</b>
1.1. INTRODUCTION & ACCREDITATION.....	5
1.2. TESTING LOCATION.....	5
1.3. TESTING ENVIRONMENT.....	6
1.4. PROJECT DATA.....	6
1.5. SIGNATURE.....	6
<b>2. CLIENT INFORMATION.....</b>	<b>7</b>
2.1. APPLICANT INFORMATION.....	7
2.2. MANUFACTURER INFORMATION.....	7
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE).....</b>	<b>8</b>
3.1. ABOUT EUT.....	8
3.2. INTERNAL IDENTIFICATION OF EUT.....	8
3.3. INTERNAL IDENTIFICATION OF AE.....	8
3.4. NORMAL ACCESSORY SETTING.....	9
3.5. GENERAL DESCRIPTION.....	9
<b>4. REFERENCE DOCUMENTS.....</b>	<b>10</b>
4.1. DOCUMENTS SUPPLIED BY APPLICANT.....	10
4.2. REFERENCE DOCUMENTS FOR TESTING.....	10
<b>5. TEST RESULTS.....</b>	<b>11</b>
5.1. SUMMARY OF EUT MODE.....	11
5.2. SUMMARY OF TEST RESULTS.....	11
5.3. STATEMENTS.....	11
5.4. EXPLANATION OF RE-USE OF TEST DATA.....	11
<b>6. TEST FACILITIES UTILIZED.....</b>	<b>12</b>
<b>7. MEASUREMENT UNCERTAINTY.....</b>	<b>13</b>
7.1. PEAK OUTPUT POWER - CONDUCTED.....	13
7.2. FREQUENCY BAND EDGES.....	13
7.3. TRANSMITTER SPURIOUS EMISSION - CONDUCTED.....	13
7.4. TRANSMITTER SPURIOUS EMISSION - RADIATED.....	13
7.5. 6dB BANDWIDTH.....	13
7.6. MAXIMUM POWER SPECTRAL DENSITY LEVEL.....	13
7.7. AC POWERLINE CONDUCTED EMISSION.....	14
<b>ANNEX A: DETAILED TEST RESULTS.....</b>	<b>15</b>
A.1. MEASUREMENT METHOD.....	15
A.2. PEAK OUTPUT POWER - CONDUCTED.....	16
A.3. FREQUENCY BAND EDGES - CONDUCTED.....	18



A.4. TRANSMITTER SPURIOUS EMISSION - CONDUCTED.....	20
A.5. TRANSMITTER SPURIOUS EMISSION - RADIATED.....	29
A.6. 6dB BANDWIDTH.....	33
A.7. MAXIMUM POWER SPECTRAL DENSITY LEVEL.....	36
A.8. AC POWERLINE CONDUCTED EMISSION.....	39
<b>ANNEX B: ACCREDITATION CERTIFICATE.....</b>	<b>46</b>

## **1. Test Laboratory**

### **1.1. Introduction &Accreditation**

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2005 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0, and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (CN0066). The detail accreditation scope can be found on NVLAP website.

### **1.2. Testing Location**

Conducted testing Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China 100191

Radiated testing Location: CTTL(BDA)

Address: No.18A, Kangding Street, Beijing Economic-Technology  
Development Area, Beijing, P. R. China 100176


### 1.3. Testing Environment

Normal Temperature: 15-35℃  
Relative Humidity: 20-75%

### 1.4. Project data

Testing Start Date: 2019-9-16  
Testing End Date: 2019-10-10

### 1.5. Signature

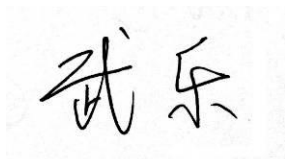

---

**Wu Le**  
**(Prepared this test report)**



---

**Sun Zhenyu**  
**(Reviewed this test report)**



---

**Li Zhuofang**  
**(Approved this test report)**

## **2. Client Information**

### **2.1. Applicant Information**

Company Name: HMD Global Oy  
Address /Post: Bertel Jungin aukio 9,02600 Espoo, Finland  
City: Espoo  
Postal Code: /  
Country: Finland  
Telephone: /  
Fax: /

### **2.2. Manufacturer Information**

Company Name: HMD Global Oy  
Address /Post: Bertel Jungin aukio 9,02600 Espoo, Finland  
City: Espoo  
Postal Code: /  
Country: Finland  
Telephone: /  
Fax: /

### 3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

#### 3.1. About EUT

Description	Multi-band GSM/WCDMA/LTE phone with Bluetooth, WLAN
Model Name	TA-1211
FCC ID	2AJOTTA-1211
Frequency Band	ISM 2400MHz~2483.5MHz
Type of Modulation(LE mode)	GFSK (Bluetooth Low Energy)
Number of Channels(LE mode)	40
Power Supply	3.85V DC by Battery

#### 3.2. Internal Identification of EUT

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	/	99621_1_11	000T_0_130
EUT2	354218100001378	99621_1_11	000T_0_130

\*EUT ID: is used to identify the test sample in the lab internally.

#### 3.3. Internal Identification of AE

AE ID*	Description		
AE1	Battery	/	/
AE3	Charger	/	/
AE4	Charger	/	
AE5	Charger	/	
AE6	Charger	/	
AE7	USB Cable	/	
AE8	USB Cable	/	

##### AE1

Model	WT240
Manufacturer	Jiade Energy Technology (Zhuhai) Co., Ltd
Capacitance	3920mAh
Nominal voltage	3.85v

##### AE3

Model	CH-35E
Manufacturer	Shenzhen Tianyin Electronics Co., Ltd
Length of cable	/

##### AE4

Model	CH-35X
Manufacturer	Shenzhen Tianyin Electronics Co., Ltd
Length of cable	/



**AE5**

Model	CH-35U
Manufacturer	Shenzhen Tianyin Electronics Co., Ltd
Length of cable	/

**AE6**

Model	CH-35E
Manufacturer	Yutong electronics(Huizhou) co.,ltd

Length of cable	/
-----------------	---

**AE7**

Model	CB-35A
Manufacturer	Leagtech Electronics Co.,Ltd

Length of cable	/
-----------------	---

**AE8**

Model	CB-35A
Manufacturer	Shenzhen BRL Technology Co.,Ltd.
Length of cable	/

\*AE ID: is used to identify the test sample in the lab internally.

**3.4. Normal Accessory setting**

Fully charged battery is used during the test.

**3.5. General Description**

The Equipment Under Test (EUT) is a model of Multi-band GSM/WCDMA/LTE phone with Bluetooth, WLAN with integrated antenna. It consists of normal options: lithium battery, charger. Manual and specifications of the EUT were provided to fulfill the test. Samples undergoing test were selected by the Client.

## 4. Reference Documents

### 4.1. Documents supplied by applicant

EUT feature information is supplied by the client or manufacturer, which is the basis of testing.

### 4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C:	
	15.205 Restricted bands of operation;	
	15.209 Radiated emission limits, general requirements;	2018
	15.247 Operation within the bands 902–928MHz, 2400–2483.5 MHz, and 5725–5850 MHz.	
ANSI C63.10	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	June,2013

## 5. Test Results

### 5.1. Summary of EUT Mode

Two mode are provided:

Mode	Conditions
Mode A	1Mbps
Mode B	2Mbps

\*For the test results, the EUT had been tested all conditions. But only the worst case(Mode A) was shown in test report except the " RF output power " test was shown all conditions.

### 5.2. Summary of Test Results

Abbreviations used in this clause:

- P** Pass, The EUT complies with the essential requirements in the standard.
- F** Fail, The EUT does not comply with the essential requirements in the standard
- NA** Not Applicable, The test was not applicable
- NP** Not Performed, The test was not performed by CTTL
- R** Re-use test data from basic model report.

SUMMARY OF MEASUREMENT RESULTS	Sub-clause	Verdict
6dB Bandwidth	15.247 (a)(2)	<b>R</b>
Peak Output Power - Conducted	15.247 (b)(1)	<b>P</b>
Maximum Power Spectral Density Level	15.247(e)	<b>R</b>
Transmitter Spurious Emission - Conducted	15.247 (d)	<b>R</b>
Transmitter Spurious Emission - Radiated	15.247, 15.205, 15.209	<b>R</b>
Frequency Band Edges	15.247 (d)	<b>R</b>
AC Powerline Conducted Emission	15.107, 15.207	<b>R</b>

Please refer to **ANNEX A** for detail.

The measurement is made according to ANSI C63.10.

### 5.3. Statements

CTTL has evaluated the test cases requested by the applicant /manufacturer as listed in section 5.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.2

### 5.4. Explanation of re-use of test data

The Equipment Under Test (EUT) model TA-1211(FCC ID: 2AJOTTA-1211) is a variant product of TA-1206(FCC ID: 2AJOTTA-1206), according to the declaration of changes provided by the applicant and FCC KDB publication 484596 D01, spot check measurements(Peak Output Power-Conducted ) were performed on this device, other test results are derived from test report No. I19Z61671-IOT04( I19Z61671-IOT04 is test report of TA-1214. TA-1206 is a variant product of TA-1214 and shares the TA-1214 results ). Please refer Annex A for detail spot check verification data and reference data. the spot check test results are consistent with basic model. For detail differences between two models please refer the Declaration of Changes document.

## 6. Test Facilities Utilized

### Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ26	200136	Rohde & Schwarz	1 year	2019-11-21
2	LISN	ENV216	101459	R&S	1 year	2020-04-10
3	Test Receiver	ESCI	100766	R&S	1 year	2020-03-20
4	Shielding Room	S81	/	ETS-Lindgren	/	/

### Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESU26	100376	Rohde & Schwarz	1 year	2019-11-27
2	BiLog Antenna	VULB9163	9163-514	Schwarzbeck	1 year	2020-02-03
3	Dual-Ridge Waveguide Horn Antenna	3115	00167252	ETS-Lindgren	1 year	2019-11-25
4	Dual-Ridge Waveguide Horn Antenna	3116	2663	ETS-Lindgren	1 year	2020-05-31
5	Vector Signal Analyzer	FSV40	101047	Rohde & Schwarz	1 year	2020-05-16

## 7. Measurement Uncertainty

### 7.1. Peak Output Power - Conducted

#### Measurement Uncertainty:

Measurement Uncertainty (k=2)	0.66dB
-------------------------------	--------

### 7.2. Frequency Band Edges

#### Measurement Uncertainty:

Measurement Uncertainty (k=2)	0.66dB
-------------------------------	--------

### 7.3. Transmitter Spurious Emission - Conducted

#### Measurement Uncertainty:

Frequency Range	Uncertainty (k=2)
30 MHz ~ 8 GHz	1.22dB
8 GHz ~ 12.75 GHz	1.51dB
12.7GHz ~ 26 GHz	1.51dB

### 7.4. Transmitter Spurious Emission - Radiated

#### Measurement Uncertainty:

Frequency Range	Uncertainty (k=2)
< 1 GHz	5.40dB
> 1 GHz	4.32dB

### 7.5. 6dB Bandwidth

#### Measurement Uncertainty:

Measurement Uncertainty (k=2)	61.936Hz
-------------------------------	----------

### 7.6. Maximum Power Spectral Density Level

#### Measurement Uncertainty:

Measurement Uncertainty (k=2)	0.66dB
-------------------------------	--------

## 7.7. AC Powerline Conducted Emission

### Measurement Uncertainty:

Measurement Uncertainty (k=2)	3.38dB
-------------------------------	--------


## **ANNEX A: Detailed Test Results**

### **A.1. Measurement Method**

#### **A.1.1. Conducted Measurements**

The measurement is made according to ANSI C63.10.

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode (Transmitter, receiver or transmitter & receiver).
- 3). Set the EUT to the required channel.
- 4). Set the EUT hopping mode (hopping or hopping off).
- 5). Set the spectrum analyzer to start measurement.
- 6). Record the values. Vector Signal Analyzer

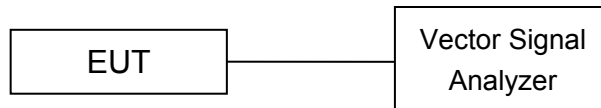

#### **A.1.2. Radiated Emission Measurements**


The measurement is made according to ANSI C63.10.

The radiated emission test is performed in semi-anechoic chamber. The distance from the EUT to the reference point of measurement antenna is 3m. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result.

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 1MHz;

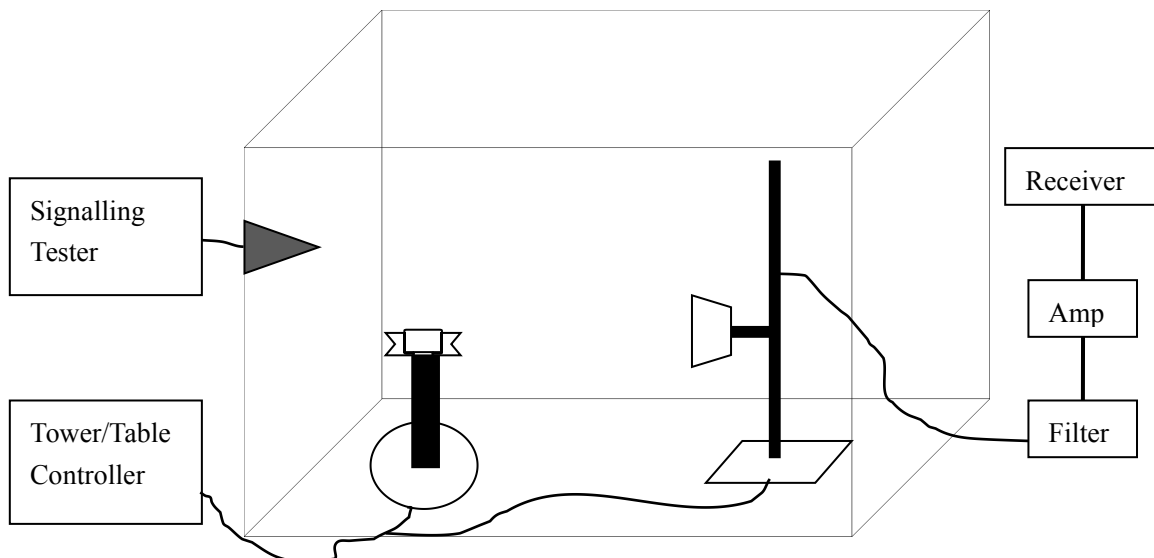

## A.2. Peak Output Power - Conducted

**Method of Measurement:** See ANSI C63.10-clause 11.9.1.1

- a) Set the RBW = 1 MHz.
- b) Set VBW = 3 MHz.
- c) Set span = 3 MHz.
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

**Measurement Limit:**

Standard	Limit (dBm)
FCC Part 15.247(b)(1)	< 30

**Spot check Measurement Results:**

**For GFSK**

Sample Rate	Channel No.	Frequency (MHz)	Peak Conducted Output Power (dBm)	Conclusion
1Mbps	0	2402	-6.18	P
	19	2440	-5.98	P
	39	2480	-6.25	P
2Mbps	0	2402	-6.87	P
	19	2440	-5.92	P
	39	2480	-6.43	P

**Conclusion: PASS**



**Reference Measurement Results from basic model:  
For GFSK**

Sample Rate	Channel No.	Frequency (MHz)	Peak Conducted Output Power (dBm)	Conclusion
1Mbps	0	2402	-5.21	P
	19	2440	-3.10	P
	39	2480	-4.81	P
2Mbps	0	2402	-5.49	P
	19	2440	-3.36	P
	39	2480	-4.78	P

**Conclusion: PASS**

### A.3. Frequency Band Edges - Conducted

**Method of Measurement: See ANSI C63.10-clause 6.10.4**

Connect the spectrum analyzer to the EUT using an appropriate RF cable connected to the EUT output. Configure the spectrum analyzer settings as described below.

- a) Set Span = 8MHz
- b) Sweep Time: Auto
- c) Set the RBW= 100 kHz
- c) Set the VBW= 300 kHz
- d) Detector: Peak
- e) Trace: Max hold

Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not an absolute field strength measurement; it is only a relative measurement to determine the amount by which the emission drops at the band edge relative to the highest fundamental emission level.

**Measurement Limit:**

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	< -20

**Measurement Result:**

**For GFSK**

Channel No.	Frequency (MHz)	Hopping	Band Edge Power ( dBc)		Conclusion
0	2402	Hopping OFF	Fig.1	-51.78	P
39	2480	Hopping OFF	Fig.2	-51.78	P

**Conclusion: PASS**

Test graphs as below

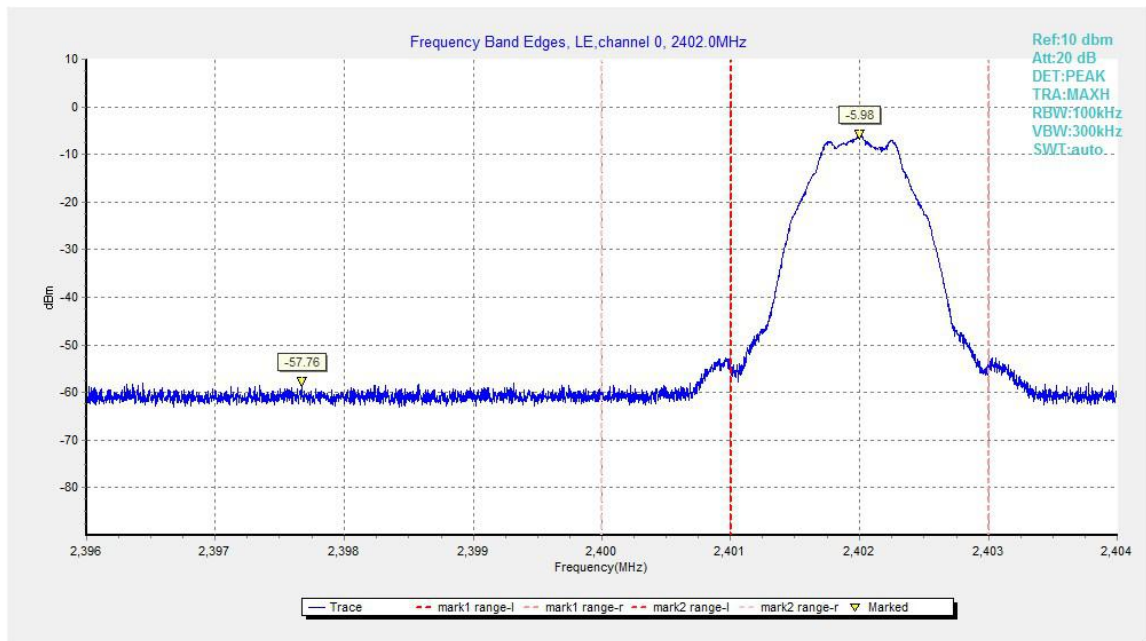


Fig.1. Frequency Band Edges: GFSK, 2402 MHz, Hopping Off

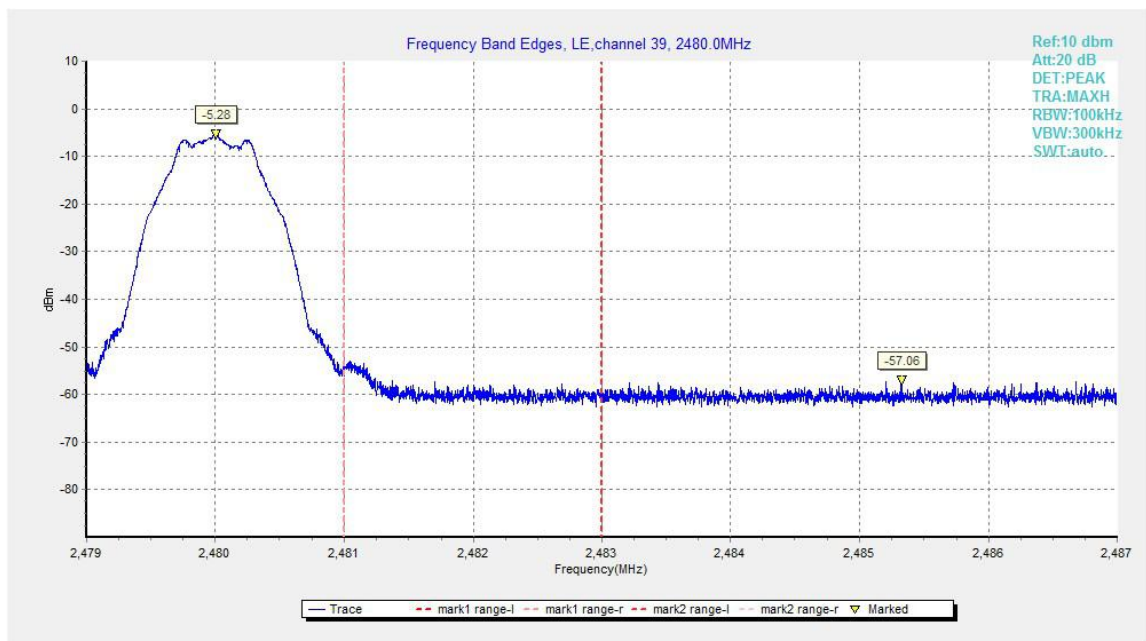


Fig.2. Frequency Band Edges: GFSK, 2480 MHz, Hopping Off

#### A.4. Transmitter Spurious Emission - Conducted

**Method of Measurement: See ANSI C63.10-clause 11.11.2 and clause 11.11.3**

**Measurement Procedure – Reference Level**

1. Set the RBW = 100 kHz.
2. Set the VBW = 300 kHz.
3. Set the span to  $\geq 1.5$  times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum PSD level. Next, determine the power in 100 kHz band segments outside of the authorized frequency band using the following measurement:

**Measurement Procedure - Unwanted Emissions**

1. Set RBW = 100 kHz.
  2. Set VBW = 300 kHz.
  3. Set span to encompass the spectrum to be examined.
  4. Detector = peak.
  5. Trace Mode = max hold.
  6. Sweep = auto couple.
  7. Allow the trace to stabilize (this may take some time, depending on the extent of the span).
- Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified above.

**Measurement Limit:**

Standard	Limit
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz bandwidth

**Measurement Results:**  
**For GFSK**

Channel No.	Frequency (MHz)	Frequency Range	Test Results	Conclusion
0	2402	Center Frequency	Fig.3	P
		30 MHz ~ 1 GHz	Fig.4	P
		1 GHz ~ 3 GHz	Fig.5	P
		3 GHz ~ 10 GHz	Fig.6	P
		10GHz ~ 26 GHz	Fig.7	P
19	2440	Center Frequency	Fig.8	P
		30 MHz ~ 1 GHz	Fig.9	P
		1 GHz ~ 3 GHz	Fig.10	P
		3 GHz ~ 10 GHz	Fig.11	P
		10GHz ~ 26 GHz	Fig.12	P
39	2480	Center Frequency	Fig.13	P
		30 MHz ~ 1 GHz	Fig.14	P
		1 GHz ~ 3GHz	Fig.15	P
		3 GHz ~ 10 GHz	Fig.16	P
		10 GHz ~ 26 GHz	Fig.17	P

**Conclusion: PASS**

**Test graphs as below**

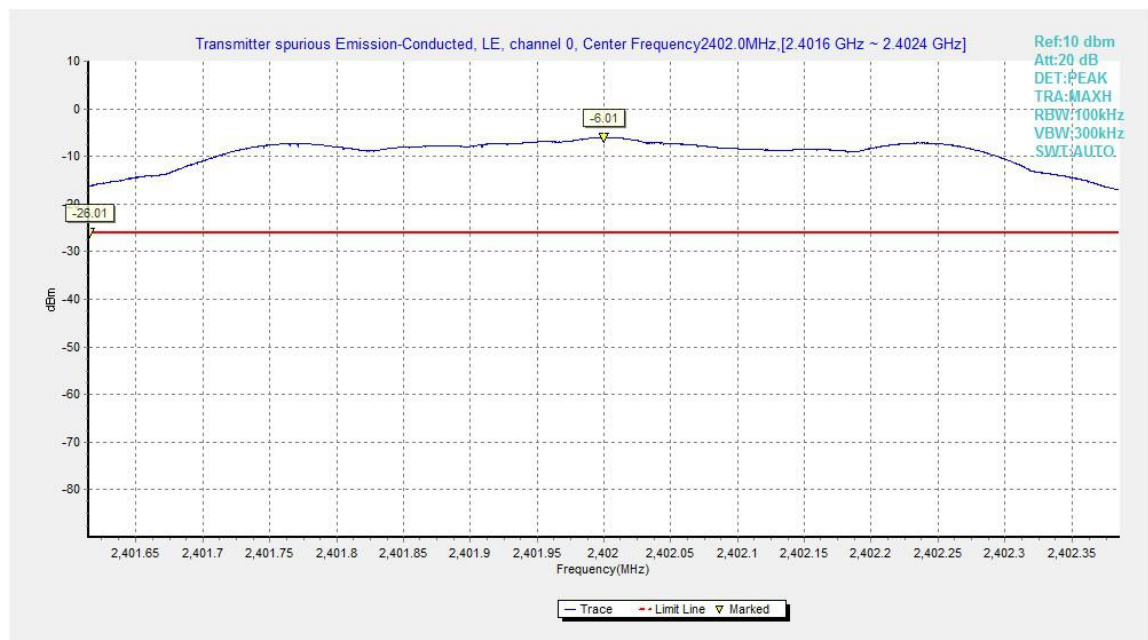


Fig.3. Transmitter Spurious Emission - Conducted: GFSK, 2402MHz

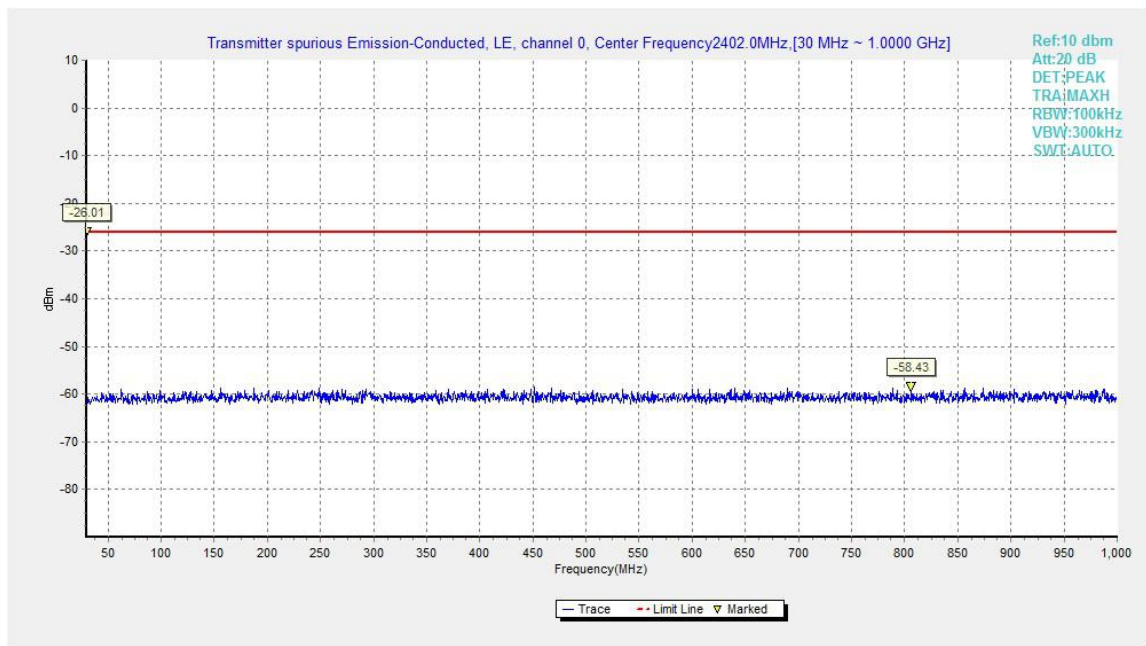


Fig.4. Transmitter Spurious Emission - Conducted: GFSK, 2402 MHz, 30MHz - 1GHz

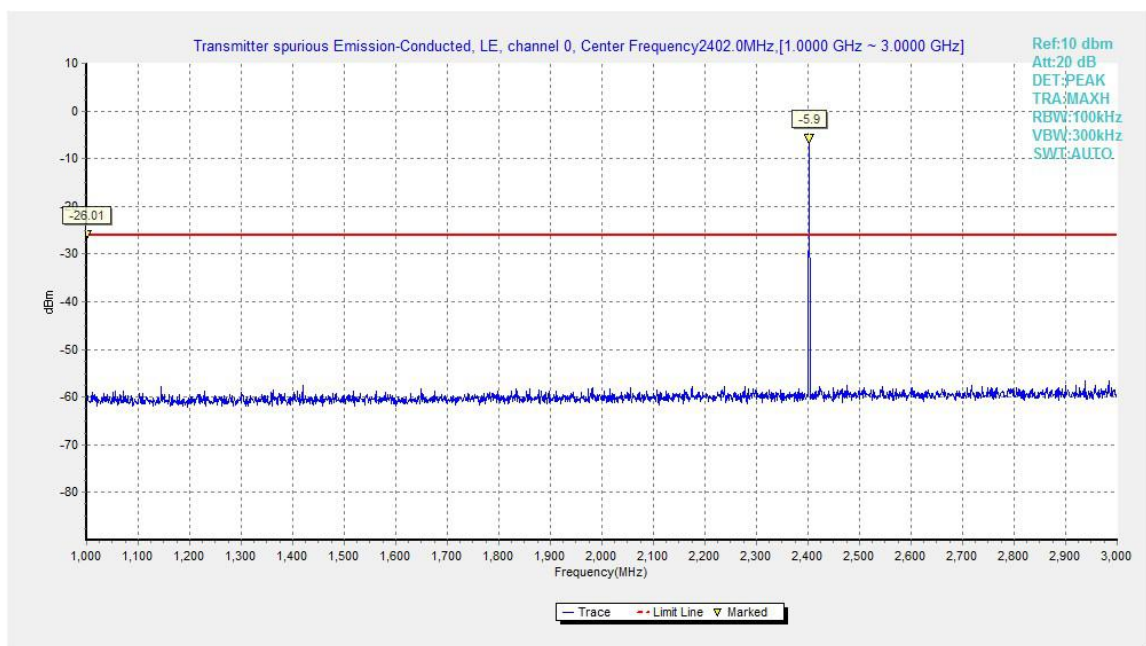


Fig.5. Transmitter Spurious Emission - Conducted: GFSK, 2402 MHz, 1GHz - 3GHz

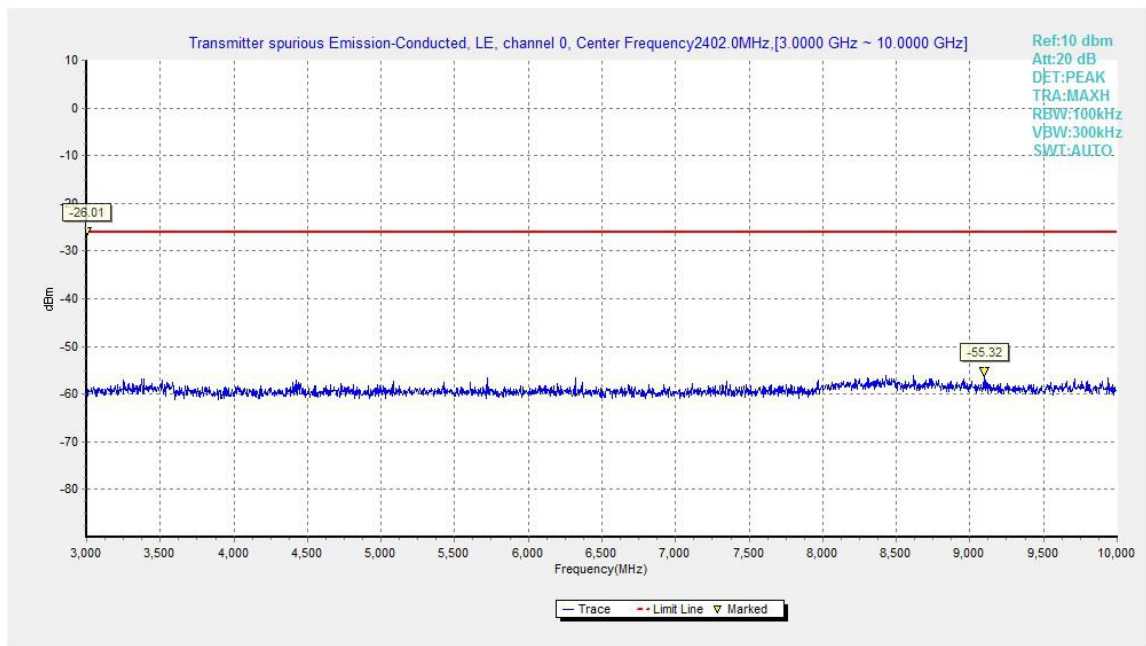


Fig.6. Transmitter Spurious Emission - Conducted: GFSK, 2402 MHz, 3GHz - 10GHz

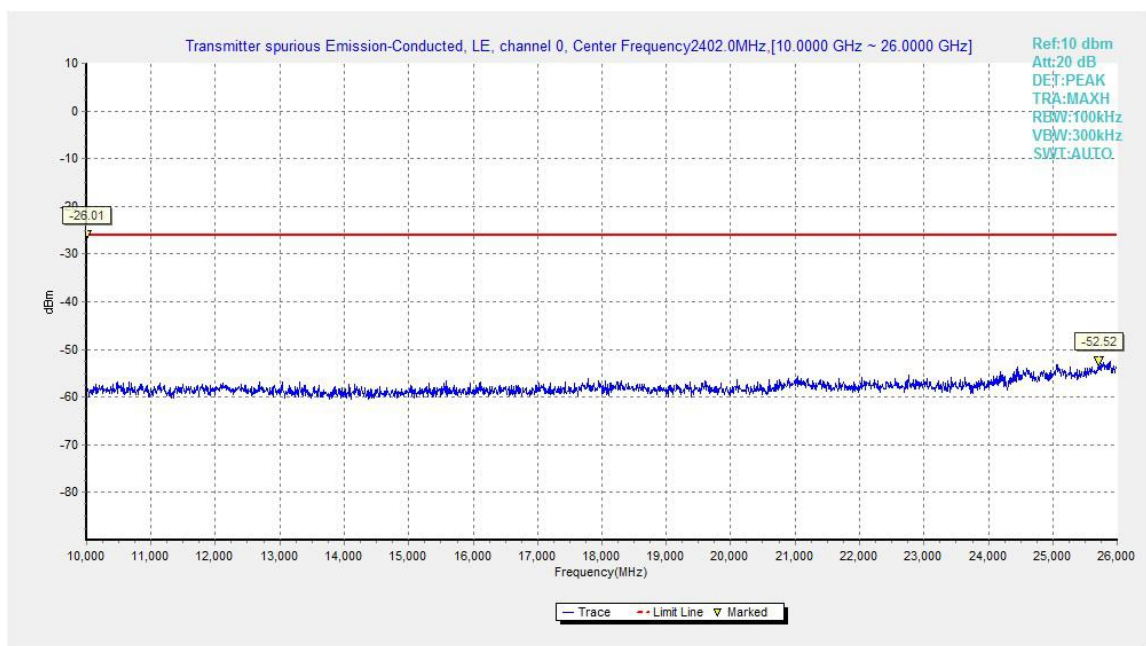


Fig.7. Transmitter Spurious Emission - Conducted: GFSK, 2402 MHz, 10GHz - 26GHz



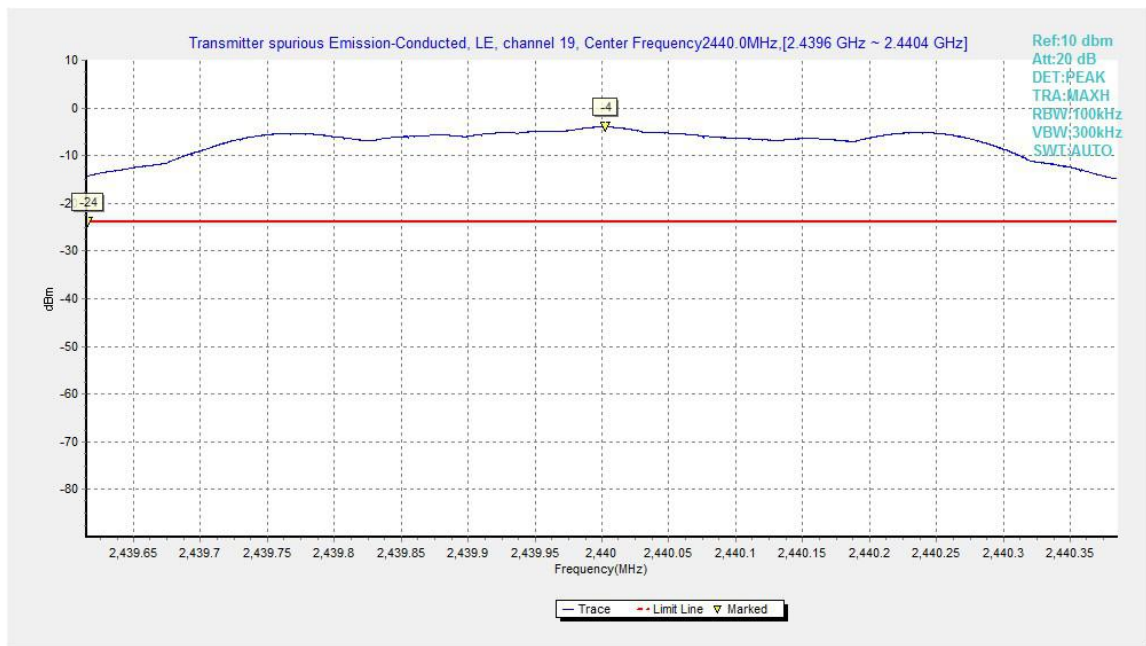


Fig.8. Transmitter Spurious Emission - Conducted: GFSK, 2440MHz

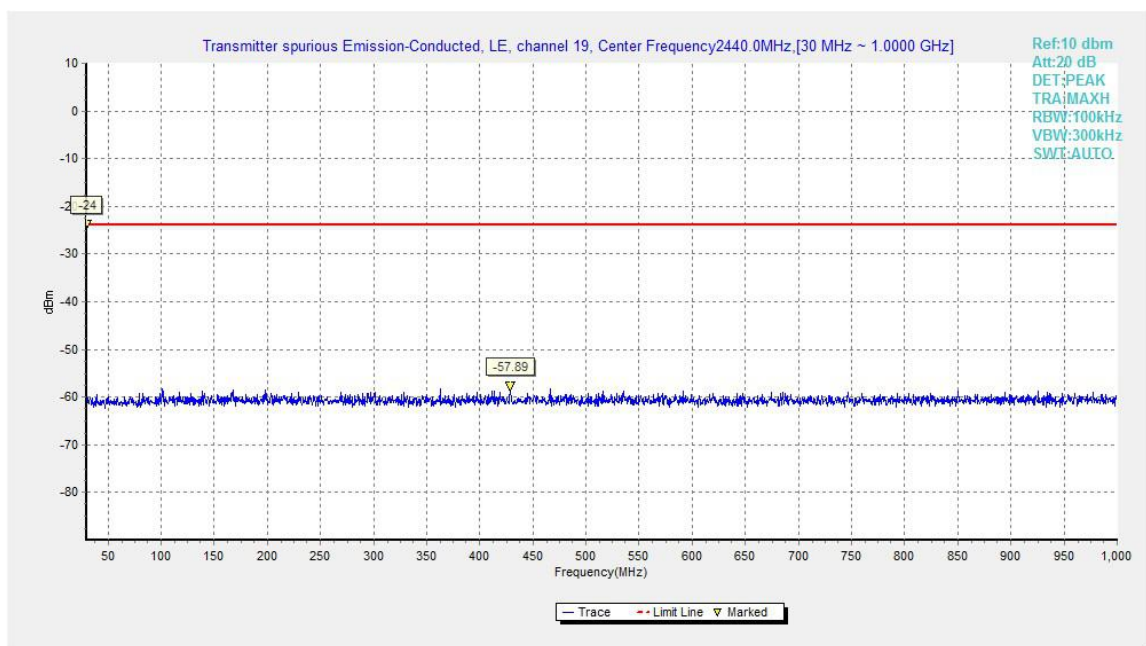


Fig.9. Transmitter Spurious Emission - Conducted: GFSK, 2440 MHz, 30MHz - 1GHz



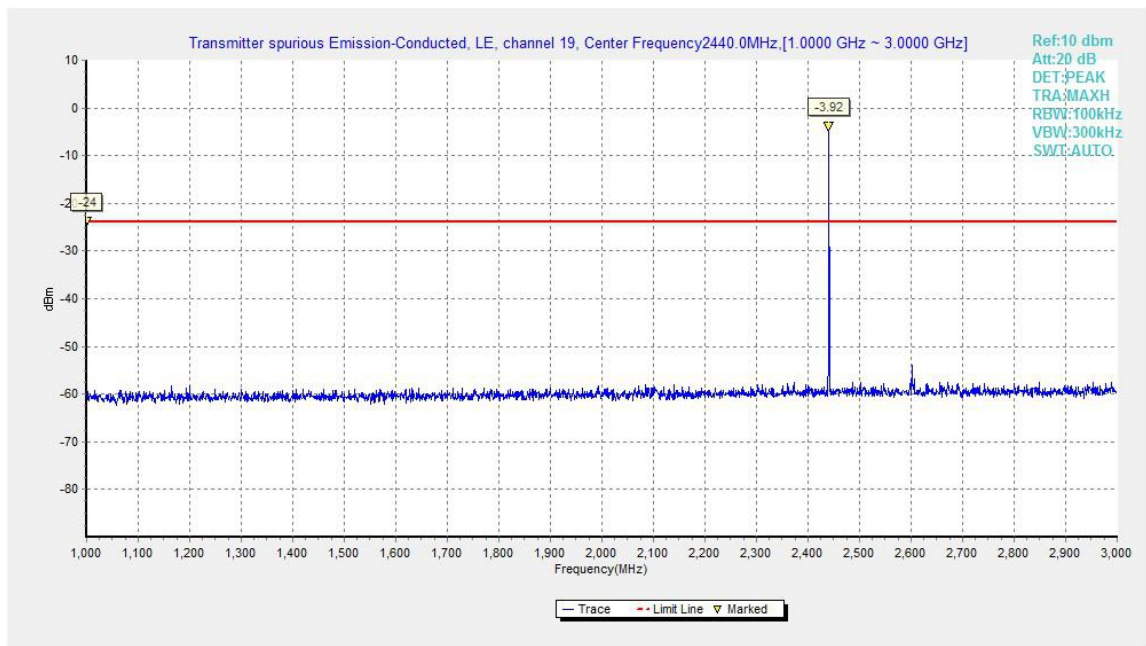


Fig.10. Transmitter Spurious Emission - Conducted: GFSK, 2440 MHz, 1GHz – 3GHz

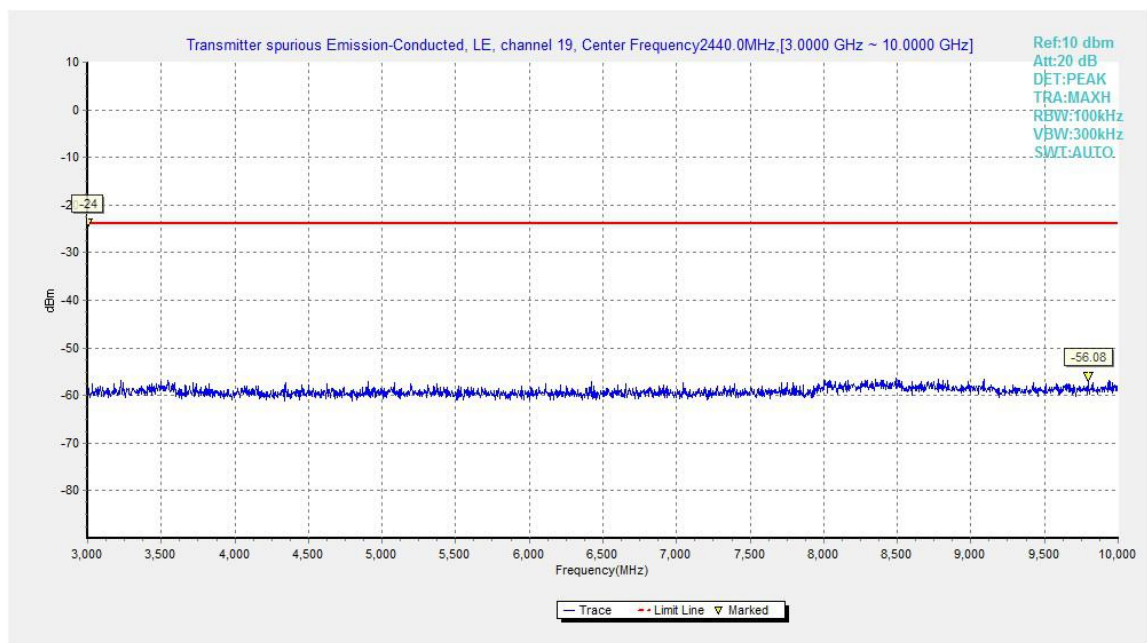


Fig.11. Transmitter Spurious Emission - Conducted: GFSK, 2440 MHz, 3GHz – 10GHz

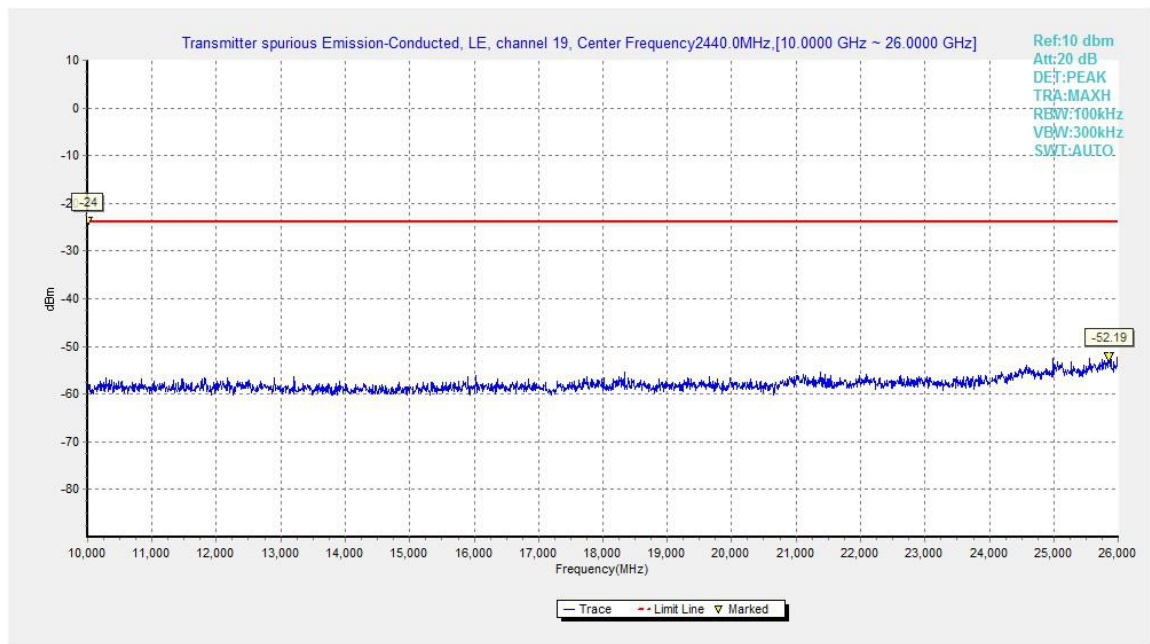


Fig.12. Transmitter Spurious Emission - Conducted: GFSK, 2440 MHz, 10GHz – 26GHz

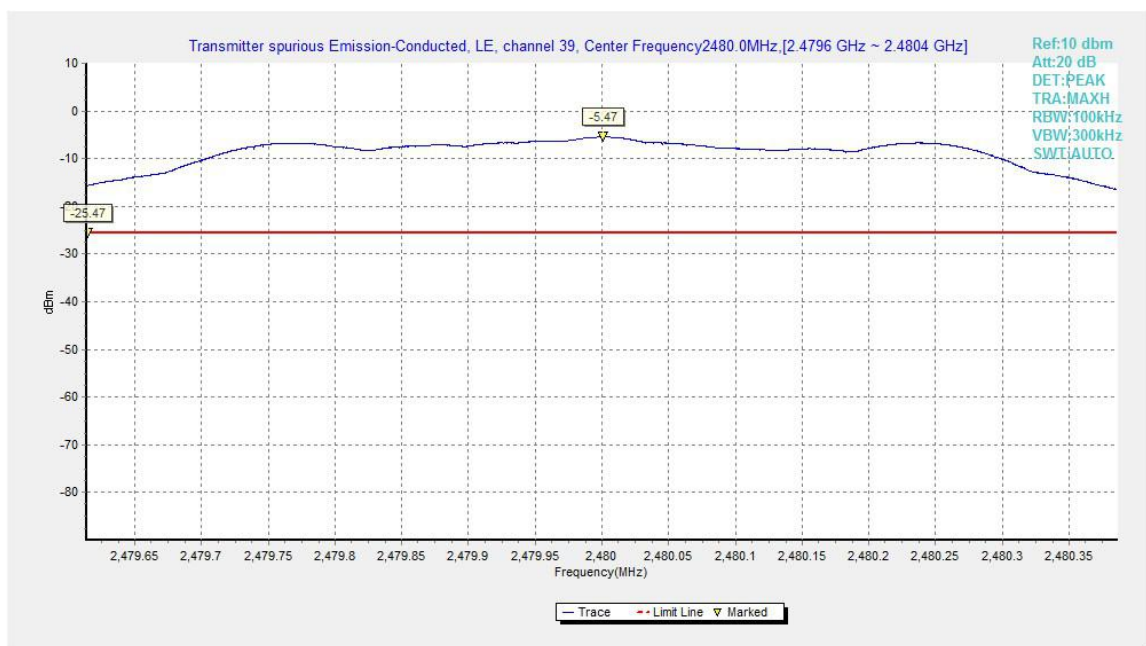


Fig.13. Transmitter Spurious Emission - Conducted: GFSK, 2480 MHz

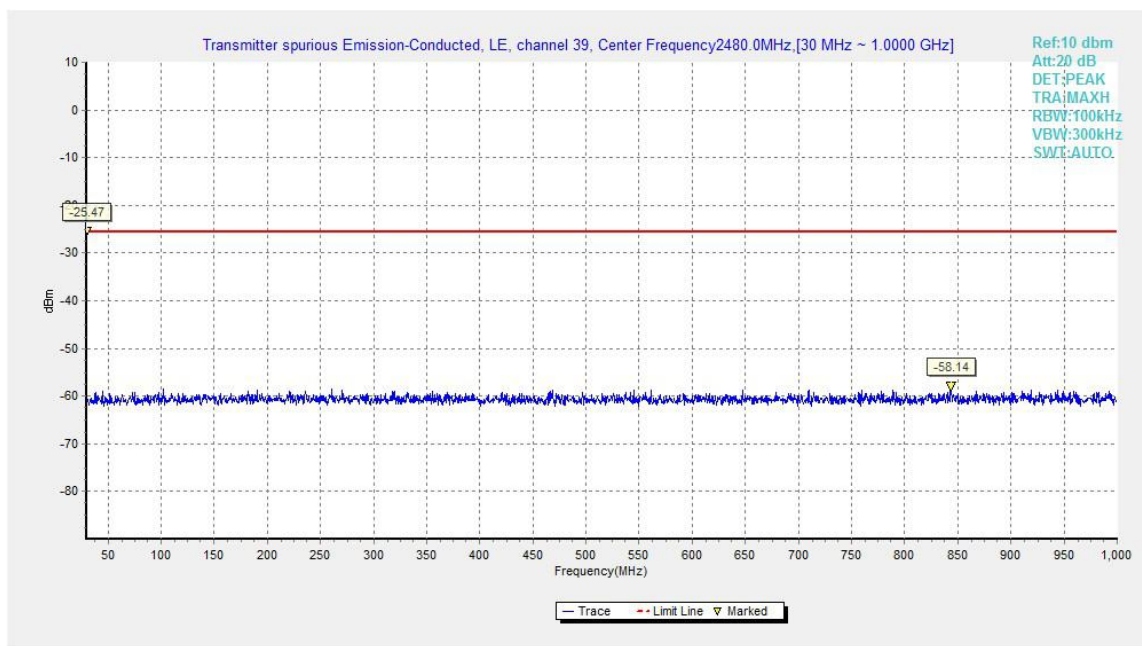


Fig.14. Transmitter Spurious Emission - Conducted: GFSK, 2480 MHz, 30MHz - 1GHz

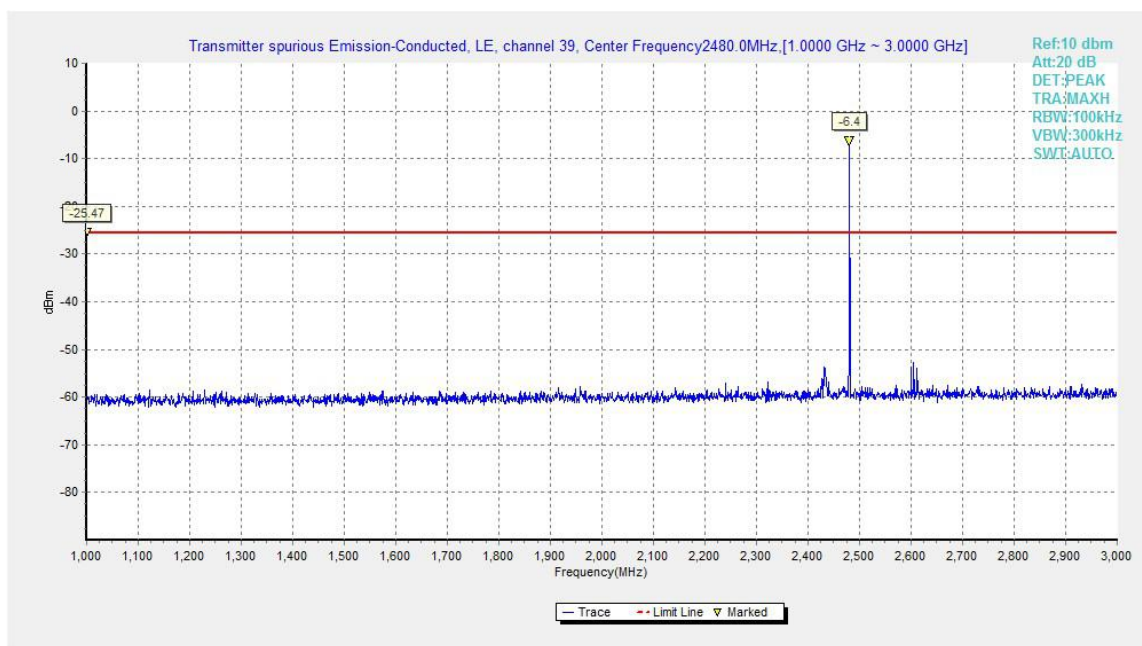


Fig.15. Transmitter Spurious Emission - Conducted: GFSK, 2480 MHz, 1GHz - 3GHz

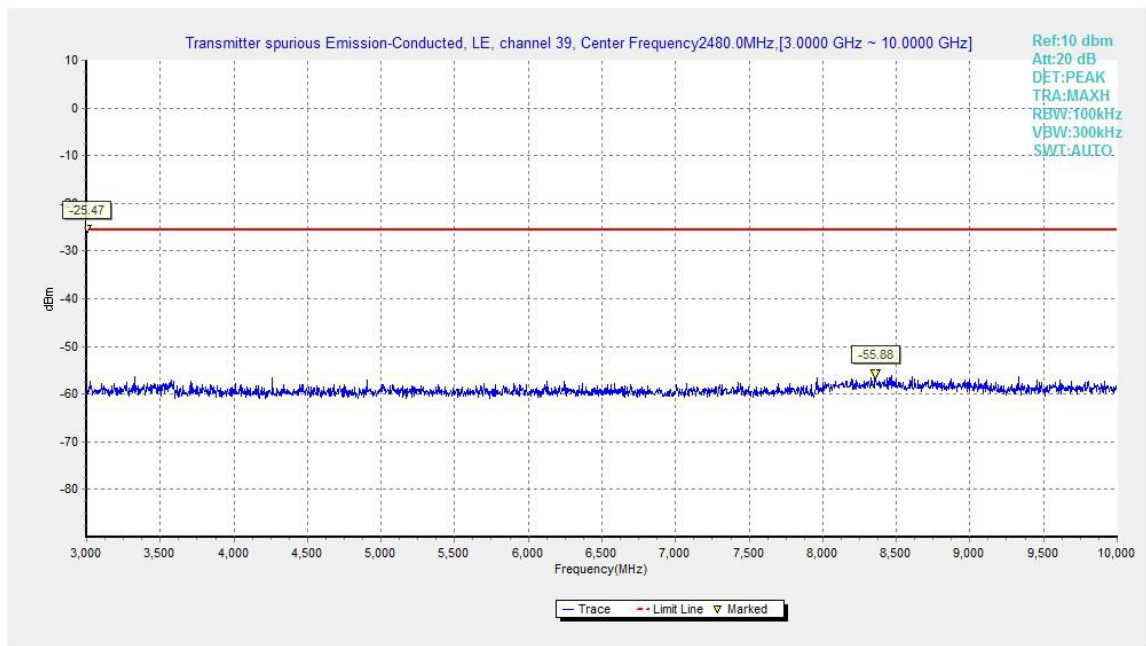


Fig.16. Transmitter Spurious Emission - Conducted: GFSK, 2480 MHz, 3GHz - 10GHz

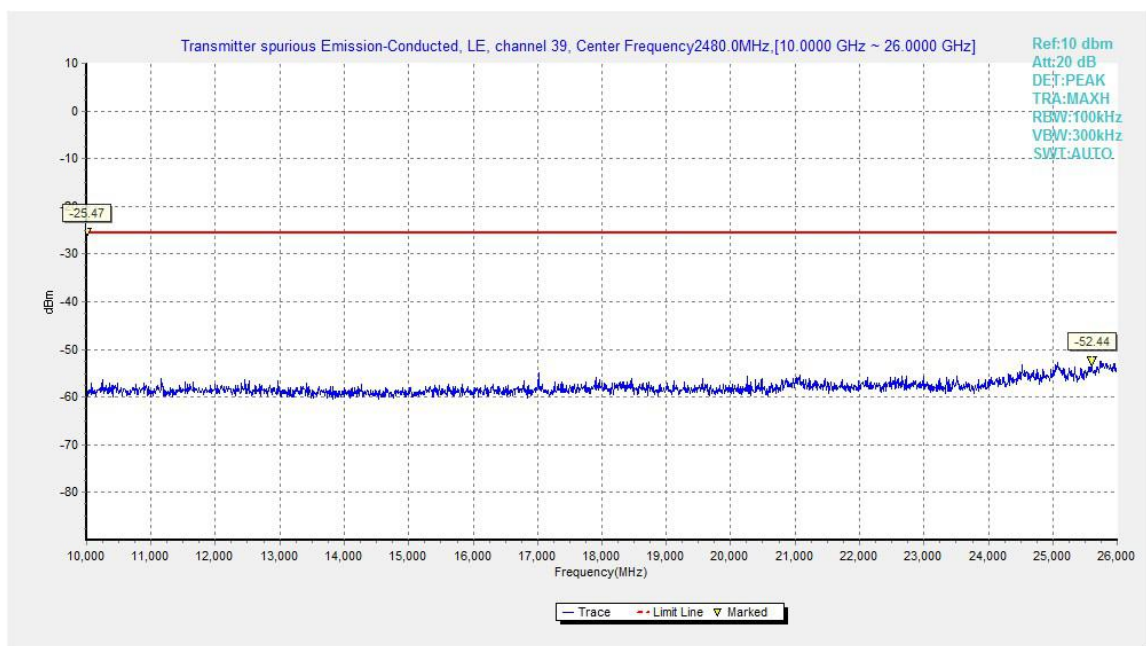


Fig.17. Transmitter Spurious Emission - Conducted: GFSK, 2480 MHz, 10GHz - 26GHz

## A.5. Transmitter Spurious Emission - Radiated

### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

The measurement is made according to ANSI C63.10

### Limit in restricted band:

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

### Test Condition

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/3MHz	15
4000-18000	1MHz/3MHz	40
18000-26500	1MHz/3MHz	20

### Measurement Results:

A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}}$$

### For GFSK

Frequency	Frequency Range	Test Results	Conclusion
Power	2.31GHz~2.4GHz---L	Fig.18	P
Power	2.45GHz~2.5GHz---H	Fig.19	P



**GFSK 2402MHz–Average**

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2383.600	46.43	2.9	32.0	11.62	54.0	7.6	H	155	6
2389.700	46.48	2.9	32.0	11.65	54.0	7.5	H	155	48
4804.500	33.20	-35.0	34.1	34.14	54.0	20.8	H	155	92
7206.000	37.11	-32.4	35.8	33.70	54.0	16.9	H	155	48
9607.500	40.91	-29.7	36.7	33.85	54.0	13.1	H	155	68
12010.500	42.19	-30.5	38.9	33.78	54.0	11.8	H	155	92

**GFSK 2440MHz–Average**

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2436.500	46.38	2.9	32.0	11.50	54.0	7.6	H	155	8
2442.700	46.58	2.9	32.0	11.70	54.0	7.4	H	155	28
4882.500	32.78	-35.5	34.1	34.23	54.0	21.2	H	155	119
7323.000	38.24	-31.3	35.8	33.75	54.0	15.8	H	155	146
9763.500	39.19	-31.4	36.9	33.67	54.0	14.8	H	155	76
12205.500	44.09	-28.9	39.0	33.96	54.0	9.9	H	155	94

**GFSK 2480MHz–Average**

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2490.000	46.52	2.9	32.0	11.59	54.0	7.5	H	155	5
2498.800	46.51	2.9	32.0	11.57	54.0	7.5	H	155	25
4960.500	33.64	-34.9	34.1	34.42	54.0	20.4	H	155	356
7440.000	37.48	-32.2	35.8	33.85	54.0	16.5	H	155	350
9919.500	41.30	-29.6	37.1	33.84	54.0	12.7	H	155	185
12400.500	43.38	-30.0	39.1	34.35	54.0	10.6	H	155	187

**GFSK 2402MHz–Peak**

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2349.424	60.27	2.8	31.9	25.49	74.0	13.7	H	155	0
2380.350	60.35	2.9	32.0	25.54	74.0	13.6	H	155	44
4804.000	38.59	-35.0	34.1	39.53	74.0	35.4	V	155	88
7206.000	42.46	-32.4	35.8	39.05	74.0	31.5	V	155	44
9608.000	44.82	-29.7	36.7	37.75	74.0	29.2	V	155	66
12010.000	44.98	-30.5	38.9	36.57	74.0	29.0	H	155	88

**GFSK 2440MHz–Peak**

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2339.400	46.98	-27.7	31.9	42.71	74.0	27.0	H	155	0
2539.600	47.30	-26.8	32.1	42.06	74.0	26.7	H	155	22
4882.000	37.77	-35.5	34.1	39.21	74.0	36.2	H	155	110
7323.000	43.07	-31.3	35.8	38.58	74.0	30.9	V	155	132
9764.000	44.79	-31.4	36.9	39.28	74.0	29.2	V	155	66
12205.000	47.47	-28.8	39.0	37.33	74.0	26.5	V	155	88

**GFSK 2480MHz–Peak**

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2485.580	60.68	2.9	32.0	25.75	74.0	13.3	H	155	0
2487.190	60.81	2.9	32.0	25.88	74.0	13.2	H	155	22
4960.000	39.07	-34.9	34.1	39.86	74.0	34.9	H	155	352
7440.000	42.96	-32.2	35.8	39.34	74.0	31.0	V	155	352
9920.000	46.11	-29.7	37.1	38.66	74.0	27.9	V	155	176
12400.000	45.87	-30.0	39.1	36.85	74.0	28.1	V	155	176

**Conclusion: PASS**

Test graphs as below:

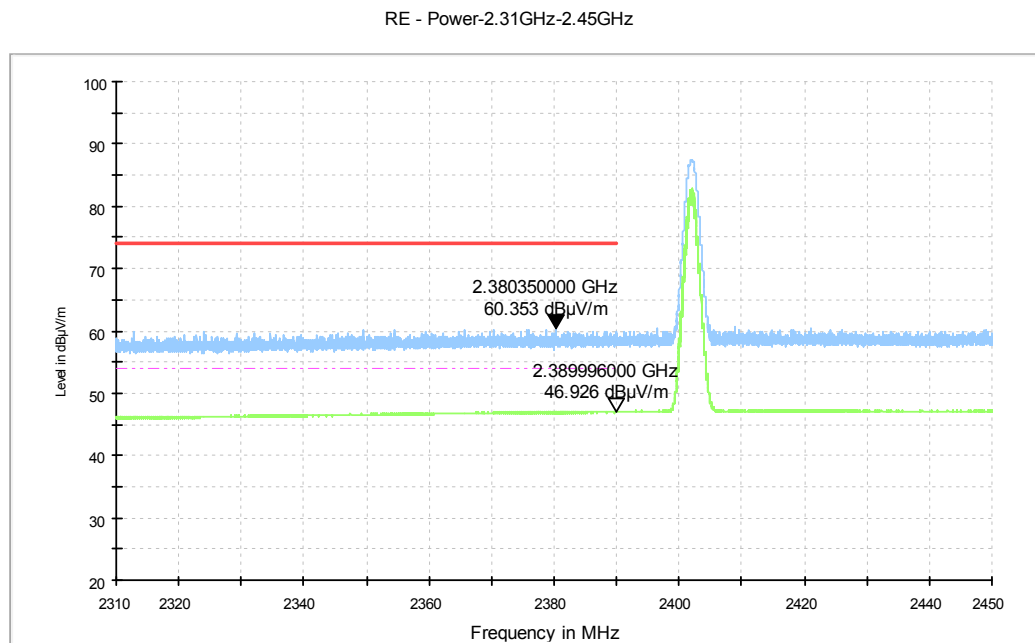


Fig.18. Transmitter Spurious Emission - Radiated (Power): GFSK low channel

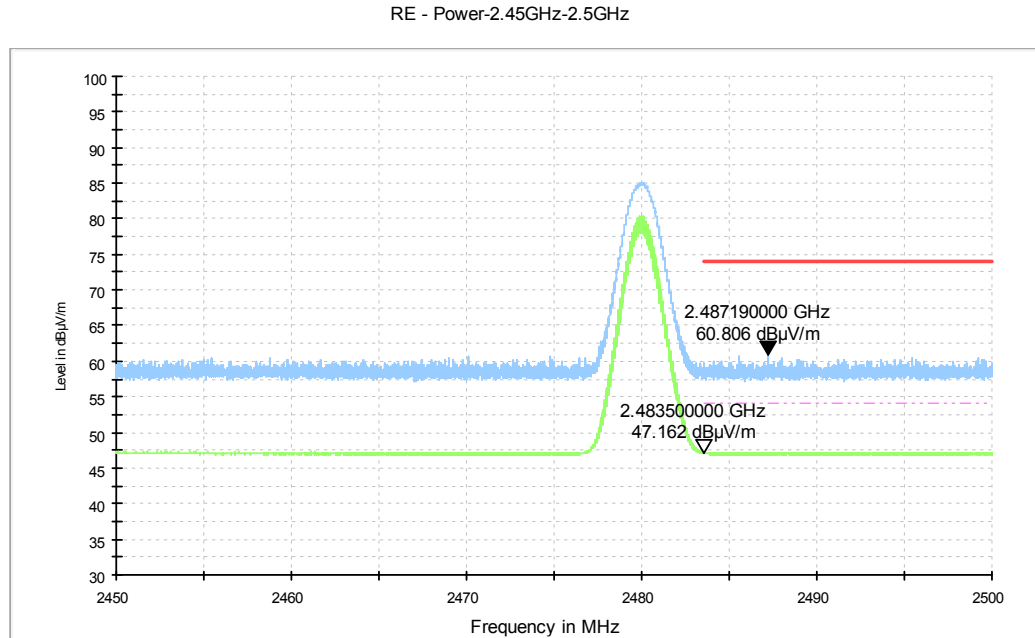


Fig.19. Transmitter Spurious Emission - Radiated (Power): GFSK high channel



## A.6. 6dB Bandwidth

### Method of Measurement:

The measurement is made according to ANSI C63.10 clause 11.8.1

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) = 300 kHz.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a)(2)	$\geq 500\text{KHz}$

### Measurement Results:

#### For GFSK

Channel No.	Frequency (MHz)	6dB Bandwidth (kHz)		Conclusion
0	2402	Fig.20	646.50	P
19	2440	Fig.21	645.50	P
39	2480	Fig.22	646.00	P

**Conclusion: PASS**

**Test graphs as below:**



Fig.20. 6dB Bandwidth: GFSK, 2402 MHz



Fig.21. 6dB Bandwidth: GFSK, 2440 MHz



Fig.22. 6dB Bandwidth: GFSK, 2480 MHz

## A.7. Maximum Power Spectral Density Level

### Method of Measurement:

The measurement is made according to ANSI C63.10 clause 11.10.2

1. Set the RBW = 3 kHz.
2. Set the VBW = 10 kHz.
3. Set the span to 2 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level within the RBW.

### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(e)	$\leq 8.0 \text{ dBm/3kHz}$

### Measurement Results:

#### For GFSK

Channel No.	Frequency (MHz)	Maximum Power Spectral Density Level(dBm/3kHz)		Conclusion
0	2402	Fig.23	-20.40	P
19	2440	Fig.24	-18.49	P
39	2480	Fig.25	-19.87	P

Test graphs as below:

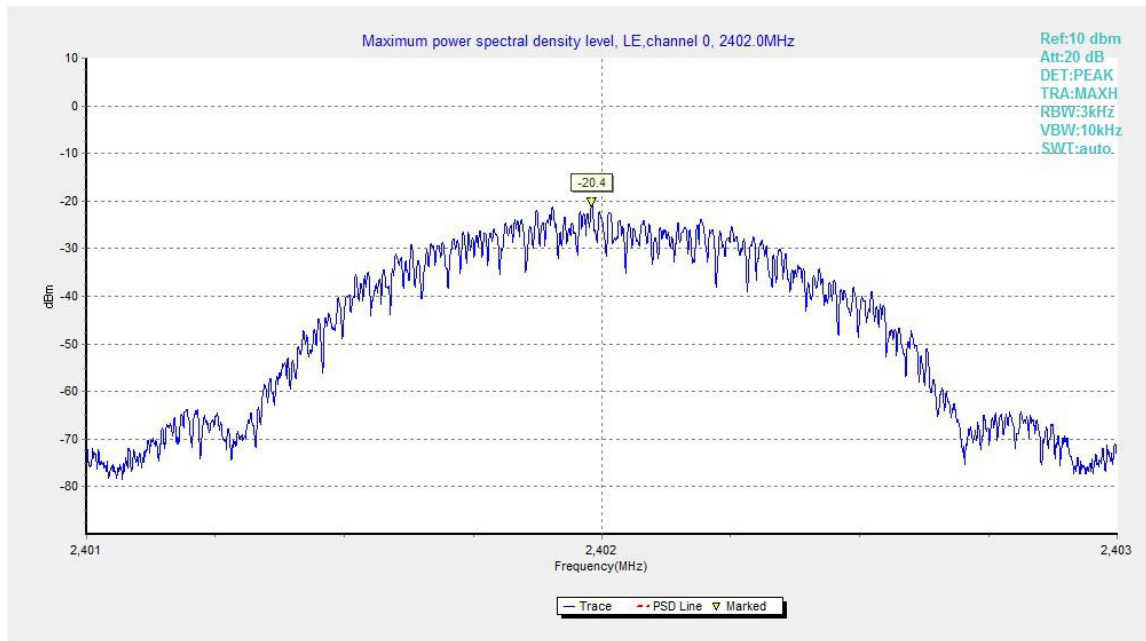


Fig.23. Maximum Power Spectral Density Level Function: GFSK, 2402 MHz

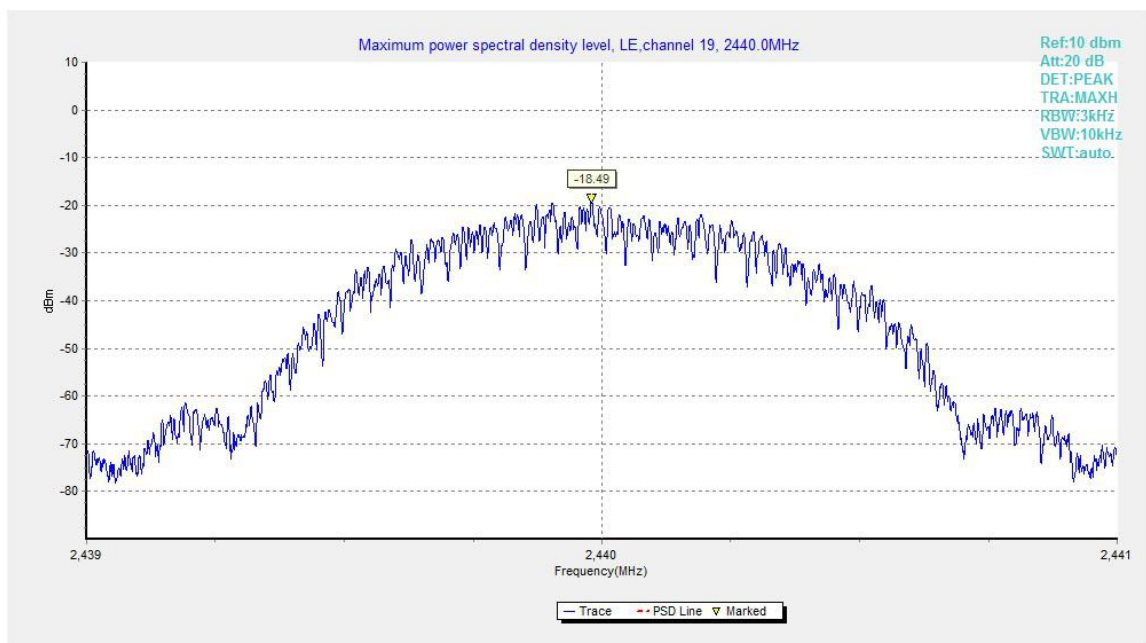


Fig.24. Maximum Power Spectral Density Level Function: GFSK, 2440 MHz

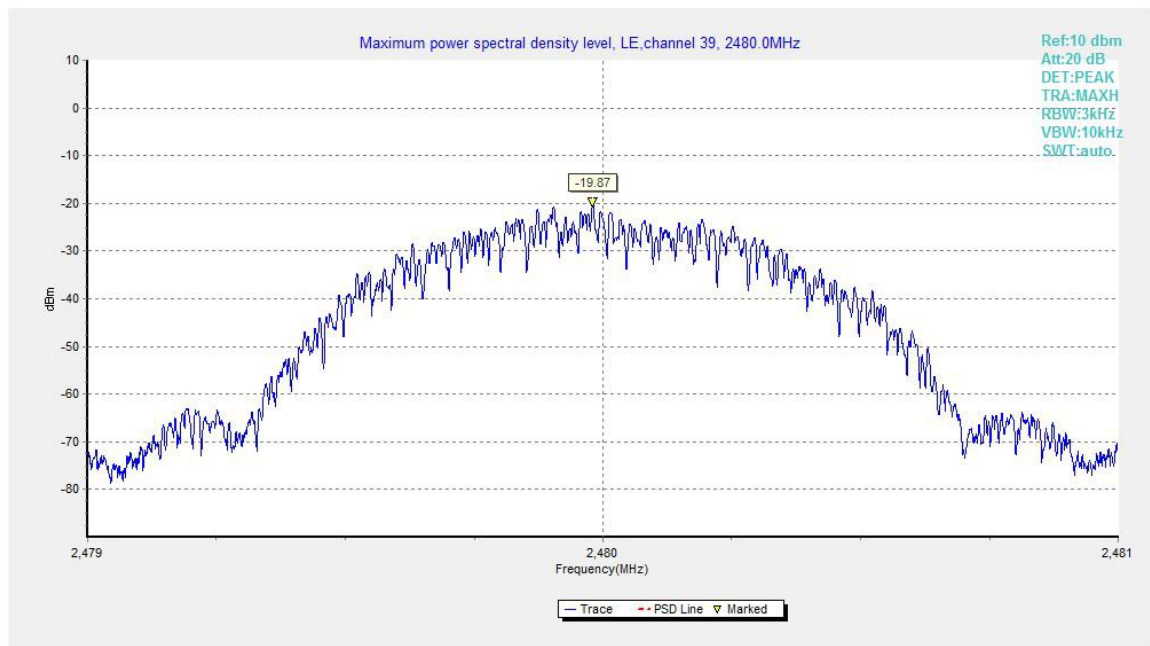


Fig.25. Maximum Power Spectral Density Level Function: GFSK, 2480 MHz

## A.8. AC Powerline Conducted Emission

### Method of Measurement: See ANSI C63.10-clause 6.2

1. the one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT.
2. If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed.
3. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation.
4. If the EUT is comprised of equipment units that have their own separate ac power connections, e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network, each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be separately measured. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.
5. If the EUT uses a detachable antenna, these measurements shall be made with a suitable dummy load connected to the antenna output terminals; otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended. When measuring the ac conducted emissions from a device that operates between 150 kHz and 30 MHz a non-detachable antenna may be replaced with a dummy load for the measurements within the fundamental emission band of the transmitter, but only for those measurements.<sup>36</sup> Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprises the EUT over the frequency range specified by the procuring or regulatory agency. Diagram or photograph the test setup that was used. See Clause 8 for full reporting requirements.

### Test Condition

Voltage (V)	Frequency (Hz)
120	60

### Measurement Result and limit:

#### Bluetooth (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB $\mu$ V)	Conclusion
0.15 to 0.5	66 to 56	P
0.5 to 5	56	
5 to 30	60	

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

**Bluetooth (Average Limit)**

Frequency range (MHz)	Average Limit (dBμV)	Conclusion
0.15 to 0.5	56 to 46	P
0.5 to 5	46	
5 to 30	50	
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.		


The measurement is made according to ANSI C63.10

**Conclusion: PASS**

**Test graphs as below:**



### Traffic (With AE3):

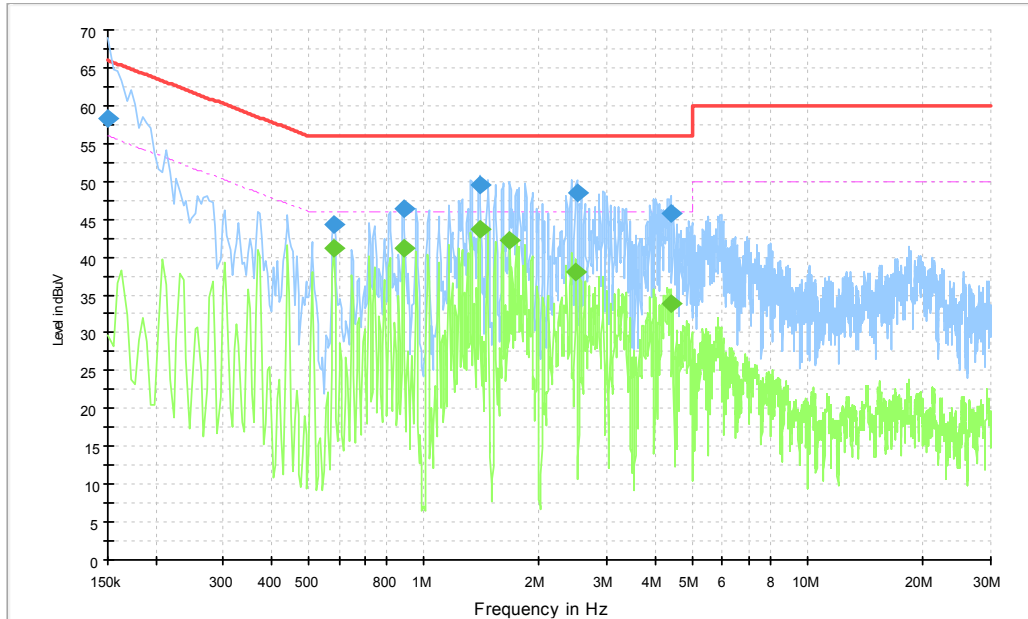

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

### Final Result 1


Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth h	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	58.2	10000.0	9.000	On	N	28.9	7.8	66.0
0.582000	44.2	10000.0	9.000	On	L1	20.0	11.8	56.0
0.883500	46.4	10000.0	9.000	On	L1	19.9	9.6	56.0
1.396500	49.6	10000.0	9.000	On	L1	19.8	6.4	56.0
2.499000	48.4	10000.0	9.000	On	L1	19.8	7.6	56.0
4.402500	45.7	10000.0	9.000	On	L1	19.8	10.3	56.0

### Final Result 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth h	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.582000	41.1	10000.0	9.000	On	L1	20.0	4.9	46.0
0.883500	41.1	10000.0	9.000	On	L1	19.9	4.9	46.0
1.396500	43.6	10000.0	9.000	On	L1	19.8	2.4	46.0
1.675500	42.2	10000.0	9.000	On	L1	19.8	3.8	46.0
2.490000	38.1	10000.0	9.000	On	L1	19.8	7.9	46.0
4.402500	34.0	10000.0	9.000	On	L1	19.8	12.0	46.0

Note: The measurement results showed here are worst cases of the combinations of different USB cables.

### Idle (With AE3):

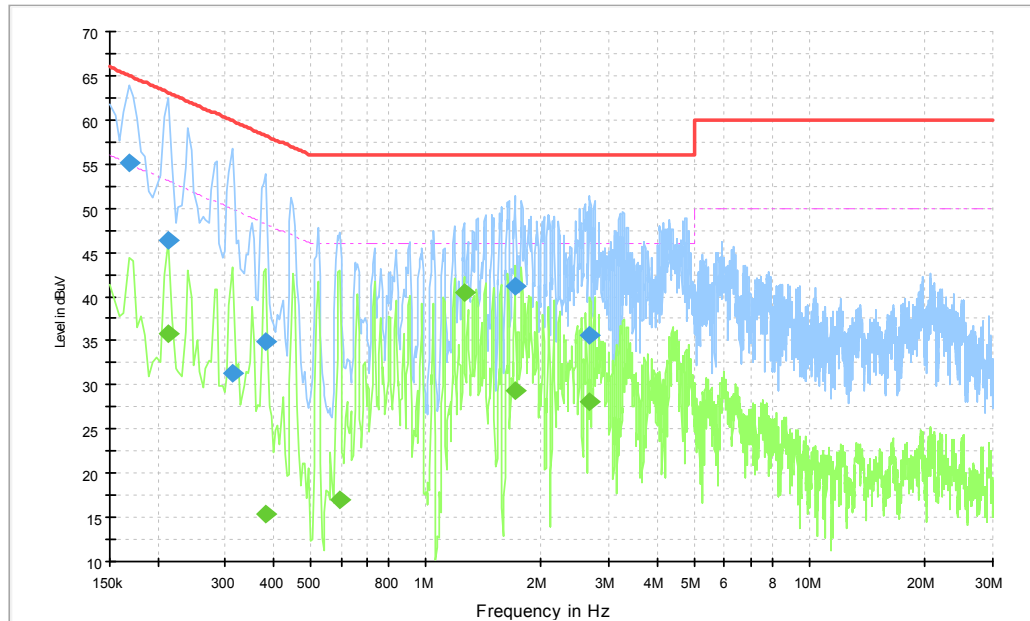

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

### Final Result 1


Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth h	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.168000	55.2	10000.0	9.000	On	N	25.4	9.8	65.1
0.213000	46.4	10000.0	9.000	On	N	19.9	16.7	63.1
0.312000	31.3	10000.0	9.000	On	L1	20.0	28.6	59.9
0.384000	34.9	10000.0	9.000	On	N	20.0	23.3	58.2
1.707000	41.2	10000.0	9.000	On	L1	19.8	14.8	56.0
2.674500	35.7	10000.0	9.000	On	L1	19.8	20.3	56.0

### Final Result 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth h	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.213000	35.8	10000.0	9.000	On	L1	19.9	17.3	53.1
0.384000	15.3	10000.0	9.000	On	L1	20.0	32.9	48.2
0.595500	17.0	10000.0	9.000	On	L1	20.0	29.0	46.0
1.257000	40.5	10000.0	9.000	On	L1	19.8	5.5	46.0
1.707000	29.4	10000.0	9.000	On	L1	19.8	16.6	46.0
2.679000	28.0	10000.0	9.000	On	L1	19.8	18.0	46.0

Note: The measurement results showed here are worst cases of the combinations of different USB cables.

### Traffic (With AE4):

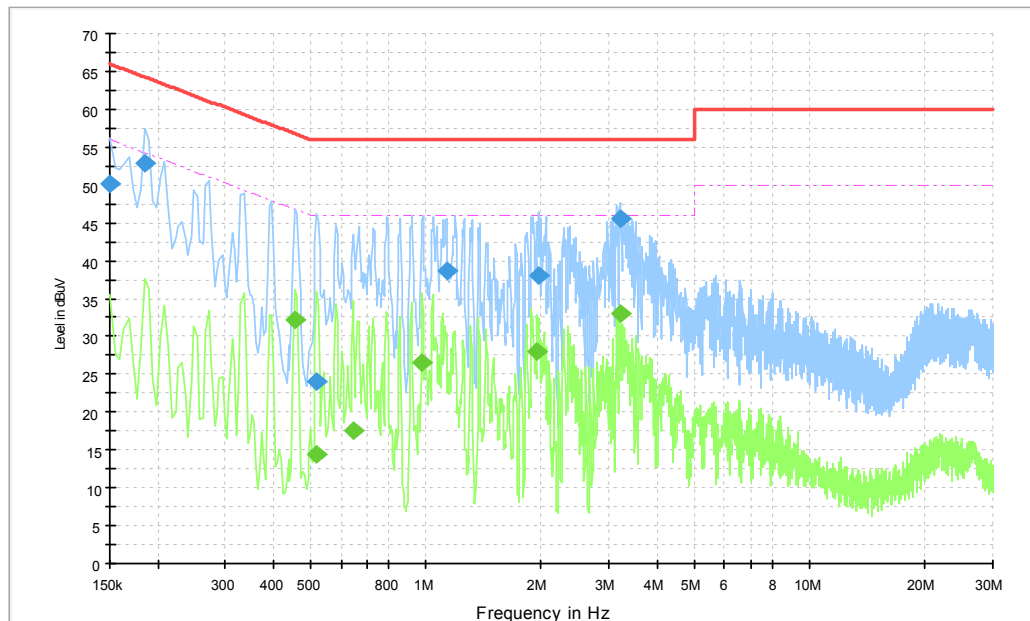

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

### Final Result 1


Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth h	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	50.1	10000.0	9.000	On	L1	28.9	15.9	66.0
0.186000	52.8	10000.0	9.000	On	L1	22.2	11.4	64.2
0.519000	24.1	10000.0	9.000	On	L1	20.0	31.9	56.0
1.131000	38.8	10000.0	9.000	On	N	19.8	17.2	56.0
1.968000	38.0	10000.0	9.000	On	L1	19.8	18.0	56.0
3.196500	45.6	10000.0	9.000	On	L1	19.8	10.4	56.0

### Final Result 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth h	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.456000	32.2	10000.0	9.000	On	L1	20.0	14.5	46.8
0.519000	14.3	10000.0	9.000	On	L1	20.0	31.7	46.0
0.645000	17.5	10000.0	9.000	On	L1	19.9	28.5	46.0
0.978000	26.6	10000.0	9.000	On	L1	19.9	19.4	46.0
1.950000	28.1	10000.0	9.000	On	L1	19.8	17.9	46.0
3.196500	33.0	10000.0	9.000	On	L1	19.8	13.0	46.0

Note: The measurement results showed here are worst cases of the combinations of different USB cables.

### Traffic (With AE5):

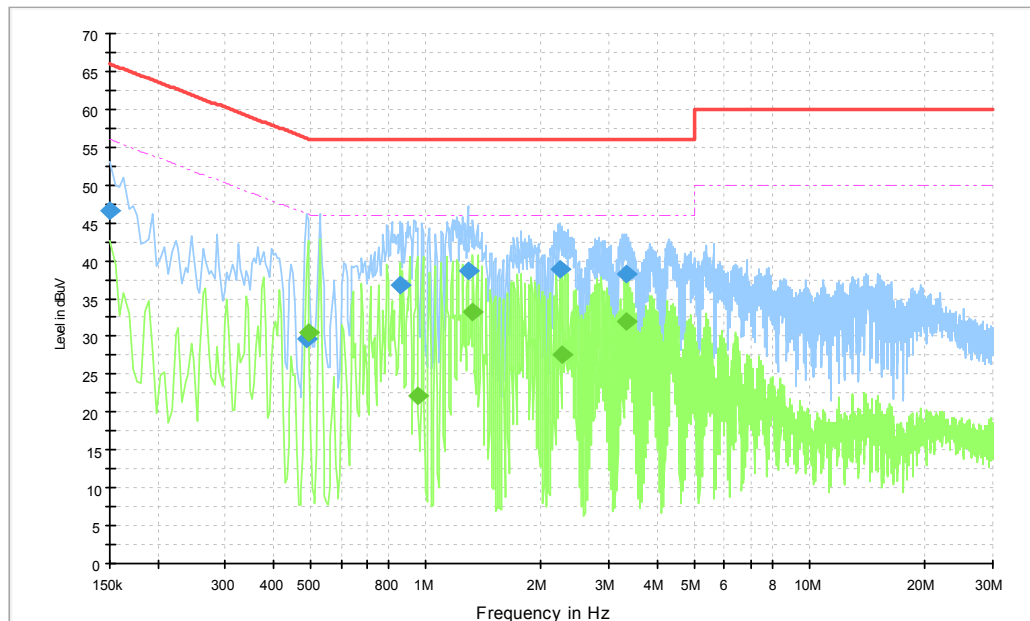

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

### Final Result 1


Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth h	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	46.7	10000.0	9.000	On	N	28.9	19.3	66.0
0.487500	29.8	10000.0	9.000	On	L1	20.0	26.4	56.2
0.856500	36.8	10000.0	9.000	On	L1	19.9	19.2	56.0
1.284000	38.7	10000.0	9.000	On	N	19.8	17.3	56.0
2.229000	38.8	10000.0	9.000	On	N	19.8	17.2	56.0
3.322500	38.3	10000.0	9.000	On	N	19.8	17.7	56.0

### Final Result 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth h	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.492000	30.5	10000.0	9.000	On	L1	20.0	15.6	46.1
0.946500	22.1	10000.0	9.000	On	N	19.9	23.9	46.0
1.324500	33.3	10000.0	9.000	On	N	19.8	12.7	46.0
2.269500	27.7	10000.0	9.000	On	N	19.8	18.3	46.0
3.327000	32.0	10000.0	9.000	On	N	19.8	14.0	46.0
0.492000	30.5	10000.0	9.000	On	L1	20.0	15.6	46.1

Note: The measurement results showed here are worst cases of the combinations of different USB cables.

### Traffic (With AE6):

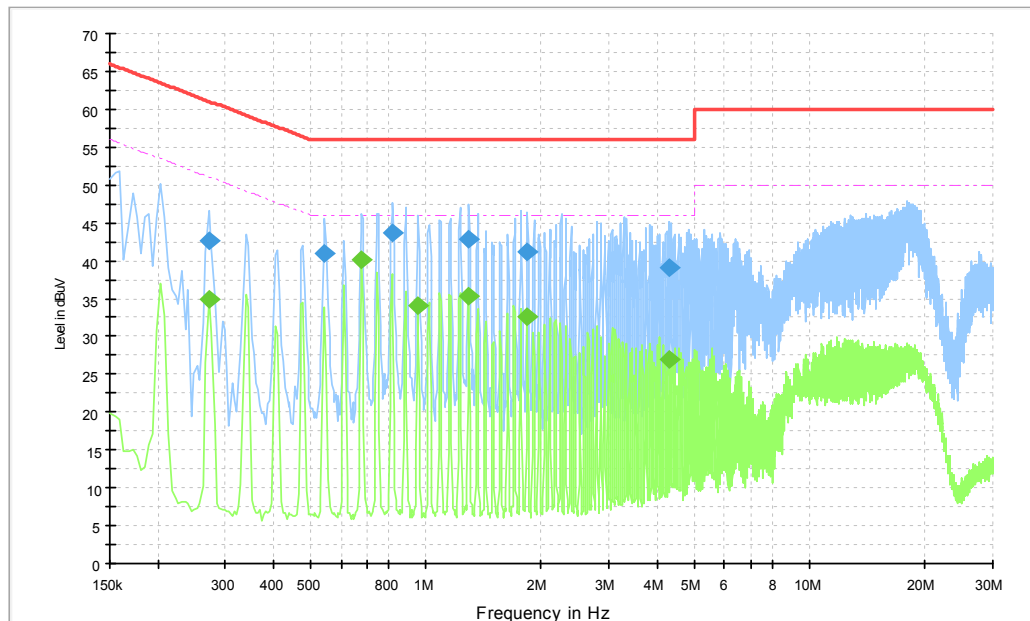

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

### Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth h	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.271500	42.5	10000.0	9.000	On	L1	20.0	18.5	61.1
0.546000	40.9	10000.0	9.000	On	N	20.0	15.1	56.0
0.820500	43.8	10000.0	9.000	On	N	19.9	12.2	56.0
1.297500	42.9	10000.0	9.000	On	N	19.8	13.1	56.0
1.842000	41.2	10000.0	9.000	On	N	19.8	14.8	56.0
4.299000	39.0	10000.0	9.000	On	N	19.8	17.0	56.0

### Final Result 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth h	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.271500	34.8	10000.0	9.000	On	L1	20.0	16.2	51.1
0.681000	40.1	10000.0	9.000	On	L1	19.9	5.9	46.0
0.951000	34.2	10000.0	9.000	On	L1	19.9	11.8	46.0
1.293000	35.3	10000.0	9.000	On	L1	19.8	10.7	46.0
1.837500	32.6	10000.0	9.000	On	L1	19.8	13.4	46.0
4.290000	26.9	10000.0	9.000	On	L1	19.8	19.1	46.0

Note: The measurement results showed here are worst cases of the combinations of different USB cables.

## **ANNEX B: Accreditation Certificate**

<p>United States Department of Commerce National Institute of Standards and Technology</p> <p><b>NVLAP</b><sup>®</sup></p> <hr/> <p><b>Certificate of Accreditation to ISO/IEC 17025:2005</b></p> <hr/> <p>NVLAP LAB CODE: 600118-0</p> <p><b>Telecommunication Technology Labs, CAICT</b> Beijing China</p> <p><i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i></p> <p><b>Electromagnetic Compatibility &amp; Telecommunications</b></p> <p><i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).</i></p> <table><tr><td><p>2019-09-26 through 2020-09-30 <i>Effective Dates</i></p></td><td></td><td><p> <i>For the National Voluntary Laboratory Accreditation Program</i></p></td></tr></table>		<p>2019-09-26 through 2020-09-30 <i>Effective Dates</i></p>		<p> <i>For the National Voluntary Laboratory Accreditation Program</i></p>
<p>2019-09-26 through 2020-09-30 <i>Effective Dates</i></p>		<p> <i>For the National Voluntary Laboratory Accreditation Program</i></p>		

\*\*\*END OF REPORT\*\*\*