



**CONTENTION BASED PROTOCOL PORTION of FCC 47 CFR PART 15 SUBPART E,
KDB 987594**

CONTENTION BASED PROTOCOL PORTION of RSS-248, ISSUE 2

TEST REPORT

FOR

WIRELESS ACCESS POINT

MODEL NUMBER: V010001

FCC ID: 2AEM4-711917312

IC: 20631-711917312

REPORT NUMBER: 14749497-E9V3

ISSUE DATE: 2023-09-25

Prepared for

eero LLC

660 3rd Street 4th Floor

San Francisco

CA 94107, U.S.A.

Prepared by

UL VERIFICATION SERVICES INC.

47173 BENICIA STREET

FREMONT, CA 94538, U.S.A.

TEL: (510) 319-4000

FAX: (510) 661-0888



Revision History

Rev.	Issue Date	Revisions	Revised By
V1	2023-09-14	Initial Issue	--
V2	2023-09-21	Update Description to "Low Power Indoor Access Point"	Doug Anderson
V3	2023-09-25	Update Antenna Gains; Re-test UNII Bands 5 and 6	Doug Anderson

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	7
3. SUMMARY OF TEST RESULTS	7
4. REFERENCE DOCUMENTS	7
5. FACILITIES AND ACCREDITATION	7
6. DECISION RULES AND MEASUREMENT UNCERTAINTY	8
6.1. METROLOGICAL TRACEABILITY	8
6.2. DECISION RULES	8
7. CONTENTION BASED PROTOCOL	9
7.1. OVERVIEW	9
7.1.1. LIMITS	9
7.1.2. FREQUENCY BANDS AND GOVERNING RULES	10
7.2. DESCRIPTION OF TEST SETUP	12
7.2.1. TEST AND MEASUREMENT SYSTEM	12
7.2.2. TEST AND MEASUREMENT SOFTWARE	14
7.2.3. TEST ROOM ENVIRONMENT	14
7.2.4. SETUP OF EUT	15
7.2.5. DESCRIPTION OF EUT	16
8. CONTENTION BASED PROTOCOL	17
8.1. LIMITS AND PROCEDURES	17
8.2. U-NII 5 BAND TEST CONDITION 1 RESULTS	18
8.3. U-NII 5 BAND TEST CONDITION 2 RESULTS	18
8.3.1. TEST CHANNEL	18
8.3.2. INCUMBENT SIGNAL PLOTS	18
8.3.1. EUT TRANSMISSION PLOTS	21
8.3.2. TABULATED TEST RESULTS	24
8.3.3. Tx OPERATIONAL STATUS TEST RESULTS	26
8.4. U-NII 5 BAND TEST CONDITION 3 RESULTS	27
8.5. U-NII 5 BAND TEST CONDITION 4 RESULTS	27
8.5.1. TEST CHANNEL	27
8.5.2. INCUMBENT SIGNAL PLOTS	28
8.5.3. EUT TRANSMISSION PLOTS	34
8.5.4. TABULATED TEST RESULTS	41
8.5.5. Tx OPERATIONAL STATUS TEST RESULTS	43
8.6. U-NII 6 BAND TEST CONDITION 1 RESULTS	44
8.7. U-NII 6 BAND TEST CONDITION 2 RESULTS	44
8.7.1. TEST CHANNEL	44
8.7.2. INCUMBENT SIGNAL PLOTS	45

8.7.3.	EUT TRANSMISSION PLOTS	47
8.7.4.	TABULATED TEST RESULTS	50
8.7.5.	Tx OPERATIONAL STATUS TEST RESULTS	52
8.8.	<i>U-NII 6 BAND TEST CONDITION 3 RESULTS</i>	<i>53</i>
8.9.	<i>U-NII 6 BAND TEST CONDITION 4 RESULTS</i>	<i>53</i>
8.9.1.	TEST CHANNEL	53
8.9.2.	INCUMBENT SIGNAL PLOTS	53
8.9.1.	EUT TRANSMISSION PLOTS	56
8.9.2.	TABULATED TEST RESULTS	59
8.9.3.	Tx OPERATIONAL STATUS TEST RESULTS	61
8.10.	<i>U-NII 6 BAND TEST CONDITION 3 RESULTS</i>	<i>62</i>
8.11.	<i>U-NII 6 BAND TEST CONDITION 4 RESULTS</i>	<i>62</i>
8.11.1.	TEST CHANNEL	62
8.11.2.	INCUMBENT SIGNAL PLOTS	62
8.11.3.	EUT TRANSMISSION PLOTS	69
8.11.4.	TABULATED TEST RESULTS	76
8.11.5.	Tx OPERATIONAL STATUS TEST RESULTS	78
8.12.	<i>U-NII 7 BAND TEST CONDITION 1 RESULTS</i>	<i>79</i>
8.13.	<i>U-NII 7 BAND TEST CONDITION 2 RESULTS</i>	<i>79</i>
8.13.1.	TEST CHANNEL	79
8.13.2.	INCUMBENT SIGNAL PLOTS	79
8.13.3.	EUT TRANSMISSION PLOTS	82
8.13.4.	TABULATED TEST RESULTS	85
8.13.5.	Tx OPERATIONAL STATUS TEST RESULTS	87
8.14.	<i>U-NII 7 BAND TEST CONDITION 3 RESULTS</i>	<i>88</i>
8.15.	<i>U-NII 7 BAND TEST CONDITION 4 RESULTS</i>	<i>88</i>
8.15.1.	TEST CHANNEL	88
8.15.2.	INCUMBENT SIGNAL PLOTS	88
8.15.3.	EUT TRANSMISSION PLOTS	95
8.15.4.	TABULATED TEST RESULTS	102
8.15.5.	Tx OPERATIONAL STATUS TEST RESULTS	104
8.16.	<i>U-NII 8 BAND TEST CONDITION 1 RESULTS</i>	<i>105</i>
8.17.	<i>U-NII 8 BAND TEST CONDITION 2 RESULTS</i>	<i>105</i>
8.17.1.	TEST CHANNEL	105
8.17.2.	INCUMBENT SIGNAL PLOTS	105
8.17.3.	EUT TRANSMISSION PLOTS	108
8.17.4.	TABULATED TEST RESULTS	111
8.17.5.	Tx OPERATIONAL STATUS TEST RESULTS	113
8.18.	<i>U-NII 8 BAND TEST CONDITION 3 RESULTS</i>	<i>114</i>
8.19.	<i>U-NII 8 BAND TEST CONDITION 4 RESULTS</i>	<i>114</i>
8.19.1.	TEST CHANNEL	114
8.19.2.	INCUMBENT SIGNAL PLOTS	115
8.19.3.	EUT TRANSMISSION PLOTS	121
8.19.4.	TABULATED TEST RESULTS	128
8.19.5.	Tx OPERATIONAL STATUS TEST RESULTS	130
9.	SETUP PHOTOS	131

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: eero LLC
660 3rd Street 4th Floor
San Francisco, CA 94107, U.S.A.

EUT DESCRIPTION: WIRELESS ACCESS POINT

MODEL: V010001

SERIAL NUMBER: GGB2-1E04-3062-002P

DATE TESTED: JULY 06 to 31 and SEPTEMBER 25, 2023

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
Contention Based Protocol Portion of 47 CFR Part 15 Subpart E, KDB 987594	Complies
Contention Based Protocol Portion of RSS-248, Issue 2	Complies

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document.

Reviewed By:



Frank Ibrahim
Staff Engineer
CONSUMER TECHNOLOGY DIVISION
UL Verification Services Inc.

Prepared By:



Doug Anderson
Test Engineer
CONSUMER TECHNOLOGY DIVISION
UL Verification Services Inc.

Approved & Released For
UL Verification Services Inc. By:



Edgard Rincand
Operations Leader
CONSUMER TECHNOLOGY DIVISION
UL Verification Services Inc.
TEST METHODOLOGY

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with the Contention Based Protocol portion of

- FCC 47 CFR Part 15 Subpart E
- FCC KDB 987594 D01 U-NII 6GHz General Requirements v01r03
- FCC KDB 987594 D02 U-NII 6GHz EMC Measurement v01r01
- RSS-248 Issue 2

3. SUMMARY OF TEST RESULTS

Requirement Description	Result	Remarks
Contention Based Protocol Portion of FCC 47 CFR PART 15 SUBPART E, KDB 987594	Complies	
Contention Based Protocol Portion of RSS-248, Issue 2	Complies	

4. REFERENCE DOCUMENTS

Measurements of transmitter parameters as referenced in this report and all other manufacturer's declarations relevant to the RF test requirements are documented in UL Verification Services report number 14749497-E7V1.

This report contains data provided by the customer which can impact the validity of results. UL Verification Services Inc. is only responsible for the validity of results after the integration of the data provided by the customer.

5. FACILITIES AND ACCREDITATION

UL Verification Services Inc is accredited by A2LA, certification #0751.05, for all testing performed within the scope of this report. Testing was performed at the locations noted below.

	Address	ISED CABID	ISED Company Number	FCC Registration
<input checked="" type="checkbox"/>	Building 1: 47173 Benicia Street Fremont, CA 94538, U.S.A	US0104	2324A	550739
<input type="checkbox"/>	Building 2: 47266 Benicia Street Fremont, CA 94538, U.S.A	US0104	2324A	550739
<input type="checkbox"/>	Building 4: 47658 Kato Rd Fremont, CA 94538, U.S.A	US0104	2324A	550739

6. DECISION RULES AND MEASUREMENT UNCERTAINTY

6.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

6.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement).

7. CONTENTION BASED PROTOCOL

7.1. OVERVIEW

7.1.1. LIMITS

FCC

FCC Part 15 Subpart E, FCC KDB 987594 “U-NII 6 GHz devices operating in the 5.925-7.125 GHz band”; Section I.

INNOVATION, SCIENCE and ECONOMIC DEVELOPMENT CANADA (ISED)

Per Section 4.7.1 of RSS-248, Issue 2:

“The Federal Communications Commission’s accepted KDB procedure KDB 987594 D02 listed on ISED’s Certification and Engineering website (see the Normative Test Standards and Acceptable Alternate Procedures page) shall be used to demonstrate the compliance of a device with the contention-based protocol requirements set out in this section.

7.1.2. FREQUENCY BANDS AND GOVERNING RULES

FCC

Band	Frequency (GHz)	Rules	Notes	KDB/Publication
U-NII 5	5.925-6.425	15.407(a)(4) – (8)	Low Power Indoor AP, Subordinates, Indoor Clients Standard Power AP, Fixed , Standard Clients & Dual Client	789033 (U-NII) 987594 (6 GHz Band)
U-NII 6	6.425-6.525	15.407(a)(5), (6), (8)	Low Power Indoor AP, Subordinates, Indoor Clients & Dual Client	
U-NII 7	6.525-6.875	15.407(a)(4) – (8)	Low Power Indoor AP, Subordinates, Indoor Clients Standard Power AP, Fixed & Standard Clients & Dual Client	
U-NII 8	6.875 -7.125	15.407(a)(5), (6), (8)	Low Power Indoor AP, Subordinates, Indoor Clients & Dual Client	
* Transition period ended March 2, 2020 for marketing DTS in the 5 GHz Band, as stated in 15.408(b)(4)(ii)				

Table 1: Overview of U-NII Rules

ISED

Band	Frequency (GHz)	Rules	Notes	KDB/Publication
U-NII 5	5.925-6.425	RSS 248 - Section 4.2	Low-Power indoor AP, indoor subordinate devices, low-power client devices, Standard Power AP, Fixed client devices, standard client devices and dual client device	RSS 248 987594 D02
U-NII 6	6.425-6.525	RSS 248 - Section 4.2	Low-Power indoor AP, indoor subordinate devices, low-power client devices, Standard Power AP, Fixed client devices, standard client devices and dual client device	
U-NII 7	6.525-6.875	RSS 248 - Section 4.2	Low-Power indoor AP, indoor subordinate devices, low-power client devices, Standard Power AP, Fixed client devices, standard client devices and dual client device	
U-NII 8	6.875 -7.125	RSS 248 - Section 4.2	Low-Power indoor AP, indoor subordinate devices, low-power client devices, and dual client device	


7.2. DESCRIPTION OF TEST SETUP

7.2.1. TEST AND MEASUREMENT SYSTEM

These tests were performed using a Conducted instrument configuration.

CONDUCTED TEST CONFIGURATION

NOTE: This is a comprehensive setup diagram of the receiver performance test and measurement system. Not all of the devices shown below are used for every applicable receiver test. Also, coupler port designations “IN” and “OUT” refer to labeling on the coupler, not the RF signal flow.

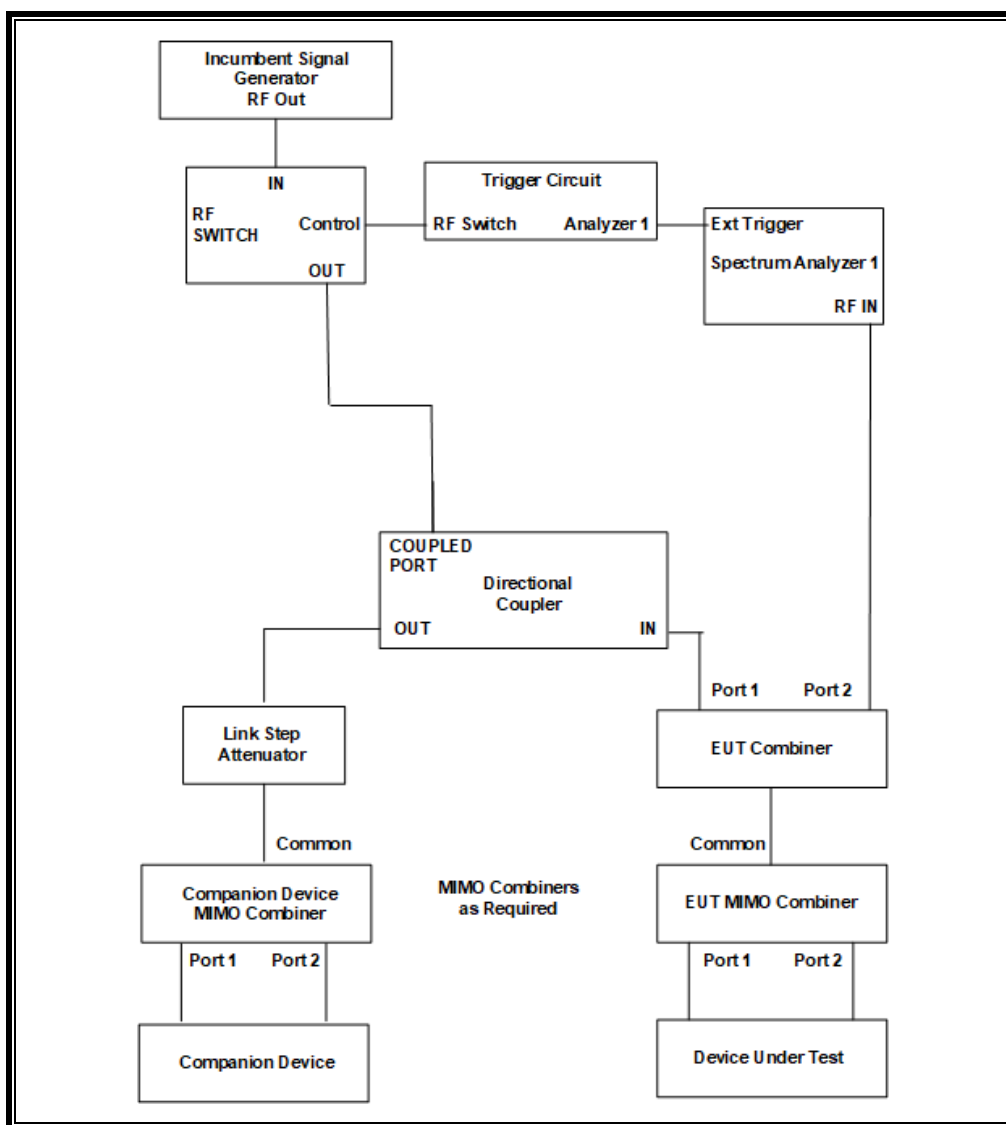

SYSTEM OVERVIEW

Should multiple RF ports be utilized for the EUT and/or Companion devices (for example, for diversity or MIMO implementations), combiner/dividers are inserted between the EUT MIMO Combiner/Divider and the attenuator connected to the EUT (and/or between the Companion MIMO Combiner/Divider and the attenuator connected to the Companion Device). Additional attenuators may be utilized such that there is one attenuator at each RF port on each device.

SYSTEM CALIBRATION

The monitoring cable is disconnected from the spectrum analyzer and a 50-ohm load is connected to the end of the monitoring cable in place of the spectrum analyzer. The cable connected to the EUT is then attached to the spectrum analyzer in place of the monitoring cable. A signal generator is then set to produce a modulated AWGN Incumbent Signal that has a 99% occupied power bandwidth of 10 MHz. The output amplitude of the signal generator is adjusted to yield the allowable maximum AWGN Incumbent Signal level as measured on the spectrum analyzer. The EUT and monitoring cables are then returned to their original configurations to perform the test.

TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	ID No.	Cal Due
Spectrum Analyzer, PXA, 3Hz to 8.4GHz	Keysight	N9030A	150667	2024-01-31
Signal Generator, MXG X-Series RF Vector	Keysight	N5182B	215999	2024-09-30
Frequency Extender	Keysight	N5182BX	213906	2024-09-30

Note: An MXG series Signal Generator and separate external Frequency Extender module are shown in the preceding test system block diagram as a stand-alone Incumbent Signal Generator.

7.2.2. TEST AND MEASUREMENT SOFTWARE

The following test and measurement software was utilized for the tests documented in this report:

TEST SOFTWARE LIST		
Name	Version	Test / Function
PXA Read	3.1	Signal Generator Screen Capture

7.2.3. TEST ROOM ENVIRONMENT


The test room temperature and humidity shall be maintained within normal temperature of 15~35 °C and normal humidity 20~75% (relative humidity).

ENVIRONMENT CONDITION

Parameter	Value
Temperature	23.4, 22.7, 23.6, 23.6, 23.3 and 21.5 °C
Humidity	51, 52, 58, 56, 57 and 54 %

7.2.4. SETUP OF EUT

CONDUCTED METHOD EUT TEST SETUP

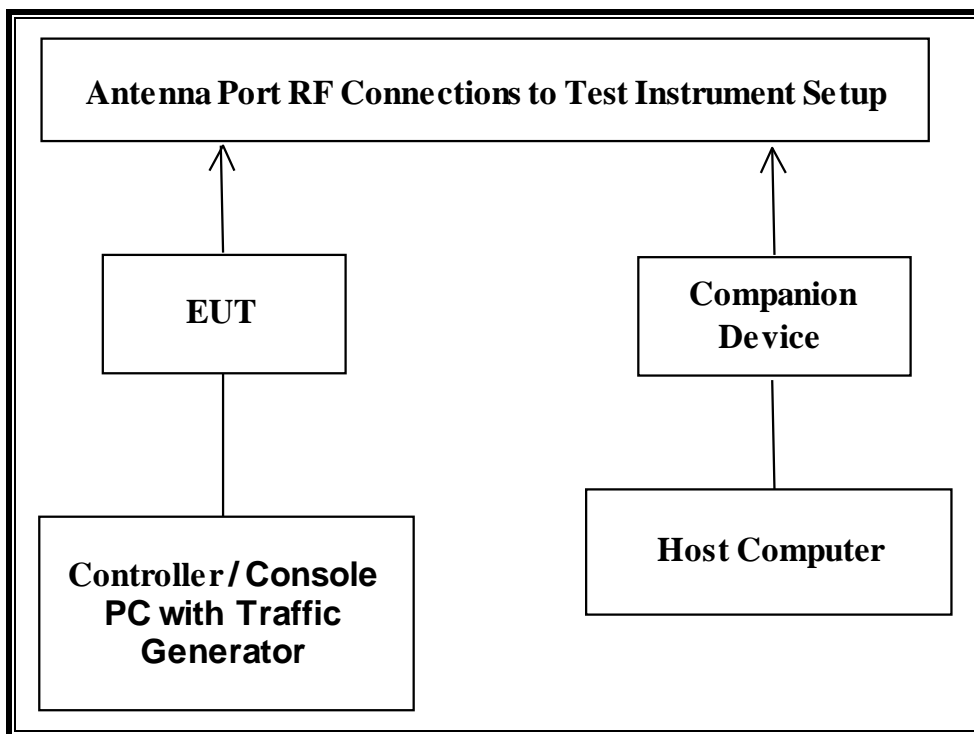

SUPPORT EQUIPMENT

The following support equipment was utilized for the tests documented in this report:

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter 1 (EUT)	eero LLC	C310011	No Serial Number	DoC
Notebook PC 1 (Master Console)	Lenovo	Type 20W6-001VUS	PF-2YV2K6	DoC
AC Adapter 2 (Notebook PC)	Lenovo	ADLX65YCC2D	8SSA10R16875C1 SG09PRSHT	DoC
Wireless Router (Companion Device)	eero LLC	V010001	GGB2-1E04-3062-001V	2AEM4-711917312
AC Adapter 3 (EUT)	eero LLC	C310011	No Serial Number	DoC
Notebook PC 2 (Companion Host)	Lenovo	Type 20FN-002JUS	PC-0KTDZ5 17/03	DoC
AC Adapter 4 (Notebook PC 2)	Lenovo	ADLX90NDC2A	11S45N0243Z1ZS9 A71L4HW	DoC

7.2.5. DESCRIPTION OF EUT

The EUT operates in the following bands: U-NII 5 (5925 MHz-6425 MHz), U-NII 6 (6425 MHz-6525 MHz), U-NII 7 (6525 MHz-6875 MHz) and U-NII 8 (6875 MHz-7125 MHz).

The EUT is classified as a 6 GHz Low Power Indoor Access Point.

The lowest gain antenna assembly utilized with the EUT has a gain of 3.38 dBi in the U-NII 5 band, 2.99 dBi in the U-NII 6 band, 3.12 dBi in the U-NII 7 band and 3.1 dBi in the U-NII 8 band.

Four antennas are utilized to meet the diversity and MIMO operational requirements.

The maximum allowable conducted AWGN Incumbent Detection Threshold level is -62 dBm/MHz. After correction for antenna gain the conducted AWGN Incumbent Detection Threshold at the antenna port is -62 + antenna gain. This results in a maximum allowable AWGN Incumbent Detection Threshold of -58.62 dBm in the U-NII 5 band, -59.01 dBm in the U-NII 6 band, -58.88 dBm in the U-NII 7 band and -58.9 dBm in the U-NII 8 band.

The EUT uses four transmitter/receiver chains, each connected to a 50-ohm coaxial antenna port. All antenna ports are connected to the test system via a power divider to perform conducted tests.

WLAN traffic was generated by transferring a data stream from the EUT to the Companion Device using iPerf version 2.0.5 software package.

The EUT utilizes the 802.11be architecture. Six nominal channel bandwidths are implemented: 20 MHz, 40 MHz, 80 MHz, 160 MHz, 240 MHz and 320 MHz.

The software installed in the EUT and Companion Device is OpenWrt version 19.07-SNAPSHOT r0+12817-2e9741a9a4 / LuCI pdekerat/ath1210csu1-ipq95xx branch git-22.150.23015-5fbc521; Kernel Version: 5.4.164.

TEST SETUP

The EUT is attached to a USB port of a host laptop computer during testing. The EUT is linked to a companion 802.11 wireless radio device. A commercial traffic generation program (iPERF) was utilized to generate traffic from the EUT to the companion radio device.

8. CONTENTION BASED PROTOCOL

8.1. LIMITS AND PROCEDURES

LIMITS

FCC Part 15 Subpart E, FCC KDB 987594 “U-NII 6 GHz devices operating in the 5.925-7.125 GHz band”; Section I.

AWGN INCUMBENT SIGNAL DETECTION THRESHOLD

FCC Part 15 Subpart E, FCC KDB 987594 “U-NII 6 GHz devices operating in the 5.925-7.125 GHz band”; Section I, Clause (c), Step 6.

For an EUT with a non-zero dBi antenna gain the maximum detection threshold level, T_L , of the 10 MHz wide AWGN Incumbent Signal at the port of the radio module in a conducted test setup shall be no greater than -62 dBm/MHz. It shall be adjusted by the gain of the bypassed antenna as shown in the table below:

Band	Frequency Range (MHz)	Antenna Gain (dBi)	T_L at Radio Port (dBm/MHz)
U-NII 5	5925 to 6425	3.38	-58.62
U-NII 6	6425 to 6525	2.99	-59.01
U-NII 7	6525 to 6875	3.12	-58.88
U-NII 8	6875 to 7125	3.1	-58.9

TEST PROCEDURE

FCC Part 15 Subpart E, FCC KDB 987594 “U-NII 6 GHz devices operating in the 5.925-7.125 GHz band”; Section I, Clause (c).

8.2. U-NII 5 BAND TEST CONDITION 1 RESULTS

TEST CONDITION 1 CRITERIA

$$99\% BW_{EUT} \leq 99\% BW_{INC}$$

The lowest and highest supported channel bandwidths do not meet the criteria for this test condition therefore this test was not performed.

8.3. U-NII 5 BAND TEST CONDITION 2 RESULTS

TEST CONDITION 2 CRITERIA

$$99\% BW_{INC} < 99\% BW_{EUT} \leq 2 \times 99\% BW_{INC}$$

8.3.1. TEST CHANNEL


All tests were performed with the EUT set to a channel center frequency of 6215 MHz and a nominal channel bandwidth of 20 MHz.

Only the lowest and highest supported channel bandwidths are required to be tested.


8.3.2. INCUMBENT SIGNAL PLOTS

All tests were performed with the Incumbent Signal frequency set to the test channel center frequency and a nominal 99% Occupied Power Bandwidth of 10 MHz.

INCUMBENT SIGNAL 99% OCCUPIED POWER BANDWIDTH

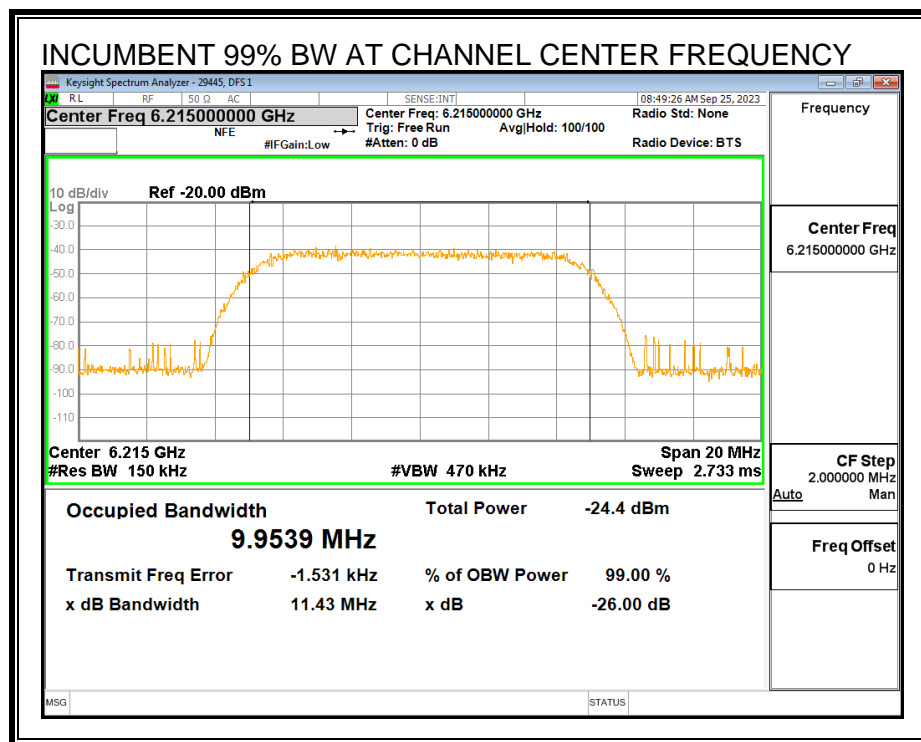


MINIMUM PASSING INCUMBENT SIGNAL POWER

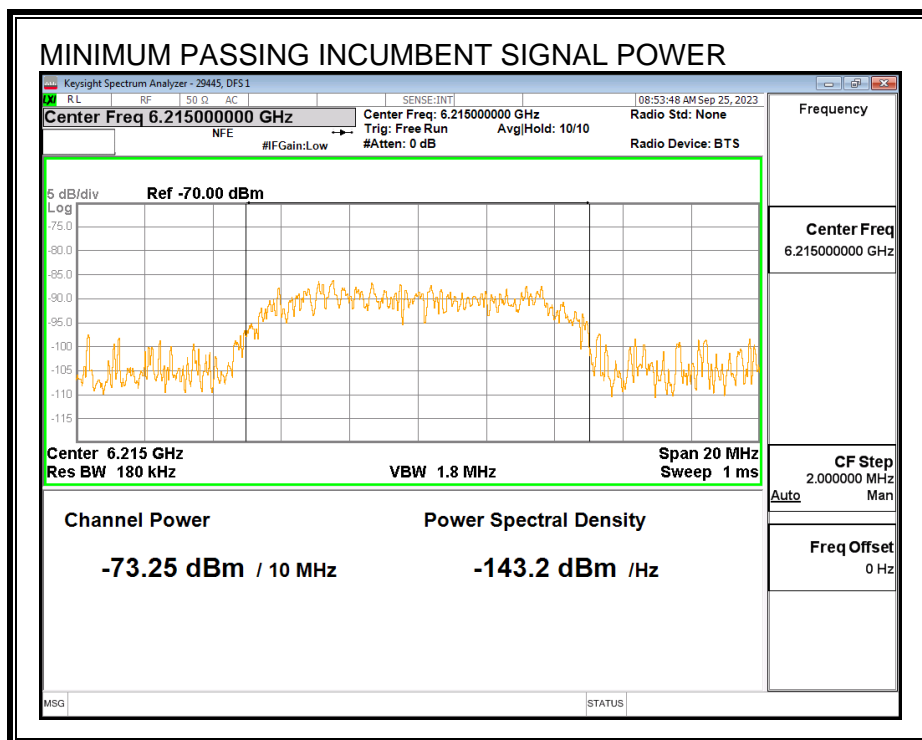


8.3.1. EUT TRANSMISSION PLOTS

EUT 99% OCCUPIED POWER BANDWIDTH

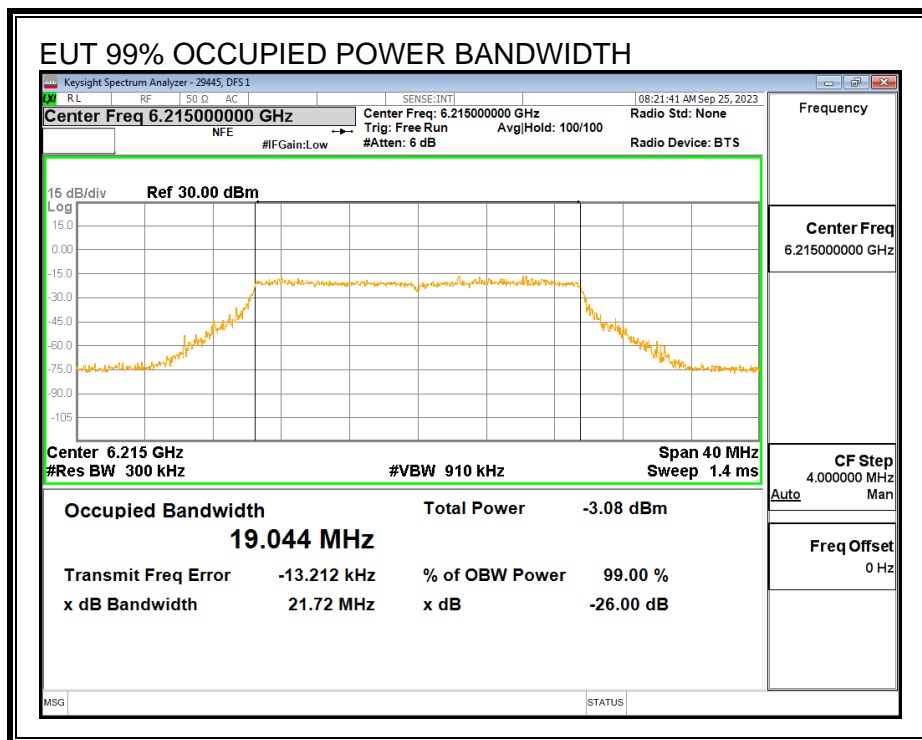


TRAFFIC WITHOUT THE INCUMBENT SIGNAL PRESENT

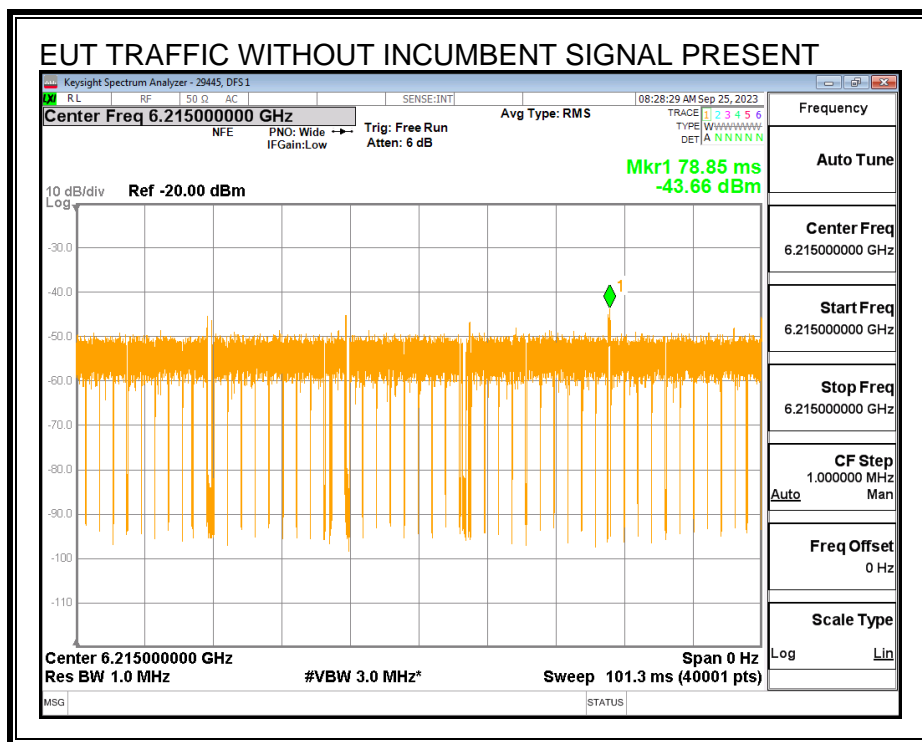

EUT RESPONSE TO THE APPLIED INCUMBENT SIGNAL

A link between the EUT and the Companion Device was established on the test channel. Traffic flowing from the EUT to the Companion Device was then initiated. A sweep was started and the incumbent signal was continuously applied at approximately 5 seconds after the start of the sweep for a duration of 30 seconds and removed after the end of the observation period. Markers are placed at the beginning and end of the observation period.

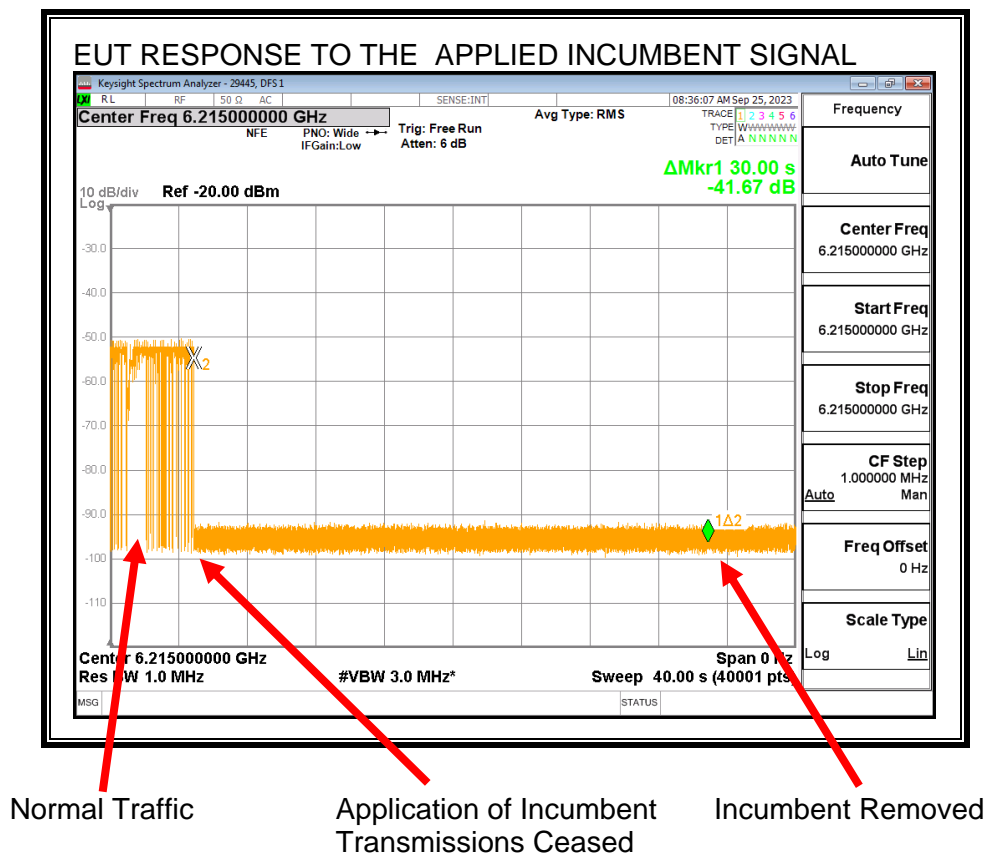

When the EUT detects the Incumbent AWGN Signal it switches channels and all transmissions on the test channel cease.

8.3.2. TABULATED TEST RESULTS

INCUMBENT SIGNAL DETECTION RESULTS

EUT Channel Center Frequency, f_{c1} (MHz)	6215
EUT Nominal Channel Bandwidth (MHz)	20
99% Occupied Bandwidth of the EUT (MHz)	19.044
EUT 99% OBW Lower Edge, F_L (MHz)	6205.48
EUT 99% OBW Upper Edge, F_H (MHz)	6224.52
Test Frequency of Incumbent Signal (MHz)	6215
Maximum Allowed Incumbent Amplitude at Antenna (dBm)	-62
Minimum Antenna Gain (dBi)	3.38
Maximum Allowed Incumbent Amplitude at Radio Port (dBm)	-58.62
Lowest Passing Measured Incumbent Signal Amplitude (dBm)	-73.25
Margin (dBm)	-14.63
Result (PASS / FAIL)	PASS

Test Date: 09/25/23

Tested by: 29445

Test location: DFS 1

INCUMBENT SIGNAL DETECTION CERTAINTY RATE

	AWGN Detected (Yes / No)
Trial	Incumbent AWGN at f_{c1}
1	Yes
2	Yes
3	Yes
4	Yes
5	Yes
6	Yes
7	Yes
8	Yes
9	No
10	Yes
Test Result	PASS

Test Date: 09/25/23

Tested by: 29445

Test location: DFS 1

A minimum detection rate of 90% is required for the EUT to be compliant.

8.3.3. Tx OPERATIONAL STATUS TEST RESULTS

Test Condition 2: $99\% BW_{INC} < 99\% BW_{EUT} \leq 2 \times 99\% BW_{INC}$

Incumbent AWGN at f_{c1} :

Measured Incumbent Power at the EUT Radio Port (dBm)	Antenna Gain (dBi)	Antenna Cable Path Loss (dB)	Adjusted Incumbent Power at the Antenna (dBm)	Detection Limit (dBm)	EUT Tx Status
-73.25	3.38	0	-76.63	-62	Ceased
-76.32	3.38	0	-79.7	-62	Minimal
-78.52	3.38	0	-81.9	-62	Normal

The path loss from the internal antenna assembly to the radio port is incorporated into the antenna gain figure.

Test Date: 09/25/23

Tested by: 29445

Test location: DFS 1

8.4. U-NII 5 BAND TEST CONDITION 3 RESULTS

TEST CONDITION 3 CRITERIA

$$2 \times 99\% BW_{INC} < 99\% BW_{EUT} \leq 4 \times 99\% BW_{INC}$$

The lowest and highest supported channel bandwidths do not meet the criteria for this test condition therefore this test was not performed.

8.5. U-NII 5 BAND TEST CONDITION 4 RESULTS

TEST CONDITION 4 CRITERIA

$$99\% BW_{EUT} > 4 \times 99\% BW_{INC}$$

8.5.1. TEST CHANNEL

All tests were performed with the EUT set to a channel center frequency of 6265 MHz and a nominal channel bandwidth of 320 MHz.


Only the lowest and highest supported channel bandwidths are required to be tested.

8.5.2. INCUMBENT SIGNAL PLOTS


All tests were performed with the Incumbent Signal frequency set to the test channel center frequency and a nominal 99% Occupied Power Bandwidth of 10 MHz.

INCUMBENT SIGNAL 99% OCCUPIED POWER BANDWIDTH


Lower Edge Incumbent Signal f_{c2} :

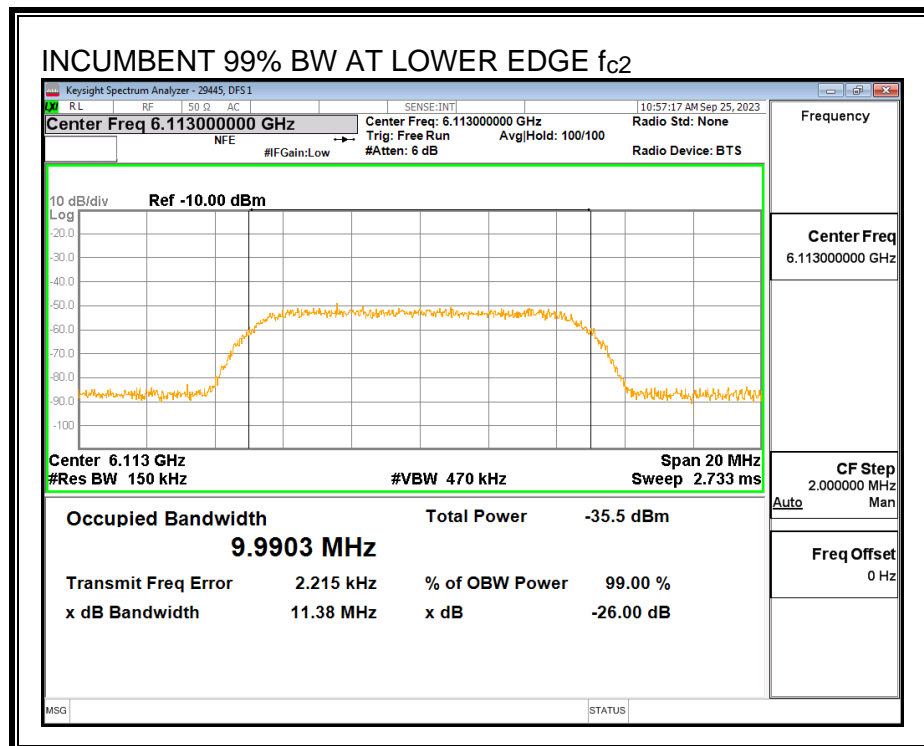

Center Frequency Incumbent Signal f_{c1} :

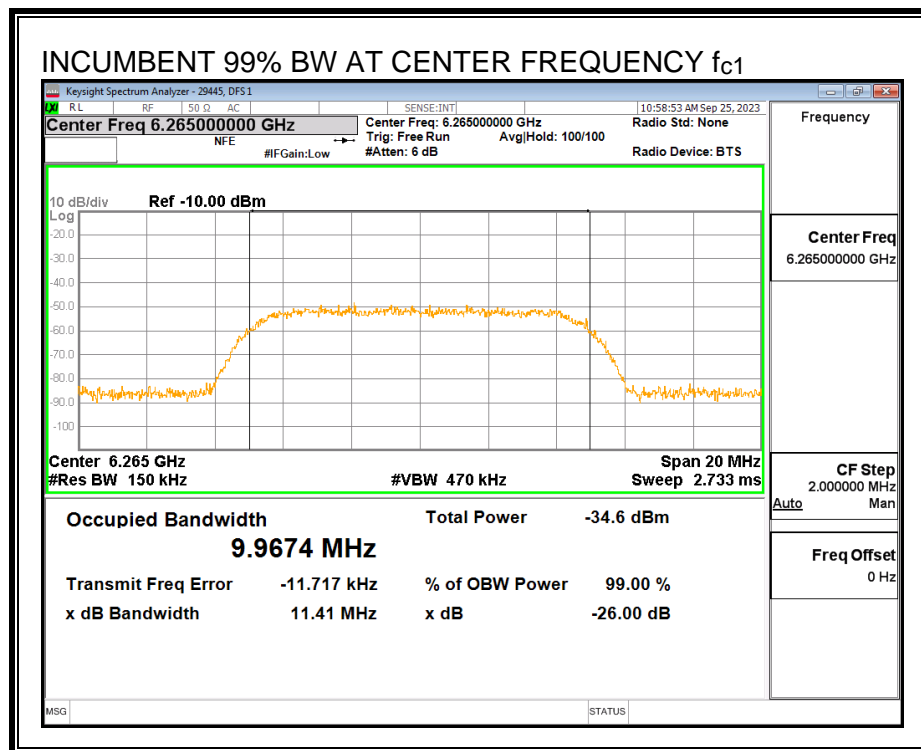


Upper Edge Incumbent Signal f_{c3} :

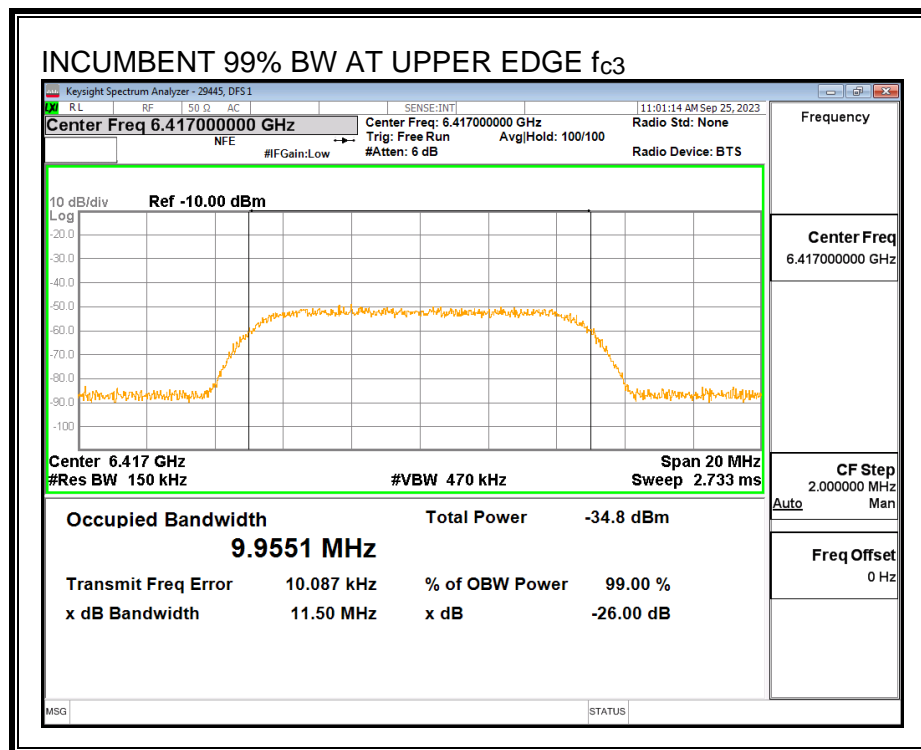


MINIMUM PASSING INCUMBENT SIGNAL POWER


Lower Edge Incumbent Signal f_{c2} :

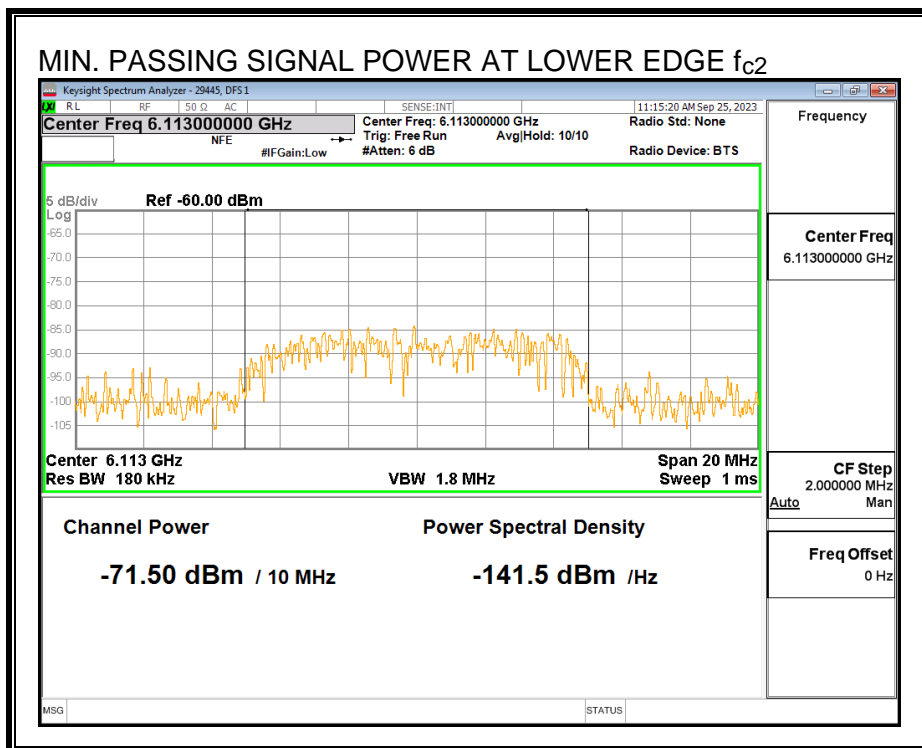

Center Frequency Incumbent Signal f_{c1} :

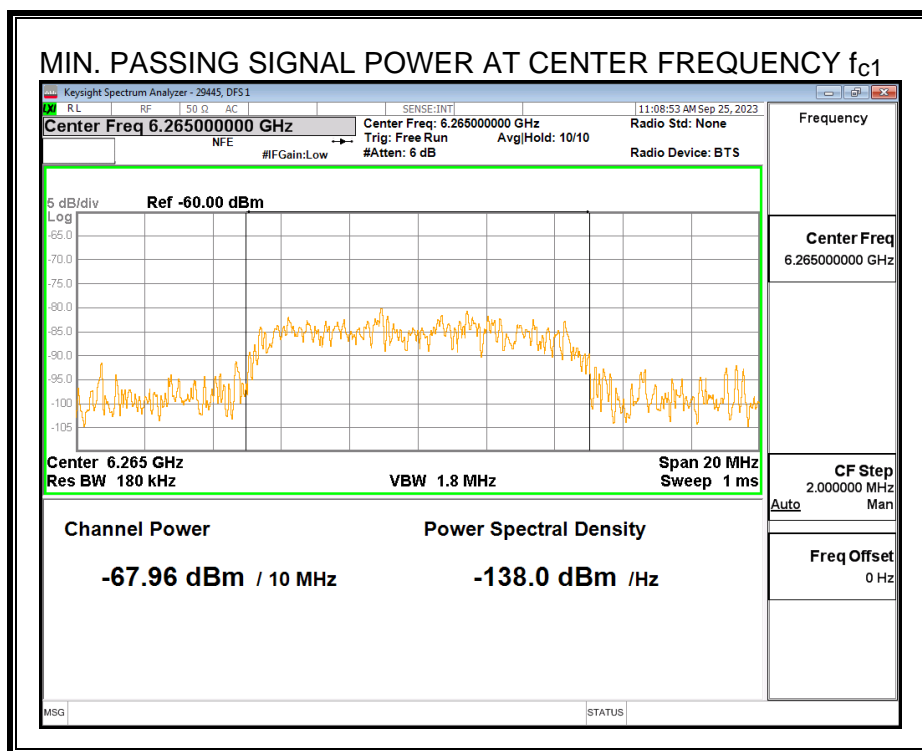


Upper Edge Incumbent Signal f_{c3} :

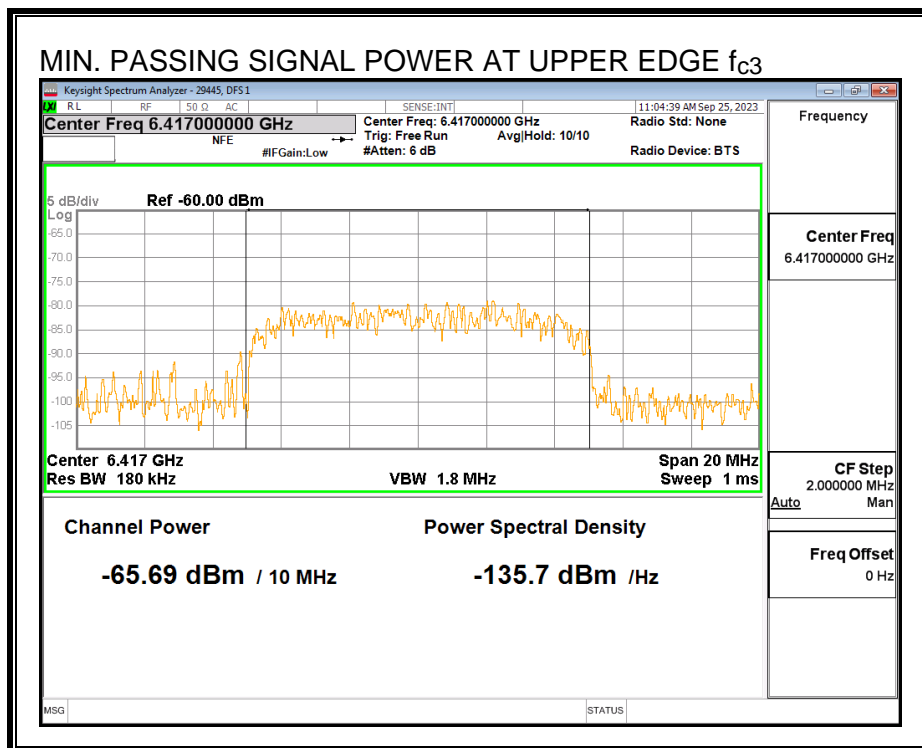


8.5.3. EUT TRANSMISSION PLOTS

EUT 99% OCCUPIED POWER BANDWIDTH

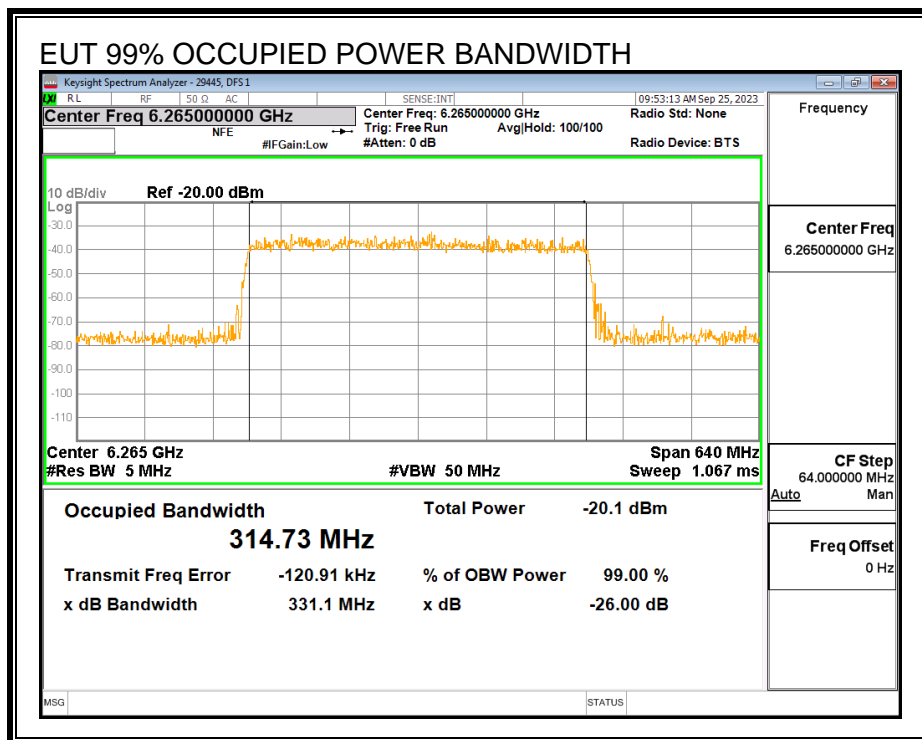


TRAFFIC WITHOUT THE INCUMBENT SIGNAL PRESENT


Lower Edge f_{c2} :

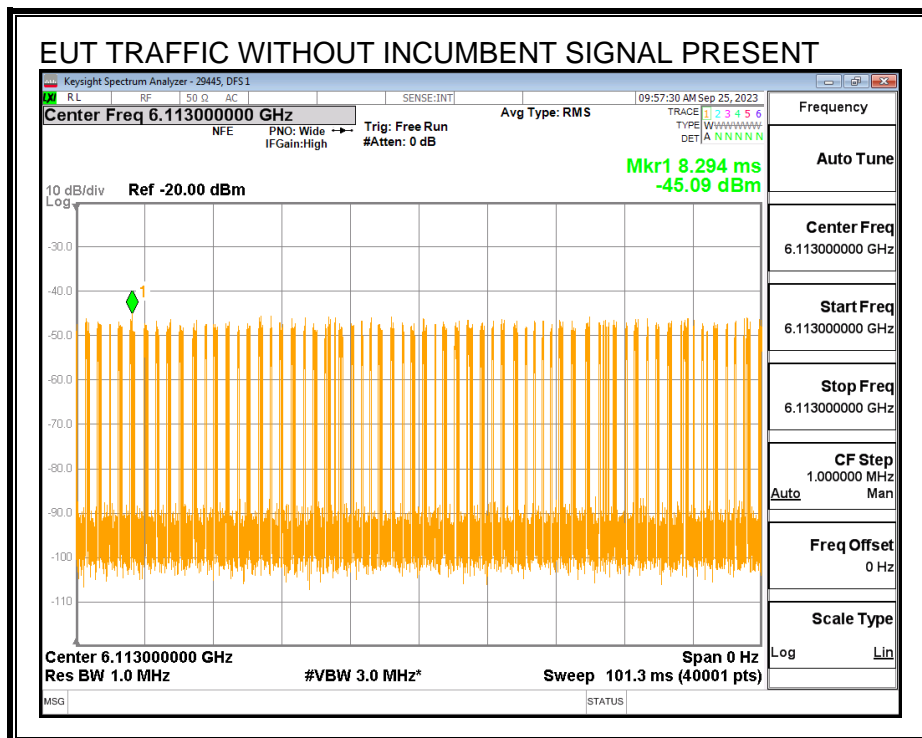

Center Frequency f_{c1} :

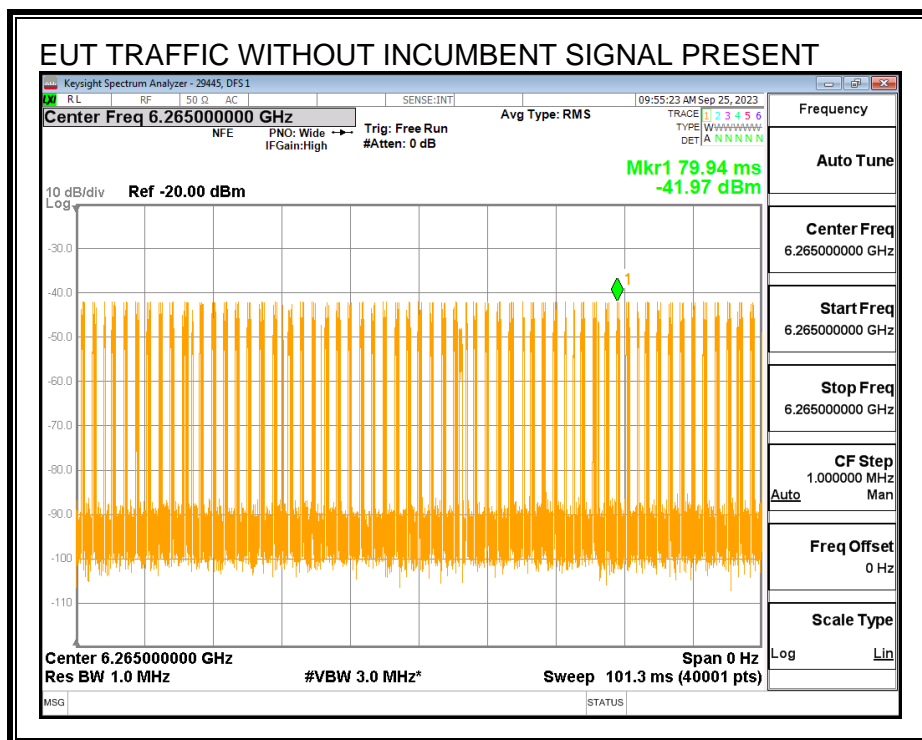


Upper Edge f_{c3} :

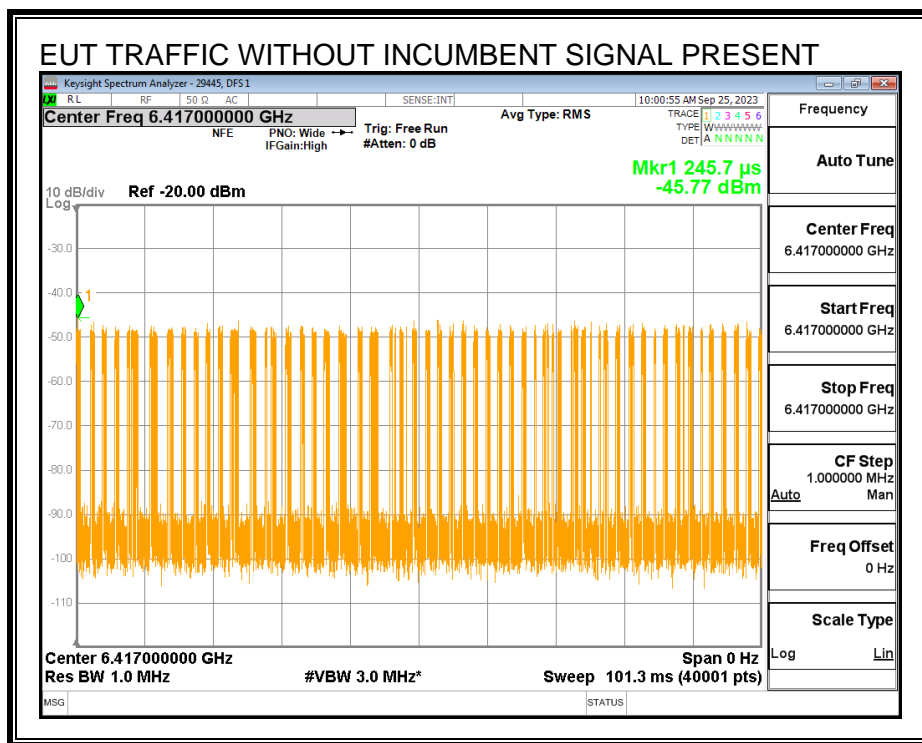

EUT RESPONSE TO THE APPLIED INCUMBENT SIGNAL

A link between the EUT and the Companion Device was established on the test channel. Traffic flowing from the EUT to the Companion Device was then initiated. A sweep was started and the incumbent signal was continuously applied at approximately 5 seconds after the start of the sweep for a duration of 30 seconds and removed after the end of the observation period. Markers are placed at the beginning and end of the observation period.

Lower Edge Incumbent Signal f_{c2} :

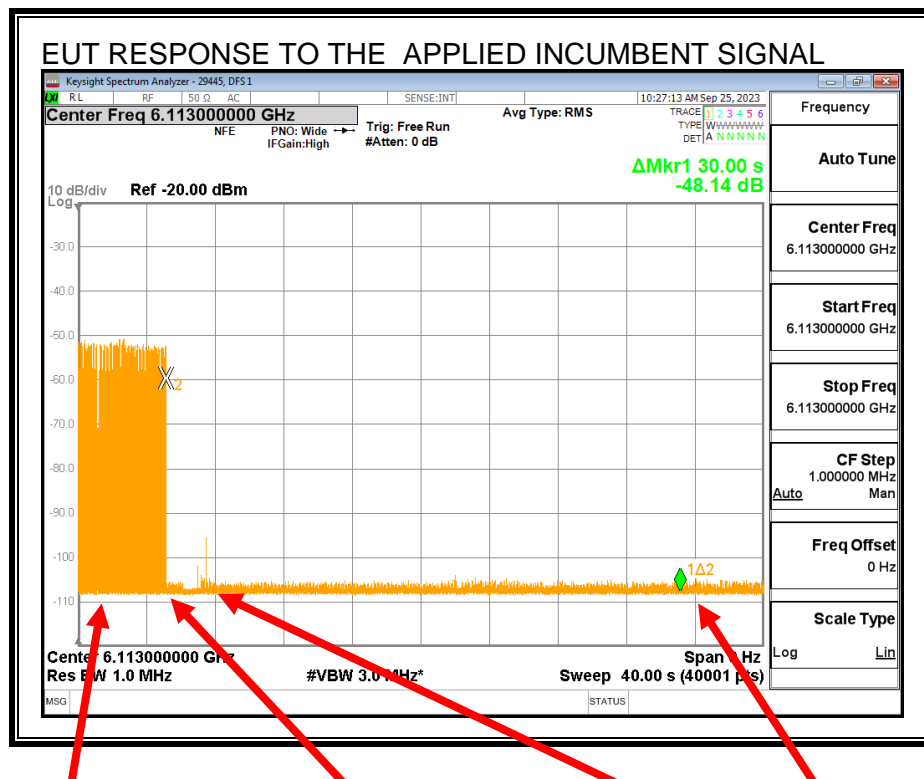

Normal Traffic

Application of Incumbent
Transmissions Ceased


Spurious Signals

Incumbent Removed

Spurious Signals

When the EUT detects the Incumbent AWGN Signal it switches channels and all transmissions on the test channel cease.

Center Frequency Incumbent Signal f_{c1} :

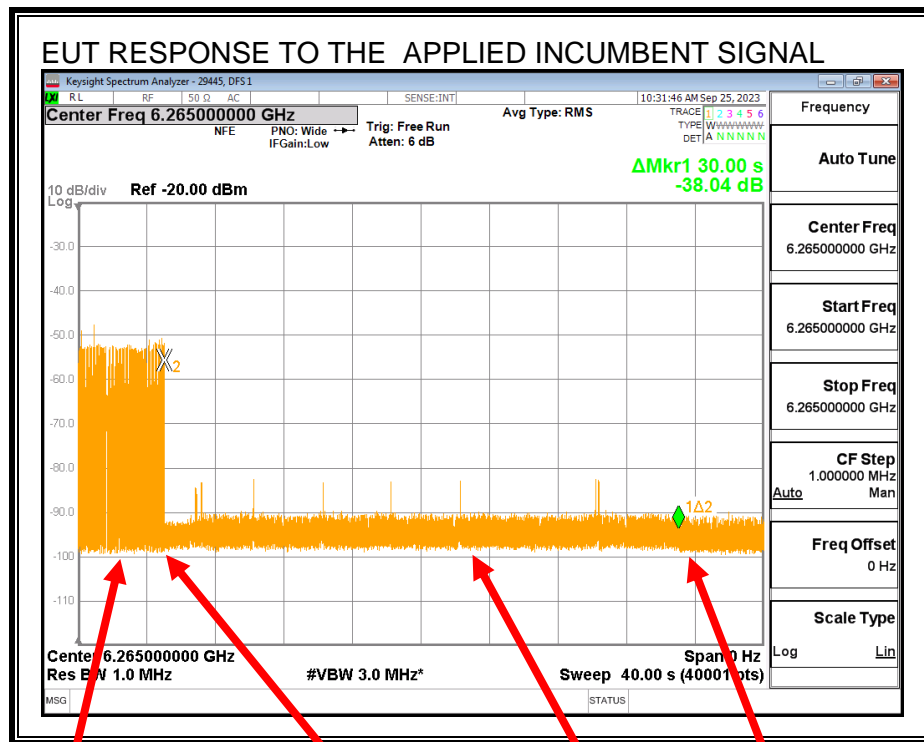

Normal Traffic


Application of Incumbent
Transmissions Ceased

Spurious Signals

Incumbent Removed

When the EUT detects the Incumbent AWGN Signal it switches channels and all signals with the exception of spurious signals on the test channel cease.

Upper Edge Incumbent Signal f_{c3} :

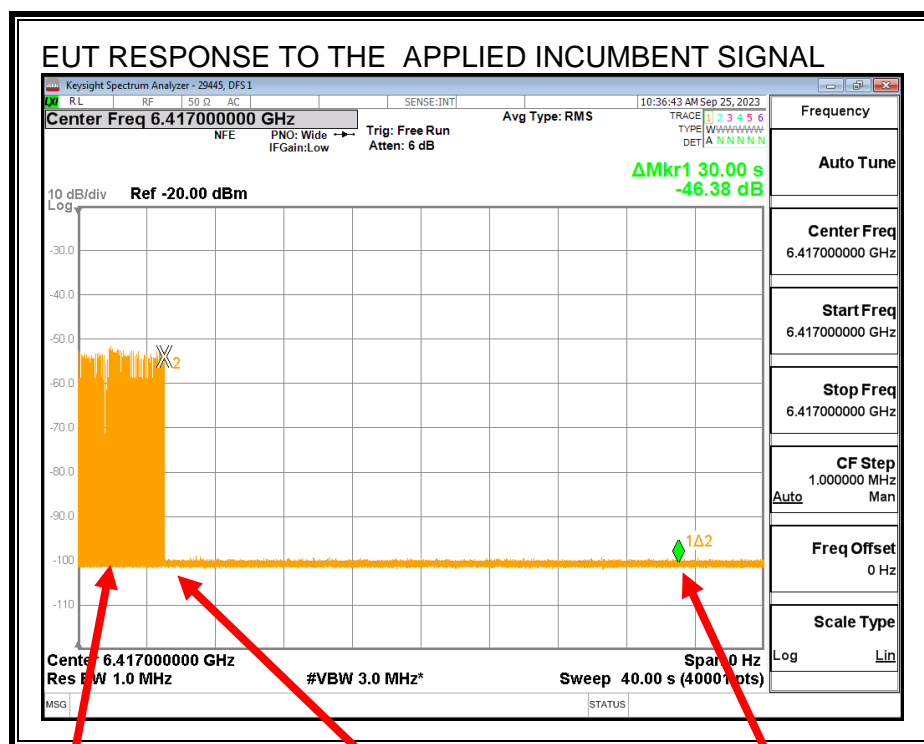

Normal Traffic

Application of Incumbent
Transmissions Ceased

Incumbent Removed

When the EUT detects the Incumbent AWGN Signal it switches channels and all transmissions on the test channel cease.

8.5.4. TABULATED TEST RESULTS

INCUMBENT SIGNAL DETECTION RESULTS

EUT Channel Center Frequency, f_{c1} (MHz)	6265
EUT Nominal Channel Bandwidth (MHz)	320
99% Occupied Bandwidth of the EUT (MHz)	314.73
EUT 99% OBW Lower Edge, F_L (MHz)	6107.64
EUT 99% OBW Upper Edge, F_H (MHz)	6422.37
99% Occupied Bandwidth of the Incumbent Signal (MHz)	9.9674
Test Frequency of Incumbent Signal (f_{c2}) Near EUT F_L (MHz)	6113
Test Frequency of Incumbent Signal at f_{c1} (MHz)	6265
Test Frequency of Incumbent Signal (f_{c3}) Near EUT F_H (MHz)	6417
Maximum Allowed Incumbent Amplitude at Antenna (dBm)	-62
Minimum Antenna Gain (dBi)	3.38
Maximum Allowed Incumbent Amplitude at Radio Port (dBm)	-58.6
Lowest Passing Measured Incumbent Signal Amplitude at f_{c2} (dBm)	-71.5
Margin (dBm)	-12.88
Result (PASS / FAIL)	PASS
Lowest Passing Measured Incumbent Signal Amplitude at f_{c1} (dBm)	-67.96
Margin (dBm)	-9.34
Result (PASS / FAIL)	PASS
Lowest Passing Measured Incumbent Signal Amplitude at f_{c3} (dBm)	-65.7
Margin (dBm)	-7.07
Result (PASS / FAIL)	PASS

Test Date: 09/25/23

Tested by: 29445

Test location: DFS 1

INCUMBENT SIGNAL DETECTION CERTAINTY RATE

Trial	AWGN Detected (Yes / No)		
	Incumbent AWGN at f_{c2}	Incumbent AWGN at f_{c1}	Incumbent AWGN at f_{c3}
1	Yes	Yes	Yes
2	Yes	Yes	Yes
3	Yes	Yes	Yes
4	Yes	Yes	Yes
5	Yes	Yes	Yes
6	Yes	Yes	Yes
7	Yes	Yes	Yes
8	Yes	Yes	Yes
9	Yes	Yes	Yes
10	Yes	No	Yes
Test Result	PASS	PASS	PASS

Test Date: 09/25/23

Tested by: 29445

Test location: DFS 1

A minimum detection rate of 90% is required for the EUT to be compliant.

8.5.5. Tx OPERATIONAL STATUS TEST RESULTS

Test Condition 4: 99% BW_{EUT} > 4 x 99% BW_{INC}

Incumbent AWGN at f_{c2} :

Measured Incumbent Power at the EUT Radio Port (dBm)	Antenna Gain (dBi)	Antenna Cable Path Loss (dB)	Adjusted Incumbent Power at the Antenna (dBm)	Detection Limit (dBm)	EUT Tx Status
-71.5	3.38	0	-74.88	-62	Ceased
-75.9	3.38	0	-79.28	-62	Minimal
-78.76	3.38	0	-82.14	-62	Normal

Incumbent AWGN at f_{c1} :

Measured Incumbent Power at the EUT Radio Port (dBm)	Antenna Gain (dBi)	Antenna Cable Path Loss (dB)	Adjusted Incumbent Power at the Antenna (dBm)	Detection Limit (dBm)	EUT Tx Status
-67.96	3.38	0	-71.34	-62	Ceased
-72.21	3.38	0	-75.59	-62	Minimal
	3.38	0	-3.38	-62	Normal

Incumbent AWGN at f_{c3} :

Measured Incumbent Power at the EUT Radio Port (dBm)	Antenna Gain (dBi)	Antenna Cable Path Loss (dB)	Adjusted Incumbent Power at the Antenna (dBm)	Detection Limit (dBm)	EUT Tx Status
-65.69	3.38	0	-69.07	-62	Ceased
-69.3	3.38	0	-72.68	-62	Minimal
-72.16	3.38	0	-75.54	-62	Normal

The path loss from the internal antenna assembly to the radio port is incorporated into the antenna gain figure.

Test Date: 07/25/23

Tested by: 29445

Test location: DFS 1

8.6. U-NII 6 BAND TEST CONDITION 1 RESULTS

TEST CONDITION 1 CRITERIA

$$99\% BW_{EUT} \leq 99\% BW_{INC}$$

The lowest and highest supported channel bandwidths do not meet the criteria for this test condition therefore this test was not performed.

8.7. U-NII 6 BAND TEST CONDITION 2 RESULTS

TEST CONDITION 2 CRITERIA

$$99\% BW_{INC} < 99\% BW_{EUT} \leq 2 \times 99\% BW_{INC}$$

8.7.1. TEST CHANNEL


All tests were performed with the EUT set to a channel center frequency of 6455 MHz and a nominal channel bandwidth of 20 MHz.

Only the lowest and highest supported channel bandwidths are required to be tested.


8.7.2. INCUMBENT SIGNAL PLOTS

All tests were performed with the Incumbent Signal frequency set to the test channel center frequency and a nominal 99% Occupied Power Bandwidth of 10 MHz.

INCUMBENT SIGNAL 99% OCCUPIED POWER BANDWIDTH

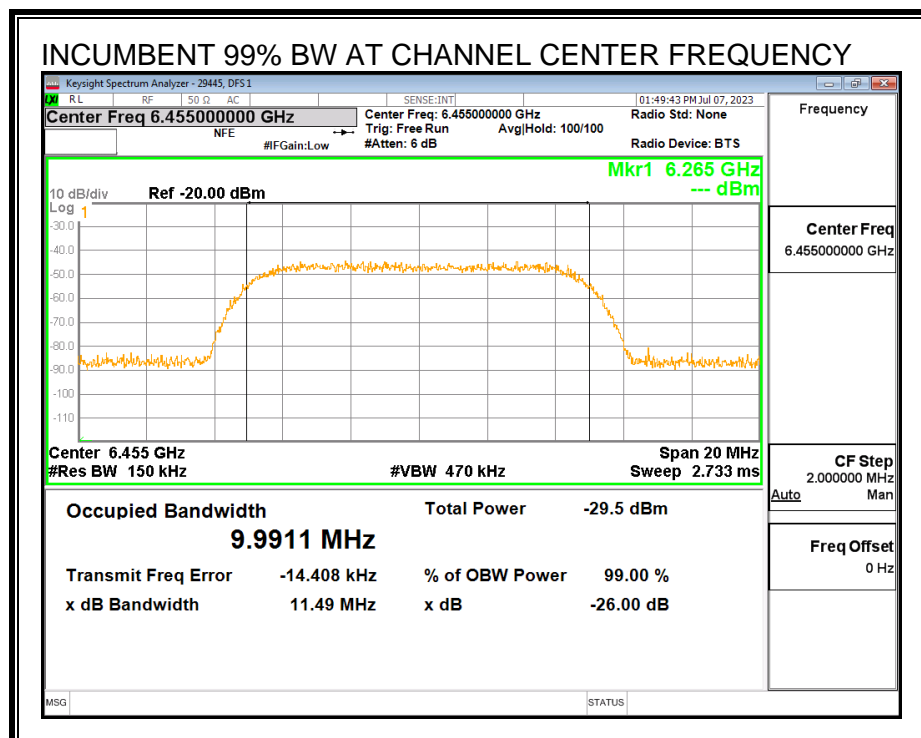


MINIMUM PASSING INCUMBENT SIGNAL POWER

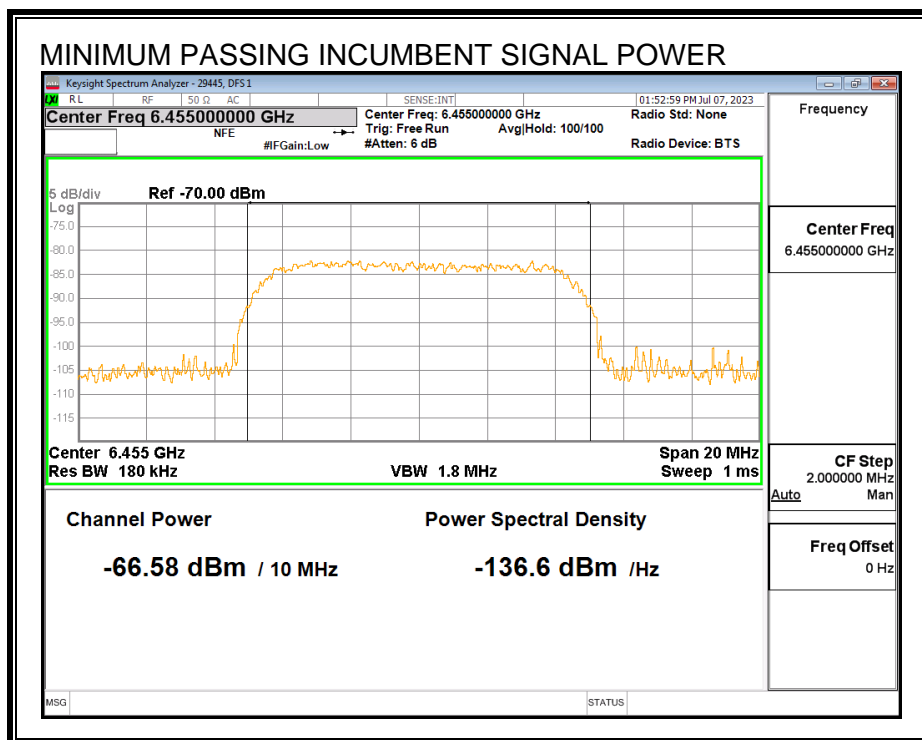


8.7.3. EUT TRANSMISSION PLOTS

EUT 99% OCCUPIED POWER BANDWIDTH

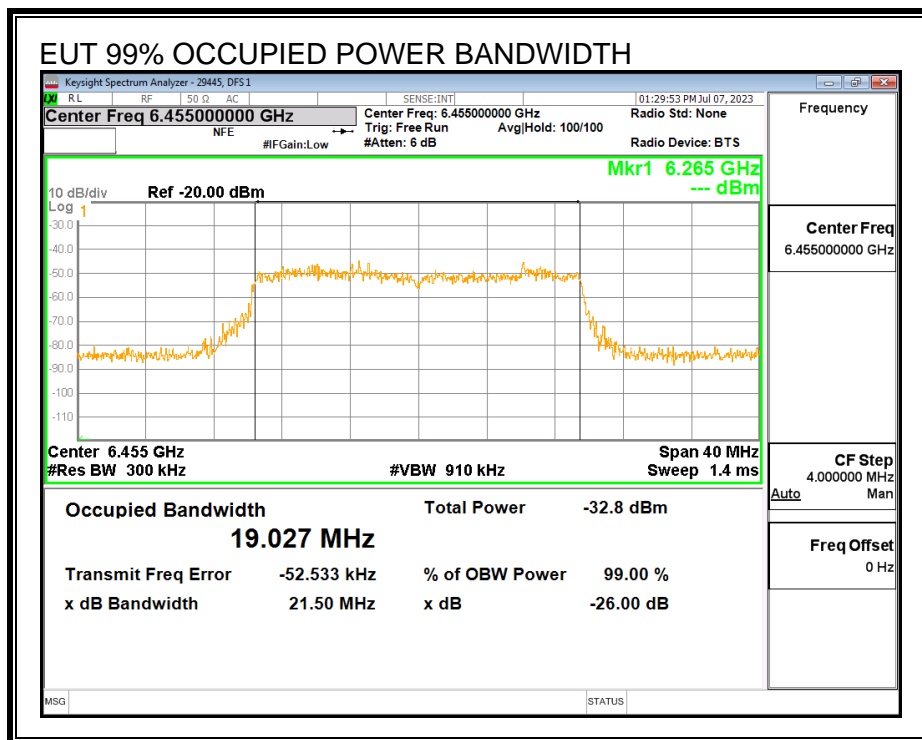

EUT RESPONSE TO THE APPLIED INCUMBENT SIGNAL

A link between the EUT and the Companion Device was established on the test channel. Traffic flowing from the EUT to the Companion Device was then initiated. A sweep was started, and the incumbent signal was continuously applied at approximately 5 seconds after the start of the sweep for a duration of 30 seconds and removed after the end of the observation period. Markers are placed at the beginning and end of the observation period.

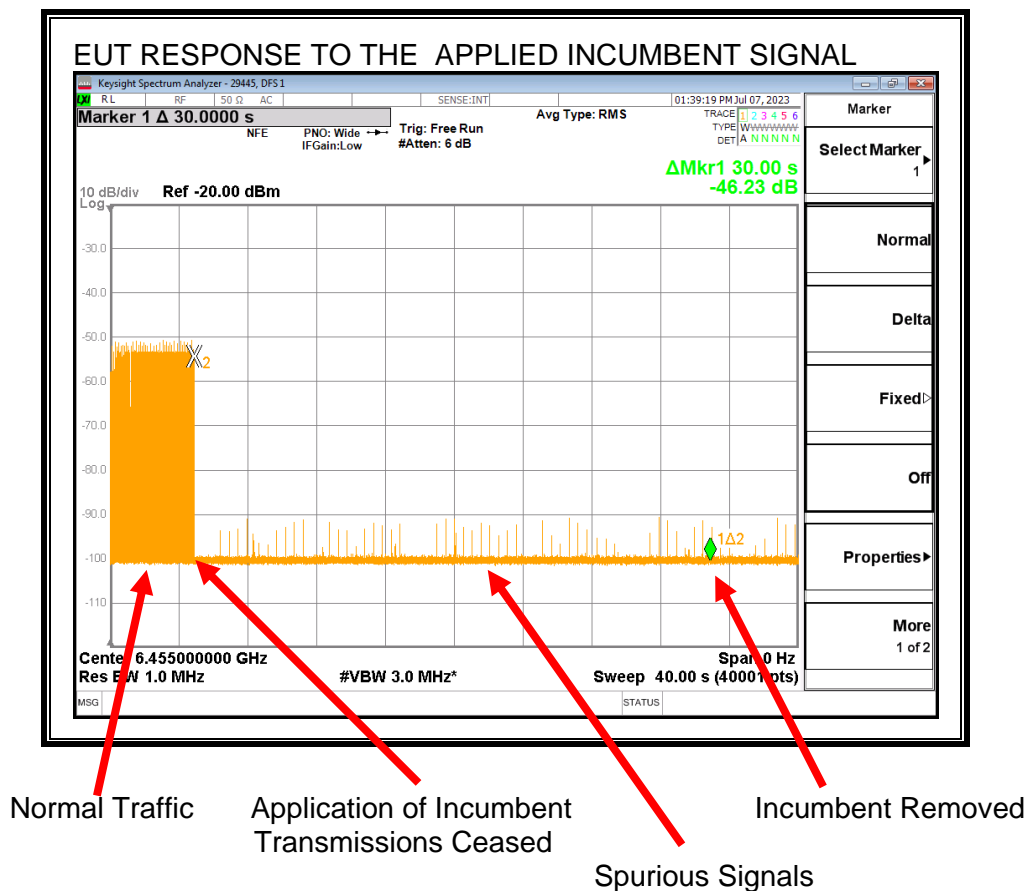

When the EUT detects the Incumbent AWGN Signal it switches channels and all signals with the exception of spurious signals on the test channel cease.

8.7.4. TABULATED TEST RESULTS

INCUMBENT SIGNAL DETECTION RESULTS

EUT Channel Center Frequency, f_{c1} (MHz)	6455
EUT Nominal Channel Bandwidth (MHz)	20
99% Occupied Bandwidth of the EUT (MHz)	19.027
EUT 99% OBW Lower Edge, F_L (MHz)	6445.49
EUT 99% OBW Upper Edge, F_H (MHz)	6464.51
Test Frequency of Incumbent Signal (MHz)	6455
Maximum Allowed Incumbent Amplitude at Antenna (dBm)	-62
Minimum Antenna Gain (dBi)	4.88
Maximum Allowed Incumbent Amplitude at Radio Port (dBm)	-57.1
Lowest Passing Measured Incumbent Signal Amplitude (dBm)	-66.6
Margin (dBm)	-9.46
Result (PASS / FAIL)	PASS

Test Date: 07/07/23

Tested by: 29445

Test location: DFS 1

INCUMBENT SIGNAL DETECTION CERTAINTY RATE

AWGN Detected (Yes / No)	
Trial	Incumbent AWGN at f_{c1}
1	Yes
2	Yes
3	No
4	Yes
5	Yes
6	Yes
7	Yes
8	Yes
9	Yes
10	Yes
Test Result	PASS

Test Date: 07/07/23

Tested by: 29445

Test location: DFS 1

A minimum detection rate of 90% is required for the EUT to be compliant.

8.7.5. Tx OPERATIONAL STATUS TEST RESULTS

Test Condition 2: $99\% BW_{INC} < 99\% BW_{EUT} \leq 2 \times 99\% BW_{INC}$

Incumbent AWGN at f_{c1} :

Measured Incumbent Power at the EUT Radio Port (dBm)	Antenna Gain (dBi)	Antenna Cable Path Loss (dB)	Adjusted Incumbent Power at the Antenna (dBm)	Detection Limit (dBm)	EUT Tx Status
-66.58	4.88	0	-71.46	-62	Ceased
-74.07	4.88	0	-78.95	-62	Minimal
-75.02	4.88	0	-79.9	-62	Normal

The path loss from the internal antenna assembly to the radio port is incorporated into the antenna gain figure.

Test Date: 07/07/23

Tested by: 29445

Test location: DFS 1

8.8. U-NII 6 BAND TEST CONDITION 3 RESULTS

TEST CONDITION 3 CRITERIA

$$2 \times 99\% BW_{INC} < 99\% BW_{EUT} \leq 4 \times 99\% BW_{INC}$$

The lowest and highest supported channel bandwidths do not meet the criteria for this test condition therefore this test was not performed.

8.9. U-NII 6 BAND TEST CONDITION 4 RESULTS

TEST CONDITION 4 CRITERIA

$$99\% BW_{EUT} > 4 \times 99\% BW_{INC}$$

8.9.1. TEST CHANNEL


All tests were performed with the EUT set to a channel center frequency of 6425 MHz and a nominal channel bandwidth of 320 MHz.

Only the lowest and highest supported channel bandwidths are required to be tested.


8.9.2. INCUMBENT SIGNAL PLOTS

All tests were performed with the Incumbent Signal frequency set to the test channel center frequency and a nominal 99% Occupied Power Bandwidth of 10 MHz.

INCUMBENT SIGNAL 99% OCCUPIED POWER BANDWIDTH

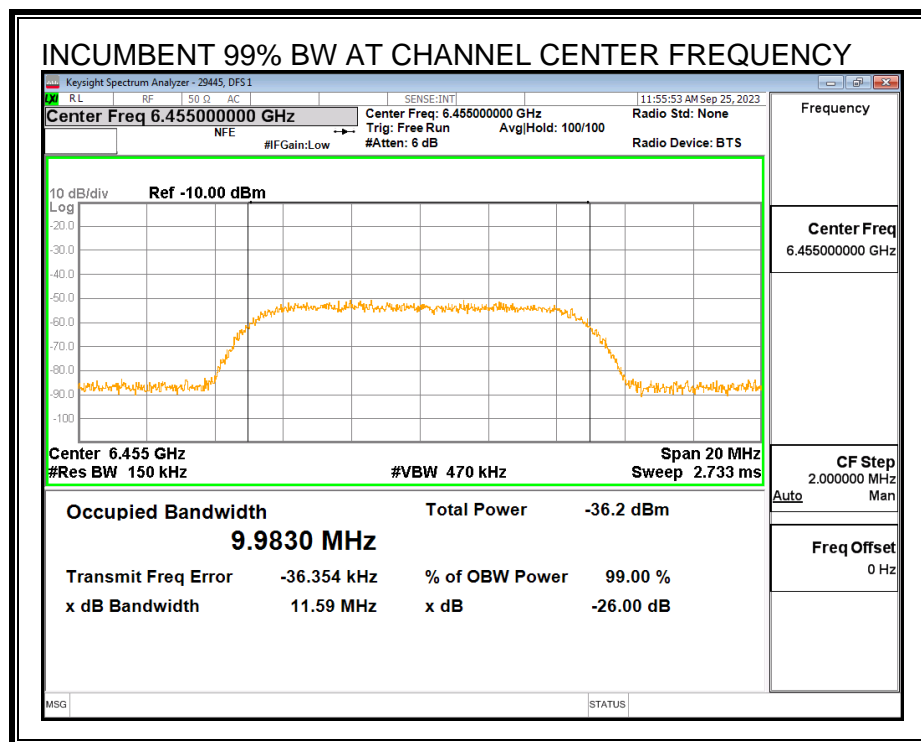


MINIMUM PASSING INCUMBENT SIGNAL POWER

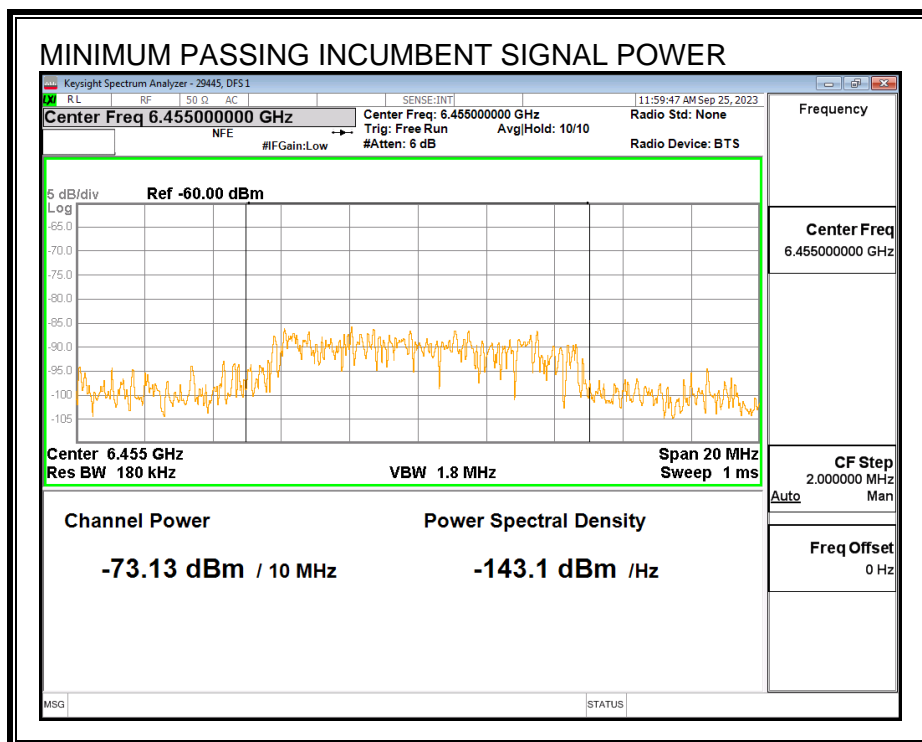


8.9.1. EUT TRANSMISSION PLOTS

EUT 99% OCCUPIED POWER BANDWIDTH

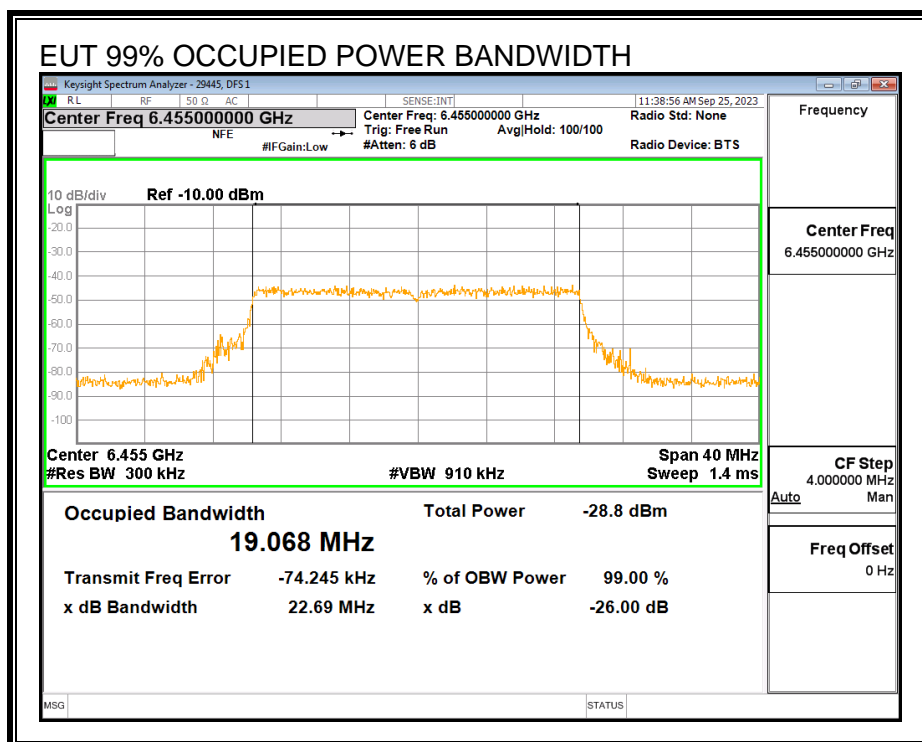


TRAFFIC WITHOUT THE INCUMBENT SIGNAL PRESENT

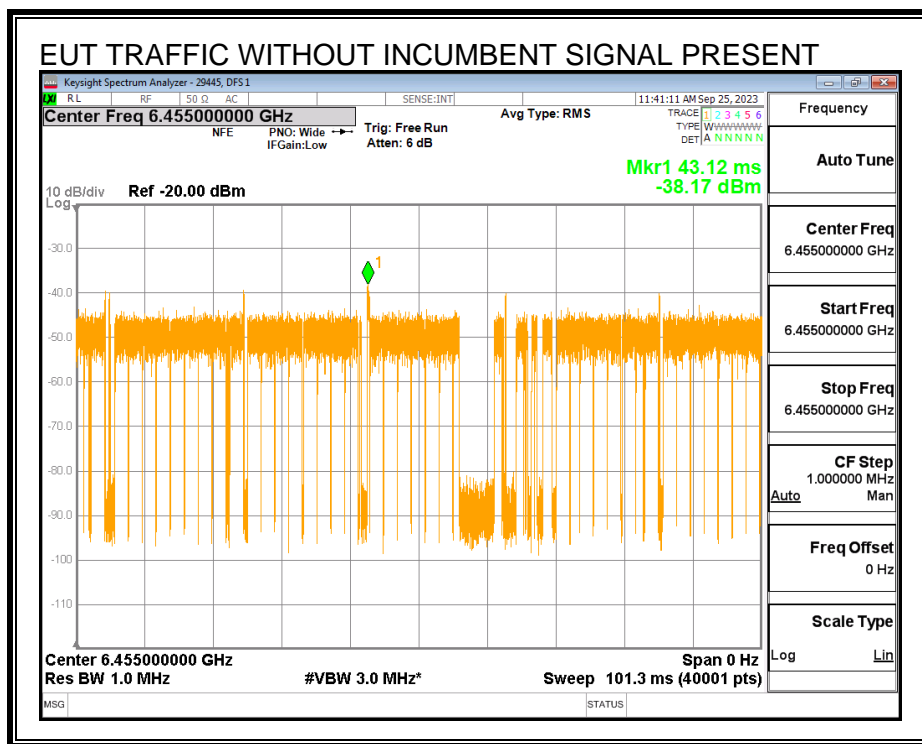

EUT RESPONSE TO THE APPLIED INCUMBENT SIGNAL

A link between the EUT and the Companion Device was established on the test channel. Traffic flowing from the EUT to the Companion Device was then initiated. A sweep was started and the incumbent signal was continuously applied at approximately 5 seconds after the start of the sweep for a duration of 30 seconds and removed after the end of the observation period. Markers are placed at the beginning and end of the observation period.

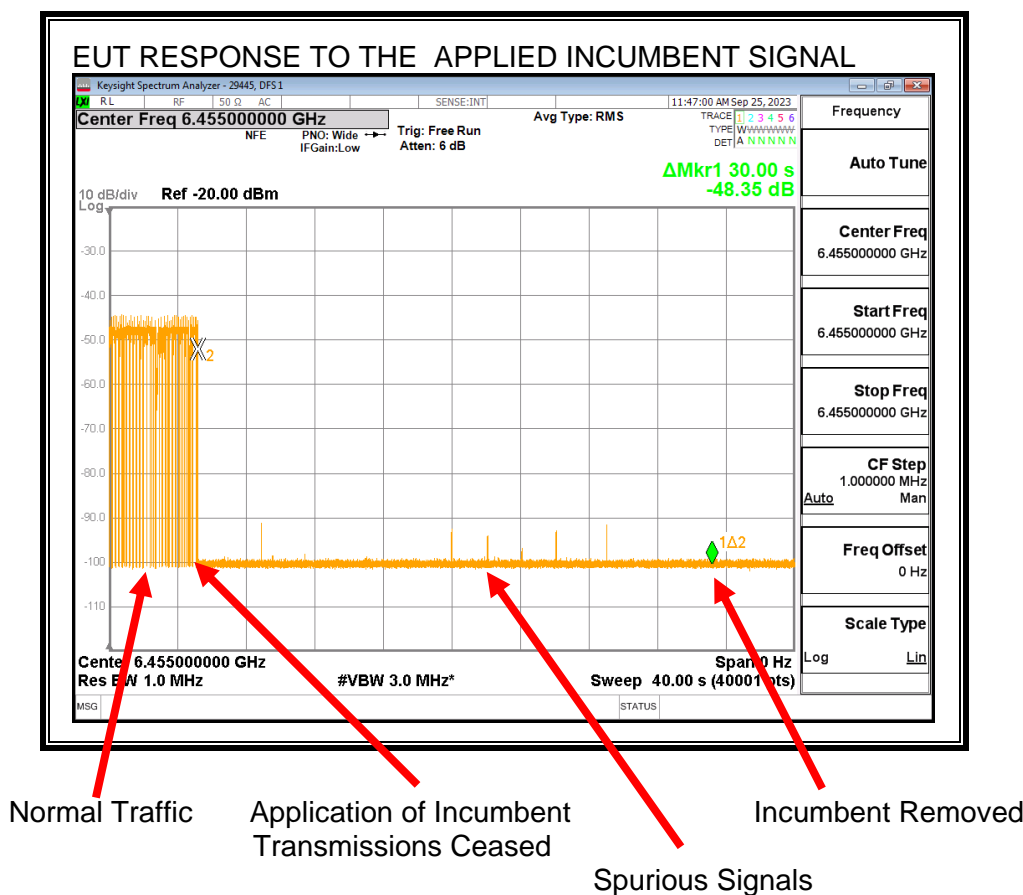

When the EUT detects the Incumbent AWGN Signal it switches channels and all signals with the exception of spurious signals on the test channel cease.

8.9.2. TABULATED TEST RESULTS

INCUMBENT SIGNAL DETECTION RESULTS

EUT Channel Center Frequency, f_{c1} (MHz)	6455
EUT Nominal Channel Bandwidth (MHz)	20
99% Occupied Bandwidth of the EUT (MHz)	19.068
EUT 99% OBW Lower Edge, F_L (MHz)	6445.47
EUT 99% OBW Upper Edge, F_H (MHz)	6464.53
Test Frequency of Incumbent Signal (MHz)	6455
Maximum Allowed Incumbent Amplitude at Antenna (dBm)	-62
Minimum Antenna Gain (dBi)	2.99
Maximum Allowed Incumbent Amplitude at Radio Port (dBm)	-59.0
Lowest Passing Measured Incumbent Signal Amplitude (dBm)	-73.1
Margin (dBm)	-14.12
Result (PASS / FAIL)	PASS

Test Date: 09/25/23

Tested by: 29445

Test location: DFS 1

INCUMBENT SIGNAL DETECTION CERTAINTY RATE

AWGN Detected (Yes / No)	
Trial	Incumbent AWGN at f_{c1}
1	Yes
2	Yes
3	Yes
4	Yes
5	Yes
6	Yes
7	Yes
8	Yes
9	Yes
10	No
Test Result	PASS

Test Date: 09/25/23

Tested by: 29445

Test location: DFS 1

A minimum detection rate of 90% is required for the EUT to be compliant.

8.9.3. Tx OPERATIONAL STATUS TEST RESULTS

Test Condition 2: $99\% BW_{INC} < 99\% BW_{EUT} \leq 2 \times 99\% BW_{INC}$

Incumbent AWGN at f_{c1} :

Measured Incumbent Power at the EUT Radio Port (dBm)	Antenna Gain (dBi)	Antenna Cable Path Loss (dB)	Adjusted Incumbent Power at the Antenna (dBm)	Detection Limit (dBm)	EUT Tx Status
-73.13	2.99	0	-76.12	-62	Ceased
-77.32	2.99	0	-80.31	-62	Minimal
-77.92	2.99	0	-80.91	-62	Normal

The path loss from the internal antenna assembly to the radio port is incorporated into the antenna gain figure.

Test Date: 09/25/23

Tested by: 29445

Test location: DFS 1

8.10. U-NII 6 BAND TEST CONDITION 3 RESULTS

TEST CONDITION 3 CRITERIA

$$2 \times 99\% BW_{INC} < 99\% BW_{EUT} \leq 4 \times 99\% BW_{INC}$$

The lowest and highest supported channel bandwidths do not meet the criteria for this test condition therefore this test was not performed.

8.11. U-NII 6 BAND TEST CONDITION 4 RESULTS

TEST CONDITION 4 CRITERIA

$$99\% BW_{EUT} > 4 \times 99\% BW_{INC}$$

8.11.1. TEST CHANNEL

All tests were performed with the EUT set to a channel center frequency of 6425 MHz and a nominal channel bandwidth of 320 MHz.


Only the lowest and highest supported channel bandwidths are required to be tested.

8.11.2. INCUMBENT SIGNAL PLOTS


All tests were performed with the Incumbent Signal frequency set to the test channel center frequency and a nominal 99% Occupied Power Bandwidth of 10 MHz.

INCUMBENT SIGNAL 99% OCCUPIED POWER BANDWIDTH

Lower Edge Incumbent Signal f_{c2} :

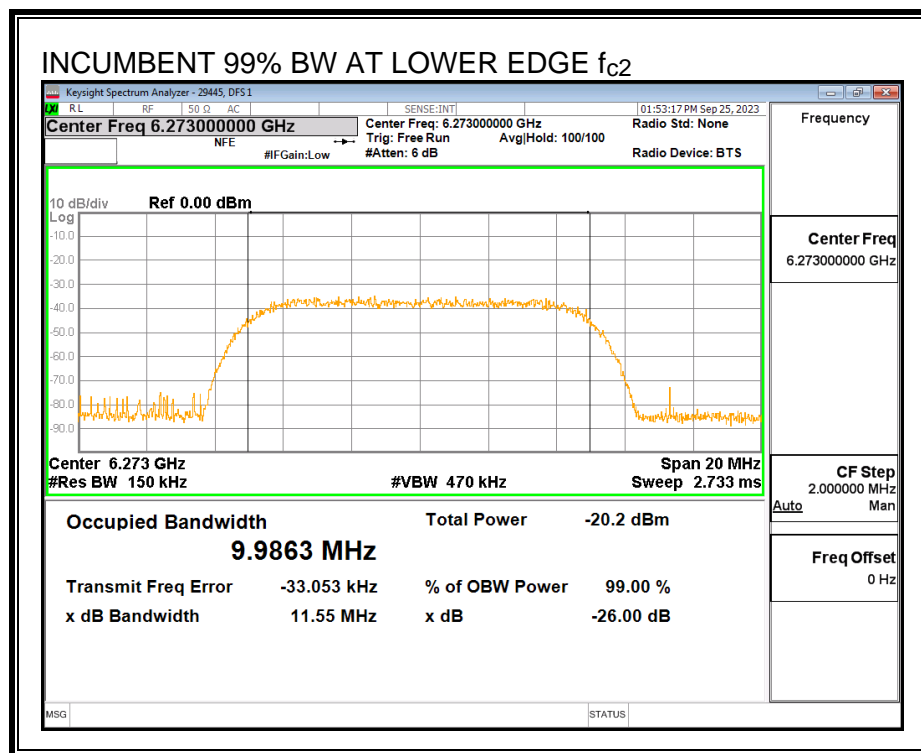

Center Frequency Incumbent Signal f_{c1} :

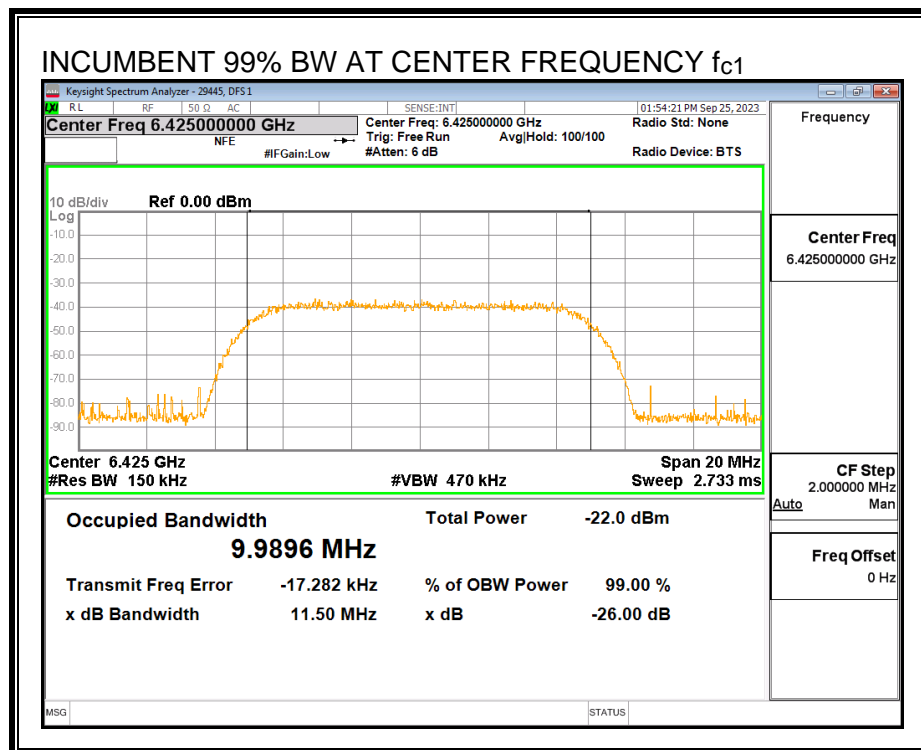

INCUMBENT 99% BW AT UPPER EDGE f_{c3}

Keysight Spectrum Analyzer - 29445, DFS1

RL RF 50 Ω AC SENSE:INT

Center Freq 6.577000000 GHz Center Freq: 6.577000000 GHz Radio Std: None
 NFE Trig: Free Run Avg/Hold: 100/100
 #IFGain:Low #Atten: 6 dB Radio Device: BTS

01:56:18 PM Sep 25, 2023

Frequency

Center Freq 6.577000000 GHz

10 dB/div Ref 0.00 dBm

Center 6.577 GHz Span 20 MHz
 #Res BW 150 kHz #VBW 470 kHz Sweep 2.733 ms

Occupied Bandwidth		Total Power	
9.9956 MHz		-22.3 dBm	

Transmit Freq Error		% of OBW Power	
1.373 kHz		99.00 %	

x dB Bandwidth		x dB	
11.58 MHz		-26.00 dB	


Auto Man

Freq Offset 0 Hz


MSG STATUS

MINIMUM PASSING INCUMBENT SIGNAL POWER


Lower Edge Incumbent Signal f_{c2} :

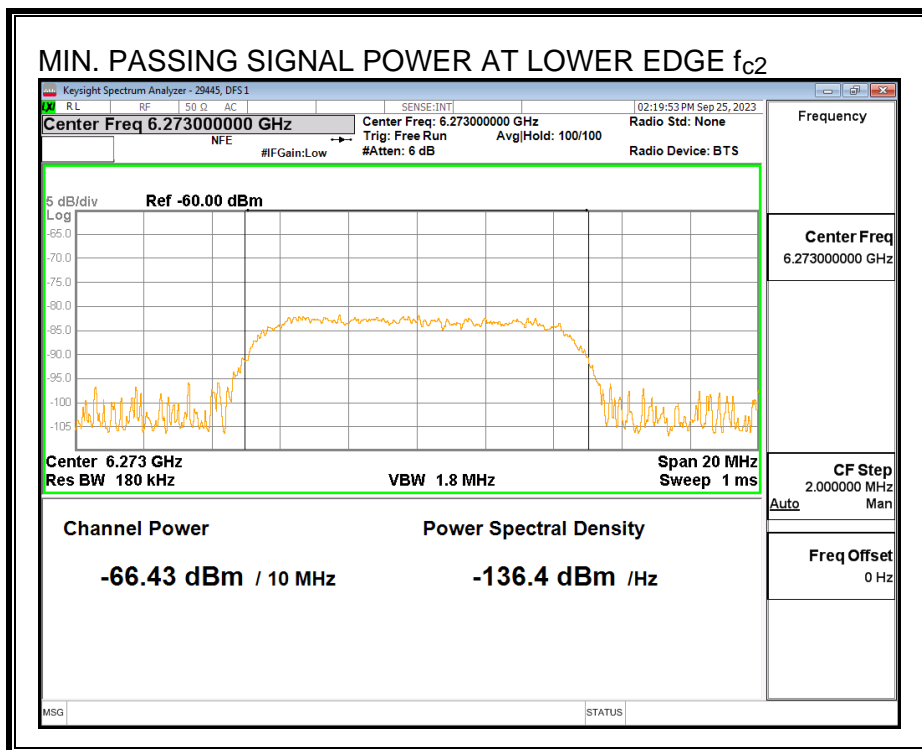

Center Frequency Incumbent Signal f_{c1} :

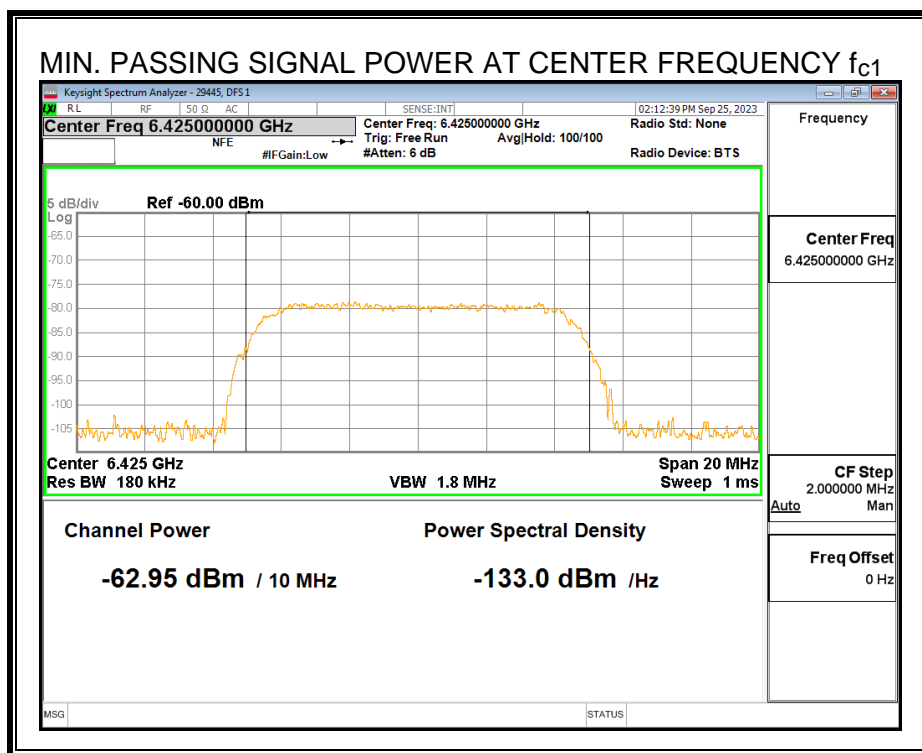


Upper Edge Incumbent Signal f_{c3} :

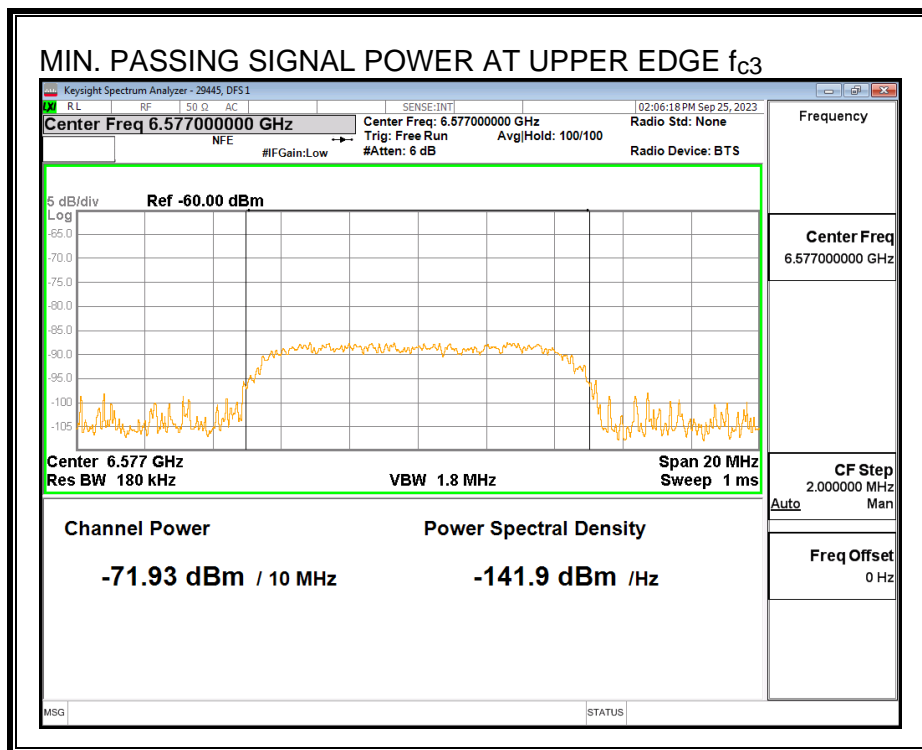


8.11.3. EUT TRANSMISSION PLOTS

EUT 99% OCCUPIED POWER BANDWIDTH

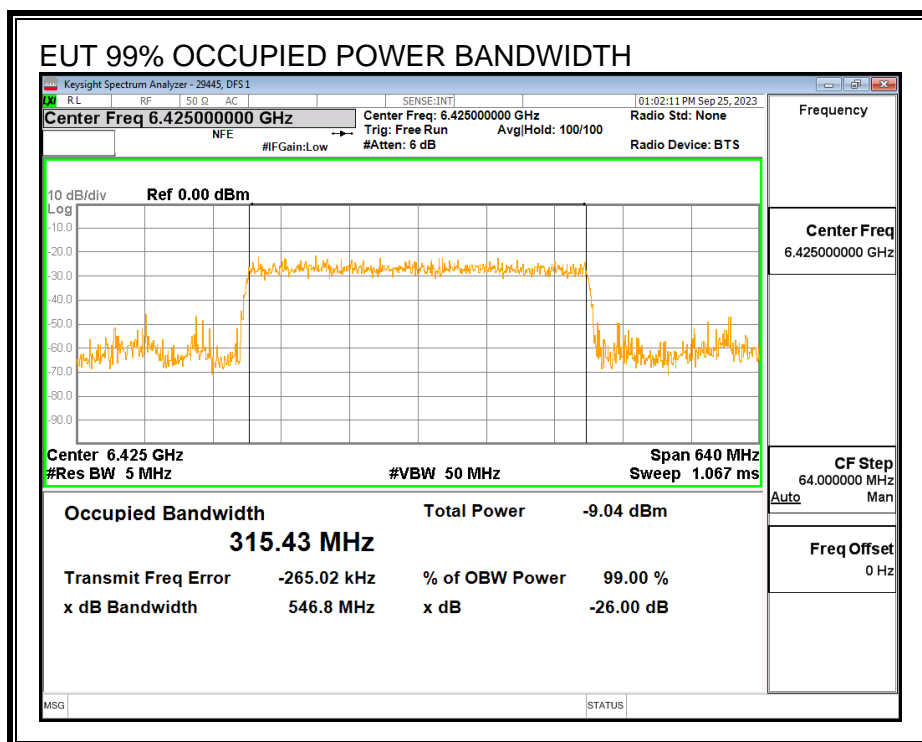


TRAFFIC WITHOUT THE INCUMBENT SIGNAL PRESENT


Lower Edge f_{c2} :

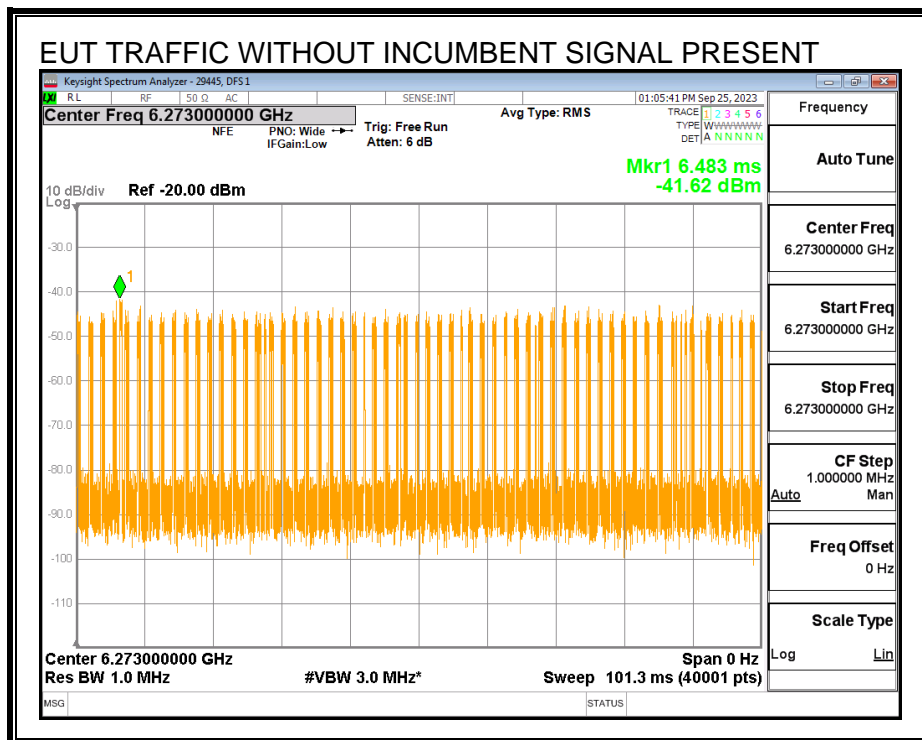

Center Frequency f_{c1} :

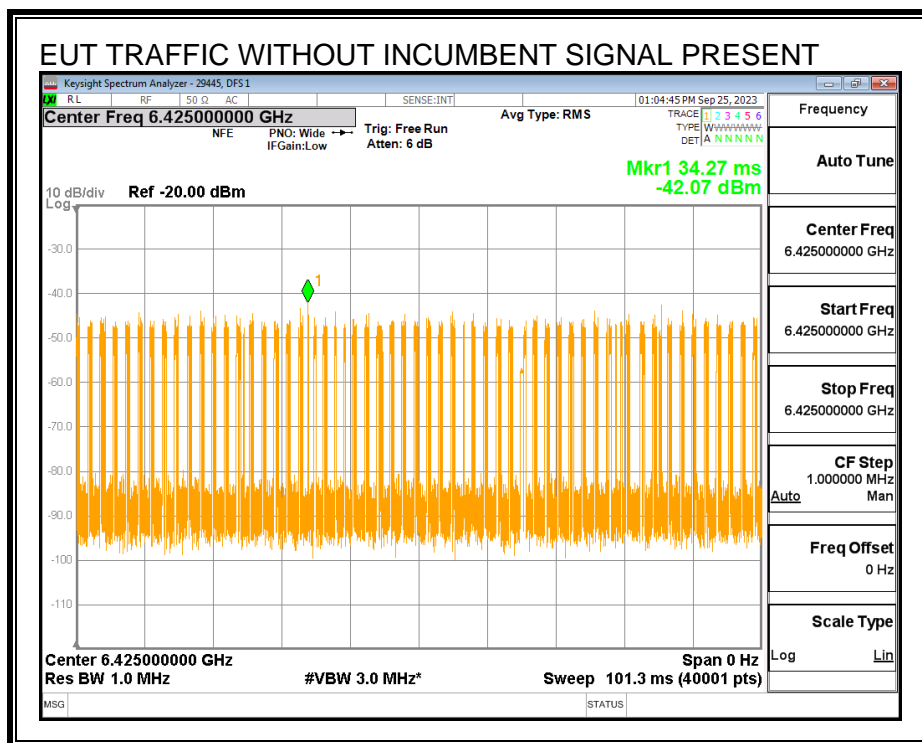


Upper Edge f_{c3} :

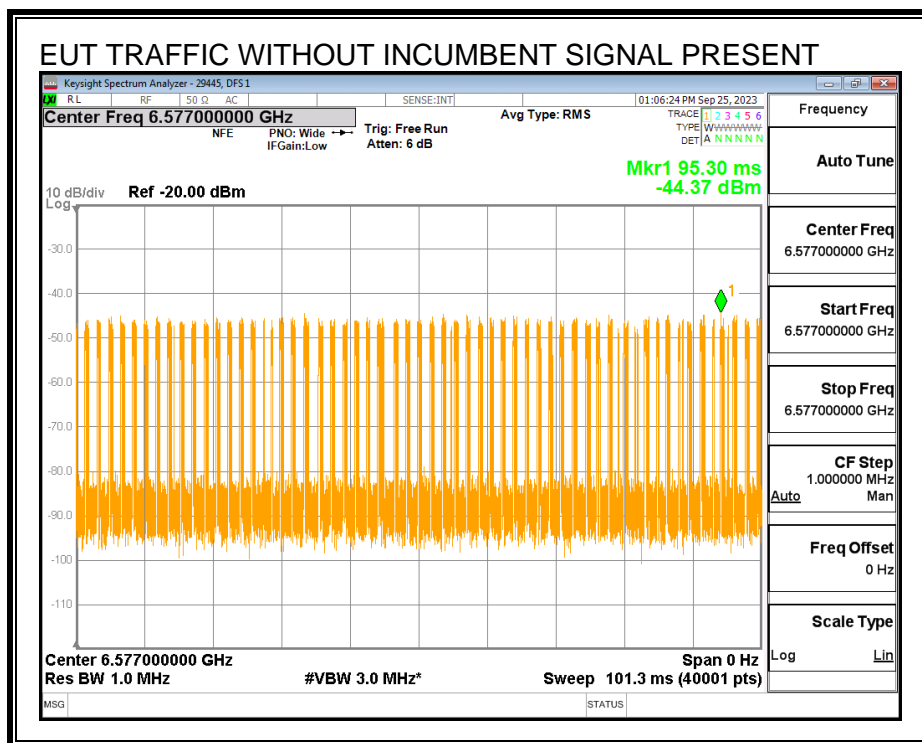

EUT RESPONSE TO THE APPLIED INCUMBENT SIGNAL


A link between the EUT and the Companion Device was established on the test channel. Traffic flowing from the EUT to the Companion Device was then initiated. A sweep was started and the incumbent signal was continuously applied at approximately 5 seconds after the start of the sweep for a duration of 30 seconds and removed after the end of the observation period. Markers are placed at the beginning and end of the observation period.

Lower Edge Incumbent Signal f_{c2} :

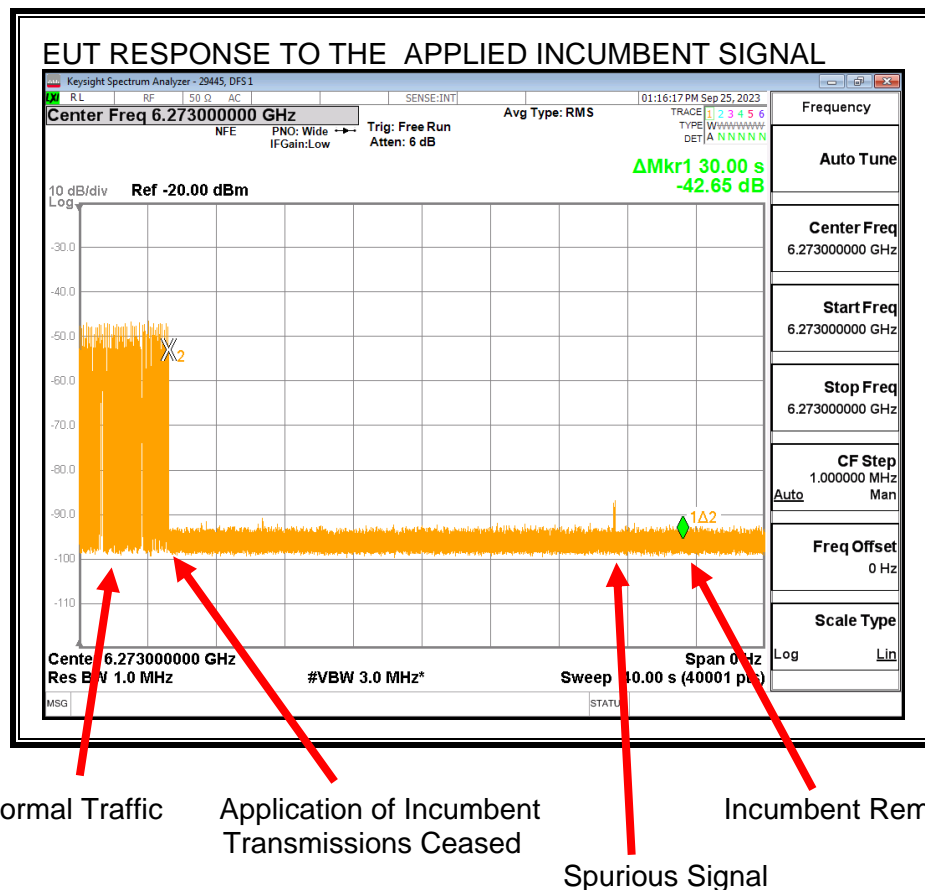

When the EUT detects the Incumbent AWGN Signal it switches channels and all signals with the exception of spurious signals on the test channel cease.

Center Frequency Incumbent Signal f_{c1} :

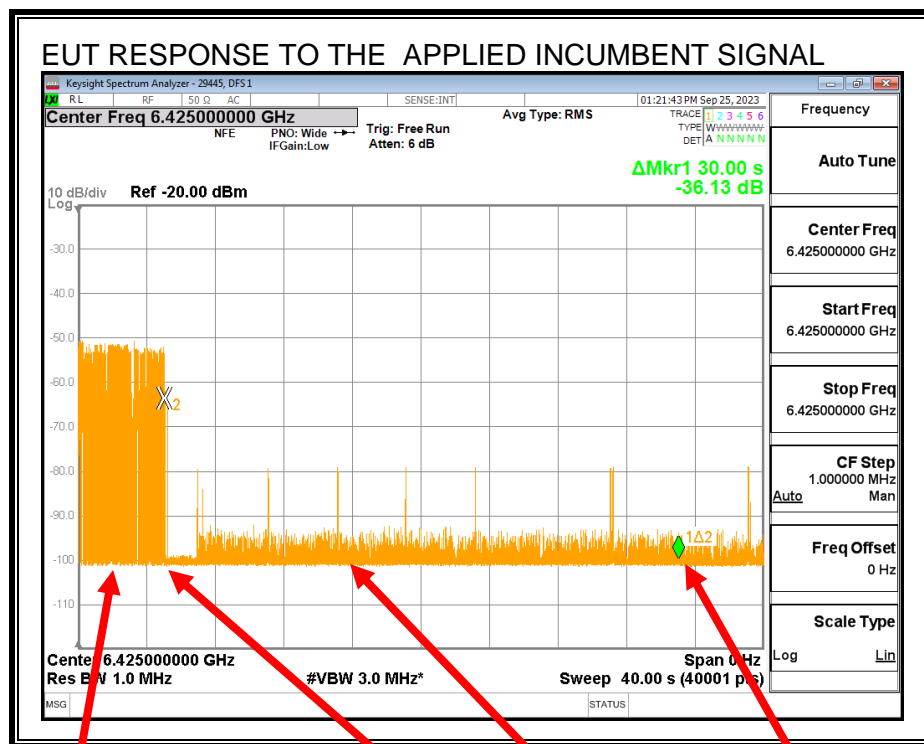

Normal Traffic


Application of Incumbent
Transmissions Ceased

Adjacent Channel Signals

Incumbent Removed

When the EUT detects the Incumbent AWGN Signal it switches to channel 65 and all signals on the test channel cease. Observable transmissions during the monitoring period are from the new adjacent channel to which the EUT has switched.

Upper Edge Incumbent Signal f_{c3} :

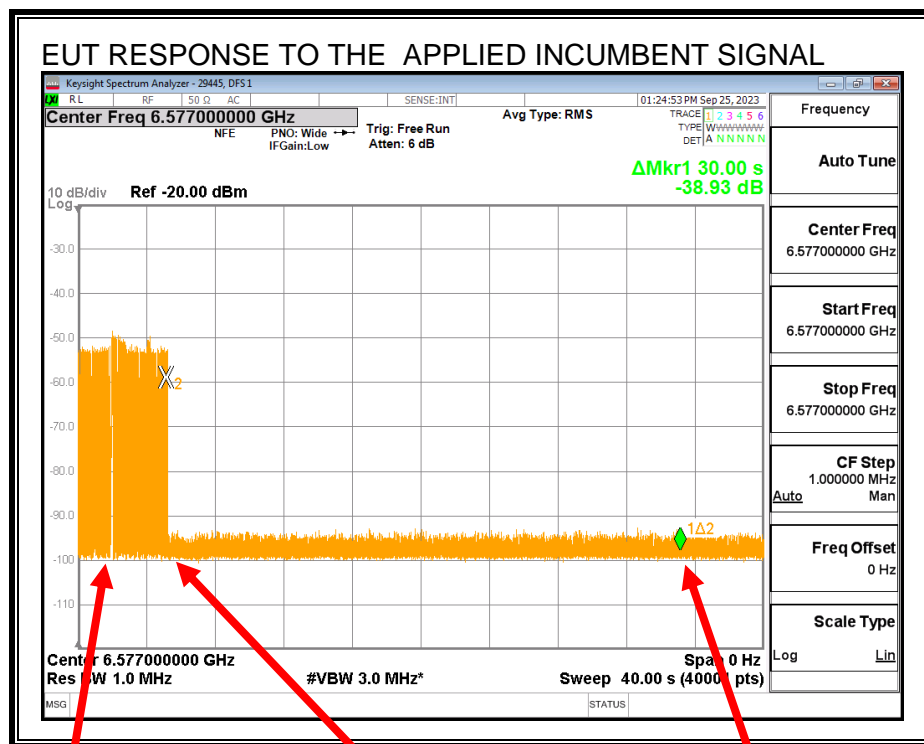

Normal Traffic

Application of Incumbent
Transmissions Ceased

Incumbent Removed

When the EUT detects the Incumbent AWGN Signal it switches to channel 65 and all signals on the test channel cease.

8.11.4. TABULATED TEST RESULTS

INCUMBENT SIGNAL DETECTION RESULTS

EUT Channel Center Frequency, f_{c1} (MHz)	6425
EUT Nominal Channel Bandwidth (MHz)	320
99% Occupied Bandwidth of the EUT (MHz)	315.43
EUT 99% OBW Lower Edge, F_L (MHz)	6267.29
EUT 99% OBW Upper Edge, F_H (MHz)	6582.72
99% Occupied Bandwidth of the Incumbent Signal (MHz)	9.9896
Test Frequency of Incumbent Signal (f_{c2}) Near EUT F_L (MHz)	6273
Test Frequency of Incumbent Signal at f_{c1} (MHz)	6425
Test Frequency of Incumbent Signal (f_{c3}) Near EUT F_H (MHz)	6577
Maximum Allowed Incumbent Amplitude at Antenna (dBm)	-62
Minimum Antenna Gain (dBi)	2.99
Maximum Allowed Incumbent Amplitude at Radio Port (dBm)	-59.0
Lowest Passing Measured Incumbent Signal Amplitude at f_{c2} (dBm)	-66.43
Margin (dBm)	-7.42
Result (PASS / FAIL)	PASS
Lowest Passing Measured Incumbent Signal Amplitude at f_{c1} (dBm)	-62.95
Margin (dBm)	-3.94
Result (PASS / FAIL)	PASS
Lowest Passing Measured Incumbent Signal Amplitude at f_{c3} (dBm)	-71.93
Margin (dBm)	-12.92
Result (PASS / FAIL)	PASS

Test Date: 09/25/23

Tested by: 29445

Test location: DFS 1

INCUMBENT SIGNAL DETECTION CERTAINTY RATE

Trial	AWGN Detected (Yes / No)		
	Incumbent AWGN at f_{c2}	Incumbent AWGN at f_{c1}	Incumbent AWGN at f_{c3}
1	Yes	Yes	Yes
2	Yes	Yes	Yes
3	Yes	Yes	Yes
4	Yes	Yes	Yes
5	Yes	Yes	Yes
6	Yes	Yes	Yes
7	Yes	Yes	Yes
8	Yes	Yes	Yes
9	Yes	Yes	No
10	Yes	Yes	Yes
Test Result	PASS	PASS	PASS

Test Date: 09/25/23

Tested by: 29445

Test location: DFS 1

A minimum detection rate of 90% is required for the EUT to be compliant.

8.11.5. Tx OPERATIONAL STATUS TEST RESULTS

-Test Condition 4: 99% BW_{EUT} > 4 x 99% BW_{INC}

Incumbent AWGN at f_{c2}:

Measured Incumbent Power at the EUT Radio Port (dBm)	Antenna Gain (dBi)	Antenna Cable Path Loss (dB)	Adjusted Incumbent Power at the Antenna (dBm)	Detection Limit (dBm)	EUT Tx Status
-66.43	2.99	0	-2.99	-62	Ceased
-69.81	2.99	0	-2.99	-62	Minimal
-72.23	2.99	0	-2.99	-62	Normal

Incumbent AWGN at f_{c1}:

Measured Incumbent Power at the EUT Radio Port (dBm)	Antenna Gain (dBi)	Antenna Cable Path Loss (dB)	Adjusted Incumbent Power at the Antenna (dBm)	Detection Limit (dBm)	EUT Tx Status
-62.95	2.99	0	-2.99	-62	Ceased
-66.79	2.99	0	-2.99	-62	Minimal
-68.68	2.99	0	-2.99	-62	Normal

Incumbent AWGN at f_{c3}:

Measured Incumbent Power at the EUT Radio Port (dBm)	Antenna Gain (dBi)	Antenna Cable Path Loss (dB)	Adjusted Incumbent Power at the Antenna (dBm)	Detection Limit (dBm)	EUT Tx Status
-71.93	2.99	0	-2.99	-62	Ceased
-74.68	2.99	0	-2.99	-62	Minimal
-77.36	2.99	0	-2.99	-62	Normal

The path loss from the internal antenna assembly to the radio port is incorporated into the antenna gain figure.

Test Date: 09/25/23

Tested by: 29445

Test location: DFS 1

8.12. U-NII 7 BAND TEST CONDITION 1 RESULTS

TEST CONDITION 1 CRITERIA

$$99\% BW_{EUT} \leq 99\% BW_{INC}$$

The lowest and highest supported channel bandwidths do not meet the criteria for this test condition therefore this test was not performed.

8.13. U-NII 7 BAND TEST CONDITION 2 RESULTS

TEST CONDITION 2 CRITERIA

$$99\% BW_{INC} < 99\% BW_{EUT} \leq 2 \times 99\% BW_{INC}$$

8.13.1. TEST CHANNEL


All tests were performed with the EUT set to a channel center frequency of 6695 MHz and a nominal channel bandwidth of 20 MHz.

Only the lowest and highest supported channel bandwidths are required to be tested.


8.13.2. INCUMBENT SIGNAL PLOTS

All tests were performed with the Incumbent Signal frequency set to the test channel center frequency and a nominal 99% Occupied Power Bandwidth of 10 MHz.

INCUMBENT SIGNAL 99% OCCUPIED POWER BANDWIDTH

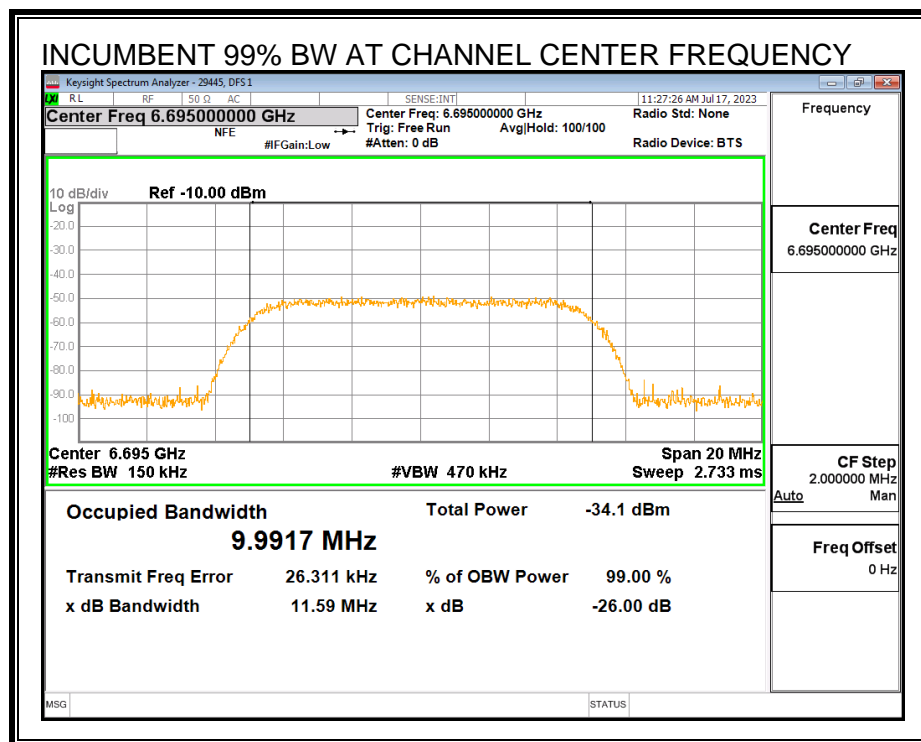


MINIMUM PASSING INCUMBENT SIGNAL POWER

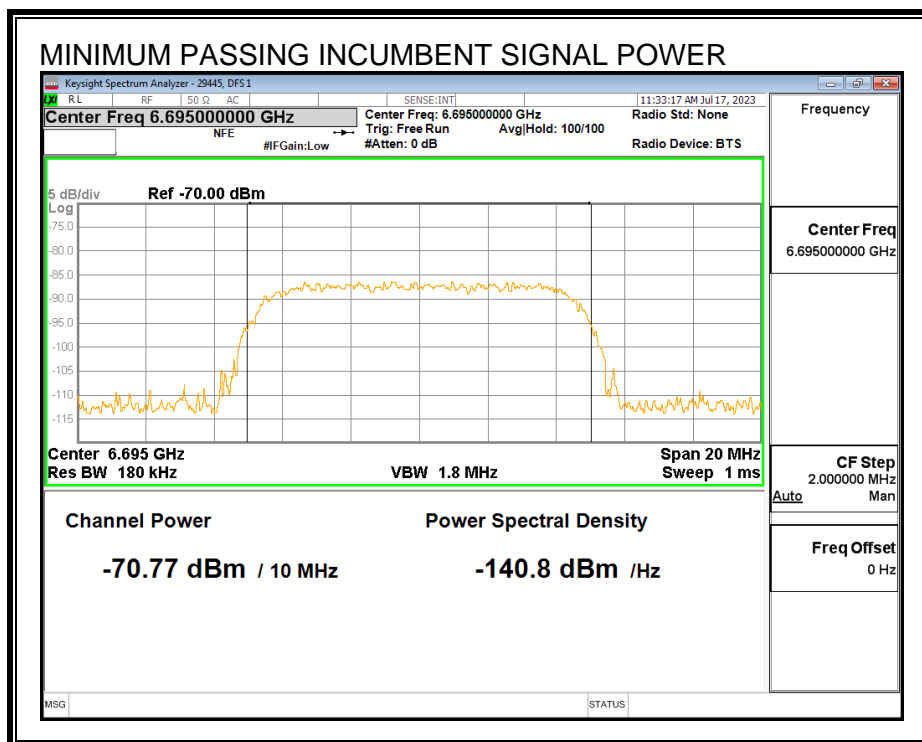


8.13.3. EUT TRANSMISSION PLOTS

EUT 99% OCCUPIED POWER BANDWIDTH

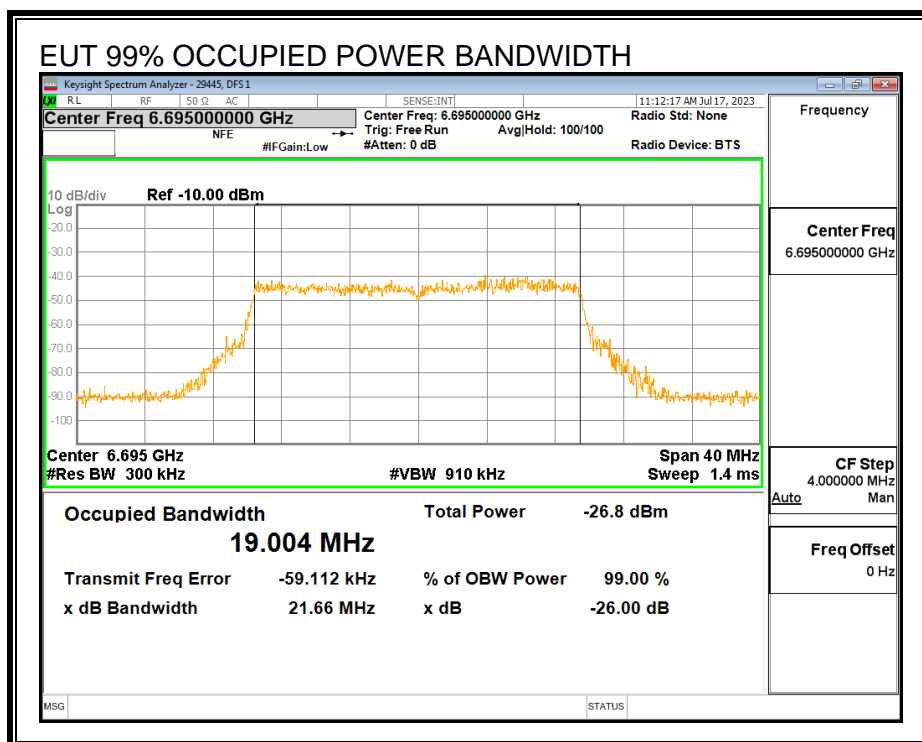

EUT RESPONSE TO THE APPLIED INCUMBENT SIGNAL

A link between the EUT and the Companion Device was established on the test channel. Traffic flowing from the EUT to the Companion Device was then initiated. A sweep was started, and the incumbent signal was continuously applied at approximately 5 seconds after the start of the sweep for a duration of 30 seconds and removed after the end of the observation period. Markers are placed at the beginning and end of the observation period.

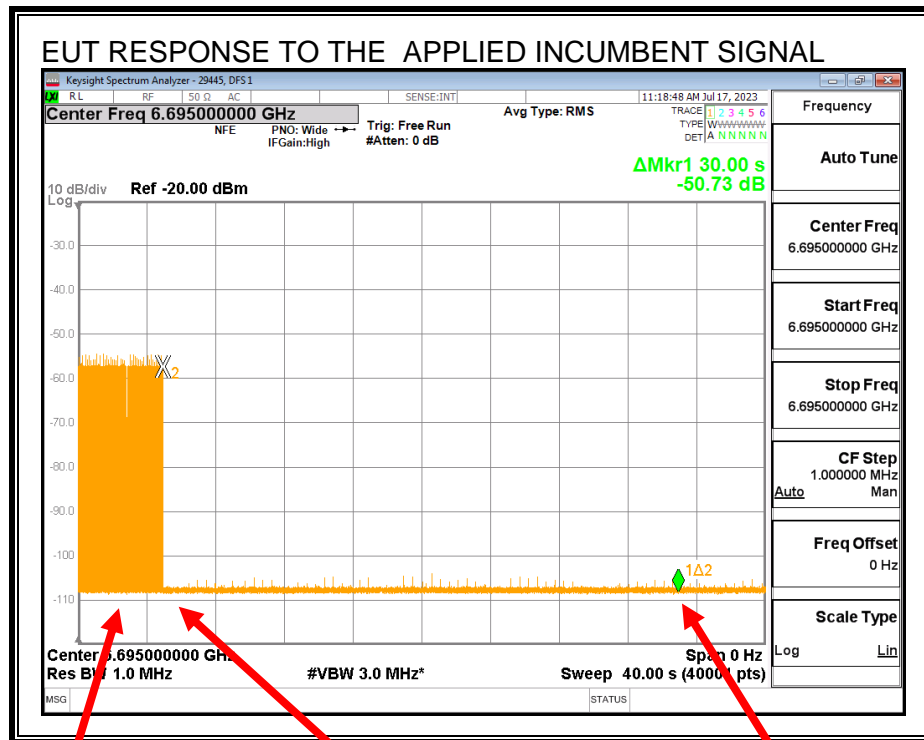

Normal Traffic

Application of Incumbent
Transmissions Ceased

Incumbent Removed

When the EUT detects the Incumbent AWGN Signal it switches channels and all transmissions on the test channel cease.

8.13.4. TABULATED TEST RESULTS

INCUMBENT SIGNAL DETECTION RESULTS

EUT Channel Center Frequency, f_{c1} (MHz)	6695
EUT Nominal Channel Bandwidth (MHz)	20
99% Occupied Bandwidth of the EUT (MHz)	19.004
EUT 99% OBW Lower Edge, F_L (MHz)	6685.50
EUT 99% OBW Upper Edge, F_H (MHz)	6704.50
Test Frequency of Incumbent Signal (MHz)	6695
Maximum Allowed Incumbent Amplitude at Antenna (dBm)	-62
Minimum Antenna Gain (dBi)	3.12
Maximum Allowed Incumbent Amplitude at Radio Port (dBm)	-58.88
Lowest Passing Measured Incumbent Signal Amplitude (dBm)	-70.77
Margin (dBm)	-11.89
Result (PASS / FAIL)	PASS

Test Date: 07/17/23

Tested by: 29445

Test location: DFS 1

INCUMBENT SIGNAL DETECTION CERTAINTY RATE

AWGN Detected (Yes / No)	
Trial	Incumbent AWGN at f_{c1}
1	Yes
2	Yes
3	Yes
4	No
5	Yes
6	Yes
7	Yes
8	Yes
9	Yes
10	Yes
Test Result	PASS

Test Date: 07/17/23

Tested by: 29445

Test location: DFS 1

A minimum detection rate of 90% is required for the EUT to be compliant.

8.13.5. Tx OPERATIONAL STATUS TEST RESULTS

Test Condition 2: $99\% BW_{INC} < 99\% BW_{EUT} \leq 2 \times 99\% BW_{INC}$

Incumbent AWGN at f_{c1} :

Measured Incumbent Power at the EUT Radio Port (dBm)	Antenna Gain (dBi)	Antenna Cable Path Loss (dB)	Adjusted Incumbent Power at the Antenna (dBm)	Detection Limit (dBm)	EUT Tx Status
-70.77	3.12	0	-73.89	-62	Ceased
-73.17	3.12	0	-76.29	-62	Minimal
-75.06	3.12	0	-78.18	-62	Normal

The path loss from the internal antenna assembly to the radio port is incorporated into the antenna gain figure.

Test Date: 07/17/23

Tested by: 29445

Test location: DFS 1

8.14. U-NII 7 BAND TEST CONDITION 3 RESULTS

TEST CONDITION 3 CRITERIA

$$2 \times 99\% BW_{INC} < 99\% BW_{EUT} \leq 4 \times 99\% BW_{INC}$$

The lowest and highest supported channel bandwidths do not meet the criteria for this test condition therefore this test was not performed.

8.15. U-NII 7 BAND TEST CONDITION 4 RESULTS

TEST CONDITION 4 CRITERIA

$$99\% BW_{EUT} > 4 \times 99\% BW_{INC}$$

8.15.1. TEST CHANNEL

All tests were performed with the EUT set to a channel center frequency of 6745 MHz and a nominal channel bandwidth of 320 MHz.


Only the lowest and highest supported channel bandwidths are required to be tested.

8.15.2. INCUMBENT SIGNAL PLOTS


All tests were performed with the Incumbent Signal frequency set to the test channel center frequency and a nominal 99% Occupied Power Bandwidth of 10 MHz.

INCUMBENT SIGNAL 99% OCCUPIED POWER BANDWIDTH


Lower Edge Incumbent Signal f_{c2} :

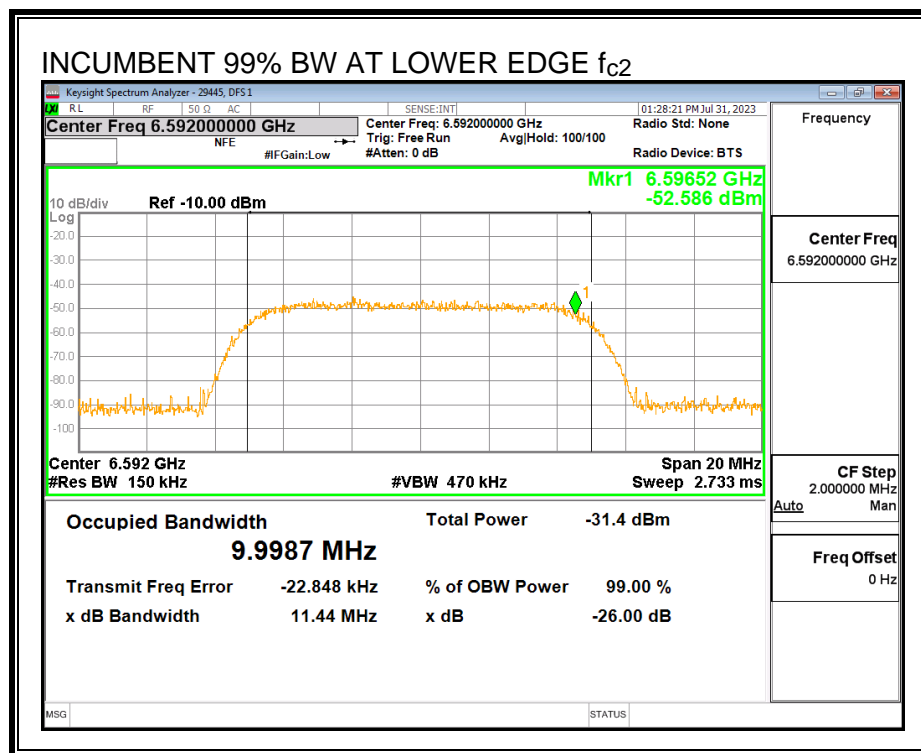

Center Frequency Incumbent Signal f_{c1} :

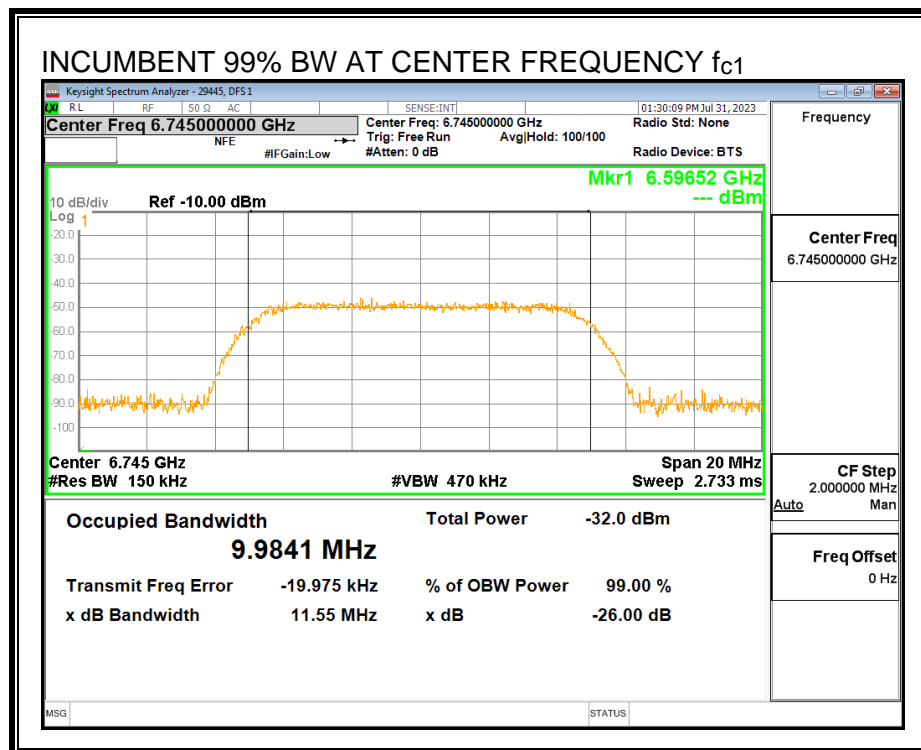


Upper Edge Incumbent Signal f_{c3} :

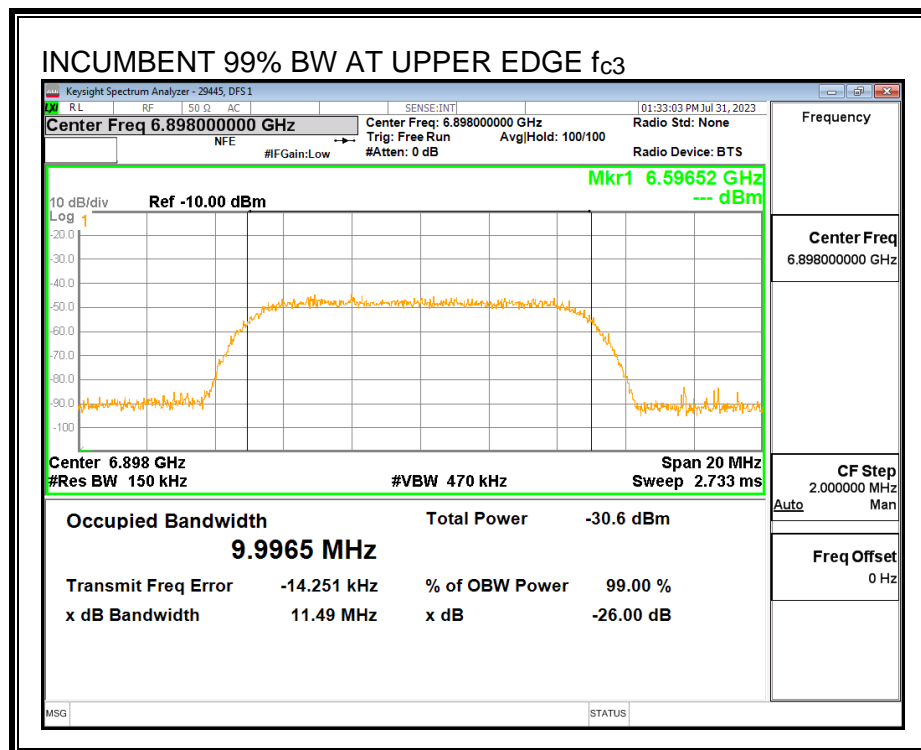


MINIMUM PASSING INCUMBENT SIGNAL POWER


Lower Edge Incumbent Signal f_{c2} :

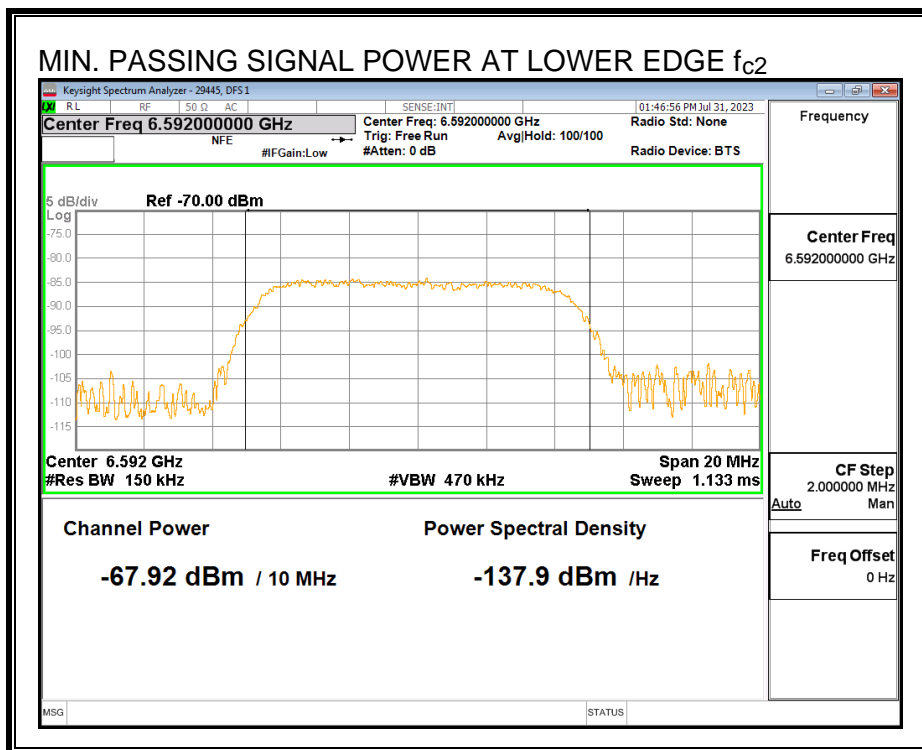

Center Frequency Incumbent Signal f_{c1} :

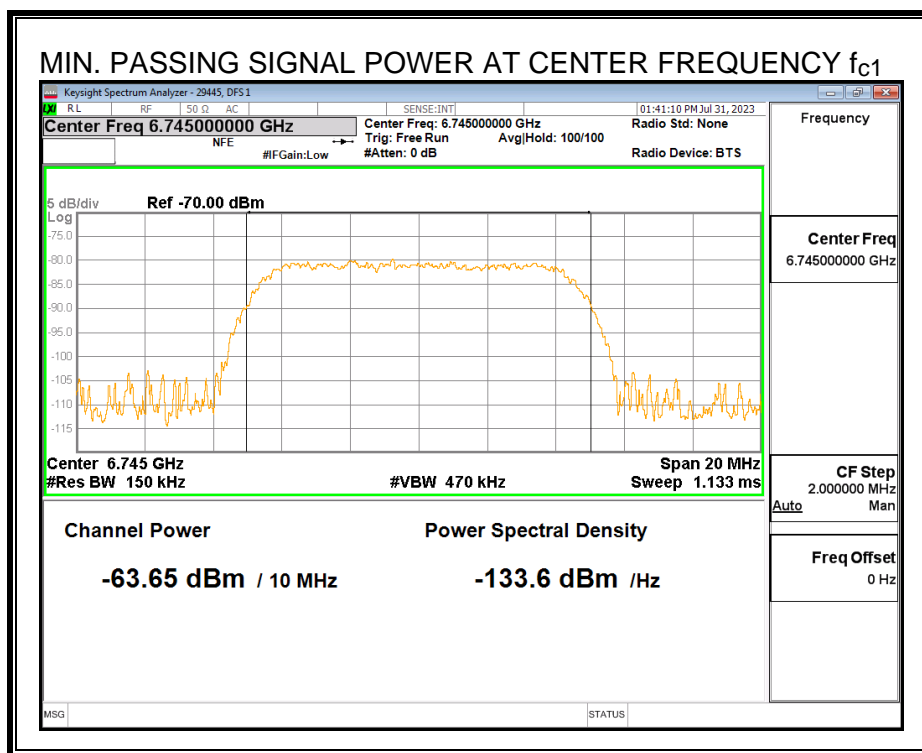


Upper Edge Incumbent Signal f_{c3} :

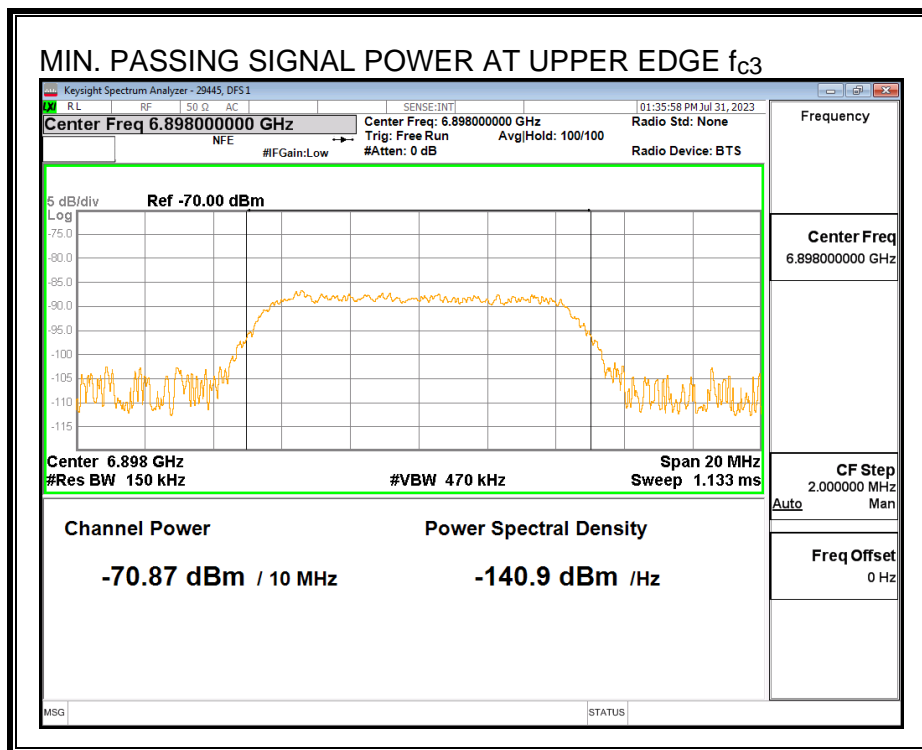


8.15.3. EUT TRANSMISSION PLOTS

EUT 99% OCCUPIED POWER BANDWIDTH

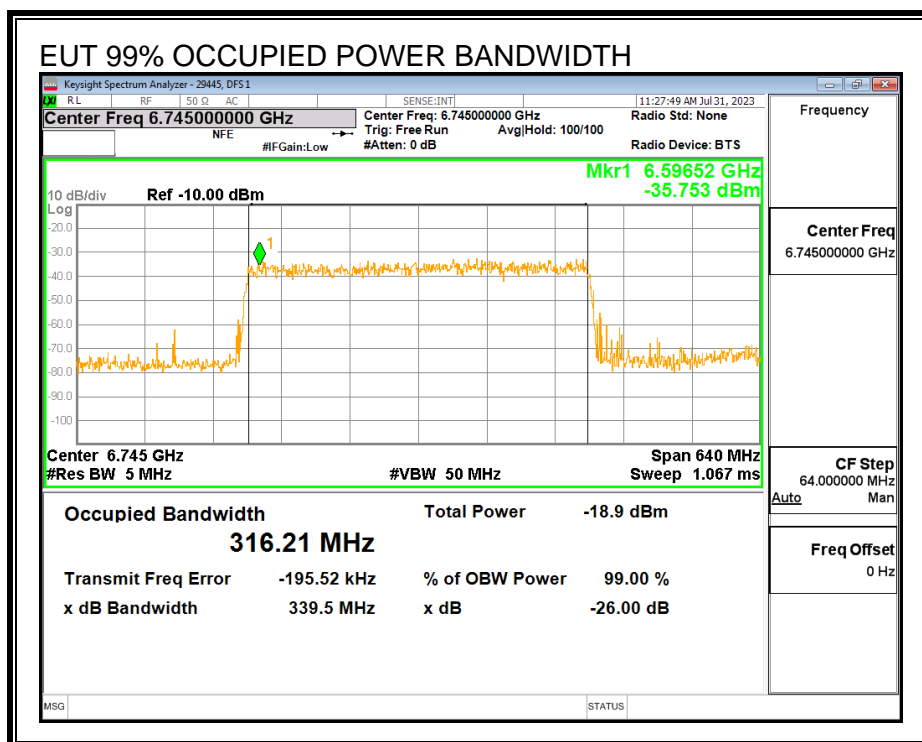


TRAFFIC WITHOUT THE INCUMBENT SIGNAL PRESENT


Lower Edge f_{c2} :

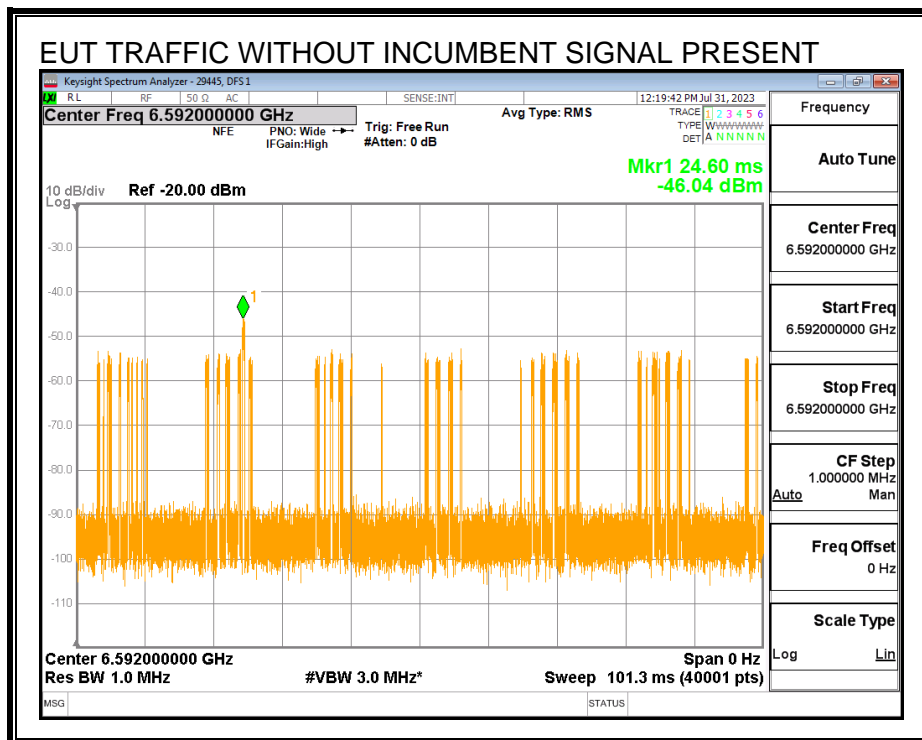

Center Frequency f_{c1} :

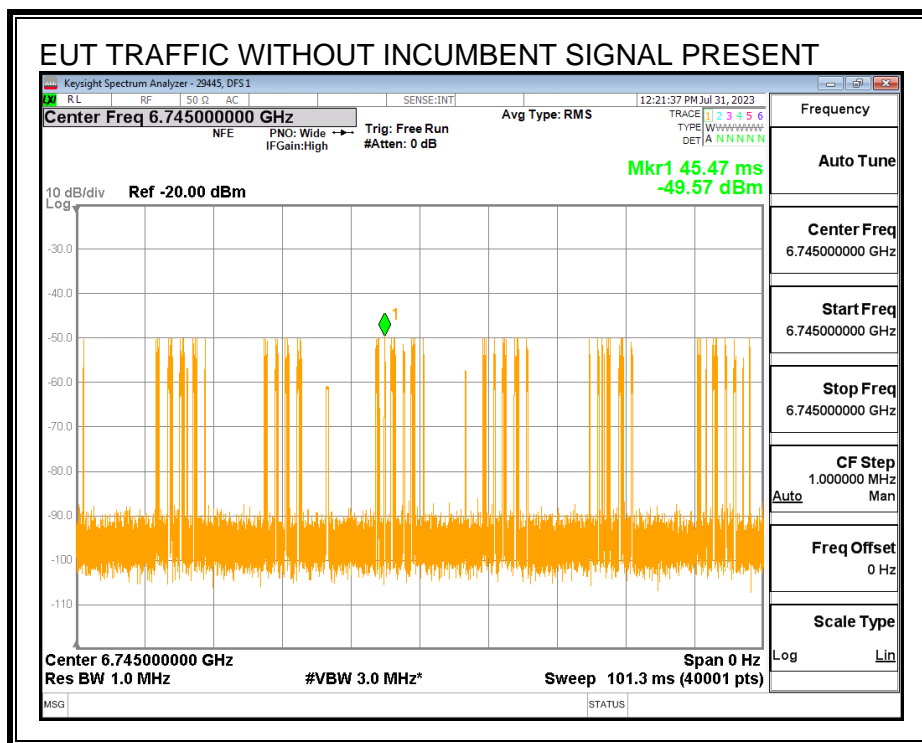


Upper Edge f_{c3} :

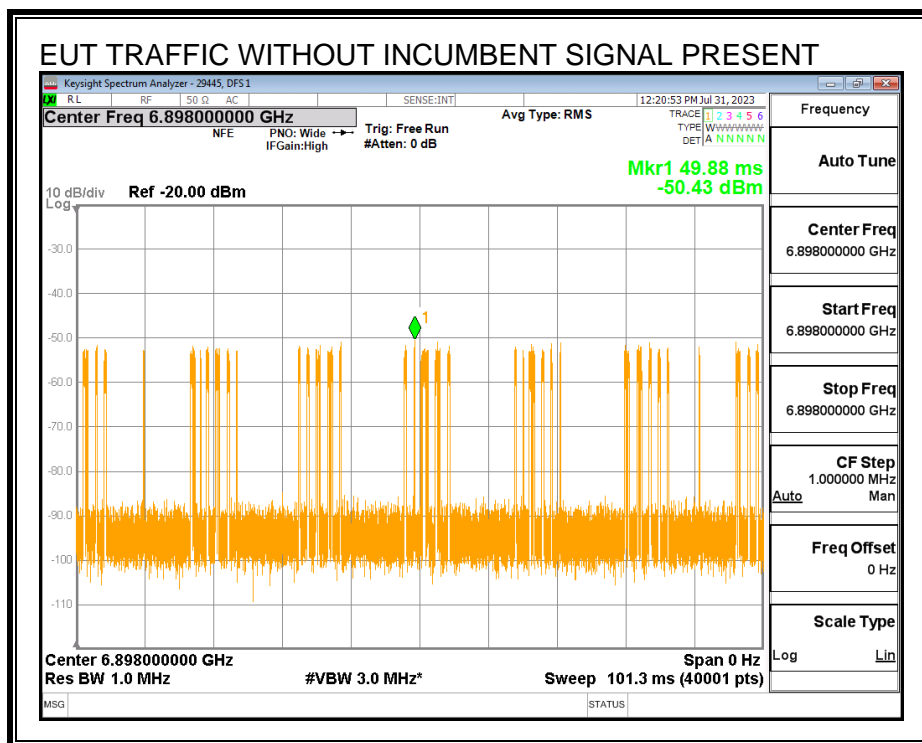

EUT RESPONSE TO THE APPLIED INCUMBENT SIGNAL


A link between the EUT and the Companion Device was established on the test channel. Traffic flowing from the EUT to the Companion Device was then initiated. A sweep was started, and the incumbent signal was continuously applied at approximately 5 seconds after the start of the sweep for a duration of 30 seconds and removed after the end of the observation period. Markers are placed at the beginning and end of the observation period.

Lower Edge Incumbent Signal f_{c2} :

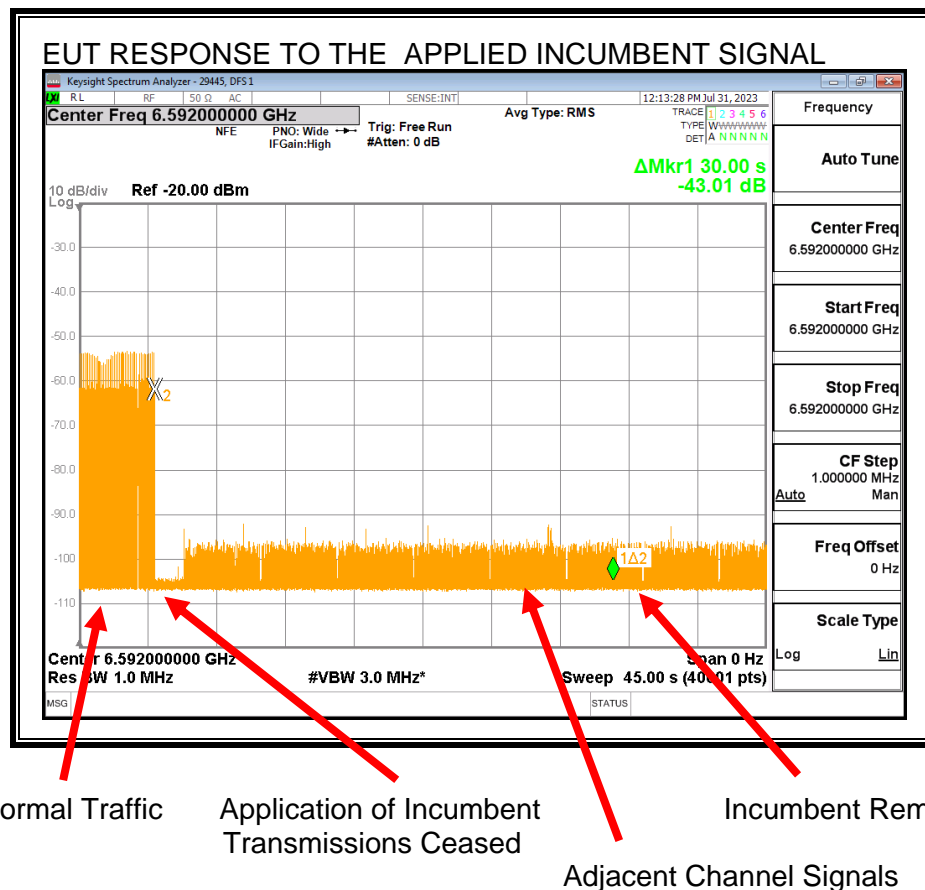


When the EUT detects the Incumbent AWGN Signal it switches to channel 65 and all signals on the test channel cease. Observable transmissions during the monitoring period are from the new adjacent channel to which the EUT has switched.

Center Frequency Incumbent Signal f_{c1} :

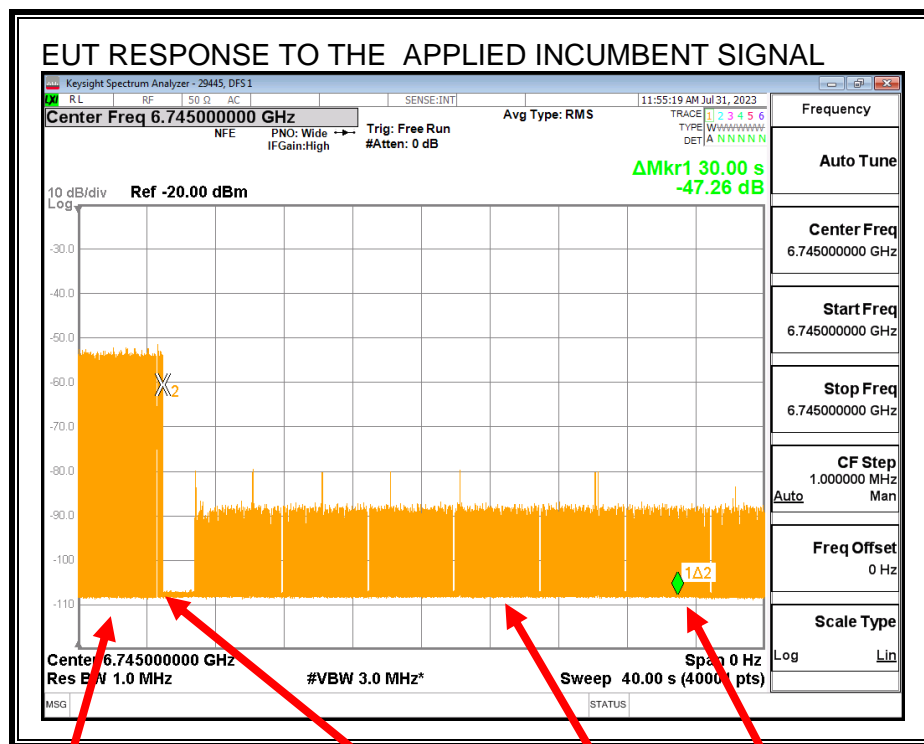

When the EUT detects the Incumbent AWGN Signal it switches to channel 65 and all signals on the test channel cease. Observable transmissions during the monitoring period are from the new adjacent channel to which the EUT has switched.

Upper Edge Incumbent Signal f_{c3} :

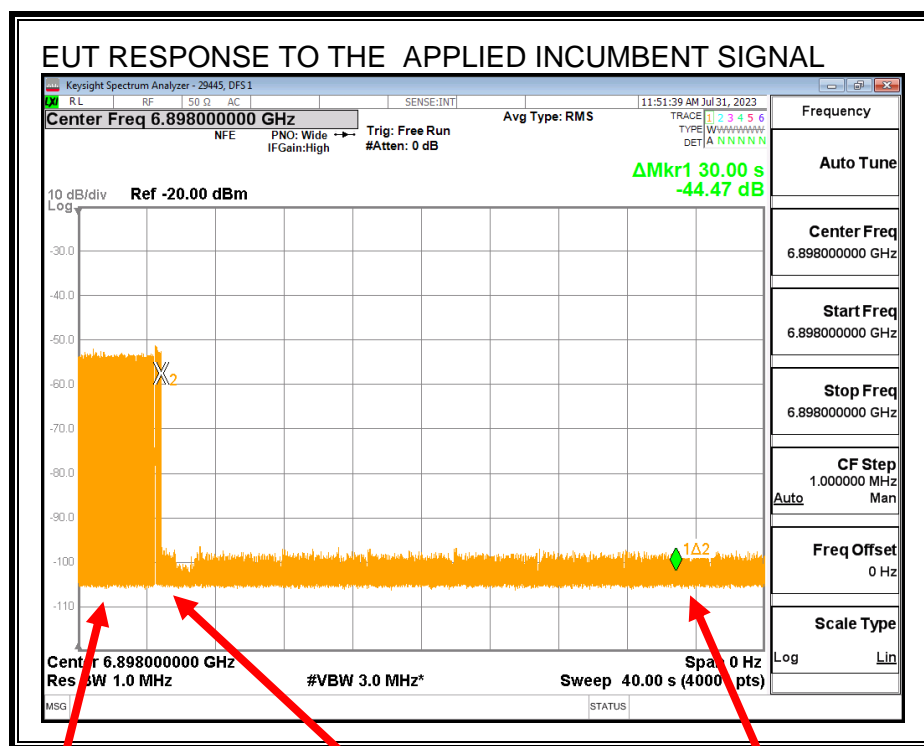

When the EUT detects the Incumbent AWGN Signal it switches channels and all transmissions on the test channel cease.

8.15.4. TABULATED TEST RESULTS

INCUMBENT SIGNAL DETECTION RESULTS

EUT Channel Center Frequency, f_{c1} (MHz)	6745
EUT Nominal Channel Bandwidth (MHz)	320
99% Occupied Bandwidth of the EUT (MHz)	316.21
EUT 99% OBW Lower Edge, F_L (MHz)	6586.90
EUT 99% OBW Upper Edge, F_H (MHz)	6903.11
99% Occupied Bandwidth of the Incumbent Signal (MHz)	9.9841
Test Frequency of Incumbent Signal (f_{c2}) Near EUT F_L (MHz)	6592
Test Frequency of Incumbent Signal at f_{c1} (MHz)	6745
Test Frequency of Incumbent Signal (f_{c3}) Near EUT F_H (MHz)	6898
Maximum Allowed Incumbent Amplitude at Antenna (dBm)	-62
Minimum Antenna Gain (dBi)	3.12
Maximum Allowed Incumbent Amplitude at Radio Port (dBm)	-57.0
Lowest Passing Measured Incumbent Signal Amplitude at f_{c2} (dBm)	-67.92
Margin (dBm)	-10.94
Result (PASS / FAIL)	PASS
Lowest Passing Measured Incumbent Signal Amplitude at f_{c1} (dBm)	-63.65
Margin (dBm)	-6.67
Result (PASS / FAIL)	PASS
Lowest Passing Measured Incumbent Signal Amplitude at f_{c3} (dBm)	-70.87
Margin (dBm)	-13.89
Result (PASS / FAIL)	PASS

Test Date: 07/31/23

Tested by: 29445

Test location: DFS 1

INCUMBENT SIGNAL DETECTION CERTAINTY RATE

Trial	AWGN Detected (Yes / No)		
	Incumbent AWGN at f_{c2}	Incumbent AWGN at f_{c1}	Incumbent AWGN at f_{c3}
1	Yes	Yes	Yes
2	Yes	Yes	Yes
3	Yes	Yes	Yes
4	Yes	Yes	Yes
5	Yes	Yes	Yes
6	Yes	No	Yes
7	Yes	Yes	Yes
8	Yes	Yes	Yes
9	Yes	Yes	Yes
10	No	Yes	Yes
Test Result	PASS	PASS	PASS

Test Date: 07/31/23

Tested by: 29445

Test location: DFS 1

A minimum detection rate of 90% is required for the EUT to be compliant.

8.15.5. Tx OPERATIONAL STATUS TEST RESULTS

Test Condition 4: 99% BW_{EUT} > 4 x 99% BW_{INC}

Incumbent AWGN at f_{c2} :

Measured Incumbent Power at the EUT Radio Port (dBm)	Antenna Gain (dBi)	Antenna Cable Path Loss (dB)	Adjusted Incumbent Power at the Antenna (dBm)	Detection Limit (dBm)	EUT Tx Status
-67.92	3.12	0	-72.94	-62	Ceased
-72.25	3.12	0	-77.27	-62	Minimal
-74.24	3.12	0	-79.26	-62	Normal

Incumbent AWGN at f_{c1} :

Measured Incumbent Power at the EUT Radio Port (dBm)	Antenna Gain (dBi)	Antenna Cable Path Loss (dB)	Adjusted Incumbent Power at the Antenna (dBm)	Detection Limit (dBm)	EUT Tx Status
-63.65	3.12	0	-68.67	-62	Ceased
-69.14	3.12	0	-74.16	-62	Minimal
-71.12	3.12	0	-76.14	-62	Normal

Incumbent AWGN at f_{c3} :

Measured Incumbent Power at the EUT Radio Port (dBm)	Antenna Gain (dBi)	Antenna Cable Path Loss (dB)	Adjusted Incumbent Power at the Antenna (dBm)	Detection Limit (dBm)	EUT Tx Status
-70.87	3.12	0	-75.89	-62	Ceased
-73.60	3.12	0	-78.62	-62	Minimal
-75.65	3.12	0	-80.67	-62	Normal

The path loss from the internal antenna assembly to the radio port is incorporated into the antenna gain figure.

Test Date: 07/31/23

Tested by: 29445

Test location: DFS 1

8.16. U-NII 8 BAND TEST CONDITION 1 RESULTS

TEST CONDITION 1 CRITERIA

$$99\% BW_{EUT} \leq 99\% BW_{INC}$$

The lowest and highest supported channel bandwidths do not meet the criteria for this test condition therefore this test was not performed.

8.17. U-NII 8 BAND TEST CONDITION 2 RESULTS

TEST CONDITION 2 CRITERIA

$$99\% BW_{INC} < 99\% BW_{EUT} \leq 2 \times 99\% BW_{INC}$$

8.17.1. TEST CHANNEL


All tests were performed with the EUT set to a channel center frequency of 6935 MHz and a nominal channel bandwidth of 20 MHz.

Only the lowest and highest supported channel bandwidths are required to be tested.


8.17.2. INCUMBENT SIGNAL PLOTS

All tests were performed with the Incumbent Signal frequency set to the test channel center frequency and a nominal 99% Occupied Power Bandwidth of 10 MHz.

INCUMBENT SIGNAL 99% OCCUPIED POWER BANDWIDTH

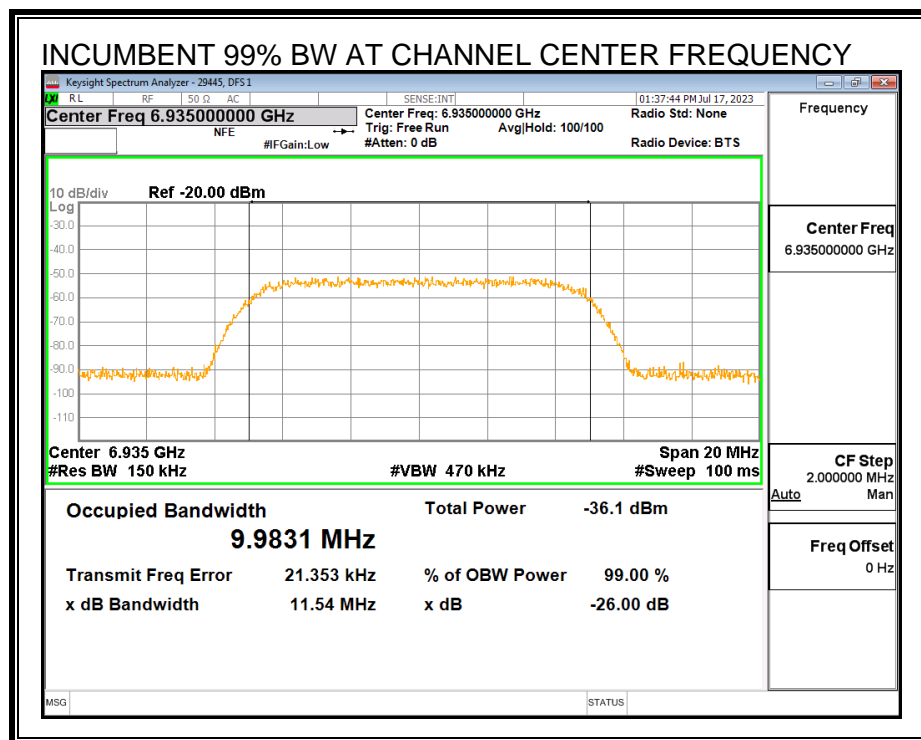


MINIMUM PASSING INCUMBENT SIGNAL POWER

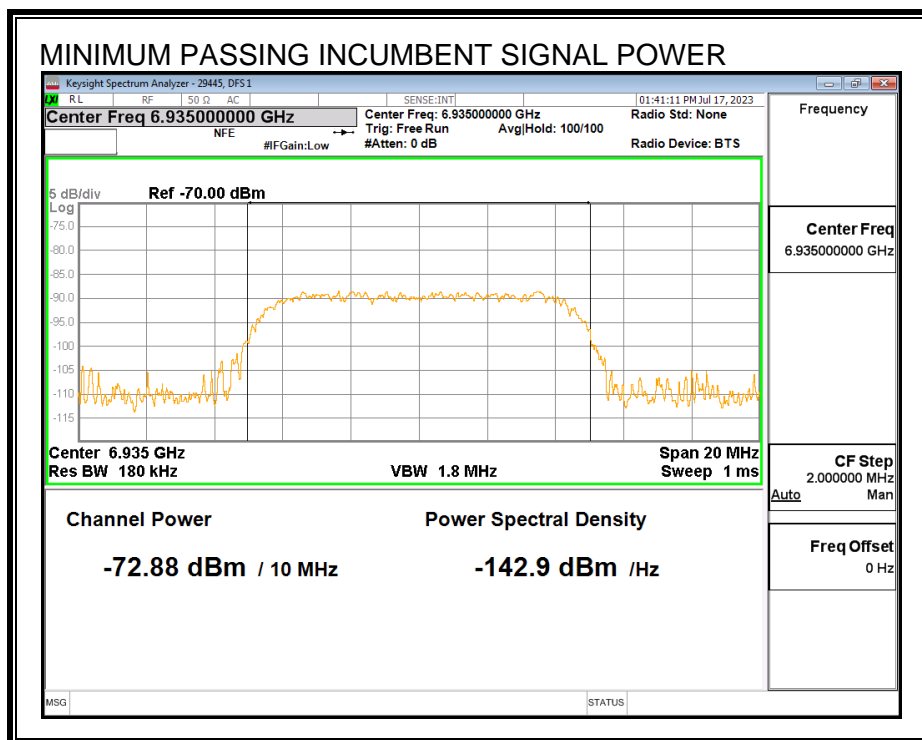


8.17.3. EUT TRANSMISSION PLOTS

EUT 99% OCCUPIED POWER BANDWIDTH

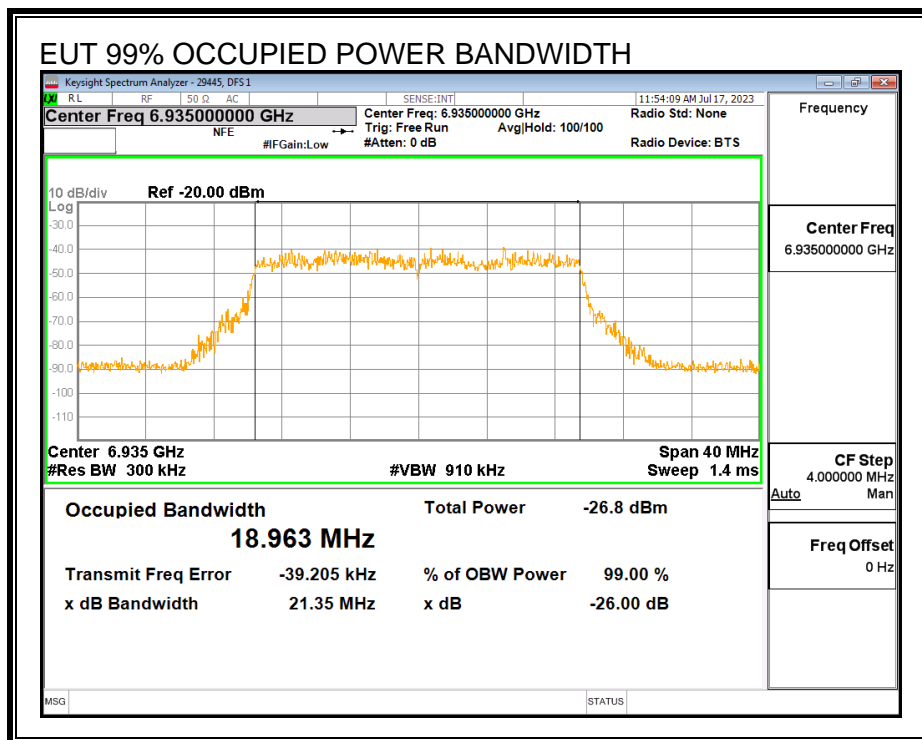


TRAFFIC WITHOUT THE INCUMBENT SIGNAL PRESENT

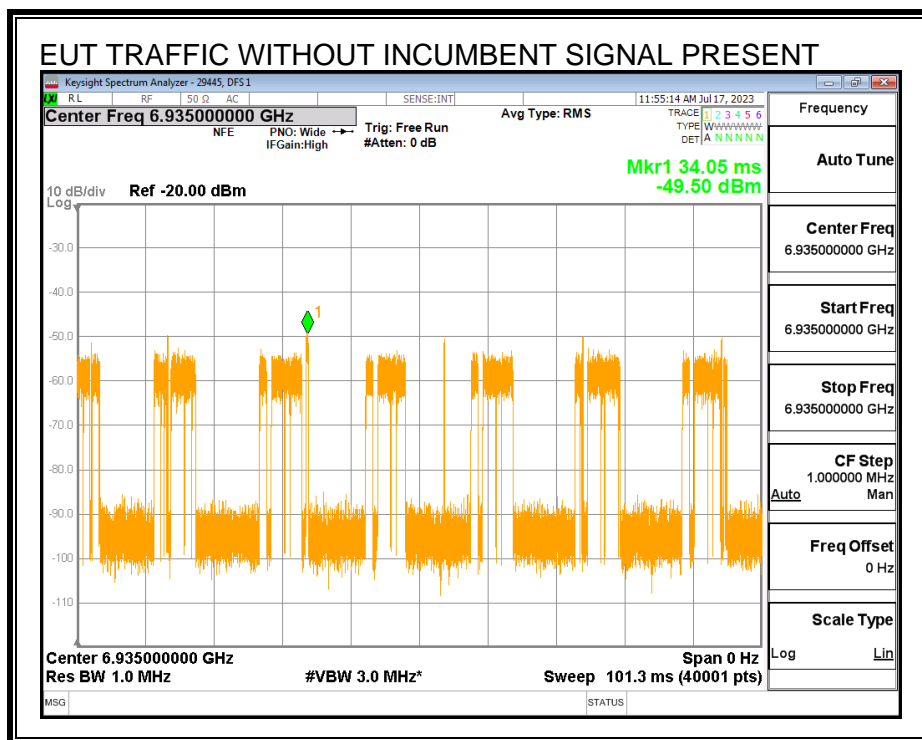

EUT RESPONSE TO THE APPLIED INCUMBENT SIGNAL

A link between the EUT and the Companion Device was established on the test channel. Traffic flowing from the EUT to the Companion Device was then initiated. A sweep was started, and the incumbent signal was continuously applied at approximately 5 seconds after the start of the sweep for a duration of 30 seconds and removed after the end of the observation period. Markers are placed at the beginning and end of the observation period.

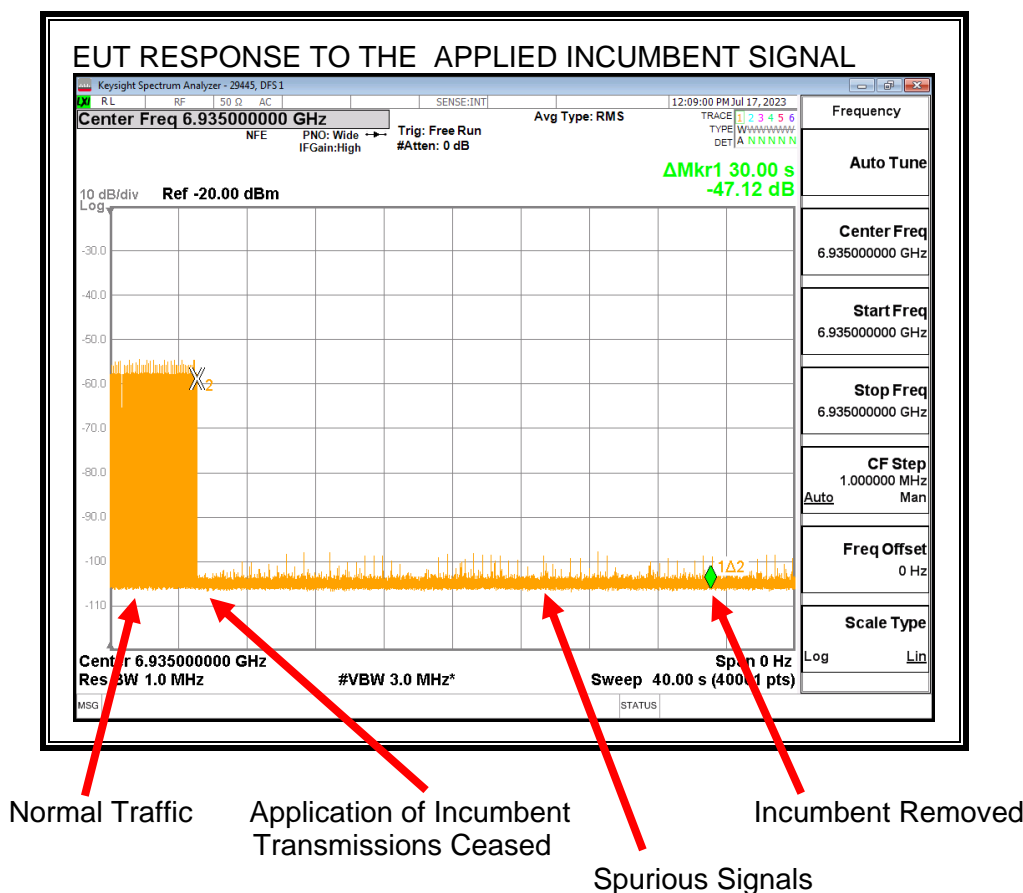

When the EUT detects the Incumbent AWGN Signal it switches channels and all signals with the exception of spurious signals on the test channel cease.

8.17.4. TABULATED TEST RESULTS

INCUMBENT SIGNAL DETECTION RESULTS

EUT Channel Center Frequency, f_{c1} (MHz)	6935
EUT Nominal Channel Bandwidth (MHz)	20
99% Occupied Bandwidth of the EUT (MHz)	18.963
EUT 99% OBW Lower Edge, F_L (MHz)	6925.52
EUT 99% OBW Upper Edge, F_H (MHz)	6944.48
Test Frequency of Incumbent Signal (MHz)	6935
Maximum Allowed Incumbent Amplitude at Antenna (dBm)	-62
Minimum Antenna Gain (dBi)	3.10
Maximum Allowed Incumbent Amplitude at Radio Port (dBm)	-58.9
Lowest Passing Measured Incumbent Signal Amplitude (dBm)	-72.9
Margin (dBm)	-13.98
Result (PASS / FAIL)	PASS

Test Date: 07/17/23

Tested by: 29445

Test location: DFS 1

INCUMBENT SIGNAL DETECTION CERTAINTY RATE

AWGN Detected (Yes / No)	
Trial	Incumbent AWGN at f_{c1}
1	Yes
2	Yes
3	Yes
4	Yes
5	Yes
6	Yes
7	Yes
8	Yes
9	Yes
10	No
Test Result	PASS

Test Date: 07/17/23

Tested by: 29445

Test location: DFS 1

A minimum detection rate of 90% is required for the EUT to be compliant.

8.17.5. Tx OPERATIONAL STATUS TEST RESULTS

Test Condition 2: $99\% BW_{INC} < 99\% BW_{EUT} \leq 2 \times 99\% BW_{INC}$

Incumbent AWGN at f_{c1} :

Measured Incumbent Power at the EUT Radio Port (dBm)	Antenna Gain (dBi)	Antenna Cable Path Loss (dB)	Adjusted Incumbent Power at the Antenna (dBm)	Detection Limit (dBm)	EUT Tx Status
-72.88	3.1	0	-75.98	-62	Ceased
-75.59	3.1	0	-78.69	-62	Minimal
-76.69	3.1	0	-79.79	-62	Normal

The path loss from the internal antenna assembly to the radio port is incorporated into the antenna gain figure.

Test Date: 07/17/23

Tested by: 29445

Test location: DFS 1

8.18. U-NII 8 BAND TEST CONDITION 3 RESULTS

TEST CONDITION 3 CRITERIA

$$2 \times 99\% BW_{INC} < 99\% BW_{EUT} \leq 4 \times 99\% BW_{INC}$$

The lowest and highest supported channel bandwidths do not meet the criteria for this test condition therefore this test was not performed.

8.19. U-NII 8 BAND TEST CONDITION 4 RESULTS

TEST CONDITION 4 CRITERIA

$$99\% BW_{EUT} > 4 \times 99\% BW_{INC}$$

8.19.1. TEST CHANNEL

All tests were performed with the EUT set to a channel center frequency of 6905 MHz and a nominal channel bandwidth of 320 MHz.


Only the lowest and highest supported channel bandwidths are required to be tested.

8.19.2. INCUMBENT SIGNAL PLOTS


All tests were performed with the Incumbent Signal frequency set to the test channel center frequency and a nominal 99% Occupied Power Bandwidth of 10 MHz.

INCUMBENT SIGNAL 99% OCCUPIED POWER BANDWIDTH


Lower Edge Incumbent Signal f_{c2} :

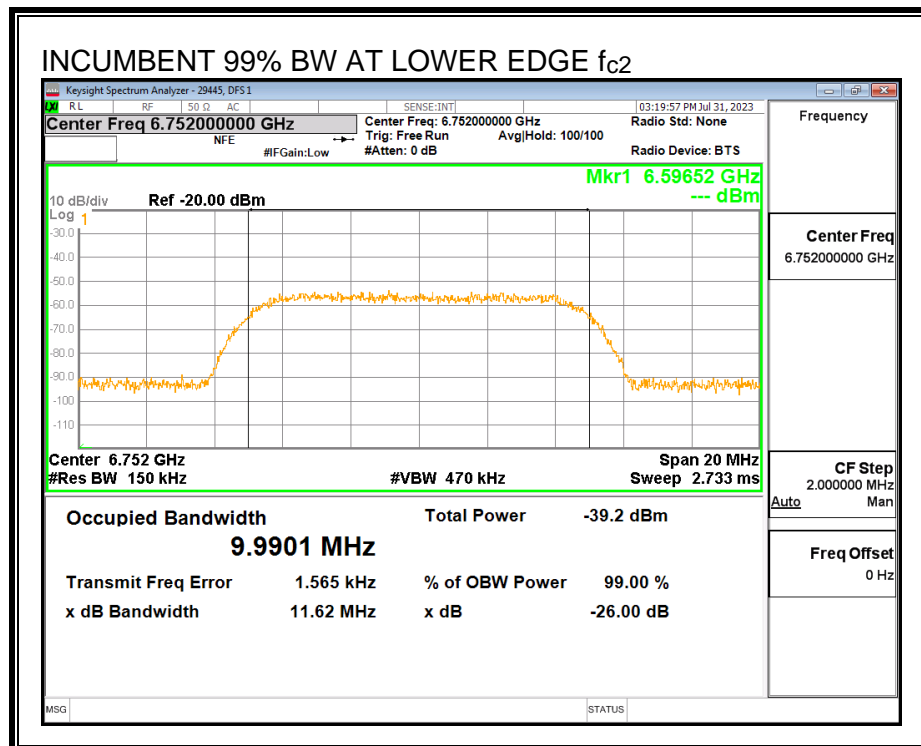

Center Frequency Incumbent Signal f_{c1} :

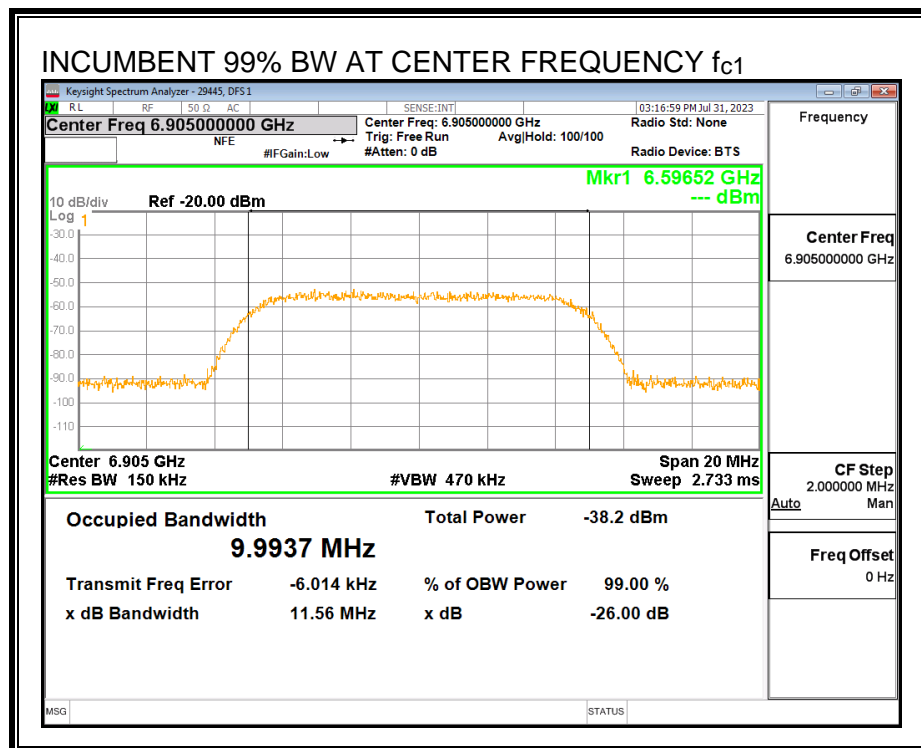


Upper Edge Incumbent Signal f_{c3} :

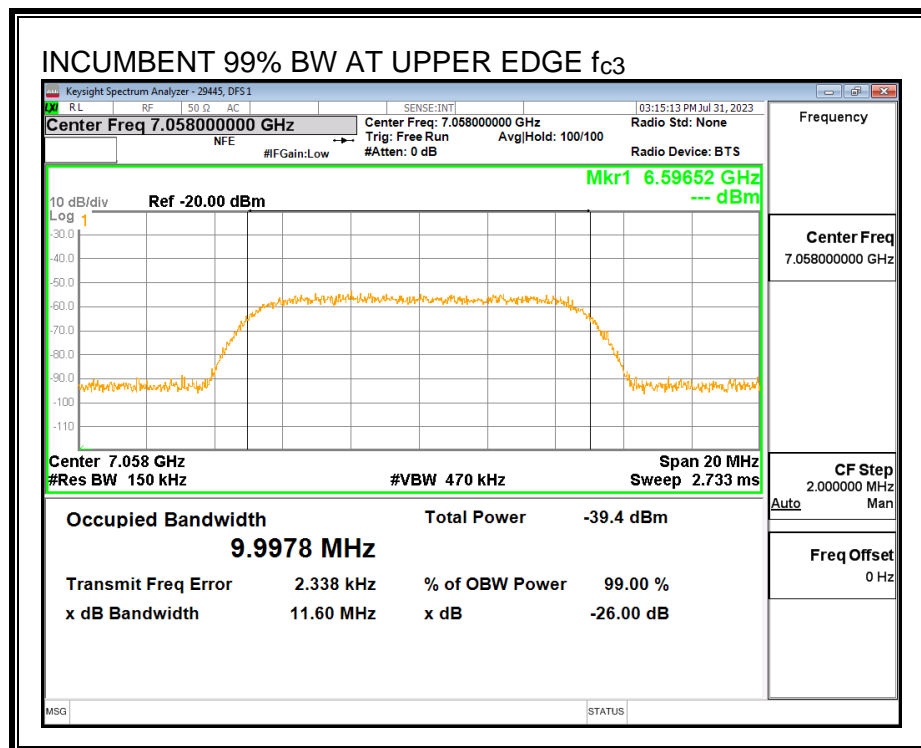


MINIMUM PASSING INCUMBENT SIGNAL POWER


Lower Edge Incumbent Signal f_{c2} :

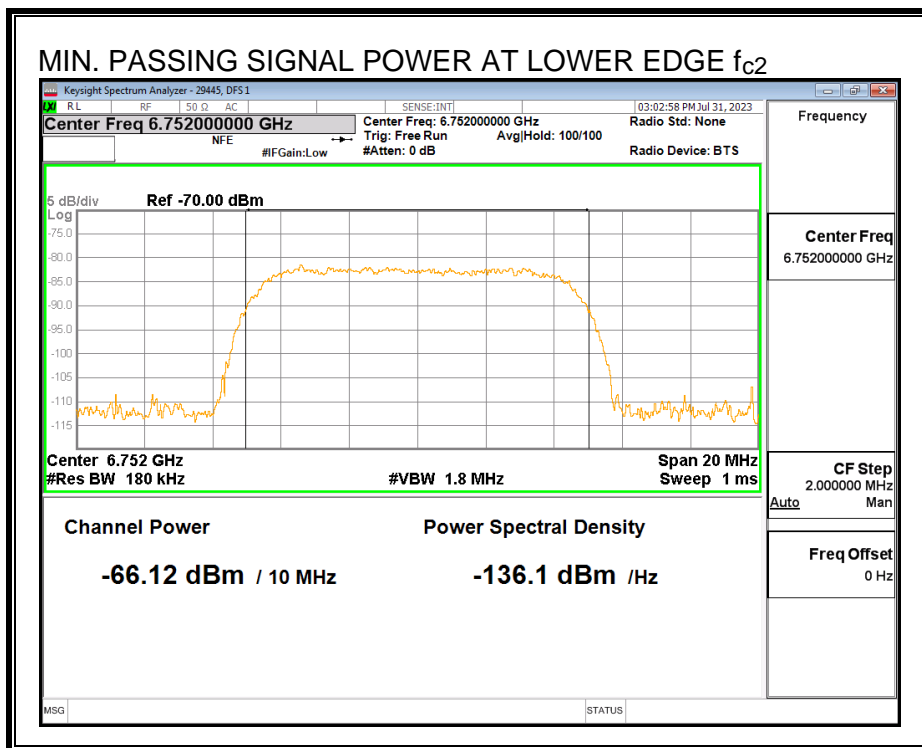

Center Frequency Incumbent Signal f_{c1} :

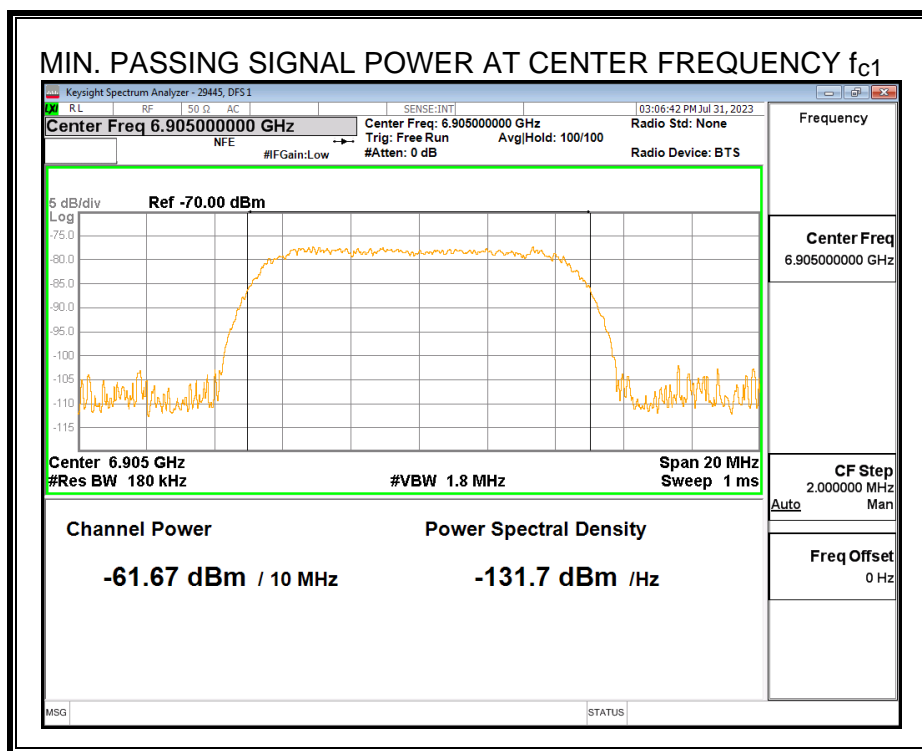


Upper Edge Incumbent Signal f_{c3} :

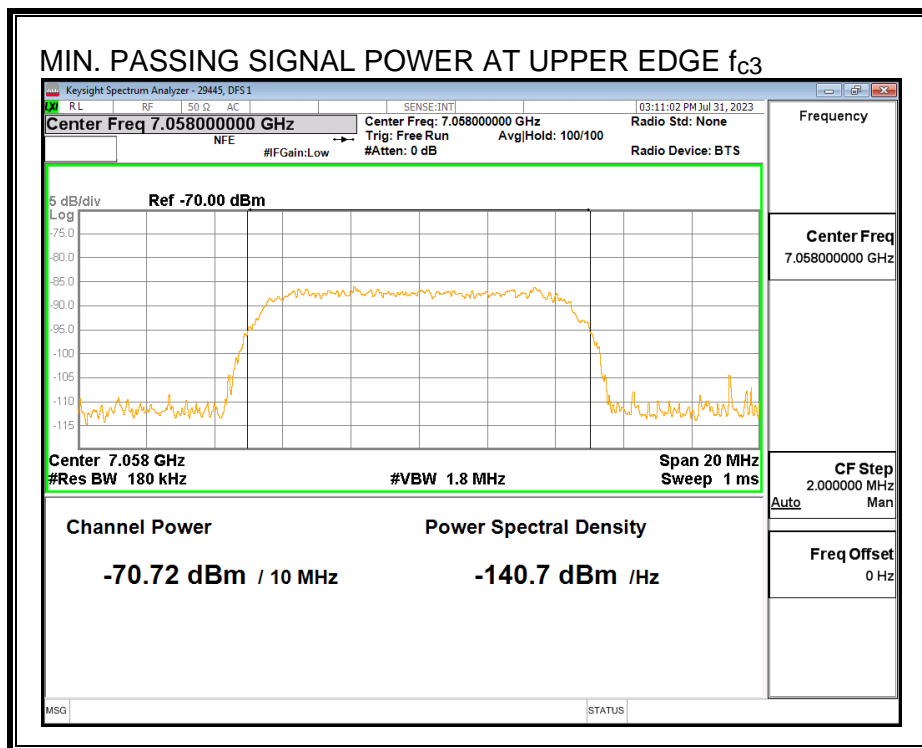


8.19.3. EUT TRANSMISSION PLOTS

EUT 99% OCCUPIED POWER BANDWIDTH

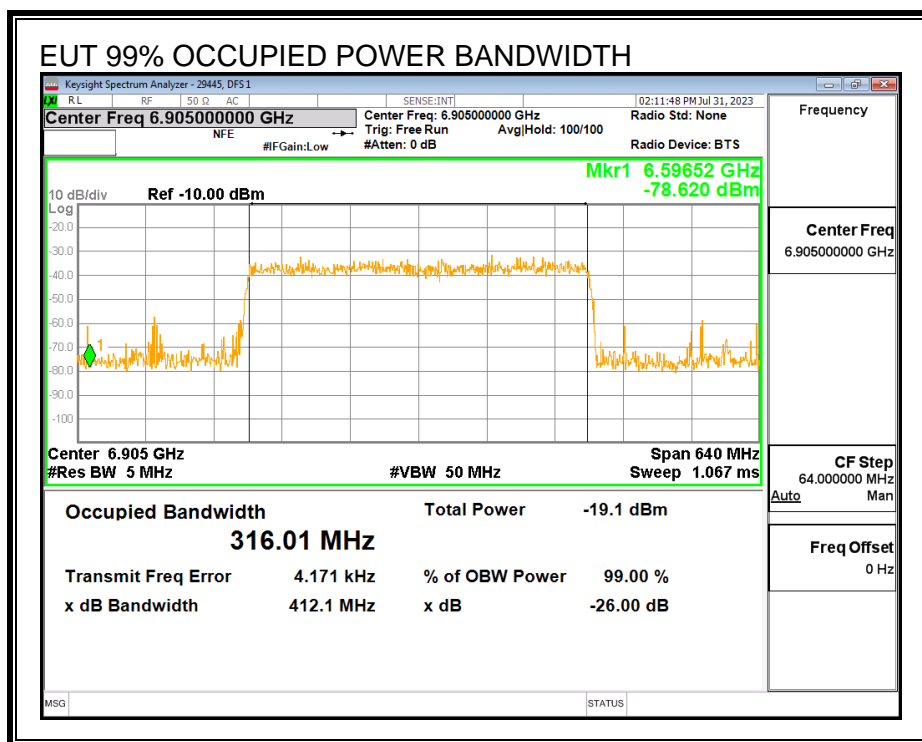


TRAFFIC WITHOUT THE INCUMBENT SIGNAL PRESENT


Lower Edge f_{c2} :

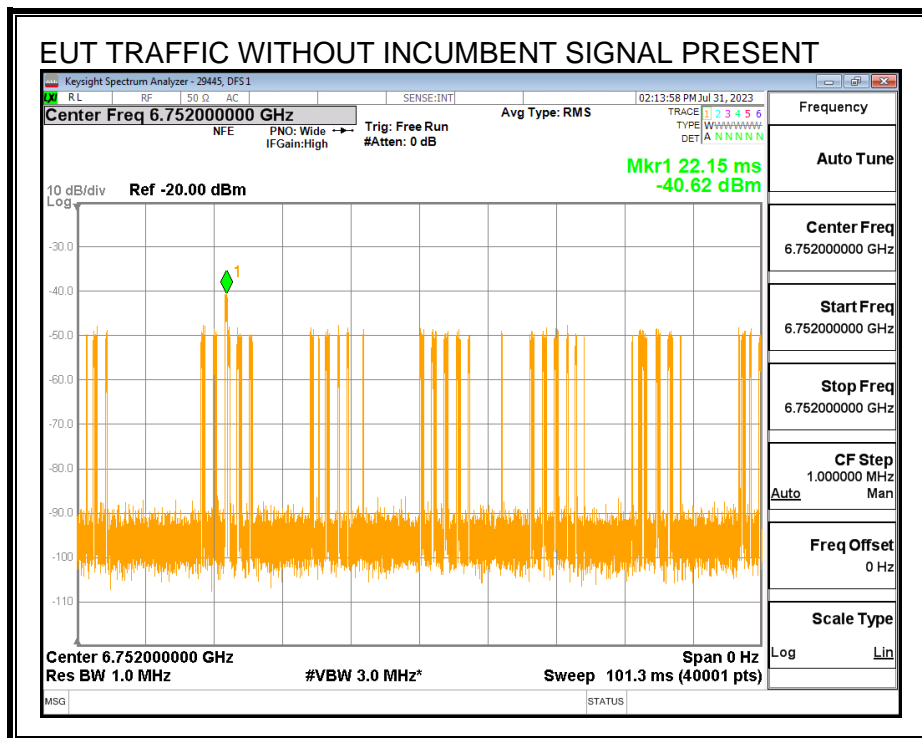

Center Frequency f_{c1} :

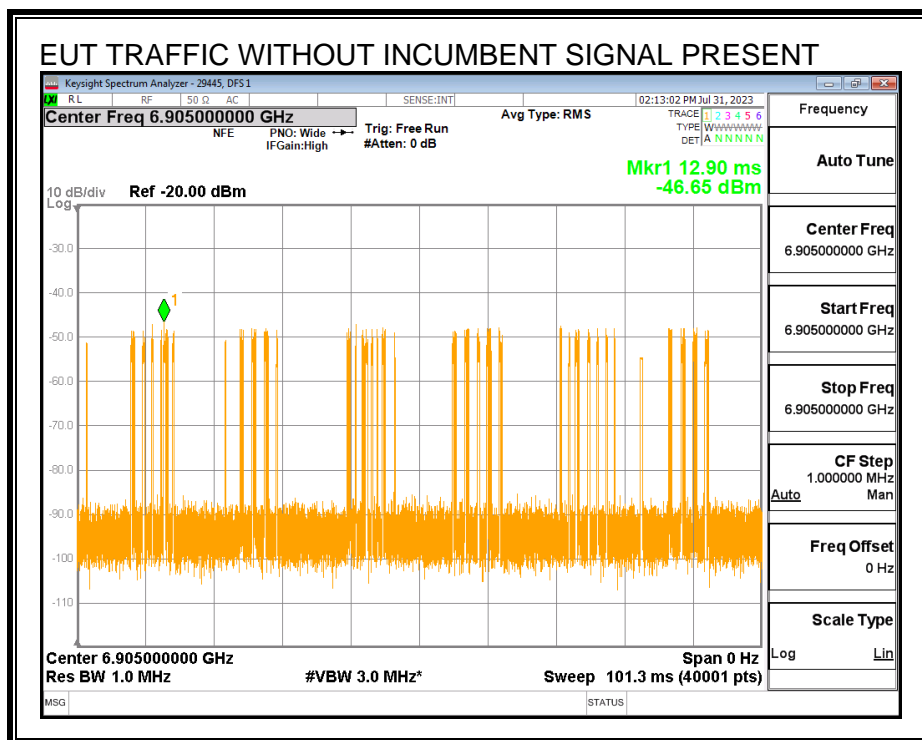


Upper Edge f_{c2} :

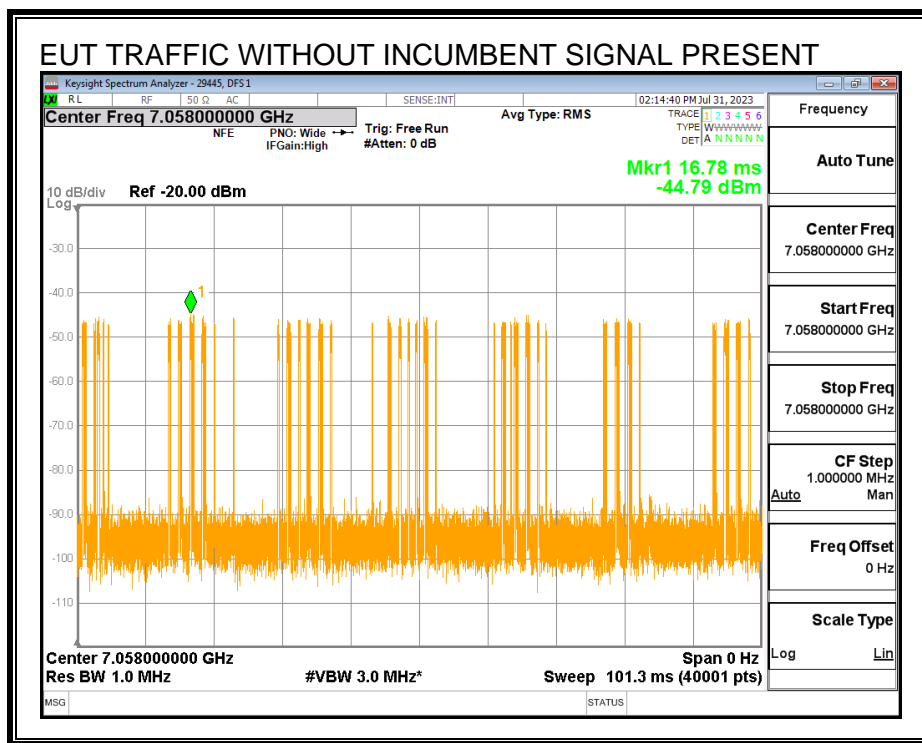

EUT RESPONSE TO THE APPLIED INCUMBENT SIGNAL


A link between the EUT and the Companion Device was established on the test channel. Traffic flowing from the EUT to the Companion Device was then initiated. A sweep was started, and the incumbent signal was continuously applied at approximately 5 seconds after the start of the sweep for a duration of 30 seconds and removed after the end of the observation period. Markers are placed at the beginning and end of the observation period.

Lower Edge Incumbent Signal f_{c2} :

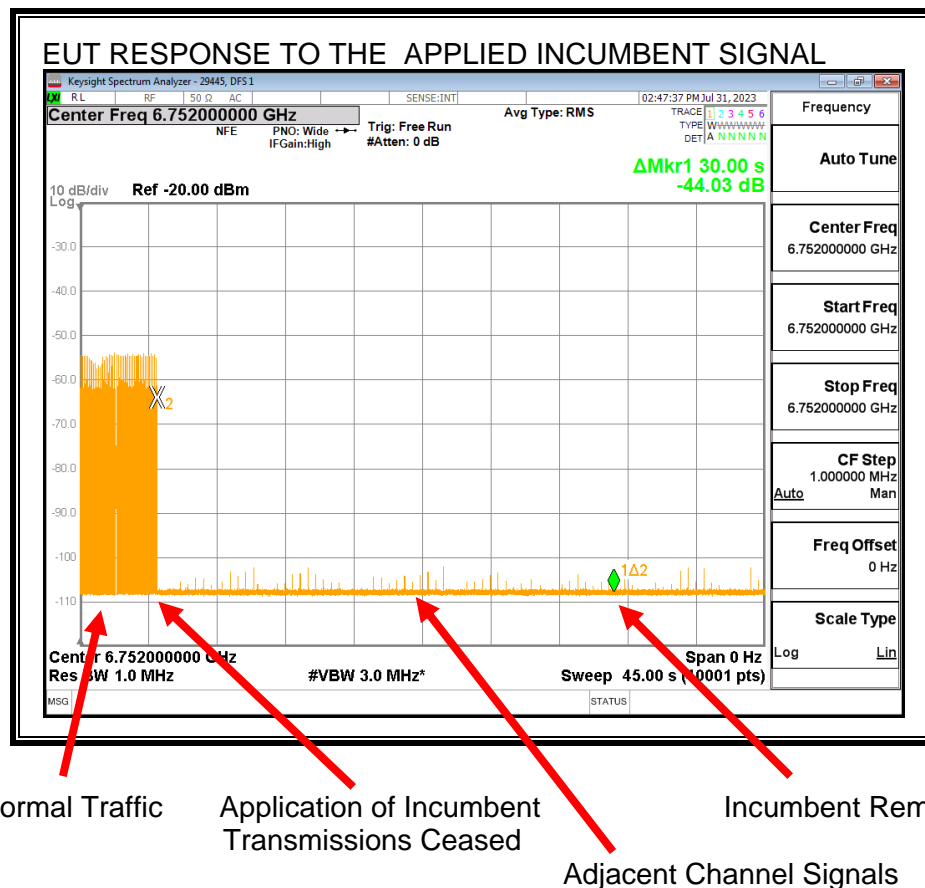

When the EUT detects the Incumbent AWGN Signal it switches to channel 1 and all signals on the test channel cease. Observable transmissions during the monitoring period are from the new adjacent channel to which the EUT has switched.

Center Frequency Incumbent Signal f_{c1} :

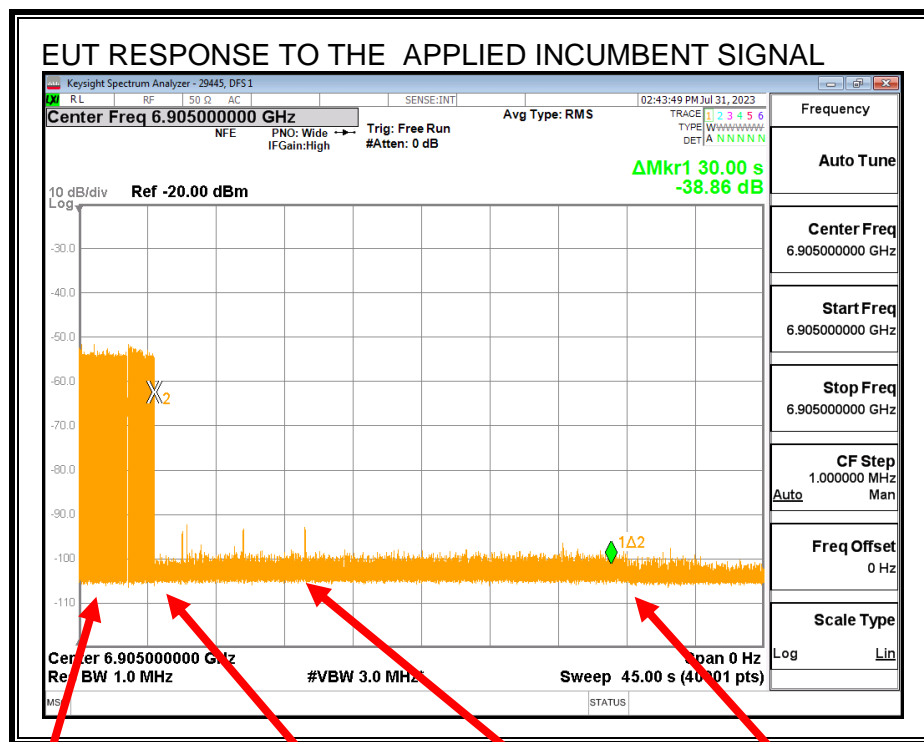

Normal Traffic


Application of Incumbent
Transmissions Ceased

Incumbent Removed

Adjacent Channel Signals

When the EUT detects the Incumbent AWGN Signal it switches to channel 1 and all signals on the test channel cease. Observable transmissions during the monitoring period are from the new adjacent channel to which the EUT has switched.

Upper Edge Incumbent Signal f_{c3} :

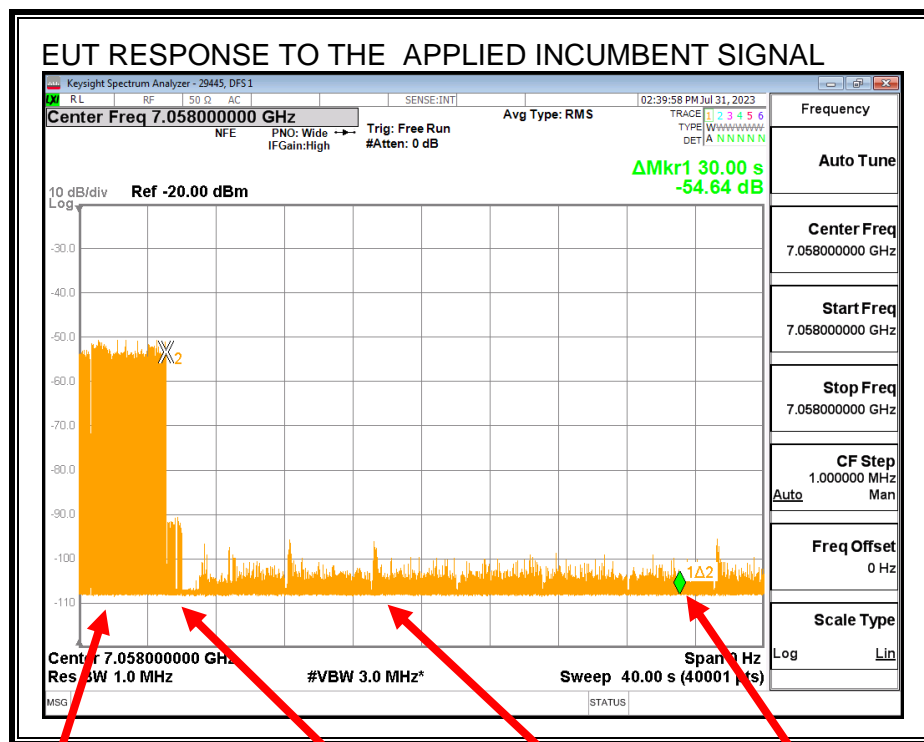

Normal Traffic

Application of Incumbent
Transmissions Ceased

Incumbent Removed

Adjacent Channel Signals

When the EUT detects the Incumbent AWGN Signal it auto-negotiates down to 160 MHz channel bandwidth centered at 6825 MHz. Observable transmissions during the monitoring period are from the 160 MHz adjacent channel.

8.19.4. TABULATED TEST RESULTS

INCUMBENT SIGNAL DETECTION RESULTS

EUT Channel Center Frequency, f_{c1} (MHz)	6905
EUT Nominal Channel Bandwidth (MHz)	320
99% Occupied Bandwidth of the EUT (MHz)	316.01
EUT 99% OBW Lower Edge, F_L (MHz)	6747.00
EUT 99% OBW Upper Edge, F_H (MHz)	7063.01
99% Occupied Bandwidth of the Incumbent Signal (MHz)	9.9937
Test Frequency of Incumbent Signal (f_{c2}) Near EUT F_L (MHz)	6752
Test Frequency of Incumbent Signal at f_{c1} (MHz)	6905
Test Frequency of Incumbent Signal (f_{c3}) Near EUT F_H (MHz)	7058
Maximum Allowed Incumbent Amplitude at Antenna (dBm)	-62
Minimum Antenna Gain (dBi)	3.10
Maximum Allowed Incumbent Amplitude at Radio Port (dBm)	-58.9
Lowest Passing Measured Incumbent Signal Amplitude at f_{c2} (dBm)	-66.12
Margin (dBm)	-7.22
Result (PASS / FAIL)	PASS
Lowest Passing Measured Incumbent Signal Amplitude at f_{c1} (dBm)	-61.67
Margin (dBm)	-2.77
Result (PASS / FAIL)	PASS
Lowest Passing Measured Incumbent Signal Amplitude at f_{c3} (dBm)	-70.72
Margin (dBm)	-11.82
Result (PASS / FAIL)	PASS

Test Date: 07/31/23

Tested by: 29445

Test location: DFS 1

INCUMBENT SIGNAL DETECTION CERTAINTY RATE

Trial	AWGN Detected (Yes / No)		
	Incumbent AWGN at f_{c2}	Incumbent AWGN at f_{c1}	Incumbent AWGN at f_{c3}
1	Yes	Yes	Yes
2	Yes	Yes	Yes
3	Yes	Yes	Yes
4	Yes	Yes	Yes
5	Yes	Yes	Yes
6	Yes	Yes	Yes
7	Yes	Yes	Yes
8	Yes	Yes	Yes
9	No	Yes	Yes
10	Yes	Yes	Yes
Test Result	PASS	PASS	PASS

Test Date: 07/31/23

Tested by: 29445

Test location: DFS 1

A minimum detection rate of 90% is required for the EUT to be compliant.

8.19.5. Tx OPERATIONAL STATUS TEST RESULTS

Test Condition 4: 99% BW_{EUT} > 4 x 99% BW_{INC}

Incumbent AWGN at f_{c2} :

Measured Incumbent Power at the EUT Radio Port (dBm)	Antenna Gain (dBi)	Antenna Cable Path Loss (dB)	Adjusted Incumbent Power at the Antenna (dBm)	Detection Limit (dBm)	EUT Tx Status
-66.12	3.1	0	-69.22	-62	Ceased
-70.86	3.1	0	-73.96	-62	Minimal
-72.84	3.1	0	-75.94	-62	Normal

Incumbent AWGN at f_{c1} :

Measured Incumbent Power at the EUT Radio Port (dBm)	Antenna Gain (dBi)	Antenna Cable Path Loss (dB)	Adjusted Incumbent Power at the Antenna (dBm)	Detection Limit (dBm)	EUT Tx Status
-61.67	3.1	0	-64.77	-62	Ceased
-67.56	3.1	0	-70.66	-62	Minimal
-69.46	3.1	0	-72.56	-62	Normal

Incumbent AWGN at f_{c3} :

Measured Incumbent Power at the EUT Radio Port (dBm)	Antenna Gain (dBi)	Antenna Cable Path Loss (dB)	Adjusted Incumbent Power at the Antenna (dBm)	Detection Limit (dBm)	EUT Tx Status
-70.72	3.1	0	-73.82	-62	Ceased
-74.23	3.1	0	-77.33	-62	Minimal
-76.81	3.1	0	-79.91	-62	Normal

The path loss from the internal antenna assembly to the radio port is incorporated into the antenna gain figure.

Test Date: 07/31/23

Tested by: 29445

Test location: DFS 1

9. SETUP PHOTOS

Please refer to 14749497-EP2 for setup photo.

END OF TEST REPORT