



296*105mm,风琴折，成品尺寸74*105mm,

Model:GMA130




User Instruction

Functions Front View

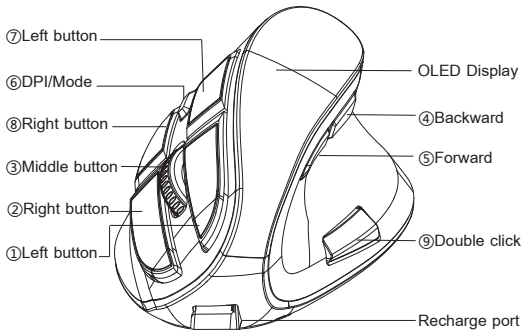

- Remark:
- ⑥DPI/Mode: Short click for DPI change-1200/1600/2000/2400; Long press for Mode button.
 - Only the following buttons can be setting other functions:
 - ④Backward
 - ⑤Forward
 - ⑦Left button
 - ⑧Right button
 - ⑨Double click

Functions Back View

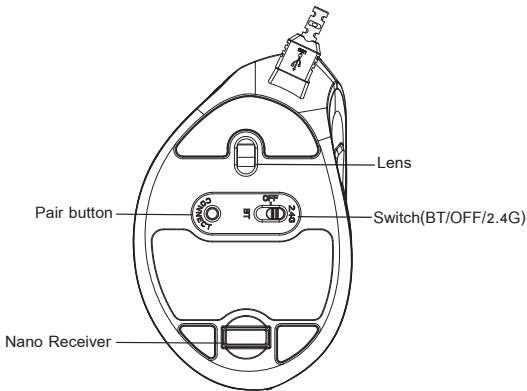

Remark:
Switch(BT/OFF/2.4G): It is a switch between BT(Bluetooth) and 2.4G wireless and power off. Turn left, enter into Bluetooth; Turn right, enter into 2.4G mode; Keep it on the middle, then power off.

Features & Specifications

- Main Features:
- . Vertical design, real ergonomics
 - . High level Pixart sensor PWN3212
 - . DPI: 1200/1600/2000/2400
 - . 9 buttons
 - . Bluetooth+2.4Ghz, switch freely between 2 wireless modes
 - . Creative double left and right buttons design
 - . With OLED display to self-set the function of buttons
 - . Chargeable vertical mouse with Li-polymer battery, 500 mAh
 - . 1.5m braided charging cable
 - . Chrome scroll wheel on top
 - . Bluetooth version: BLE5.0
 - . USB interface

- Technical Data:
- . Mouse size: 110.82*71.83*75.36mm
 - . Weight: 119g
 - . OLED size: 24*16mm
 - . Acceleration: 10g
 - . Operating voltage: 3.7V
 - . Operating current: 17mA for 2.4G; 14mA for Bluetooth;
 - . Standby current: 0.2mA;
 - . Sleep current: 0.08mA;

Contents of OLED Display

Normal Working Interface

DPI : II 1600
2.4G Wireless Mode
Connected

85%
Dump energy
Stage/resolution
Working mode(2.4G or Bluetooth)
Connecting status
(Connecting or Connected)

Setting Mode Interface

Setting Mode,
No Function.
pls press the button
which you want to set
then enter into the
setting interface.

Left button
Right button
Forward button
Backward button
Double click

Function Menu Interface
Interface 1

Left
Right
Forward
Backward
Frie
VOL+
VOL-
Calculator

Left button
Right button
Forward button
Backward button
Double click

Interface 2

Copy
Cut
Paste
Desktop
Internet Explorer
PstC
Select ALL
Screen Lock

Cursor symbol

Remarks;
The above menu perhaps will be changed when it is upgraded.

Setup & Use

Setup Under Different Mode
2.4G mode: put the "Switch(BT/OFF/2.4G)" on the position "2.4G" , plug the nano receiver into the free USB port of computer. Then it will setup automatically. After seconds, you will find the Connecting status on OLED Display "Connected", which means setup successfully. You can enjoy it.

Bluetooth mode: put the "Switch(BT/OFF/2.4G)" on the position "BT" press the "Pair button" and enter into pairing status, then,
(1) Turn on the computer Bluetooth program
(2) Press the right mouse button the new Bluetooth device
(3) Search Bluetooth mouse model for the "Bluetooth Mouse"
(4) Press pairing and wait for the computer to install a Bluetooth device
When Connected, you will find "Connecting status" on the OLED Display shows "Connected", which means that you can use a Bluetooth mouse.

Note: you should finish the Bluetooth pair within 3 minutes. Otherwise you have to pair it again.
Make Self-setting Function of Buttons
. Remind again, only buttons ④ ⑤ ⑦ ⑧ ⑨ can be self- setted.
. Press "DPI/Mode" button in 3 seconds, the OLED Display will enter into setting mode interface. Click the button which you want to set, the OLED Display will enter into function menu. Then you can scroll the wheel and chose the function which you want, click the button again and

setup successfully, the OLED Display will return back into setting mode interface, you can make setting for other buttons. Once finish your setting, press "DPI/Mode" button in 3 seconds, exit setting mode interface.
For example, you want to set "⑨Double click" the function "Internet Explorer", steps as below:


Step 1: press "DPI/Mode" button in 3 seconds, enter into setting mode interface.



Step 2: click "⑨Double click" button , enter into function menu interface.



Step 3: scroll "③Middle button" to find the function "Internet Explorer".



Step 4: click the "⑨Double click" and finish the setting. Display turn back to setting mode interface.



Step 5: press "DPI/Mode" button in 3 seconds, back into setting mode interface.



Factory Reset: Press ①Left & ②Right button & ③Middle button at same time in 3 seconds to cancel all self-settings and reset factory setting.

Recharge

When power of the battery is lower than 1%, the battery symbol on the OLED Display will be flash, which reminds you to recharge it. Please recharge it accordingly by the charging cable. During recharging, the battery symbol on the OLED Display is rolling. When it is full, it shows capacity 100%.

Package Contents

- . Vertical Mouse 1pc
- . Nano Receiver 1pc
- . Charging cable 1pc
- . Instruction Manual 1pc

System Requirement

- . For 2.4G mode: compatible with windows 2000/XP/Vista/7/8/10;
- . For Bluetooth mode: compatible with windows 8/10;

WARNING
Batley included inside of this mouse. Do not burn waste or any waste discarded batteries in householdwaste and should be handled in accordance with local wasteregulations and directives dealing with waste batteries.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.