


Using the Set-up Menu

- 5 Touch **[PICTURE QUALITY]** to set the picture quality
The setting will change in the following order each time it is touched.

“LOW (low resolution)” → “NORMAL” → “HIGH (high resolution)”

Tip Factory default value: NORMAL



- 6 Press **[DISP/SEND]** for one second or longer

The camera image will be set and the display will return to the previous screen.

Setting the operation of the Bluetooth headset

By mounting the Bluetooth unit to the radio and using a Bluetooth headset, audio can be received and sent wirelessly.

Refer to “Using the Bluetooth headset” (P.134) for details.

Setting the voice memory operation

By mounting the voice guide unit to the radio, audio that is received or picked up by the microphone can be recorded and then played back or erased later.

Refer to “Using the voice memory” (P.146) for details.

Initialization and saving settings


Reconfiguring the settings

The settings and memory of the radio can be returned to the default factory settings. Refer to “Reconfiguring the Settings” (P.61) for details.

Registering the preset

Current settings such as the frequency and memory channels can be registered in a single preset.


- 1 Press **[DISP/SEND]** for one second or longer
The set-up menu will be displayed.
- 2 Touch **[RESET/CLONE]**



Using the Set-up Menu

3 Touch [2 PRESET]

The screen for confirming the preset registration will be displayed.



4 Touch [OK?]

The preset will be registered.

When canceling the registration, touch [Cancel].



5 Press [DISP] for one second or longer

The display will return to the previous screen.


Recalling the registered preset

The registered preset can be recalled from the set-up menu.

1 Press [DISP] for one second or longer

The set-up menu will be displayed.

2 Touch [RESET/CLONE]



3 Touch [3 RECALL PRESET]

The screen for confirming the recall of the registered preset will be displayed.



4 Touch [OK?]

The registered preset will be recalled and the display will return to the previous screen.

When canceling the recall, touch [Cancel].




Using the Set-up Menu

Sorting the registered memory channels

The memory channels registered in the radio can be sorted in the ascending order.

- 1 Press **[DISP/MENU]** for one second or longer
The set-up menu will be displayed.
- 2 Touch **[RESET/CLONE]**



- 3 Touch **[5 MEM CH SORT]**
The screen for confirming the sorting of the memory channels will be displayed.



- 4 Touch **[OK?]**
The memory channels will be sorted starting from the lowest frequencies.
When canceling the sorting, touch **[Cancel]**.



- 5 The radio will start up again
The power will be switched off once and then it will be switched on automatically.

Copying saved data

All the data saved in the radio can be copied directly to another FTM-400XDR/DE.
Refer to "Using the clone function" (P.153) for details.

Using the Set-up Menu

Call sign settings

Changing the call sign


You can change your own call sign set in the radio.

- 1 Press **[DISP MENU]** for one second or longer

The set-up menu will be displayed.


- 2 Touch **[CALLSIGN]**

The current call sign will be displayed.



- 3 Touch **[CHANGE]**

The character input screen will be displayed.



- 4 Touch a character key


The touched character will be displayed at the top of the screen.

- Tips**
- Up to 10 characters of alphabets, numerics, and a hyphen can be entered.
 - Refer to Page 23 on how to operate the character input screen.



- 5 Touch **[ENT]**

The new call sign will be displayed.



- 6 Touch **[BACK]**




Using the Set-up Menu

- 7** Press  for one second or longer

The call sign will be set and the display will return to the previous screen.

Options List

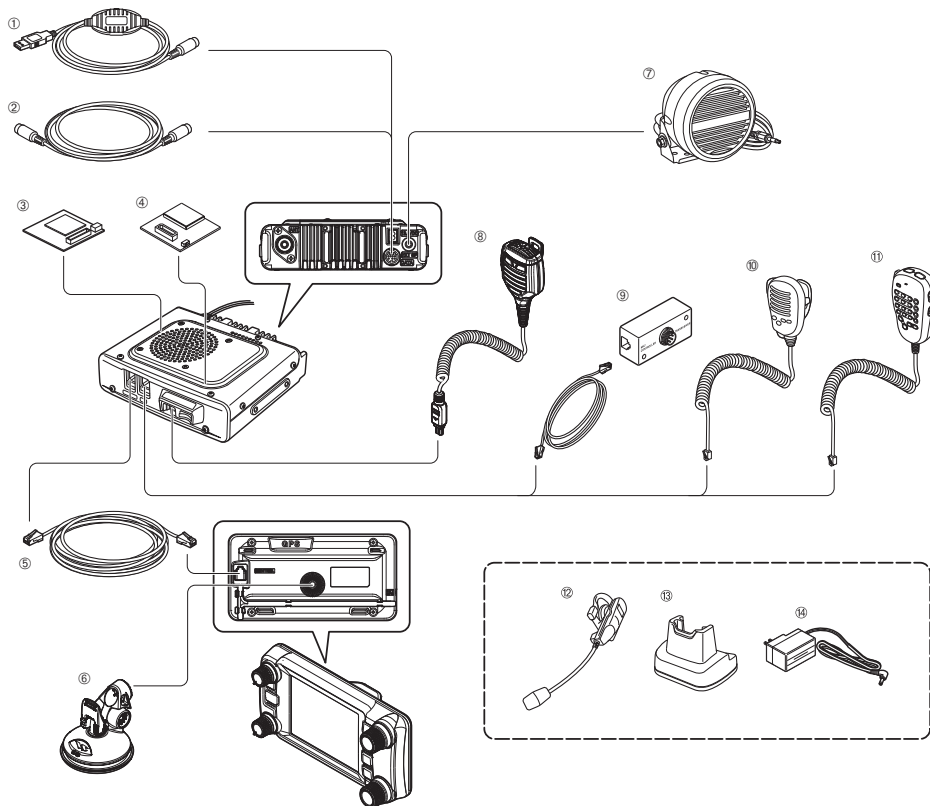

① PC connection cable (SCU-20)

*Same as the one provided

② Cloning cable (CT-166)

③ Voice guide unit (FVS-2)

④ Bluetooth unit (BU-2)

⑤ Control cable (CT-162)

⑥ Controller bracket (MMB-98)

⑦ Water proof (equivalent to IP55) high power external speaker (MLS-200-M10)

⑧ Speaker microphone with camera (MH-85A11U)

⑨ Microphone extension kit (MEK-2)

⑩ Hand Microphone (MH-42C6J)

⑪ DTMF Microphone (MH-48A6JA)

*Same as the one provided

⑫ Water proof Bluetooth headset (monaural) (BH-2A)

⑬ Charging cradle for BH-2A (CD-40)

⑭ Battery charger for CD-40 (PA-46)

● Data cable (CT-163): DIN 10 pin ↔ DIN 6 pin + Dsub 9 pin

● Data cable (CT-164): DIN 10 pin ↔ DIN 6 pin

● Data cable (CT-165): DIN 10 pin ↔ Dsub 9 pin

● Data cable (CT-167): DIN 10 pin ↔ Split end (10 pin)

Maintenance

Care and maintenance

Turn the transceiver OFF before wiping away any dust and stains on the radio using a dry and soft cloth. For stubborn stains, slightly moisten a soft cloth and wring it hard before using it to wipe away the stains.

Caution Never use washing detergents and organic solvents (thinner, benzene etc.). This may result in the paint peeling off or the cover being damaged.

Replacing the fuse

Use ONLY the correct rating (15 A) replacement fuse in the DC cable fuse holder.

Caution When replacing the fuse, disconnect the power supply cable from the radio and from the external DC power supply.


● Replacing the fuse of the DC power supply cable

1 Prepare a new fuse


Use a fuse with a rating of 15 A.

Caution Never use a fuse that is not of the specified rating.

2 Open the fuse holder as shown in the diagram on the right

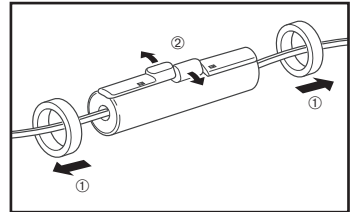


3 Remove the broken fuse

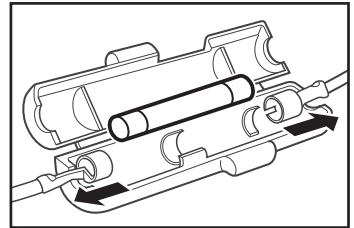

4 Attach the new fuse

5 Close the fuse holder

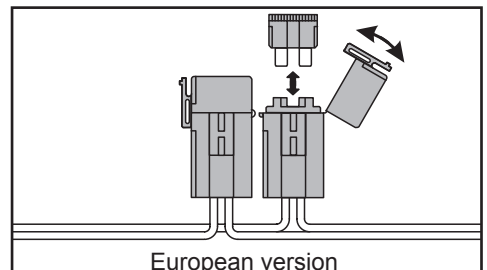

When you have difficulties ...

Caution

Check the following before requesting for repair services.

There is no power

- Is the external power supply connected correctly?
Connect the black wire to the negative (-) terminal and the red wire to the positive (+) terminal.
- Is the voltage and current capacity of the external power supply sufficient?
Check the voltage (13.8 V) and current capacity (20 A or above) of the external power supply.
- Is the fuse broken?
Replace the fuse.

There is no sound

- Is the squelch level or setting too high?
Adjust the squelch level when receiving weak signals.
- Is the volume low?
Increase the volume by turning the VOL knob in a clockwise direction.
- Is the tone squelch or DCS turned on?
When the tone squelch or DCS is turned on, no sound will be heard until signals containing the same tone frequency, or DCS code that have been set are received.
- Is the external speaker connected?
Connect a speaker with an impedance of 4 to 16 Ω correctly.
- Is the Bluetooth headset in use?
Disable the use of the headset or use the set-up menu to allow sound to come from both the headset and the main body speaker.

There is no transmission

- Is the PTT switch pressed properly?
- Is the microphone connected correctly?
Plug the connector all the way into the MIC jack.
- Is the transmission frequency set to the amateur band?
Transmission outside the amateur band is not possible.
- Is the antenna or co-axial cable broken?
Replace the antenna or co-axial cable.
- Is the voltage of the external power supply normal?
When the voltage of the power supply drops during transmit, the transceiver may not work properly.
Use a stable DC power supply with a voltage of 13.8 V and a current capacity of 20 A.

The keys or knobs will not operate

- Is the lock function activated?
Cancel the lock by pressing the POWER / LOCK key.

When you have difficulties ...

About internal spurious signals

Certain frequency combinations of signals received simultaneously, may cause some effect on the receiver mixer and IF circuits due to the high frequency of the internal oscillator.

However, this is not a malfunction (refer to the calculation formulas below: n is any integer).

Depending on the combination of the frequencies received at the same time, there may also be fluctuations in the receiver sensitivity

- Reception frequency = 12.288 MHz $\times n$ times
- Reception frequency = 2.4576 MHz $\times n$ times
- Reception frequency = 11.1 MHz $\times n$ times
- Upper (Band A) frequency = (Lower (Band B) frequency $\pm$ 44.85 MHz) $\times n$ times
- Lower (Band B) frequency = (Upper (Band A) frequency $\pm$ 47.25 MHz) $\times n$ times @ Upper band (Band A) MODE = NFM
- Reception frequency = 15.6 MHz $\times n$ times
- Reception frequency = 6.1444 MHz $\times n$ times
- Reception frequency = 18.432 MHz $\times n$ times

After-market Services

○ The warranty period is 1 year or 2 years from the date of purchase

The warranty certification is enclosed with the product. Breakdowns arising from normal use of the product in accordance with the instructions in the operating manual shall be repaired free-of-charge within a period of 1 year (USA, EXP version) or 2 years (European Version) from the date of purchase.

○ Keep the warranty certificate in a safe location

When the warranty certificate is lost, failures which occur during the warranty period will be treated as chargeable non-warranty claims.

A warranty certificate where necessary information such as the purchase date and the name of the retail store have not been filled in will also be treated as void. Please ensure that the date of purchase and the name of the retail store are filled in correctly in the warranty certificate.

○ You may also check with us for any non-warranty repairs

We will repair at your expense if the functions can be maintained after the repair. Please check with the retail store or Yaesu customer support for more information.

○ Keep the packaging box

When transporting this product for inspection and repair, use the original product packaging box to prevent accidents and damages during the transport.

Specification

● General

Frequency range	: TX 144 - 146 MHz or 144 - 148 MHz 430 - 440 MHz or 430 - 450 MHz : RX 108 - 137 MHz (Air Band) 137 - 174 MHz (144 MHz HAM) 174 - 400 MHz (GEN1) 400 - 480 MHz (430 MHz HAM) 480 - 999.99 MHz (GEN2)
Channel steps	: 5/6.25/8.33/10/12.5/15/20/25/50/100 kHz (8.33 kHz : only for Air band)
Emission Type	: F1D, F2D, F3E, F7W
Frequency stability	: ± 2.5 ppm -4°F to $+140^{\circ}\text{F}$ (-20°C to $+60^{\circ}\text{C}$)
Antenna impedance	: 50 Ω
Supply Voltage	: Nominal 13.8 V DC, negative ground
Current consumption	: 0.5 A (receive) 11 A (50 W TX, 144 MHz) 12 A (50 W TX, 430 MHz)
Operating temperature	: -4°F to $+140^{\circ}\text{F}$ (-20°C to $+60^{\circ}\text{C}$)
Case size	: Radio unit: 5.5" (W) $\times$ 1.6" (H) $\times$ 4.9" (D) (140 $\times$ 40 $\times$ 125 mm) w/o fan Controller: 5.5" (W) $\times$ 2.8" (H) $\times$ 0.8" (D) (140 $\times$ 72 $\times$ 20 mm)
Weight (approx.)	: 2.64 lbs (1.2 kg) with radio unit, controller, control cable

● Transmitter

RF power output	: 50/20/5 W
Modulation type	: F1D, F2D, F3E : Variable Reactance Modulation F7W : 4FSK (C4FM)
Spurious emission	: At least 60 dB below
Microphone impedance	: About 2 k Ω
DATA terminal input impedance	: About 10 k Ω

Ratings

● Receiver

Circuit type	: Double conversion super-heterodyne	
Intermediate frequencies	: A band: 1st : 47.25 MHz, 2nd :450 kHz B band: 1st : 44.85 MHz, 2nd : 450 kHz	
Receiver Sensitivity	: 108 - 137 MHz (AM) 137 - 140 MHz (FM) 140 - 150MHz (FM) 150 - 174 MHz (FM) 174 - 222 MHz (FM) 222 - 300 MHz (FM) 300 - 336 MHz (AM) 336 - 420 MHz (FM) 420 - 470 MHz (FM) 470 - 520 MHz (FM) 800 - 900 MHz (FM) 900 - 999.99 MHz (FM)	0.8μV typ for 10 dB SN 0.2μV for 12 dB SINAD 0.2μV for 12 dB SINAD 0.25μV for 12 dB SINAD 0.3μV typ for 12 dB SINAD 0.25μV typ for 12 dB SINAD 0.8μV typ for 10 dB SINAD 0.25μV for 12 dB SINAD 0.2μV typ for 12 dB SINAD 0.2μV for 12 dB SINAD 0.4μV typ for 12 dB SINAD 0.8μV typ for 12 dB SINAD Cellular blocked (USA only)
	Digital mode	
	140 - 150 MHz (Digital)	0.19μV typ for BER 1%
	420 - 470 MHz (Digital)	0.19μV typ for BER 1%
Squelch sensitivity	: 0.16μV (144/430 MHz)	
Selectivity	: AM, FM 12 kHz/35 kHz (-6 dB/-60 dB)	
AF output	: 3 W (8 Ω, THD10%, 13.8 V) internal speaker 8 W (4 Ω, THD10%, 13.8 V) Optional MLS-200-M10	
AF output impedance	: 4 - 16 Ω	
Strength of secondary radio waves	: 4 nW and below	

Cautions

- Rated values are at normal temperature and pressure.
- Ratings and specifications are subject to change without notice.

● Symbols placed on the equipment

== Direct current

A

About internal spurious signals	209
accessories	13
after-market services	209
alphabet input screen	23
altitude	
measuring	90
altitude changes	
erasing	91
altitude display screen	21
AMS	45, 46
AMS transmission mode	174
analog FM mode	46
announce function	
setting operation	149
antenna	25
connecting	29
install	25
ANT terminal	16
APO function	119
APRS	
baud rate	197
operating band	196
APRS function	98
APRS function settings	199
ARS	52
audio	
erasing the recorded one	148
muting	48
recording and listening to	144
recording the received one	147
replaying the recorded one	147
auto repeater shift	186

B

background color of the frequency display	
area	60
backtrack function	93, 95
band scope	47
band scope display width	172
band scope screen	19
beep volume	54, 188
Bluetooth headset	
identifying	137
operation	201
setting the operation	136
using	139
Bluetooth unit	
mounting	134

C

call sign	37
changing	204
call sign settings	204
car battery	30

checking the route using a personal	
computer	90
clock shift of the CPU	188
clone function	153
communicating	49
communicating with specified partner	
stations	102
communication mode	45
compass panel	
changing the direction	94
compass screen	20, 93, 172
COM port	193
connecting the power supply	30
connecting the radio	29
connecting to a personal computer	155
CONTROL jack	15, 16
controller	14
connecting to the main body	29
installing	28
copying saved data	203
Copying the Radio Data to another	
Transceiver	151
copyrights	4
countdown timer	117
count down timer screen	22
CTCSS	102
current location	
registering	95
Customize Menu Settings and User	
Preferences	163

D

data communication	
baud rate	197
operating band	196
data communication settings	193
DATA jack	16, 155
date and time	56, 183
display format	184
DCS	104
using	105
DCS code	180
setting	104
DCS transmission	111
DCS transmission / tone reception	111
departure point	
registering	95
DIAL knob	14, 15
Band A	14
Band B	15
digital code squelch	104
display background color	172
display brightness	58, 173
display contrast	173
display method for my position	178
display mode	20

Index

DISP/SETUP key	14
distance scale.....	91
DTMF	112
DTMF code	
registering	112, 180
transmission method	180
transmitting	
manually.....	114
registered code	113
DTMF function.....	112
dual band screen.....	19
dual receive.....	81
restart condition.....	82
DWN.....	17
D/X key.....	14

E

external device connected.....	155
external power supply equipment.....	32
external speaker.....	162
EXT GPS jack	15, 84
EXT SP jack	16, 162

F

FM mode	51
F/MW key	15
frequency step.....	188
frequency steps.....	41
FR mode.....	46
function menu screen.....	19
functions and configuration settings	183
fuse	
replacing.....	207

G

gain.....	50
geodetic reference system	92, 192
GM function.....	99
GM key	15
GPS.....	83
GPS function	83
GPS log function	89
GPS screen.....	23
group monitor function settings	183

H

home channel	
changing the frequency.....	64
monitoring	81
recalling.....	63

I

initialization and saving settings.....	201
inputting the character.....	23

installation location when used in a mobile unit.....	24
installing the radio	24
internal spurious intensity.....	209
interval for recording the GPS position information.....	192

L

lap timer.....	116
lap timer screen.....	22
latitude and longitude display screen	88
Listening to the frequency voice	
announcement.....	149
locking the knobs and switches.....	55

M

main body.....	16
installing	27
maintenance.....	207
memories to be skipped	77
memory	
erasing	65
naming	66
recalling.....	63
writing.....	62
memory channel.....	62
sorting	203
memory channel settings	179
memory mode	44
memory scan.....	74
memory scan method.....	179
memory tag	
display method	179
memory tag display	67
message	
creating and sending.....	125
downloading	124
forwarding	132
receiving.....	122
Registering standard messages.....	128
replying to.....	130
sending.....	122, 125
sorting	123
standard	127
viewing	122
MIC jack	16
microphone	
connecting.....	29
microphone (MH-48A6JA).....	17
micro-SD card	33
copying data from.....	152
copying data to.....	151
initializing.....	35
Initializing	200

Index

installing	34
removing	34
setting up	33
writing group IDs to	200
writing settings to	199
micro-SD card settings	199
micro-SD card slot	16
modulation mode	46

N

Narrow FM mode	47
notification of an incoming call using the bell 110, 181	
numbers and symbols input screen	23

O

operating band	38
operating mode	44
optional device settings	200
Optional receive Audio Record and Playback	144
options list	206
other stations	
registering the locations	96

P

packet communication	158
setting the operation	160
pager function	106
activating	108
pairing	137
partner station information	
pop-up time	177
picture	
downloading	124
forwarding	132
receiving	122
replying to	130
sending	122, 125
sending the saved one	129
sorting	123
taking	141
taking with the camera attached to the speaker microphone	140
viewing	122
viewing the saved one	143
PIN code	137, 191
PMS	79
PMS memory channel	79
position information	87
displaying the current	87
displaying the partner station	87
recording	89
position information display screen	172

position information screen	88
position information to the computer	156
positioning using GPS	83
positioning using the external GPS device... 84, 192	
position of the destination	97
power off	36
automatic	191
power supply/LOCK switch	14
preset	
recalling	202
registering	201
program key of the microphone	189
programmable key	
assigning the WX function to	71
programmable memory	
writing into	79
PTT	17

R

radio wave format	174
real-time navigation function	93, 94
recalling a specified station	108
receiving	36
reception range	
expanding	190
reconfiguring the settings	61, 201
registered trademarks	4
repeater	52
repeater shift	
direction	186
width	187
reset	
erasing only the registered memory channels	61
restoring all settings	61
restoring the APRS settings	61
reverse tone	110

S

satellite capture status	86
saving the destination	95
scanning direction	182
scanning function	72
scanning method	75
scanning stop	183
scanning the programmable memories... 79, 80	
scan only the specified memory channels 76	
scan settings	182
screen	18
screen display settings	171
Select the screen to be displayed	171
sensitivity of the microphone	50, 179

Index

Setting the receive station code	106
set-up menu	
basic operations	163
list	164
using	171
signal reception method	182
smart navigation function	93
snapshot function	140
speaker microphone with camera	200
connecting	140
specification	210
specified memories	75
specified stations	
recalling	180
split memory	68
squelch code of the digital mode	176
squelch detection	198
squelch level	39
squelch terminal	198
squelch type	
setting for transmission and reception	
separately	181
squelch type of the digital mode	175
Standby Beep	178
stopwatch function	115
sub-band mute	179

T

Taking Pictures with the optional Camera (Snapshot Function)	140
time display	173
timer / clock screen	115
timer/clock screen	21
timer function	115
time zone	92, 185
TNC	158
Tone Calling	53
tone frequency	180
setting	102
tone signal settings	180
tone squelch	102
using	103
tone transmission / DCS reception	111
TOT function	120
touch key	121
touch panel	4
touch panel display	14
transmission time	
limiting	191
Transmit and receive settings	174
transmit power	50
transmitting	49

transmitting the tone signal	103
tuning the radio	40
turning the power on	36

U

unit display	191
UP	17
updating the firmware of the radio	157
User Programmed Reverse CTCSS Decoder	110
user programmed reverse CTCSS tone	180

V

V/D mode	46
version of the DSP program	178
VFO mode	44
VFO scan	72
voice guide unit	
mounting	144
voice memory	146
operation	201
setting the operation	146
VOL knob	14
voltage display	173
volume	38
VOX	134

W

weather alert	71, 182
weather channels	70
recalling	71
When you have difficulties	208
WX function	70

1. Changes or modifications to this device not expressly approved by YAESU MUSEN could void the user's authorization to operate this device.
2. This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference including received, interference that may cause undesired operation.
3. The scanning receiver in this equipment is incapable of tuning, or readily being altered, by the User to operate within the frequency bands allocated to the Domestic public Cellular Telecommunications Service in Part 22.

Part 15.21: Changes or modifications to this device not expressly approved by YAESU MUSEN could void the user's authorization to operate this device.

DECLARATION BY MANUFACTURER

The Scanner receiver is not a digital scanner and is incapable of being converted or modified to a digital scanner receiver by any user.

WARNING: MODIFICATION OF THIS DEVICE TO RECEIVE CELLULAR RADIOTELEPHONE SERVICE SIGNALS IS PROHIBITED UNDER FCC RULES AND FEDERAL LAW.

Disposal of your Electronic and Electric Equipment

Products with the symbol (crossed-out wheeled bin) cannot be disposed as household waste.

Electronic and Electric Equipment should be recycled at a facility capable of handling these items and their waste by products.

In EU countries, please contact your local equipment supplier representative or service center for information about the waste collection system in your country.



Attention in case of use

This transceiver works on frequencies which are not generally permitted.

As for the actual usage, the user has to possess an amateur radio licence.

Usage is allowed only in the frequency bands which are allocated for amateur radios.

List of national codes					
AT	BE	BG	CY	CZ	DE
DK	ES	EE	FI	FR	GB
GR	HR	HU	IE	IT	LT
LU	LV	MT	NL	PL	PT
RO	SK	SI	SE	CH	IS
LI	NO	—	—	—	—

YAESU

The radio

YAESU MUSEN CO., LTD.

Tennozu Parkside Building
2-5-8 Higashi-Shinagawa, Shinagawa-ku, Tokyo
140-0002 Japan

YAESU USA

6125 Phyllis Drive, Cypress, CA 90630, U.S.A.

YAESU UK

Unit 12, Sun Valley Business Park, Winnall Close
Winchester, Hampshire, SO23 0LB, U.K.

Copyright 2015

YAESU MUSEN CO., LTD.

All rights reserved.

No portion of this manual
may be reproduced
without the permission of
YAESU MUSEN CO., LTD.

1508-EM Printed in Japan



E H O 4 4 M 2 1 0