


M24LR-DISCOVERY evaluation kit

Data brief

Features

- M24LR board
 - M24LR04E-RMN6T/2 Dual Interface EEPROM with I²C and ISO/IEC 15693 RF interfaces, 4 Kbits of EEPROM and password protection in SO8N package
 - STM8L152C6T6 8-bit microcontroller, with 8 Kbytes of Flash memory
 - STTS751-0WB3F, low-voltage digital temperature sensor
 - 20 x 40 mm inductive antenna etched on the PCB
 - Two function buttons (User and Reset)
- SWIM connector for programming and debugging
- I²C connectors
- LCD (24 segments, 4 commons)
- RF transceiver board
 - CR95HF-VMD5T 13.56 MHz multi-protocol contactless transceiver IC with SPI and UART serial access
 - STM32F103CB 32-bit microcontroller, with 128 Kbytes of Flash memory
 - 47 x 34 mm 13.56 MHz inductive antenna etched on PCB and associated circuitry
 - USB connector for communication with host PC and demonstration board powering

Figure 1. M24LR board and RF transceiver board

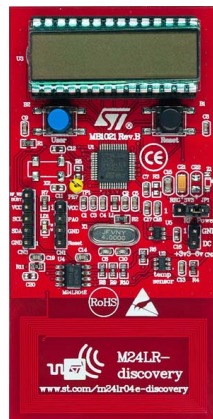

M24LR board



RF transceiver board

1 Description

M24LR-DISCOVERY is a ready-to-use kit which features the M24LR04E-R Dual Interface EEPROM IC. It addresses a wide range of applications such as industrial or medical equipment and consumer electronics. This kit contains 2 different boards (see [Figure 1](#)):

- The M24LR board is battery-less and is powered by RFID readers or NFC-enabled phones supporting ISO/IEC 15693.
- The RF transceiver board is an RFID reader demonstration board and is composed, among other parts, of a CR95HF (13.56 MHz multi-protocol contactless transceiver IC with SPI and UART serial access). This board has to be plugged in to a PC and comes with a demonstration software.

The M24LR board also works with Android NFC phones supporting ISO/IEC 15693. An application called NfcV-Reader is available on Google Play. Performance may vary depending on NFC phone's RF management.

System requirements

- Windows PC (2000, XP, Vista, 7)
- ISO/IEC 15693 capable NFC phones

1.1 Demonstration software

The M24LRxx application software can be uploaded from www.st.com/m24lr04e-discovery and installed on your PC. It consists in:

- an M24LR/CR95 application software setup file [STSW-M24LR011]
- an STM8L firmware

1.1.1 M24LRxx application software

The PC software allows to:

1. Launch *setup.exe* executable.
2. Choose *CR95HF DEMO KIT* tab.
3. Select *demo NDEF messages* tab.
4. Click on *demo NDEF & Energy Harvesting* tab.

The latest versions of this demonstration source code and associated documentation can be downloaded from www.st.com/m24lr04e-discovery.

1.1.2 STM8L firmware

Development toolchain

In case of an STM8L firmware change, the user has to download:

- STMicroelectronics, ST Visual Develop (STVD)

STM8L firmware

Demonstration software is preloaded in the board's Flash memory. This demonstration displays on the LCD:

- The text messages stored in the M24LR04E-R Dual Interface EEPROM
- The internal voltage of the M24LR board
- The ambient temperature measured from the sensor

1.2 Android application

Install the NfcV-Reader applet available from Google Play. This application enables the NFC communication (Settings-Wireless & Networks-NFC) for evaluation on an Android device.

1. Download the NfcV-Reader App from Google Play and install it on the Android device.
2. Launch the NfcV-Reader application.
3. Place the device's NFC antenna close to the M24LR board antenna.

The NFC phone powers the M24LR board.

The text message can be changed using the NFC phone (select *NDEF function* and select *write NDEF message* menu).

Performance may vary depending on NFC phone's RF management.

2 Revision history

Table 1. Document revision history

Date	Revision	Changes
17-Jul-2012	1	Initial release.
11-Mar-2013	2	Updated the first item of the M24LRxx application software in Section 1.1: Demonstration software . Updated the name of the executable file in Section 1.1.1: M24LRxx application software .

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

ST PRODUCTS ARE NOT AUTHORIZED FOR USE IN WEAPONS. NOR ARE ST PRODUCTS DESIGNED OR AUTHORIZED FOR USE IN: (A) SAFETY CRITICAL APPLICATIONS SUCH AS LIFE SUPPORTING, ACTIVE IMPLANTED DEVICES OR SYSTEMS WITH PRODUCT FUNCTIONAL SAFETY REQUIREMENTS; (B) AERONAUTIC APPLICATIONS; (C) AUTOMOTIVE APPLICATIONS OR ENVIRONMENTS, AND/OR (D) AEROSPACE APPLICATIONS OR ENVIRONMENTS. WHERE ST PRODUCTS ARE NOT DESIGNED FOR SUCH USE, THE PURCHASER SHALL USE PRODUCTS AT PURCHASER'S SOLE RISK, EVEN IF ST HAS BEEN INFORMED IN WRITING OF SUCH USAGE, UNLESS A PRODUCT IS EXPRESSLY DESIGNATED BY ST AS BEING INTENDED FOR "AUTOMOTIVE, AUTOMOTIVE SAFETY OR MEDICAL" INDUSTRY DOMAINS ACCORDING TO ST PRODUCT DESIGN SPECIFICATIONS. PRODUCTS FORMALLY ESCC, QML OR JAN QUALIFIED ARE DEEMED SUITABLE FOR USE IN AEROSPACE BY THE CORRESPONDING GOVERNMENTAL AGENCY.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2013 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com