



TEST REPORT

Report No. : CHTEW19080027

Report verification :



Report Reference No. : SHT1906061802EW

FCC ID : 2APQ9-S5-1

Applicant's name : Shenzhen JX ROBOT Technology Co., Ltd.

Address : 9th Floor, B Area, Building 1, Yulv Hanhaida Hi-Tech Park, Guangming New District

Manufacturer : Shenzhen JX ROBOT Technology Co., Ltd.

Address : 9th Floor, B Area, Building 1, Yulv Hanhaida Hi-Tech Park, Guangming New District

Test item description : Handheld 3-axis Gimbal Stabilizer

Trade Mark : -

Model/Type reference : S5

Listed Model(s) : -

Standard : 47 CFR FCC Part 15 Subpart B

Date of receipt of test sample : Jun.28, 2019

Date of testing : Jun.28, 2019-Aug.08, 2019

Date of issue : Aug.09, 2019

Result : Pass

Compiled by

(position+printed name+signature) .. : File administrators Echo Wei

Echo Wei

Supervised by

(position+printed name+signature) .. : Project Engineer Edward Pan

Edward Pan

Approved by

(position+printed name+signature) .. : RF Manager Hans Hu

Hans Hu

Testing Laboratory Name : Shenzhen Huatongwei International Inspection Co., Ltd.

Address : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely corresponds to the test sample.

Contents

<u>1.</u>	<u>TEST STANDARDS AND REPORT VERSION.....</u>	<u>3</u>
1.1.	Test Standards	3
1.2.	Report version information	3
<u>2.</u>	<u>TEST DESCRIPTION</u>	<u>4</u>
<u>3.</u>	<u>SUMMARY</u>	<u>5</u>
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	EUT operation mode	5
3.4.	Configuration of Tested System	5
3.5.	Support unit used in test configuration	5
<u>4.</u>	<u>TEST ENVIRONMENT.....</u>	<u>6</u>
4.1.	Address of the test laboratory	6
4.2.	Test Facility	6
4.3.	Environmental conditions	7
4.4.	Statement of the measurement uncertainty	7
4.5.	Equipments Used during the Test	8
<u>5.</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>9</u>
5.1.	Conducted Emissions Test	9
5.2.	Radiated Emissions Test	12
<u>6.</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>16</u>
<u>7.</u>	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	<u>17</u>

1. TEST STANDARDS AND REPORT VERSION

1.1. Test Standards

The tests were performed according to following standards:

[47 CFR FCC Part 15 Subpart B](#) - Unintentional Radiators

[ANSI C63.4: 2014](#) – American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40GHz

1.2. Report version information

Revision No.	Date of issue	Description
N/A	2019-08-09	Original

2. TEST DESCRIPTION

Test Item	Section in CFR 47	Result	Test Engineer
Conducted Emissions	15.107(a)	PASS	Kang Yang
Radiated Emissions	15.109(a)	PASS	Tony Duan

Note: The measurement uncertainty is not included in the test result.

3. SUMMARY

3.1. Client Information

Applicant:	Shenzhen JX ROBOT Technology Co., Ltd.
Address:	9th Floor, B Area, Building 1,Yulv Hanhaida Hi-Tech Park, Guangming New District
Manufacturer:	Shenzhen JX ROBOT Technology Co., Ltd.
Address:	9th Floor, B Area, Building 1,Yulv Hanhaida Hi-Tech Park, Guangming New District

3.2. Product Description

Name of EUT:	Handheld 3-axis Gimbal Stabilizer
Trade Mark:	-
Model No.:	S5
Listed Model(s)	-
Power supply:	DC 3.7V
Adapter information:	-

3.3. EUT operation mode

Test mode	Describe
Charging for mobile phone	Keep the EUT works at charging for mobile phone status.

3.4. Configuration of Tested System

N/A

3.5. Support unit used in test configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

○	Adapter	Manufacturer:	Panasonic
		Model No.:	SAE00120
○	Mobile Phone	Manufacturer:	One Plus
		Model No.:	One Plus 5

4. TEST ENVIRONMENT

4.1. Address of the test laboratory

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd.

Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Phone: 86-755-26748019 Fax: 86-755-26748089

4.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No. 3902.01

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 762235

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 762235.

IC-Registration No.: 5377A

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377A.

ACA

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

4.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

4.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Huatongwei laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emissions	30~1000MHz	4.90 dB	(1)
Radiated Emissions	1~18GHz	4.96 dB	(1)
Conducted Disturbance	0.15~30MHz	3.02 dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

4.5. Equipments Used during the Test

● Conducted Emission						
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Shielded Room	Albatross projects	N/A	N/A	2018/09/28	2023/09/27
●	EMI Test Receiver	R&S	ESCI	101247	2018/10/27	2019/10/26
●	Artificial Mains	SCHWARZBECK	NNLK 8121	573	2018/10/27	2019/10/26
●	Pulse Limiter	R&S	ESH3-Z2	100499	2018/10/27	2019/10/26
●	RF Connection Cable	HUBER+SUHNER	EF400	N/A	2018/11/15	2019/11/14
●	Test Software	R&S	ES-K1	N/A	N/A	N/A
○	Single Balanced Telecom Pair ISN	FCC	FCC-TLISN-T2-02	20371	2018/10/28	2019/10/27
○	Two Balanced Telecom Pairs ISN	FCC	FCC-TLISN-T4-02	20373	2018/10/28	2019/10/27
○	Four Balanced Telecom Pairs ISN	FCC	FCC-TLISN-T8-02	20375	2018/10/28	2019/10/27
○	V-Network	R&S	ESH3-Z6	100211	2018/10/27	2019/10/26
○	V-Network	R&S	ESH3-Z6	100210	2018/10/27	2019/10/26
○	2-Line V-Network	R&S	ESH3-Z5	100049	2018/10/27	2019/10/26
● Radiated Emission-6th test site						
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	SAC-3m-02	N/A	2018/09/30	2021/09/29
●	EMI Test Receiver	R&S	ESCI	100900	2018/10/28	2019/10/27
●	Loop Antenna	R&S	HFH2-Z2	100020	2017/11/20	2020/11/19
●	Ultra-Broadband Antenna	SCHWARZBECK	VULB9163	546	2017/04/05	2020/04/04
●	Pre-Amplifier	SCHWARZBECK	BBV 9742	N/A	2018/11/15	2019/11/14
●	RF Connection Cable	HUBER+SUHNER	N/A	N/A	2018/09/28	2019/09/27
●	RF Connection Cable	HUBER+SUHNER	SUCOFLEX104	501184/4	2018/09/28	2019/09/27
●	Test Software	R&S	ES-K1	N/A	N/A	N/A
●	Turntable	Maturo Germany	TT2.0-1T	N/A	N/A	N/A
●	Antenna Mast	Maturo Germany	CAM-4.0-P-12	N/A	N/A	N/A
● Radiated emission-7th test site						
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	SAC-3m-01	N/A	2018/09/30	2021/09/29
●	Spectrum Analyzer	R&S	FSP40	100597	2018/10/27	2019/10/26
●	Horn Antenna	SCHWARZBECK	9120D	1011	2017/03/27	2020/03/26
●	Pre-amplifier	BONN	BLWA0160-2M	1811887	2018/11/14	2019/11/13
●	Pre-amplifier	CD	PAP-0102	12004	2018/11/14	2019/11/13
●	Broadband Pre-amplifier	SCHWARZBECK	BBV 9718	9718-248	2018/04/26	2019/04/25
●	RF Connection Cable	HUBER+SUHNER	RE-7-FH	N/A	2018/11/15	2019/11/14
●	RF Connection Cable	HUBER+SUHNER	RE-7-FL	N/A	2018/11/15	2019/11/14
●	Test Software	Audix	E3	N/A	N/A	N/A
●	Turntable	Maturo Germany	TT2.0-1T	N/A	N/A	N/A
●	Antenna Mast	Maturo Germany	CAM-4.0-P-12	N/A	N/A	N/A

5. TEST CONDITIONS AND RESULTS

5.1. Conducted Emissions Test


LIMIT

FCC CFR Title 47 Part 15 Subpart B Section 15.107:

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

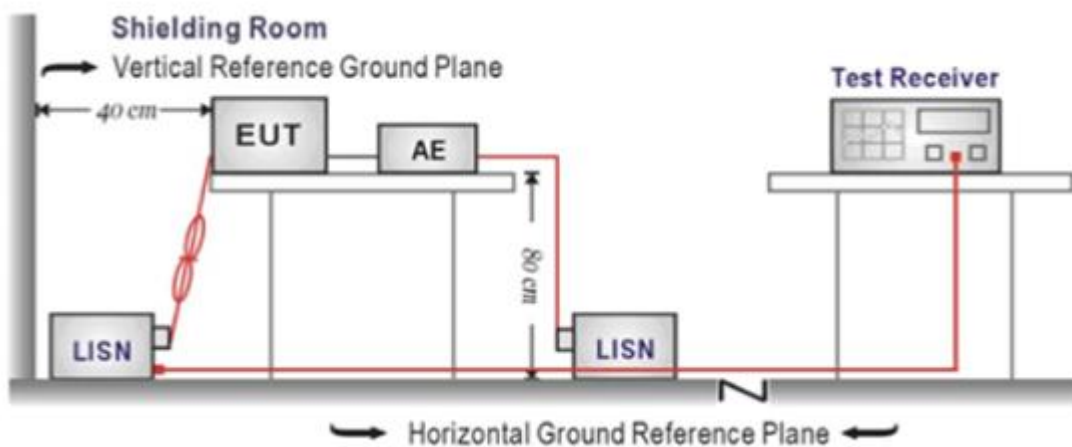

TEST PROCEDURE

1. The EUT was setup according to ANSI C63.4:2014
2. The EUT was placed on a plat form of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50ohm / 50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST MODE:


Please refer to the clause 3.3

TEST RESULTS

☒ Passed ☐ Not Applicable

Test Line:

L

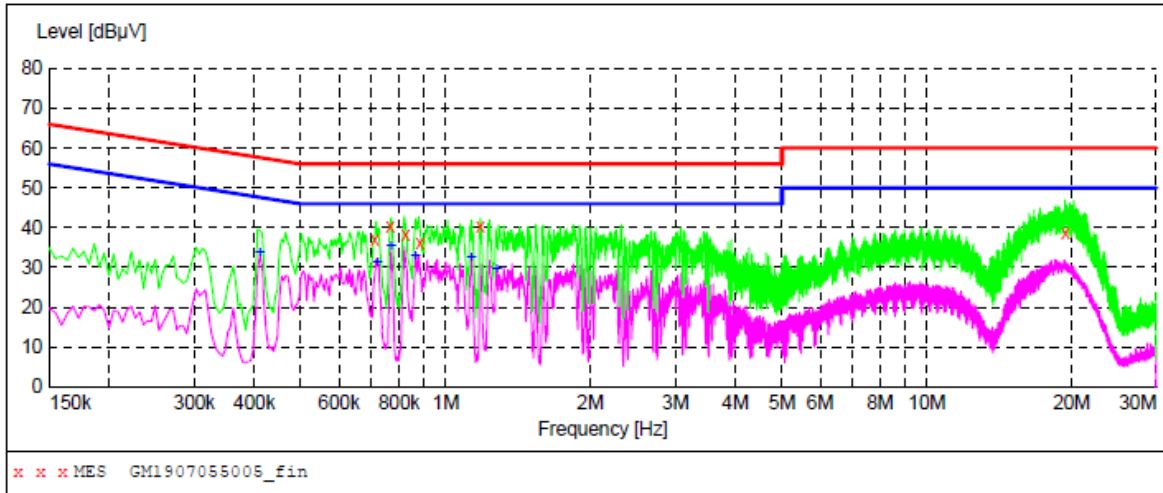**MEASUREMENT RESULT: "GM1907055005_fin"**

7/5/2018 11:48AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.712500	37.00	9.9	56	19.0	QP	L1	GND
0.766500	40.40	9.9	56	15.6	QP	L1	GND
0.825000	38.20	9.9	56	17.8	QP	L1	GND
0.883500	36.20	9.9	56	19.8	QP	L1	GND
1.180500	40.50	9.9	56	15.5	QP	L1	GND
19.410000	38.60	10.2	60	21.4	QP	L1	GND


MEASUREMENT RESULT: "GM1907055005_fin2"

7/5/2018 11:48AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.411000	33.70	9.9	48	13.9	AV	L1	GND
0.721500	31.40	9.9	46	14.6	AV	L1	GND
0.771000	35.20	9.9	46	10.8	AV	L1	GND
0.865500	33.00	9.9	46	13.0	AV	L1	GND
1.131000	32.30	9.9	46	13.7	AV	L1	GND
1.275000	29.60	9.9	46	16.4	AV	L1	GND

Test Line:

N

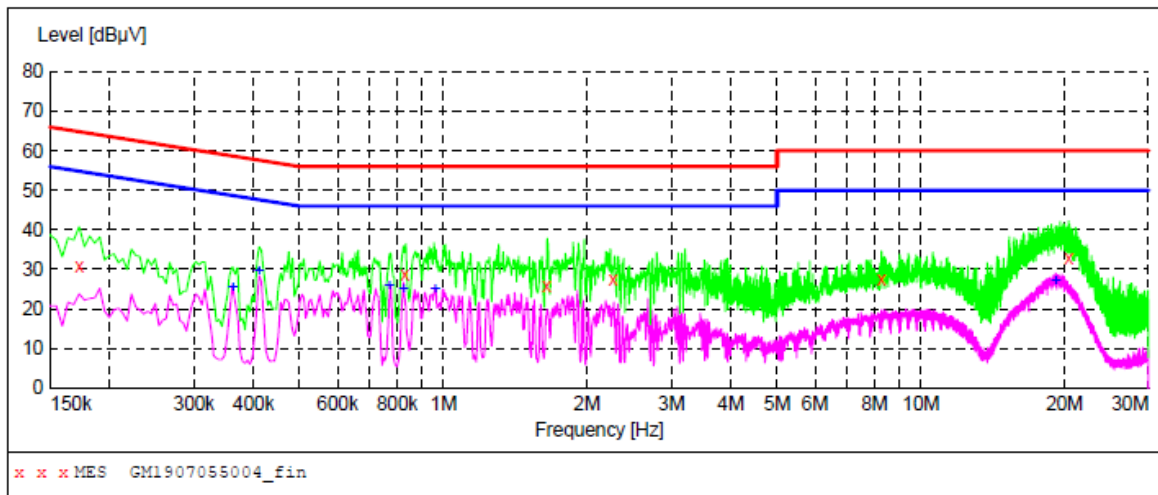**MEASUREMENT RESULT: "GM1907055004_fin"**

7/5/2018 11:45AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.172500	31.00	9.9	65	33.8	QP	N	GND
0.829500	28.70	9.9	56	27.3	QP	N	GND
1.644000	26.00	9.9	56	30.0	QP	N	GND
2.265000	27.60	9.9	56	28.4	QP	N	GND
8.254500	27.30	10.1	60	32.7	QP	N	GND
20.413500	33.00	10.2	60	27.0	QP	N	GND

MEASUREMENT RESULT: "GM1907055004_fin2"

7/5/2018 11:45AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.361500	25.20	9.9	49	23.5	AV	N	GND
0.411000	29.40	9.9	48	18.2	AV	N	GND
0.771000	26.00	9.9	46	20.0	AV	N	GND
0.825000	25.10	9.9	46	20.9	AV	N	GND
0.960000	25.00	9.9	46	21.0	AV	N	GND
19.153500	26.90	10.2	50	23.1	AV	N	GND

5.2. Radiated Emissions Test


LIMIT

FCC CFR Title 47 Part 15 Subpart B Section 15.109


Frequency	Limit (dBuV/m @3m)	Value
30MHz-88MHz	40.00	Quasi-peak
88MHz-216MHz	43.50	Quasi-peak
216MHz-960MHz	46.00	Quasi-peak
960MHz-1GHz	54.00	Quasi-peak
Above 1GHz	54.00	Average
	74.00	Peak

TEST CONFIGURATION

➤ 30MHz ~ 1GHz

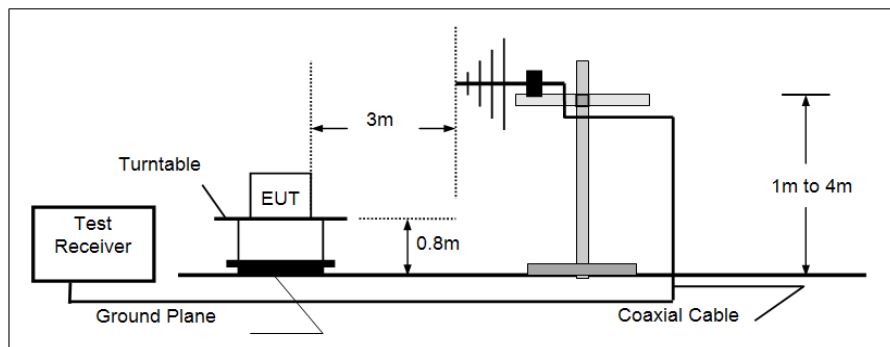

➤ Above 1GHz

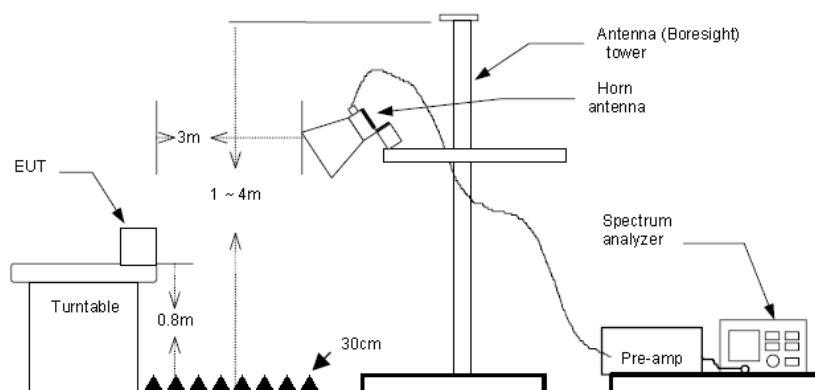

TEST PROCEDURE

1. The EUT was tested according to ANSI C63.4:2014.
2. The EUT is placed on a turn table which is 0.8 meter above ground.
3. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
4. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
5. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna.
6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Below 1GHz,
RBW=120KHz, VBW=300KHz, Sweep=auto, Detector function=peak, Trace=max hold;
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - (3) From 1GHz to 5th harmonic, RBW=1MHz, VBW=3MHz

TEST MODE:

Please refer to the clause 3.3


TEST RESULTS

☒ **Passed** ☐ **Not Applicable**

Note: Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor


Polarization:

Horizontal

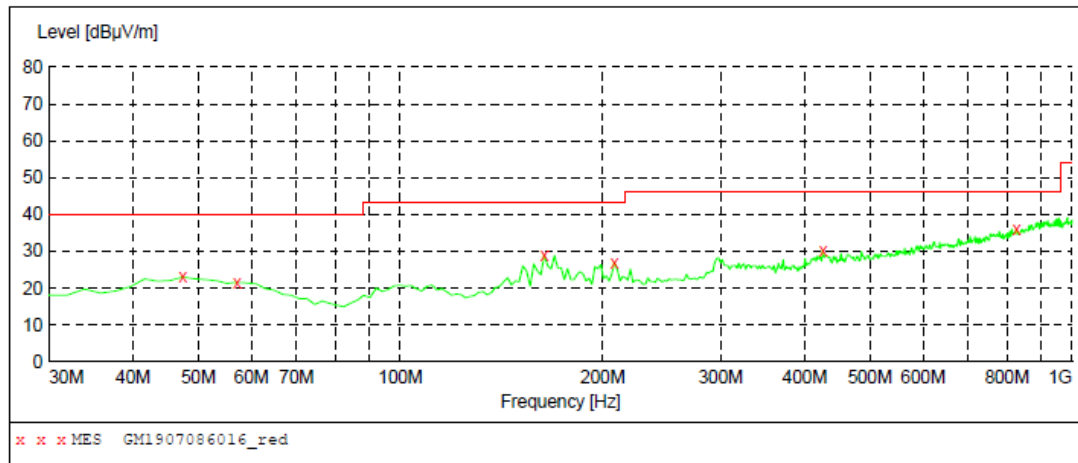**MEASUREMENT RESULT: "GM1907086016_red"**

7/8/2019 11:14AM


Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
47.460000	23.10	-4.9	40.0	16.9	QP	300.0	354.00	HORIZONTAL
57.160000	21.60	-5.5	40.0	18.4	QP	100.0	103.00	HORIZONTAL
163.860000	29.00	-9.4	43.5	14.5	QP	100.0	74.00	HORIZONTAL
208.480000	27.00	-6.6	43.5	16.5	QP	100.0	87.00	HORIZONTAL
425.760000	30.30	0.1	46.0	15.7	QP	100.0	285.00	HORIZONTAL
827.340000	36.00	8.6	46.0	10.0	QP	300.0	7.00	HORIZONTAL

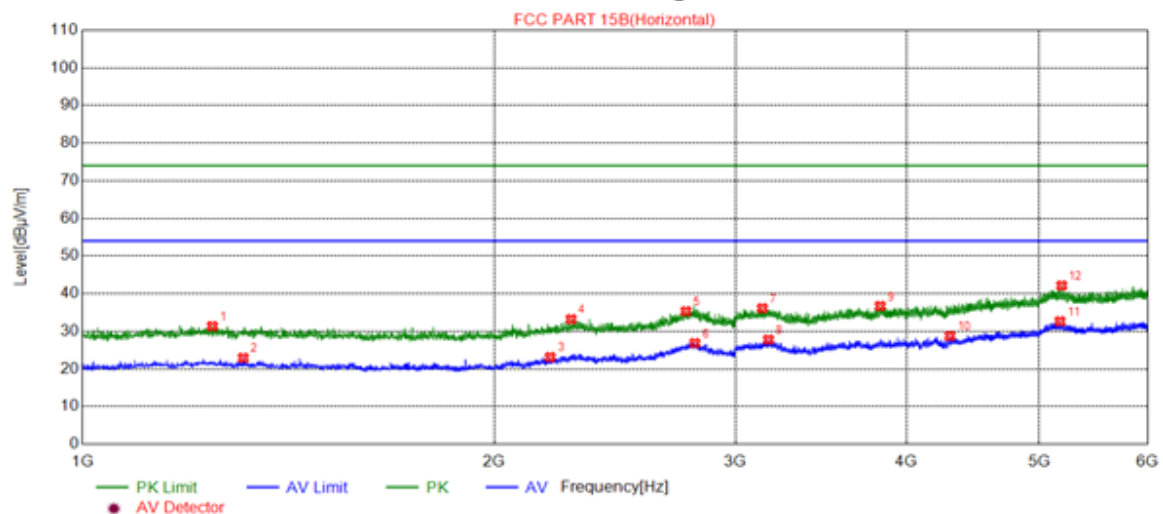**Suspected Data List**

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	1244.375	37.04	-5.71	31.33	74.00	42.67	Horizontal	PK
2	1310.625	28.49	-5.57	22.92	54.00	31.08	Horizontal	AV
3	2196.875	26.12	-3.00	23.12	54.00	30.88	Horizontal	AV
4	2275.625	35.68	-2.49	33.19	74.00	40.81	Horizontal	PK
5	2760.625	33.81	1.50	35.31	74.00	38.69	Horizontal	PK
6	2802.500	24.79	2.05	26.84	54.00	27.16	Horizontal	AV
7	3139.375	35.59	0.52	36.11	74.00	37.89	Horizontal	PK
8	3171.875	27.07	0.69	27.76	54.00	26.24	Horizontal	AV
9	3827.500	34.51	2.18	36.69	74.00	37.31	Horizontal	PK
10	4304.375	24.91	3.82	28.73	54.00	25.27	Horizontal	AV
11	5180.000	23.71	8.94	32.65	54.00	21.35	Horizontal	AV
12	5195.000	33.17	8.97	42.14	74.00	31.86	Horizontal	PK


Polarization:

Vertical

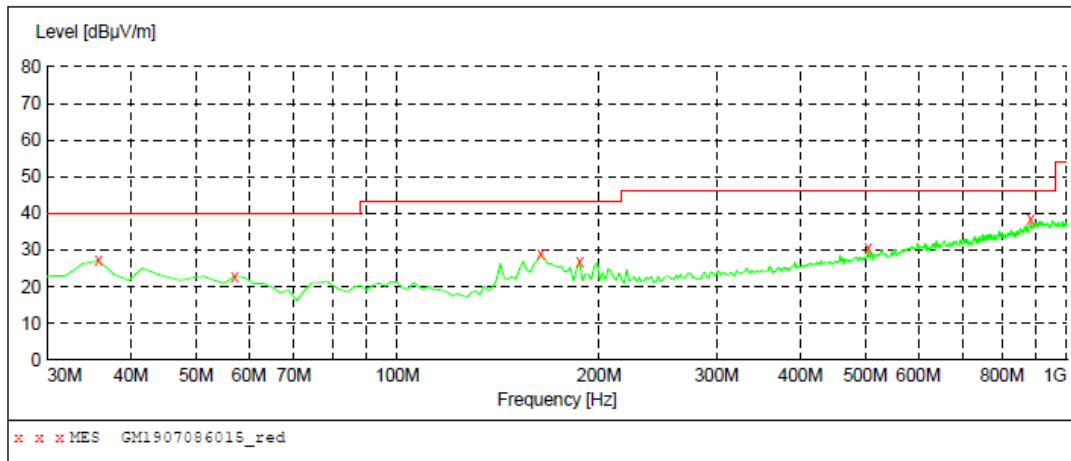**MEASUREMENT RESULT: "GM1907086015_red"**

7/8/2019 11:09AM

Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
35.820000	27.20	-7.7	40.0	12.8	QP	100.0	348.00	VERTICAL
57.160000	22.90	-5.5	40.0	17.1	QP	100.0	3.00	VERTICAL
163.860000	29.00	-9.4	43.5	14.5	QP	100.0	67.00	VERTICAL
187.140000	26.80	-7.7	43.5	16.7	QP	100.0	158.00	VERTICAL
505.300000	30.80	2.1	46.0	15.2	QP	100.0	91.00	VERTICAL
883.600000	38.30	10.1	46.0	7.7	QP	100.0	171.00	VERTICAL

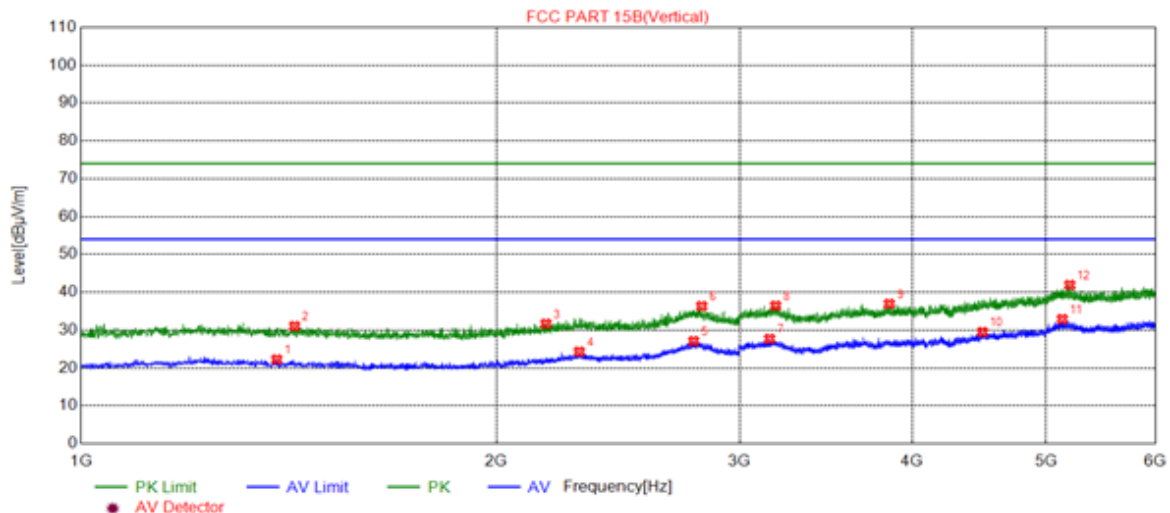

Suspected Data List								
NO.	Freq. [MHz]	Reading [dBuV/m]	Factor [dB]	Level [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Polarity	Detector
1	1386.250	27.80	-5.58	22.22	54.00	31.78	Vertical	AV
2	1428.125	36.63	-5.59	31.04	74.00	42.96	Vertical	PK
3	2171.875	34.93	-3.26	31.67	74.00	42.33	Vertical	PK
4	2296.250	26.64	-2.35	24.29	54.00	29.71	Vertical	AV
5	2778.750	25.32	1.77	27.09	54.00	26.91	Vertical	AV
6	2816.250	34.50	1.83	36.33	74.00	37.67	Vertical	PK
7	3153.750	27.09	0.60	27.69	54.00	26.31	Vertical	AV
8	3185.625	35.65	0.77	36.42	74.00	37.58	Vertical	PK
9	3850.625	34.60	2.33	36.93	74.00	37.07	Vertical	PK
10	4498.125	24.14	5.34	29.48	54.00	24.52	Vertical	AV
11	5138.750	24.03	8.87	32.90	54.00	21.10	Vertical	AV
12	5203.750	32.96	8.96	41.92	74.00	32.08	Vertical	PK

6. TEST SETUP PHOTOS OF THE EUT


Conducted Emissions (AC Mains)



Radiated Emissions (Above 1GHz)



Radiated Emissions (1GHz-6GHz)

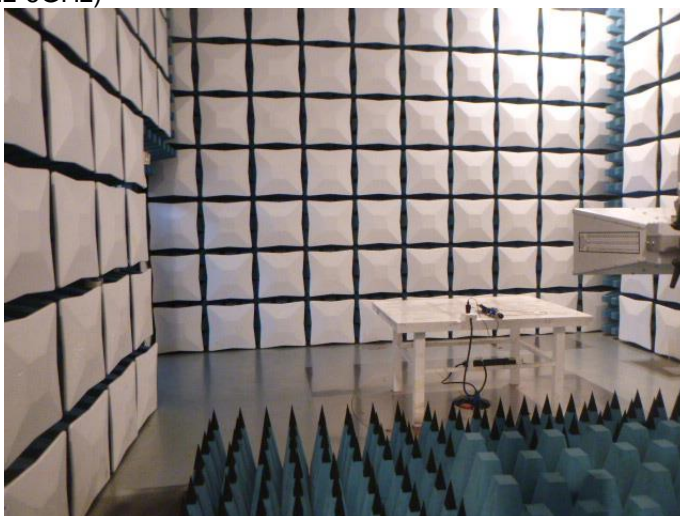

7. EXTERNAL AND INTERNAL PHOTOS OF THE EUT

Reference to the test report No.: CHTEW19080025

-----End of Report-----