

FCC Test Report

Report No.: AGC01110240485FR01

FCC ID	:	2AOKB-T9130
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	eufy Smart Scale C20
BRAND NAME	:	eufy
MODEL NAME	:	T9130
APPLICANT	:	Anker Innovations Limited
DATE OF ISSUE	:	May 15, 2024
STANDARD(S)	:	FCC Part 15 Subpart C §15.247
REPORT VERSION	:	V1.0







Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	May 15, 2024	Valid	Initial Release



Table of Contents

1. General Information	5
2. Product Information	6
2.1 Product Technical Description	6
2.2 Test Frequency List	
2.3 Related Submittal(S) / Grant (S)	7
2.4 Test Methodology	7
2.5 Special Accessories	7
2.6 Equipment Modifications	7
2.7 Antenna Requirement	7
3. Test Environment	
3.1 Address of the Test Laboratory	
3.2 Test Facility	
3.3 Environmental Conditions	9
3.4 Measurement Uncertainty	9
3.5 List of Equipment Use	
4.System Test Configuration	
4.1 EUT Configuration	
4.2 EUT Exercise	
4.3 Configuration of Tested System	
4.4 Equipment Used In Tested System	
4.5 Summary of Test Results	
5. Description of Test Modes	14
6. Duty Cycle Measurement	15
7. RF Output Power Measurement	
7.1 Provisions Applicable	
7.2 Measurement Procedure	
7.3 Measurement Setup (Block Diagram of Configuration)	
7.4 Measurement Result	
8. 6dB Bandwidth Measurement	
8.1 Provisions Applicable	
8.2 Measurement Procedure	
8.3 Measurement Setup (Block Diagram of Configuration)	
8.4 Measurement Results	
9. Power Spectral Density Measurement	
9.1 Provisions Applicable	
9.2 Measurement Procedure	
9.3 Measurement Setup (Block Diagram of Configuration)	
9.4 Measurement Results	
10. Conducted Band Edge And Out-of-Band Emissions	



10.1 Provisions Applicable	
10.2 Measurement Procedure	
10.3 Measurement Setup (Block Diagram of Configuration)	
10.4 Measurement Results	
11. Radiated Spurious Emission	
11.1 Measurement Limit	
11.2 Measurement Procedure	
11.3 Measurement Setup (Block Diagram of Configuration)	
11.4 Measurement Result	50
12. AC Power Line Conducted Emission Test	
12.1 Measurement Limit	
12.2 Measurement Setup (Block Diagram of Configuration)	
12.3 Preliminary Procedure of Line Conducted Emission Test	67
12.4 Final Procedure of Line Conducted Emission Test	67
12.5 Measurement Results	67
Appendix I: Photographs of Test Setup	68
Appendix II: Photographs of Test EUT	68



1. General Information

Applicant	Anker Innovations Limited				
	Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon,				
Address	Hongkong				
Manufacturer	Anker Innovations Limited				
Address	Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon, Hongkong				
Factory	Shenzhen Unique Scales Co., Ltd.				
Address 1	301&601, no.22, Huanping Road, Gaoqiao Community, Pingdi Street, Longgang District Shenzhen City, China				
Address 2	Floor7&8, Buliding4, Dongweifeng New Material industrial Park, No,2 Shengjia Road, Gaoqiao Community, Pingdi Street, Longgang District, Shenzhen City) Guangdong Province, China				
Product Designation	eufy Smart Scale C20				
Brand Name	eufy				
Test Model	T9130				
Series Model(s)	N/A				
Difference Description	N/A				
Date of receipt of test item	May 07, 2024				
Date of Test	May 07, 2024 - May 15, 2024				
Deviation from Standard	No any deviation from the test method				
Condition of Test Sample	Normal				
Test Result	Pass				
Test Report Form No	AGCER-FCC-BLE-V1				

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By

Cool cherry

Cool Cheng (Project Engineer)

May 15, 2024

Reviewed By

Calvin Liu (Reviewer)

May 15, 2024

Approved By

lax Zhan

Max Zhang Authorized Officer

May 15, 2024



2. Product Information

2.1 Product Technical Description

Frequency Band	2400MHz-2483.5MHz
Operation Frequency Range	2402MHz-2480MHz
Bluetooth Version	V5.1
Modulation Type	BLE GFSK 1Mbps GFSK 2Mbps
Number of channels	40
Carrier Frequency of Each Channel	40 Channels (37 Data channels + 3 advertising channels)
Channel Separation	2 MHz
Maximum Transmitter Power	Bluetooth LE (1Mbps): -1.497dBm Bluetooth LE (2Mbps): -1.588dBm
Hardware Version	V1.2
Software Version	003.035.012
Antenna Designation	PCB Antenna
Antenna Gain	2.87dBi
Power Supply	DC 6V by battery
Adapter Information	N/A

2.2 Test Frequency List

Frequency Band	Channel Number	Frequency		
	0	2402 MHz		
	1	2404 MHz		
2400~2483.5MHz	:	:		
	19	2440MHz		
	:	:		
	38	2478 MHz		
	39	2480 MHz		
Note: $f = 2402 + 2*k$ MHz, $k = 0,, 39$ f is the operating frequency (MHz); k is the operating channel.				



2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: 2AOKB-T9130, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

2.4 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules

2.5 Special Accessories

Not available for this EUT intended for grant.

2.6 Equipment Modifications

Not available for this EUT intended for grant.

2.7 Antenna Requirement

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is 2.87dBi.



3. Test Environment

3.1 Address of the Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories).

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



3.3 Environmental Conditions

	Normal Conditions
Temperature range (°C)	15 - 35
Relative humidity range	20 % - 75 %
Pressure range (kPa)	86 - 106
Power supply	DC 6V

3.4 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard

uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	U _c = ±2 %
Uncertainty of Occupied Channel Bandwidth	U _c = ±2 %



3.5 List of Equipment Use

• R	RF Conducted Test System							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
\square	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2023-06-01	2024-05-31	
\boxtimes	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2024-02-01	2025-01-31	
\boxtimes	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2024-02-01	2025-01-31	
\boxtimes	AGC-EM-A152	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08	
\boxtimes	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2023-06-01	2024-05-31	
\boxtimes	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A	
\boxtimes	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A	

• F	Radiated Spurious Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2024-02-01	2025-01-31	
\boxtimes	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2023-06-03	2024-06-02	
\boxtimes	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2023-06-01	2024-05-31	
\boxtimes	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04	
\boxtimes	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10	
\square	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2024-03-31	2025-03-30	
\square	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23	
\boxtimes	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2022-08-04	2024-08-03	
\boxtimes	AGC-EM-A119	2.4G Filter	SongYi	N/A	N/A	2023-06-01	2024-05-31	
\boxtimes	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08	
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08	

• A	AC Power Line Conducted Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2023-06-03	2024-06-02	
	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2023-06-09	2024-06-08	
	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2023-06-03	2024-06-02	



• Tes	Test Software							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information			
	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71			
\boxtimes	AGC-EM-S003	RE Test System	FARA	EZ-EMC	VRA-03A			
	AGC-ER-S012	BT/WIFI Test System	Tonscend	JS1120-2	2.6			
	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0			



4.System Test Configuration

4.1 EUT Configuration


The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 Configuration of Tested System

Radiated Emission Configure:



4.4 Equipment Used In Tested System

The following peripheral devices and interface cables were connected during the measurement:

☐ Test Accessories Come From The Laboratory

No.	Equipment	Manufacturer	Model No.	Model No. Specification Information			
1	Control Box USB-TTL						
	Test Accessories Come From The Manufacturer						
No.	No. Equipment Manufacturer Model No. Specification Information Cable						
1							



4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.203&15.247(b)(4)	Antenna Equipment	Pass
2	§15.247 (b)(3)	RF Output Power	Pass
3	§15.247 (a)(2)	6 dB Bandwidth	Pass
4	§15.247 (e)	Power Spectral Density	Pass
4	§15.247 (d)	Conducted Band Edge and Out-of-Band Emissions	Pass
5	§15.209	Radiated Emission& Band Edge	Pass
6	§15.207	AC Power Line Conducted Emission	Not applicable

Note: The conducted emission tests at AC port are not required for devices which only employ battery power for operation.



5. Description of Test Modes

Summary Table of Test Cases					
	Data Rate / Modulation				
Test Item	Bluetooth – LE(1Mbps/2Mbps) / GFSK				
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps(Battery powered)				
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps(Battery powered)				
Radiated & Conducted	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps(Battery powered)				
Test Cases	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps(Battery powered)				
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps(Battery powered)				
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps(Battery powered)				
AC Conducted Emission	N/A				
Note: 1. Only the result of the worst case was recorded in the report, if no other cases.					

- The battery is full-charged during the test.
 For Radiated Emission, 3axis were chosen for testing for each applicable mode.
 For Conducted Test method, a temporary antenna connector is provided by the r
- For Conducted Test method, a temporary antenna connector is provided by the manufacture.

	FC	CC/C	E/BQB 认证测试指令
发射模式(TX)			-
0x27 :Fixed 24	80Mhz	~	TX CMD V2: 01 34 20 04 27 25 00 01
0x00: Pseudo-	Random bit sequence 9	~	
0x00: BLE star	dard mode	~	
		~	
接收模式(Rx)-			
0x0	L :Fixed 2404Mhz	~	
U.L.			
PER			接收命令完成: 04 0E 04 0B 1D 20 00
总发包数 收包 10 -	数 丢包数 错包率PER 成功率		结束命令: 01 1F 20 00
			成功后返回(04 0E 06 0A 1F 20 0C 00 00)
	关闭串口 (COM2)		send Reset cmd->01 1F 20 00 Recv:04 0E 06 05 1F 20 00 00
			send Tx cmd->01 34 20 04 00 25 00 01
复位命令	Read MAC 停止命令	清除	Recv:04 0E 04 05 34 20 00
复位命令		清除	Recv:04 0E 04 05 34 20 00 send Reset cmd->01 1F 20 00 Percv:04 0E 05 15 F 20 00 00 00
复位命令	Read MAC 停止命令 发送命令	清除	send Reset cmd->01 JF 20 00 Recv:04 0E 06 05 JF 20 00 00 00 send Tx cmd->01 34 20 04 00 25 00 01
复位命令 HCI Version	发送命令	清除	send Reset cmd->01 JF 20 00 Rec:v:04 0E 06 05 JF 20 00 00 00 send Tx cmd->01 34 20 04 00 25 00 01 Rec:v:04 0E 04 05 34 20 00 send Reset cmd->01 JF 20 00
		清除	send Reset cmd->01 JF 20 00 Rec:v:04 0E 60 51 F 20 00 00 00 send Tx cmd->01 34 20 04 00 25 00 01 Rec:v:04 0E 04 05 34 20 00 send Reset cmd->01 JF 20 00 Rec:v:04 0E 06 05 JF 20 00 000 Rec:v:04 0E 06 05 JF 20 00 00 00
HCI Version	发送命令	清除	send Reset cmd->01 1F 20 00 Rec:v-04 0E 06 05 1F 20 00 00 00 send Tx cmd->01 34 20 04 00 25 00 01 Rec:v-04 0E 04 05 34 20 00 send Reset cmd->01 1F 20 00 Rec:v-04 0E 06 05 1F 20 00 00 00 send Tx cmd->01 34 20 04 13 25 00 01 Rec:v-04 0E 04 05 34 20 00 send Reset cmd->01 1F 20 00
HCI Version	发送命令	清除	send Reset cmd->01 1F 20 00 Rec:\040 E 06 05 1F 20 00 00 00 send Tx cmd->01 34 20 04 00 25 00 01 Rec:\040 E 04 05 34 20 00 send Reset cmd->01 1F 20 00 Rec:\040 E 06 05 1F 20 00 00 00 send Tx cmd->01 34 20 04 13 25 00 01 Rec:\040 E 06 05 1F 20 00 send Reset cmd->01 1F 20 00 Rec:\040 E 06 05 1F 20 00 00 send Tx cmd->01 34 20 04 27 25 00 01
HCI Version V1 PHY Select	发送命令 ◉v2	清除	send Reset and->01 1F 20 00 Recv:04 0E 06 05 1F 20 00 00 00 send Tx and->01 34 20 04 00 25 00 01 Recv:04 0E 04 05 34 20 00 send Reset and->01 1F 20 00 Recv:04 0E 06 05 1F 20 00 00 00 send Tx and->01 34 20 04 13 25 00 01 Recv:04 0E 04 05 34 20 00 send Reset and->01 1F 20 00 Recv:04 0E 06 51 F 20 00 00 00




6. Duty Cycle Measurement

The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = Peak. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Operating mode	T(µs)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/ T Minimum VBW (kHz)
BLE_1Mbps	409	32.85	4.83	2.44
BLE_2Mbps	239	37.29	4.28	4.18

Remark:

2. The duty cycle of each frequency band mode reflects the determination requirements of the low channel measurement value

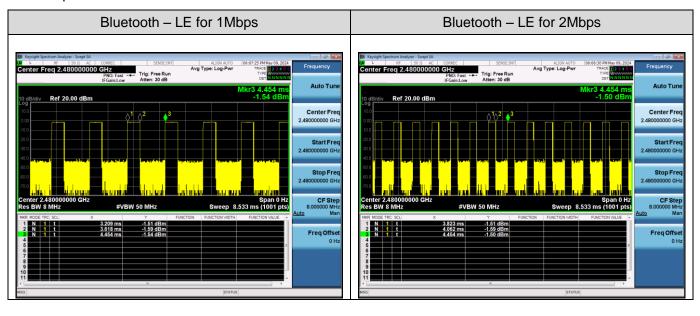

The test plots as follows:

^{1.} Duty Cycle factor = 10 * log (1/ Duty cycle)



7. RF Output Power Measurement

7.1 Provisions Applicable

For DTSs employing digital modulation techniques operating in the bands 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W.


7.2 Measurement Procedure

For Peak Power, the testing follows ANSI C63.10 Section 11.9.1.1 Method Max peak power:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the RBW > DTS bandwidth
- 3. Set the VBW \geq [3 x RBW].
- 4. Span≥[3 x RBW].
- 5. Sweep= auto couple.
- 6. Detector Function= Peak.
- 7. Trace mode= Max hold.
- 8. Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.
- For Average power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G:
- 1. The RF output of EUT was connected to the power meter by RF cable and attenuator.
- 2. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Measure the conducted output power and record the results in the test report.


7.3 Measurement Setup (Block Diagram of Configuration)

For Average power test setup

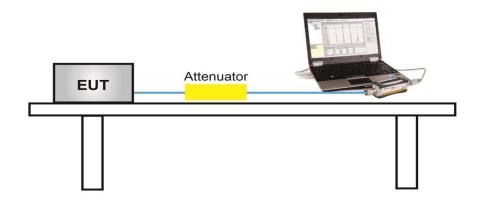




For peak power test setup

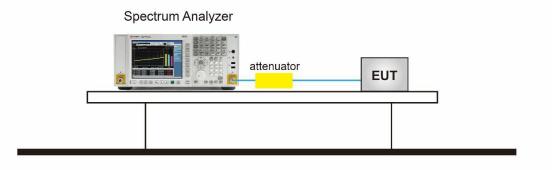

7.4 Measurement Result


Test Data of Conducted Output Power							
Test Mode	Test Frequency (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail			
	2402	-2.335	≪30	Pass			
GFSK_1Mbps	2440	-2.100	≪30	Pass			
	2480	-1.497	≪30	Pass			
	2402	-2.515	≪30	Pass			
GFSK_2Mbps	2440	-2.202	≪30	Pass			
	2480	-1.588	≤30	Pass			



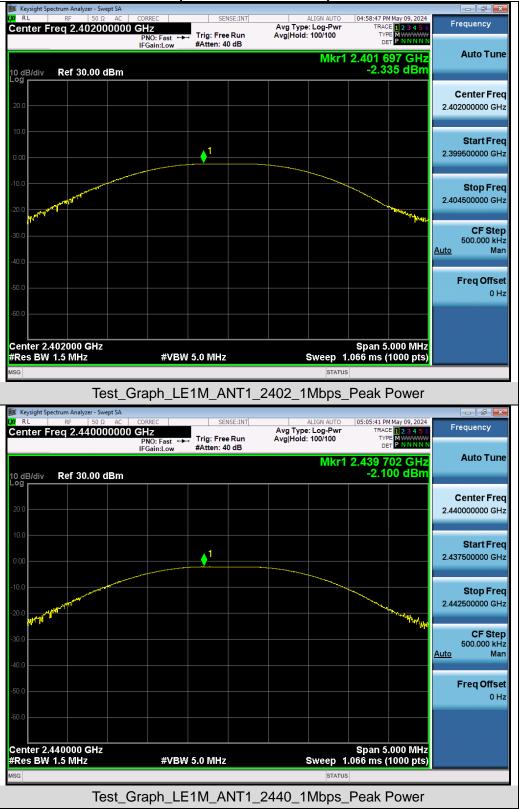


Test Graphs of Conducted Output Power



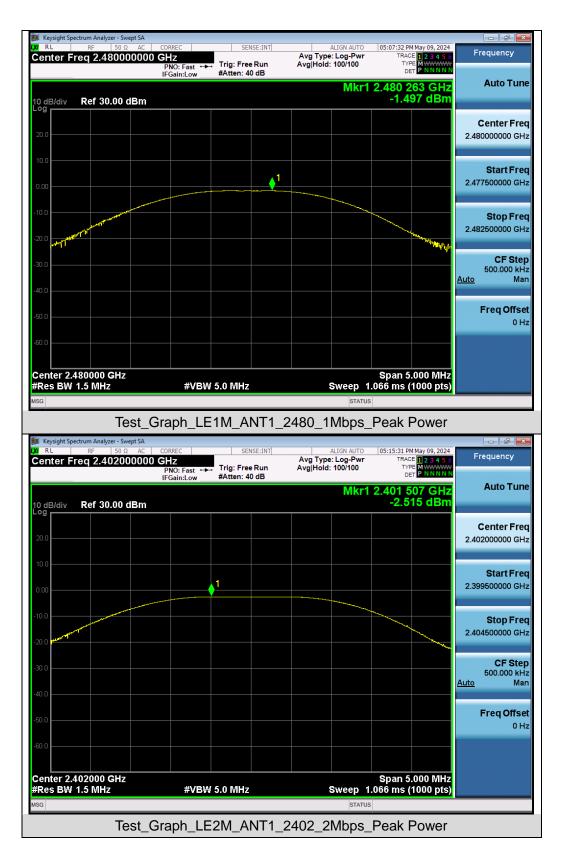



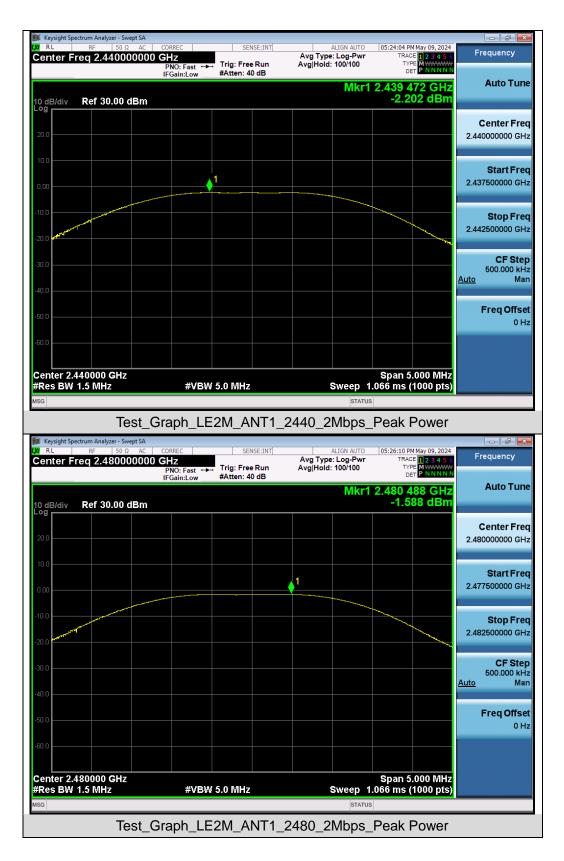



8. 6dB Bandwidth Measurement

8.1 Provisions Applicable


The minimum 6 dB bandwidth shall be 500 kHz.

8.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).

- 1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
- For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the OBW and set the Video bandwidth (VBW) ≥ 3 * RBW.
- 5. Measure and record the results in the test report.

8.3 Measurement Setup (Block Diagram of Configuration)

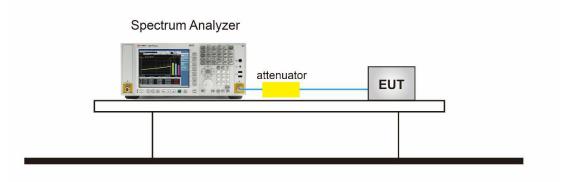





8.4 Measurement Results

Test Data of Occupied Bandwidth and DTS Bandwidth								
Test Mode	Test Frequency (MHz)	Occupied Bandwidth (MHz)	DTS BW (MHz)	DTS BW Limits (MHz)	Pass or Fail			
	2402	1.017	0.670	≥0.5	Pass			
GFSK_1Mbps	2440	1.018	0.675	≥0.5	Pass			
	2480	1.019	0.683	≥0.5	Pass			
	2402	2.016	1.183	≥0.5	Pass			
GFSK_2Mbps	2440	2.019	1.187	≥0.5	Pass			
	2480	2.011	1.175	≥0.5	Pass			

Test Graphs of Occupied Bandwidth

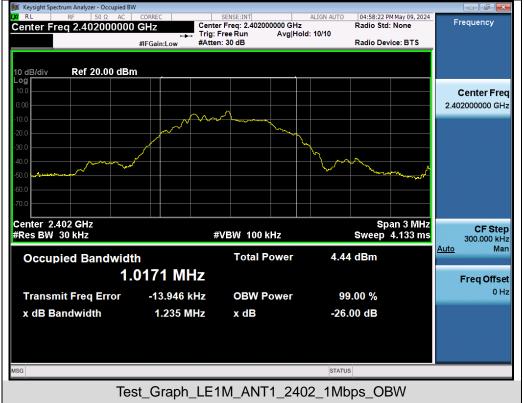



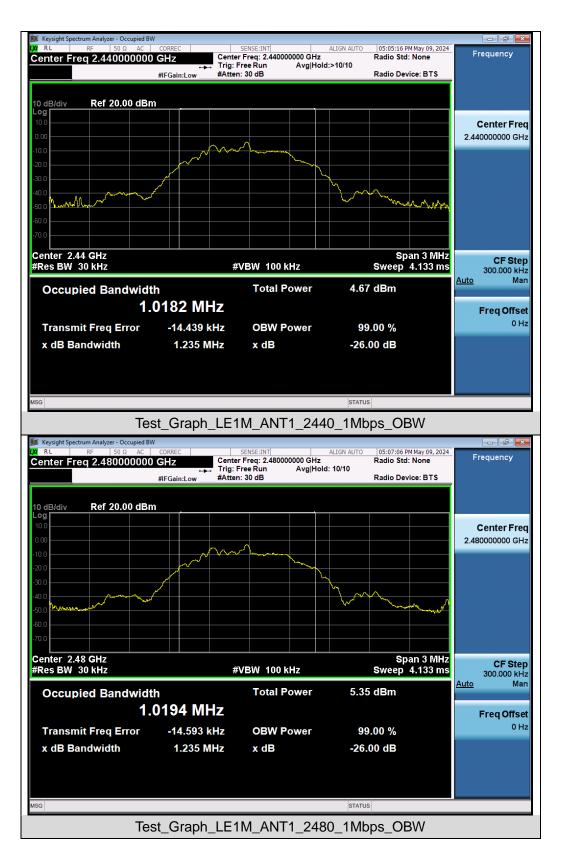











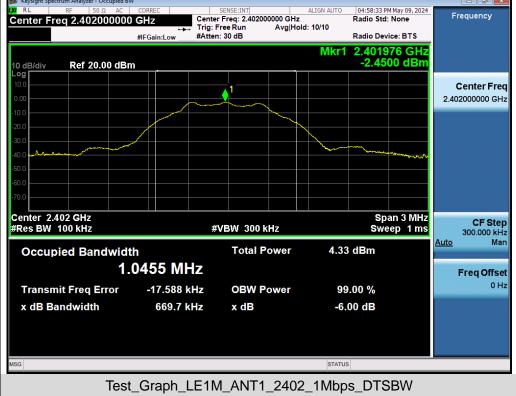




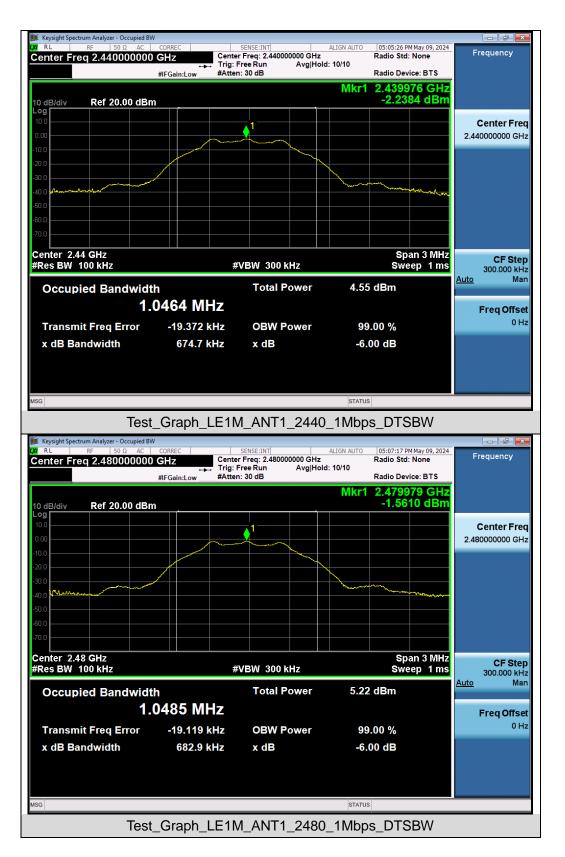







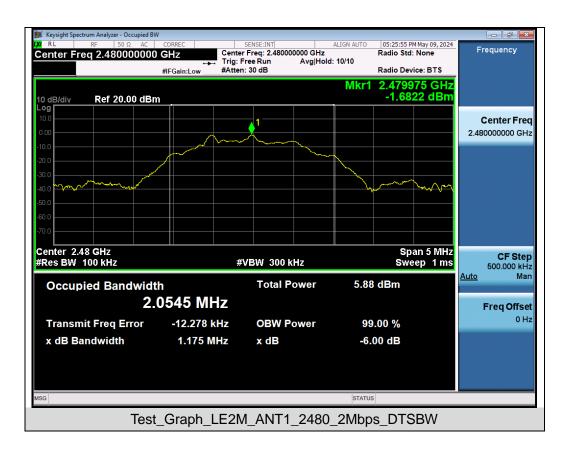



9. Power Spectral Density Measurement

9.1 Provisions Applicable


The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

9.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.

- 1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz in order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
- 4. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
- 5. Measure and record the results in the test report.
- 6. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

9.3 Measurement Setup (Block Diagram of Configuration)

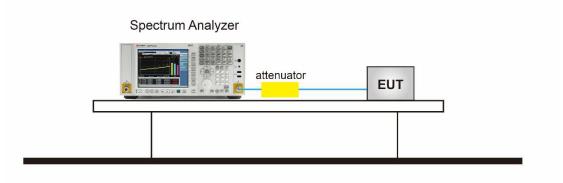





9.4 Measurement Results

Test Data of Conducted Output Power Spectral Density							
Test Mode	Test Frequency (MHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail			
	2402	-16.702	≪8	Pass			
GFSK_1Mbps	2440	-16.598	≪8	Pass			
	2480	-16.036	≪8	Pass			
	2402	-19.151	≪8	Pass			
GFSK_2Mbps	2440	-18.837	≪8	Pass			
	2480	-17.996	≪8	Pass			


Test Graphs of Conducted Output Power Spectral Density

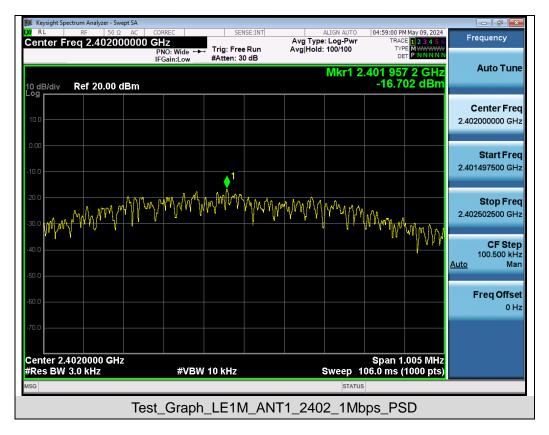




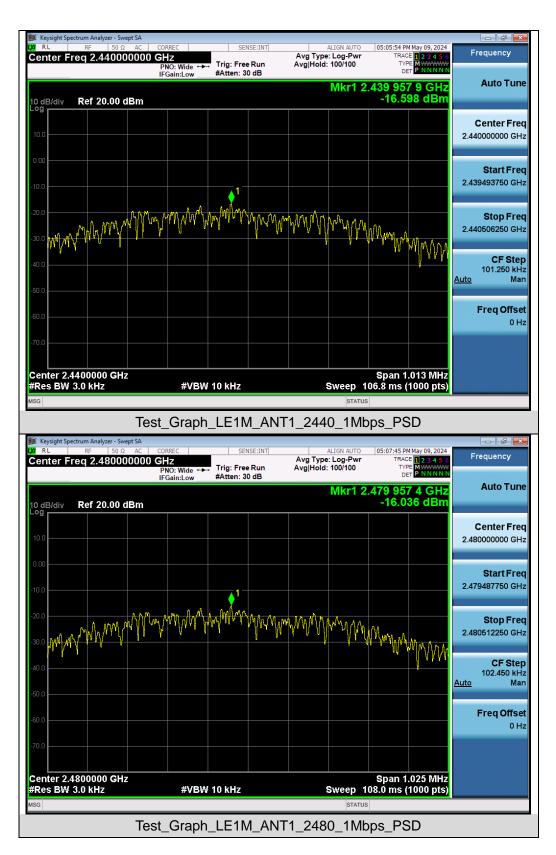



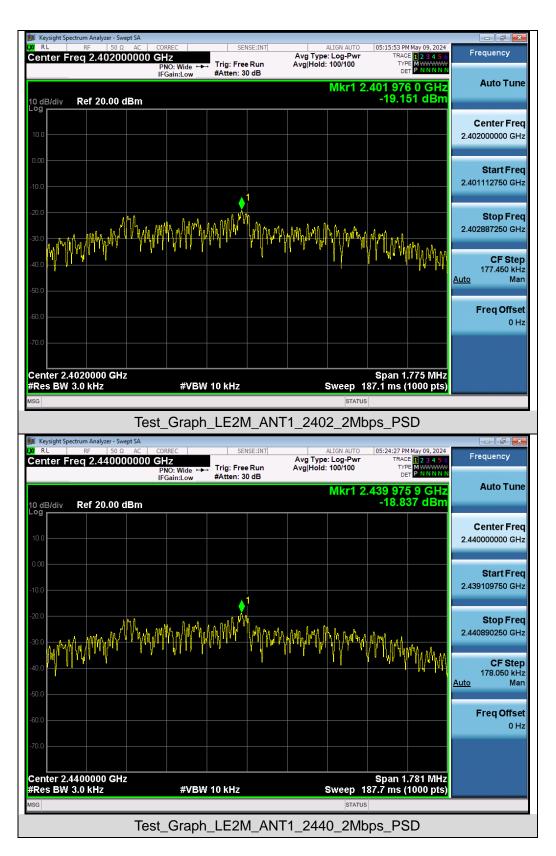



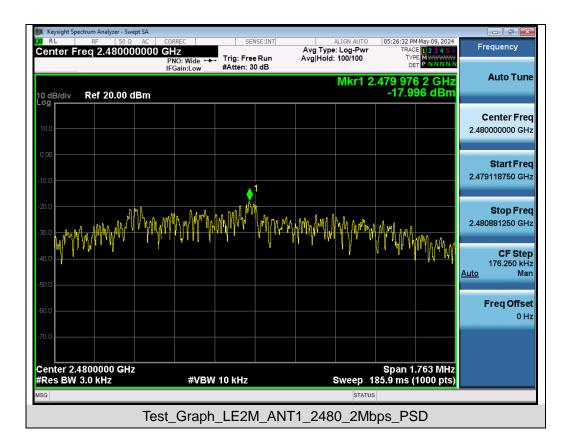



10. Conducted Band Edge and Out-of-Band Emissions

10.1 Provisions Applicable


The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure.

10.2 Measurement Procedure

- Reference level measurement
- 1. Set instrument center frequency to DTS channel center frequency
- 2. Set the span to \geq 1.5 times the DTS bandwidth
- 3. Set the RBW = 100 kHz
- 4. Set the VBW \geq 3 x RBW
- 5. Detector = peak
- 6. Sweep time = auto couple
- 7. Trace mode = max hold
- 8. Allow trace to fully stabilize
- Emission level measurement
- 1. Set the center frequency and span to encompass frequency range to be measured
- 2. RBW = 100kHz
- 3. VBW = 300kHz
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep time = auto couple
- 7. The trace was allowed to stabilize

10.3 Measurement Setup (Block Diagram of Configuration)

Spectrum Analyzer

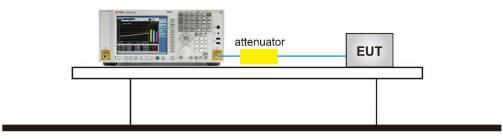




10.4 Measurement Results




Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands




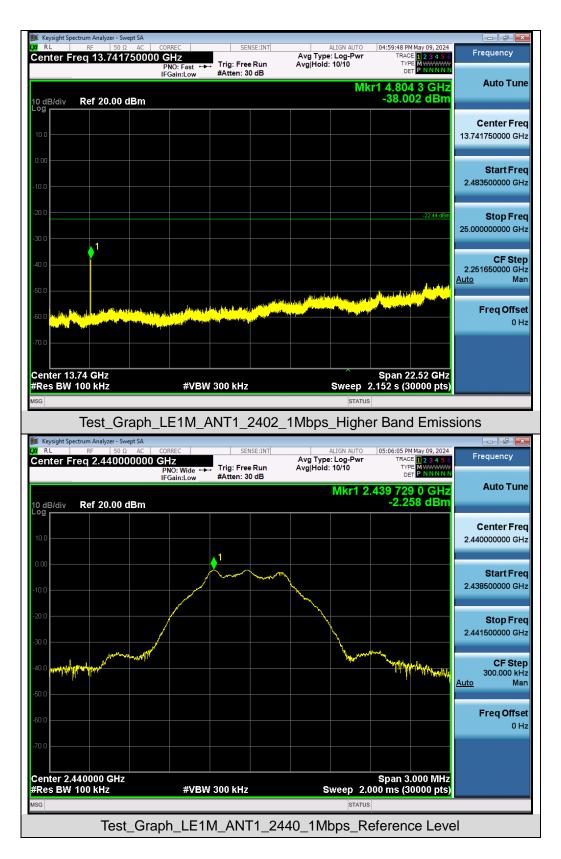




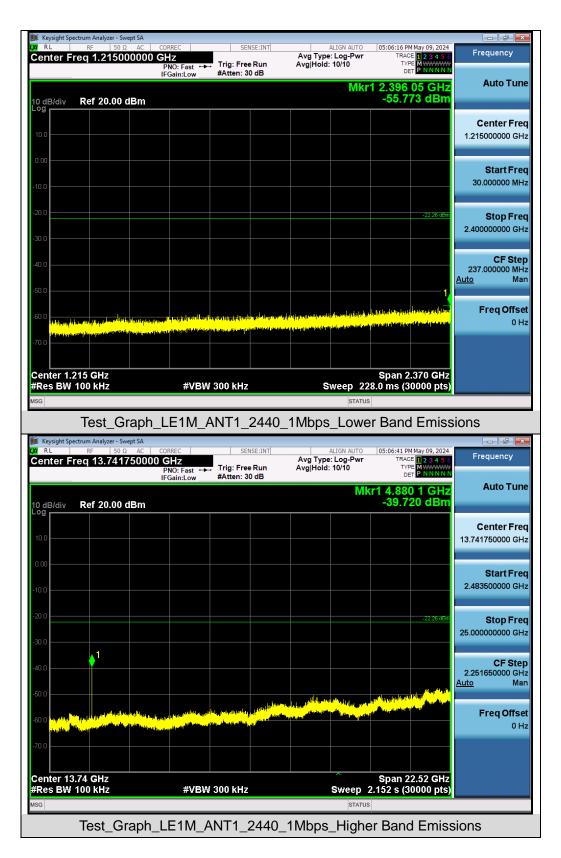




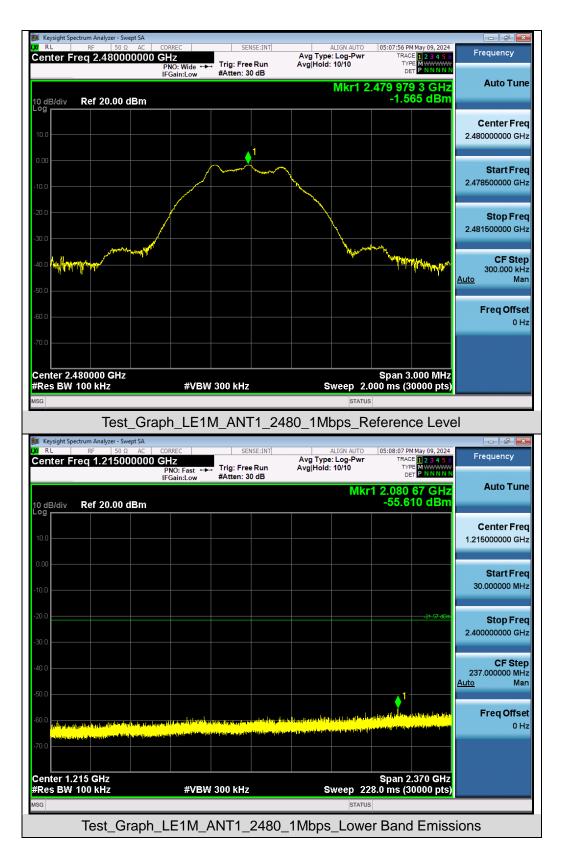



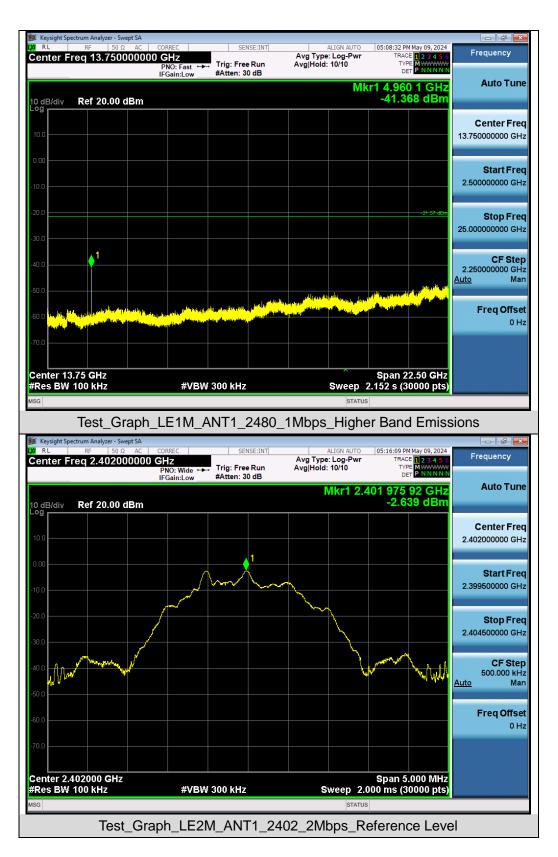




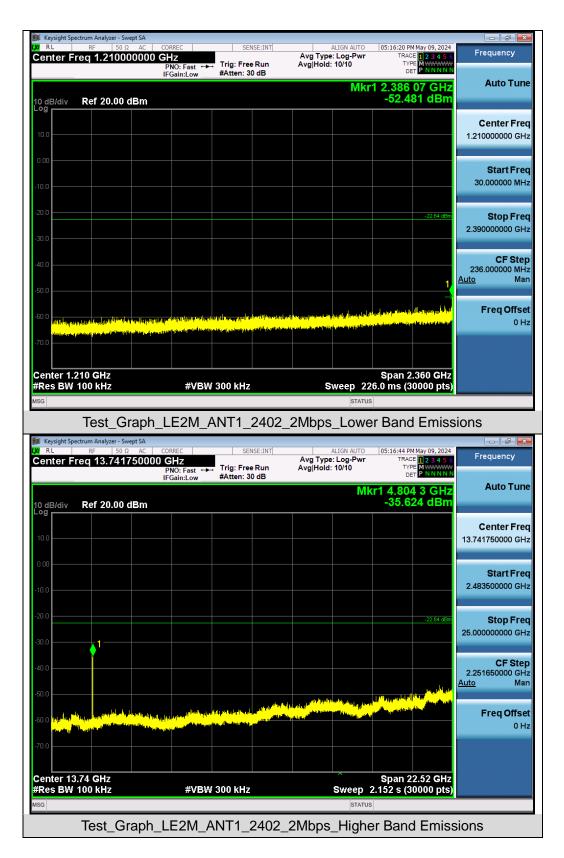









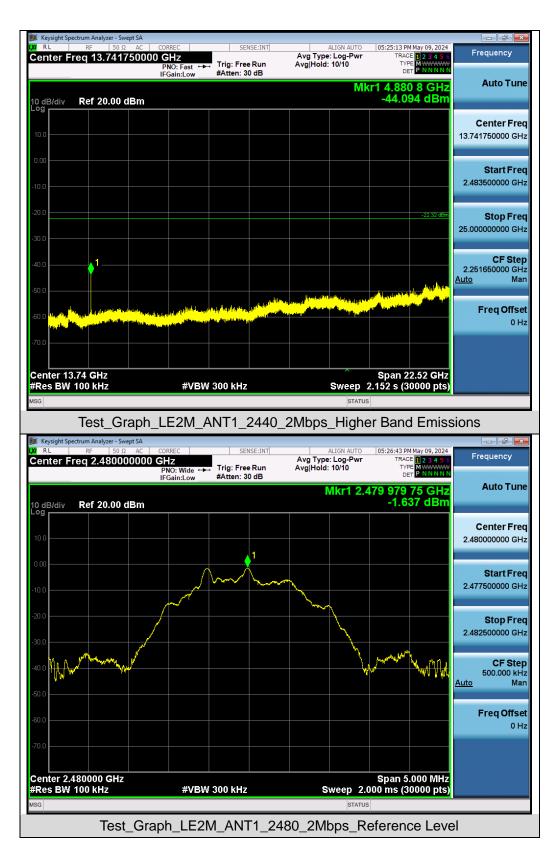



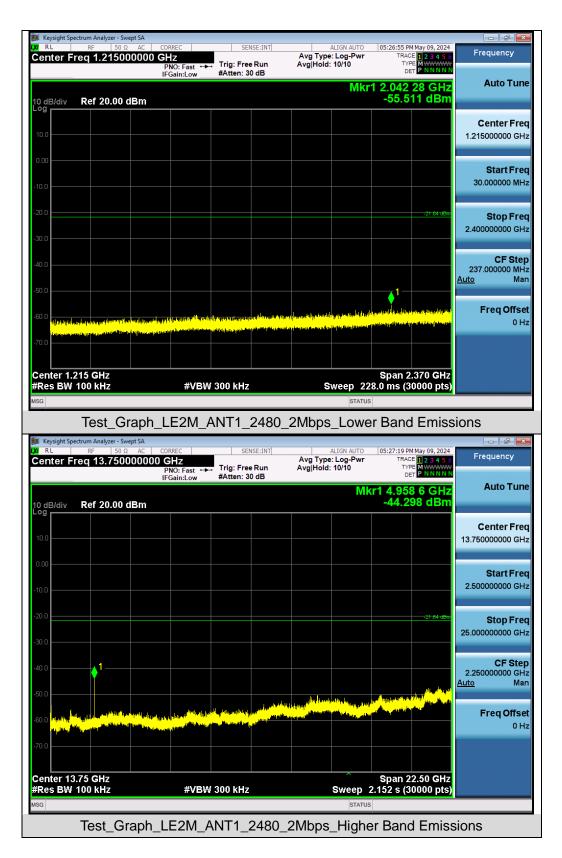




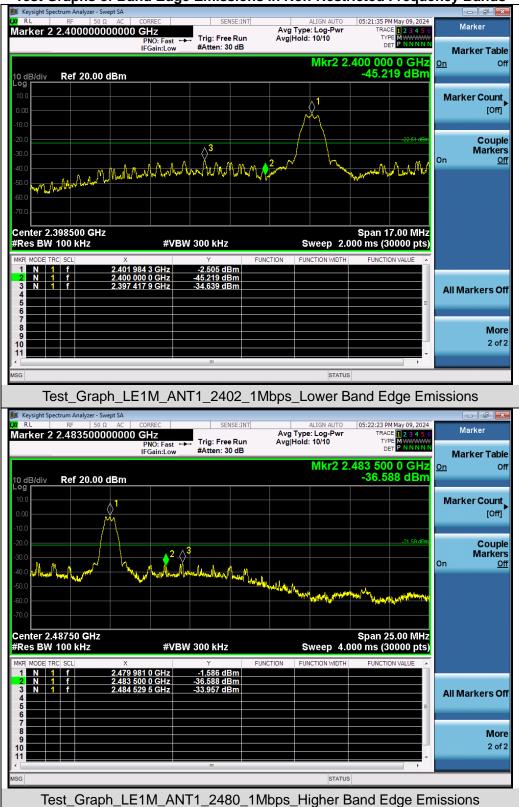

Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands



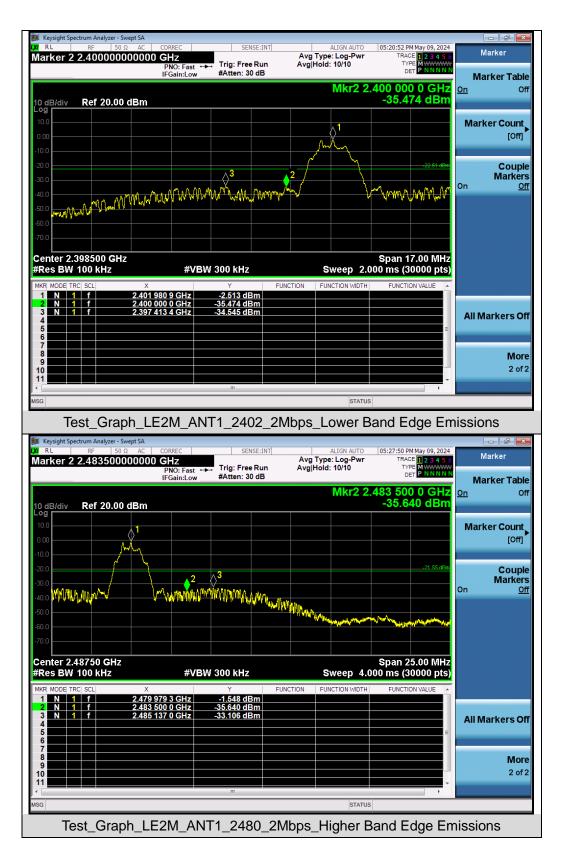



11. Radiated Spurious Emission

11.1 Measurement Limit

FCC Part 15.209 Limit in the below table to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

11.2 Measurement Procedure

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.



As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

Spectrum Parameter	Setting
Start ~Stop Frequency	9kHz~150kHz/RB 200Hz for QP
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/3MHz for Peak, 1MHz/3MHz for Average

The following table is the setting of spectrum analyzer and receiver.

Receiver Parameter	Setting
Start ~Stop Frequency	9kHz~150kHz/RB 200Hz for QP
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP



• Quasi-Peak Measurements below 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

Peak Measurements above 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize


<u>Average Measurements above 1GHz (Method VB)</u>

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW setting requirements are as follows:
- 4. If the EUT is configured to transmit with duty cycle \ge 98%, set VBW = 10 Hz.
- 5. If the EUT duty cycle is < 98%, set VBW \geq 1/T. T is the minimum transmission duration.
- 6. Detector = Peak
- 7. Sweep time = auto
- 8. Trace mode = max hold
- 8. Trace was allowed to stabilize




11.3 Measurement Setup (Block Diagram of Configuration)




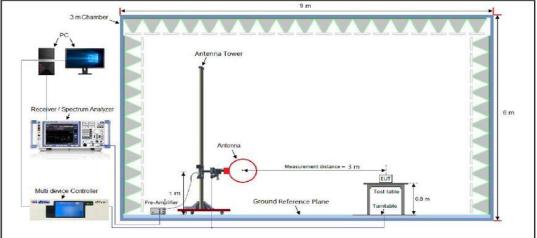

Radiated Emission Test Setup 30MHz-1000MHz

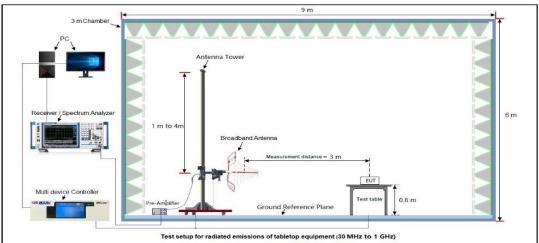

Radiated Emission Test Setup Above 1000MHz

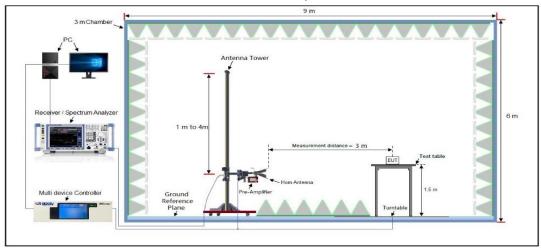

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com

 Web: http://www.agccert.com/



11.4 Measurement Result

Radiated Emission Below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

			Rac	liate	d En	niss	ion rest r	esults	at 30)MHz-1	GHz	Ś					
EUT Name	eufy	Smart	Scale	e C2	0			I	Mode	el Name	;		Т	9130	0		
Temperature	21.8°	°C						I	Relat	ive Hur	midi	ity	6	0.2%	6		
Pressure	960h	Pa						-	Test \	Voltage)		Normal Voltage			ge	
Test Mode	Mode	e 3							Antenna Polarity				 Horizontal 				
72.0	dBuV/m																
32											4		Ma	nit: argin:	-		
	unantalitet	our cubility by	k,erinte#	forment	winner	2	gunning Nantoury	whene	3 X Hithulur	2 Arryan Walad Wards	M	J.M.A		n n	Jure -	**^	
		someticals being		70 80			(MHz)		3	300 4	00			**•~\^* [#]			1
-8 30.00		50		70 80 R(ing		Meas	3 sure-	300 4	00		600				1
-8 30.00	00 10	50	60 7	70 80 R(eadi	ing	(MHz) Correct	Meas	sure- ent	300 4	00 t	500	600		10	_)
8 30.00	00 10	50	60 Treq. MHz	70 80 R(eadi Leve	ing el	(MHz) Correct Factor	Meas	sure- ent //m	300 4 Limit	oo t /m	500 Ove	600 F	700 Dete	10	_)
8 30.00	00 40 No. Mk	50 :. F N	60 req. //Hz 3022	70 80 R(eadi Leve dBuV	ing el v	(MH₂) Correct Factor dB	Meas me dBu\	sure- ent //m 38	300 4 dBuV/	00 t /m	500 Ove dB	600 r	700 Dete	10 10	_)
8 30.00	00 40 No. Mk	50 50 50 50 50 50 50 50 50 50 50 50 50 5	60 req. MHz 3022 0126	70 80 R(eadi Leve dBuV 5.64	ing 21 7 4 5	(MHz) Correct Factor dB 13.74	Meas me dBu\ 19.3	sure- ent //m 38 21	300 4 Limit dBuV/ 40.00	000 t) ·	500 500 0ve dB -20.6	600 r 22 29	700 Dete pe	10 ector	_	1
8 30.00	00 40 No. Mk 1 2	50 50 50 50 50 50 50 50 50 50 50 50 50 5	60 req. MHz 3022 0126 3158	70 80 Re L	eadi Leve dBuV 5.64 5.99	ing 21 7 4 5 3	(MH₂) Correct Factor dB 13.74 16.26	Meas me dBu\ 19.3	3 sure- ent //m 38 21 58	300 4 Limit dBuV/ 40.00 43.50	00 t (m) ·	500 500 Ove dB -20.6 -21.2	600 r 2 2 2	700 Dete pe pe	10 ector eak eak	r 	0
8 30.00	00 40 No. Mk	50 50 50 42.3 106.0 299.3	60 req. MHz 3022 0126 3158 9696	70 80 Re L	eadi Leve dBuV 5.64 5.95 7.13	ing 21 7 4 5 3 6	(мн₂) Correct Factor dB 13.74 16.26 16.45	Meas me dBu\ 19.3 22.3	3 sure- ent 38 21 58 34	200 4 Limit dBuV/ 40.00 43.50 46.00	000 t) · ·	500 Ove dB -20.6 -21.2 -22.4	600 r 22 29 266	700 Dete pe pe	10 ector eak eak		0





				Ка	ula	ted En	11133		Results at	JUIVIT	12-10	пг				
EUT Name	eufy Smart Scale C20 Model Name							Т	9130)						
Temperature	2'	1.8℃							Re	lative	Hum	idity	6	0.2%	, D	
Pressure	96	60hPa	а						Те	st Volt	age	e Normal V				'olta
Test Mode	М	ode 3	3						An	tenna	Pola	rity	ty Vertical			
72.0	dBuV∕	'n														
														mit: argin:	_	
														argin.		
														5 X		Б Х
32												7				
												Frank	and a fear	an Am	MANANA	1
		1			2 X			ىرىلى يەرىكى مەرىپىلىرى		Monthe	Aughterald	manyall	ynalla _d dd	and Any	MAY WHY	
ملىقىم	Martel	1 Waldamad	saitavysiv	www.	2	where he was a for	melanded	whether	have been and the second	strimbulne.Ma	Angliand	r www.	,neles,n ^{ar}	and April	MAYNAM	
wards	NANAN	n Sedawood	within	www.	2	walkful young	modernetw	when the do	have a particular of the	uthmulnully	Amplead	Trank and the second seco	and a star	and they	MAJ ~~~ /	
N ¹⁴⁴	NATION	n Administ	souther/out	utuaha	2 X	ulliphe younge	- Annalud	ahan an a	had and a start of the start of	ullmullur.Hr	Ampletand	Frank M	for the form		M.W.M.	
And the second se	NTAN	n Adamad	nadin (edi	under	2	alleft younge	redonalid	uluite and a	hade the control of the	uskimulinu.Ma	Aughterani	Frank W	, and land the			
-8	N/TXMV	1 underheitense	sadon (veli	uloupha	2	weller have my	mdanned	and the second	haden and an	utim ulmi Hir	Autor	Franky M	,			
_		1 v Addemad 40	50	60		9U/U WWW.	- Annala	(MHz)	hade to be when the second	stimuluu 300	Aurt. 1990			700		
-8 30.000	0	40	50	60	70	80 Readi	ng	(MHz) Correct	Measu	300 re-	400	500	600			
-8 30.000	0		50		70	80	ng	(MHz)		300 re-			600			
-8 30.000	0	40	50 Fi	60	70	80 Readi	ing !l	(MHz) Correct	Measu	300 re-	400	500	600 Er		10	00.00
-8 30.00	0	40 Mk.	50 Fi	60 req. 1Hz	70	80 Readi Leve	ing el 7	(MHz) Correct Factor	Measu	300 re- L	400 _imit	500	600 Er	700	10 ctor	00.00
-8 30.00	o lo.	40 Mk.	50 Fi	60 req. 1Hz	70	80 Readi Leve dBuV	ing el 7	(MH2) Correct Factor dB	Measu ment dBuV/m	300 re- L n di 41	400 Limit BuV/m	500 Ove	600 er 67	700 Dete	10 ctor ak	00.00
-8 30.00	0 lo. 1	40 Mk.	50 Fi M 41.5	60 req. 1Hz 670 351	70	BO Readii Leve dBuV 5.4	ing el / 1	(MHz) Correct Factor dB 16.92	Measu ment dBuV/m 22.33	300 re- L 1 41 41	400 _imit BuV/m 0.00	500 Ove dB -17.	600 er 67 93	700 Dete	tor ak ak	00.00
-8 30.00	lo. 1 2	40 Mk.	50 Fi M 41.5 74.1	60 IHz 670 351	70	BO Readii Leve dBuV 5.4 7.1	ing 21 7 1 1 6	(MHz) Correct Factor dB 16.92 16.96	Measur ment dBuV/m 22.33 24.07	300 re- L 41 41 41	400 _imit BuV/m 0.00 0.00	500 Ove dB -17. -15.	600 er 67 93 34	700 Deter pea	100 ctor ak ak ak	00.00
-8 30.00	lo. 1 2 3	40 Mk.	50 Fi 41.5 74.1 53.2	60 req. 1Hz 670 351 004 554	70	80 Readii Leve dBuV 5.4 7.1 5.90	ing 21 7 1 6 2	(мнг) Correct Factor dB 16.92 16.96 18.20	Measu ment dBuV/m 22.33 24.07 24.16	300 re- L 41 41 41 41	400 _imit BuV/m 0.00 0.00 3.50	500 Ove dB -17. -15. -19.	600 er 67 93 34 30	700 Deter pea pea	tor ak ak ak ak	00.00

RESULT: Pass

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.



UT Name	eufy Smart	Scale C20		Mode	I Name	T9130	
emperature	21.8 ℃			Relat	ive Humidity	60.2%	
ressure	960hPa			Test \	/oltage	Normal	/oltage
est Mode	Mode 1			Anter	nna Polarity	Horizont	al
Frequency	Meter Reading	Factor	Emissior	n Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV	//m)	(dBµV/m)	(dB)	value Type
4804.000	47.65	0.08	47.7	73	74	-26.27	peak
4804.000	38.19	0.08	38.2	27	54	-15.73	AVG
7206.000	42.18	2.21	44.3	39	74	-29.61	peak
7206.000	32.64	2.21	34.8	35	54	-19.15	AVG
Remark:	na Fastar I Cabl		omplifier				
	nna Factor + Cabl		amplifier.	Mode	I Name	T9130	
Factor = Anter			amplifier.		I Name ive Humidity	T9130 60.2%	
Factor = Anter	eufy Smart		amplifier.	Relat			/oltage
Factor = Anter	eufy Smart 21.8°C		amplifier.	Relat	ive Humidity	60.2%	/oltage
Factor = Anter	eufy Smart 21.8°C 960hPa Mode 1		emplifier.	Relat Test V Anter	ive Humidity /oltage	60.2% Normal Vertical	1
Factor = Anter	eufy Smart 21.8°C 960hPa	Scale C20		Relat	ive Humidity /oltage nna Polarity	60.2%	/oltage Value Type
Factor = Anter	eufy Smart 21.8°C 960hPa Mode 1 Meter Reading	Scale C20 Factor	Emission	Relat Test V Anter	ive Humidity /oltage nna Polarity	60.2% Normal Vertical Margin	1
Factor = Anter	eufy Smart 21.8℃ 960hPa Mode 1 Meter Reading (dBµV)	Scale C20 Factor (dB)	Emissior (dBµv	Relat Test V Anter	ive Humidity /oltage nna Polarity Limits (dBµV/m)	60.2% 60.2% Vormal Vertical Margin (dB)	- Value Type
Factor = Anter	eufy Smart 21.8℃ 960hPa Mode 1 Meter Reading (dBµV) 47.18	Scale C20 Factor (dB) 0.08	Emissior (dBµV 47.2	Relat Test V Anter	ive Humidity /oltage nna Polarity Limits (dBµV/m) 74	60.2% Normal Vertical Margin (dB) -26.74	- Value Type peak
Factor = Anter	eufy Smart 21.8℃ 960hPa Mode 1 Meter Reading (dBµV) 47.18 37.91	Scale C20 Factor (dB) 0.08 0.08	Emissior (dBµV 47.2 37.9	Relat Test V Anter	ive Humidity /oltage nna Polarity Limits (dBµV/m) 74 54	60.2% Normal Vertical Margin (dB) -26.74 -16.01	- Value Type peak AVG
Factor = Anter EUT Name emperature ressure est Mode Frequency (MHz) 4804.000 7206.000	eufy Smart 21.8℃ 960hPa Mode 1 Meter Reading (dBµV) 47.18 37.91 41.54	Scale C20 Factor (dB) 0.08 0.08 2.21	Emission (dBµV 47.2 37.9 43.7	Relat Test V Anter	Limits (dBµV/m) 74 54 74	60.2% Normal V Vertical Margin (dB) -26.74 -16.01 -30.25	- Value Type peak AVG peak

RESULT: Pass



UT Name	eufy Smart	Scale C20	Mod	el Name	T9130		
emperature	21.8 ℃		Rela	tive Humidity	60.2%		
ressure	960hPa		Test	Voltage	Normal	Voltage	
est Mode	Mode 2		Ante	enna Polarity	Horizont	Horizontal	
Frequency	Meter Reading	ter Reading Factor Emissi		Limits	Margin	- Value Type	
(MHz)	(dBµV)	~		(dBµV/m)	(dB)	value Type	
4880.000	46.99	0.14	47.13	74	-26.87	peak	
4880.000	37.14	0.14	37.28	54	-16.72	AVG	
7320.000	40.22	2.36	42.58	74	-31.42	peak	
7320.000	31.56	2.36	33.92	54	-20.08	AVG	
			•	4			
Remark:							
	nna Factor + Cab	e Loss – Pre-	amplifier.				
	nna Factor + Cab			el Name	T9130		
Factor = Anter			Mod	el Name tive Humidity	T9130 60.2%		
Factor = Anter	eufy Smart		Mod Rela			Voltage	
Factor = Anter UT Name emperature	eufy Smart 21.8℃		Mod Rela Test	tive Humidity	60.2%	Voltage	
Factor = Anter UT Name emperature ressure est Mode	eufy Smart 21.8℃ 960hPa Mode 2	Scale C20	Mod Rela Test Ante	tive Humidity Voltage nna Polarity	60.2% Normal Vertical	Voltage	
Factor = Anter UT Name emperature ressure est Mode	eufy Smart 21.8°C 960hPa Mode 2 Meter Reading	Scale C20 Factor	Mod Rela Test Ante Emission Level	tive Humidity Voltage enna Polarity	60.2% Normal Vertical Margin	1	
Factor = Anter	eufy Smart 21.8℃ 960hPa Mode 2 Meter Reading (dBµV)	Scale C20 Factor (dB)	Mod Rela Test Ante Emission Level (dBµV/m)	tive Humidity Voltage enna Polarity Limits (dBµV/m)	60.2% Normal Vertical Margin (dB)	Value Type	
Factor = Anter	eufy Smart 21.8℃ 960hPa Mode 2 Meter Reading (dBµV) 46.58	Scale C20 Factor (dB) 0.14	Mod Rela Test Ante Emission Level (dBµV/m) 46.72	tive Humidity Voltage mna Polarity Limits (dBµV/m) 74	60.2% Normal Vertical Margin (dB) -27.28	Value Type	
Factor = Anter UT Name emperature ressure est Mode Frequency (MHz) 4880.000	eufy Smart 21.8℃ 960hPa Mode 2 Meter Reading (dBµV) 46.58 38.19	Scale C20 Factor (dB) 0.14 0.14	Mod Rela Test Ante Emission Level (dBµV/m) 46.72 38.33	tive Humidity Voltage enna Polarity Limits (dBµV/m) 74 54	60.2% 60.2% Normal Vertical Margin (dB) -27.28 -15.67	Value Type peak AVG	
Factor = Anter UT Name emperature ressure est Mode Frequency (MHz) 4880.000 7320.000	eufy Smart 21.8℃ 960hPa Mode 2 Meter Reading (dBµV) 46.58 38.19 42.15	Scale C20 Factor (dB) 0.14 0.14 2.36	Моd Rela Test Ante Emission Level (dBµV/m) 46.72 38.33 44.51	tive Humidity Voltage mna Polarity Limits (dBµV/m) 74 54 74	60.2% Normal Vertical Vertical Margin (dB) -27.28 -15.67 -29.49	Value Type peak AVG peak	
Factor = Anter UT Name emperature ressure est Mode Frequency (MHz) 4880.000	eufy Smart 21.8℃ 960hPa Mode 2 Meter Reading (dBµV) 46.58 38.19	Scale C20 Factor (dB) 0.14 0.14	Mod Rela Test Ante Emission Level (dBµV/m) 46.72 38.33	tive Humidity Voltage enna Polarity Limits (dBµV/m) 74 54	60.2% 60.2% Normal Vertical Margin (dB) -27.28 -15.67	Value Type peak AVG	
Factor = Anter UT Name emperature ressure est Mode Frequency (MHz) 4880.000 7320.000	eufy Smart 21.8℃ 960hPa Mode 2 Meter Reading (dBµV) 46.58 38.19 42.15	Scale C20 Factor (dB) 0.14 0.14 2.36	Моd Rela Test Ante Emission Level (dBµV/m) 46.72 38.33 44.51	tive Humidity Voltage mna Polarity Limits (dBµV/m) 74 54 74	60.2% Normal Vertical Vertical Margin (dB) -27.28 -15.67 -29.49	Value Type peak AVG peak	

RESULT: Pass



UT Name	eufy Smart	Scale C20	м	lodel Name	T9130		
emperature	21.8 ℃		R	elative Humidity	60.2%		
Pressure	960hPa		Т	est Voltage	Normal \	/oltage	
est Mode	Mode 3		A	ntenna Polarity	ha Polarity Horizontal		
Frequency	Meter Reading	Meter Reading Factor		evel Limits	Margin		
(MHz)	(dBµV)	(dB)	(dBµV/m	n) (dBµV/m)	(dB)	Value Type	
4960.000	47.33	0.22	47.55	74	-26.45	peak	
4960.000	38.42	0.22	38.64	54	-15.36	AVG	
7440.000	42.16	2.64	44.8	74	-29.2	peak	
7440.000	32.69	2.64	35.33	54	-18.67	AVG	
Remark:							
	nna Factor + Cab	e Loss – Pre-	amplifier.				
	eufy Smart			lodel Name	T9130		
Factor = Anter	-		M	lodel Name elative Humidity	T9130 60.2%		
Factor = Anter	eufy Smart		M R			/oltage	
Factor = Anter	eufy Smart 21.8℃		R Te	elative Humidity	60.2%	/oltage	
Factor = Anter	eufy Smart 21.8℃ 960hPa Mode 3	Scale C20	M R Te	elative Humidity est Voltage Intenna Polarity	60.2% Normal V Vertical	/oltage	
Factor = Anter	eufy Smart 21.8℃ 960hPa Mode 3 Meter Reading	Scale C20 Factor	M R Te A Emission L	elative Humidity est Voltage .ntenna Polarity .evel Limits	60.2% Normal V Vertical Margin	/oltage Value Type	
Factor = Anter	eufy Smart 21.8℃ 960hPa Mode 3 Meter Reading (dBµV)	Scale C20 Factor (dB)	M R Te A Emission L (dBµV/m	eelative Humidity est Voltage Intenna Polarity Level Limits n) (dBµV/m)	60.2% Normal V Vertical Margin (dB)	– Value Type	
Factor = Anter EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000	eufy Smart 21.8℃ 960hPa Mode 3 Meter Reading (dBµV) 48.13	Scale C20 Factor (dB) 0.22	M R Tr A Emission L (dBµV/m 48.35	eelative Humidity est Voltage Intenna Polarity Level Limits 1) (dBµV/m) 74	60.2% Normal V Vertical Margin (dB) -25.65	- Value Type peak	
Factor = Anter	eufy Smart 21.8 °C 960hPa Mode 3 Meter Reading (dBµV) 48.13 38.25	Scale C20 Factor (dB) 0.22 0.22	M R T A Emission L (dBµV/m 48.35 38.47	elative Humidity est Voltage Intenna Polarity Level Limits (dBµV/m) 74 54	60.2% Normal V Vertical Margin (dB) -25.65 -15.53	– Value Type peak AVG	
Factor = Anter EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000 4960.000 7440.000	eufy Smart 21.8℃ 960hPa Mode 3 Meter Reading (dBμV) 48.13 38.25 42.16	Scale C20 Factor (dB) 0.22 0.22 2.64	M R Te A Emission L (dBµV/m 48.35 38.47 44.8	elative Humidity est Voltage Intenna Polarity Level Limits (dBµV/m) 74 54 74	60.2% Normal \ Vertical Margin (dB) -25.65 -15.53 -29.2	- Value Type peak AVG peak	
Factor = Anter EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000 4960.000	eufy Smart 21.8 °C 960hPa Mode 3 Meter Reading (dBµV) 48.13 38.25	Scale C20 Factor (dB) 0.22 0.22	M R T A Emission L (dBµV/m 48.35 38.47	elative Humidity est Voltage Intenna Polarity Level Limits (dBµV/m) 74 54	60.2% Normal V Vertical Margin (dB) -25.65 -15.53	– Value Type peak AVG	
Factor = Anter EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000 7440.000	eufy Smart 21.8℃ 960hPa Mode 3 Meter Reading (dBμV) 48.13 38.25 42.16	Scale C20 Factor (dB) 0.22 0.22 2.64	M R Te A Emission L (dBµV/m 48.35 38.47 44.8	elative Humidity est Voltage Intenna Polarity Level Limits (dBµV/m) 74 54 74	60.2% Normal \ Vertical Margin (dB) -25.65 -15.53 -29.2	Value Type peak AVG peak	

RESULT: Pass



UT Name	eufy Smart	Scale C20		Mode	I Name	T9130	
emperature	21.8 ℃		1	Relati	ive Humidity	60.2%	
ressure	960hPa			Test Voltage		Normal \	/oltage
est Mode	Mode 4	Mode 4		Anter	nna Polarity	Horizont	al
Frequency	Meter Reading	leter Reading Factor E		Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/n	m)	(dBµV/m)	(dB)	
4804.000	48.63	0.08	48.71		74	-25.29	peak
4804.000	37.64	0.08	37.72		54	-16.28	AVG
7206.000	42.33	2.21	44.54		74	-29.46	peak
7206.000	42.19	2.21	44.4		54	-9.6	AVG
Remark:							
Factor = Anter	nna Factor + Cab	le Loss – Pre-	-amplifier.				
Factor = Anter	eufy Smart			Mode	I Name	T9130	
					I Name ive Humidity	T9130 60.2%	
UT Name	eufy Smart			Relati			/oltage
UT Name	eufy Smart 21.8℃			Relati Test \	ive Humidity	60.2%	/oltage
UT Name emperature ressure est Mode	eufy Smart 21.8℃ 960hPa Mode 4	Scale C20		Relati Test \ Anter	ive Humidity /oltage nna Polarity	60.2% Normal V Vertical	/oltage
UT Name emperature ressure est Mode	eufy Smart 21.8℃ 960hPa Mode 4 Meter Reading	Scale C20 Factor	Emission I	Relati Test \ Anter	ive Humidity /oltage nna Polarity	60.2% Normal V Vertical Margin	/oltage Value Type
EUT Name Emperature Pressure Eest Mode Frequency (MHz)	eufy Smart 21.8°C 960hPa Mode 4 Meter Reading (dBµV)	Scale C20 Factor (dB)	Emission I (dBµV/n	Relati Test \ Anter Level m)	ive Humidity /oltage nna Polarity Limits (dBµV/m)	60.2% Normal V Vertical Margin (dB)	Value Type
EUT Name Emperature Pressure Eest Mode Frequency (MHz) 4804.000	eufy Smart 21.8℃ 960hPa Mode 4 Meter Reading (dBµV) 47.28	Scale C20 Factor (dB) 0.08	Emission I (dBµV/n 47.36	Relati Test \ Anter Level m)	ive Humidity /oltage nna Polarity Limits (dBµV/m) 74	60.2% Normal V Vertical Margin (dB) -26.64	Value Type
UT Name emperature ressure est Mode Frequency (MHz) 4804.000 4804.000	eufy Smart 21.8℃ 960hPa Mode 4 Meter Reading (dBµV) 47.28 38.37	Scale C20 Factor (dB) 0.08 0.08	Emission I (dBµV/n 47.36 38.45	Relati Test V Anter Level m) 5	ive Humidity /oltage nna Polarity Limits (dBµV/m) 74 54	60.2% Normal V Vertical Margin (dB) -26.64 -15.55	- Value Type peak AVG
UT Name emperature ressure est Mode Frequency (MHz) 4804.000 4804.000 7206.000	eufy Smart 21.8℃ 960hPa Mode 4 Meter Reading (dBµV) 47.28 38.37 41.08	Scale C20 Factor (dB) 0.08 0.08 2.21	Emission I (dBµV/n 47.36 38.45 43.29	Relati Test \ Anter Level m) 5 5 9	Limits (dBµV/m) 74 54 74	60.2% Normal V Vertical Margin (dB) -26.64 -15.55 -30.71	Value Type peak AVG peak
UT Name emperature ressure est Mode Frequency (MHz) 4804.000 4804.000	eufy Smart 21.8℃ 960hPa Mode 4 Meter Reading (dBµV) 47.28 38.37	Scale C20 Factor (dB) 0.08 0.08	Emission I (dBµV/n 47.36 38.45	Relati Test \ Anter Level m) 5 5 9	ive Humidity /oltage nna Polarity Limits (dBµV/m) 74 54	60.2% Normal V Vertical Margin (dB) -26.64 -15.55	- Value Type peak AVG
UT Name emperature ressure est Mode Frequency (MHz) 4804.000 4804.000 7206.000	eufy Smart 21.8℃ 960hPa Mode 4 Meter Reading (dBµV) 47.28 38.37 41.08	Scale C20 Factor (dB) 0.08 0.08 2.21	Emission I (dBµV/n 47.36 38.45 43.29	Relati Test \ Anter Level m) 5 5 9	Limits (dBµV/m) 74 54 74	60.2% Normal V Vertical Margin (dB) -26.64 -15.55 -30.71	Value Type peak AVG peak

RESULT: Pass



UT Name	eufy Smart	t Scale C20	Mod	el Name	T9130	
emperature	21.8 ℃		Rela	tive Humidity	60.2%	
ressure	960hPa		Test	Voltage	Normal	Voltage
est Mode	Mode 5		Ante	enna Polarity	Horizon	tal
	·				·	
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4880.000	46.28	0.14	46.42	74	-27.58	peak
4880.000	37.52	0.14	37.66	54	-16.34	AVG
7320.000	42.16	2.36	44.52	74	-29.48	peak
7320.000	32.24	2.36	34.6	54	-19.4	AVG
Remark:	-	<u></u>				
Factor = Anter	nna Factor + Cab	le Loss – Pre-	amplifier.	<u>.</u>		
UT Name	eufy Smart	t Scale C20	Mod	el Name	T9130	
emperature	21.8 ℃		Rela	tive Humidity	60.2%	
ressure	960hPa		Test	Voltage	Normal	Voltage
est Mode	Mode 5		Ante	enna Polarity	Vertical	
		F orter		11.10		
	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
Frequency	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	naali
(MHz)	47.04	0.14	47.78	74 54	-26.22	peak
(MHz) 4882.000	47.64		00.07		-15.33	AVG
(MHz) 4882.000 4882.000	38.53	0.14	38.67			
(MHz) 4882.000 4882.000 7323.000	38.53 42.68	0.14 2.36	45.04	74	-28.96	peak
(MHz) 4882.000 4882.000	38.53	0.14				peak AVG
(MHz) 4882.000 4882.000 7323.000 7323.000	38.53 42.68	0.14 2.36	45.04	74	-28.96	•
(MHz) 4882.000 4882.000 7323.000 7323.000 Remark:	38.53 42.68	0.14 2.36 2.36	45.04 34.33	74	-28.96	•

RESULT: Pass




EUT Name	eufy Smart	Scale C20	Mo	odel Name	T9130			
Femperature	21.8 ℃		Re	elative Humidity	60.2%			
Pressure	960hPa		Те	st Voltage	Normal V	Normal Voltage		
Fest Mode	Mode 6		An	ntenna Polarity	Horizonta	al		
Frequency	Meter Reading	Factor	Emission Le	evel Limits	Margin	Value Type		
(MHz)	(dBµV)	(dB)	(dBµV/m)) (dBµV/m)	(dB)	value Type		
4960.000	47.83	0.22	48.05	74	-25.95	peak		
4960.000	38.53	0.22	38.75	54	-15.25	AVG		
7440.000	42.34	2.64	44.98	74	-29.02	peak		
7440.000	31.58	2.64	34.22	54	-19.78	AVG		
	nna Factor + Cabl							
	nna Factor + Cable			odel Name	T9130			
Factor = Anter			Ma	odel Name elative Humidity	T9130 60.2%			
Factor = Anter	eufy Smart		Mc Re			/oltage		
Factor = Anter EUT Name Femperature	eufy Smart 21.8℃		Ma Re Te	elative Humidity	60.2%	/oltage		
Factor = Anter	eufy Smart 21.8℃ 960hPa Mode 6	Scale C20	Ma Re Te Ar	elative Humidity st Voltage ntenna Polarity	60.2% Normal V Vertical			
Factor = Anter	eufy Smart 21.8℃ 960hPa Mode 6 Meter Reading	Scale C20 Factor	Ma Re Te Ar Emission Le	elative Humidity st Voltage ntenna Polarity evel Limits	60.2% Normal V Vertical Margin	/oltage Value Type		
Factor = Anter	eufy Smart 21.8℃ 960hPa Mode 6 Meter Reading (dBµV)	Scale C20 Factor (dB)	Ma Re Te Ar	elative Humidity st Voltage ntenna Polarity evel Limits	60.2% Normal V Vertical Margin (dB)			
Factor = Anter	eufy Smart 21.8℃ 960hPa Mode 6 Meter Reading	Scale C20 Factor	Mo Re Te Ar Emission Le (dBµV/m)	elative Humidity st Voltage ntenna Polarity evel Limits (dBµV/m)	60.2% Normal V Vertical Margin	- Value Type		
Factor = Anter EUT Name Femperature Pressure Fest Mode Frequency (MHz) 4960.000	eufy Smart 21.8℃ 960hPa Mode 6 Meter Reading (dBµV) 48.24	Scale C20 Factor (dB) 0.22	Mc Re Te Ar Emission Le (dBµV/m) 48.46	elative Humidity est Voltage ntenna Polarity evel Limits (dBµV/m) 74	60.2% Normal V Vertical Margin (dB) -25.54	Value Type		
Factor = Anter EUT Name Femperature Pressure Fest Mode Frequency (MHz) 4960.000 4960.000	eufy Smart 21.8℃ 960hPa Mode 6 Meter Reading (dBµV) 48.24 37.19	Scale C20 Factor (dB) 0.22 0.22	Mc Re Te Ar Emission Le (dBµV/m) 48.46 37.41	elative Humidity est Voltage ntenna Polarity evel Limits (dBµV/m) 74 54	60.2% Normal V Vertical Margin (dB) -25.54 -16.59	- Value Type peak AVG		
Factor = Anter EUT Name Femperature Pressure Fest Mode Frequency (MHz) 4960.000 7440.000	eufy Smart 21.8 ℃ 960hPa Mode 6 Meter Reading (dBµV) 48.24 37.19 42.27	Scale C20 Factor (dB) 0.22 0.22 2.64	Ма Re Те Ап Етизстон Le (dBµV/m) 48.46 37.41 44.91	elative Humidity st Voltage ntenna Polarity evel Limits (dBµV/m) 74 54 74	60.2% Normal V Vertical Margin (dB) -25.54 -16.59 -29.09	Value Type peak AVG peak		
Factor = Anter EUT Name Femperature Pressure Fest Mode Frequency (MHz) 4960.000 7440.000	eufy Smart 21.8 ℃ 960hPa Mode 6 Meter Reading (dBµV) 48.24 37.19 42.27	Scale C20 Factor (dB) 0.22 0.22 2.64	Ма Re Те Ап Етизстон Le (dBµV/m) 48.46 37.41 44.91	elative Humidity st Voltage ntenna Polarity evel Limits (dBµV/m) 74 54 74	60.2% Normal V Vertical Margin (dB) -25.54 -16.59 -29.09	Value Type peak AVG peak		

RESULT: Pass

Note:

- 1. The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.





EUT Name	eufy Smart Scale C20	Model Name	T9130
Temperature	25 ℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Horizontal




Test Graph for Peak Measurement

Test Graph for Average Measurement



RESULT: Pass





EUT Name	eufy Smart Scale C20	Model Name	T9130
Temperature	25 ℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Vertical




Test Graph for Peak Measurement

Test Graph for Average Measurement



RESULT: Pass






EUT Name	eufy Smart Scale C20	Model Name	T9130
Temperature	25 ℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Horizontal



Test Graph for Peak Measurement

Test Graph for Average Measurement

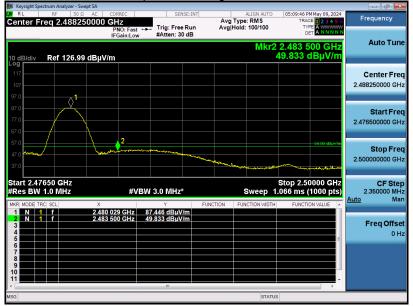

RESULT: Pass



EUT Name	eufy Smart Scale C20	Model Name	T9130
Temperature	25 ℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Vertical


Test Graph for Peak Measurement



Test Graph for Average Measurement




RESULT: Pass






EUT Name	eufy Smart Scale C20	Model Name	T9130
Temperature	25 ℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna Polarity	Horizontal


Test Graph for Peak Measurement

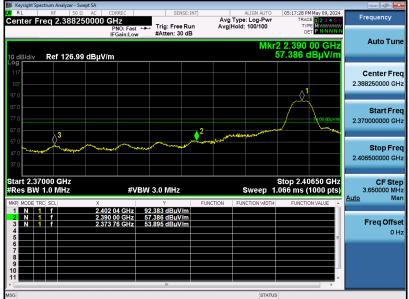

Test Graph for Average Measurement

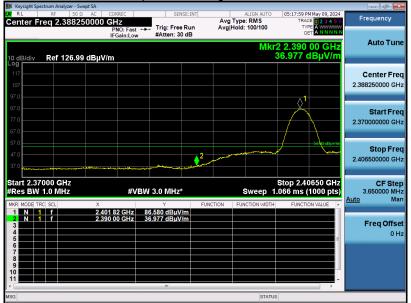

RESULT: Pass





EUT Name	eufy Smart Scale C20	Model Name	T9130
Temperature	25 ℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna Polarity	Vertical



Test Graph for Peak Measurement

Test Graph for Average Measurement



RESULT: Pass






EUT Name	eufy Smart Scale C20	Model Name	T9130
Temperature	25 ℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna Polarity	Horizontal



Test Graph for Peak Measurement

Test Graph for Average Measurement

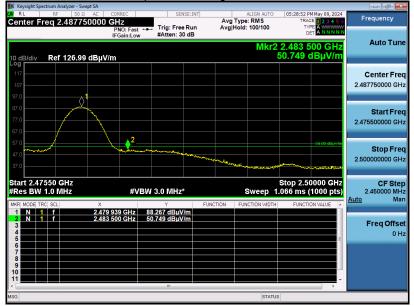

RESULT: Pass




EUT Name	eufy Smart Scale C20	Model Name	T9130
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna Polarity	Vertical



Test Graph for Peak Measurement

Test Graph for Average Measurement

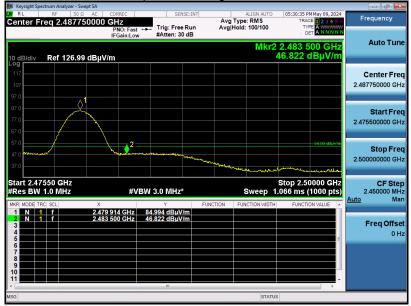

RESULT: Pass

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.



12. AC Power Line Conducted Emission Test

12.1 Measurement Limit


Francisco	Maximum RF Line Voltage		
Frequency	Q.P. (dBµV)	Average (dBµV)	
150kHz~500kHz	66-56	56-46	
500kHz~5MHz	56	46	
5MHz~30MHz	60	50	

Note:

1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

12.2 Measurement Setup (Block Diagram of Configuration)

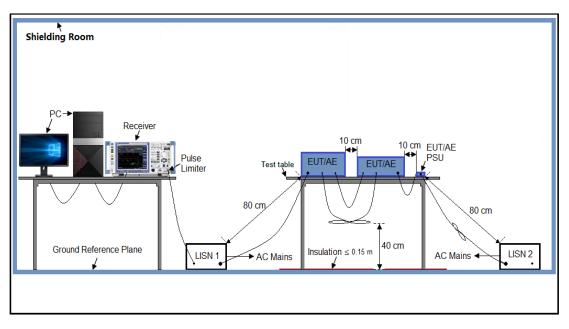



12.3 Preliminary Procedure of Line Conducted Emission Test

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4 Final Procedure of Line Conducted Emission Test

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

12.5 Measurement Results

N/A

Note: The conducted emission tests at AC port are not required for devices which only employ battery power for operation.



Report No.: AGC01110240485FR01 Page 68 of 68

Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC01110240485AP02

Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC01110240485AP03

-----End of Report-----



Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.