

# FCC Radio Test Report

## FCC ID: TE7AX20V1

This report concerns: Original Grant

**Project No.** : 1907C233A  
**Equipment** : AX1800 Wi-Fi 6 Router  
**Brand Name** : tp-link  
**Test Model** : Archer AX20  
**Series Model** : N/A  
**Applicant** : TP-Link Technologies Co., Ltd.  
**Address** : Building 24(floors1,3,4,5) and 28(floors1-4) Central Science and Technology Park, Shennan Rd, Nanshan, Shenzhen, China  
**Manufacturer** : TP-Link Technologies Co., Ltd.  
**Address** : Building 24(floors1,3,4,5) and 28(floors1-4) Central Science and Technology Park, Shennan Rd, Nanshan, Shenzhen, China  
**Date of Receipt** : Jan. 15, 2020  
**Date of Test** : Jan. 15, 2020 ~ Mar. 13, 2020  
**Issued Date** : Mar. 19, 2020  
**Report Version** : R00  
**Test Sample** : Engineering Sample No.: DG2020011473 for conducted, DG2020030638 for radiated.  
**Standard(s)** : FCC Part15, Subpart E(15.407)  
 ANSI C63.10-2013  
 FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01  
 FCC KDB 662911 D01 Multiple Transmitter Output v02r01

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.



Prepared by : Welly Zhou



Approved by : Ethan Ma



Certificate #5123.02

Add: No.3, Jinshagang 1st Road, Shixia, Dalang Town,Dongguan, Guangdong, China.

Tel: +86-769-8318-3000

Web: www.newbtl.com

**Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

**BTL** is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

**Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

<b>Table of Contents</b>	<b>Page</b>
<b>REPORT ISSUED HISTORY</b>	<b>6</b>
<b>1 . SUMMARY OF TEST RESULTS</b>	<b>7</b>
1.1 TEST FACILITY	8
1.2 MEASUREMENT UNCERTAINTY	8
1.3 TEST ENVIRONMENT CONDITIONS	8
<b>2 . GENERAL INFORMATION</b>	<b>9</b>
2.1 GENERAL DESCRIPTION OF EUT	9
2.2 TEST MODES	12
2.3 PARAMETERS OF TEST SOFTWARE	14
2.4 DUTY CYCLE	16
2.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	18
2.6 SUPPORT UNITS	18
<b>3 . AC POWER LINE CONDUCTED EMISSIONS TEST</b>	<b>19</b>
3.1 LIMIT	19
3.2 TEST PROCEDURE	19
3.3 DEVIATION FROM TEST STANDARD	19
3.4 TEST SETUP	20
3.5 EUT OPERATION CONDITIONS	20
3.6 TEST RESULTS	20
<b>4 . RADIATED EMISSIONS TEST</b>	<b>21</b>
4.1 LIMIT	21
4.2 TEST PROCEDURE	22
4.3 DEVIATION FROM TEST STANDARD	22
4.4 TEST SETUP	23
4.5 EUT OPERATION CONDITIONS	24
4.6 TEST RESULTS - 9 KHZ to 30 MHZ	24
4.7 TEST RESULTS - 30 MHz TO 1000 MHz	24
4.8 TEST RESULTS - ABOVE 1000 MHz	24
<b>5 . BANDWIDTH TEST</b>	<b>25</b>
5.1 LIMIT	25
5.2 TEST PROCEDURE	25
5.3 DEVIATION FROM STANDARD	25

<b>Table of Contents</b>	<b>Page</b>
5.4 TEST SETUP	25
5.5 EUT OPERATION CONDITIONS	25
5.6 TEST RESULTS	25
<b>6 . MAXIMUM OUTPUT POWER TEST</b>	<b>26</b>
6.1 LIMIT	26
6.2 TEST PROCEDURE	26
6.3 DEVIATION FROM STANDARD	26
6.4 TEST SETUP	26
6.5 EUT OPERATION CONDITIONS	26
6.6 TEST RESULTS	26
<b>7 . POWER SPECTRAL DENSITY TEST</b>	<b>27</b>
7.1 LIMIT	27
7.2 TEST PROCEDURE	27
7.3 DEVIATION FROM STANDARD	27
7.4 TEST SETUP	27
7.5 EUT OPERATION CONDITIONS	27
7.6 TEST RESULTS	27
<b>8 . FREQUENCY STABILITY MEASUREMENT</b>	<b>28</b>
8.1 LIMIT	28
8.2 TEST PROCEDURE	28
8.3 DEVIATION FROM STANDARD	28
8.4 TEST SETUP	28
8.5 EUT OPERATION CONDITIONS	28
8.6 TEST RESULTS	28
<b>9 . MEASUREMENT INSTRUMENTS LIST</b>	<b>29</b>
<b>10 . EUT TEST PHOTOS</b>	<b>31</b>
<b>APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS</b>	<b>35</b>
<b>APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ</b>	<b>38</b>
<b>APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1 GHZ</b>	<b>43</b>
<b>APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ</b>	<b>46</b>
<b>APPENDIX E - BANDWIDTH</b>	<b>263</b>

<b>Table of Contents</b>	<b>Page</b>
<b>APPENDIX F - MAXIMUM OUTPUT POWER</b>	<b>286</b>
<b>APPENDIX G - POWER SPECTRAL DENSITY</b>	<b>313</b>
<b>APPENDIX H - FREQUENCY STABILITY</b>	<b>340</b>

**REPORT ISSUED HISTORY**

Report Version	Description	Issued Date
R00	Original Issue.	Mar. 19, 2020

## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part15, Subpart E(15.407)				
Standard(s) Section	Test Item	Test Result	Judgement	Remark
15.207 15.407(b)	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.407(b) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.407(a) 15.407(e)	Spectrum Bandwidth	APPENDIX E	PASS	-----
15.407(a)	Maximum Output Power	APPENDIX F	PASS	-----
15.407(a)	Power Spectral Density	APPENDIX G	PASS	-----
15.407(g)	Frequency Stability	APPENDIX H	PASS	-----
15.203	Antenna Requirements	-----	PASS	Note(4)
15.407(c)	Automatically Discontinue Transmission	-----	PASS	Note(2)

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. the EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.
- (3) For UNII-1 this device was functioned as a  
☒ Access point device    ☐ Client device
- (4) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

## 1.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3,Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's Test Firm Registration Number for FCC: 357015

BTL's Designation Number for FCC: CN1240

## 1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ( $k=2$ ))

The BTL measurement uncertainty as below table:

### A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150 kHz ~ 30 MHz	2.32

### B. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03	CISPR	9kHz ~ 30MHz	V	3.79
		9kHz ~ 30MHz	H	3.57
		30MHz ~ 200MHz	V	4.88
		30MHz ~ 200MHz	H	4.14
		200MHz ~ 1,000MHz	V	4.62
		200MHz ~ 1,000MHz	H	4.80
		1GHz ~ 6GHz	-	4.58
		6GHz ~ 18GHz	-	5.18
		18GHz ~ 26.5GHz	-	3.80
		26.5GHz ~ 40GHz	-	4.30

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.


## 1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	25°C	53%	AC 120V/60Hz	Kwok Guo
Radiated Emissions-9K-30MHz	25°C	60%	AC 120V/60Hz	Kwok Guo
Radiated Emissions-30 MHz to 1GHz	24°C	68%	AC 120V/60Hz	Kwok Guo
Radiated Emissions-Above 1000 MHz	25°C	60%	AC 120V/60Hz	Kwok Guo
Spectrum Bandwidth	25°C	66%	AC 120V/60Hz	Hayden Chen
Maximum Output Power	25°C	66%	AC 120V/60Hz	Laughing Zhang
Power Spectral Density	25°C	66%	AC 120V/60Hz	Hayden Chen
Frequency Stability	Normal & Extreme	66%	Normal & Extreme	Hayden Chen



## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Equipment	AX1800 Wi-Fi 6 Router
Brand Name	tp-link
Test Model	Archer AX20
Series Model	N/A
Model Difference(s)	N/A
Power Source	DC voltage supplied from AC/DC adapter. Model: T120150-2B1
Power Rating	I/P: 100-240V~ 50/60Hz 0.6A O/P: 12V  1.5A
Operation Frequency Bands	UNII-1: 5150 MHz~5250 MHz UNII-3: 5725 MHz~5850 MHz
Modulation Type	IEEE 802.11a: OFDM IEEE 802.11ac: OFDM IEEE 802.11ax: OFDMA
Bit Rate of Transmitter	Up to 1201 Mbps
Maximum Output Power for UNII-1 _Non Beamforming	IEEE 802.11a: 28.20 dBm (0.6607 W) IEEE 802.11ac (VHT20): 27.87 dBm (0.6124 W) IEEE 802.11ac (VHT40): 27.72 dBm (0.5916 W) IEEE 802.11ac (VHT80): 20.19 dBm (0.1045 W) IEEE 802.11ax (HEW20): 28.10 dBm (0.6457 W) IEEE 802.11ax (HEW40): 27.61 dBm (0.5768 W) IEEE 802.11ax (HEW80): 20.64 dBm (0.1159 W)
Maximum Output Power for UNII-3 _Non Beamforming	IEEE 802.11a: 29.25 dBm (0.8414 W) IEEE 802.11ac (VHT20): 29.06 dBm (0.8054 W) IEEE 802.11ac (VHT40): 29.75 dBm (0.9441 W) IEEE 802.11ac (VHT80): 24.76 dBm (0.2992 W) IEEE 802.11ax (HEW20): 29.82 dBm (0.9594 W) IEEE 802.11ax (HEW40): 29.79 dBm (0.9528 W) IEEE 802.11ax (HEW80): 24.76 dBm (0.2992 W)
Maximum Output Power for UNII-1_Beamforming	IEEE 802.11ac (VHT20): 28.25 dBm (0.6683 W) IEEE 802.11ac (VHT40): 28.07 dBm (0.6412 W) IEEE 802.11ac (VHT80): 17.01 dBm (0.0502 W) IEEE 802.11ax (HEW20): 28.02 dBm (0.6339 W) IEEE 802.11ax (HEW40): 26.53 dBm (0.4498 W) IEEE 802.11ax (HEW80): 19.24 dBm (0.0839 W)
Maximum Output Power for UNII-3_Beamforming	IEEE 802.11ac (VHT20): 27.01 dBm (0.5023 W) IEEE 802.11ac (VHT40): 27.09 dBm (0.5117 W) IEEE 802.11ac (VHT80): 24.17 dBm (0.2612 W) IEEE 802.11ax (HEW20): 27.14 dBm (0.5176 W) IEEE 802.11ax (HEW40): 27.08 dBm (0.5105 W) IEEE 802.11ax (HEW80): 24.36 dBm (0.2729 W)

Note:





- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

## 2. Channel List:

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20) IEEE 802.11ax (HEW20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40) IEEE 802.11ax (HEW40)		IEEE 802.11ac (VHT80) IEEE 802.11ax (HEW80)	
UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20) IEEE 802.11ax (HEW20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40) IEEE 802.11ax (HEW40)		IEEE 802.11ac (VHT80) IEEE 802.11ax (HEW80)	
UNII-3		UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

## 3. Antenna Specification:

Ant.	Brand	P/N	Antenna Type	Connector	Gain (dBi)	Note
1		3101502648	Dipole	I-PEX	4.37	UNII-1
2		3101502649	Dipole	I-PEX	4.37	UNII-1
1		3101502648	Dipole	I-PEX	5.80	UNII-3
2		3101502649	Dipole	I-PEX	5.80	UNII-3

Note:

This EUT supports CDD, and all antennas have the same gain, Directional gain =  $G_{ANT}$  + Array Gain, where Array Gain is as follows:

(1) For Non Beamforming Function,

For power measurements, Array Gain = 0 dB ( $N_{ANT} \leq 4$ ), so the UNII-1 Directional gain=4.37, the UNII-3 Directional gain=5.80.

For power spectral density measurements,  $N_{ANT} = 2$ ,  $N_{SS} = 1$ .

The UNII-1 Directional gain =  $G_{ANT} + \text{Array Gain} = 10 \log (N_{ANT}/N_{SS})$  dB =  $4.37 + 10 \log (2/1)$  dBi = 7.38, the UNII-3 Directional gain =  $G_{ANT} + \text{Array Gain} = 10 \log (N_{ANT}/N_{SS})$  dB =  $5.80 + 10 \log (2/1)$  dBi = 8.81.

So the UNII-1 power spectral density limit is  $17 - (7.38 - 6) = 15.62$ , the UNII-3 power spectral density limit is  $30 - (8.81 - 6) = 27.19$ .

(2) For Beamforming Function, Beamforming Gain: 3.01 dB.

Then the UNII-1 Directional gain =  $4.37 + 3.01 = 7.38$ , the UNII-3 Directional gain =  $5.80 + 3.01 = 8.81$ .

So the UNII-1 output power limit is  $30 - (7.38 - 6) = 28.62$ ,

the UNII-3 output power limit is  $30 - (8.81 - 6) = 27.19$ .

the UNII-1 power spectral density limit is  $17 - (7.38 - 6) = 15.62$ ,

the UNII-3 power spectral density limit is  $30 - (8.81 - 6) = 27.19$ .

#### 4. Table for Antenna Configuration:

For Non Beamforming Function:

Operating Mode	TX Mode	2TX
IEEE 802.11a		V (Ant. 1 + Ant. 2)
IEEE 802.11ac (VHT20)		V (Ant. 1 + Ant. 2)
IEEE 802.11ac (VHT40)		V (Ant. 1 + Ant. 2)
IEEE 802.11ac (VHT80)		V (Ant. 1 + Ant. 2)
IEEE 802.11ax (HEW20)		V (Ant. 1 + Ant. 2)
IEEE 802.11ax (HEW40)		V (Ant. 1 + Ant. 2)
IEEE 802.11ax (HEW80)		V (Ant. 1 + Ant. 2)

For Beamforming Function:

Operating Mode	TX Mode	2TX
IEEE 802.11ac (VHT20)		V (Ant. 1 + Ant. 2)
IEEE 802.11ac (VHT40)		V (Ant. 1 + Ant. 2)
IEEE 802.11ac (VHT80)		V (Ant. 1 + Ant. 2)
IEEE 802.11ax (HEW20)		V (Ant. 1 + Ant. 2)
IEEE 802.11ax (HEW40)		V (Ant. 1 + Ant. 2)
IEEE 802.11ax (HEW80)		V (Ant. 1 + Ant. 2)

## 2.2 TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX A Mode / CH36, CH40, CH48 (UNII-1)
Mode 2	TX AC (VHT20) Mode / CH36, CH40, CH48 (UNII-1)
Mode 3	TX AC (VHT40) Mode / CH38, CH46 (UNII-1)
Mode 4	TX AC (VHT80) Mode / CH42 (UNII-1)
Mode 5	TX AX (HEW20) Mode / CH36, CH40, CH48 (UNII-1)
Mode 6	TX AX (HEW40) Mode / CH38, CH46 (UNII-1)
Mode 7	TX AX (HEW80) Mode / CH42 (UNII-1)
Mode 8	TX A Mode / CH149,CH157,CH165 (UNII-3)
Mode 9	TX AC (VHT20) Mode / CH149,CH157,CH165 (UNII-3)
Mode 10	TX AC (VHT40) Mode / CH151,CH159 (UNII-3)
Mode 11	TX AC (VHT80) Mode / CH155 (UNII-3)
Mode 12	TX AX (HEW20) Mode / CH149,CH157,CH165 (UNII-3)
Mode 13	TX AX (HEW40) Mode / CH151,CH159 (UNII-3)
Mode 14	TX AX (HEW80) Mode / CH155 (UNII-3)
Mode 15	TX AX (HEW20) Mode / CH149 (UNII-3)

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 15	TX AX (HEW20) Mode / CH149 (UNII-3)

Radiated emissions test - Below 1GHz	
Final Test Mode	Description
Mode 15	TX AX (HEW20) Mode / CH149 (UNII-3)

Radiated emissions test - Above 1GHz & Conducted tests for Non Beamforming	
Final Test Mode	Description
Mode 1	TX A Mode / CH36, CH40, CH48 (UNII-1)
Mode 2	TX AC (VHT20) Mode / CH36, CH40, CH48 (UNII-1)
Mode 3	TX AC (VHT40) Mode / CH38, CH46 (UNII-1)
Mode 4	TX AC (VHT80) Mode / CH42 (UNII-1)
Mode 5	TX AX (HEW20) Mode / CH36, CH40, CH48 (UNII-1)
Mode 6	TX AX (HEW40) Mode / CH38, CH46 (UNII-1)
Mode 7	TX AX (HEW80) Mode / CH42 (UNII-1)
Mode 8	TX A Mode / CH149,CH157,CH165 (UNII-3)
Mode 9	TX AC (VHT20) Mode / CH149,CH157,CH165 (UNII-3)
Mode 10	TX AC (VHT40) Mode / CH151,CH159 (UNII-3)
Mode 11	TX AC (VHT80) Mode / CH155 (UNII-3)
Mode 12	TX AX (HEW20) Mode / CH149,CH157,CH165 (UNII-3)
Mode 13	TX AX (HEW40) Mode / CH151,CH159 (UNII-3)
Mode 14	TX AX (HEW80) Mode / CH155 (UNII-3)

Radiated emissions test - Above 1GHz & Conducted tests for Beamforming	
Final Test Mode	Description
Mode 2	TX AC (VHT20) Mode / CH36, CH40, CH48 (UNII-1)
Mode 3	TX AC (VHT40) Mode / CH38, CH46 (UNII-1)
Mode 4	TX AC (VHT80) Mode / CH42 (UNII-1)
Mode 5	TX AX (HEW20) Mode / CH36, CH40, CH48 (UNII-1)
Mode 6	TX AX (HEW40) Mode / CH38, CH46 (UNII-1)
Mode 7	TX AX (HEW80) Mode / CH42 (UNII-1)
Mode 9	TX AC (VHT20) Mode / CH149,CH157,CH165 (UNII-3)
Mode 10	TX AC (VHT40) Mode / CH151,CH159 (UNII-3)
Mode 11	TX AC (VHT80) Mode / CH155 (UNII-3)
Mode 12	TX AX (HEW20) Mode / CH149,CH157,CH165 (UNII-3)
Mode 13	TX AX (HEW40) Mode / CH151,CH159 (UNII-3)
Mode 14	TX AX (HEW80) Mode / CH155 (UNII-3)

**Note:**

- (1) For radiated emission below 1 GHz test, the IEEE 802.11ax20 channel 149 is found to be the worst case and recorded.
- (2) For radiated emission above 1 GHz test, 1GHz~26.5GHz and 26.5GHz~40GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (3) All the bit rate of transmitter have been tested and found the lowest rate is found to be the worst case and recorded.
- (4) VHT20/VHT40 covers HT20/HT40, due to same modulation. The power setting for 802.11n HT20 and HT40 are the same or lower than 802.11ac VHT20 and VHT40.

## 2.3 PARAMETERS OF TEST SOFTWARE

### Non Beamforming

UNII-1			
Test Software	accessMTool_REL_3_0_0_5		
Test Frequency (MHz)	5180	5200	5240
IEEE 802.11a	84	89	90
IEEE 802.11ac (VHT20)	84	89	90
IEEE 802.11ax (HEW20)	82	90	90
Test Frequency (MHz)	5190	5230	
IEEE 802.11ac (VHT40)	67	93	
IEEE 802.11ax (HEW40)	67	92	
Test Frequency (MHz)	5210		
IEEE 802.11ac (VHT80)	65		
IEEE 802.11ax (HEW80)	66		

UNII-3			
Test Software	accessMTool_REL_3_0_0_5		
Test Frequency (MHz)	5745	5785	5825
IEEE 802.11a	102	102	100
IEEE 802.11ac (VHT20)	101	101	100
IEEE 802.11ax (HEW20)	101	100	99
Test Frequency (MHz)	5755	5795	
IEEE 802.11ac (VHT40)	97	102	
IEEE 802.11ax (HEW40)	94	101	
Test Frequency (MHz)	5775		
IEEE 802.11ac (VHT80)	83		
IEEE 802.11ax (HEW80)	82		

### Beamforming

UNII-1			
Test Software	accessMTool_REL_3_0_0_5		
Test Frequency (MHz)	5180	5200	5240
IEEE 802.11ac (VHT20)	88	94	96
IEEE 802.11ax (HEW20)	76	90	90
Test Frequency (MHz)	5190	5230	
IEEE 802.11ac (VHT40)	72	92	
IEEE 802.11ax (HEW40)	64	88	
Test Frequency (MHz)	5210		
IEEE 802.11ac (VHT80)	52		
IEEE 802.11ax (HEW80)	60		

UNII-3			
Test Software	accessMTool_REL_3_0_0_5		
Test Frequency (MHz)	5745	5785	5825
IEEE 802.11ac (VHT20)	94	93	92
IEEE 802.11ax (HEW20)	92	92	91
Test Frequency (MHz)	5755	5795	
IEEE 802.11ac (VHT40)	92	92	
IEEE 802.11ax (HEW40)	80	91	
Test Frequency (MHz)	5775		
IEEE 802.11ac (VHT80)	80		
IEEE 802.11ax (HEW80)	80		

## 2.4 DUTY CYCLE


If duty cycle is  $\geq 98\%$ , duty factor is not required.

If duty cycle is  $< 98\%$ , duty factor shall be considered.

The output power = measured power + duty factor.

The power spectral density = measured power spectral density + duty factor.


### IEEE 802.11a

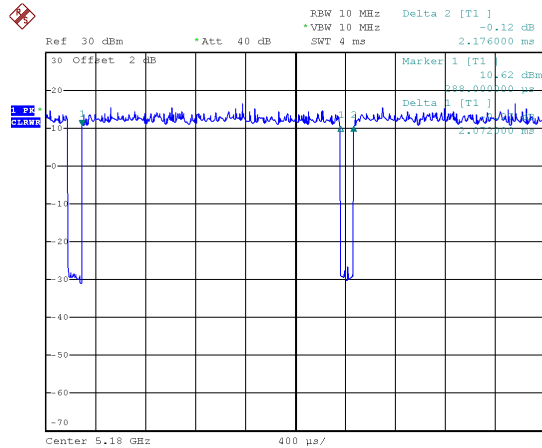

Date: 5.AUG.2019 14:31:07

Duty cycle = 2.072 ms / 2.184 ms = 94.87%  
 Duty Factor =  $10 \log(1/\text{Duty cycle}) = 0.23$


### IEEE 802.11ac (VHT20)

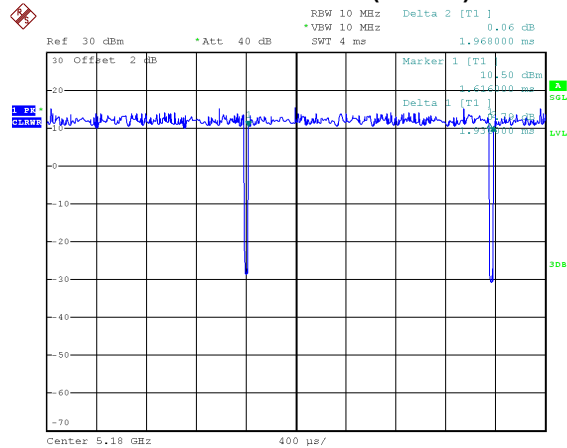

Date: 5.AUG.2019 14:32:05

Duty cycle = 1.936 ms / 1.960 ms = 98.78%  
 Duty Factor =  $10 \log(1/\text{Duty cycle}) = 0.00$


### IEEE 802.11ac (VHT40)

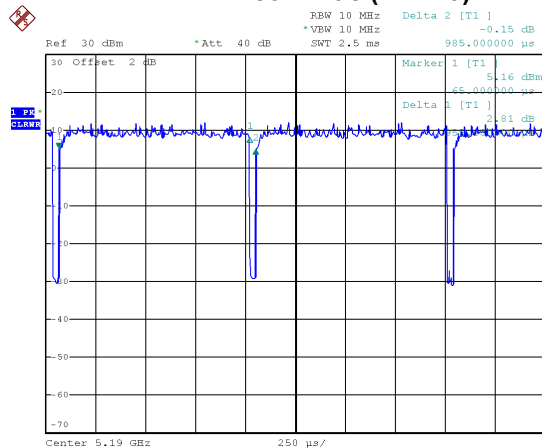

Date: 5.AUG.2019 14:33:41

Duty cycle = 0.960 ms / 0.990 ms = 96.97%  
 Duty Factor =  $10 \log(1/\text{Duty cycle}) = 0.13$

### IEEE 802.11ac (VHT80)

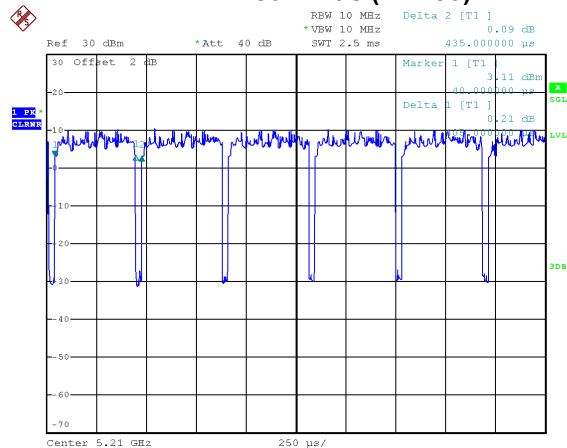


Date: 5.AUG.2019 14:34:04

Duty cycle = 0.460 ms / 0.490 ms = 93.88%  
 Duty Factor =  $10 \log(1/\text{Duty cycle}) = 0.27$




## IEEE 802.11ax (HEW20)

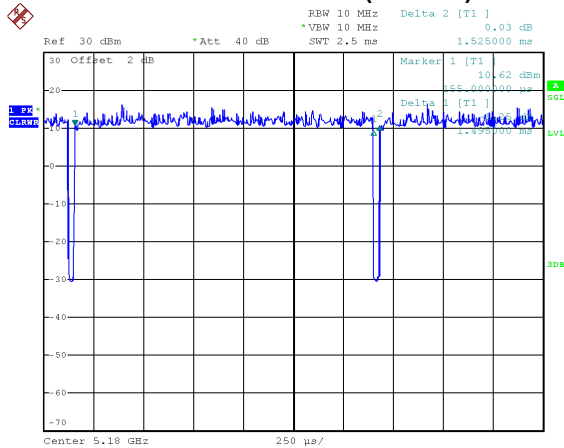

Date: 5.AUG.2019 14:36:29

Duty cycle = 1.495 ms / 1.530 ms = 97.71%  
Duty Factor = 10 log(1/Duty cycle) = 0.10


## IEEE 802.11ax (HEW40)

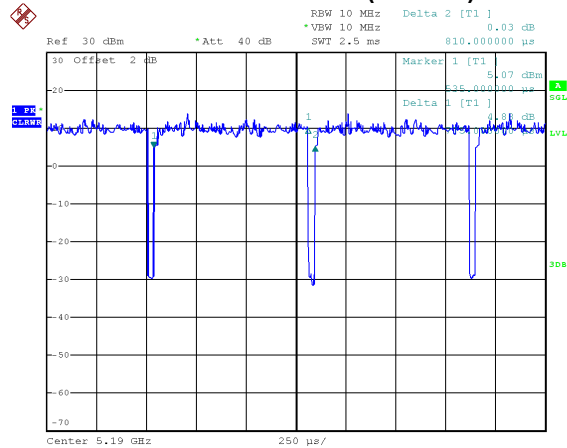

Date: 5.AUG.2019 14:36:48

Duty cycle = 0.775 ms / 0.805 ms = 96.27%  
Duty Factor = 10 log(1/Duty cycle) = 0.16

## IEEE 802.11ax (HEW80)

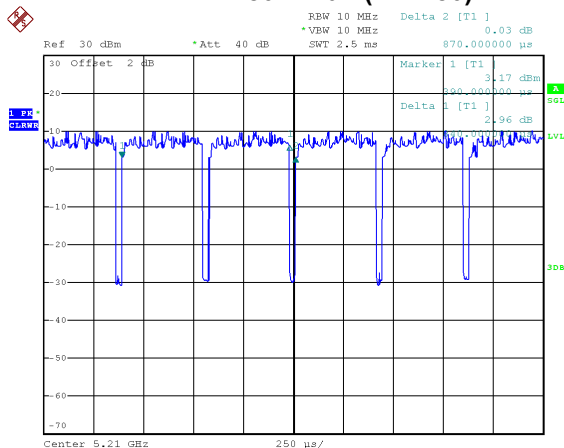

Date: 5.AUG.2019 14:37:05

Duty cycle = 0.400 ms / 0.435 ms = 91.95%  
Duty Factor = 10 log(1/Duty cycle) = 0.36

### NOTE:

For IEEE 802.11a, IEEE 802.11ac (VHT20) and IEEE 802.11ax (HEW20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz (Duty cycle < 98%).


For IEEE 802.11ac (VHT40) and IEEE 802.11ax (HEW40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 2 kHz (Duty cycle < 98%).

For IEEE 802.11ac (VHT80) and IEEE 802.11ax (HEW80):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 kHz (Duty cycle < 98%).

## 2.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

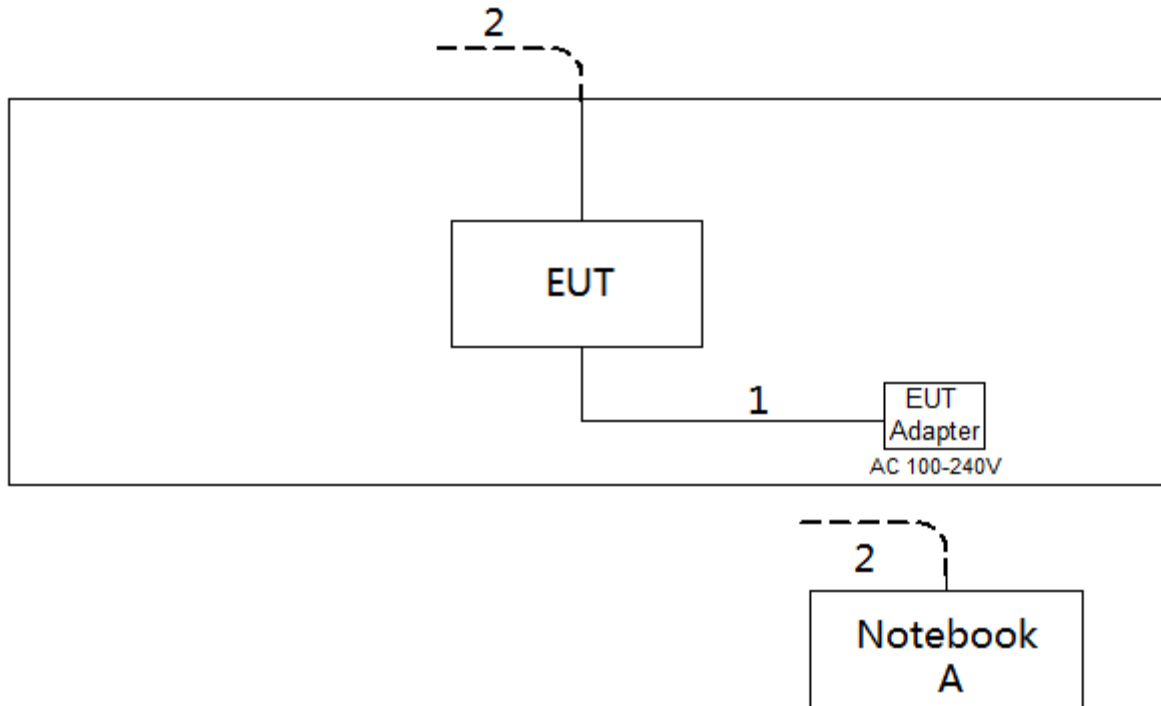

## 2.6 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
A	Notebook	Dell	Inspiron 15-7559	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	DC Cable	NO	NO	1.5m
2	RJ45 Cable	NO	NO	10m

### 3. AC POWER LINE CONDUCTED EMISSIONS TEST

#### 3.1 LIMIT

Frequency (MHz)	Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56*	56 to 46*
0.50 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameter	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz


#### 3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.

#### 3.3 DEVIATION FROM TEST STANDARD

No deviation

### 3.4 TEST SETUP

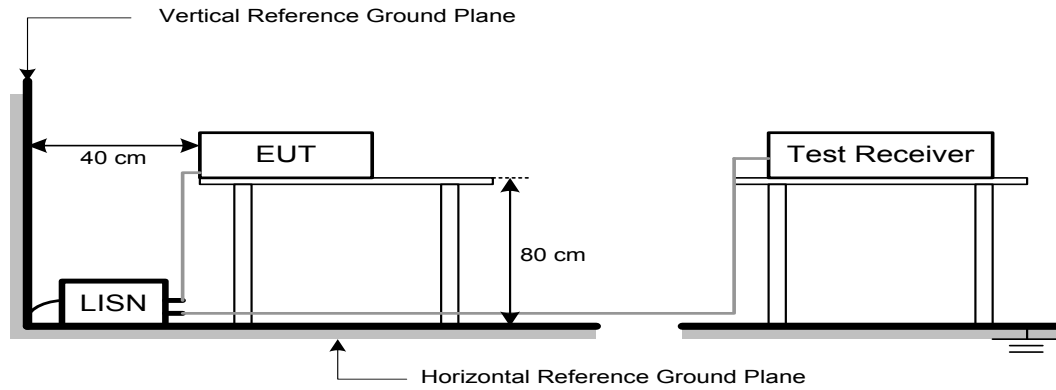

### 3.5 EUT OPERATION CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX mode.

### 3.6 TEST RESULTS

Please refer to the APPENDIX A.

## 4. RADIATED EMISSIONS TEST

### 4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

#### LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

#### LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequency (MHz)	EIRP Limit (dBm/MHz)	Equivalent Field Strength at 3m (dBμV/m)
5150-5250	-27	68.3
5725-5850	-27 NOTE (2)	68.3
	10 NOTE (2)	105.3
	15.6 NOTE (2)	110.9
	27 NOTE (2)	122.3

#### NOTE:

- (1) The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

- (2) According to 15.407(b)(4)(i), all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

## 4.2 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.  
(below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

## 4.3 DEVIATION FROM TEST STANDARD


No deviation


## 4.4 TEST SETUP

9 kHz to 30 MHz

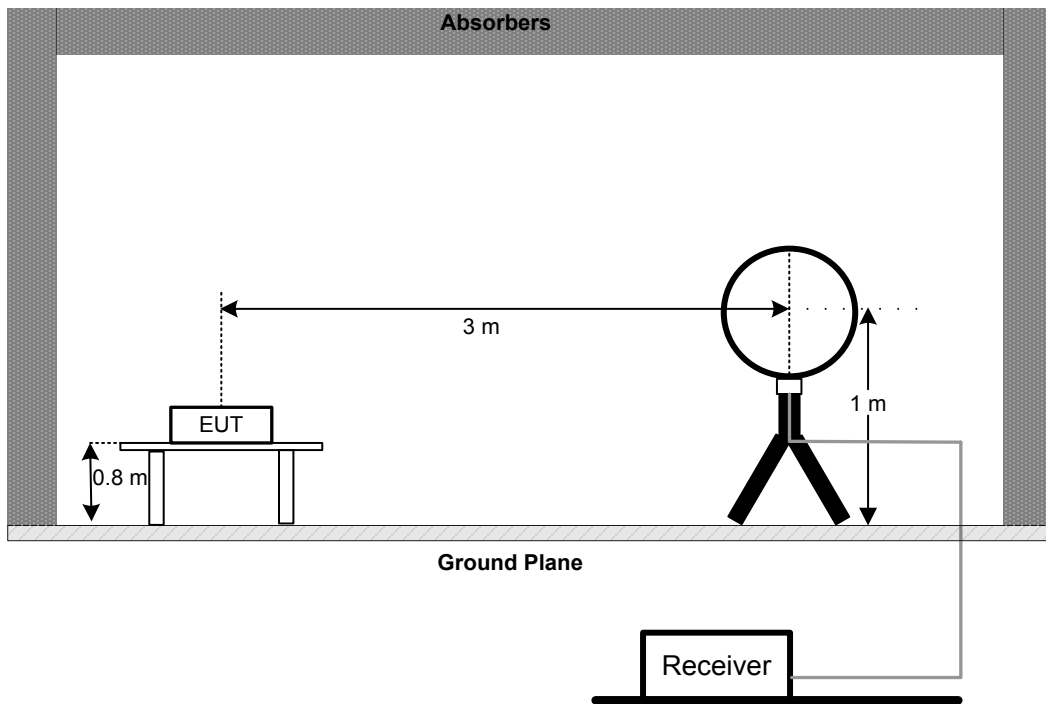

30 MHz to 1 GHz

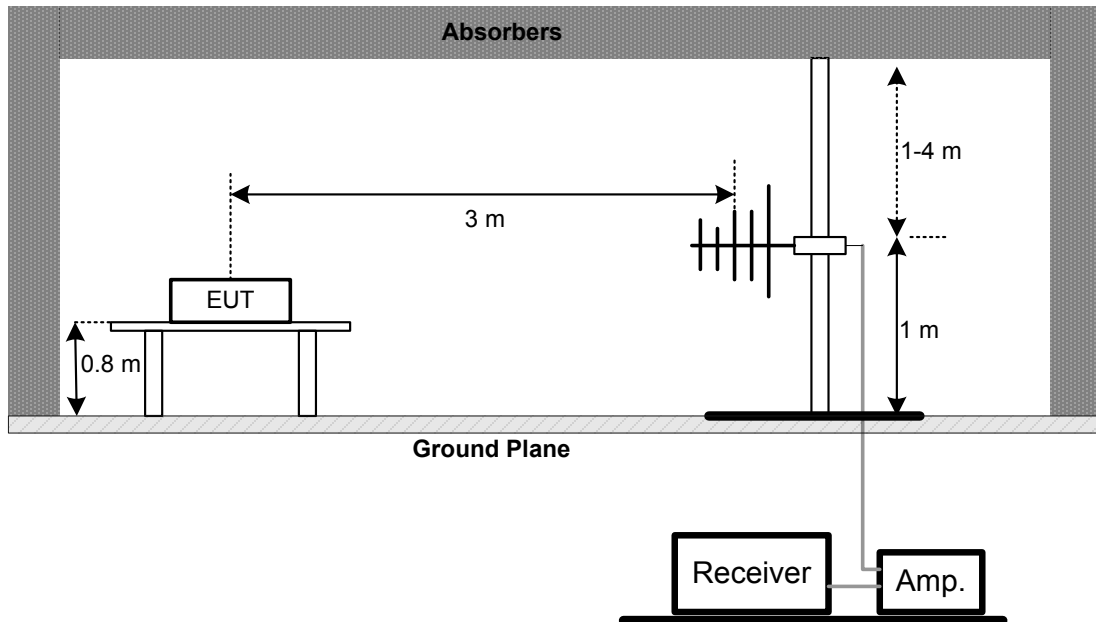

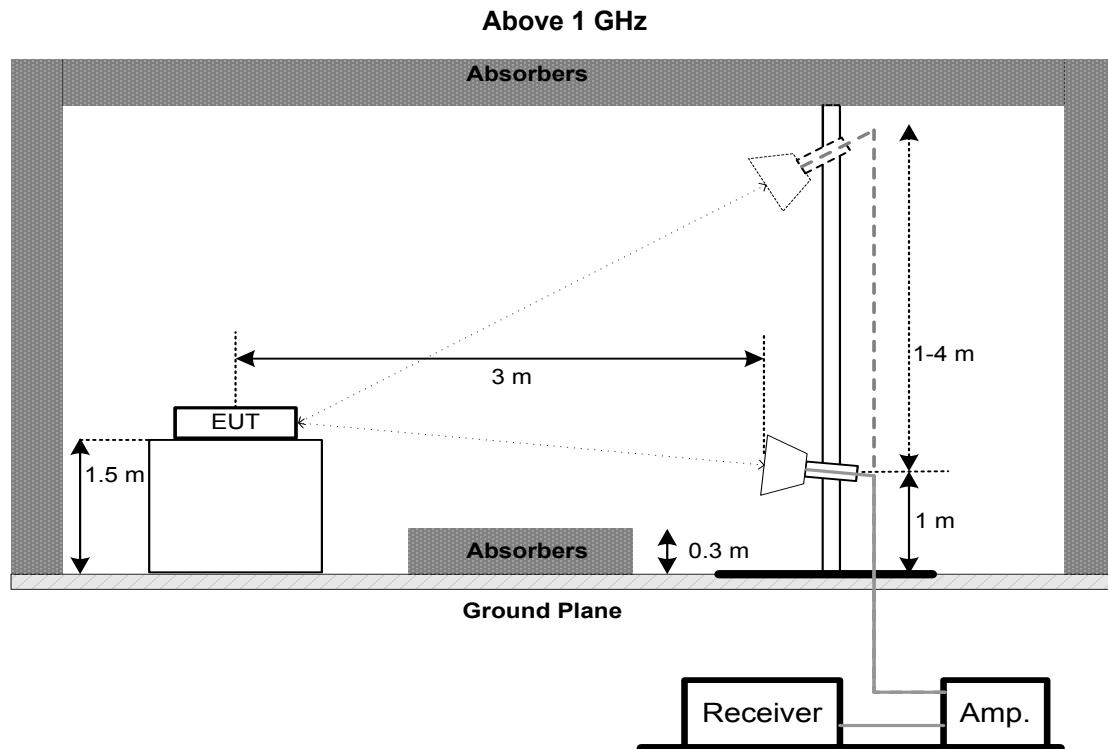

#### 4.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

#### 4.6 TEST RESULTS - 9 KHZ to 30 MHZ

Please refer to the APPENDIX B

Remark:

- (1) Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

#### 4.7 TEST RESULTS - 30 MHZ TO 1000 MHZ

Please refer to the APPENDIX C.

#### 4.8 TEST RESULTS - ABOVE 1000 MHZ

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.  
For fundamental signal judgment was referred to Peak output test.



## 5. BANDWIDTH TEST

### 5.1 LIMIT

FCC Part15, Subpart E (15.407)			
Section	Test Item	Limit	Frequency Range (MHz)
15.407(a)	26 dB Bandwidth	-	5150-5250
15.407(e)	6 dB Bandwidth	Minimum 500 kHz	5725-5850

### 5.2 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below

b. Spectrum Setting:

For UNII-1:

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> 26 dB Bandwidth
RBW	300 kHz (Bandwidth 20 MHz and Bandwidth 40 MHz) 1 MHz (Bandwidth 80 MHz)
VBW	1 MHz (Bandwidth 20 MHz and Bandwidth 40 MHz) 3 MHz (Bandwidth 80 MHz)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For UNII-3:

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	6 dB Bandwidth
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

c. Measured the spectrum width with power higher than 26 dB / 6 dB below carrier.

### 5.3 DEVIATION FROM STANDARD

No deviation.

### 5.4 TEST SETUP



### 5.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

### 5.6 TEST RESULTS

Please refer to the APPENDIX E.

## 6. MAXIMUM OUTPUT POWER TEST

### 6.1 LIMIT

FCC Part15, Subpart E (15.407)			
Section	Test Item	Limit	Frequency Range (MHz)
15.407(a)	Maximum Output Power	AP device: 1 Watt (30 dBm) Client device: 250 mW (24 dBm)	5150-5250
		1 Watt (30dBm)	5725-5850

Note:

- a. For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 6.2 TEST PROCEDURE

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below.
- b. Test test was performed in accordance with method of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

### 6.3 DEVIATION FROM STANDARD

No deviation.

### 6.4 TEST SETUP



### 6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

### 6.6 TEST RESULTS

Please refer to the APPENDIX F.

## 7. POWER SPECTRAL DENSITY TEST

### 7.1 LIMIT

FCC Part15, Subpart E (15.407)			
Section	Test Item	Limit	Frequency Range (MHz)
15.407(a)	Power Spectral Density	AP device: 17 dBm/MHz Client device: 11 dBm/MHz	5150-5250
		30 dBm/500 kHz	5725-5850

### 7.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	= 1 MHz.
VBW	≥ 3 MHz.
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

Note:

- For UNII-3, according to KDB publication 789033 D02 General UNII Test Procedures New Rules v02r01, section II.F.5., it is acceptable to set RBW at 1 MHz and VBW at 3 MHz if the spectrum analyzer does not have 500 kHz RBW.
- The value measured with RBW=1 MHz is to be added with  $10\log(500 \text{ kHz}/1 \text{ MHz})$  which is -3 dB. For example, if the measured value is +10dBm using RBW=1 MHz (that is +10 dBm/MHz), then the converted value will be +7dBm/500kHz.

### 7.3 DEVIATION FROM STANDARD

No deviation.

### 7.4 TEST SETUP



### 7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

### 7.6 TEST RESULTS

Please refer to the APPENDIX G.

## 8. FREQUENCY STABILITY MEASUREMENT

### 8.1 LIMIT

FCC Part15, Subpart E (15.407)			
Section	Test Item	Limit	Frequency Range (MHz)
15.407(g)	Frequency Stability	Specified in the user's manual	5150-5250
			5725-5850

### 8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting:


Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

- The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.
- User manual temperature is 0°C~40°C.

### 8.3 DEVIATION FROM STANDARD

No deviation.

### 8.4 TEST SETUP

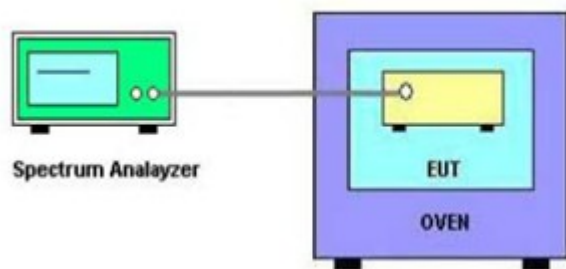

### 8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

### 8.6 TEST RESULTS

Please refer to the APPENDIX H.

## 9. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESCI	100382	Feb. 28, 2021
2	LISN	EMCO	3816/2	52765	Mar. 01, 2021
3	TWO-LINE V-NETWORK	R&S	ENV216	101447	May 19, 2020
4	50Ω Terminator	SHX	TF5-3	15041305	Mar. 01, 2021
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	Cable	N/A	RG223	12m	Mar. 10, 2021

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESCI	100895	Feb. 28, 2021
2*	Antenna	EM	EM-6876-1	230	Jan. 15, 2022
3	Cable	N/A	RG 213/U(9kHz~1GHz)	N/A	May 31, 2020
4	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarzbeck	VULB9160	9160-3232	Apr. 09, 2020
2*	Amplifier	HP	8447D	2944A08742	Mar. 01, 2021
3	Receiver	Agilent	N9038A	MY52130039	Aug. 03, 2020
4	Cable	emci	LMR-400(30MHz-1 GHz)(8m+5m)	N/A	May 25, 2020
5	Controller	CT	SC100	N/A	N/A
6	Controller	MF	MF-7802	MF780208416	N/A
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emissions - Above 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Double Ridged Guide Antenna	ETS	3115	75789	Apr. 09, 2020
2	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Jun. 23, 2020
3	Amplifier	Agilent	8449B	3008A02584	Aug. 03, 2020
4	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 07, 2021
5	Receiver	Agilent	N9038A	MY52130039	Aug. 03, 2020
6	Controller	CT	SC100	N/A	N/A
7	Controller	MF	MF-7802	MF780208416	N/A
8	Cable	mitron	RWLP50-4.0A-KJ-S MSM-12M	N/A	Nov. 25, 2020
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Bandwidth					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 03, 2020

Power Spectral Density					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EXA Spectrum Analyzer	Agilent	N9010A	MY50520044	Mar. 01, 2021

Maximum Output Power					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Peak Power Analyzer	Keysight	8990B	MY51000506	Aug. 03, 2020
2	Wideband power sensor	Keysight	N1923A	MY58310004	Aug. 03, 2020

Frequency Stability					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 03, 2020
2	Precision Oven Tester	CEPREI	CEEC-M64T-40	15-008	Feb. 28, 2021

Remark: "N/A" denotes no model name, serial no. or calibration specified.

"\*\*" calibration period of equipment list is three year.



Except \* item, all calibration period of equipment list is one year.

## 10. EUT TEST PHOTOS



### AC Power Line Conducted Emissions Test Photos



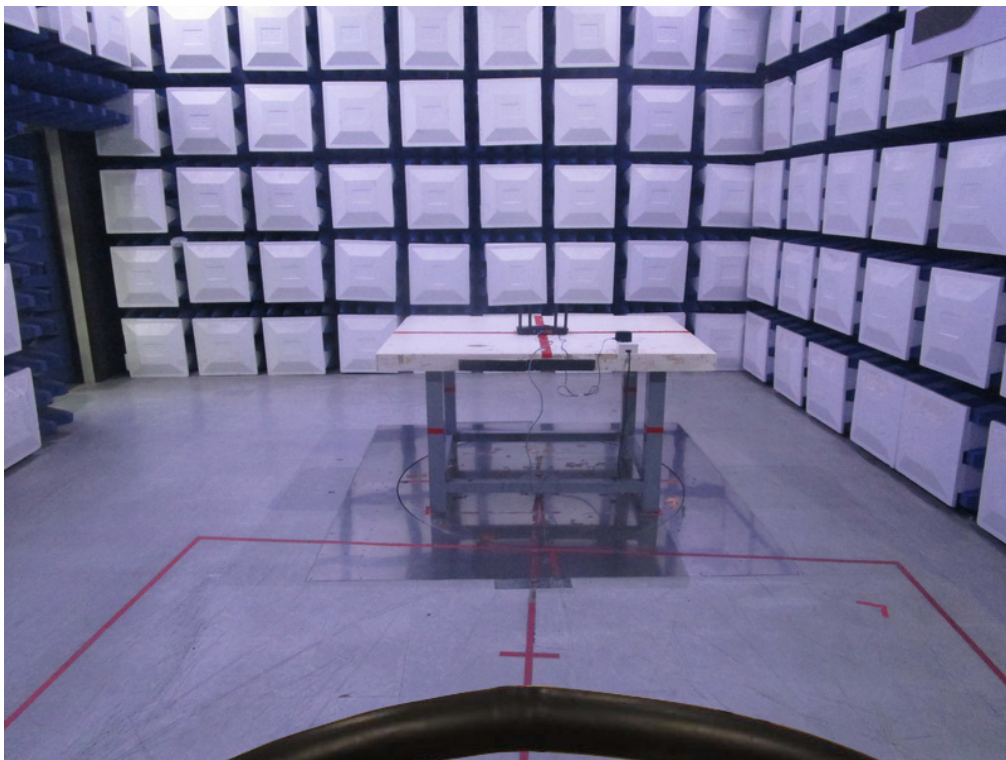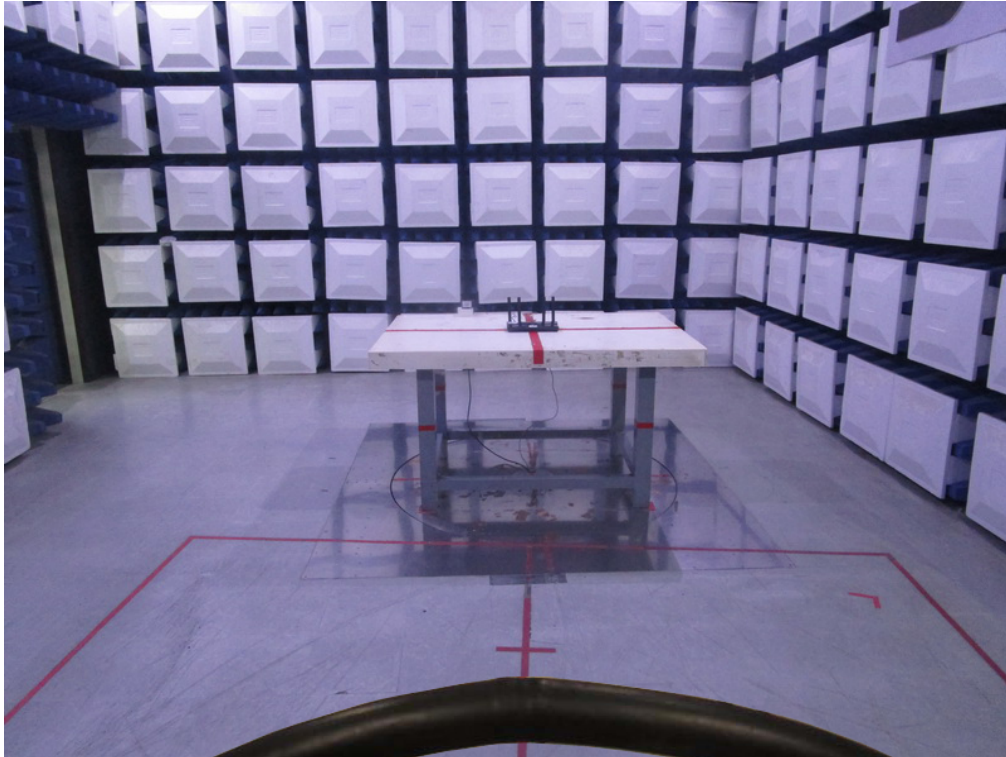


**Radiated Emissions Test Photos****9 kHz to 30 MHz**

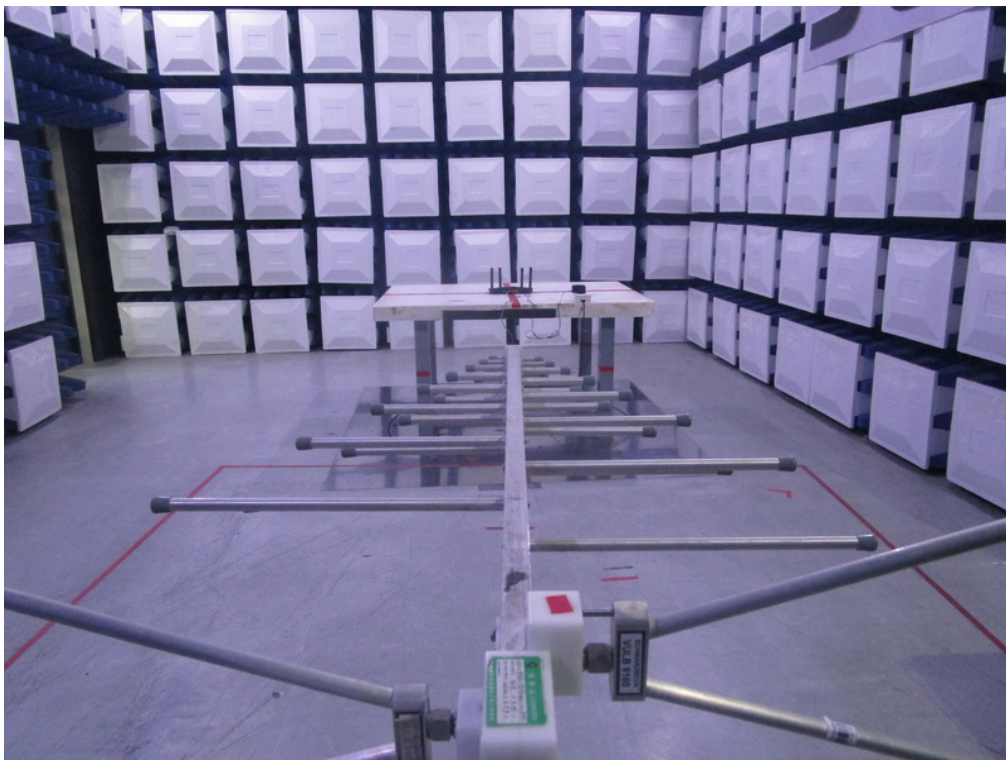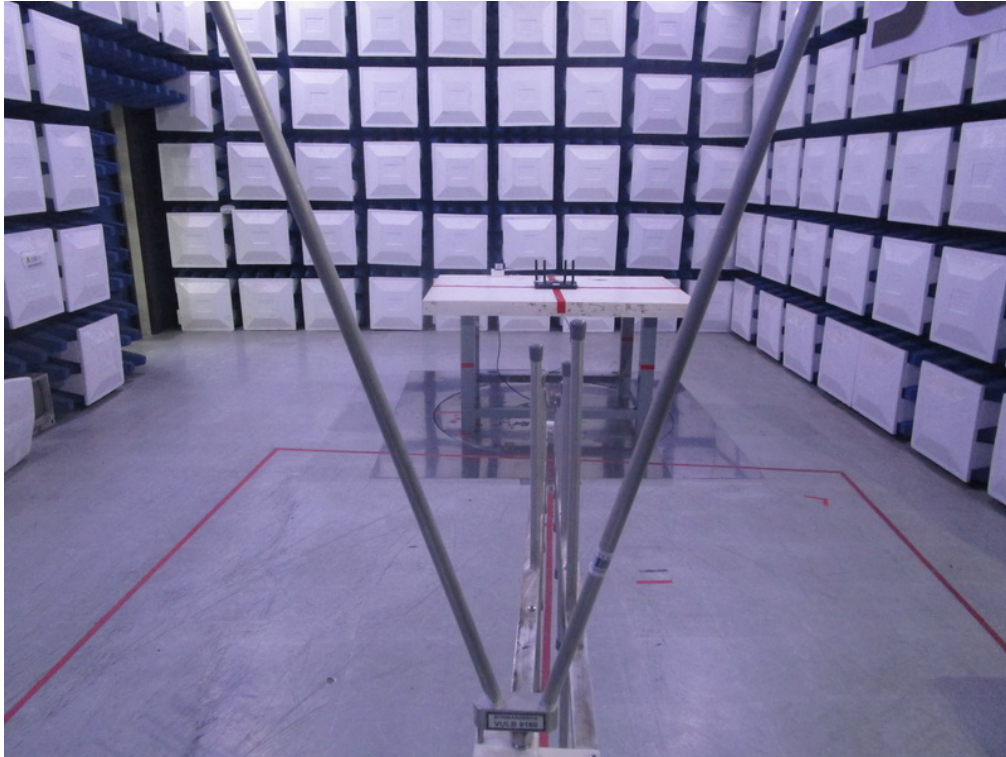

**Radiated Emissions Test Photos****30 MHz to 1 GHz**

## Radiated Emissions Test Photos


Above 1 GHz

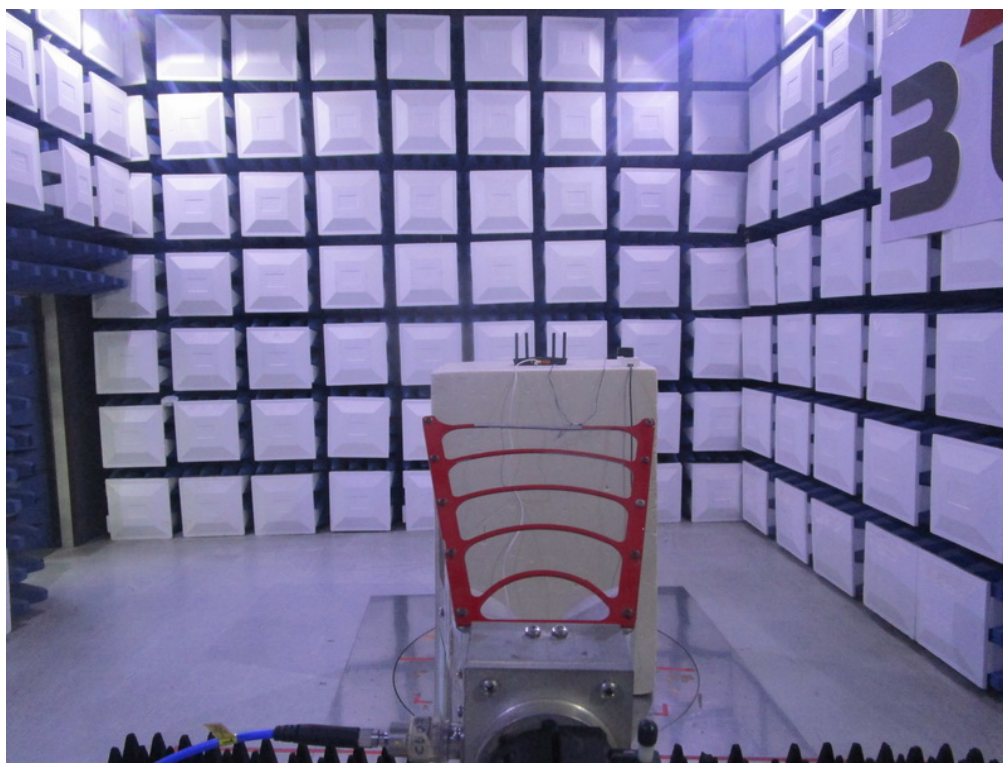

## **APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS**

Test Mode: TX AX20 Mode Channel 149

## Line

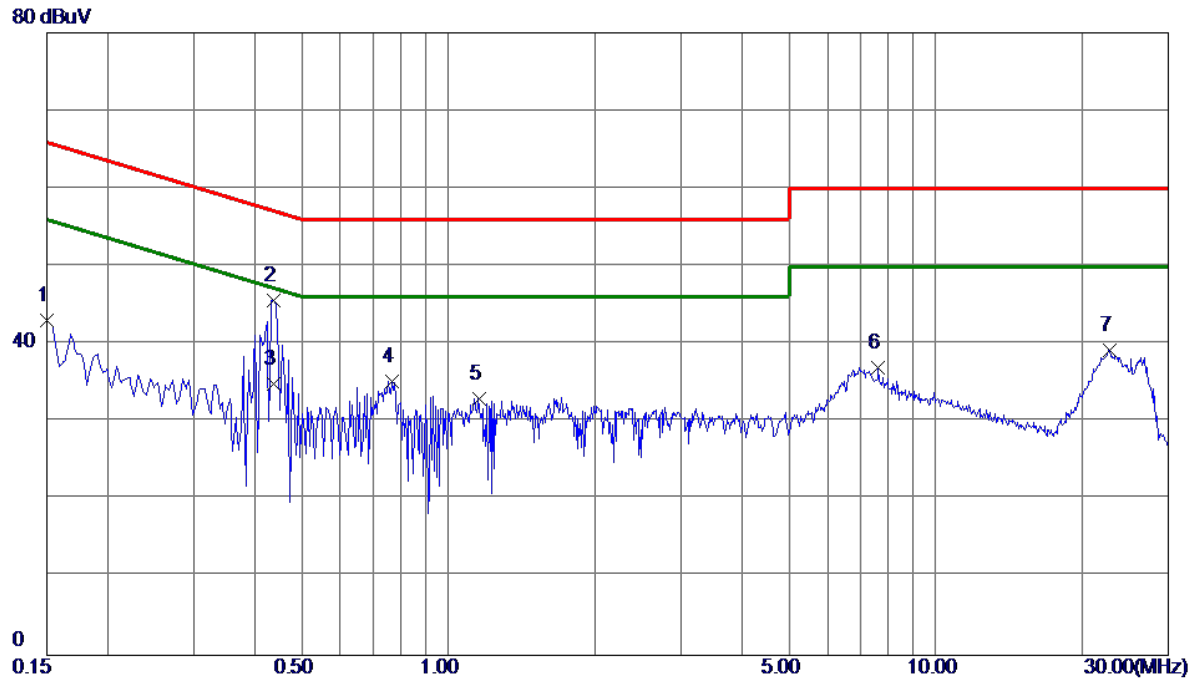


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1500	33.16	9.82	42.98	66.00	-23.02	Peak	
2 *	0.4380	35.77	9.87	45.64	57.10	-11.46	Peak	
3	0.4380	24.95	9.87	34.82	47.10	-12.28	AVG	
4	0.7665	25.27	9.91	35.18	56.00	-20.82	Peak	
5	1.1535	23.09	9.93	33.02	56.00	-22.98	Peak	
6	7.6245	26.59	10.36	36.95	60.00	-23.05	Peak	
7	22.7400	28.03	11.16	39.19	60.00	-20.81	Peak	

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) The test result has included the cable loss.

Test Mode: TX AX20 Mode Channel 149

## Neutral

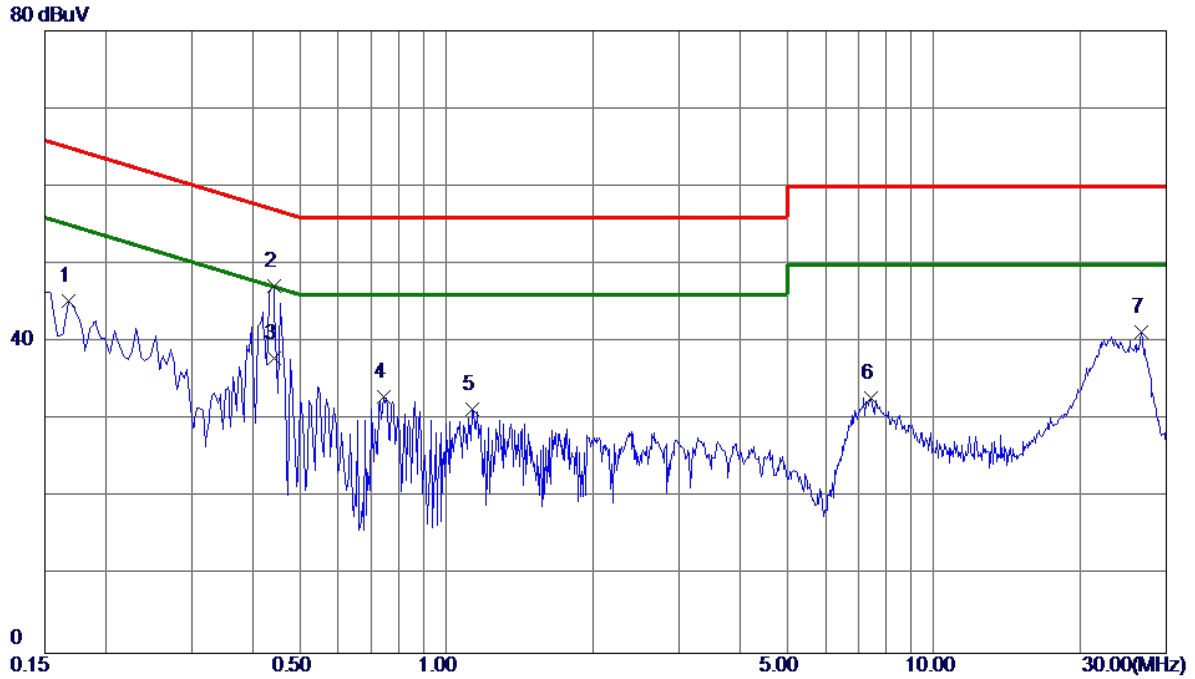

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1680	35.41	9.91	45.32	65.06	-19.74	Peak	
2	0.4425	37.15	10.02	47.17	57.01	-9.84	Peak	
3 *	0.4425	27.97	10.02	37.99	47.01	-9.02	AVG	
4	0.7440	22.94	10.08	33.02	56.00	-22.98	Peak	
5	1.1310	21.19	10.13	31.32	56.00	-24.68	Peak	
6	7.4130	22.20	10.61	32.81	60.00	-27.19	Peak	
7	26.6235	29.78	11.49	41.27	60.00	-18.73	Peak	


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) The test result has included the cable loss.

## **APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ**



Test Mode: TX AX20 Mode Channel 149

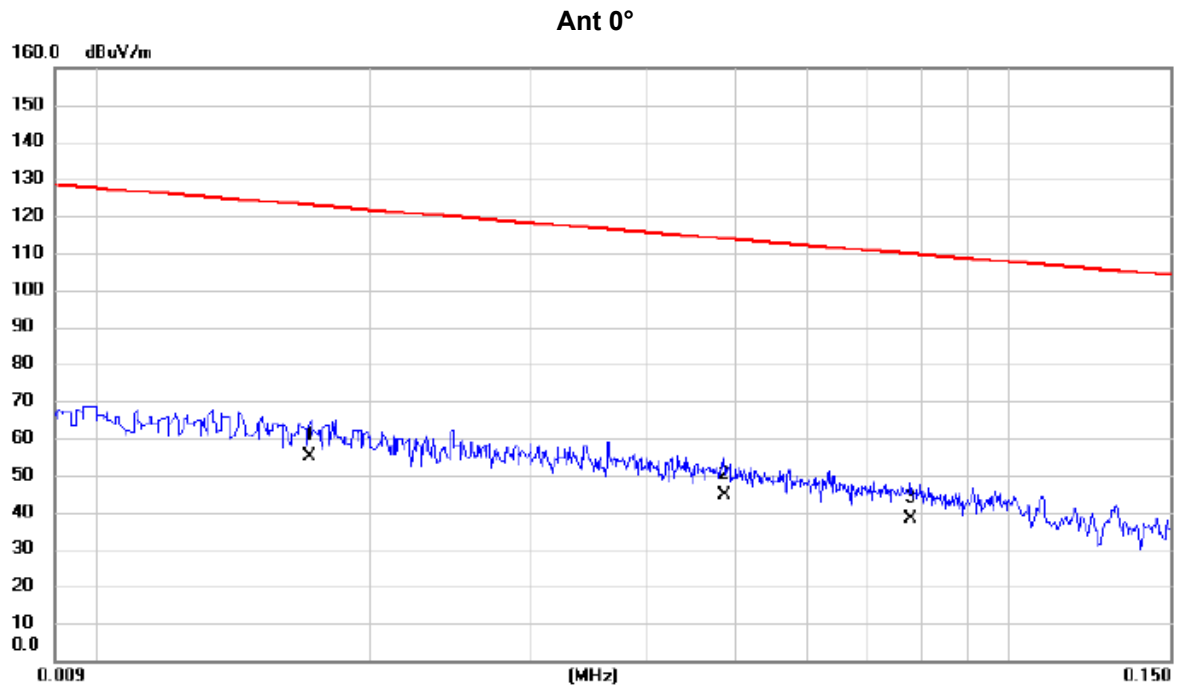


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.0171	34.58	20.43	55.01	122.94	-67.93	AVG	
2		0.0487	25.20	19.55	44.75	113.85	-69.10	AVG	
3		0.0780	19.10	18.97	38.07	109.76	-71.69	AVG	

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX20 Mode Channel 149

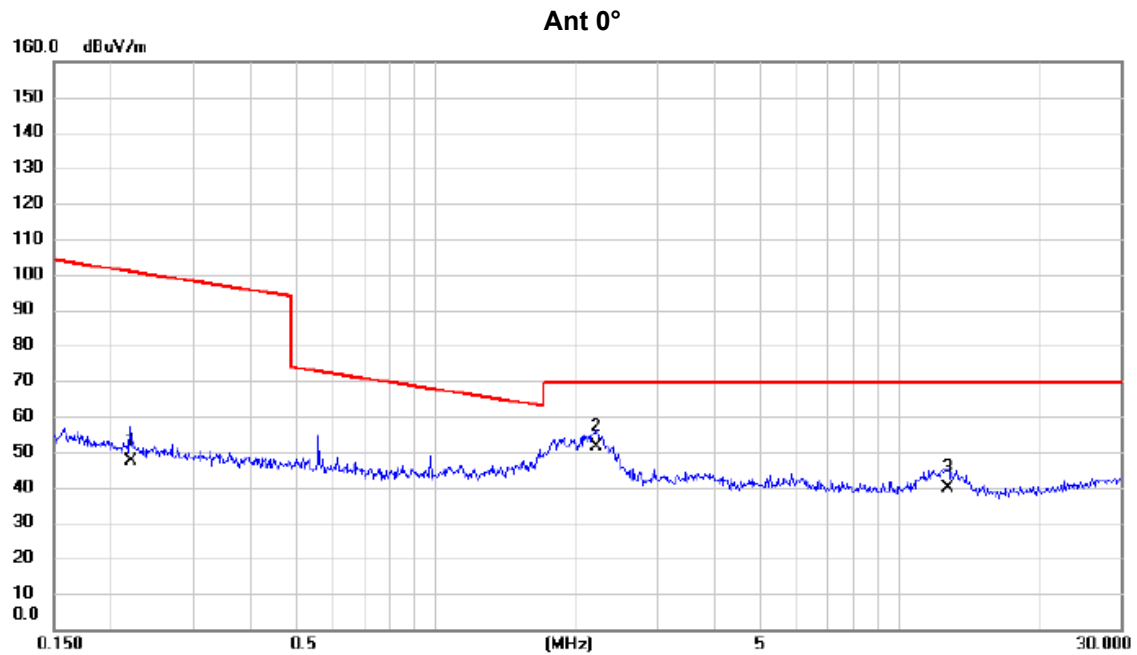

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		0.2197	30.10	17.12	47.22	100.77	-53.55	AVG	
2	*	2.2132	34.30	16.99	51.29	69.54	-18.25	QP	
3		12.7161	25.40	14.57	39.97	69.54	-29.57	QP	


## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode: TX AX20 Mode Channel 149

Ant 90°

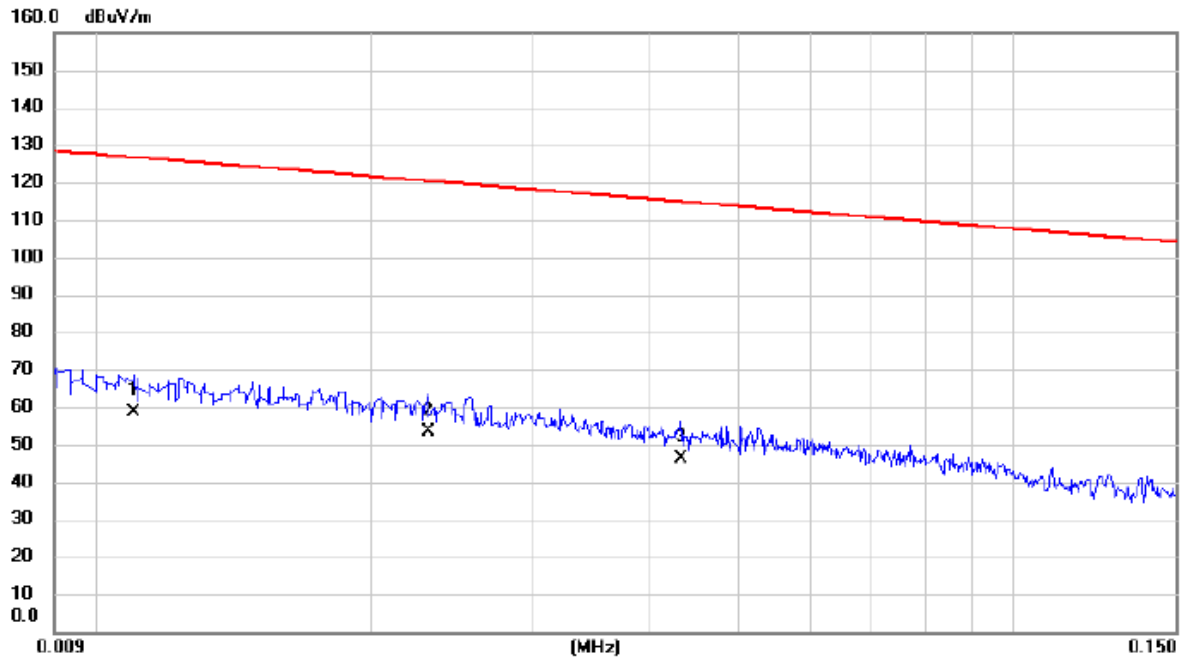


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.0110	37.40	21.28	58.68	126.78	-68.10	AVG	
2	*	0.0230	33.50	19.97	53.47	120.37	-66.90	AVG	
3		0.0434	26.40	19.64	46.04	114.86	-68.82	AVG	

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX20 Mode Channel 149

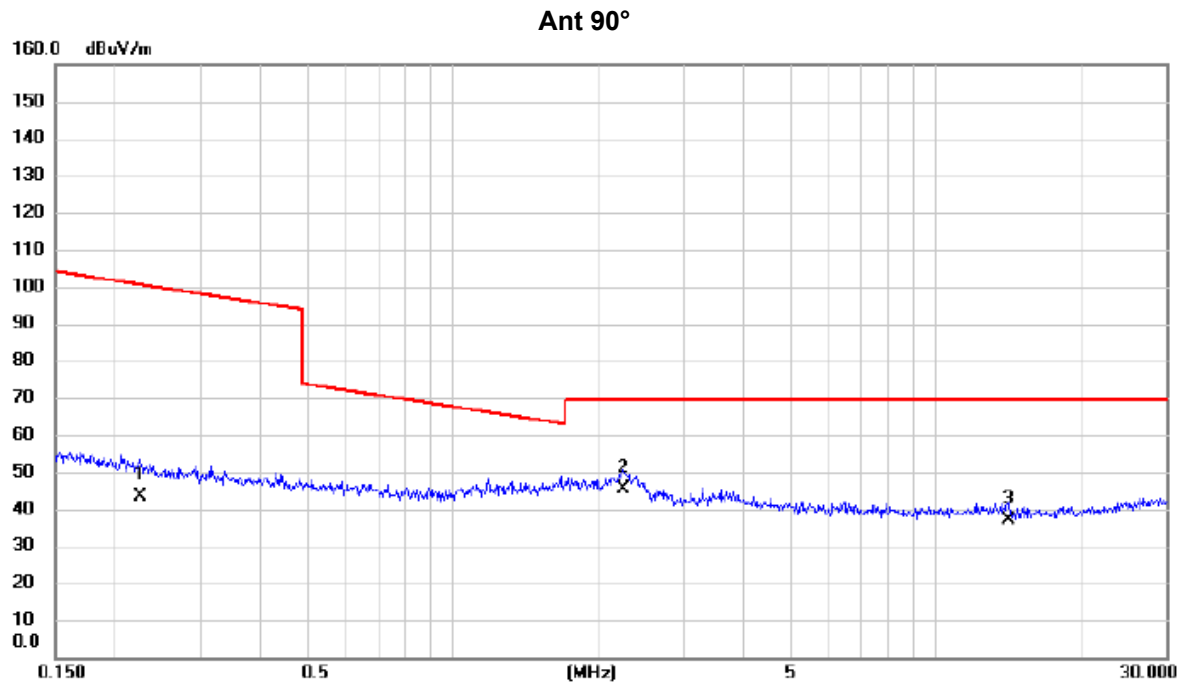

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		0.2256	26.40	17.11	43.51	100.54	-57.03	AVG	
2	*	2.2486	28.50	16.97	45.47	69.54	-24.07	QP	
3		14.1376	22.20	14.70	36.90	69.54	-32.64	QP	

## REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

## **APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1 GHZ**

Test Mode: TX AX20 Mode Channel 149

## Vertical

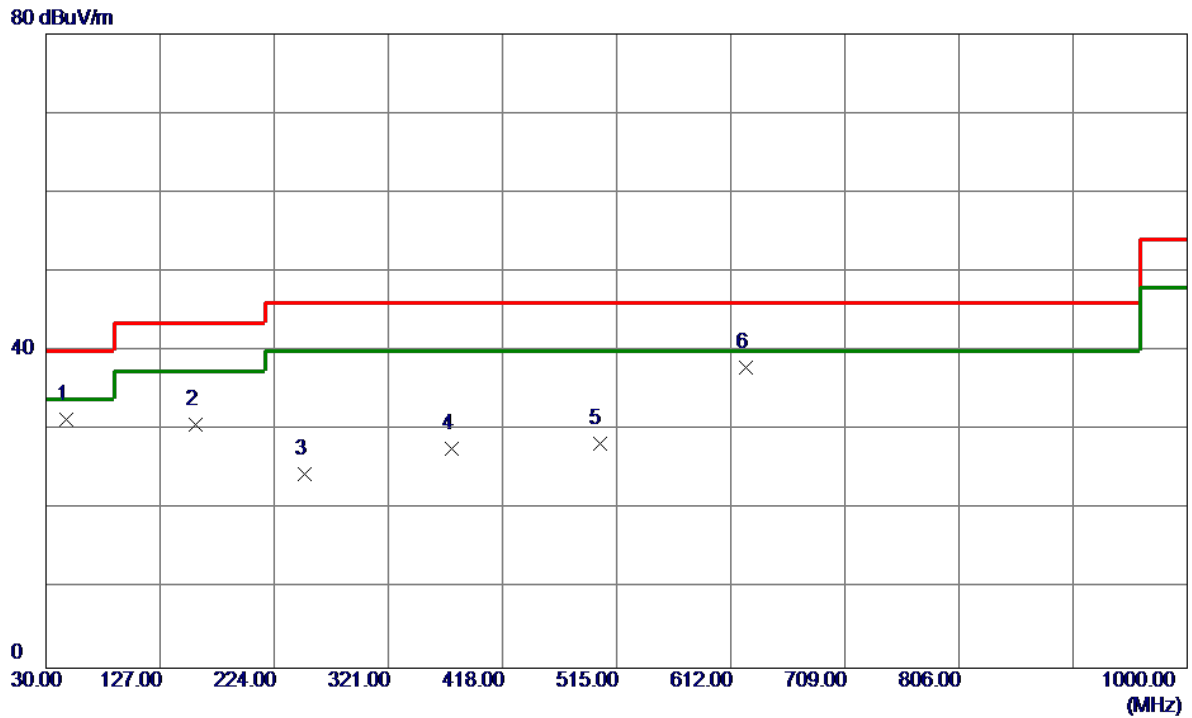

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	47.4600	45.85	-14.56	31.29	40.00	-8.71	Peak	
2	157.0700	42.80	-12.04	30.76	43.50	-12.74	Peak	
3	250.1900	39.01	-14.55	24.46	46.00	-21.54	Peak	
4	375.3200	38.75	-11.07	27.68	46.00	-18.32	Peak	
5	500.4500	37.10	-8.82	28.28	46.00	-17.72	Peak	
6 *	624.6100	44.35	-6.47	37.88	46.00	-8.12	Peak	


### REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX20 Mode Channel 149

## Horizontal

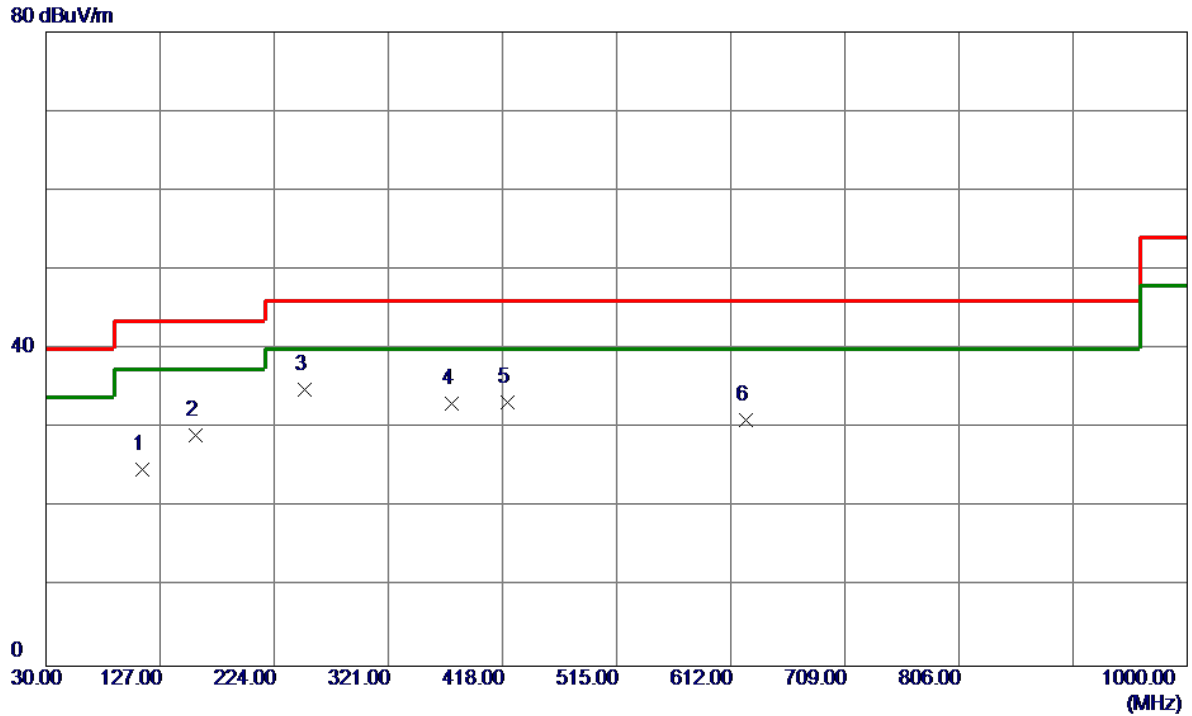

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	111.4800	39.62	-14.86	24.76	43.50	-18.74	Peak	
2	157.0700	41.17	-12.04	29.13	43.50	-14.37	Peak	
3 *	250.1900	49.39	-14.55	34.84	46.00	-11.16	Peak	
4	375.3200	44.19	-11.07	33.12	46.00	-12.88	Peak	
5	421.8800	43.22	-9.91	33.31	46.00	-12.69	Peak	
6	624.6100	37.57	-6.47	31.10	46.00	-14.90	Peak	

### REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

## **APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ**

## Non Beamforming

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5180 MHz

## Vertical

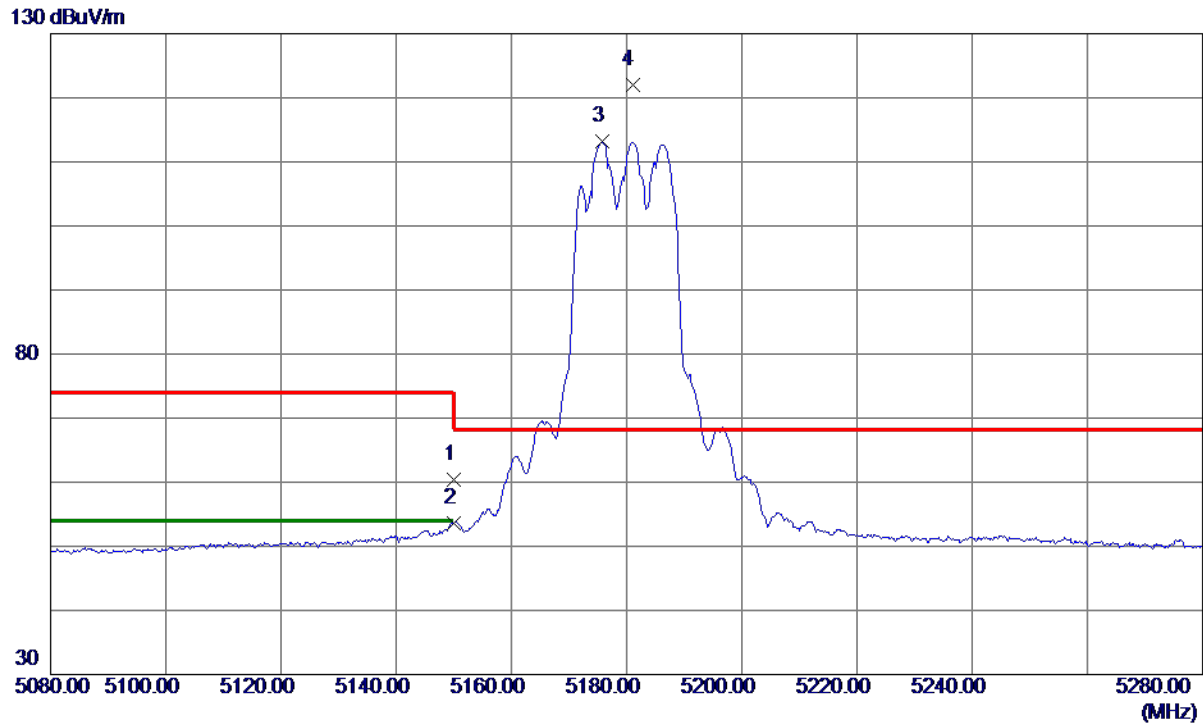

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	41.87	18.57	60.44	74.00	-13.56	Peak	
2	5150.0000	35.00	18.57	53.57	54.00	-0.43	AVG	
3	5175.7000	94.64	18.59	113.23	999.00	-885.77	AVG	No Limit
4 *	5181.0000	103.48	18.60	122.08	68.30	53.78	Peak	No Limit


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5180 MHz

## Vertical

80 dBuV/m

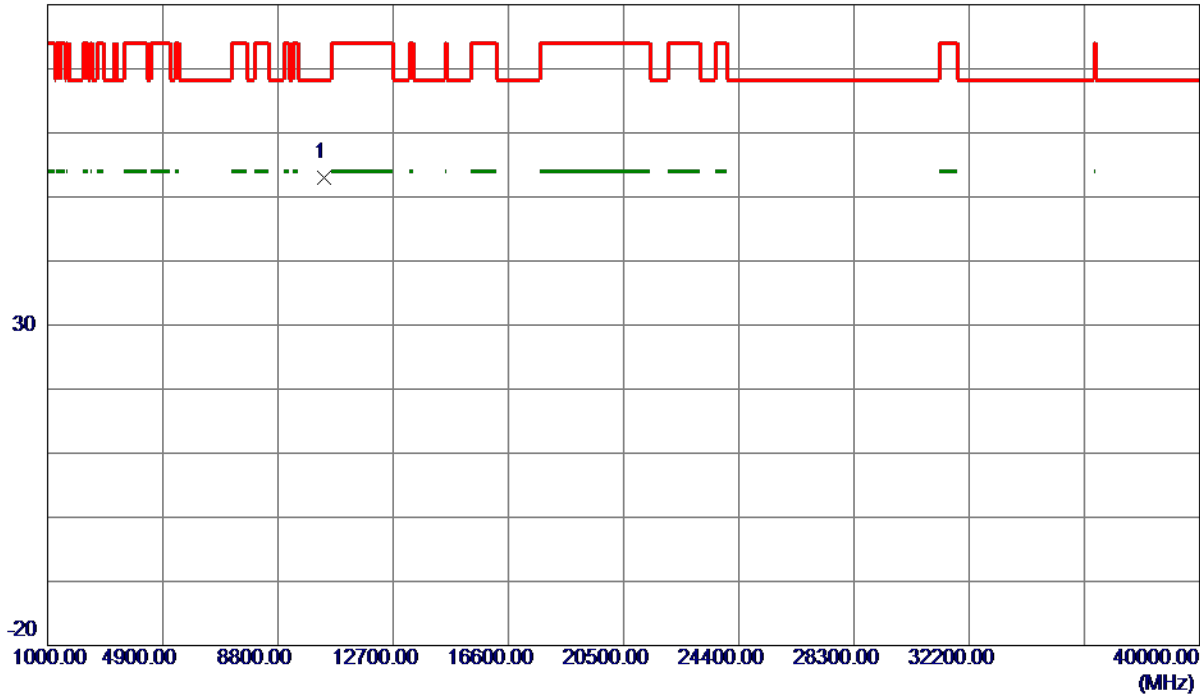

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10359.1000	39.21	13.80	53.01	68.30	-15.29	Peak	

### REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5180 MHz

## Horizontal

130 dBuV/m

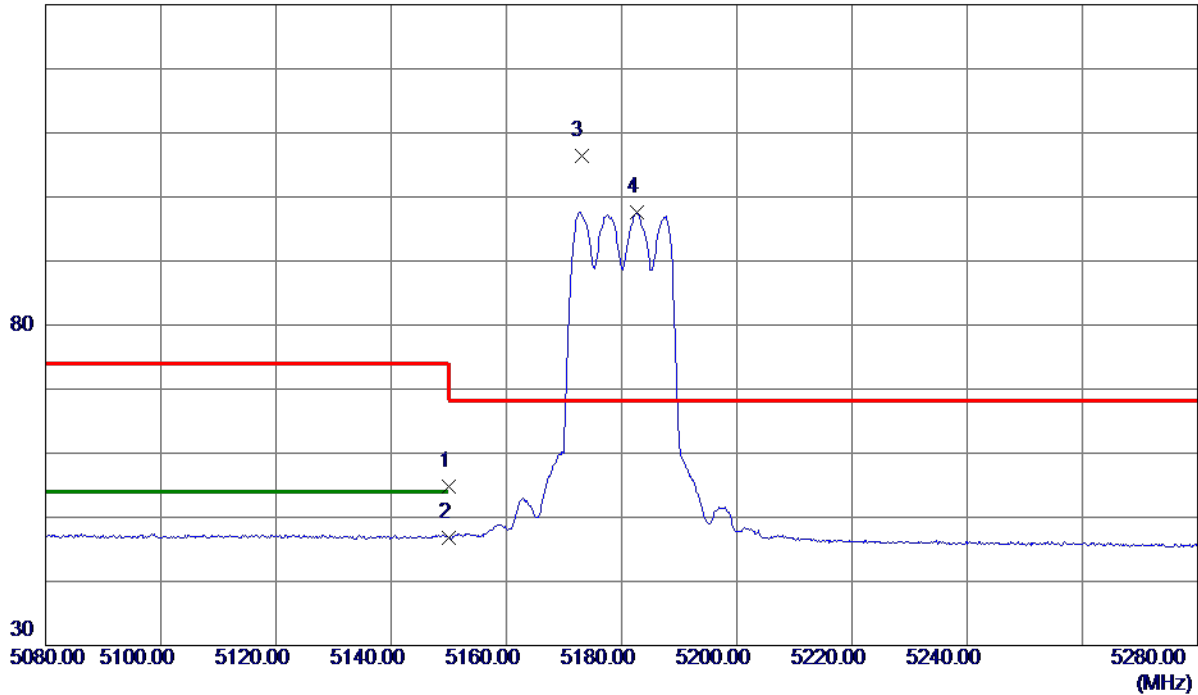

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	36.14	18.57	54.71	74.00	-19.29	Peak	
2	5150.0000	28.18	18.57	46.75	54.00	-7.25	AVG	
3 *	5173.0000	87.86	18.59	106.45	68.30	38.15	Peak	No Limit
4	5182.6000	79.00	18.60	97.60	999.00	-901.40	AVG	No Limit


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5180 MHz

## Horizontal

80 dBuV/m

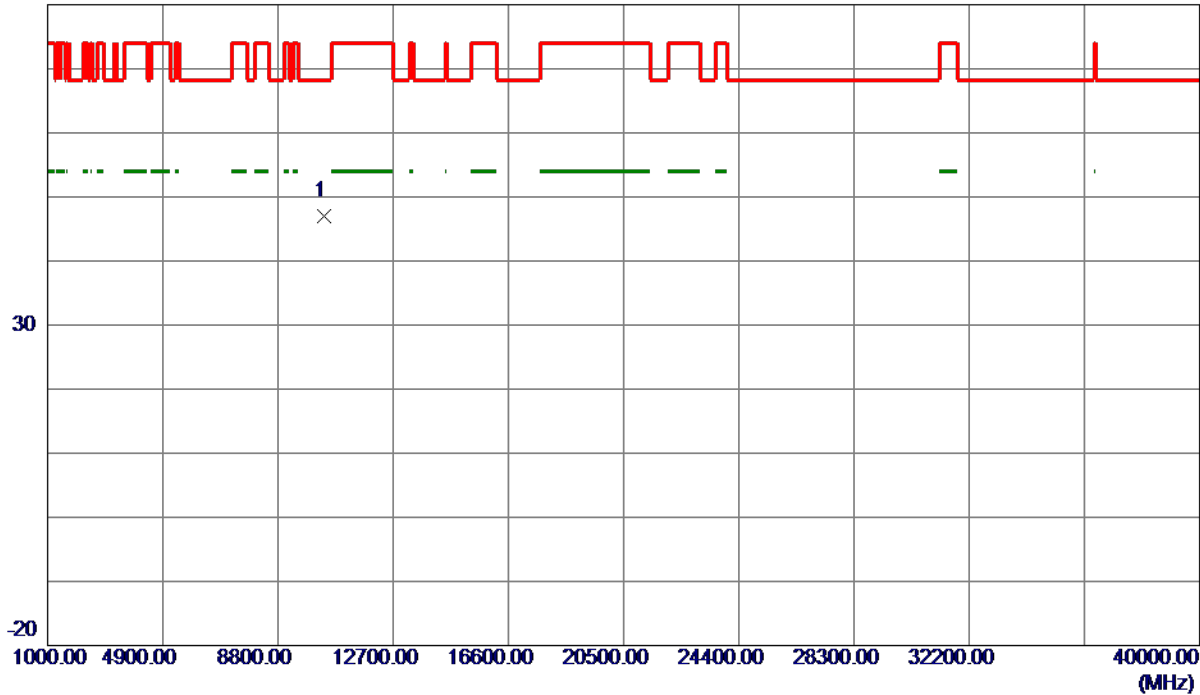

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10356.5400	33.18	13.79	46.97	68.30	-21.33	Peak	


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5200 MHz

## Vertical

130 dBuV/m

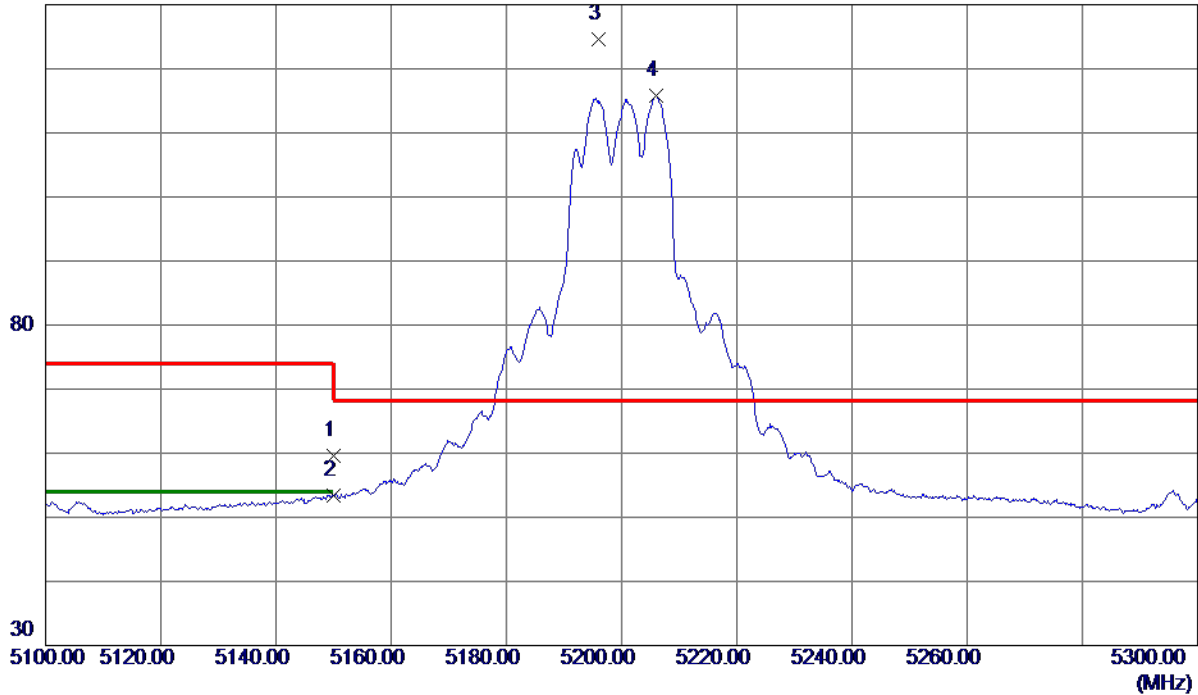

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	40.99	18.57	59.56	74.00	-14.44	Peak	
2	5150.0000	34.74	18.57	53.31	54.00	-0.69	AVG	
3 *	5196.0000	105.90	18.61	124.51	68.30	56.21	Peak	No Limit
4	5206.0000	97.14	18.62	115.76	999.00	-883.24	AVG	No Limit


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5200 MHz

## Vertical

80 dBuV/m

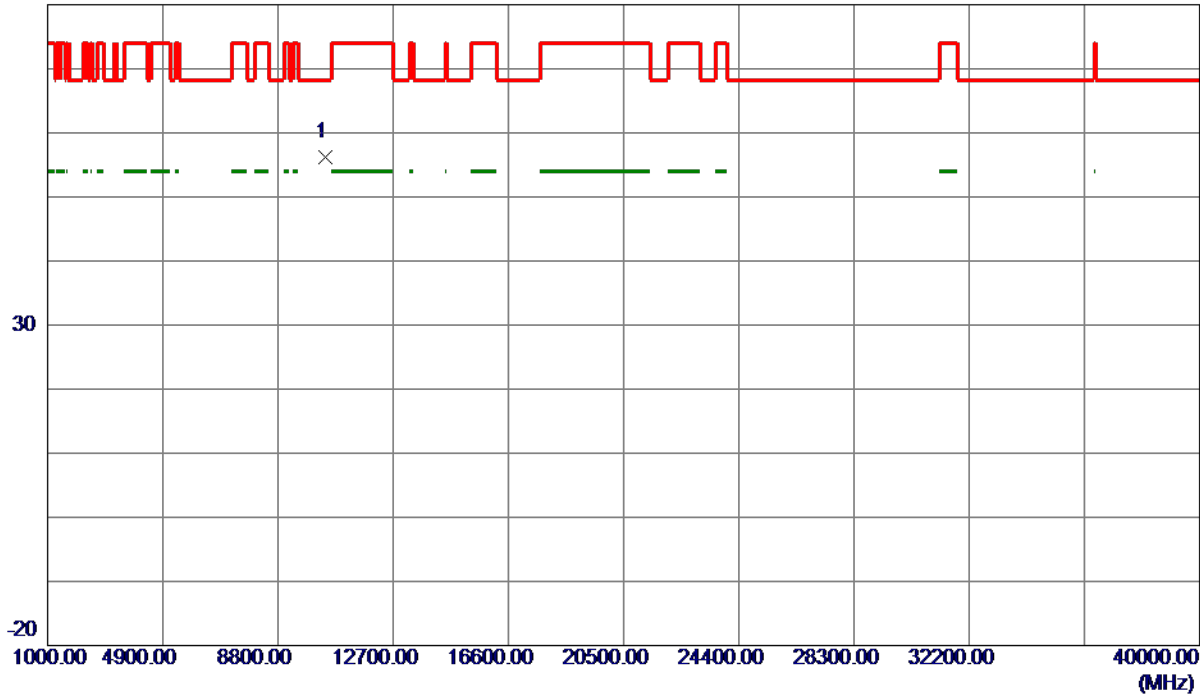

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10398.7250	42.22	13.89	56.11	68.30	-12.19	Peak	


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5200 MHz

## Horizontal

130 dBuV/m

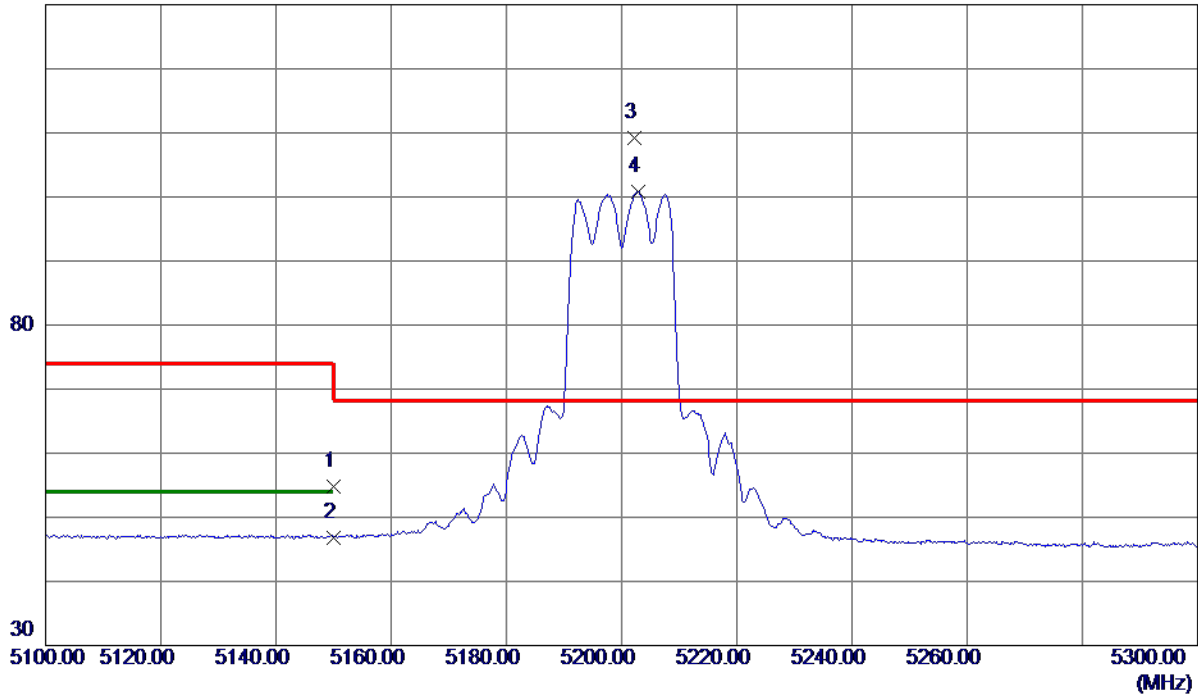

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	36.27	18.57	54.84	74.00	-19.16	Peak	
2	5150.0000	28.30	18.57	46.87	54.00	-7.13	AVG	
3 *	5202.3000	90.53	18.62	109.15	68.30	40.85	Peak	No Limit
4	5202.8000	82.26	18.62	100.88	999.00	-898.12	AVG	No Limit


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5200 MHz

## Horizontal

80 dBuV/m

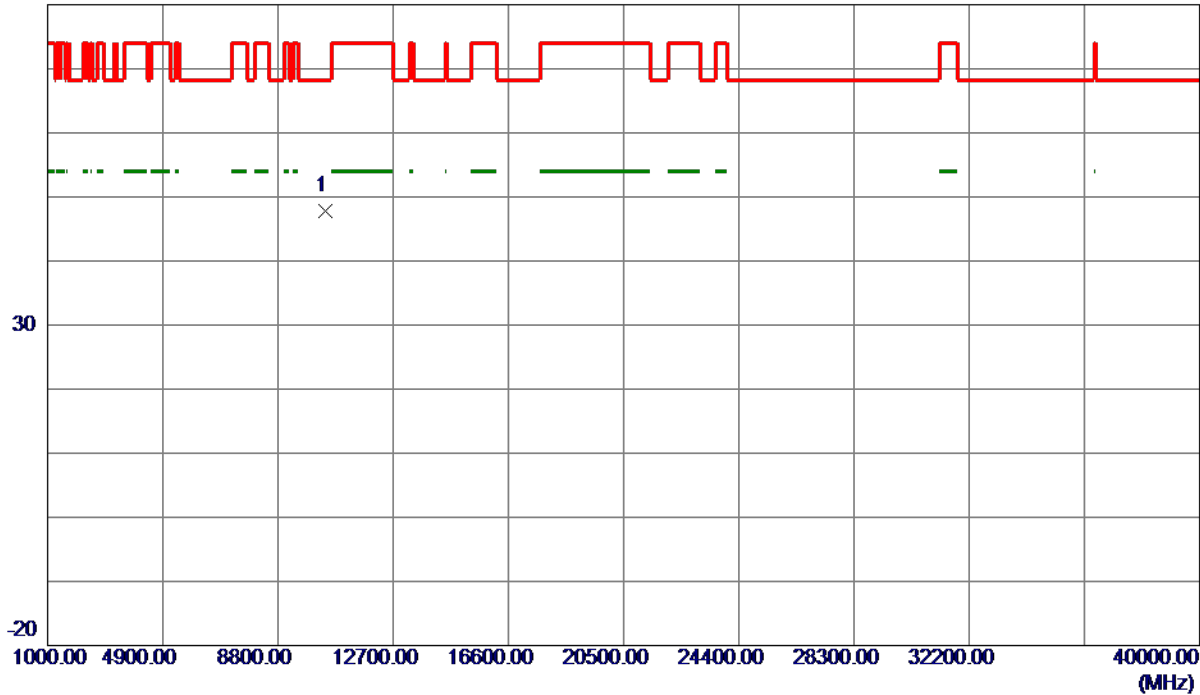

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10398.0300	33.82	13.89	47.71	68.30	-20.59	Peak	


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5240 MHz

## Vertical

130 dBuV/m

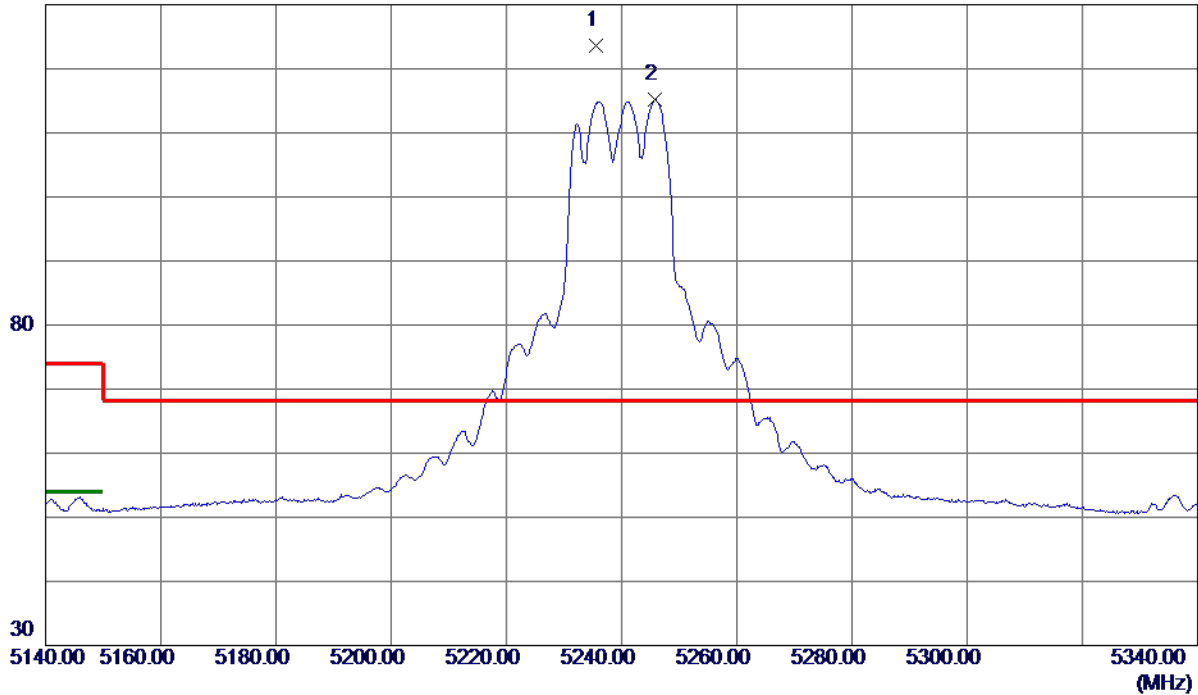

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5235.6000	104.99	18.66	123.65	68.30	55.35	Peak	No Limit
2	5245.7000	96.62	18.67	115.29	999.00	-883.71	AVG	No Limit


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5240 MHz

## Vertical

80 dBuV/m

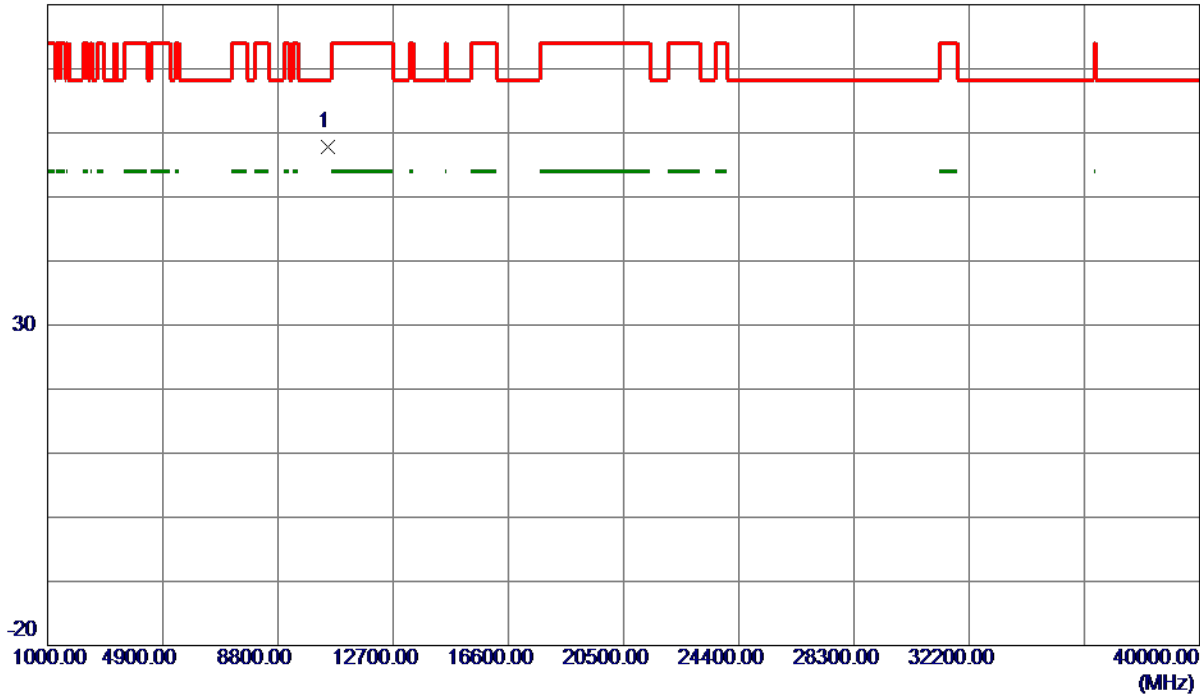

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10484.3500	43.74	14.08	57.82	68.30	-10.48	Peak	

### REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5240 MHz

## Horizontal

130 dBuV/m

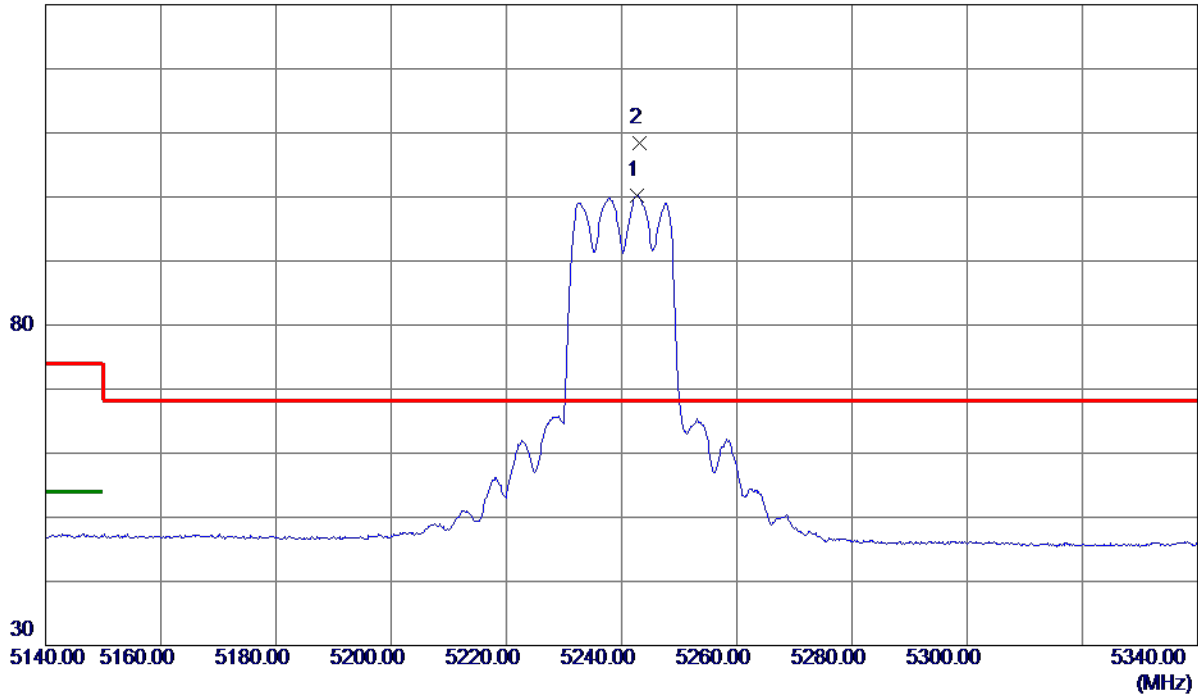

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5242.6000	81.49	18.66	100.15	999.00	-898.85	AVG	No Limit
2 *	5243.2000	89.69	18.66	108.35	68.30	40.05	Peak	No Limit


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5240 MHz

## Horizontal

80 dBuV/m

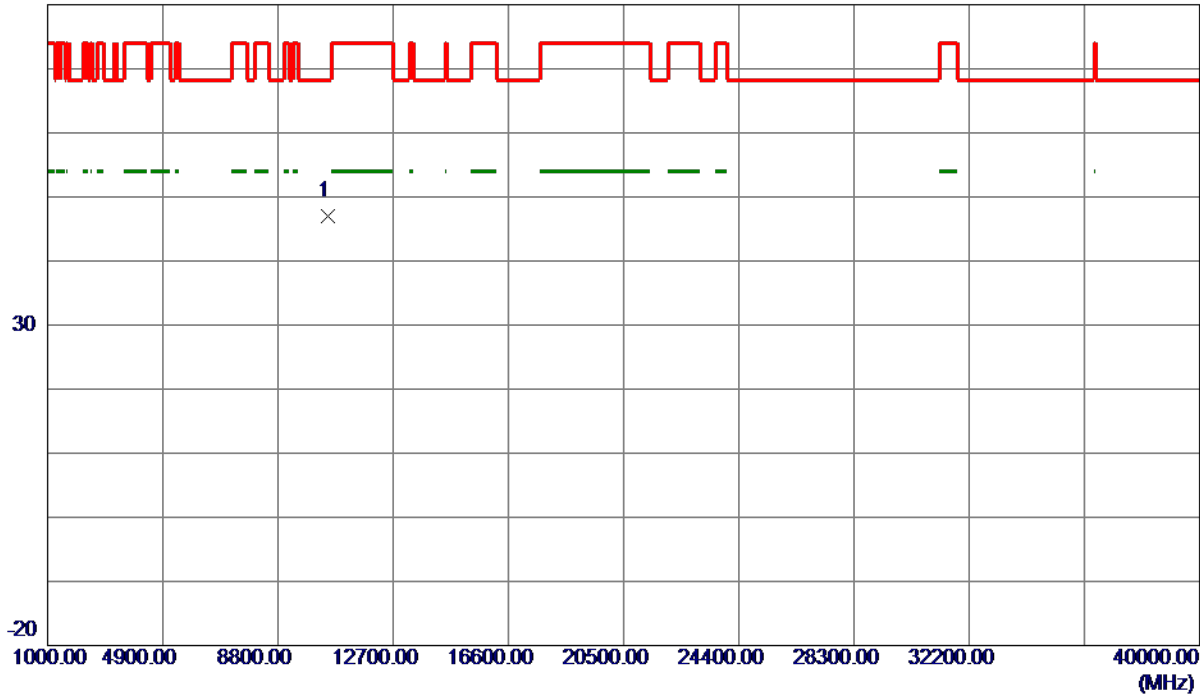


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10479.3150	32.97	14.06	47.03	68.30	-21.27	Peak	

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5745 MHz

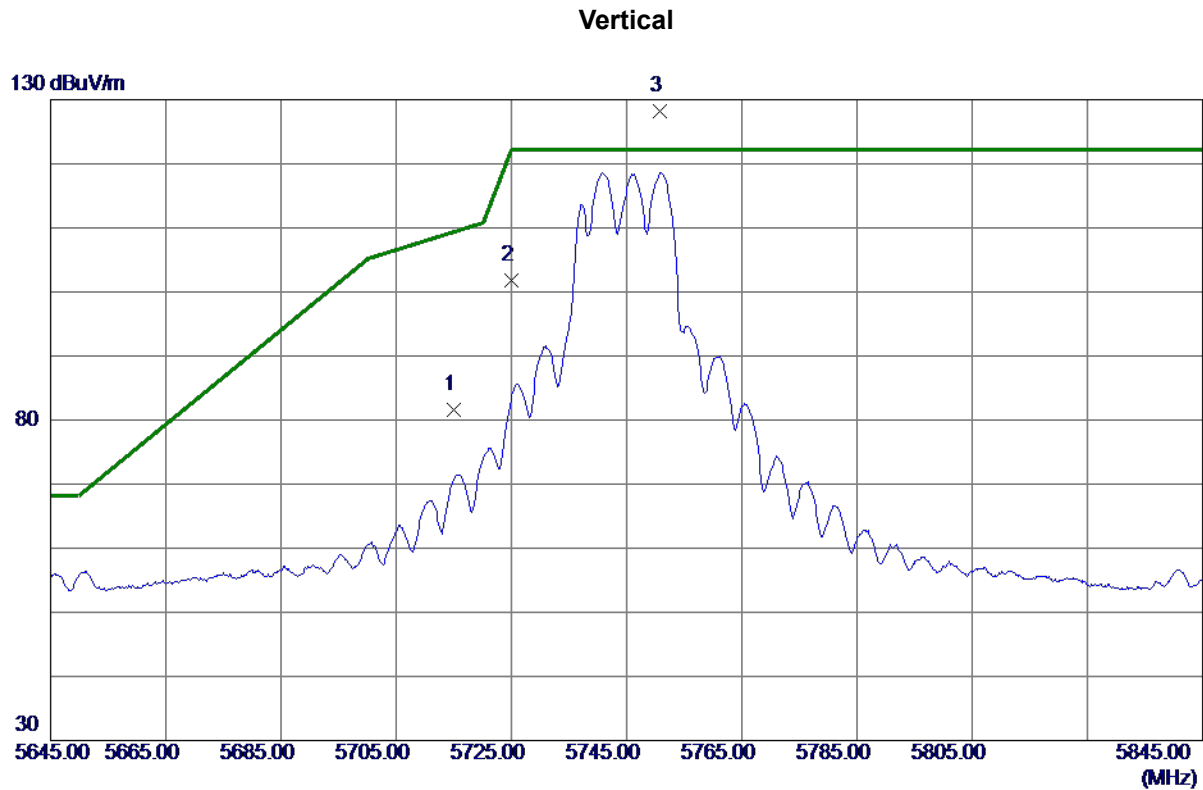

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	62.24	19.42	81.66	109.40	-27.74	Peak	
2	5725.0000	82.29	19.45	101.74	122.20	-20.46	Peak	
3 *	5750.8000	108.75	19.51	128.26	122.20	6.06	Peak	No Limit


## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5745 MHz

## Vertical

80 dBuV/m

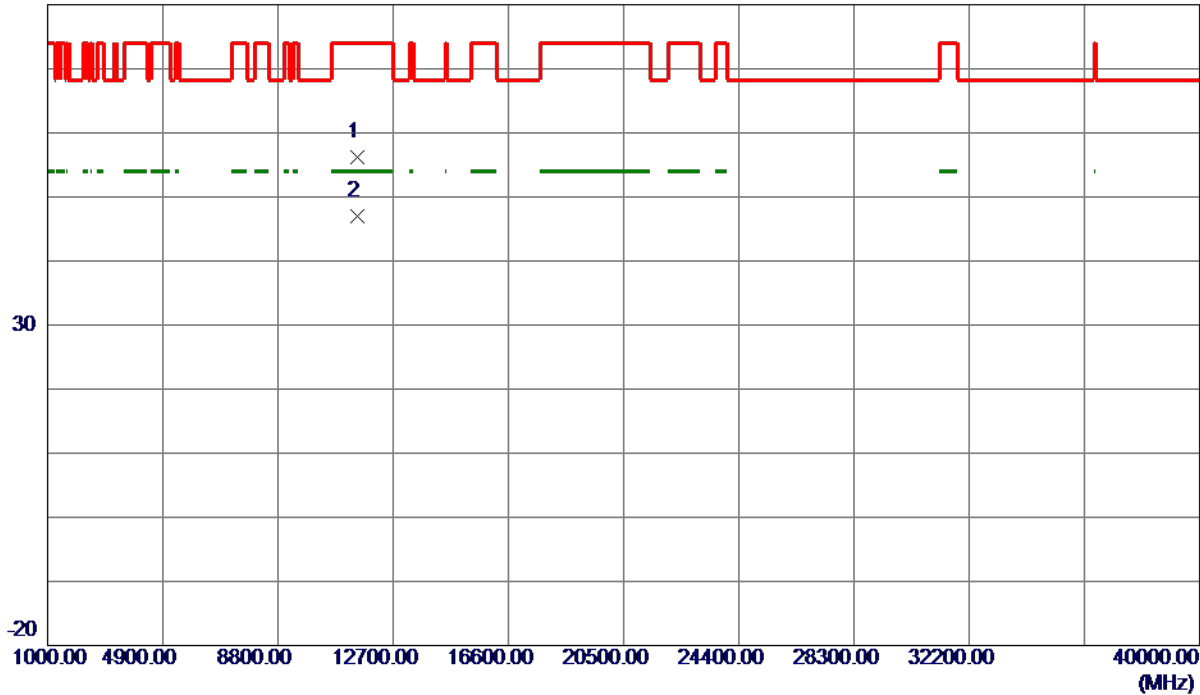

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11490.1000	39.18	16.95	56.13	74.00	-17.87	Peak	
2 *	11492.1750	29.95	16.96	46.91	54.00	-7.09	AVG	


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5745 MHz

## Horizontal

130 dBuV/m

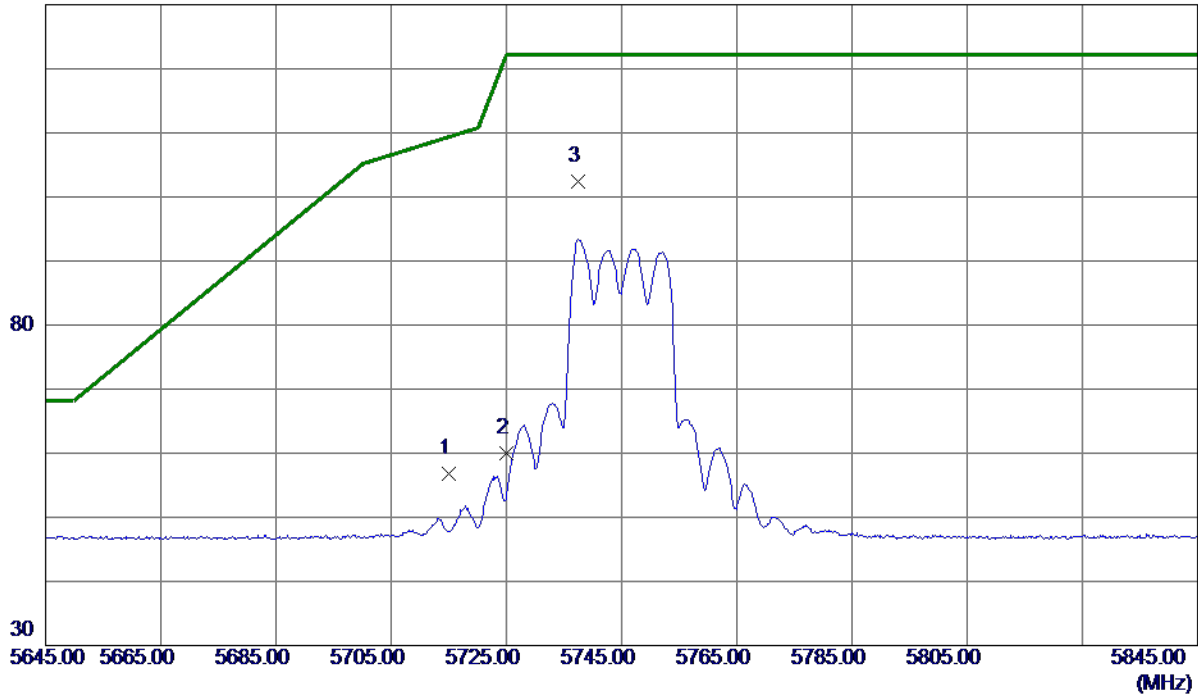

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	37.46	19.42	56.88	109.40	-52.52	Peak	
2	5725.0000	40.53	19.45	59.98	122.20	-62.22	Peak	
3 *	5737.5000	82.97	19.48	102.45	122.20	-19.75	Peak	No Limit


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5745 MHz

## Horizontal

80 dBuV/m

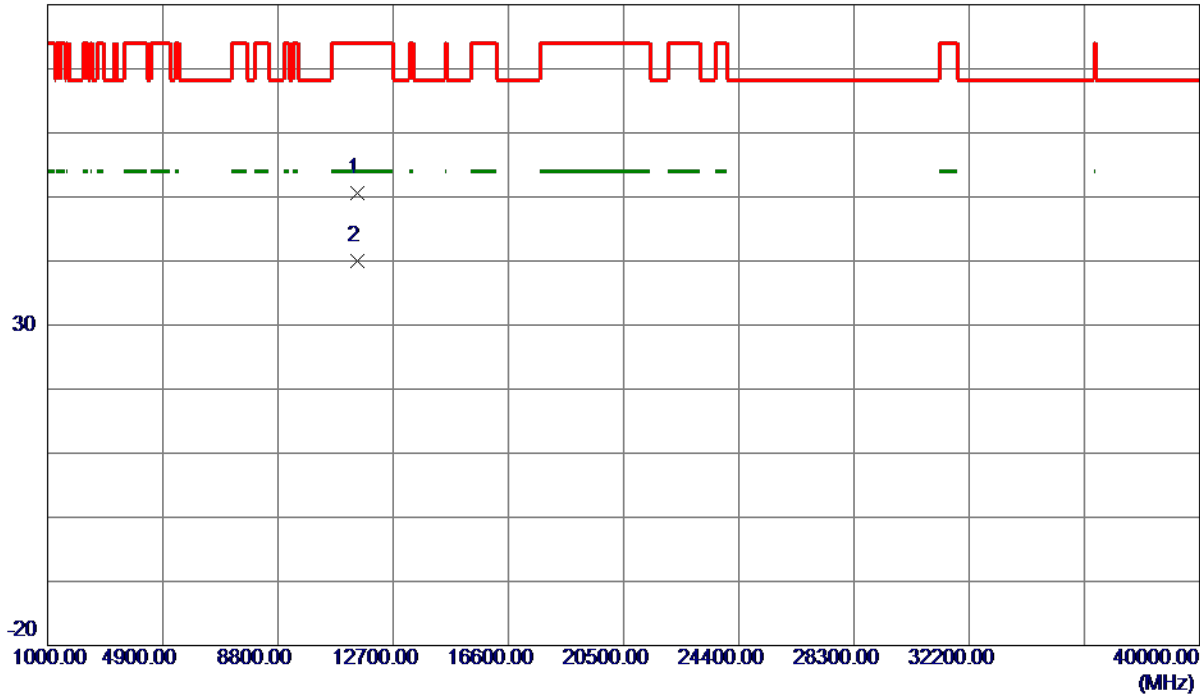


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11490.2750	33.61	16.95	50.56	74.00	-23.44	Peak	
2 *	11490.5500	23.01	16.95	39.96	54.00	-14.04	AVG	

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5785 MHz

## Vertical

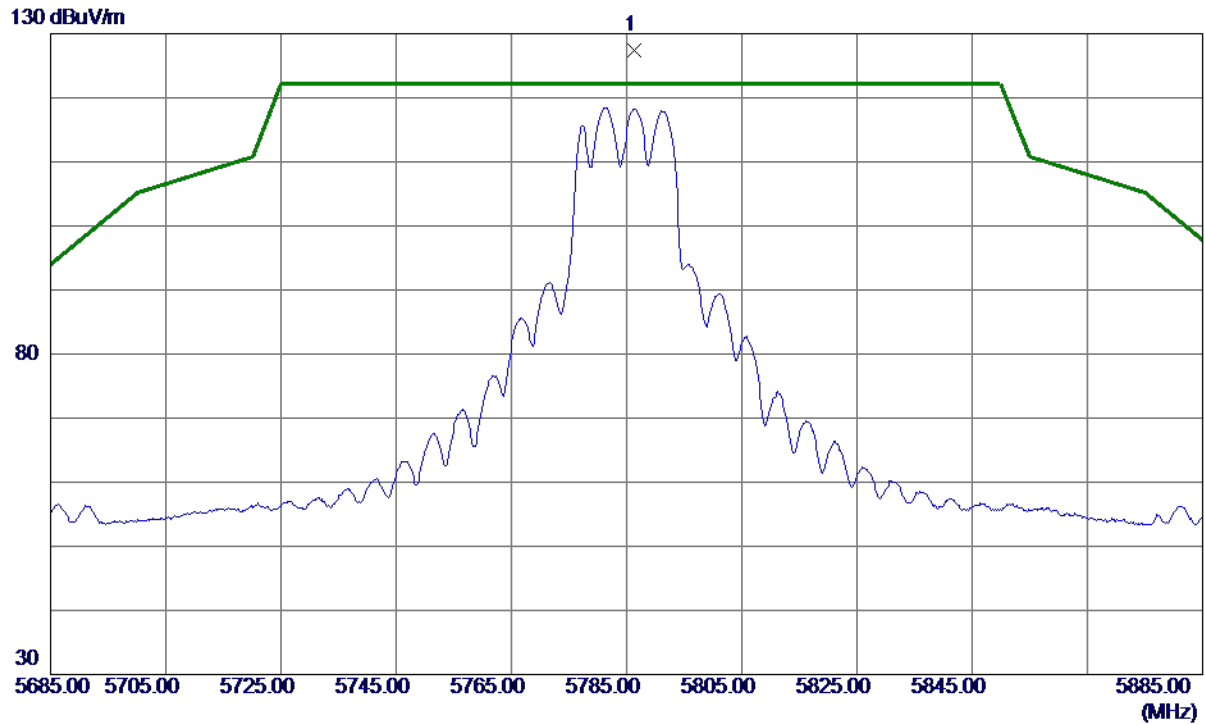

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5786.4000	107.72	19.59	127.31	122.20	5.11	Peak	No Limit


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5785 MHz

## Vertical

80 dBuV/m

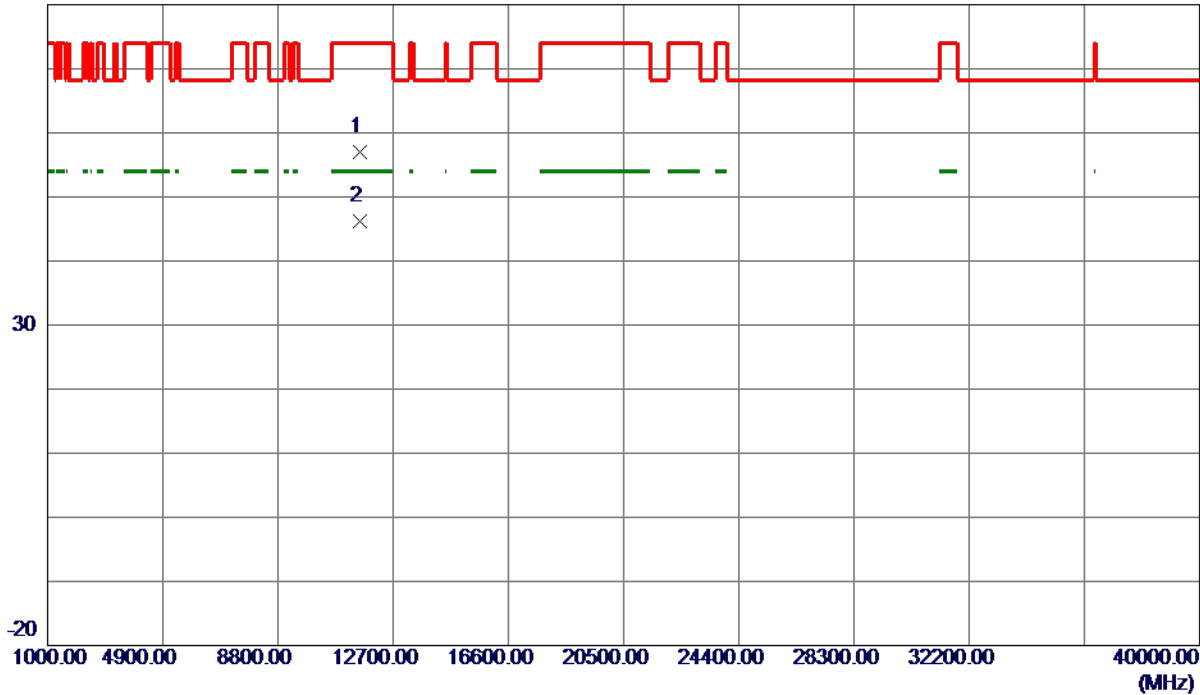

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11567.6750	39.94	17.04	56.98	74.00	-17.02	Peak	
2 *	11571.5250	29.11	17.05	46.16	54.00	-7.84	AVG	

### REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5785 MHz

## Horizontal

130 dBuV/m

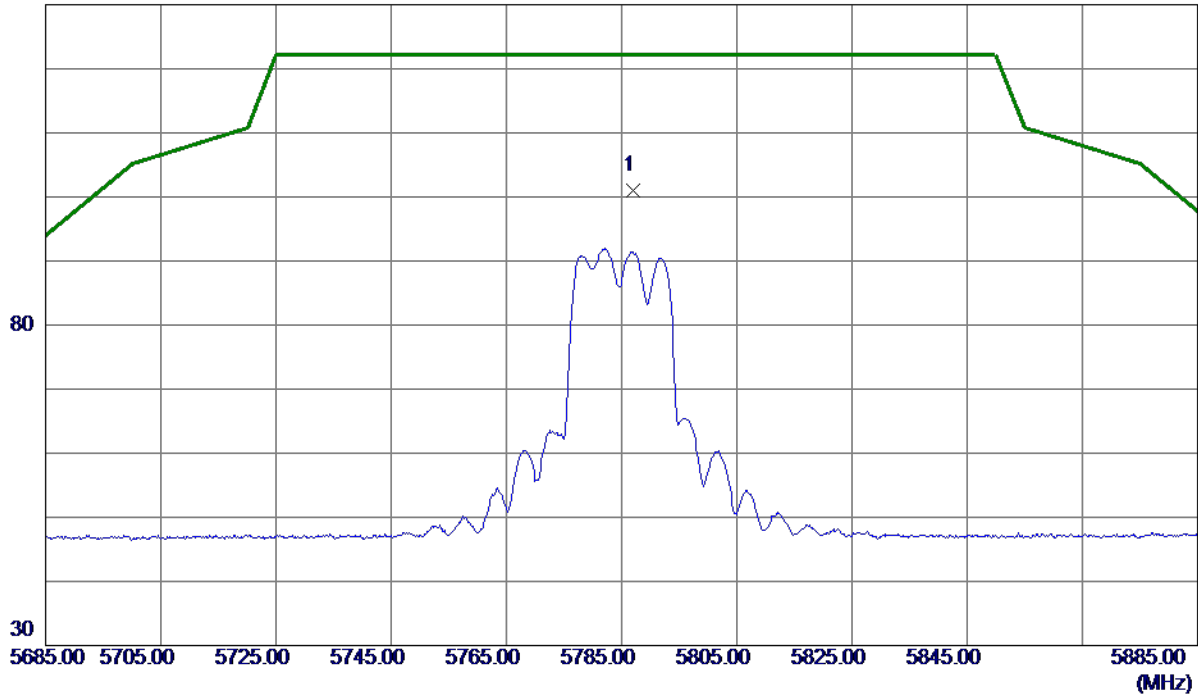

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5786.9000	81.41	19.59	101.00	122.20	-21.20	Peak	No Limit


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5785 MHz

## Horizontal

80 dBuV/m

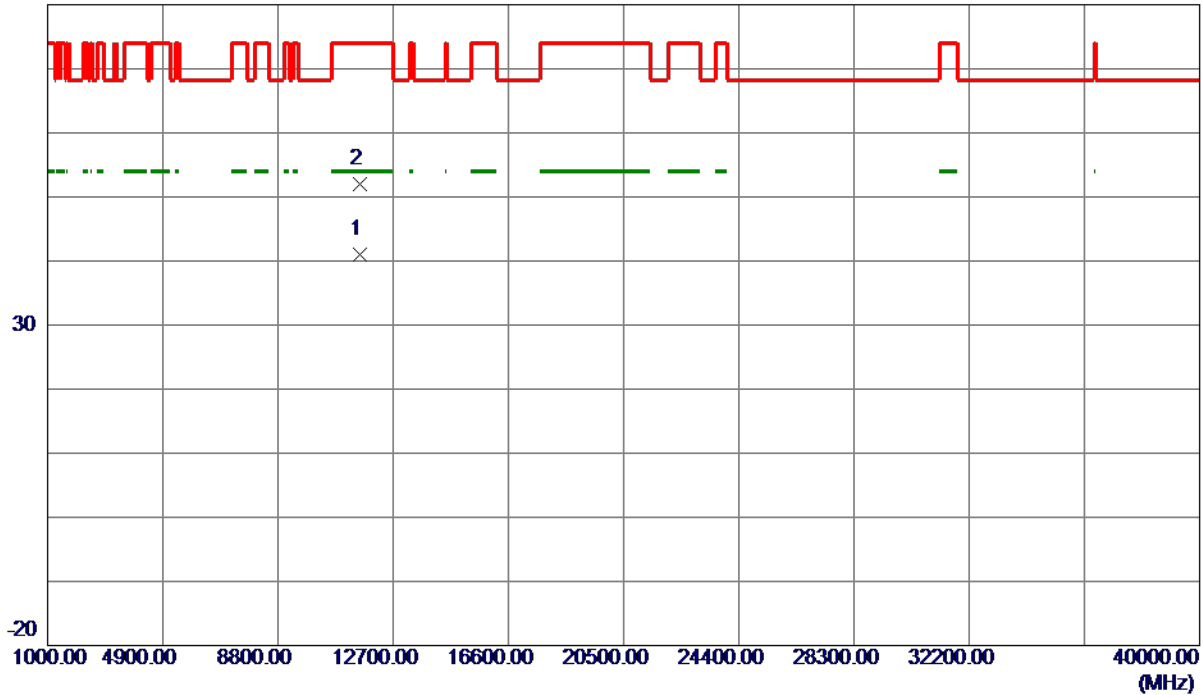


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11572.4100	24.03	17.05	41.08	54.00	-12.92	AVG	
2	11578.1500	34.93	17.05	51.98	74.00	-22.02	Peak	

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5825 MHz

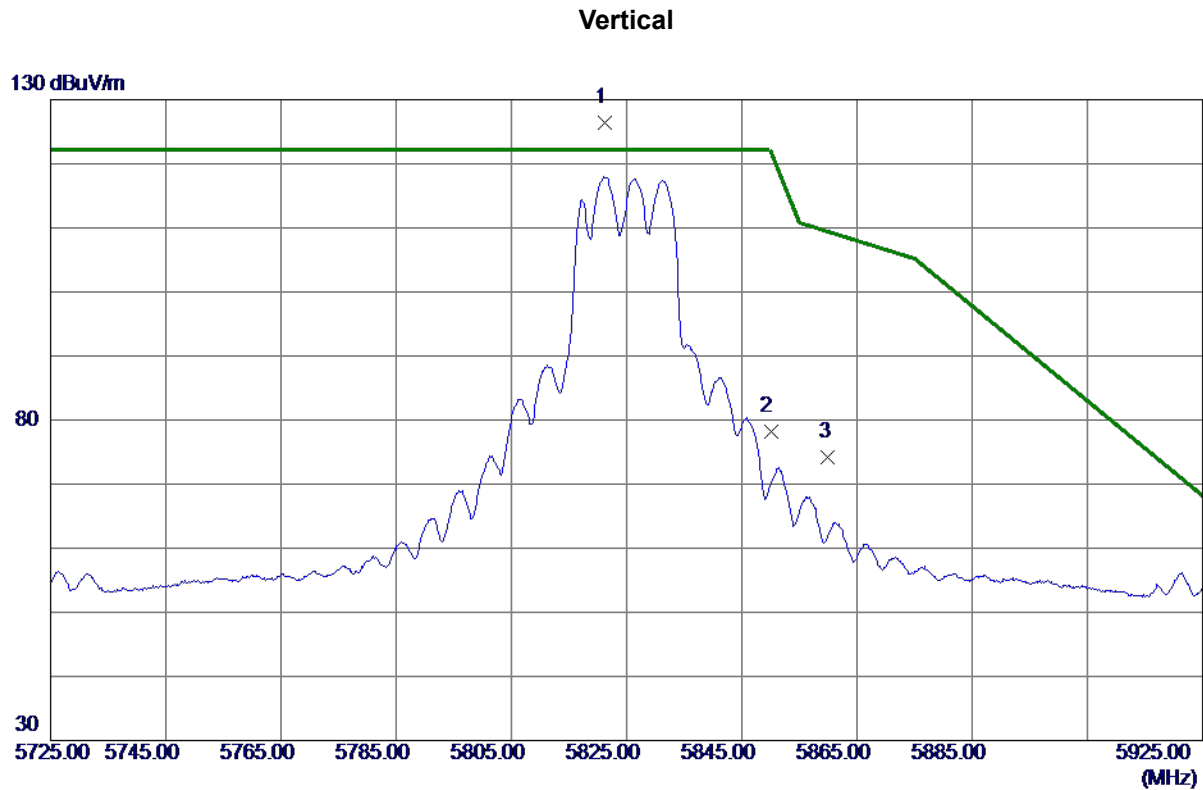

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5821.2000	106.82	19.67	126.49	122.20	4.29	Peak	No Limit
2	5850.0000	58.53	19.74	78.27	122.20	-43.93	Peak	
3	5860.0000	54.49	19.76	74.25	109.40	-35.15	Peak	


## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5825 MHz

## Vertical

80 dBuV/m

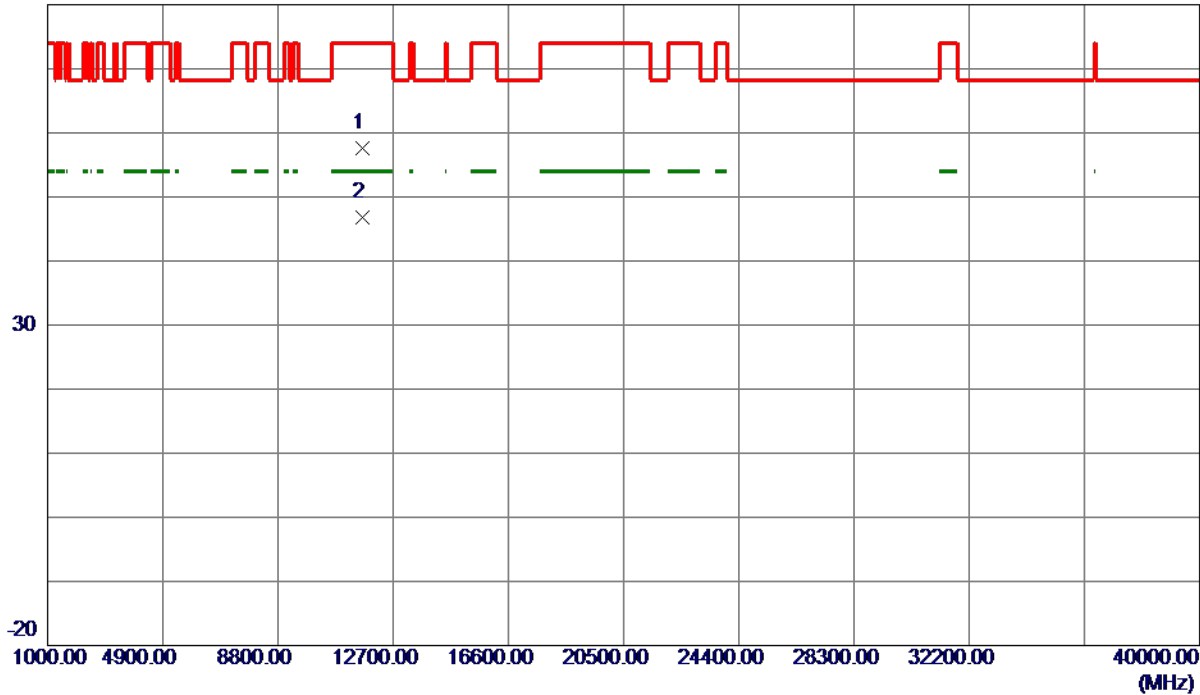

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11646.9750	40.47	17.12	57.59	74.00	-16.41	Peak	
2 *	11651.6750	29.65	17.12	46.77	54.00	-7.23	AVG	


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5825 MHz

## Horizontal

130 dBuV/m

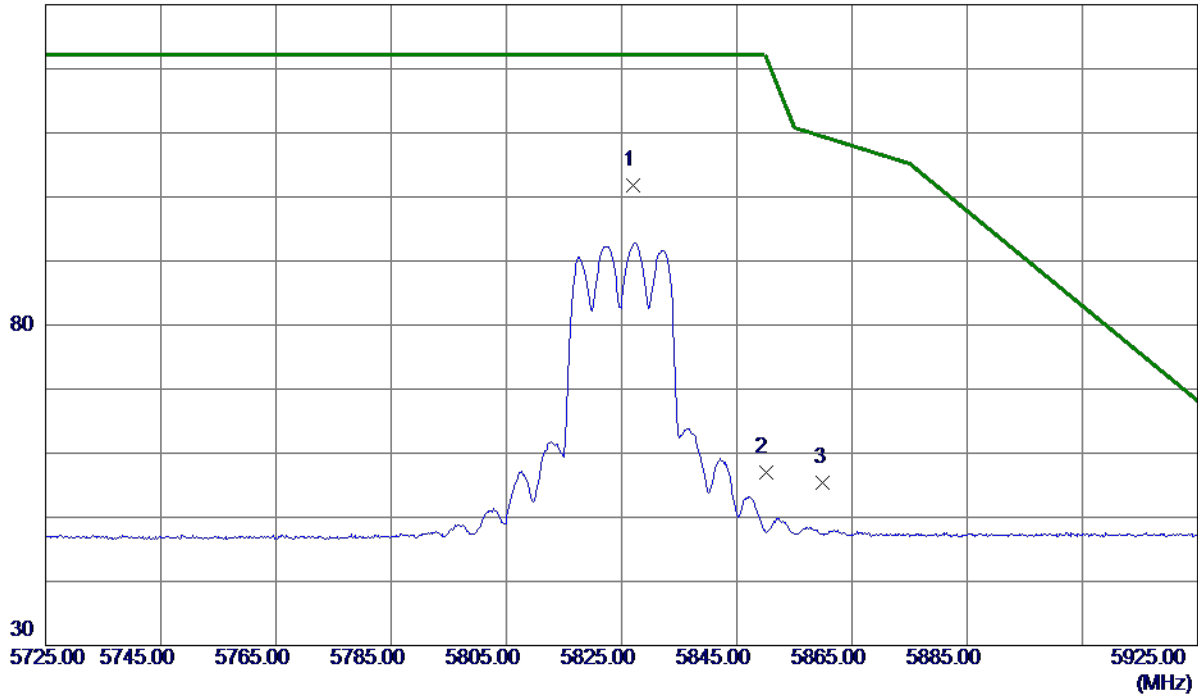

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5826.9000	82.20	19.68	101.88	122.20	-20.32	Peak	No Limit
2	5850.0000	37.31	19.74	57.05	122.20	-65.15	Peak	
3	5860.0000	35.68	19.76	55.44	109.40	-53.96	Peak	


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5825 MHz

## Horizontal

80 dBuV/m

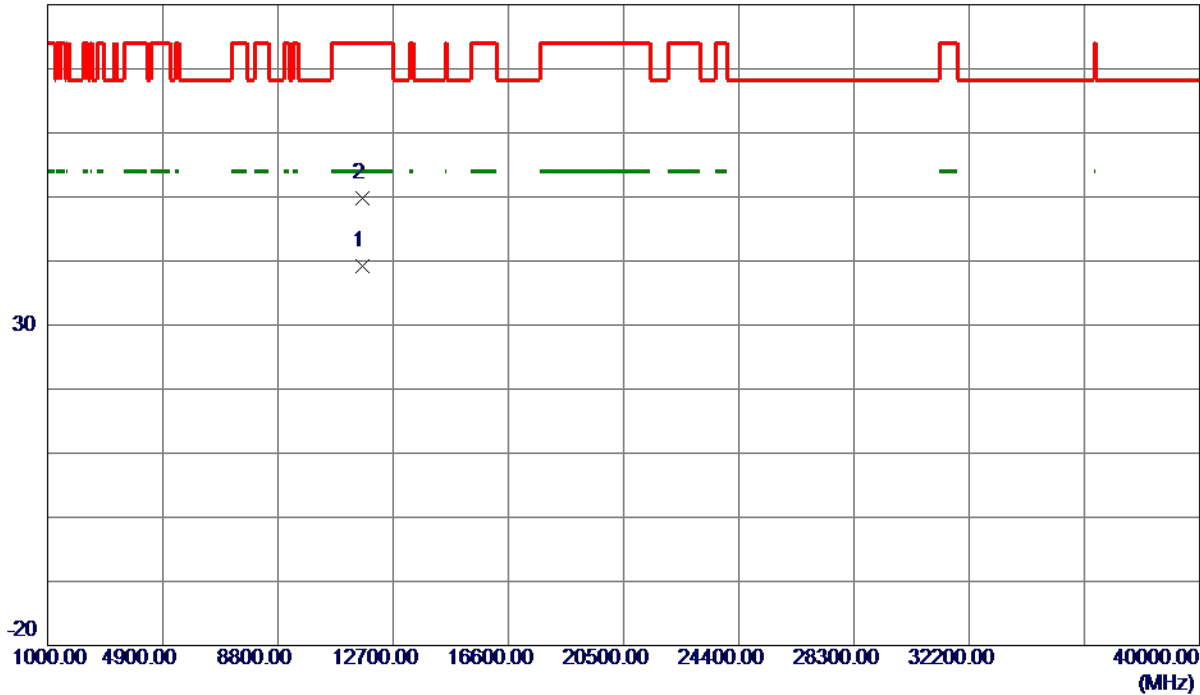

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11649.9800	22.00	17.12	39.12	54.00	-14.88	AVG	
2	11652.8200	32.69	17.12	49.81	74.00	-24.19	Peak	


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5180 MHz

## Vertical

130 dBuV/m

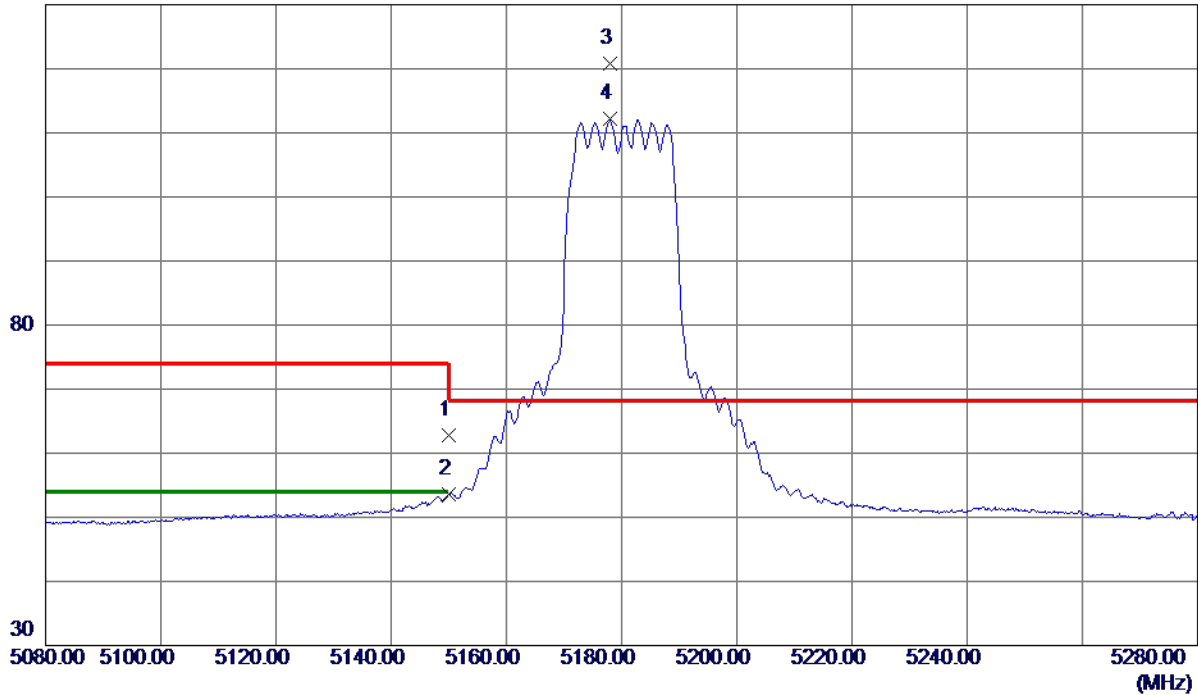

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	44.24	18.57	62.81	74.00	-11.19	Peak	
2	5150.0000	35.02	18.57	53.59	54.00	-0.41	AVG	
3 *	5177.9000	102.15	18.60	120.75	68.30	52.45	Peak	No Limit
4	5178.0000	93.51	18.60	112.11	999.00	-886.89	AVG	No Limit


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5180 MHz

## Vertical

80 dBuV/m

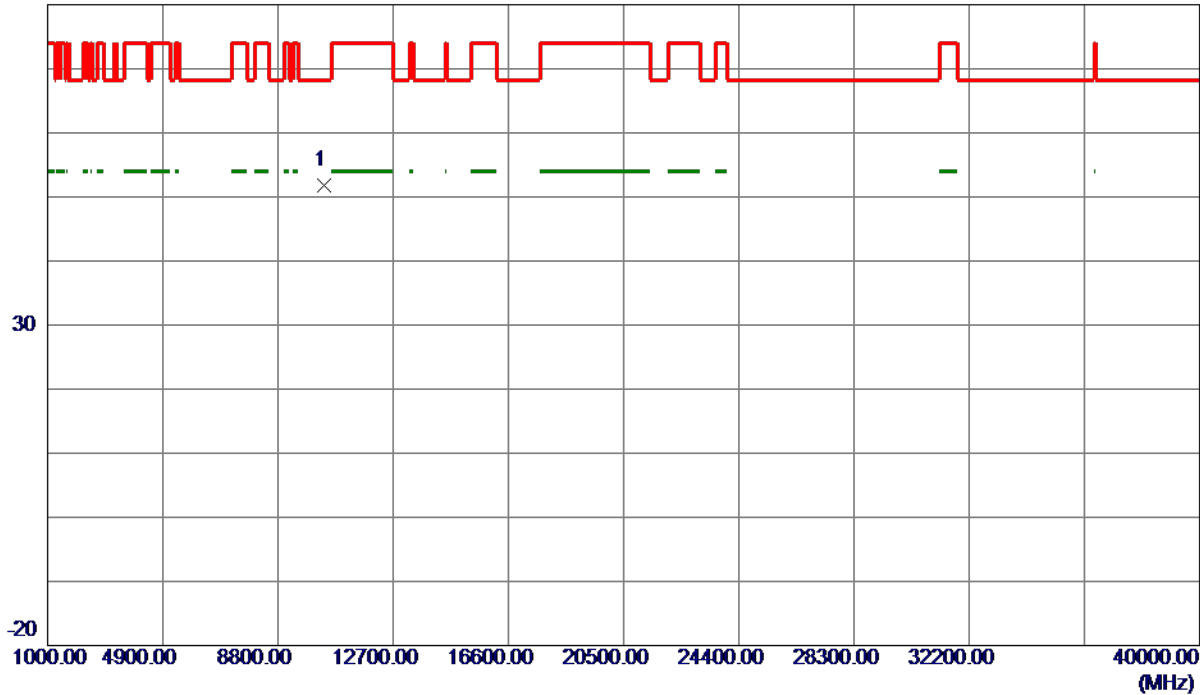

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10366.3250	38.03	13.82	51.85	68.30	-16.45	Peak	

### REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5180 MHz

## Horizontal

130 dBuV/m

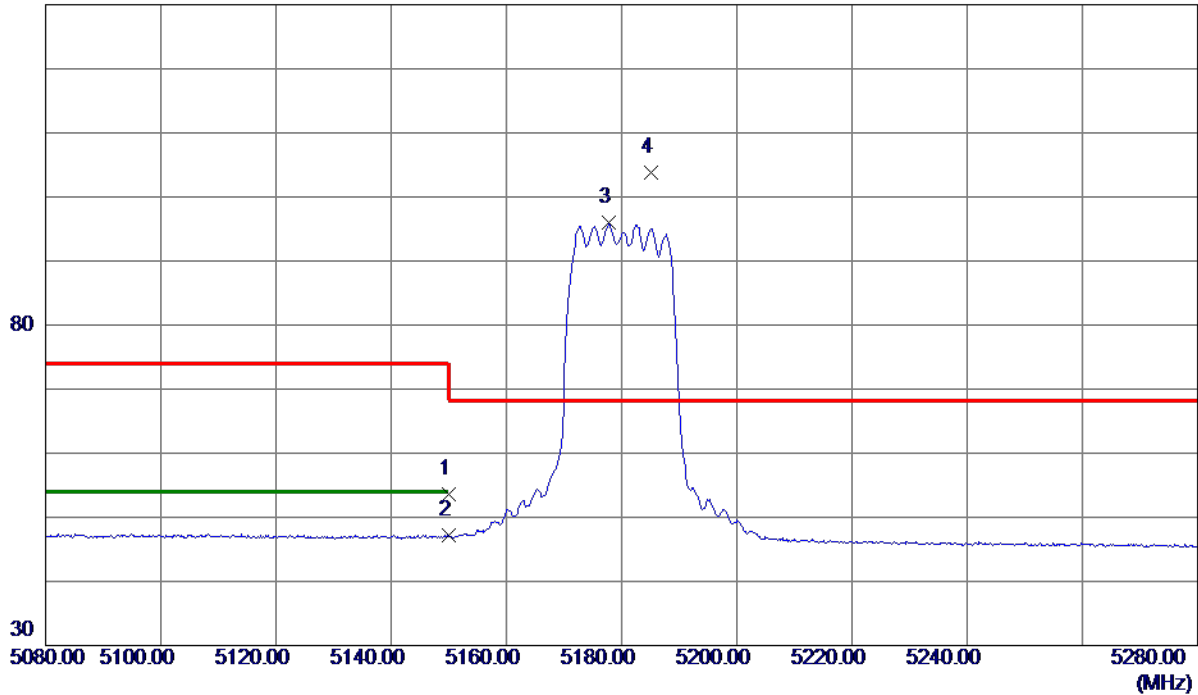

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	35.03	18.57	53.60	74.00	-20.40	Peak	
2	5150.0000	28.54	18.57	47.11	54.00	-6.89	AVG	
3	5177.8000	77.31	18.59	95.90	999.00	-903.10	AVG	No Limit
4 *	5185.2000	85.27	18.60	103.87	68.30	35.57	Peak	No Limit


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5180 MHz

## Horizontal

80 dBuV/m

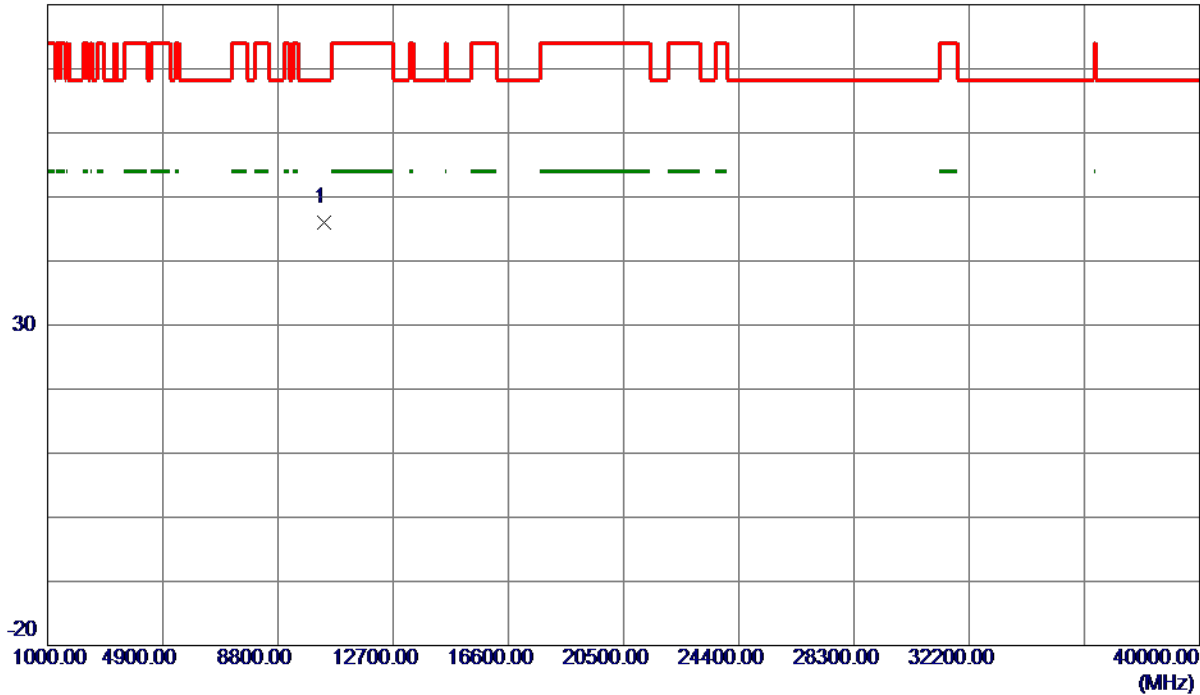

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10361.6200	32.25	13.81	46.06	68.30	-22.24	Peak	


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5200 MHz

## Vertical

130 dBuV/m

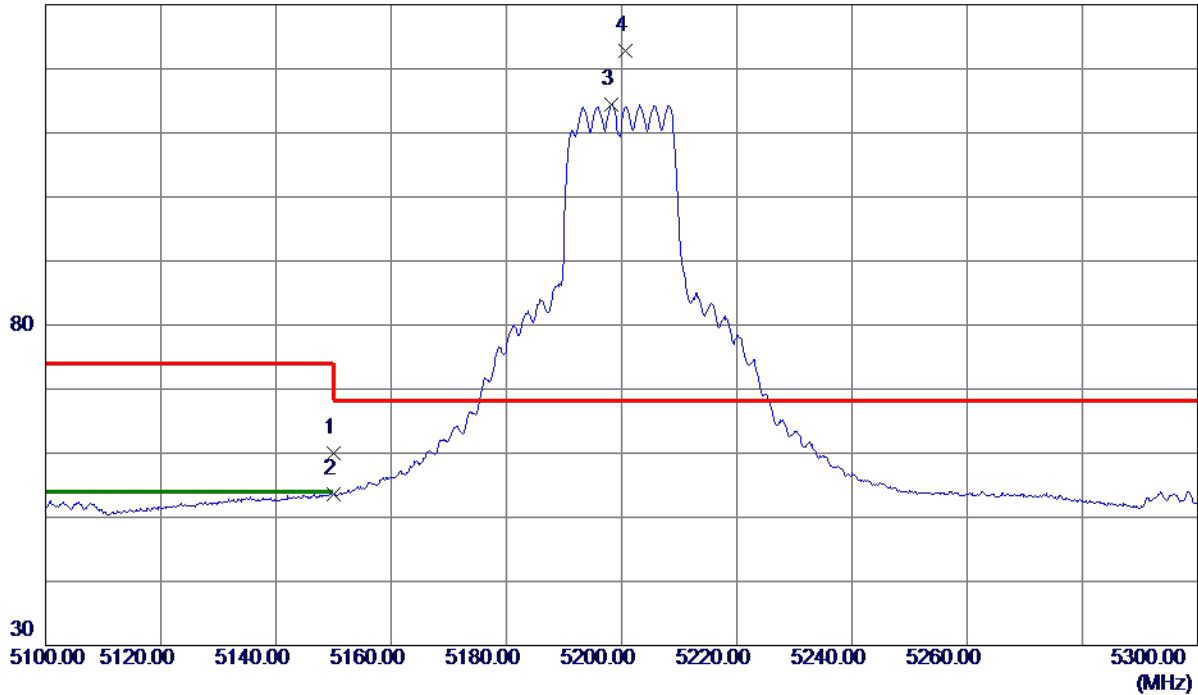

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	41.43	18.57	60.00	74.00	-14.00	Peak	
2	5150.0000	34.94	18.57	53.51	54.00	-0.49	AVG	
3	5198.2000	95.86	18.62	114.48	999.00	-884.52	AVG	No Limit
4 *	5200.7000	104.11	18.62	122.73	68.30	54.43	Peak	No Limit


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5200 MHz

## Vertical

80 dBuV/m

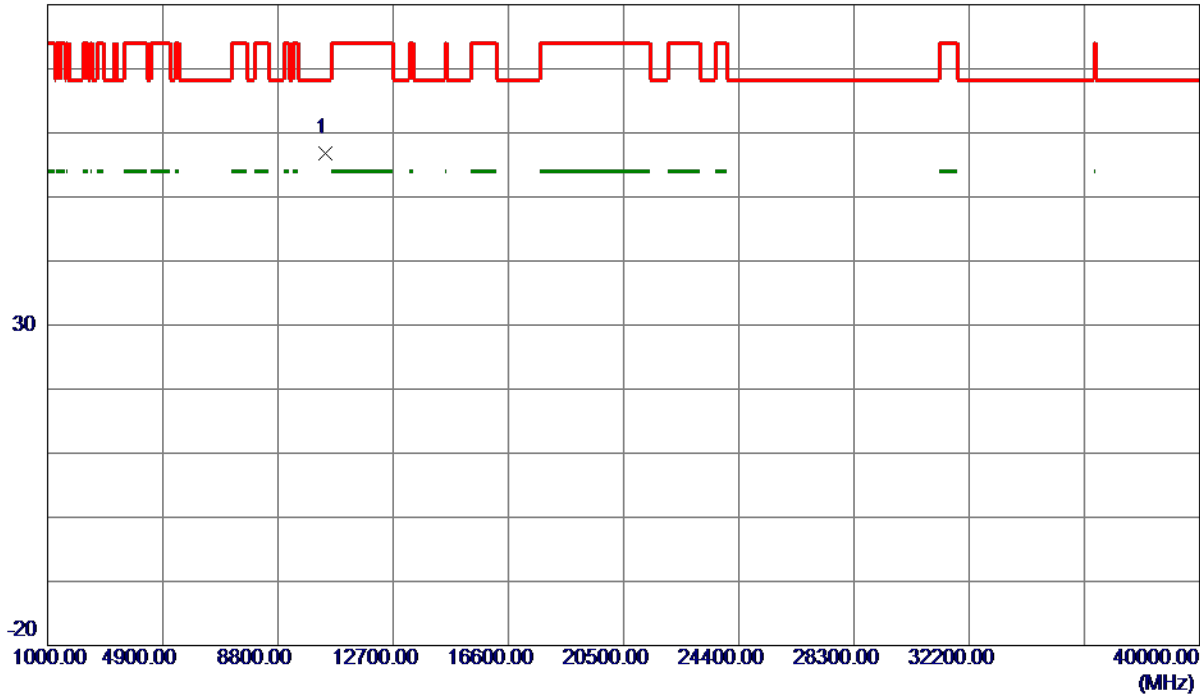

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	10404.0500	42.90	13.90	56.80	68.30	-11.50	Peak	


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5200 MHz

## Horizontal

130 dBuV/m

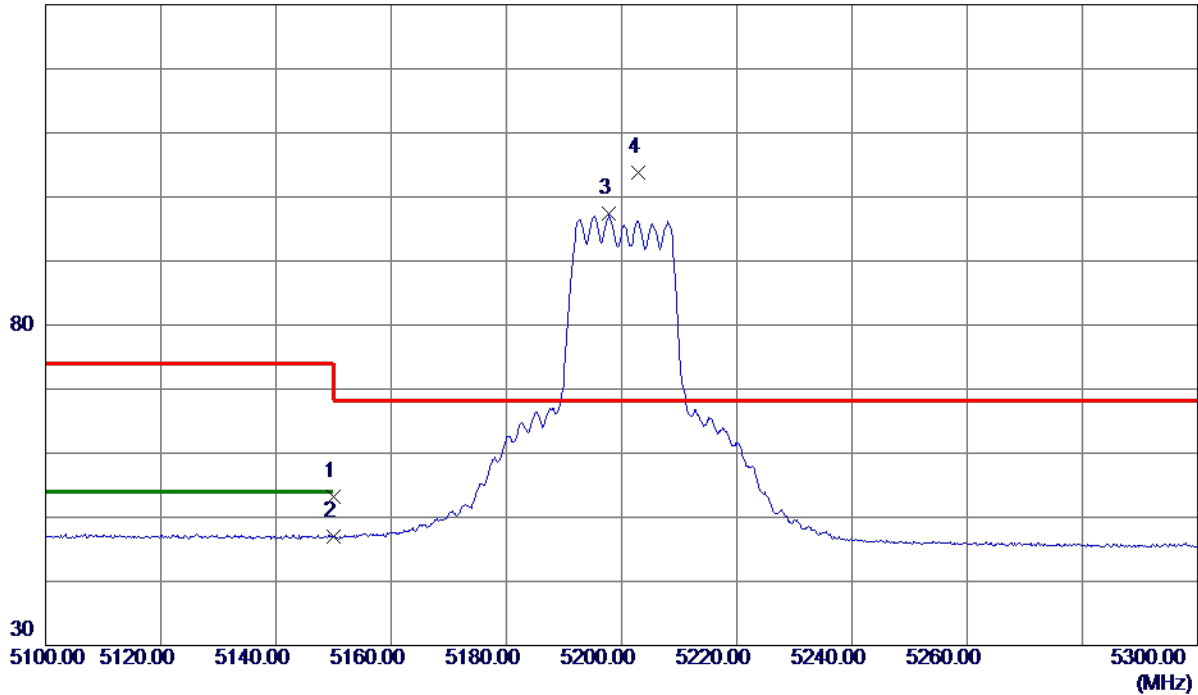

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	34.65	18.57	53.22	74.00	-20.78	Peak	
2	5150.0000	28.39	18.57	46.96	54.00	-7.04	AVG	
3	5197.8000	78.70	18.62	97.32	999.00	-901.68	AVG	No Limit
4 *	5202.8000	85.25	18.62	103.87	68.30	35.57	Peak	No Limit


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5200 MHz

## Horizontal

80 dBuV/m

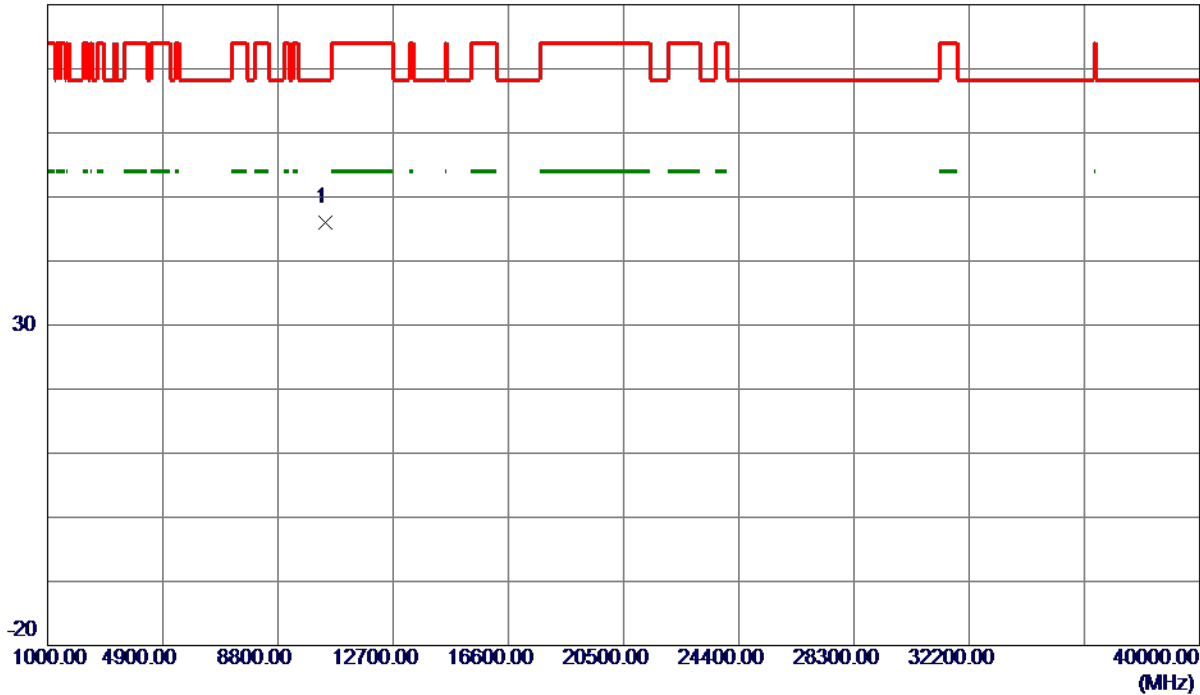

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10397.5750	32.17	13.88	46.05	68.30	-22.25	Peak	


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5240 MHz

## Vertical

130 dBuV/m

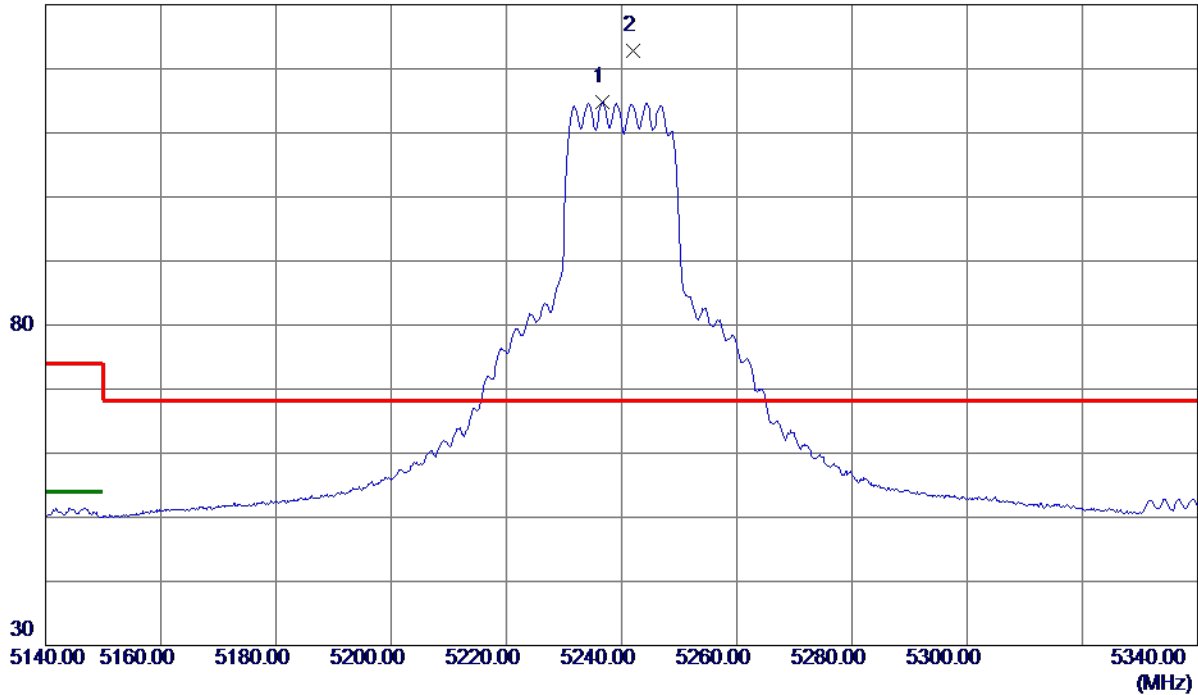

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5236.6000	96.17	18.66	114.83	999.00	-884.17	AVG	No Limit
2 *	5242.0000	104.21	18.66	122.87	68.30	54.57	Peak	No Limit


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5240 MHz

## Vertical

80 dBuV/m

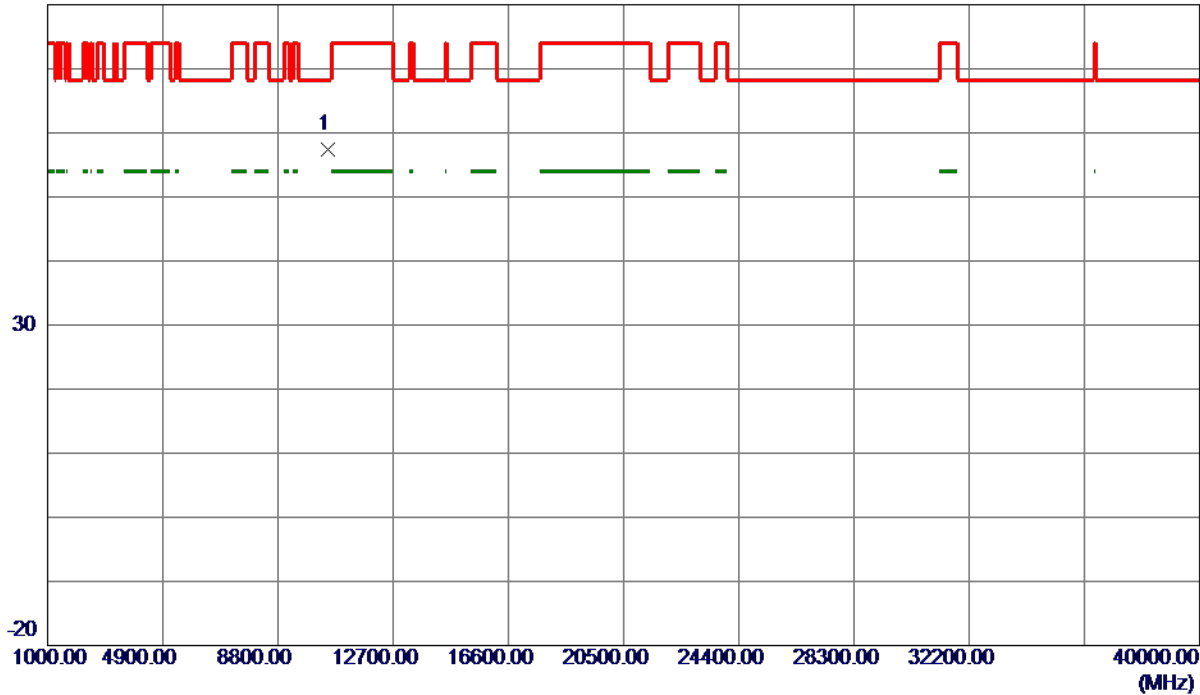

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10481.4000	43.35	14.07	57.42	68.30	-10.88	Peak	

### REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5240 MHz

## Horizontal

130 dBuV/m

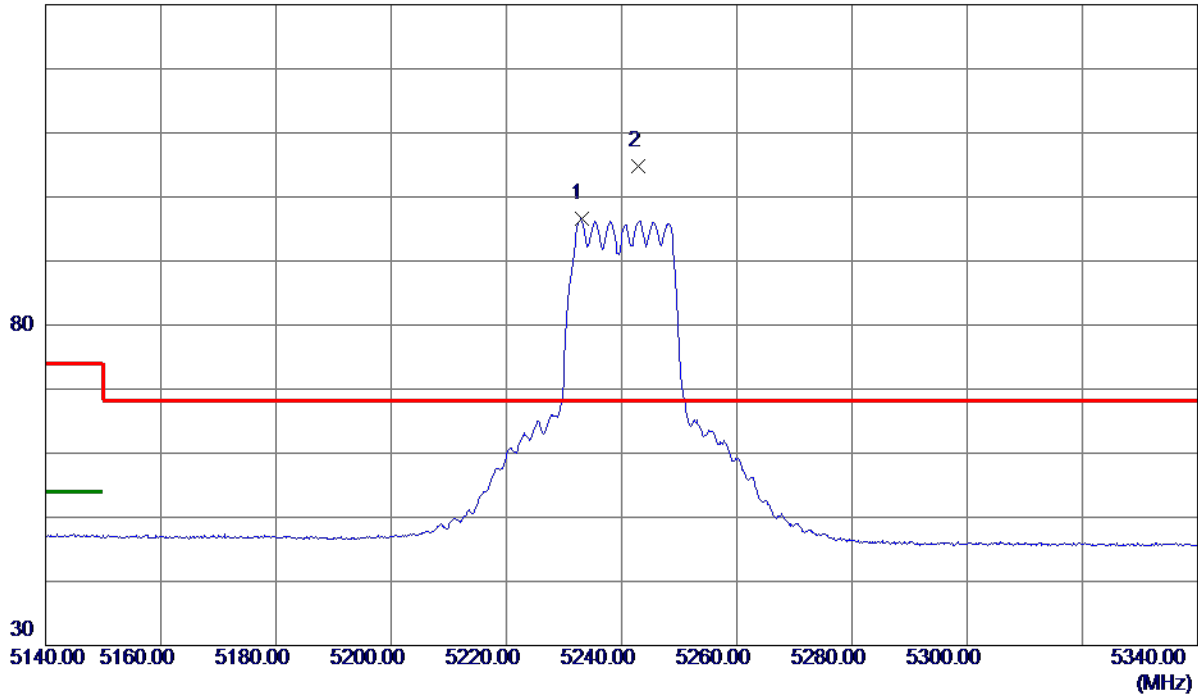

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5233.0000	77.87	18.65	96.52	999.00	-902.48	AVG	No Limit
2 *	5242.8000	86.22	18.66	104.88	68.30	36.58	Peak	No Limit


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5240 MHz

## Horizontal

80 dBuV/m

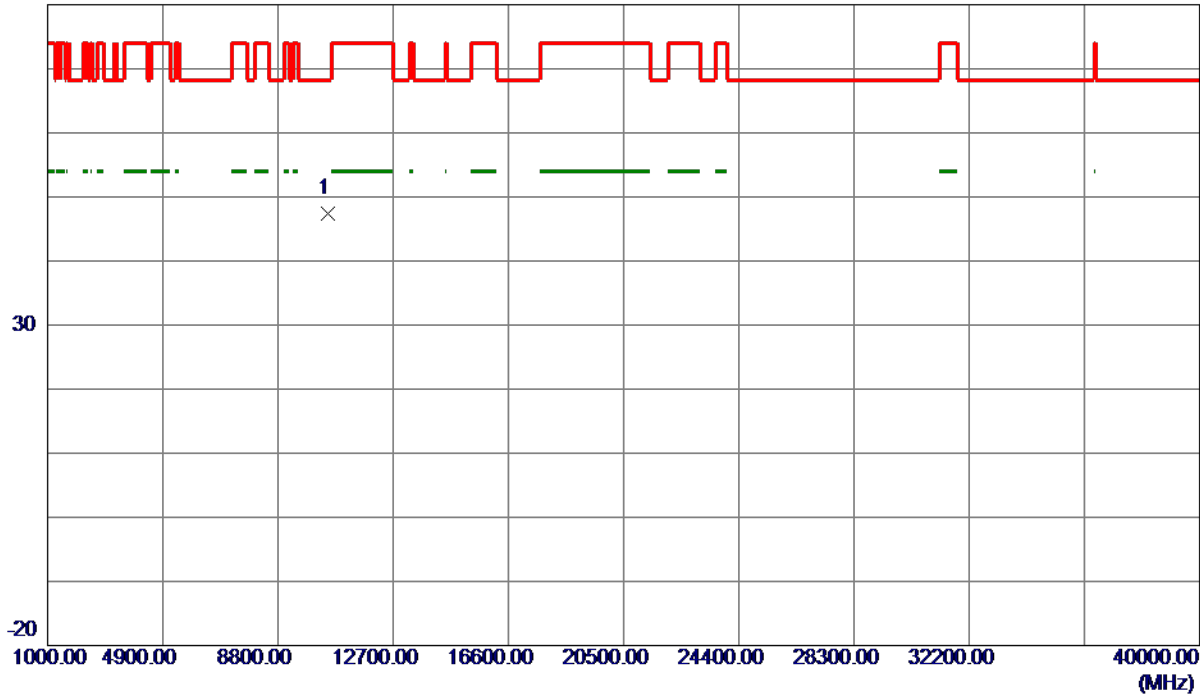

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10479.9650	33.34	14.07	47.41	68.30	-20.89	Peak	


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5190 MHz

## Vertical

130 dBuV/m

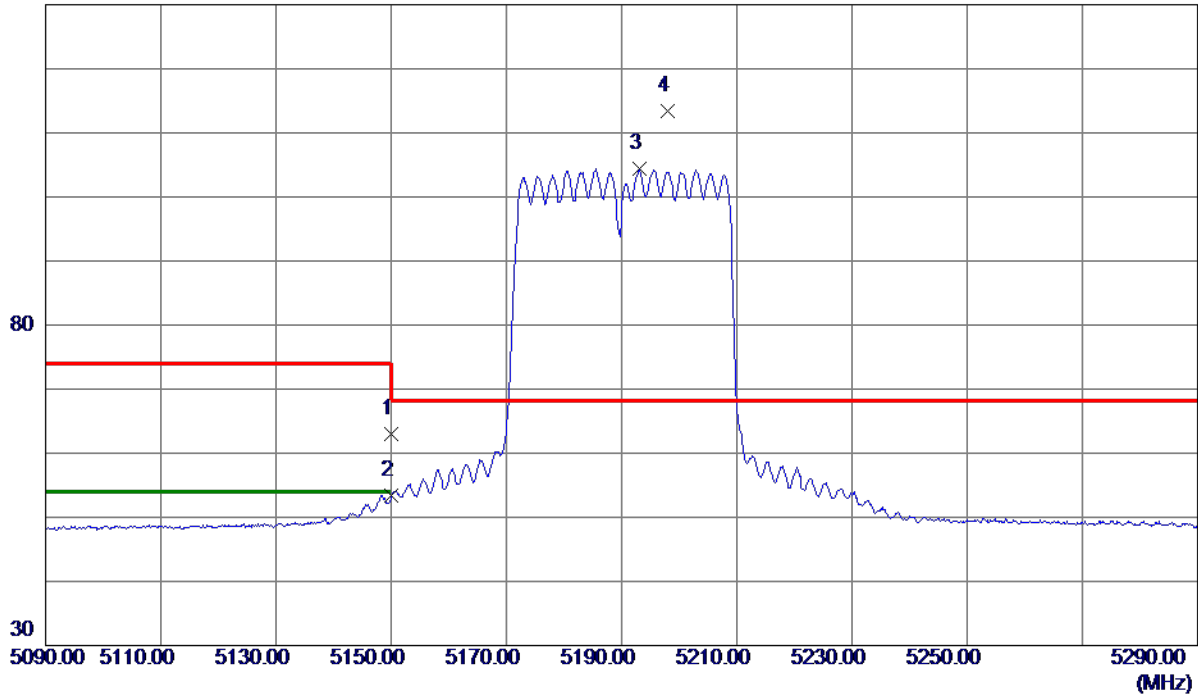

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	44.50	18.57	63.07	74.00	-10.93	Peak	
2	5150.0000	34.79	18.57	53.36	54.00	-0.64	AVG	
3	5193.1000	85.77	18.61	104.38	999.00	-894.62	AVG	No Limit
4 *	5198.0000	94.87	18.62	113.49	68.30	45.19	Peak	No Limit


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5190 MHz

## Vertical

80 dBuV/m

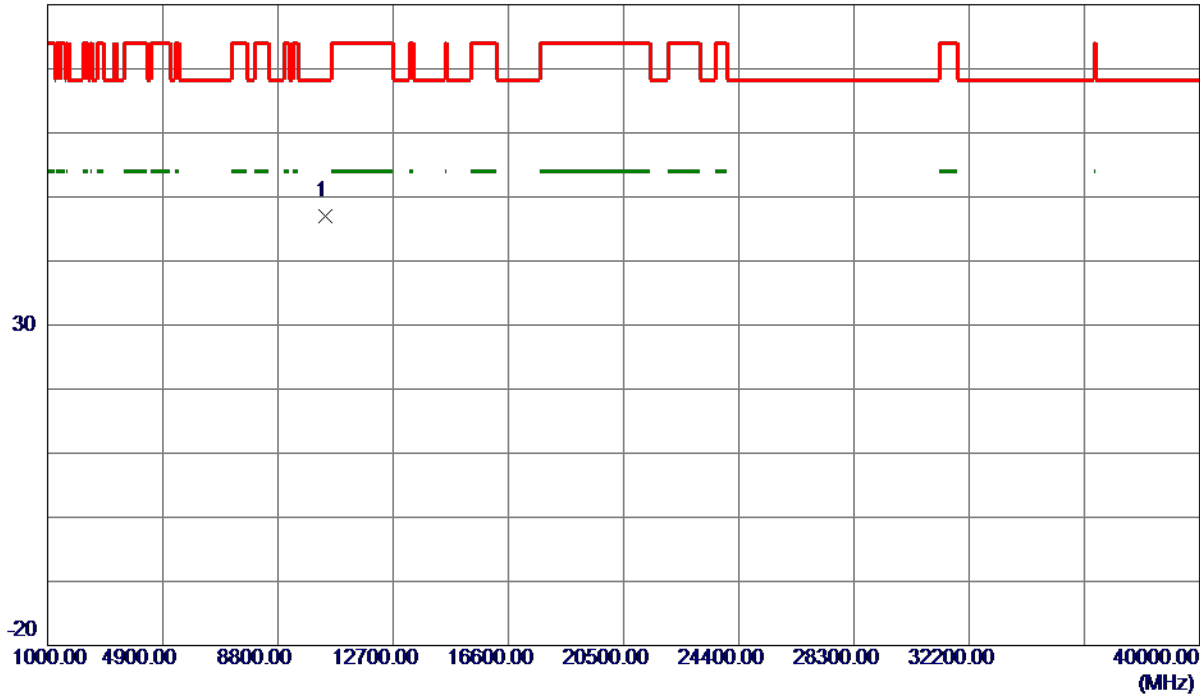

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10386.1000	33.12	13.86	46.98	68.30	-21.32	Peak	


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5190 MHz

## Horizontal

130 dBuV/m

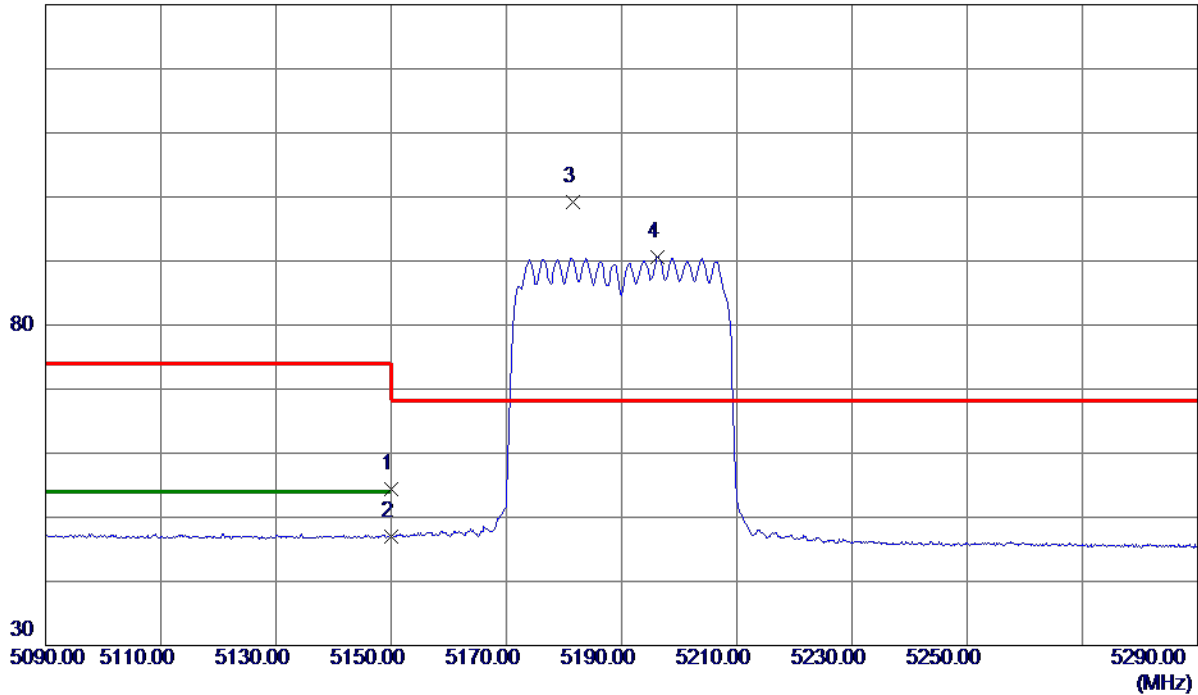

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	35.86	18.57	54.43	74.00	-19.57	Peak	
2	5150.0000	28.52	18.57	47.09	54.00	-6.91	AVG	
3 *	5181.6000	80.62	18.60	99.22	68.30	30.92	Peak	No Limit
4	5196.2000	72.06	18.61	90.67	999.00	-908.33	AVG	No Limit


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5190 MHz

## Horizontal

80 dBuV/m

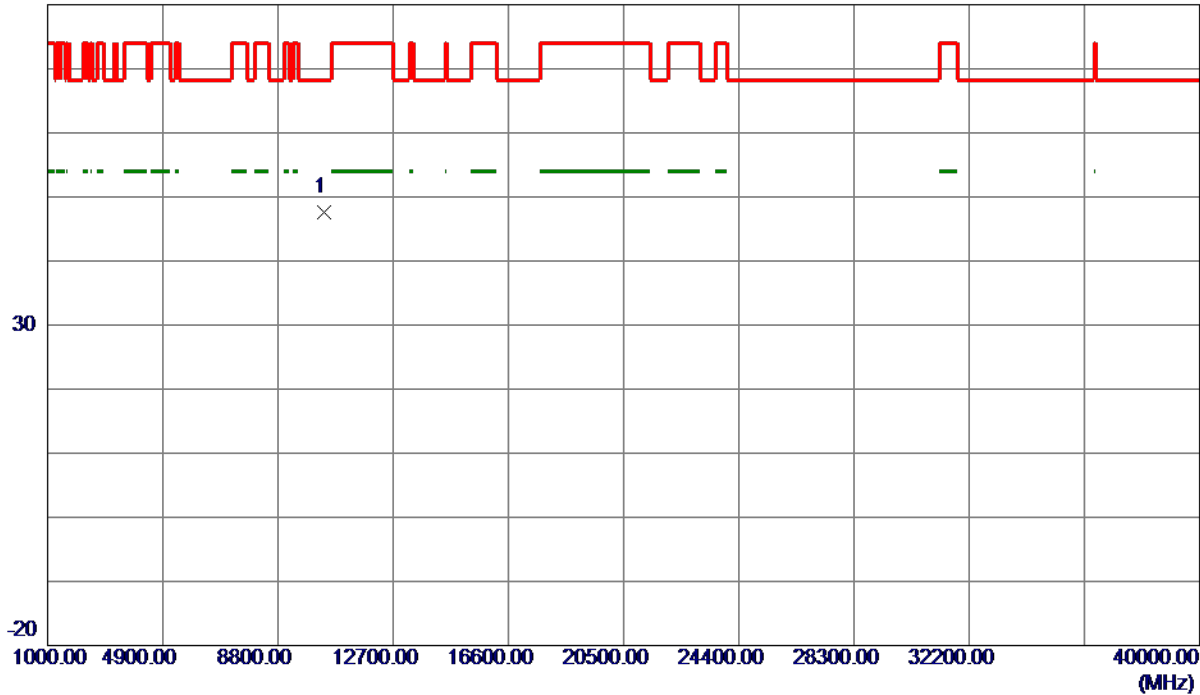

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10381.5700	33.69	13.85	47.54	68.30	-20.76	Peak	


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5230 MHz

## Vertical

130 dBuV/m

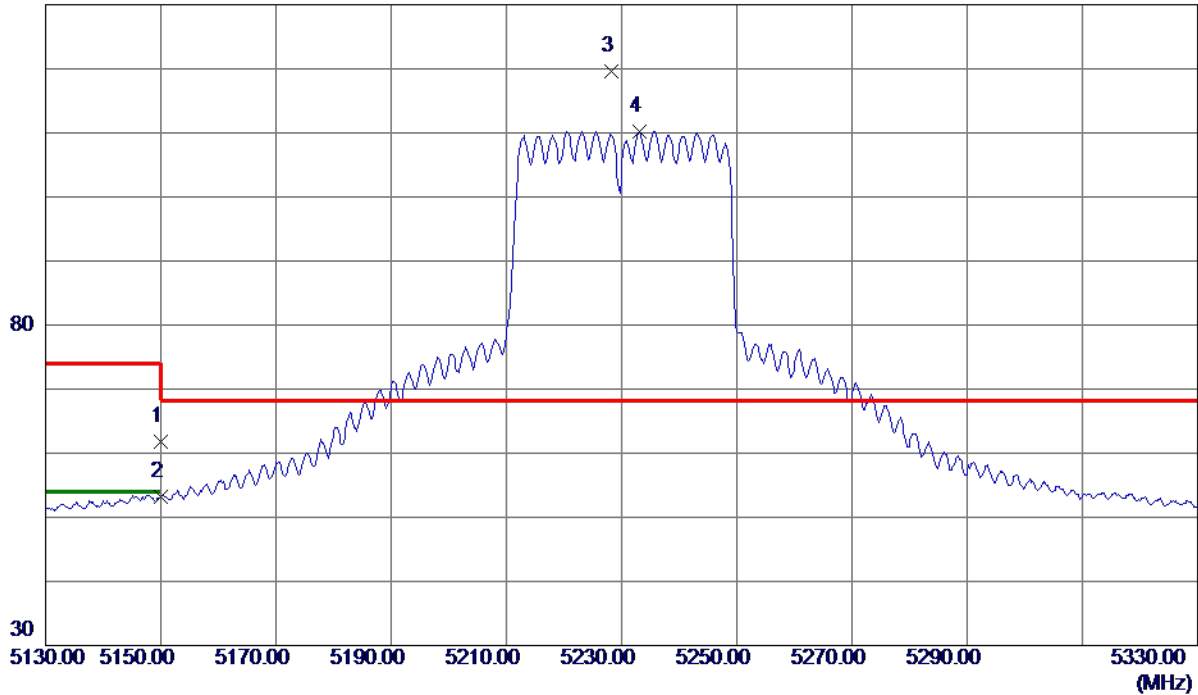

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	43.24	18.57	61.81	74.00	-12.19	Peak	
2	5150.0000	34.72	18.57	53.29	54.00	-0.71	AVG	
3 *	5228.2000	100.88	18.65	119.53	68.30	51.23	Peak	No Limit
4	5233.1000	91.61	18.65	110.26	999.00	-888.74	AVG	No Limit


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5230 MHz

## Vertical

80 dBuV/m

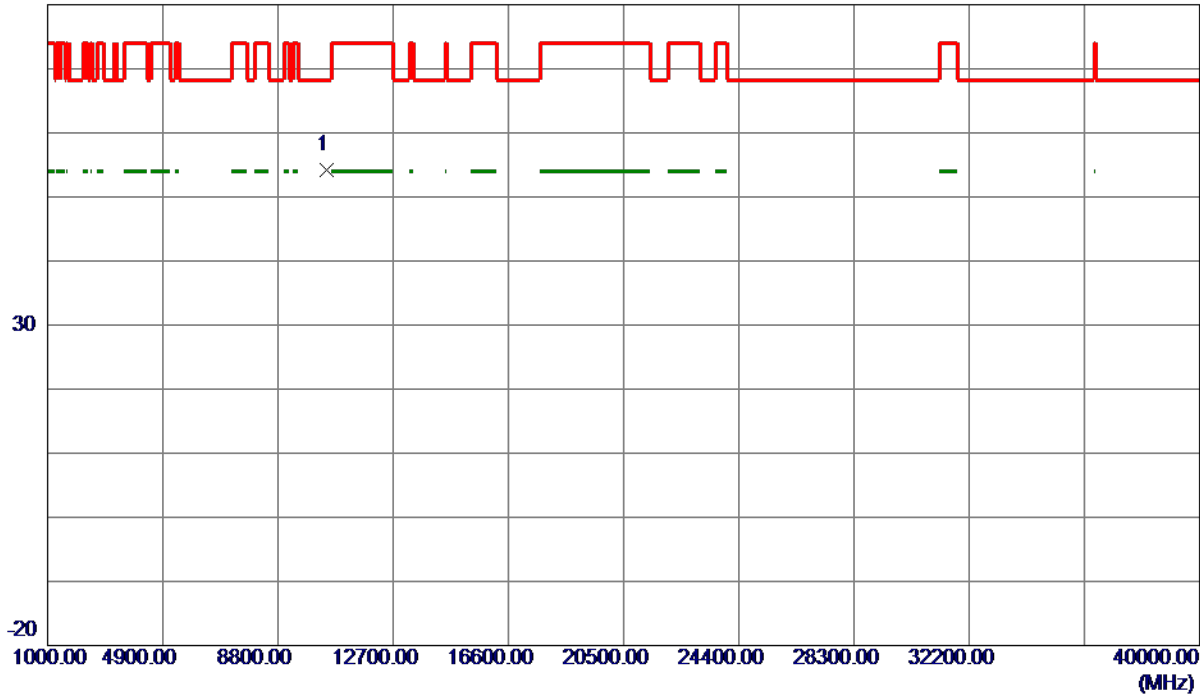

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10456.4000	40.21	14.01	54.22	68.30	-14.08	Peak	

### REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5230 MHz

## Horizontal

130 dBuV/m

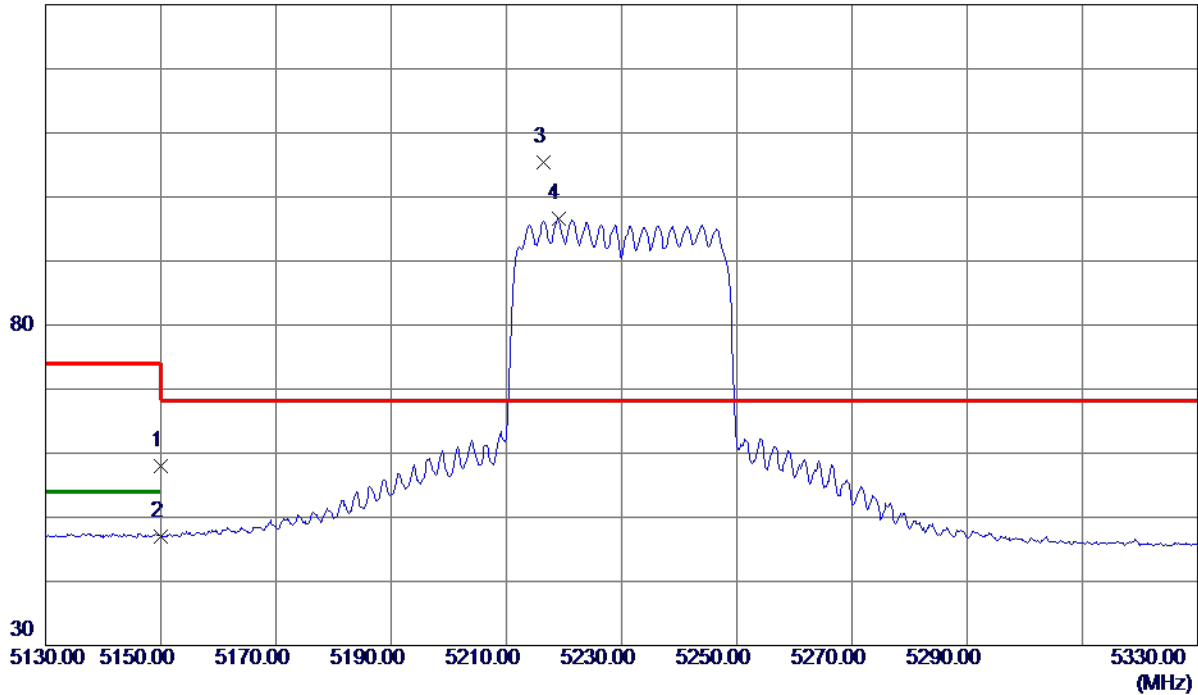

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	39.42	18.57	57.99	74.00	-16.01	Peak	
2	5150.0000	28.49	18.57	47.06	54.00	-6.94	AVG	
3 *	5216.5000	86.68	18.64	105.32	68.30	37.02	Peak	No Limit
4	5219.0000	77.87	18.64	96.51	999.00	-902.49	AVG	No Limit


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5230 MHz

## Horizontal

80 dBuV/m

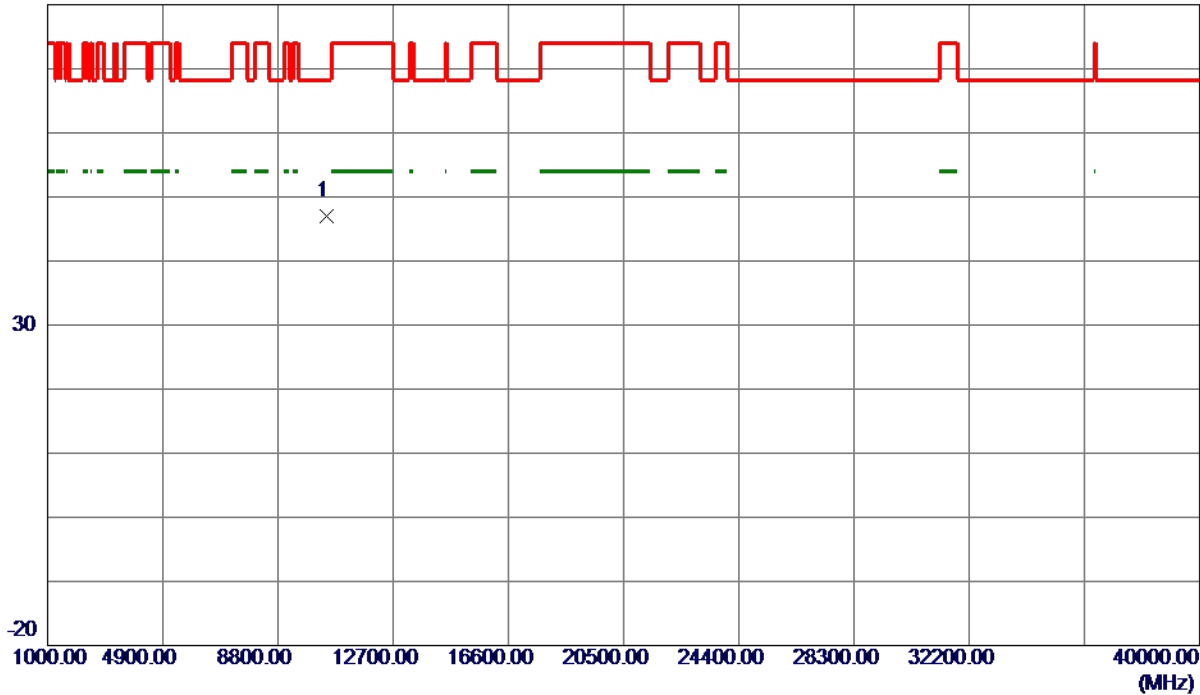

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10464.9750	33.04	14.03	47.07	68.30	-21.23	Peak	


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT80) Mode 5210 MHz

## Vertical

130 dBuV/m

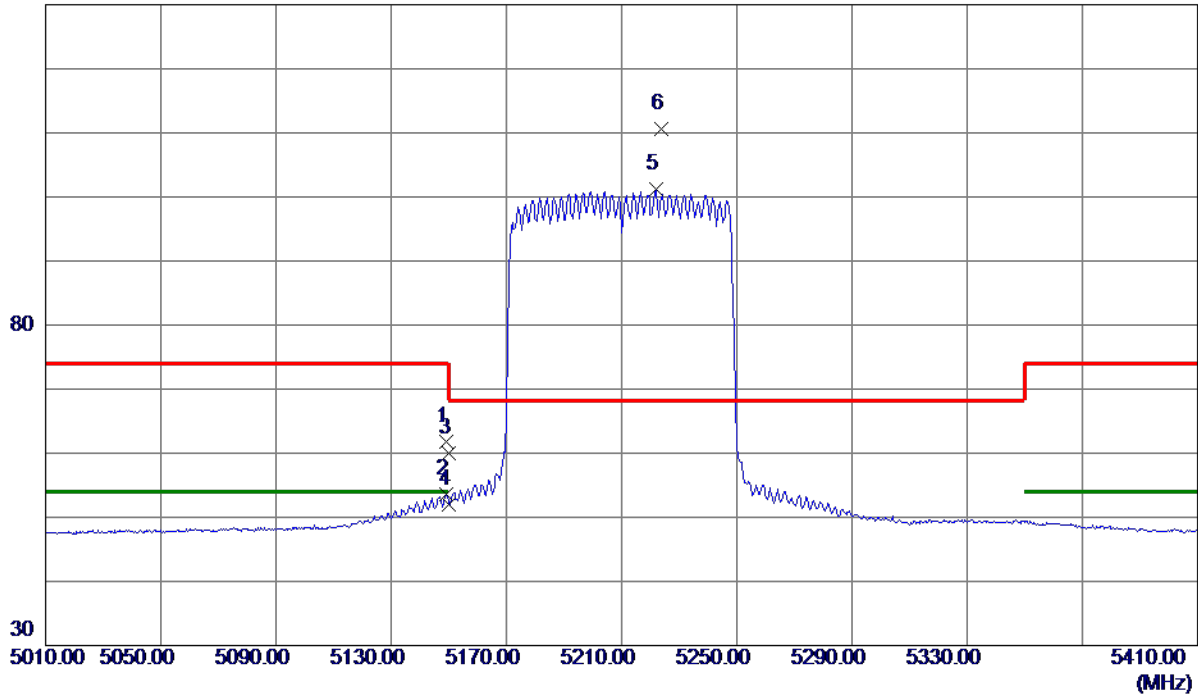

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5149.2000	43.29	18.57	61.86	74.00	-12.14	Peak	
2	5149.2000	35.05	18.57	53.62	54.00	-0.38	AVG	
3	5150.0000	41.50	18.57	60.07	74.00	-13.93	Peak	
4	5150.0000	33.44	18.57	52.01	54.00	-1.99	AVG	
5	5221.8000	82.51	18.64	101.15	999.00	-897.85	AVG	No Limit
6 *	5223.8000	92.05	18.64	110.69	68.30	42.39	Peak	No Limit


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT80) Mode 5210 MHz

## Vertical

80 dBuV/m

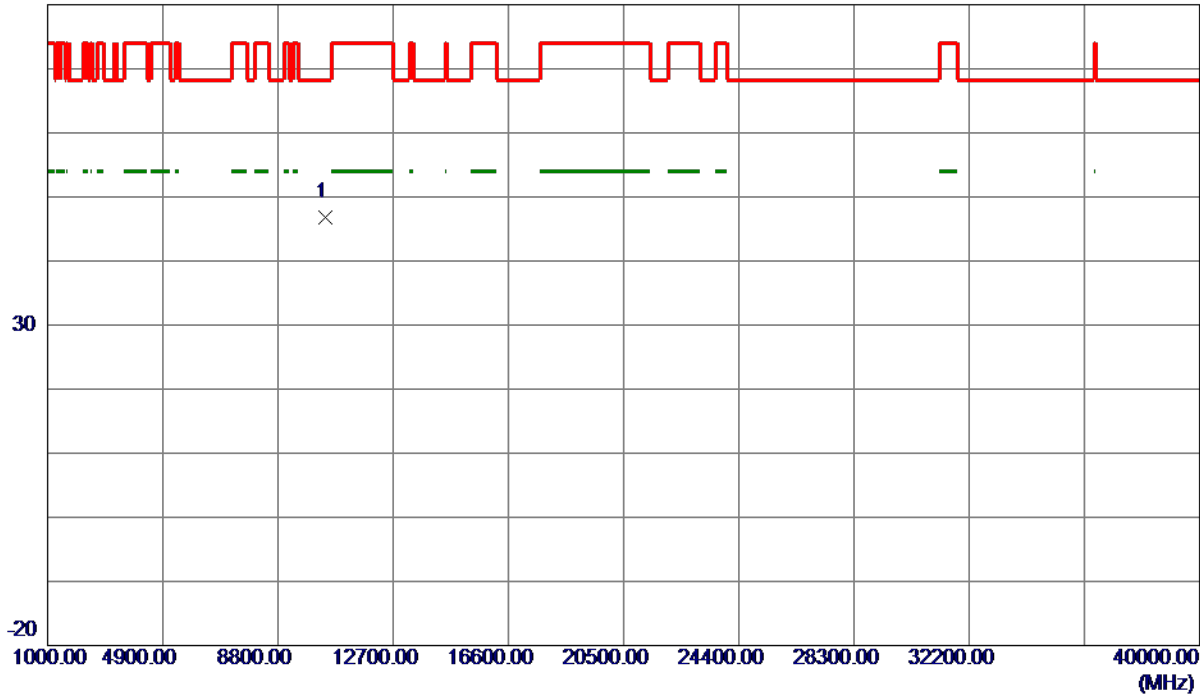

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10387.5500	32.90	13.86	46.76	68.30	-21.54	Peak	


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT80) Mode 5210 MHz

## Horizontal

130 dBuV/m

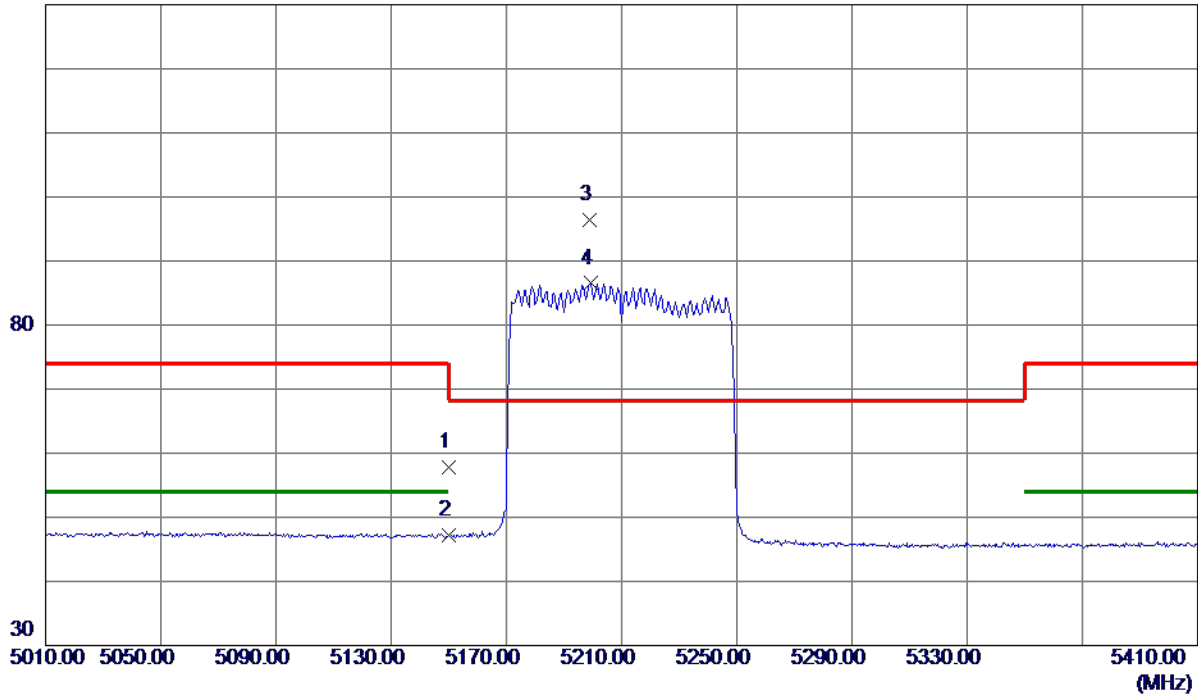

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	39.23	18.57	57.80	74.00	-16.20	Peak	
2	5150.0000	28.69	18.57	47.26	54.00	-6.74	AVG	
3 *	5199.0000	77.79	18.62	96.41	68.30	28.11	Peak	No Limit
4	5199.2000	67.88	18.62	86.50	999.00	-912.50	AVG	No Limit


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT80) Mode 5210 MHz

## Horizontal

80 dBuV/m

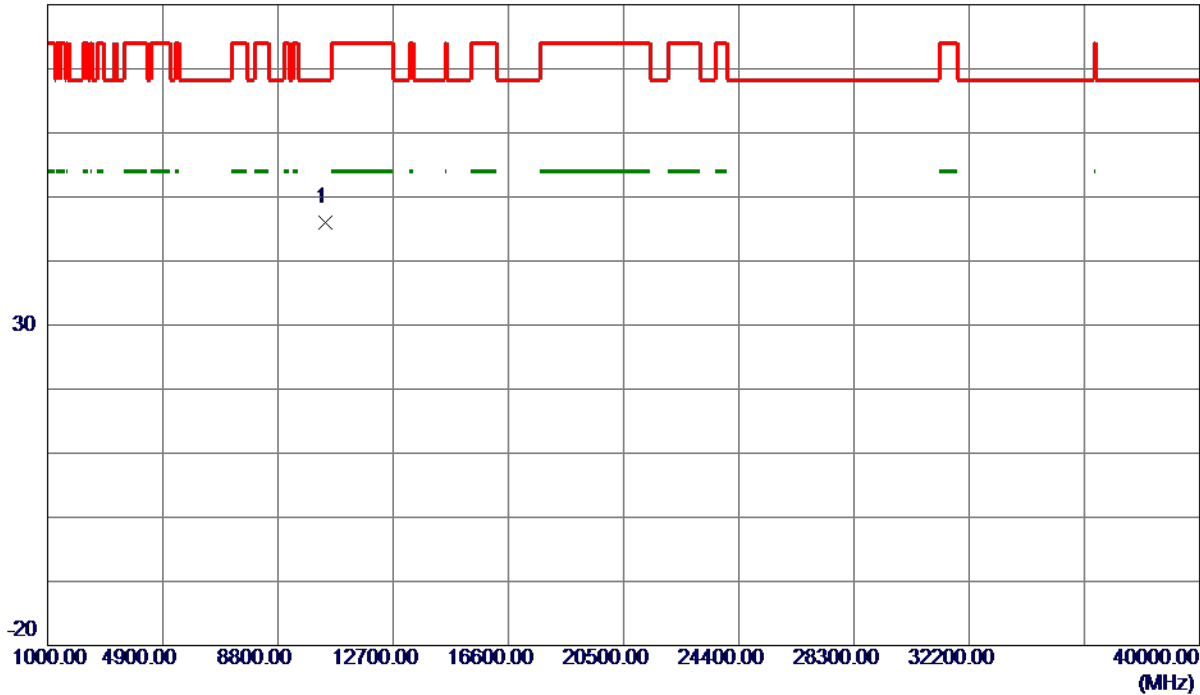


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10418.7950	32.01	13.93	45.94	68.30	-22.36	Peak	

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5745 MHz

## Vertical

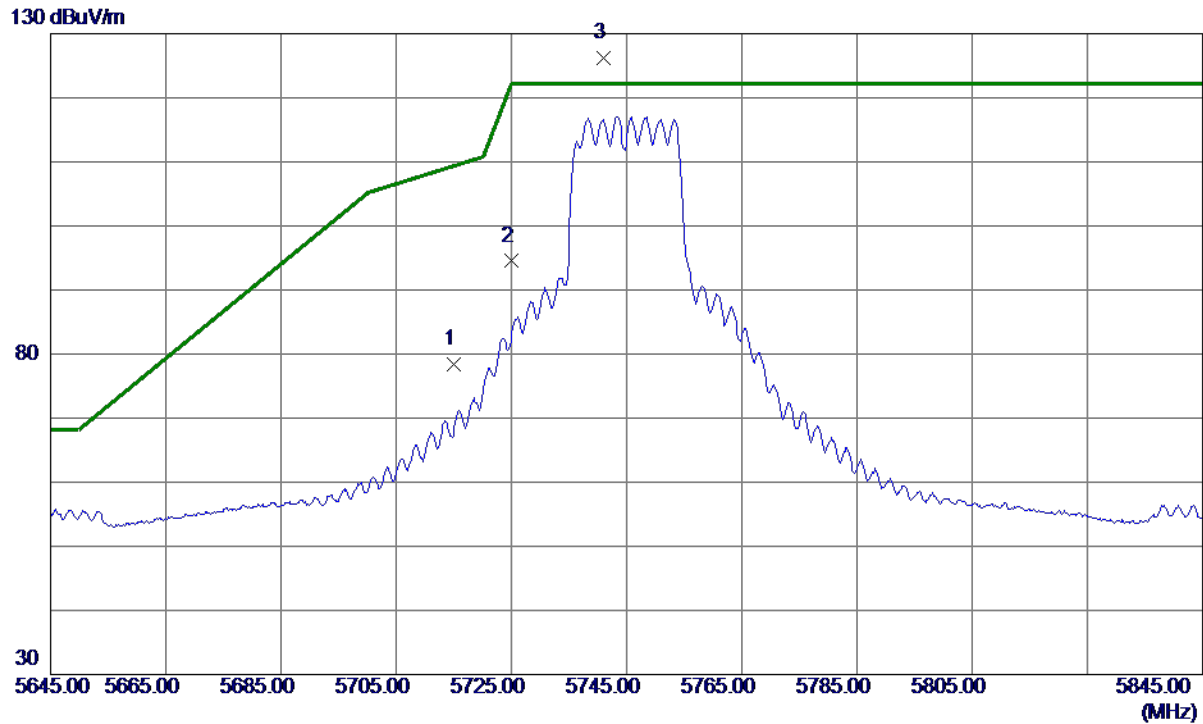

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	58.98	19.42	78.40	109.40	-31.00	Peak	
2	5725.0000	75.05	19.45	94.50	122.20	-27.70	Peak	
3 *	5741.1000	106.71	19.48	126.19	122.20	3.99	Peak	No Limit


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5745 MHz

## Vertical

80 dBuV/m

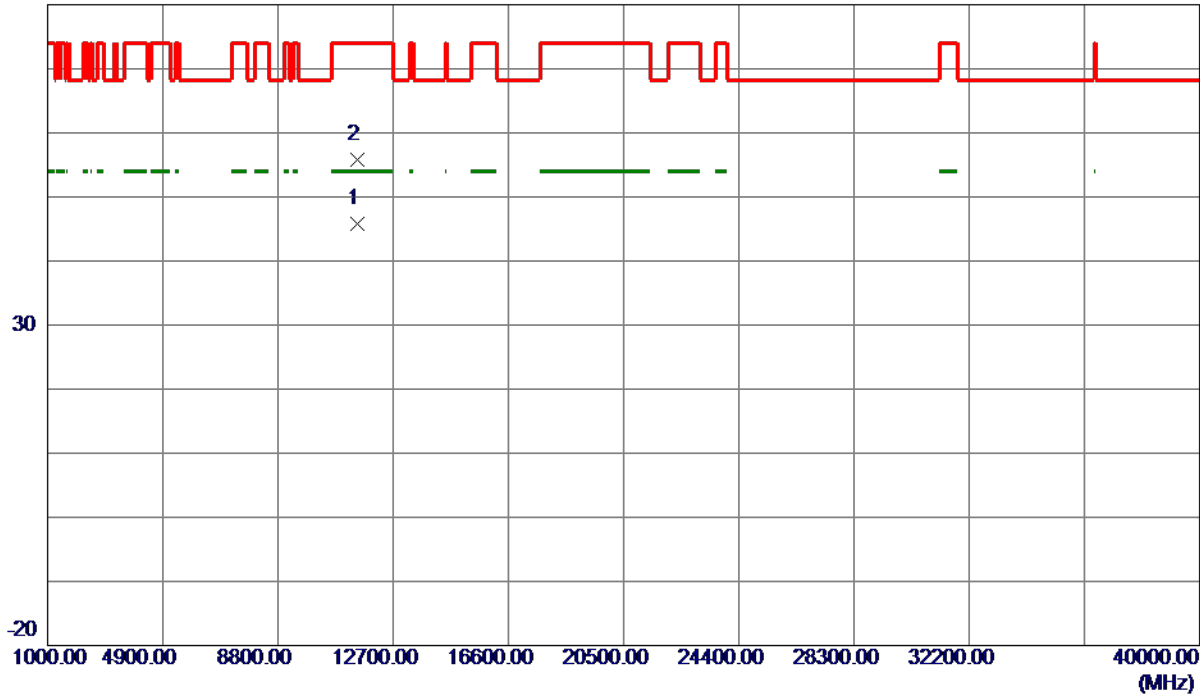

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11491.0500	28.85	16.95	45.80	54.00	-8.20	AVG	
2	11492.8250	38.90	16.96	55.86	74.00	-18.14	Peak	

### REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5745 MHz

## Horizontal

130 dBuV/m

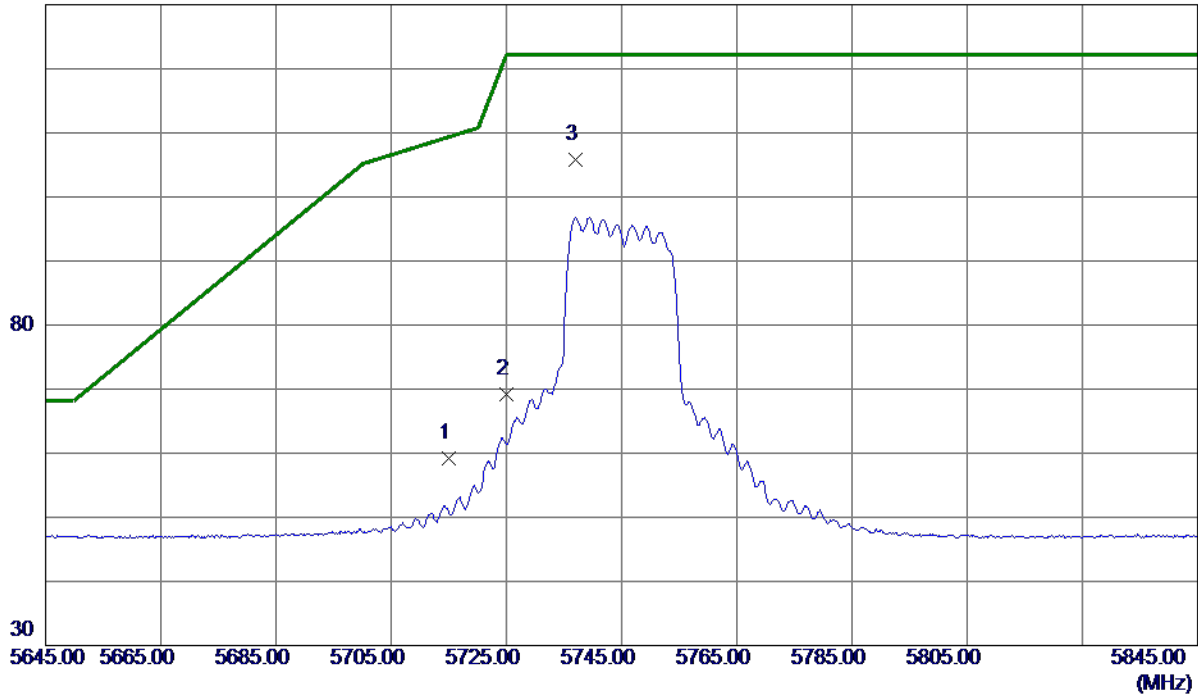

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	39.84	19.42	59.26	109.40	-50.14	Peak	
2	5725.0000	49.82	19.45	69.27	122.20	-52.93	Peak	
3 *	5737.0000	86.37	19.48	105.85	122.20	-16.35	Peak	No Limit


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5745 MHz

## Horizontal

80 dBuV/m

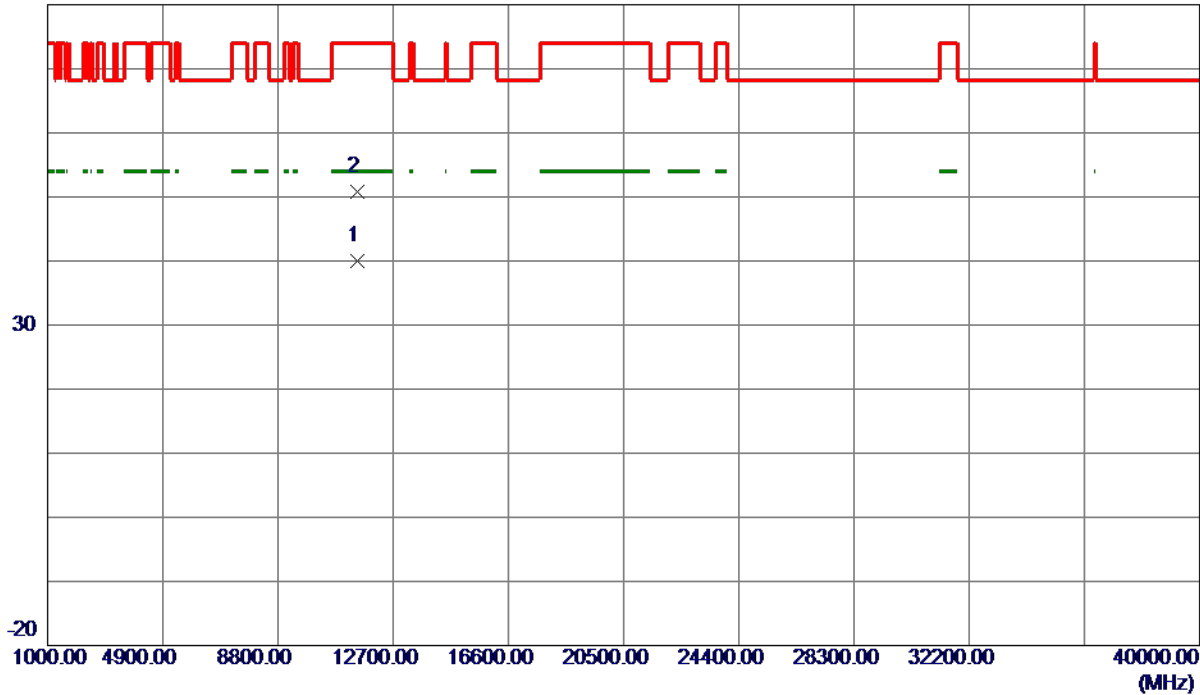


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11491.7100	22.97	16.96	39.93	54.00	-14.07	AVG	
2	11496.4900	33.79	16.97	50.76	74.00	-23.24	Peak	

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5785 MHz

## Vertical

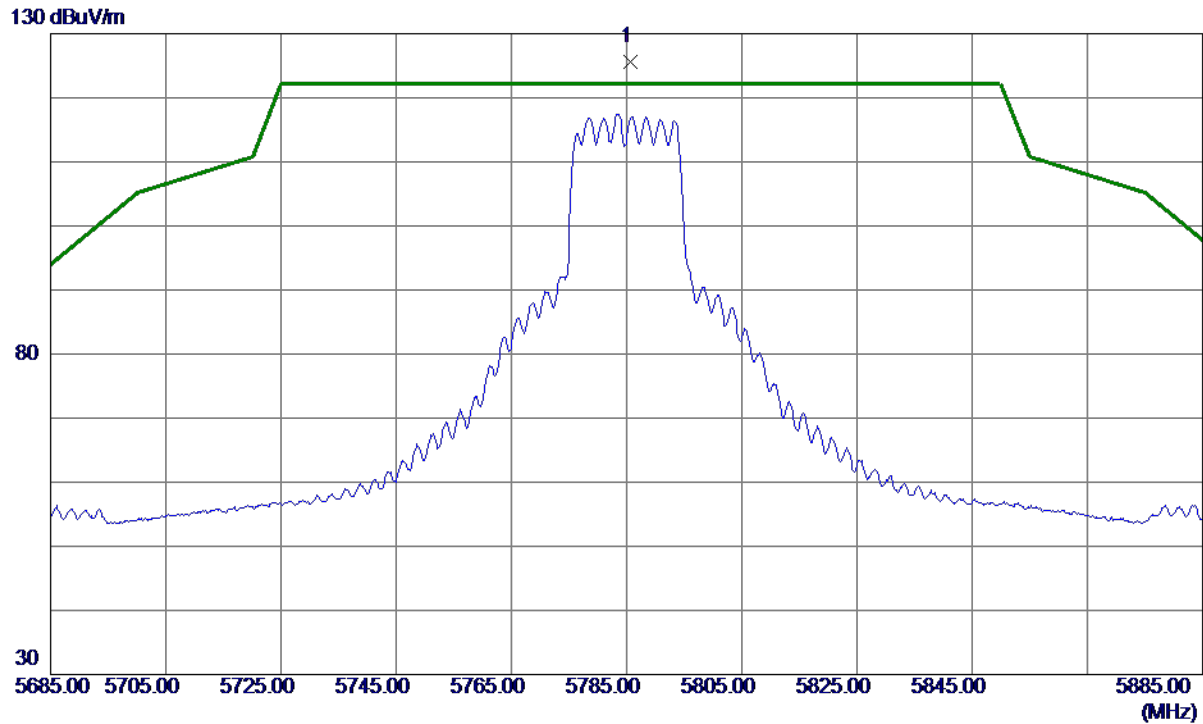

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5785.7000	106.08	19.59	125.67	122.20	3.47	Peak	No Limit


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5785 MHz

## Vertical

80 dBuV/m

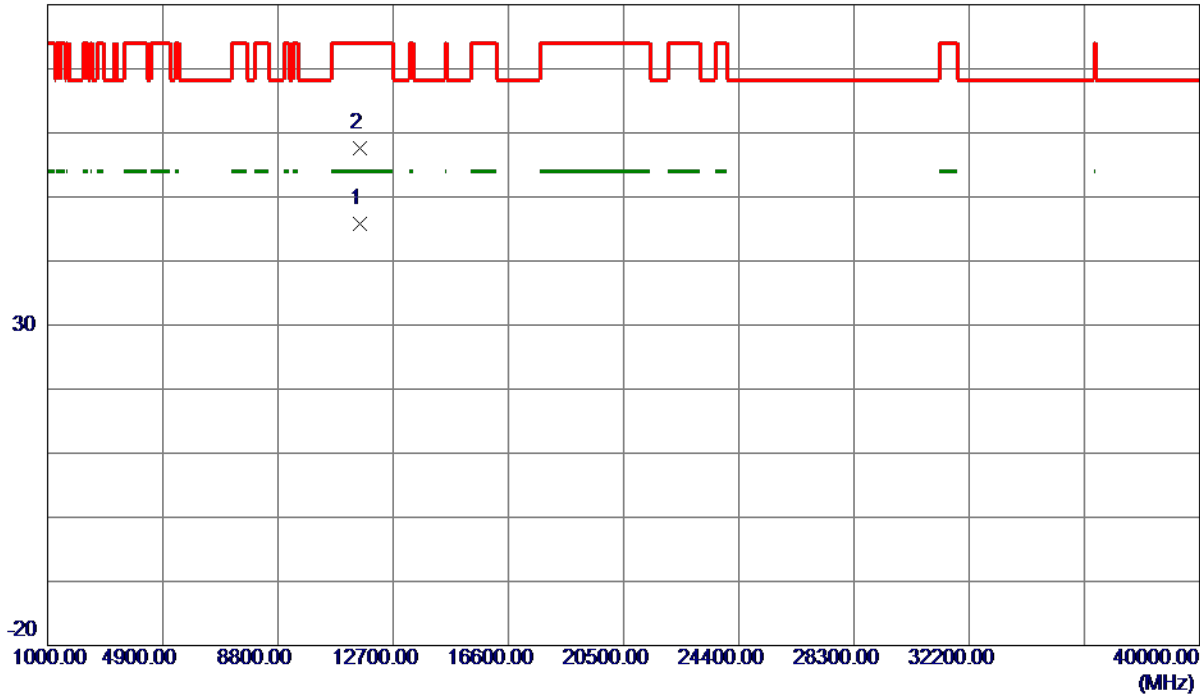

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11570.1500	28.81	17.04	45.85	54.00	-8.15	AVG	
2	11573.0000	40.57	17.05	57.62	74.00	-16.38	Peak	


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5785 MHz

## Horizontal

130 dBuV/m

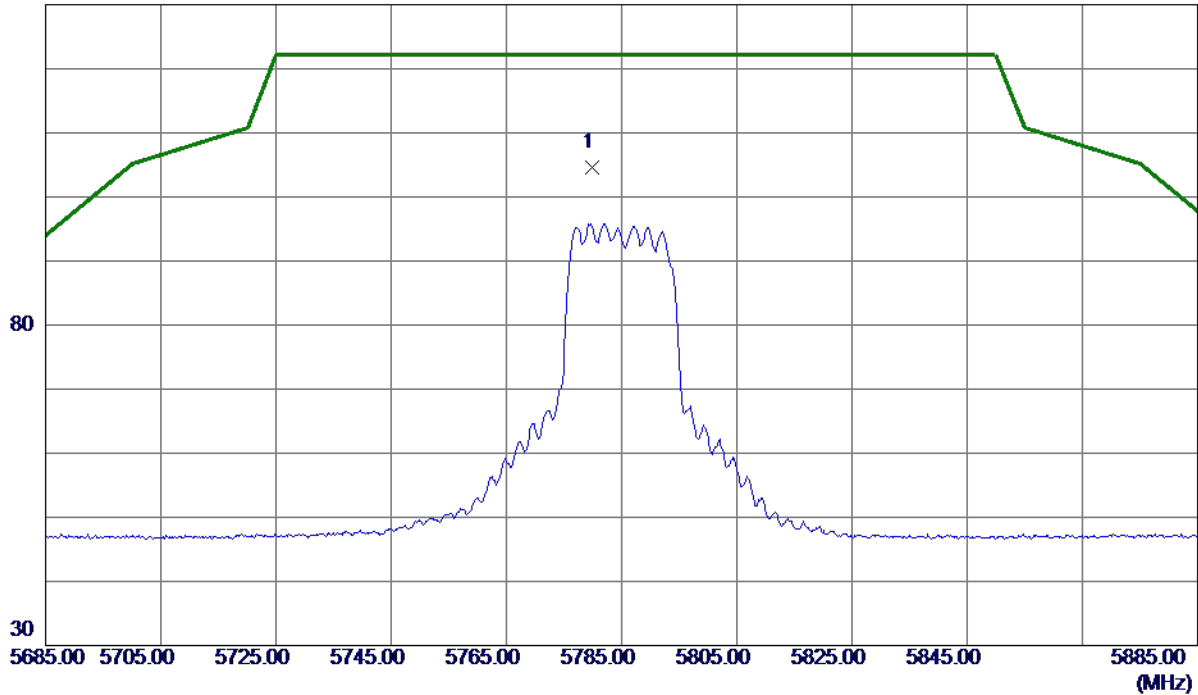

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5779.8000	85.04	19.57	104.61	122.20	-17.59	Peak	No Limit


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5785 MHz

## Horizontal

80 dBuV/m

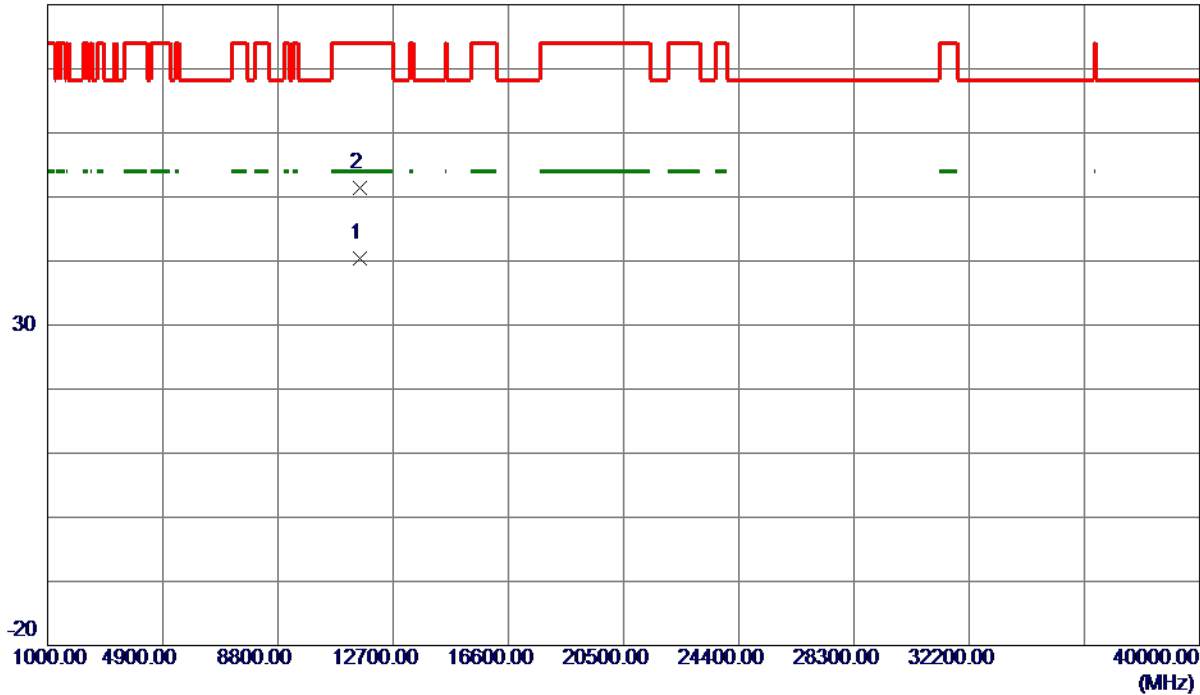


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11570.7699	23.39	17.05	40.44	54.00	-13.56	AVG	
2	11572.7600	34.43	17.05	51.48	74.00	-22.52	Peak	

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5825 MHz

## Vertical

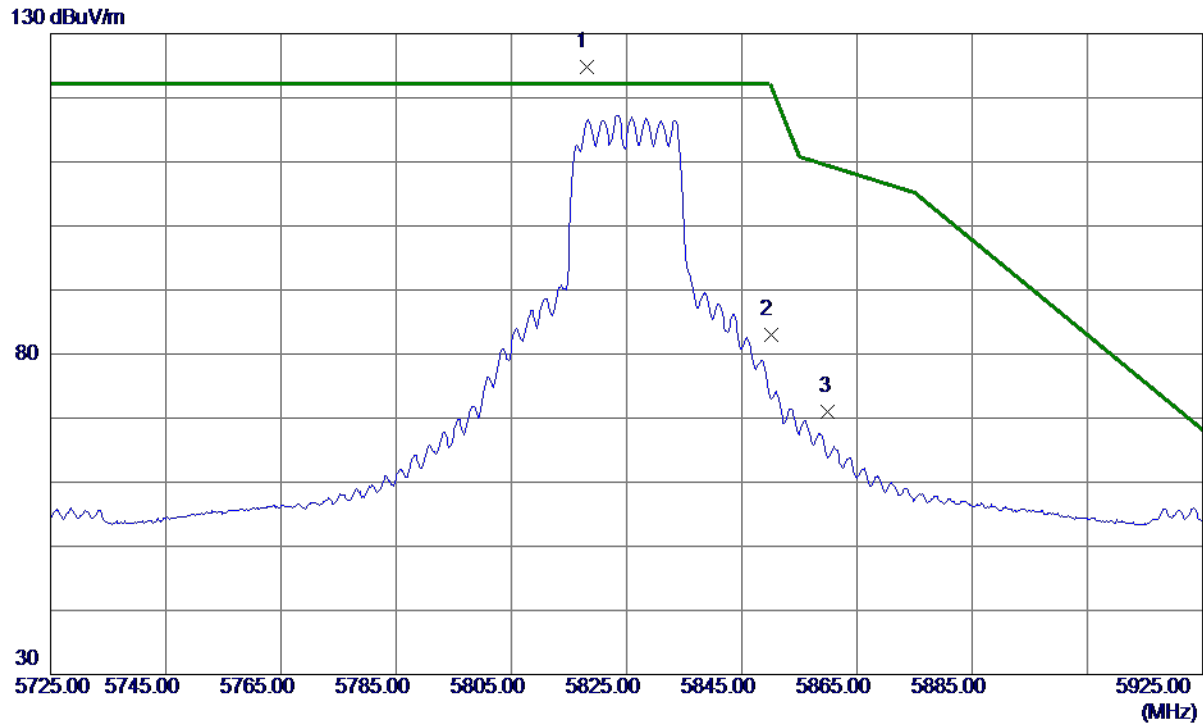

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5818.0000	105.06	19.66	124.72	122.20	2.52	Peak	No Limit
2	5850.0000	63.17	19.74	82.91	122.20	-39.29	Peak	
3	5860.0000	51.27	19.76	71.03	109.40	-38.37	Peak	


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5825 MHz

## Vertical

80 dBuV/m

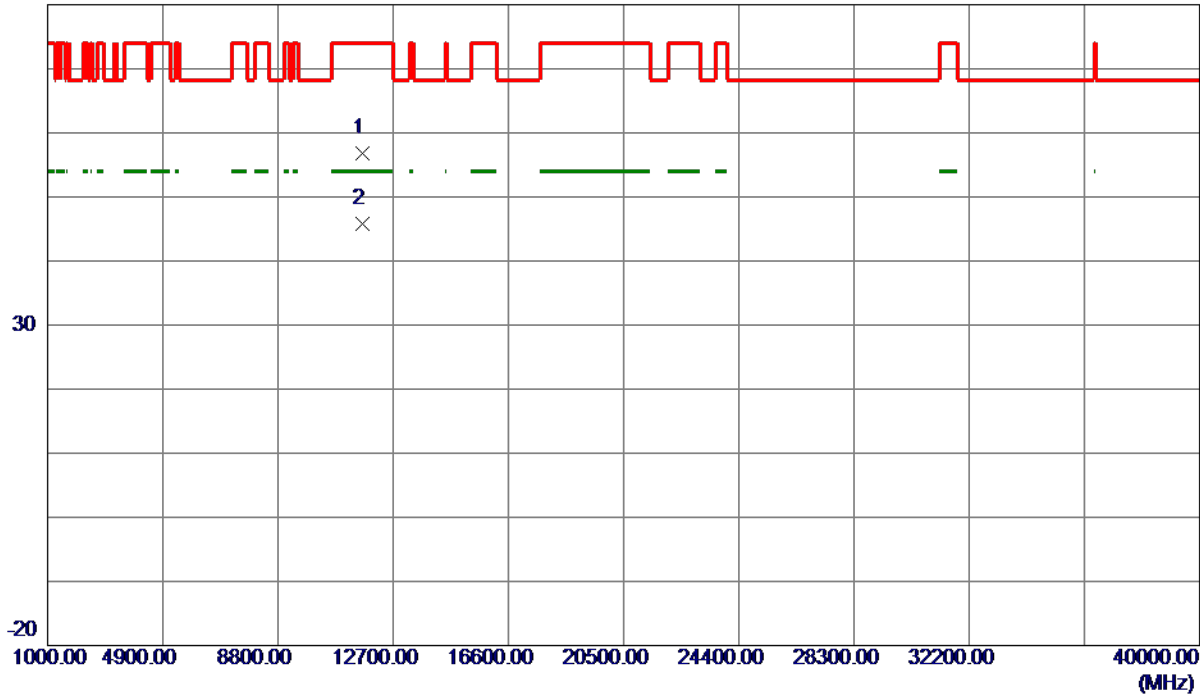

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11649.4250	39.61	17.12	56.73	74.00	-17.27	Peak	
2 *	11650.8000	28.76	17.12	45.88	54.00	-8.12	AVG	

### REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5825 MHz

## Horizontal

130 dBuV/m

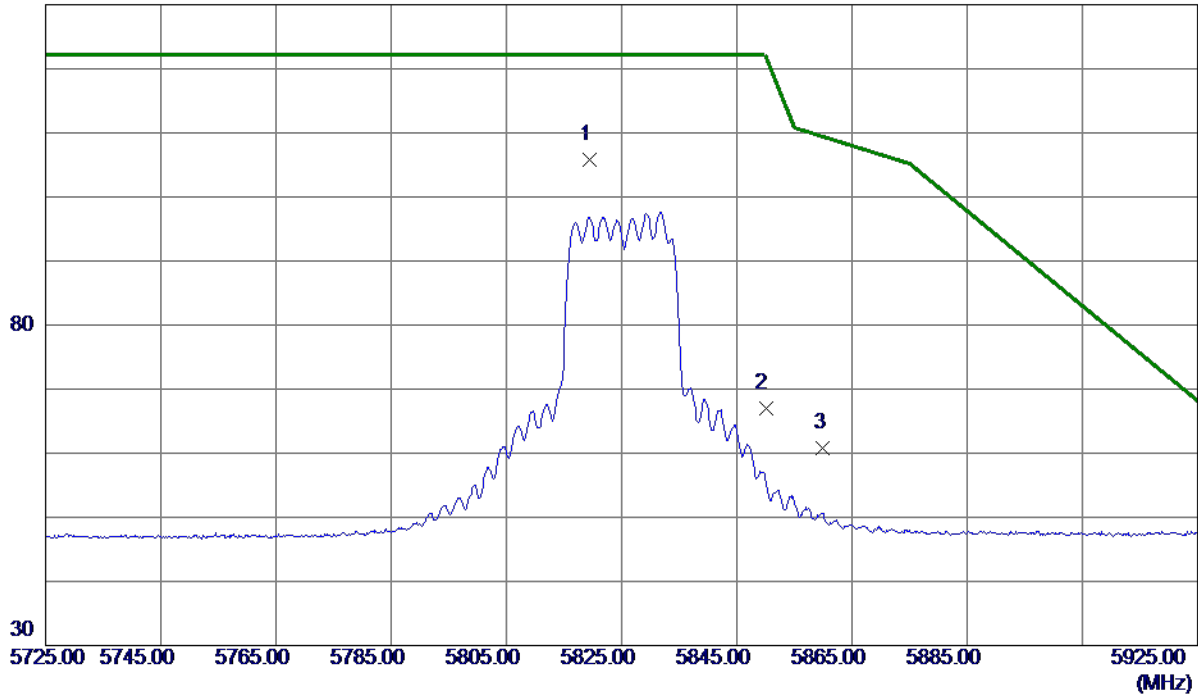

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5819.5000	86.12	19.66	105.78	122.20	-16.42	Peak	No Limit
2	5850.0000	47.32	19.74	67.06	122.20	-55.14	Peak	
3	5860.0000	41.02	19.76	60.78	109.40	-48.62	Peak	


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5825 MHz

## Horizontal

80 dBuV/m

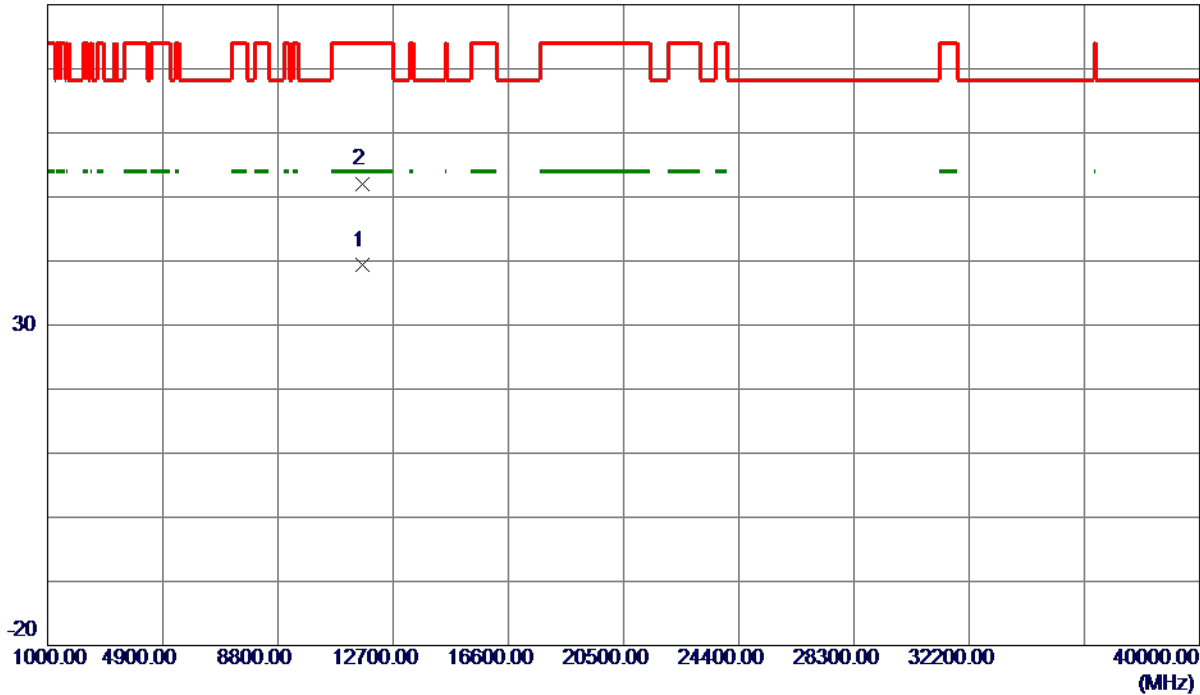

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11649.5800	22.18	17.12	39.30	54.00	-14.70	AVG	
2	11649.8300	34.93	17.12	52.05	74.00	-21.95	Peak	


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5755 MHz

## Vertical

130 dBuV/m

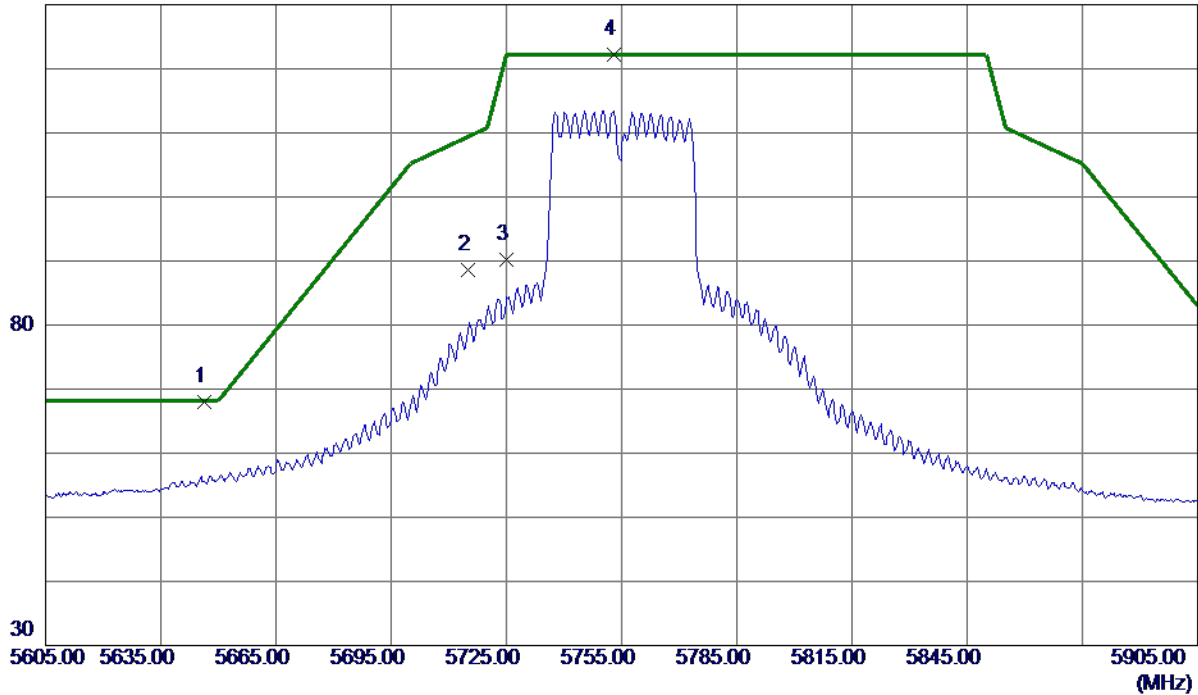

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5646.4000	48.76	19.27	68.03	68.20	-0.17	Peak	
2	5715.0000	69.09	19.42	88.51	109.40	-20.89	Peak	
3	5725.0000	70.73	19.45	90.18	122.20	-32.02	Peak	
4 *	5752.9000	102.79	19.51	122.30	122.20	0.10	Peak	No Limit


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5755 MHz

## Vertical

80 dBuV/m

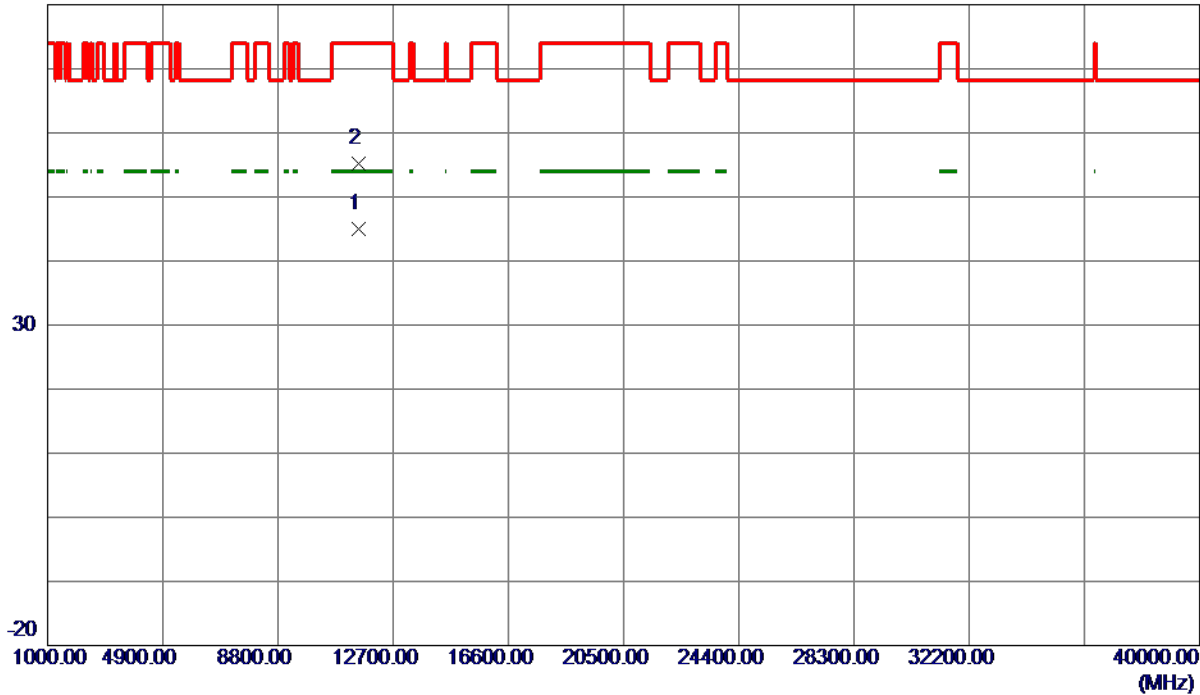

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11509.1250	28.02	16.99	45.01	54.00	-8.99	AVG	
2	11521.2500	38.13	17.00	55.13	74.00	-18.87	Peak	


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5755 MHz

## Horizontal

130 dBuV/m

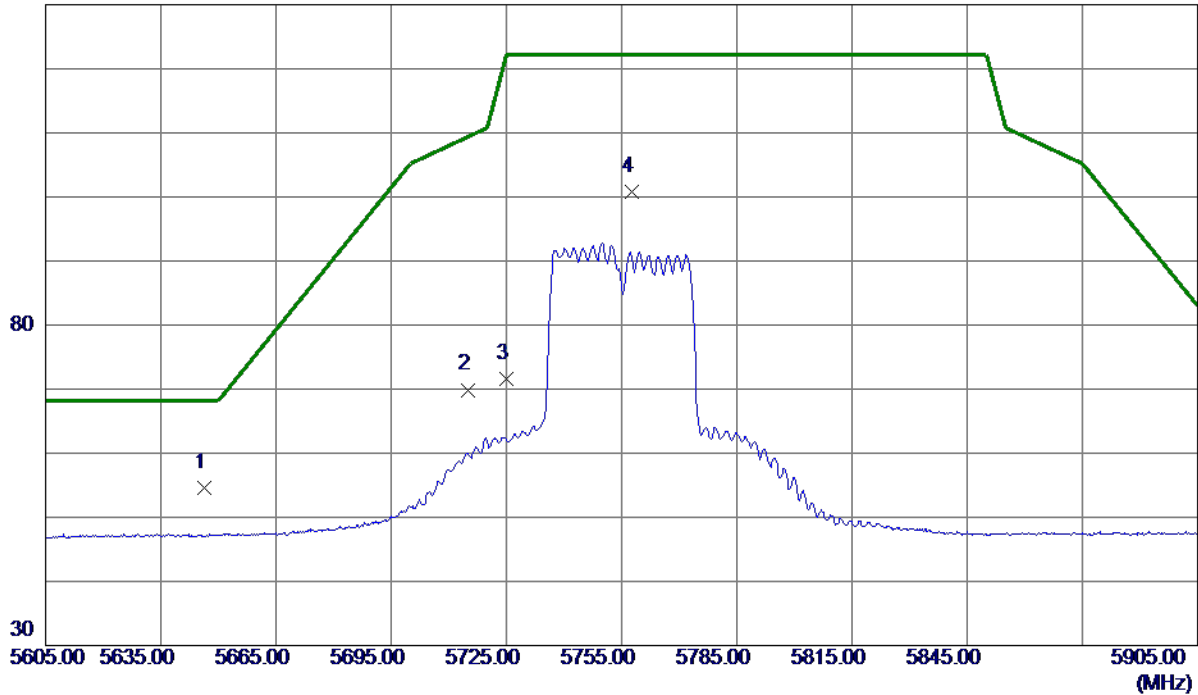

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5646.4000	35.38	19.27	54.65	68.20	-13.55	Peak	
2	5715.0000	50.48	19.42	69.90	109.40	-39.50	Peak	
3	5725.0000	52.22	19.45	71.67	122.20	-50.53	Peak	
4	5757.5500	81.31	19.52	100.83	122.20	-21.37	Peak	No Limit


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5755 MHz

## Horizontal

80 dBuV/m

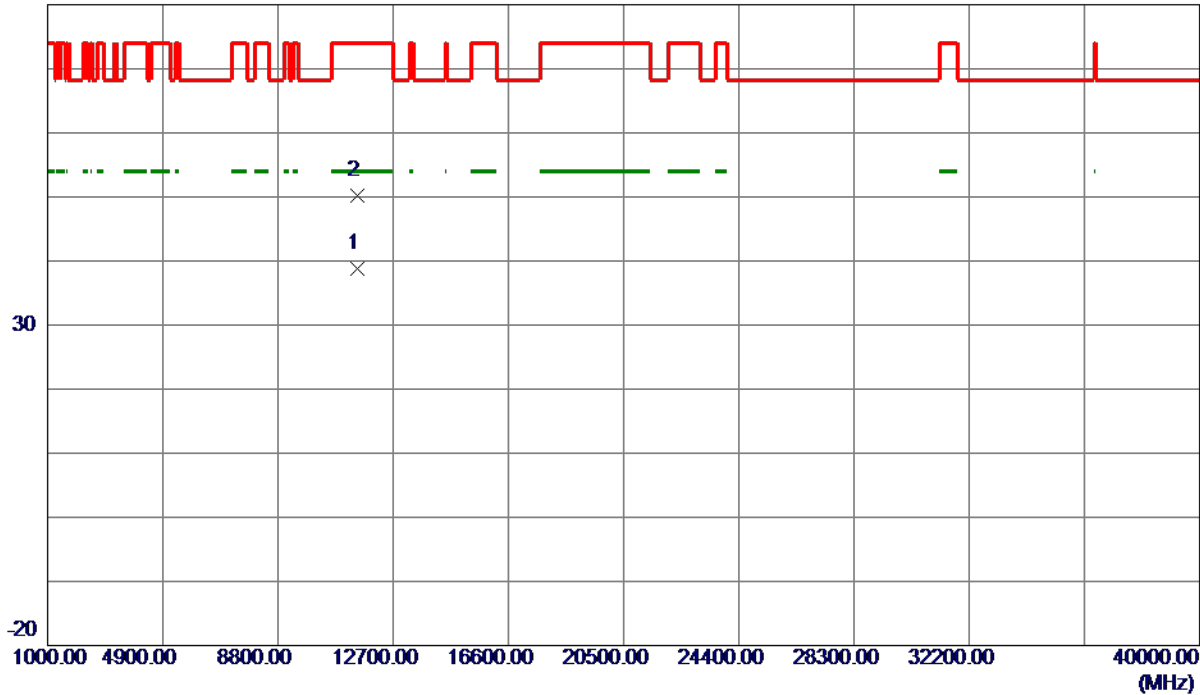

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11504.0400	21.80	16.98	38.78	54.00	-15.22	AVG	
2	11504.1400	33.16	16.98	50.14	74.00	-23.86	Peak	


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5795 MHz

## Vertical

130 dBuV/m

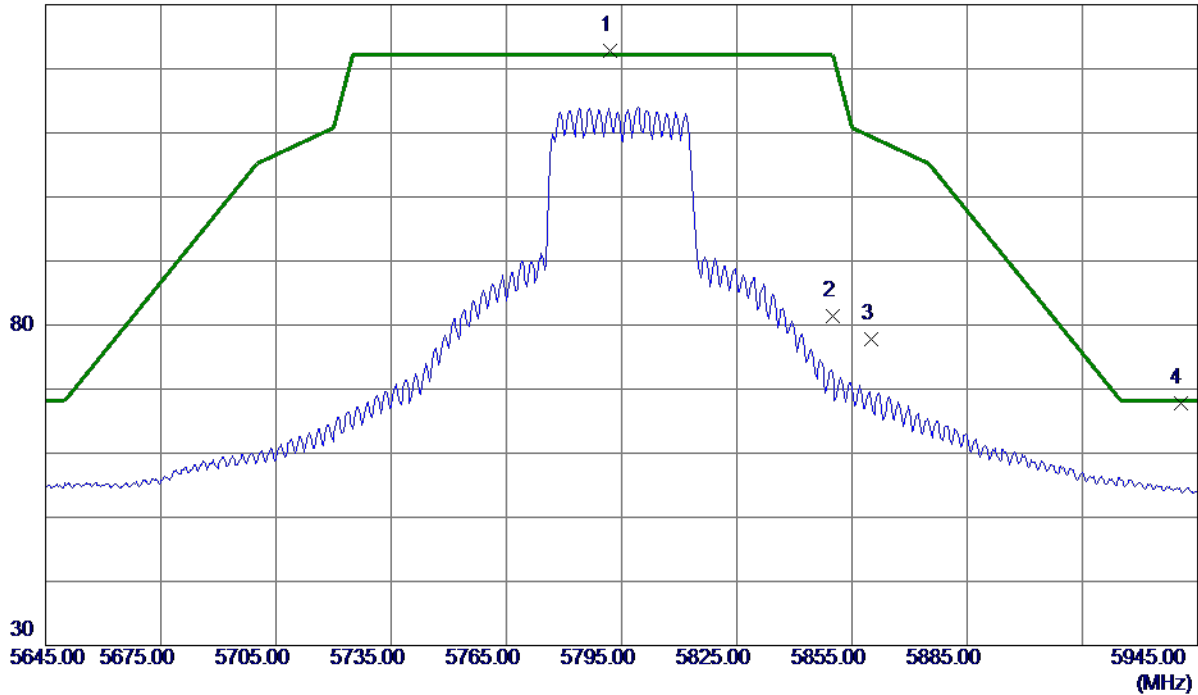

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5791.8500	103.20	19.60	122.80	122.20	0.60	Peak	No Limit
2	5850.0000	61.69	19.74	81.43	122.20	-40.77	Peak	
3	5860.0000	58.08	19.76	77.84	109.40	-31.56	Peak	
4	5940.5000	47.93	19.94	67.87	68.20	-0.33	Peak	

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5795 MHz

## Vertical

80 dBuV/m

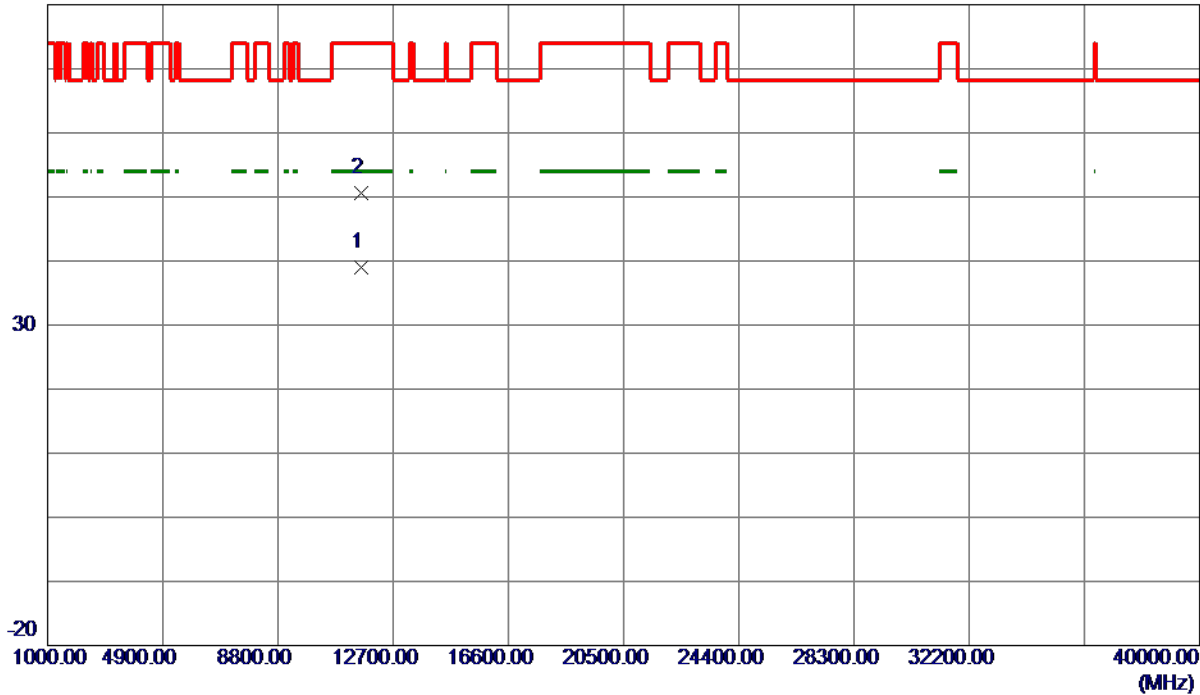

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11595.5500	21.93	17.07	39.00	54.00	-15.00	AVG	
2	11599.8250	33.46	17.07	50.53	74.00	-23.47	Peak	

### REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5795 MHz

## Horizontal

130 dBuV/m

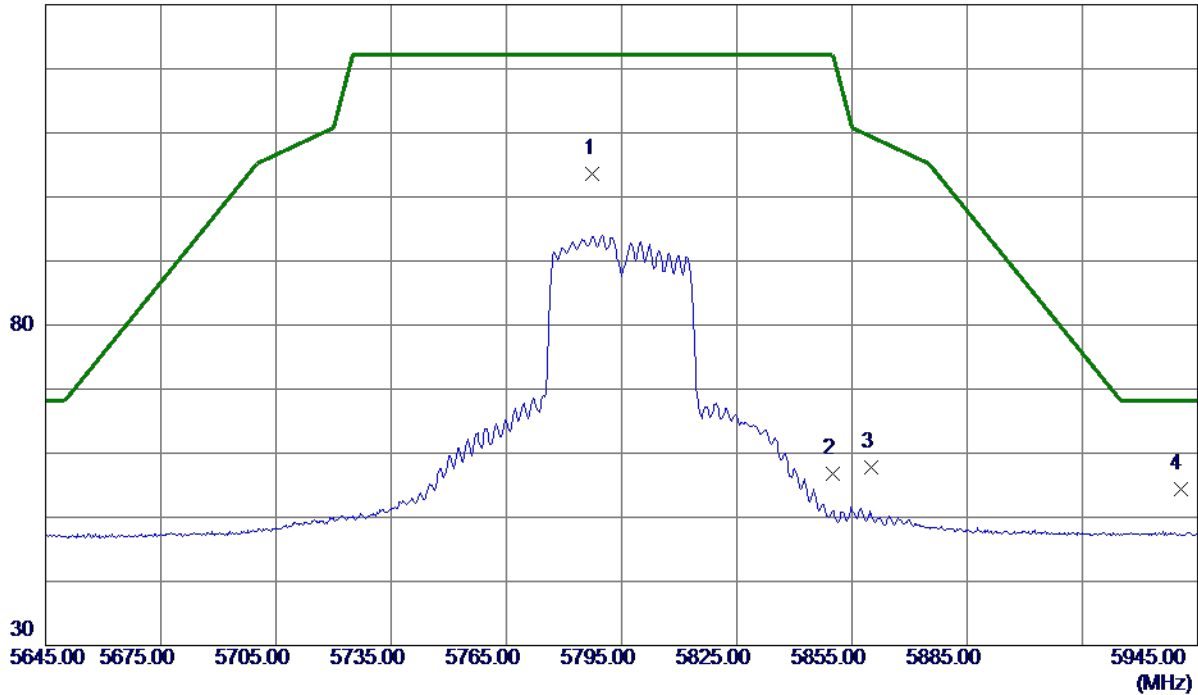

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5787.5000	83.99	19.59	103.58	122.20	-18.62	Peak	No Limit
2	5850.0000	37.07	19.74	56.81	122.20	-65.39	Peak	
3	5860.0000	38.01	19.76	57.77	109.40	-51.63	Peak	
4 *	5940.5000	34.51	19.94	54.45	68.20	-13.75	Peak	


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5795 MHz

## Horizontal

80 dBuV/m

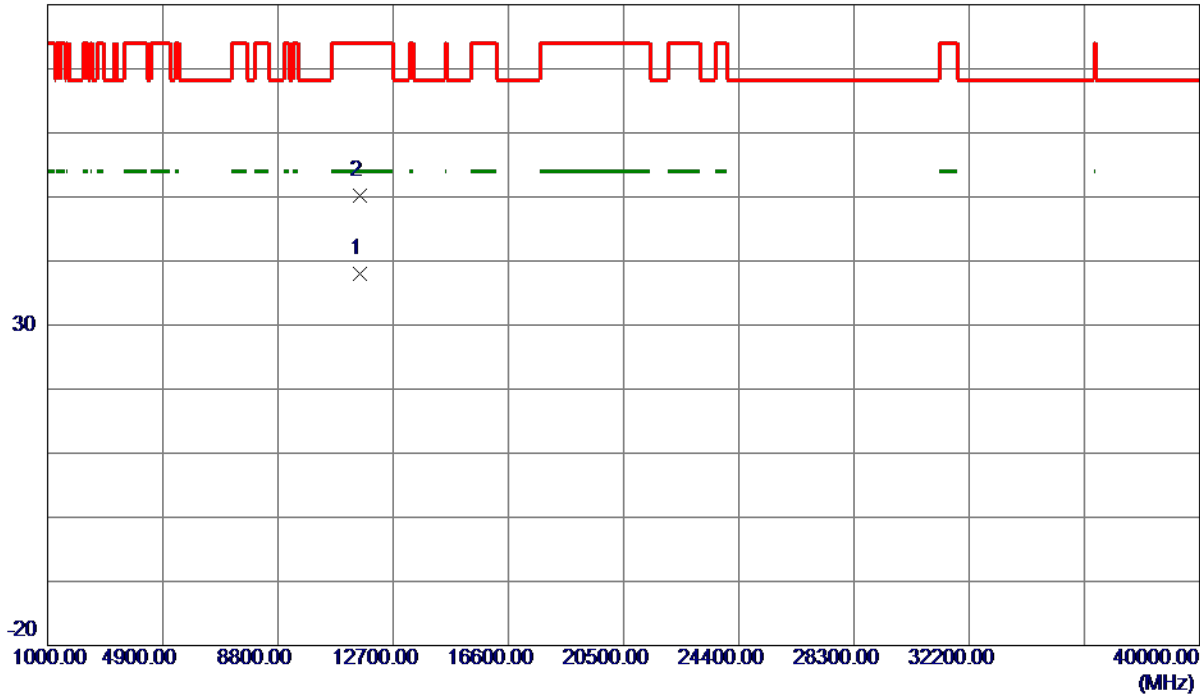

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11582.8900	21.00	17.06	38.06	54.00	-15.94	AVG	
2	11590.1800	33.18	17.06	50.24	74.00	-23.76	Peak	


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT80) Mode 5775 MHz

## Vertical

130 dBuV/m

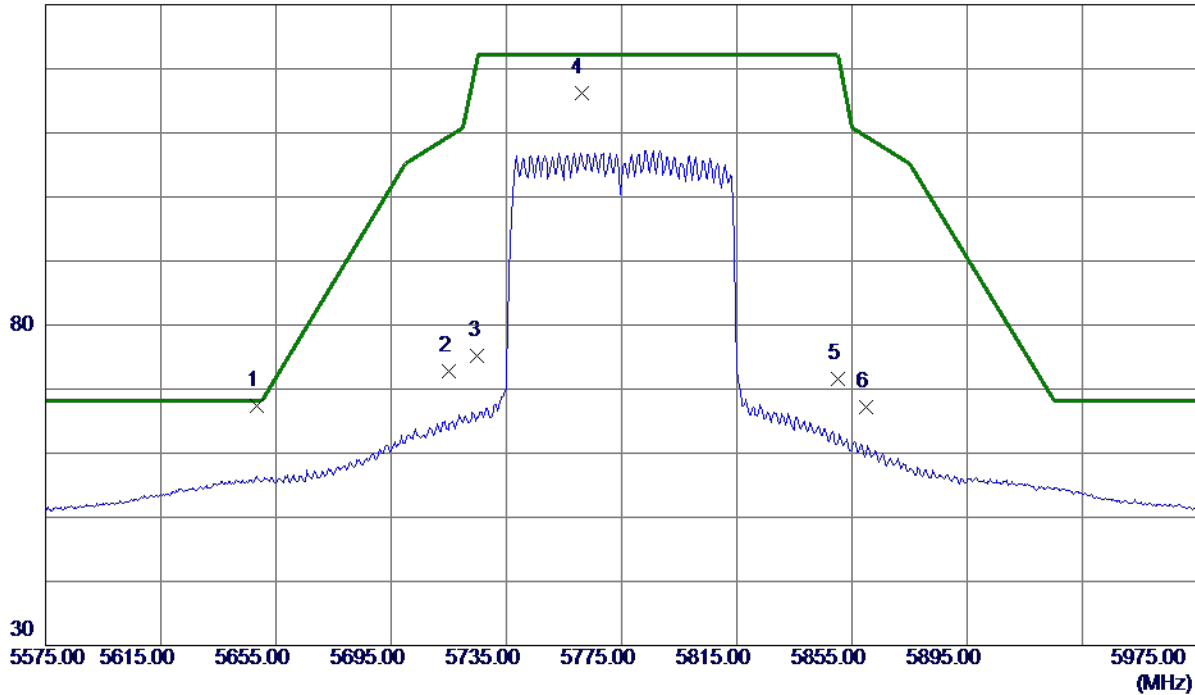

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5648.2000	48.13	19.27	67.40	68.20	-0.80	Peak	
2	5715.0000	53.33	19.42	72.75	109.40	-36.65	Peak	
3	5725.0000	55.74	19.45	75.19	122.20	-47.01	Peak	
4	5761.0000	96.60	19.53	116.13	122.20	-6.07	Peak	No Limit
5	5850.0000	51.88	19.74	71.62	122.20	-50.58	Peak	
6	5860.0000	47.44	19.76	67.20	109.40	-42.20	Peak	


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT80) Mode 5775 MHz

## Vertical

80 dBuV/m

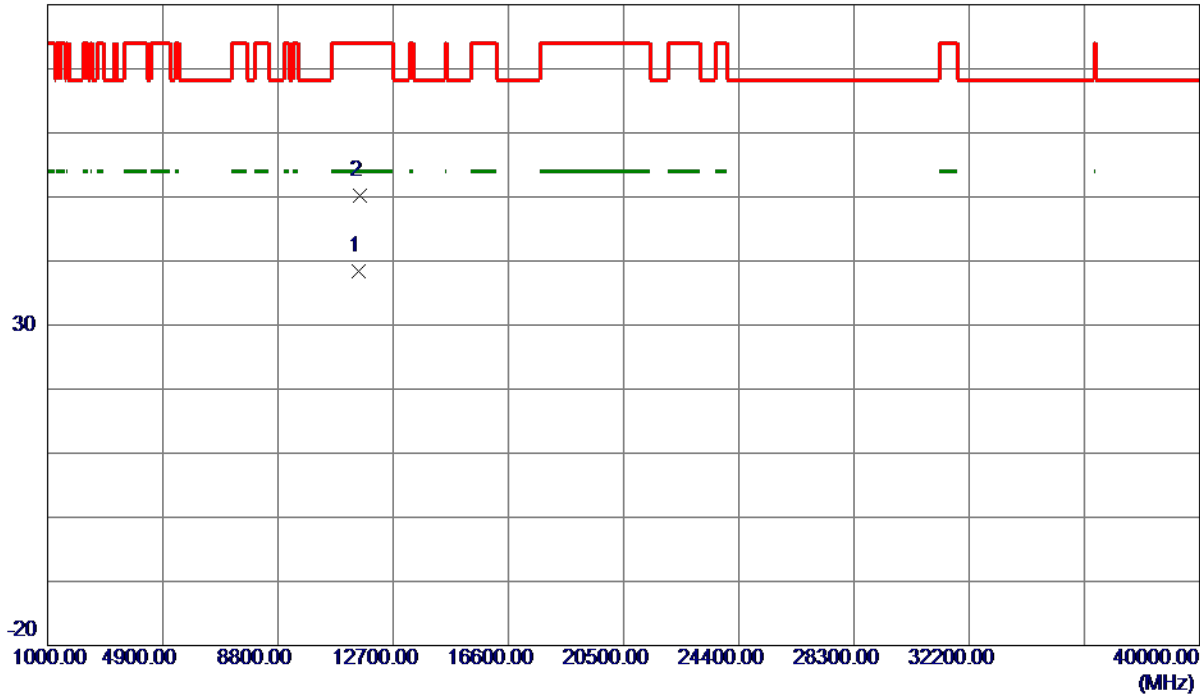

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11547.4000	21.44	17.02	38.46	54.00	-15.54	AVG	
2	11563.2500	33.21	17.04	50.25	74.00	-23.75	Peak	


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT80) Mode 5775 MHz

## Horizontal

130 dBuV/m

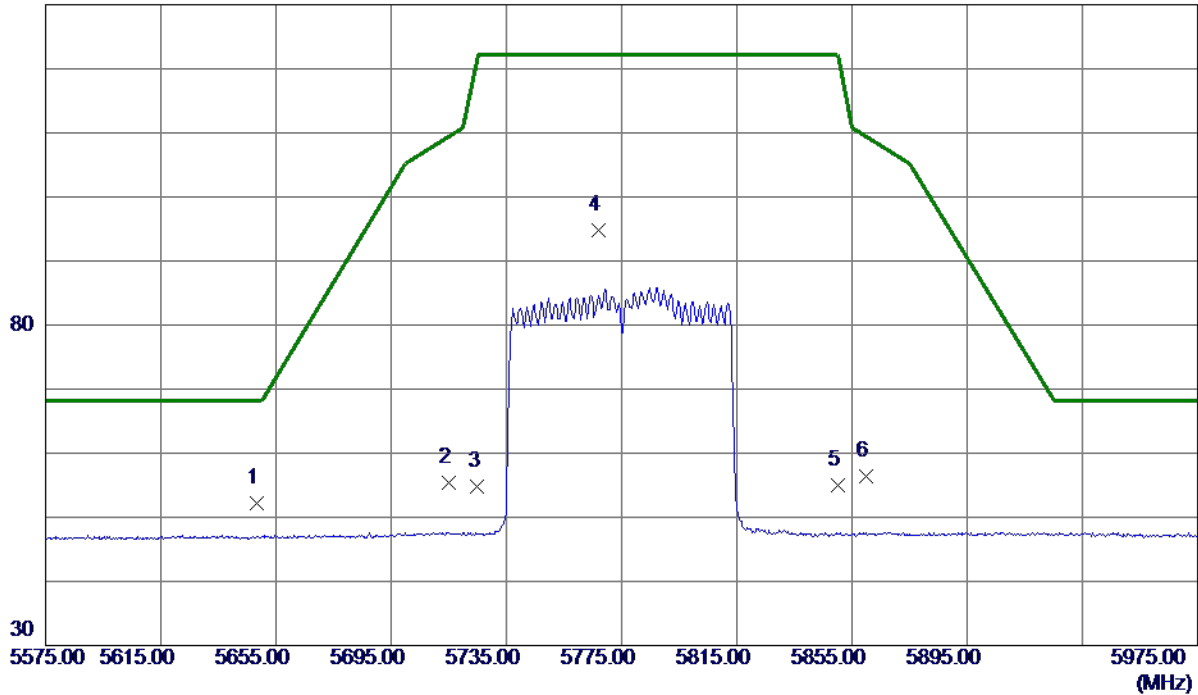

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5648.2000	33.01	19.27	52.28	68.20	-15.92	Peak	
2	5715.0000	35.90	19.42	55.32	109.40	-54.08	Peak	
3	5725.0000	35.42	19.45	54.87	122.20	-67.33	Peak	
4	5767.0000	75.21	19.54	94.75	122.20	-27.45	Peak	No Limit
5	5850.0000	35.25	19.74	54.99	122.20	-67.21	Peak	
6	5860.0000	36.71	19.76	56.47	109.40	-52.93	Peak	


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT80) Mode 5775 MHz

## Horizontal

80 dBuV/m

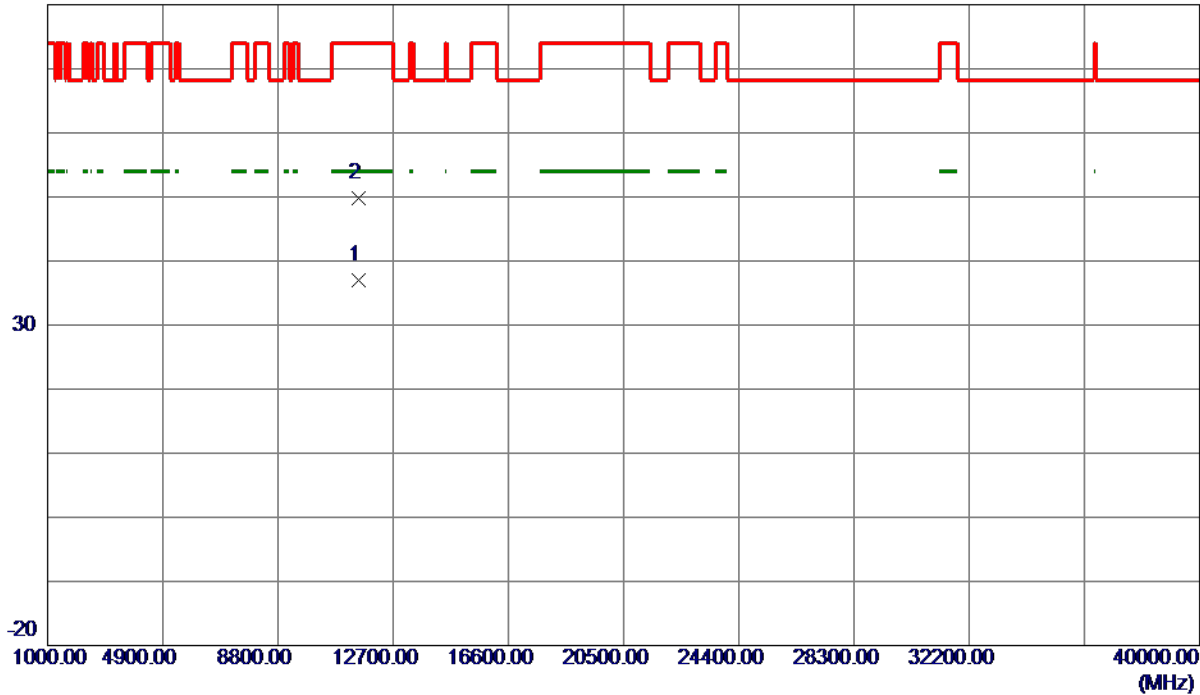


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11546.6300	19.90	17.02	36.92	54.00	-17.08	AVG	
2	11547.0900	32.75	17.02	49.77	74.00	-24.23	Peak	

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HEW20) Mode 5180 MHz

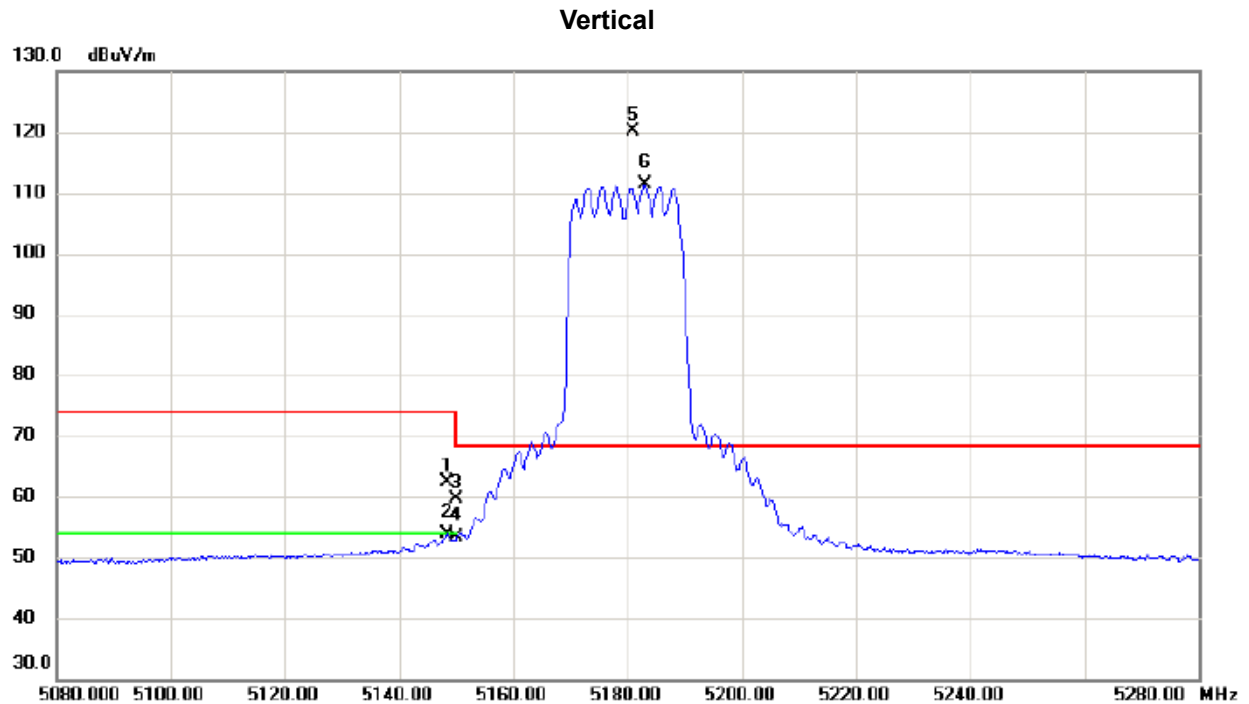

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5148.300	43.71	18.57	62.28	74.00	-11.72	peak	
2		5148.300	35.21	18.57	53.78	54.00	-0.22	AVG	
3		5150.000	41.02	18.57	59.59	74.00	-14.41	peak	
4		5150.000	34.76	18.57	53.33	54.00	-0.67	AVG	
5 *		5180.900	101.62	18.60	120.22	68.30	51.92	peak	No Limit
6 X		5183.000	92.74	18.60	111.34	68.30	43.04	AVG	No Limit


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HEW20) Mode 5180 MHz

## Vertical

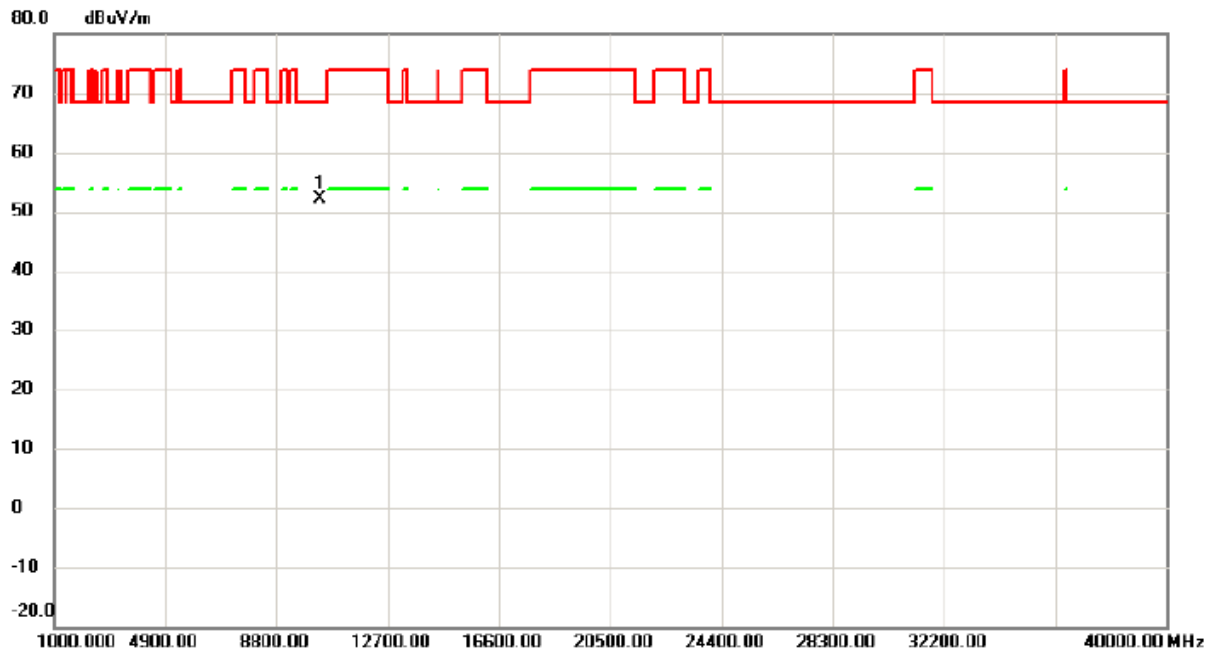


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10356.650	38.24	13.80	52.04	68.30	-16.26	peak	

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HEW20) Mode 5180 MHz

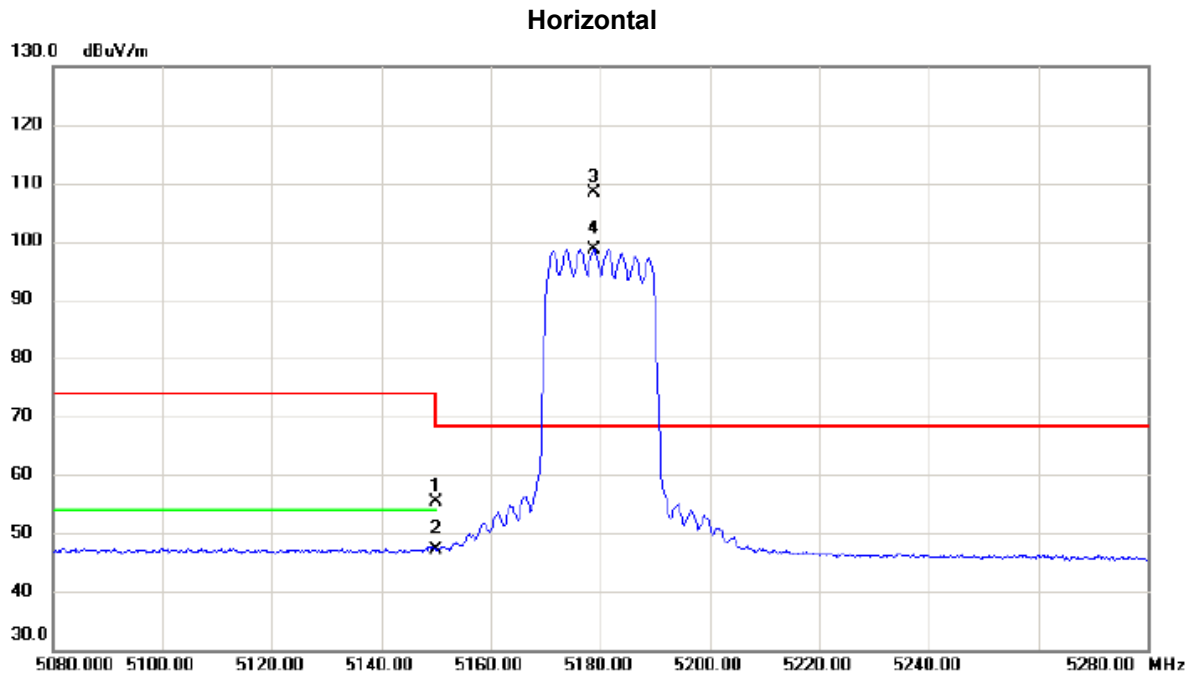

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5150.000	36.73	18.57	55.30	74.00	-18.70	peak	
2		5150.000	28.54	18.57	47.11	54.00	-6.89	AVG	
3	*	5178.800	89.67	18.60	108.27	68.30	39.97	peak	No Limit
4	X	5178.900	80.07	18.60	98.67	68.30	30.37	AVG	No Limit


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HEW20) Mode 5180 MHz

## Horizontal

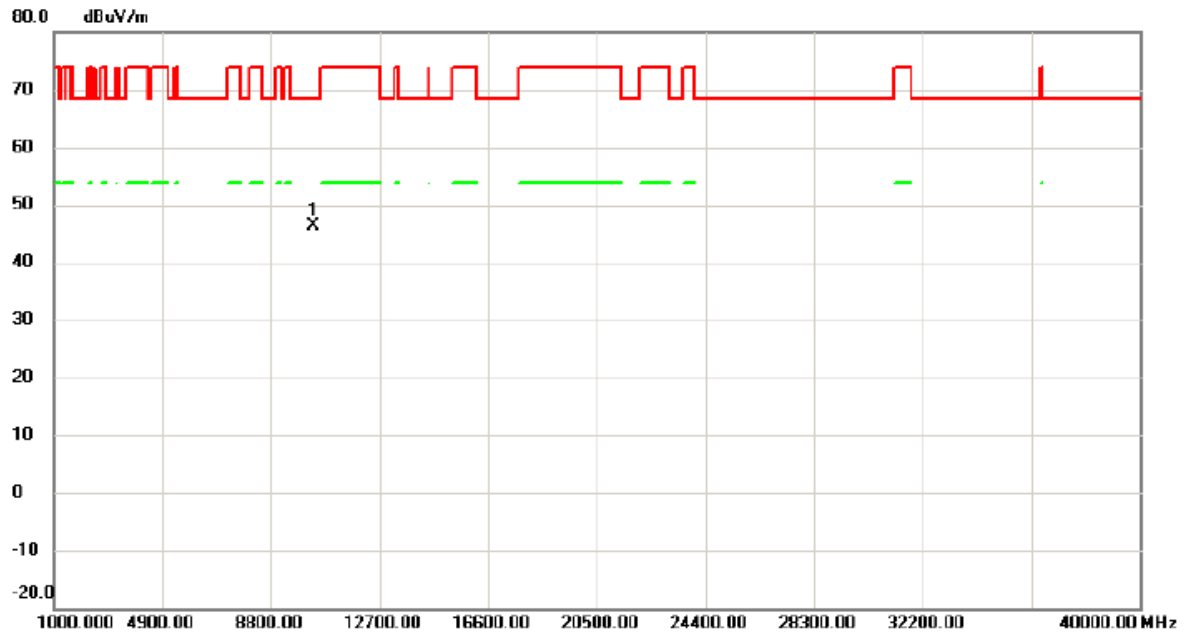


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10356.740	32.68	13.80	46.48	68.30	-21.82	peak	

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HEW20) Mode 5200 MHz

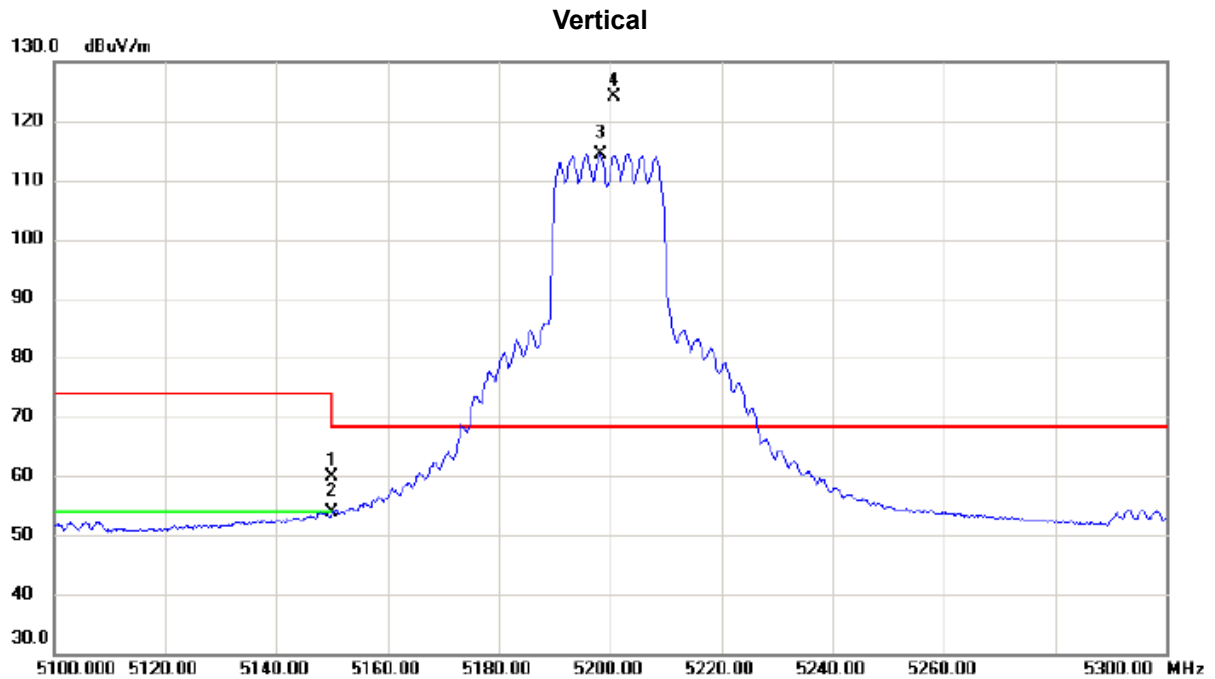


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	41.36	18.57	59.93	74.00	-14.07	peak	
2		5150.000	35.20	18.57	53.77	54.00	-0.23	AVG	
3	X	5198.300	95.76	18.62	114.38	68.30	46.08	AVG	No Limit
4	*	5200.700	105.52	18.62	124.14	68.30	55.84	peak	No Limit

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HEW20) Mode 5200 MHz

## Vertical

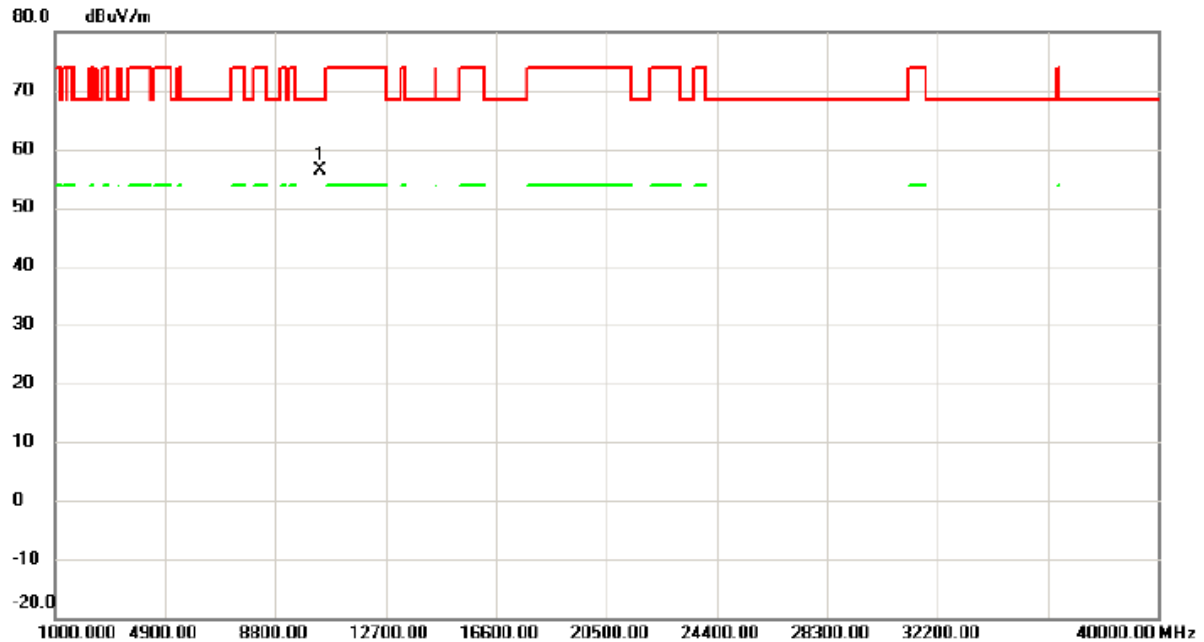


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	1040.825	42.52	13.89	56.41	68.30	-11.89	peak	

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HEW20) Mode 5200 MHz

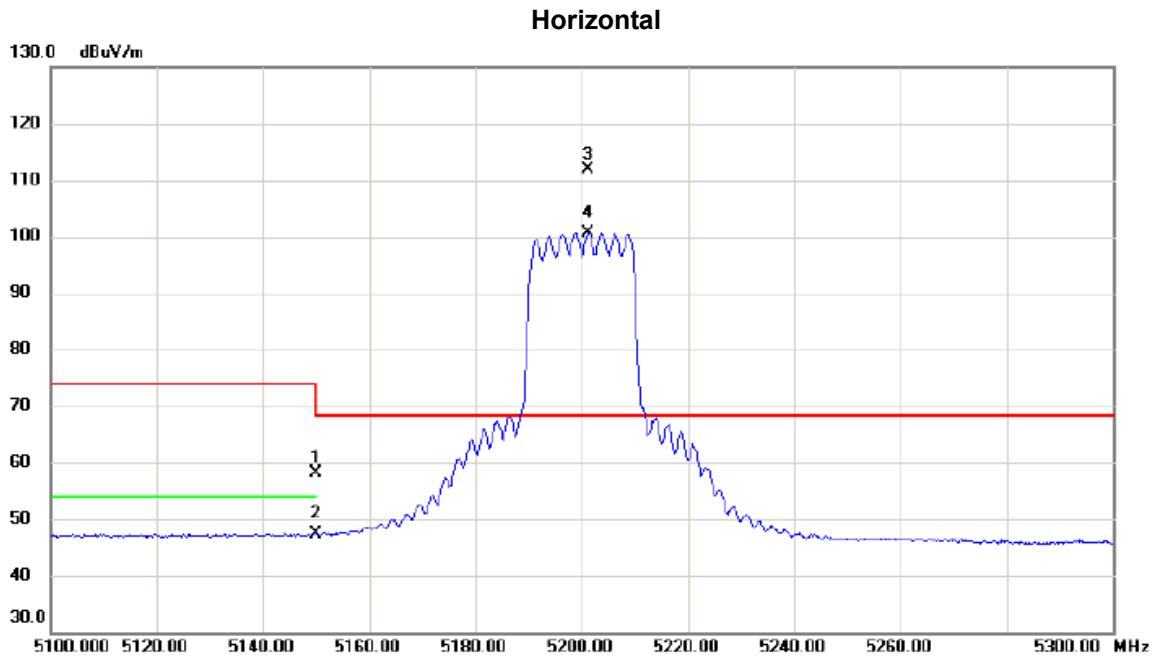


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	39.55	18.57	58.12	74.00	-15.88	peak	
2		5150.000	28.73	18.57	47.30	54.00	-6.70	AVG	
3	*	5201.200	93.19	18.62	111.81	68.30	43.51	peak	No Limit
4	X	5201.200	82.09	18.62	100.71	68.30	32.41	AVG	No Limit

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HEW20) Mode 5200 MHz

## Horizontal

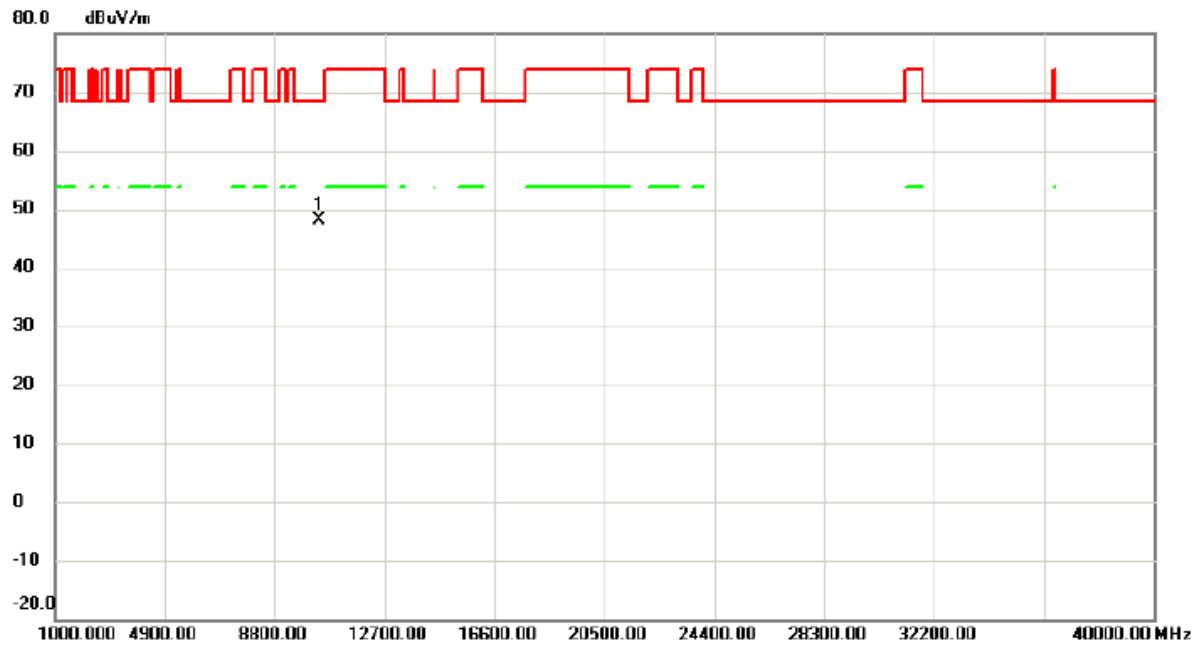


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10396.865	34.12	13.89	48.01	68.30	-20.29	peak	

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HEW20) Mode 5240 MHz

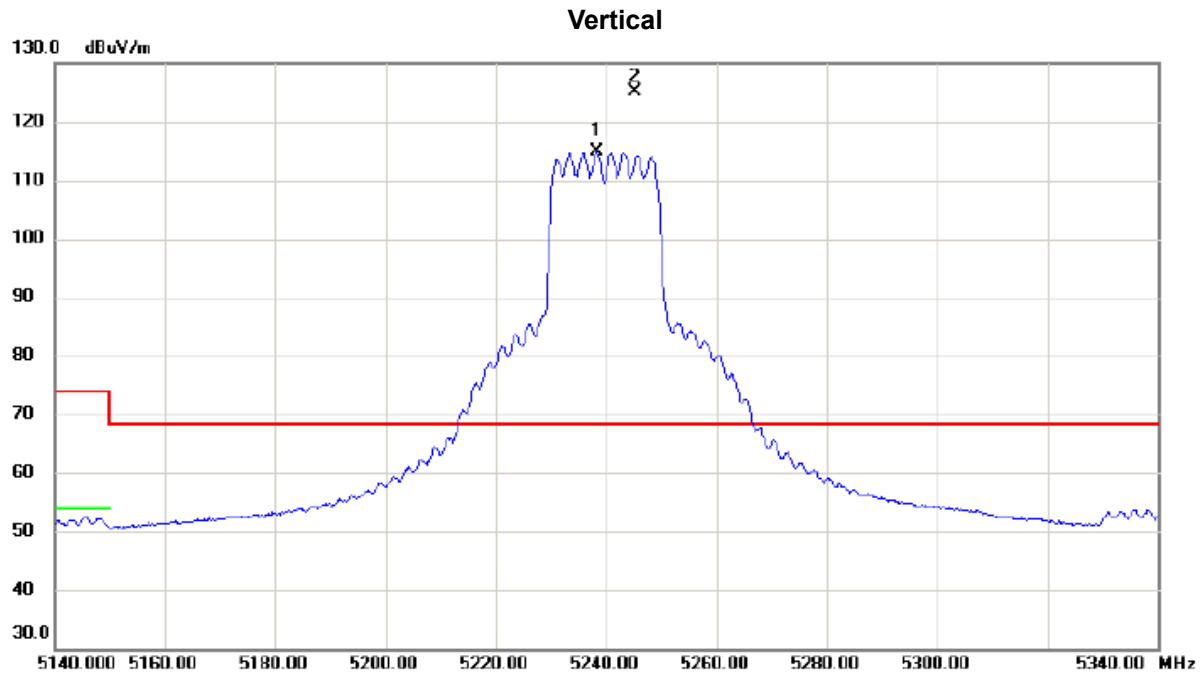

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5238.400	96.11	18.66	114.77	68.30	46.47	AVG	No Limit
2	*	5245.200	106.37	18.67	125.04	68.30	56.74	peak	No Limit


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HEW20) Mode 5240 MHz

## Vertical

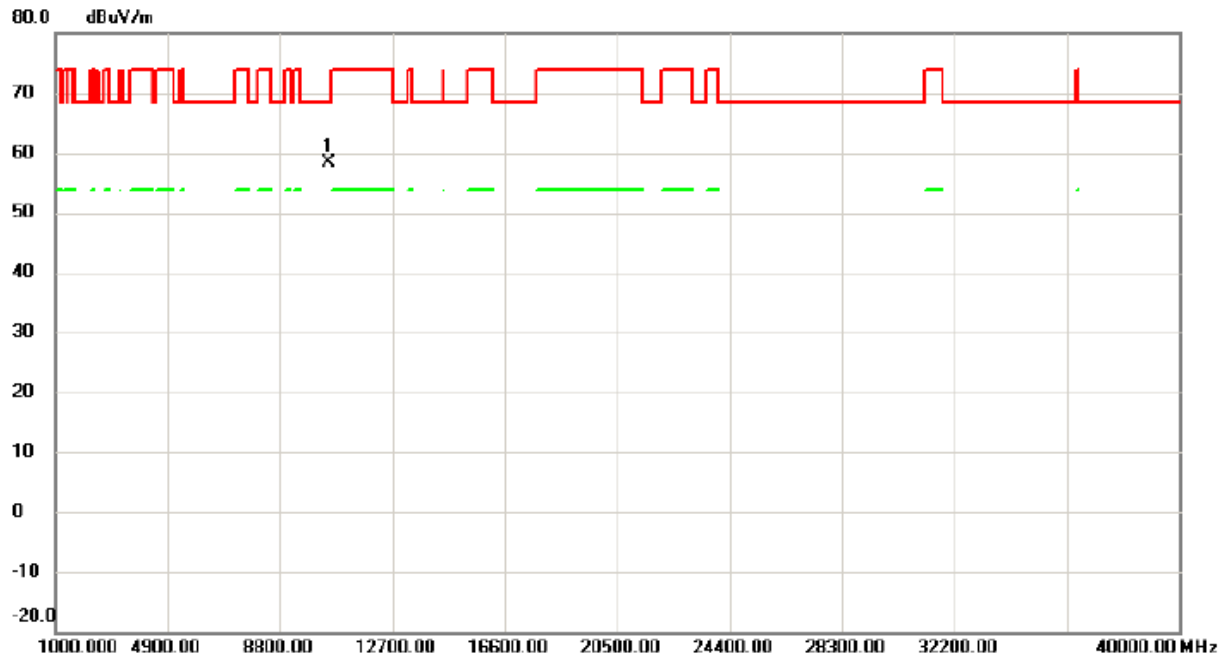


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10476.375	44.32	14.06	58.38	68.30	-9.92	peak	

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HEW20) Mode 5240 MHz

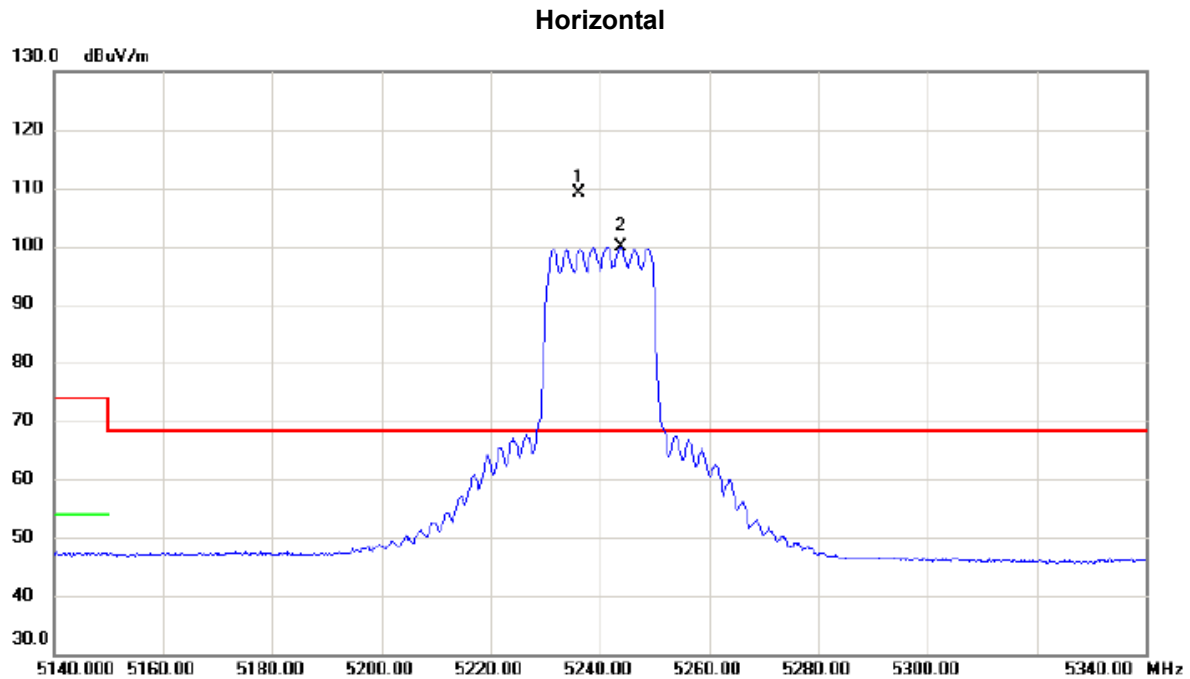

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5236.200	90.47	18.66	109.13	68.30	40.83	peak	No Limit
2	X	5243.900	81.33	18.66	99.99	68.30	31.69	AVG	No Limit


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HEW20) Mode 5240 MHz

## Horizontal

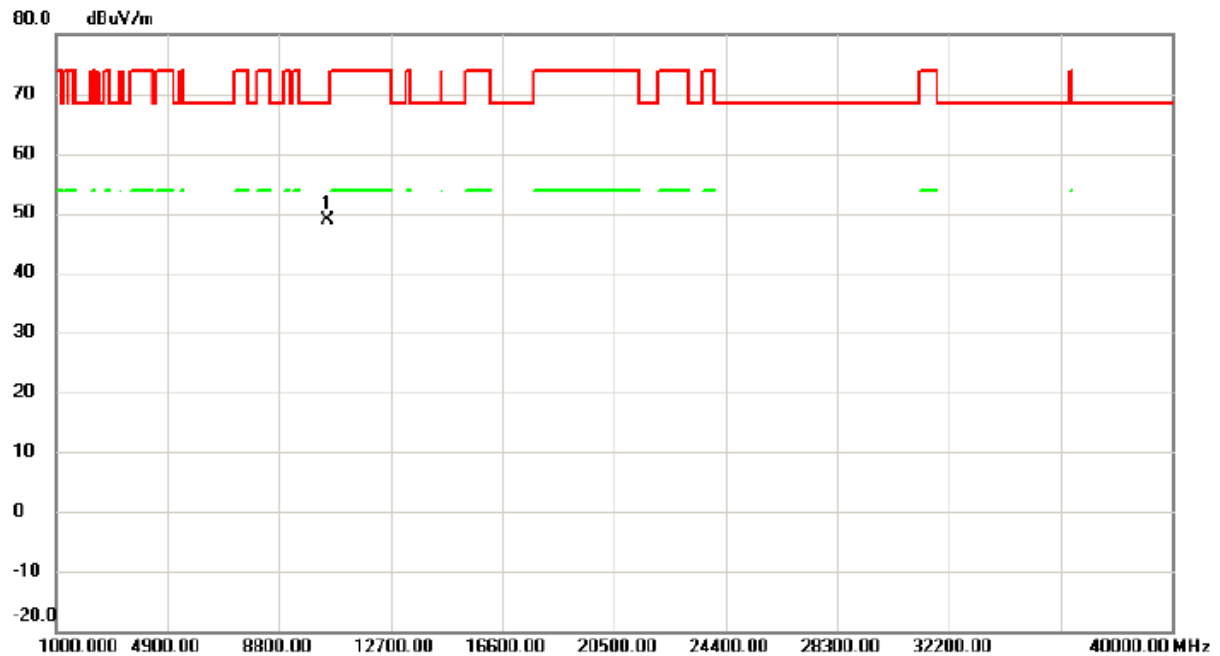


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10476.485	34.80	14.06	48.86	68.30	-19.44	peak	

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HEW40) Mode 5190 MHz

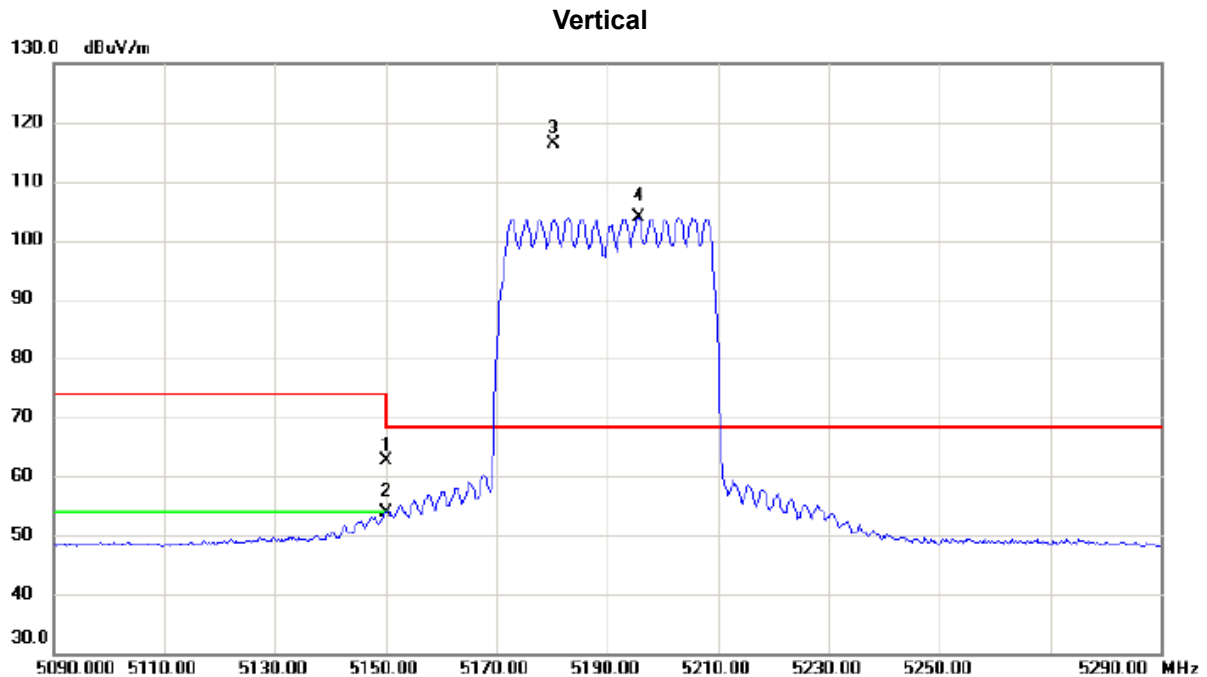


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5150.000	43.94	18.57	62.51	74.00	-11.49	peak	
2		5150.000	35.31	18.57	53.88	54.00	-0.12	AVG	
3	*	5180.300	97.78	18.60	116.38	68.30	48.08	peak	No Limit
4	X	5195.600	85.37	18.61	103.98	68.30	35.68	AVG	No Limit

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HEW40) Mode 5190 MHz

## Vertical

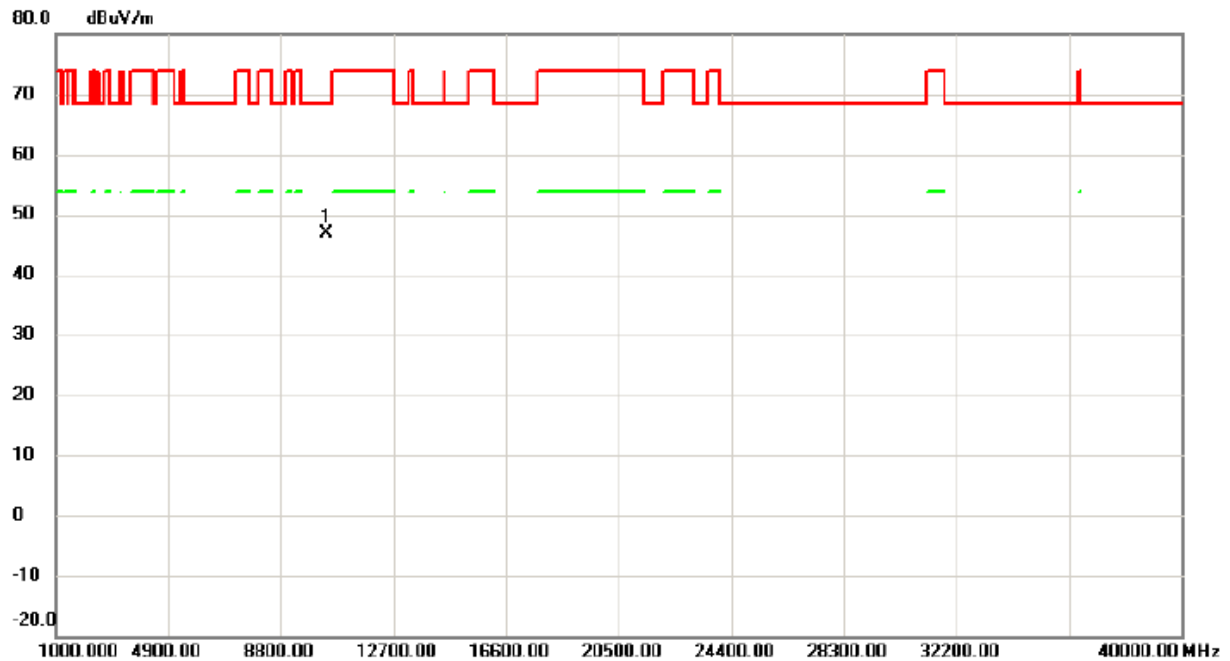


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10386.500	33.13	13.86	46.99	68.30	-21.31	peak	

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HEW40) Mode 5190 MHz

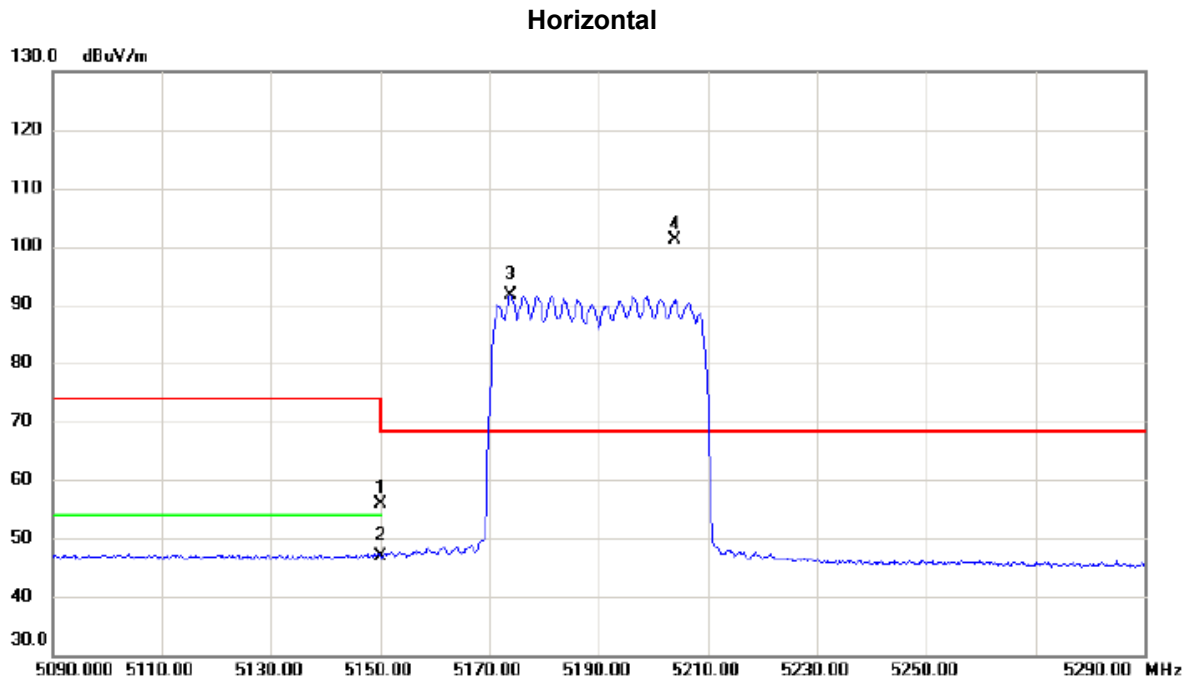


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment				
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5150.000	37.42	18.57	55.99	74.00	-18.01	peak	
2		5150.000	28.42	18.57	46.99	54.00	-7.01	AVG	
3	X	5173.900	72.94	18.58	91.52	68.30	23.22	AVG	No Limit
4	*	5204.100	82.57	18.62	101.19	68.30	32.89	peak	No Limit

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HEW40) Mode 5190 MHz

## Horizontal

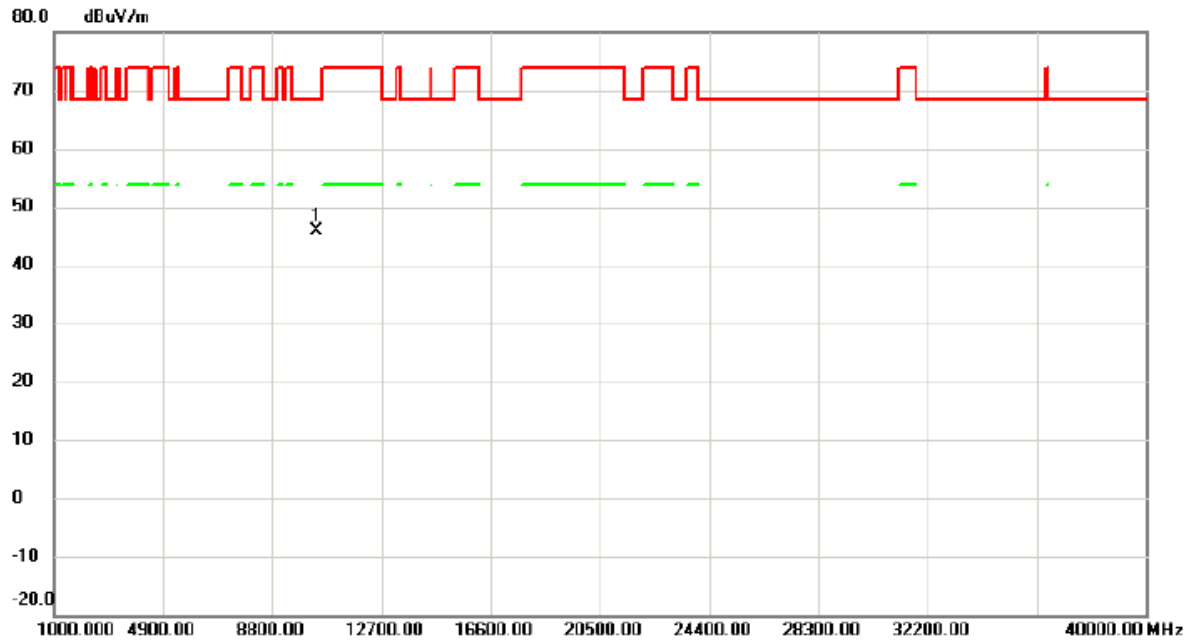


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10384.385	32.09	13.86	45.95	68.30	-22.35	peak	

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HEW40) Mode 5230 MHz

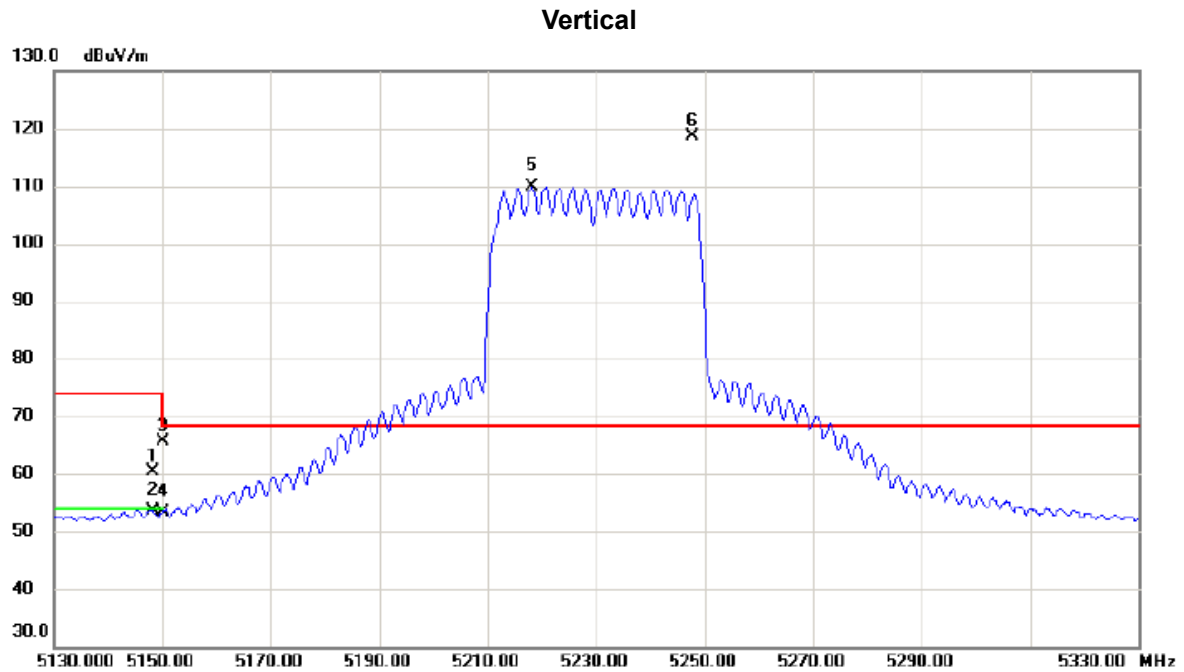


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5148.200	41.73	18.57	60.30	74.00	-13.70	peak	
2		5148.200	35.11	18.57	53.68	54.00	-0.32	AVG	
3		5150.000	46.98	18.57	65.55	74.00	-8.45	peak	
4		5150.000	34.78	18.57	53.35	54.00	-0.65	AVG	
5	X	5218.200	91.14	18.64	109.78	68.30	41.48	AVG	No Limit
6	*	5247.800	100.01	18.67	118.68	68.30	50.38	peak	No Limit

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HEW40) Mode 5230 MHz

## Vertical

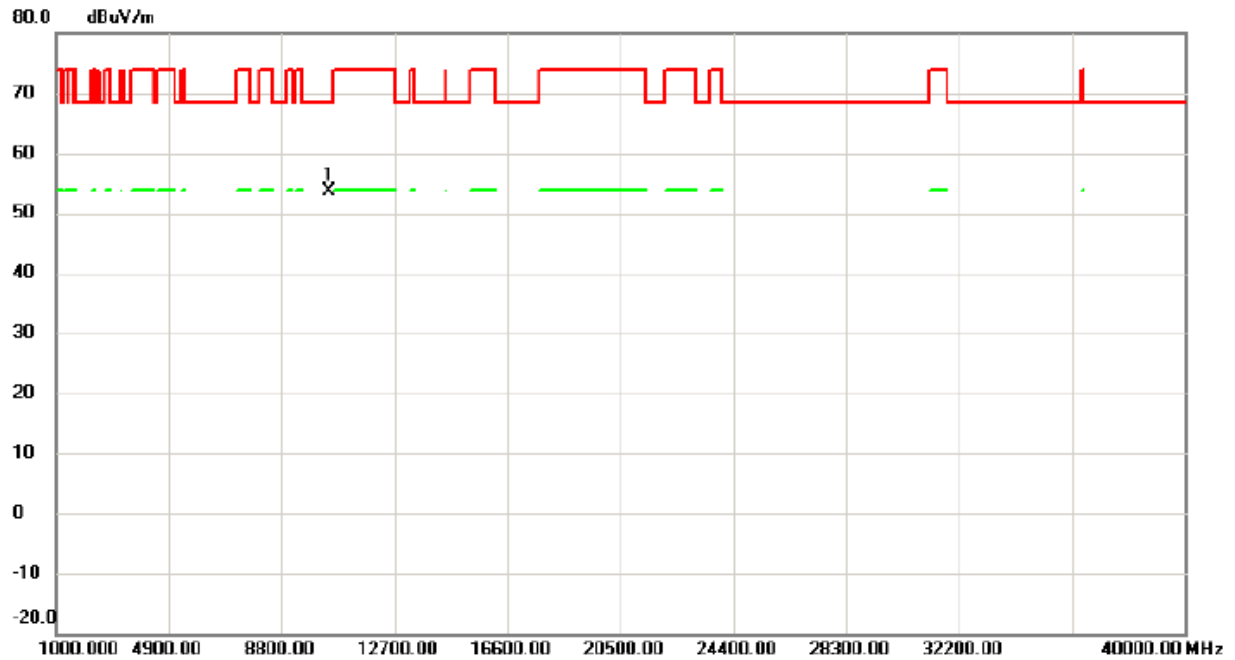


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10461.175	39.69	14.03	53.72	68.30	-14.58	peak	

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HEW40) Mode 5230 MHz

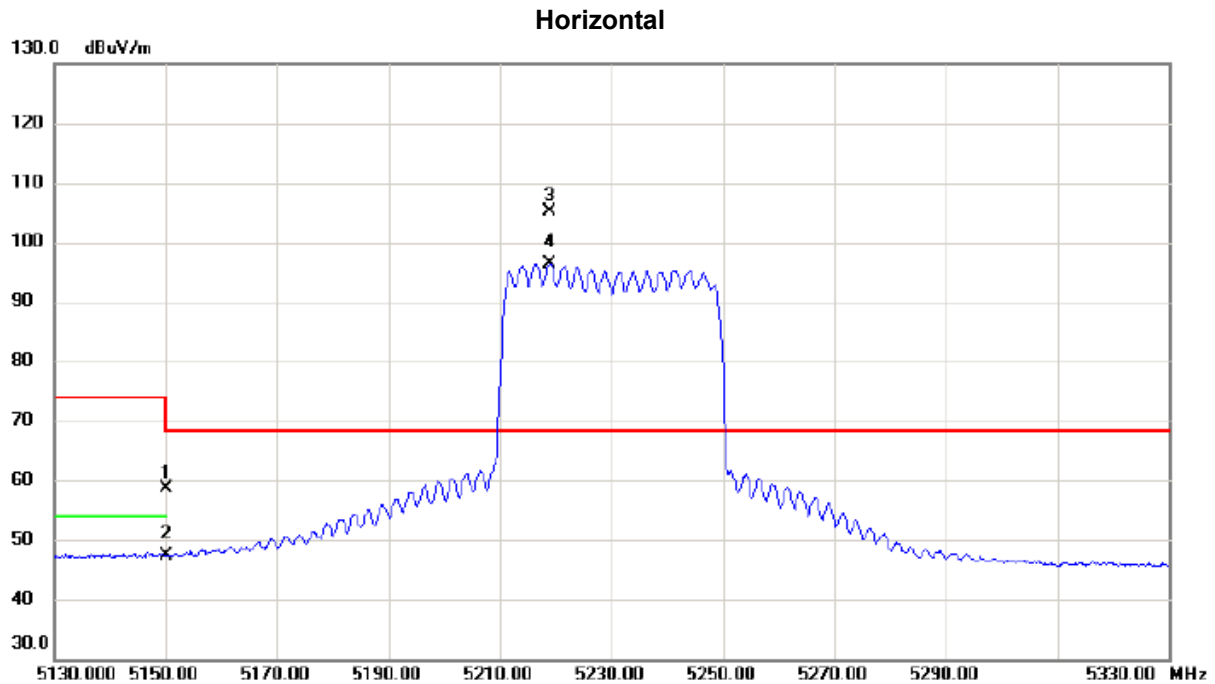


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment				
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5150.000	39.97	18.57	58.54	74.00	-15.46	peak	
2		5150.000	28.70	18.57	47.27	54.00	-6.73	AVG	
3	*	5218.800	86.56	18.64	105.20	68.30	36.90	peak	No Limit
4	X	5218.900	77.81	18.64	96.45	68.30	28.15	AVG	No Limit

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HEW40) Mode 5230 MHz

## Horizontal

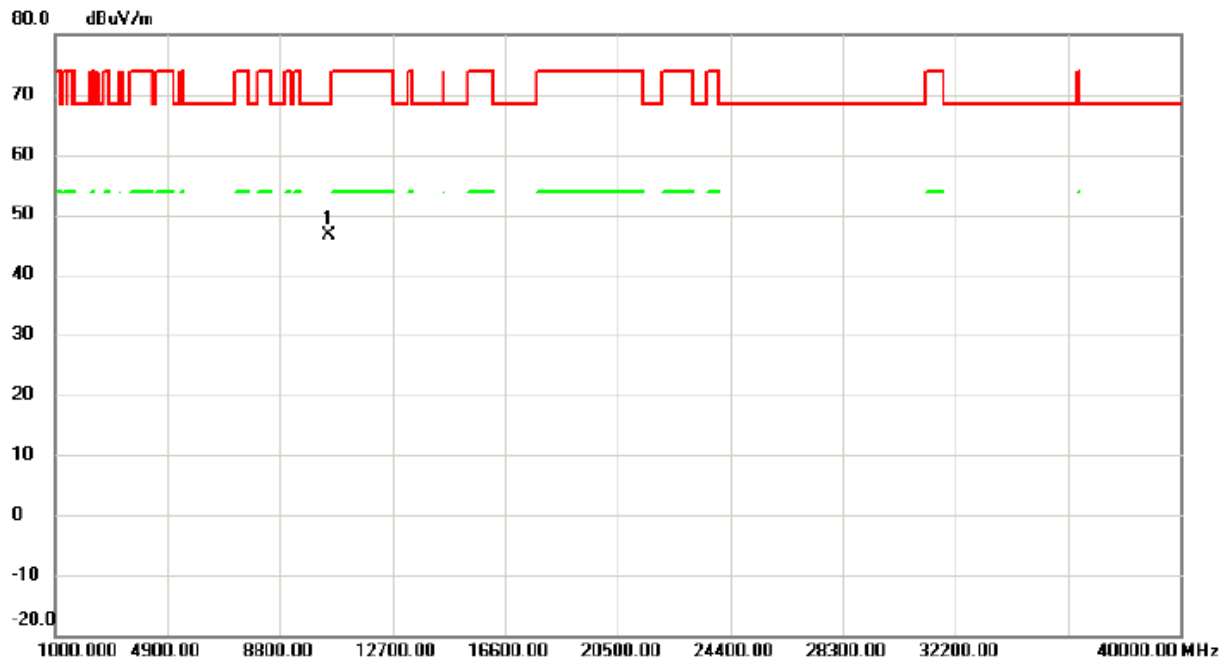


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10464.010	32.51	14.03	46.54	68.30	-21.76	peak	

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HEW80) Mode 5210 MHz

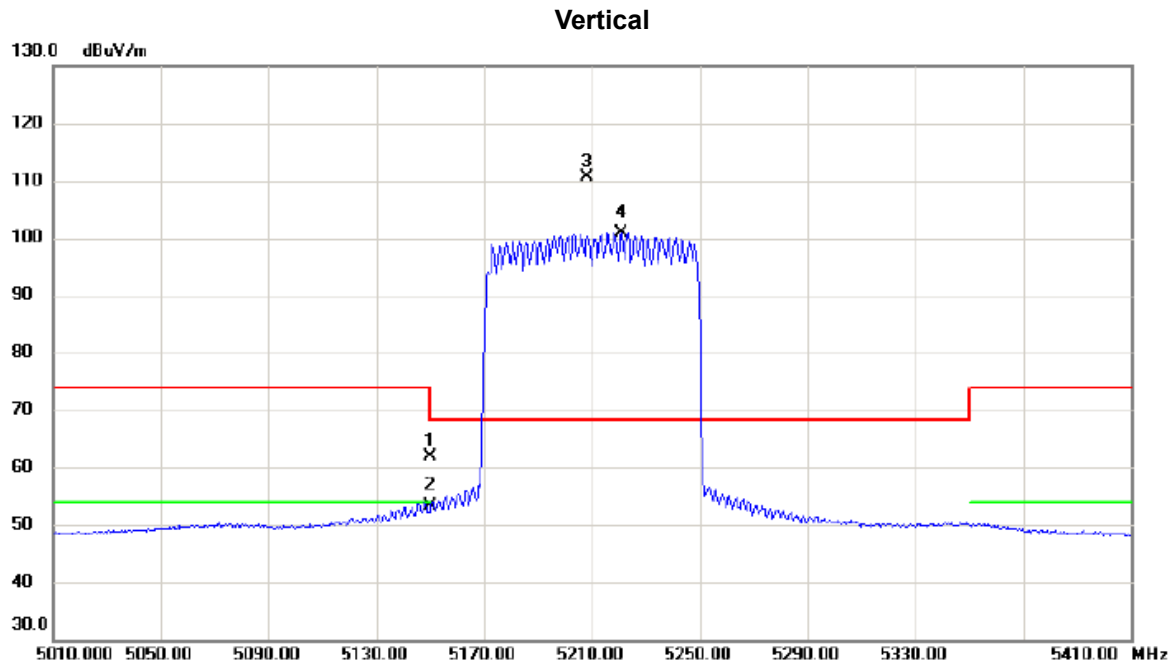


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	43.25	18.57	61.82	74.00	-12.18	peak	
2		5150.000	34.91	18.57	53.48	54.00	-0.52	AVG	
3	*	5208.200	92.03	18.63	110.66	68.30	42.36	peak	No Limit
4	X	5220.800	82.32	18.64	100.96	68.30	32.66	AVG	No Limit

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HEW80) Mode 5210 MHz

## Vertical

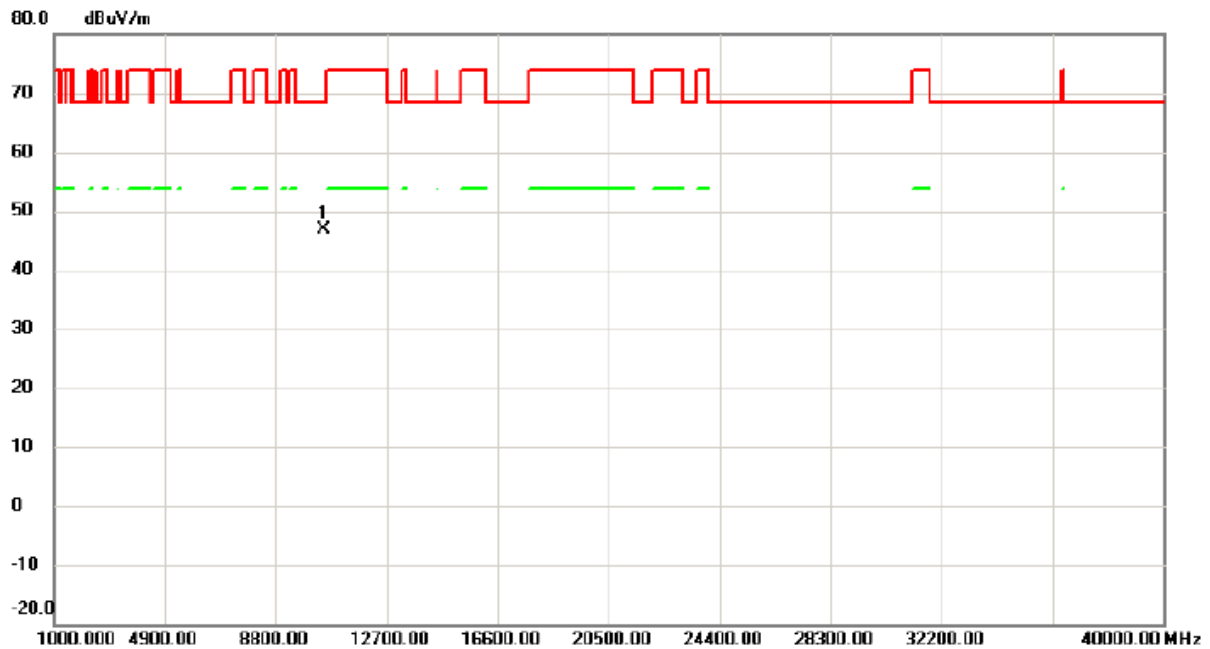


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10465.700	32.83	14.03	46.86	68.30	-21.44	peak	

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HEW80) Mode 5210 MHz

## Horizontal

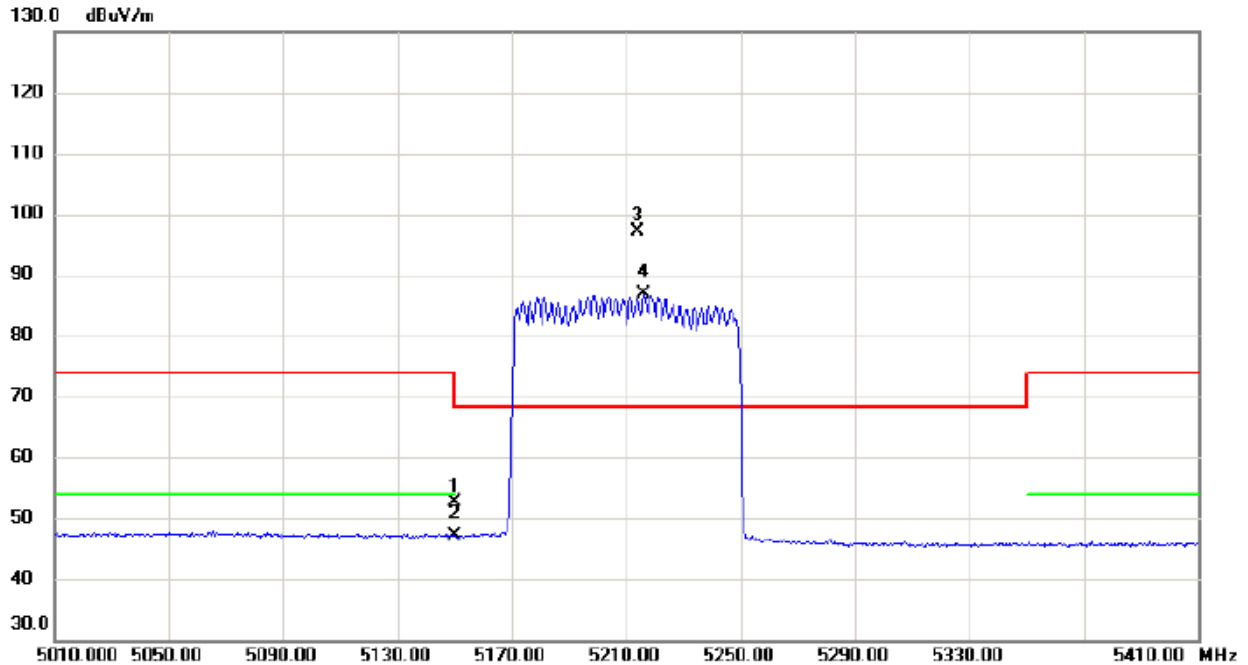


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5150.000	34.09	18.57	52.66	74.00	-21.34	peak	
2		5150.000	28.52	18.57	47.09	54.00	-6.91	AVG	
3	*	5214.000	78.47	18.63	97.10	68.30	28.80	peak	No Limit
4	X	5216.400	68.34	18.64	86.98	68.30	18.68	AVG	No Limit

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HEW80) Mode 5210 MHz

## Horizontal

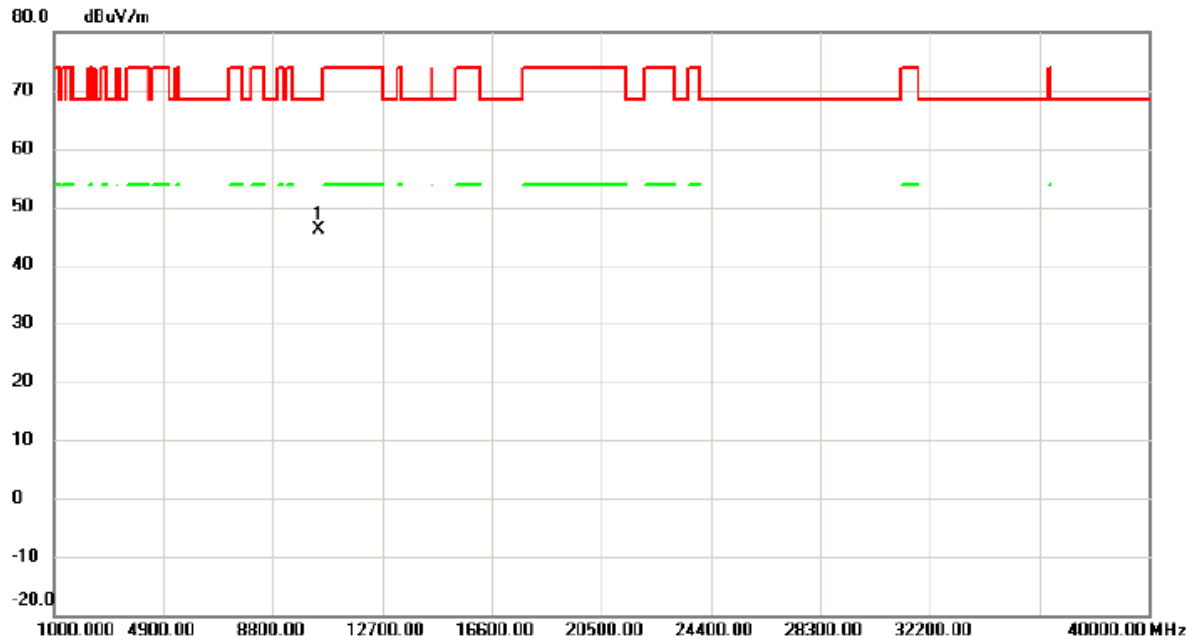


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10419.090	32.20	13.94	46.14	68.30	-22.16	peak	

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HEW20) Mode 5745 MHz

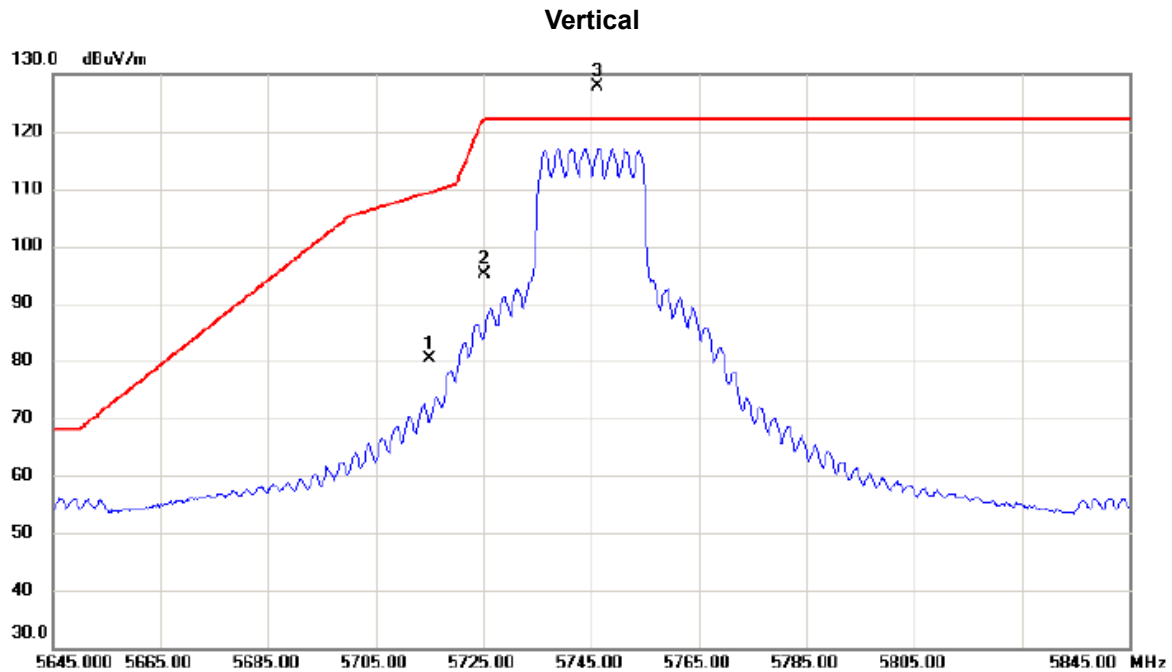


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	60.83	19.43	80.26	109.40	-29.14	peak	
2		5725.000	75.58	19.45	95.03	122.20	-27.17	peak	
3	*	5746.200	108.44	19.50	127.94	122.20	5.74	peak	No Limit

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HEW20) Mode 5745 MHz

## Vertical

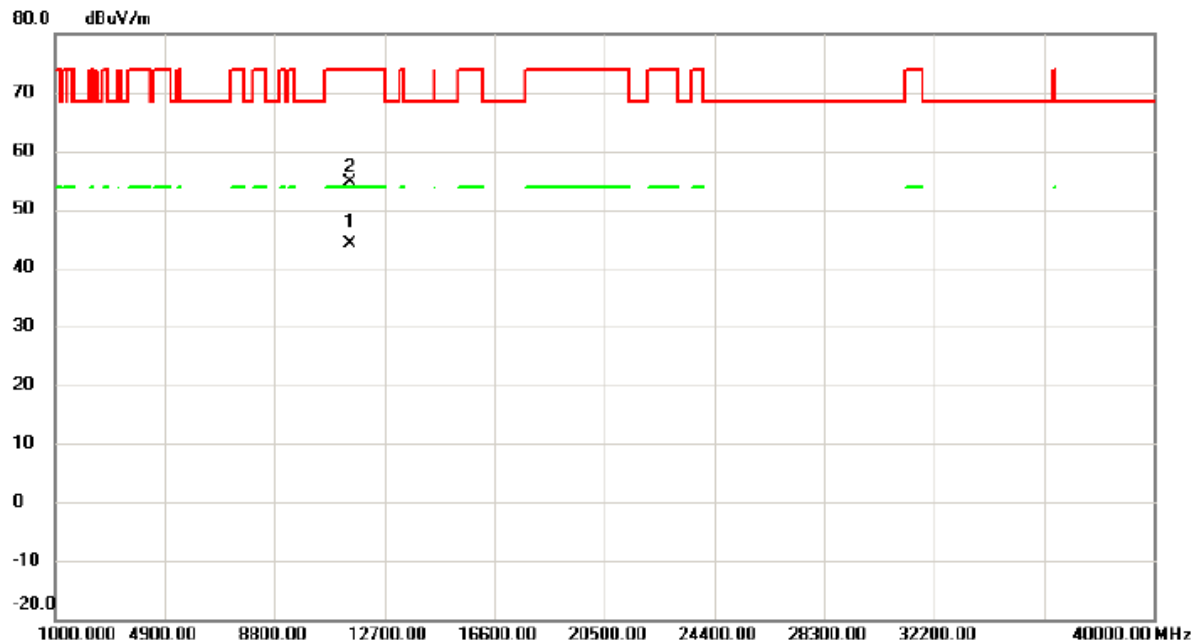


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1	*	11491.700	27.16	16.96	44.12	54.00	-9.88	AVG
2		11498.025	37.74	16.98	54.72	74.00	-19.28	peak

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HEW20) Mode 5745 MHz

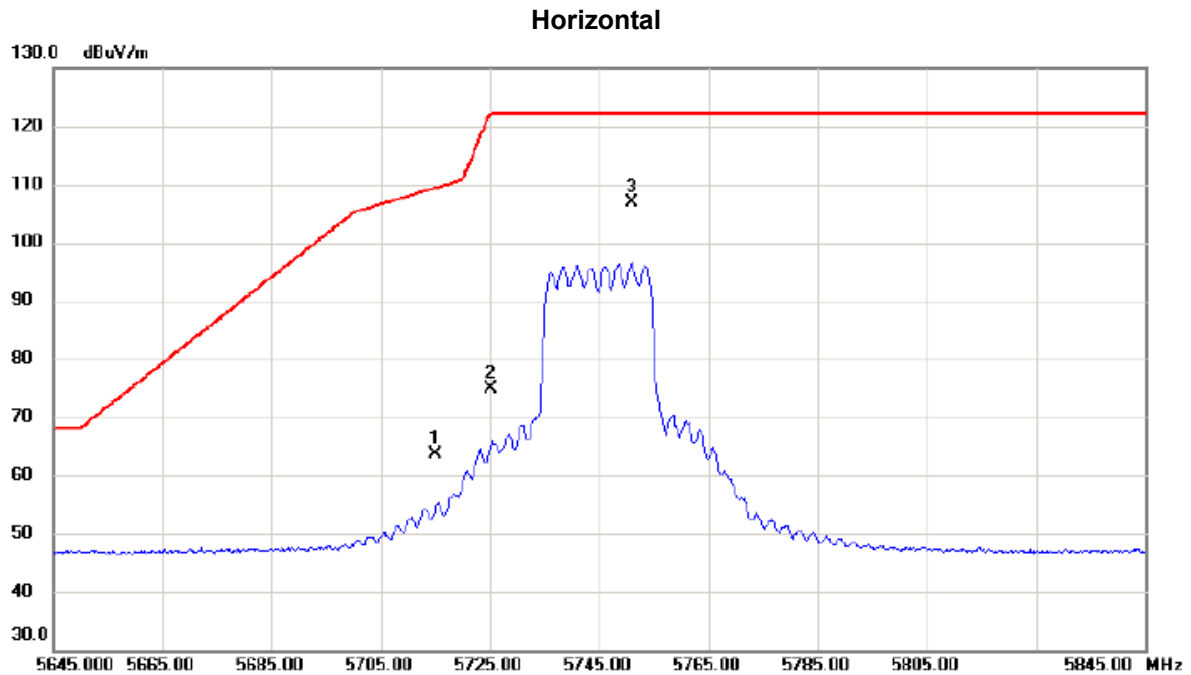


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5715.000	44.22	19.43	63.65	109.40	-45.75	peak	
2		5725.000	55.48	19.45	74.93	122.20	-47.27	peak	
3 *		5751.100	87.39	19.50	106.89	122.20	-15.31	peak	No Limit

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HEW20) Mode 5745 MHz

## Horizontal

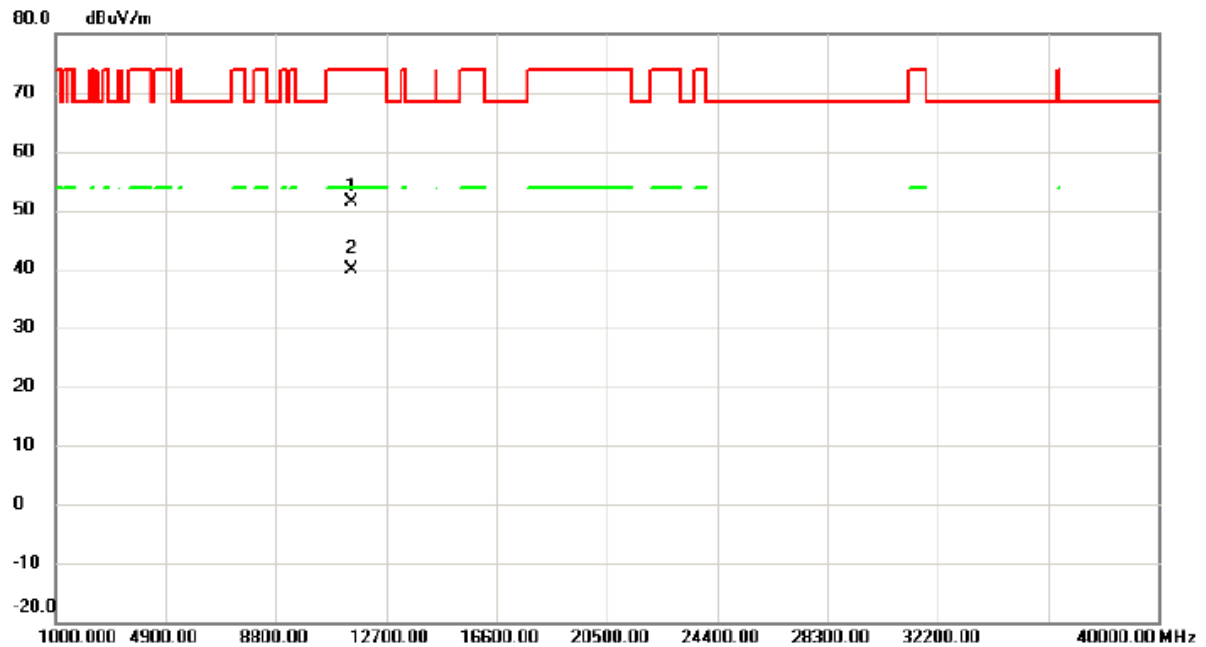


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11488.540	34.41	16.95	51.36	74.00	-22.64	peak	
2	*	11491.980	22.92	16.96	39.88	54.00	-14.12	AVG	

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HEW20) Mode 5785 MHz

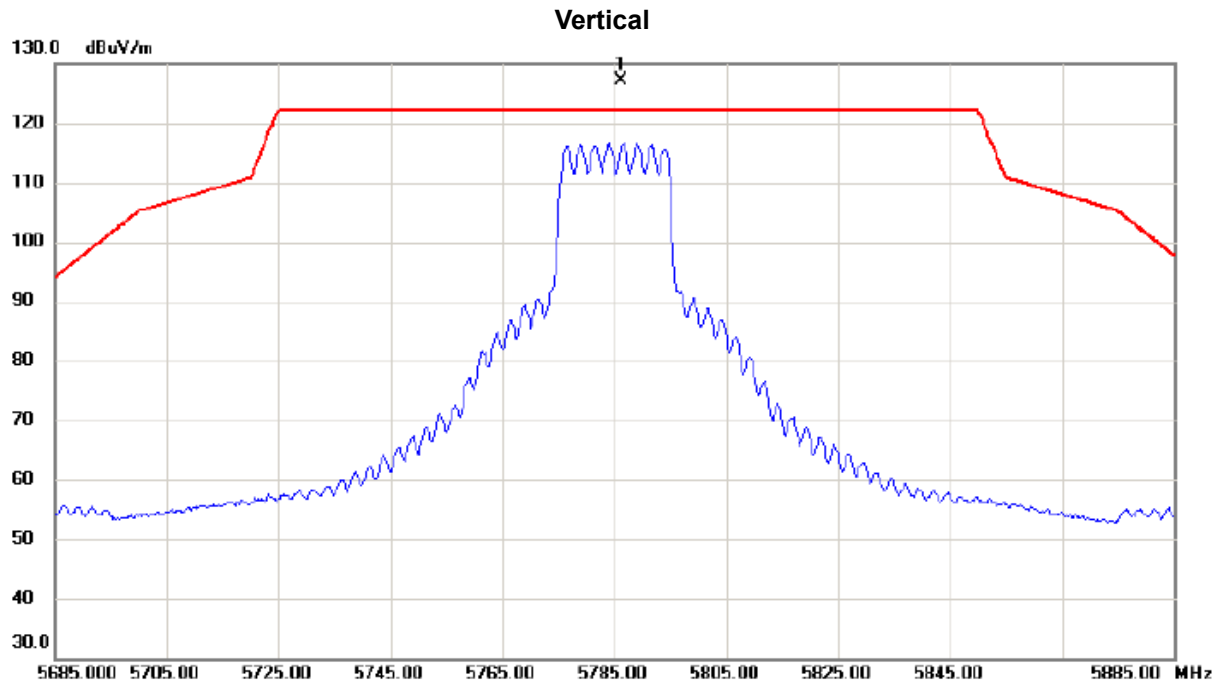


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5786.300	107.44	19.59	127.03	122.20	4.83	peak	No Limit

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HEW20) Mode 5785 MHz

## Vertical

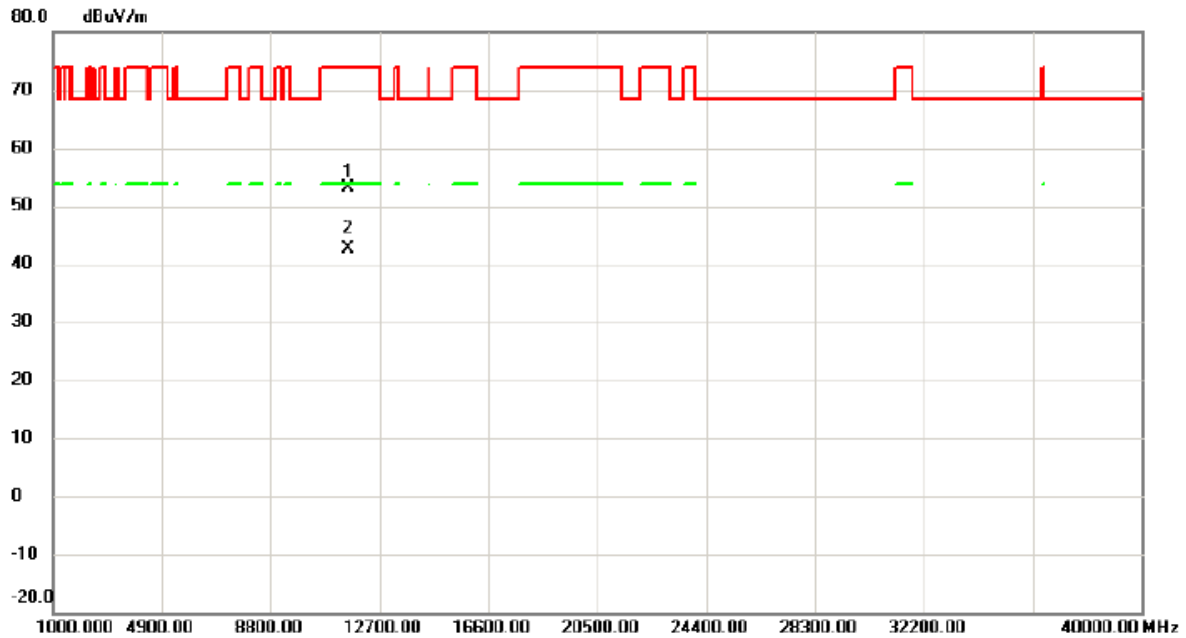


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11570.275	36.17	17.04	53.21	74.00	-20.79	peak	
2	*	11572.725	25.66	17.05	42.71	54.00	-11.29	AVG	

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HEW20) Mode 5785 MHz

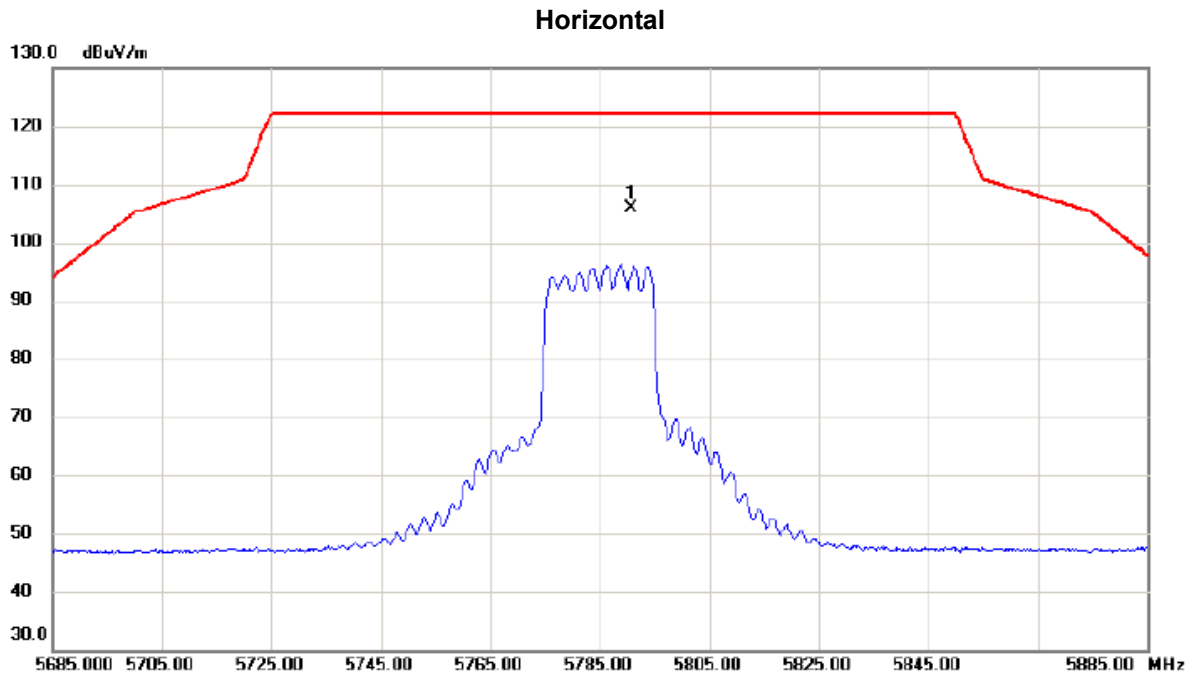


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5790.800	86.37	19.60	105.97	122.20	-16.23	peak	No Limit

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HEW20) Mode 5785 MHz

## Horizontal

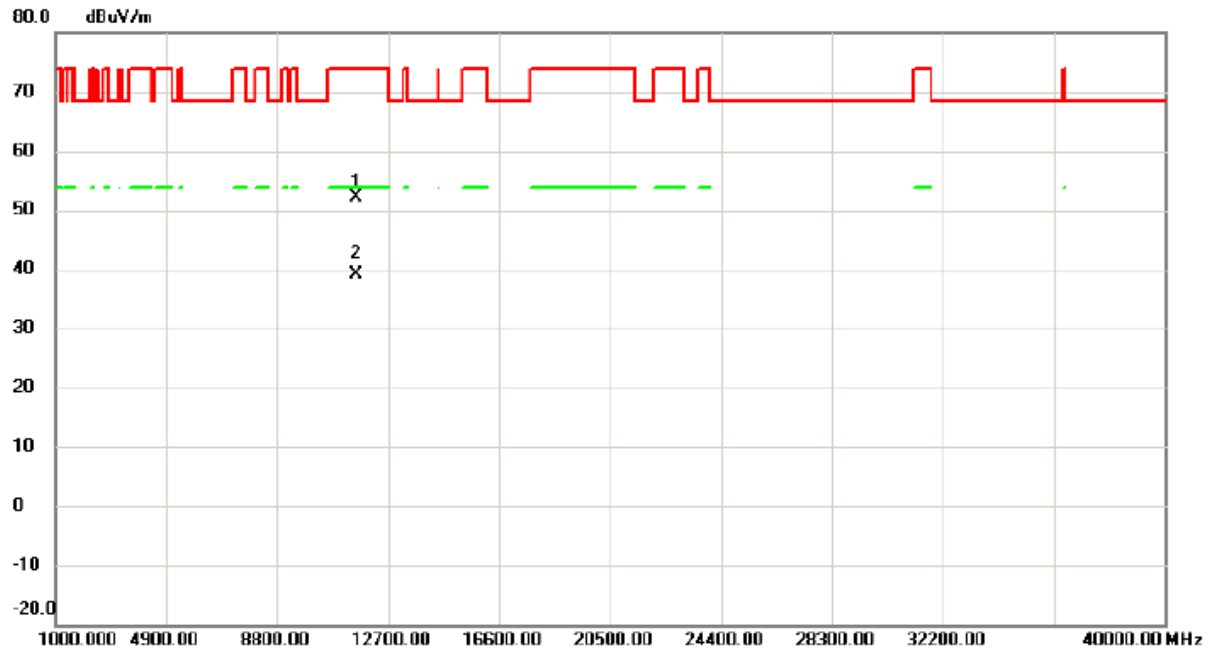


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11567.550	35.09	17.04	52.13	74.00	-21.87	peak	
2	*	11569.740	21.98	17.04	39.02	54.00	-14.98	AVG	

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HEW20) Mode 5825 MHz

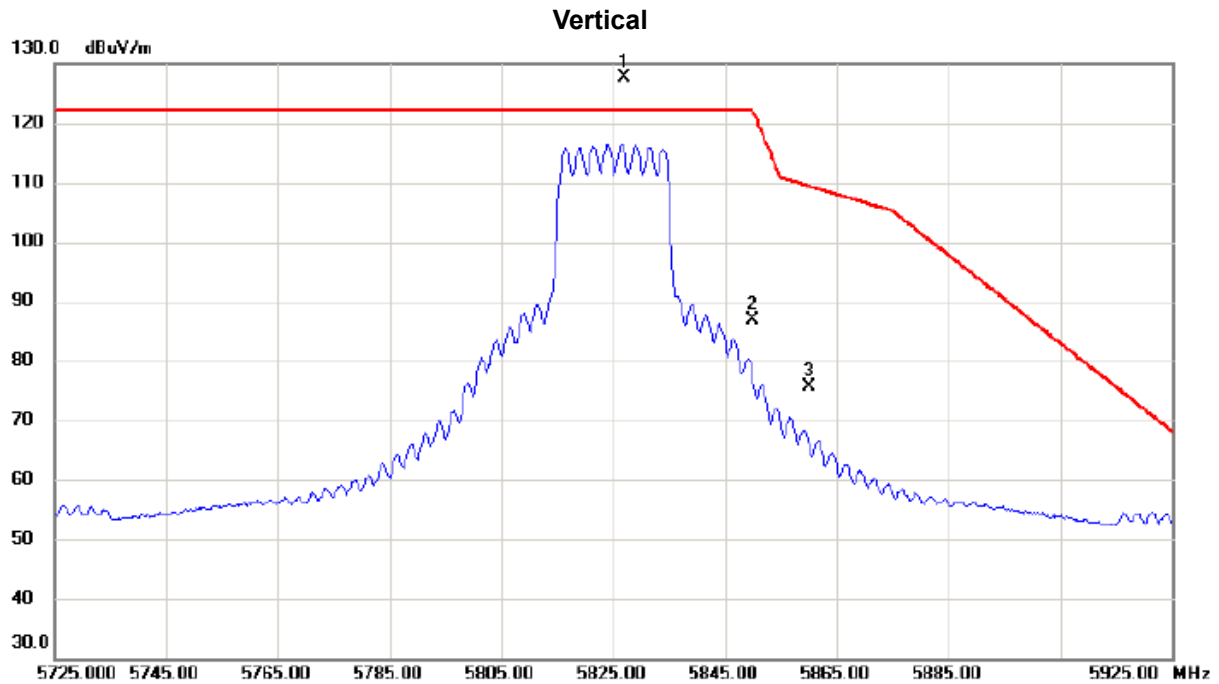


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5826.900	107.89	19.68	127.57	122.20	5.37	peak	No Limit
2		5850.000	67.10	19.74	86.84	122.20	-35.36	peak	
3		5860.000	55.99	19.76	75.75	109.40	-33.65	peak	

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HEW20) Mode 5825 MHz

## Vertical

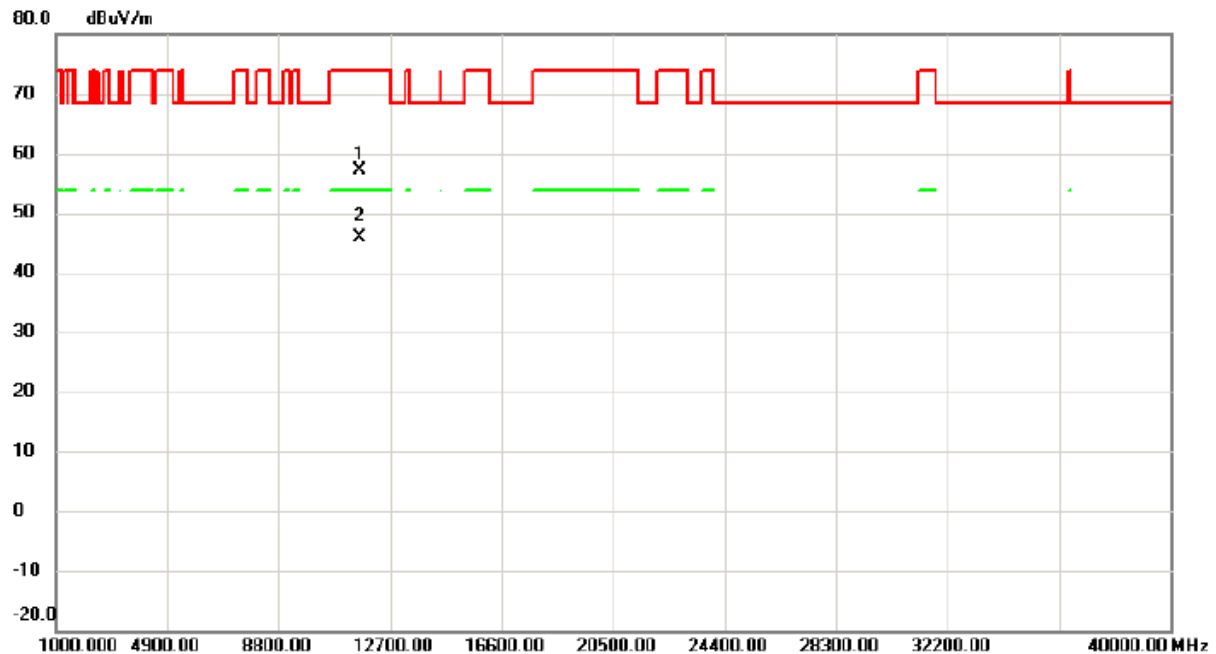


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11646.400	40.05	17.11	57.16	74.00	-16.84	peak	
2	*	11648.400	28.83	17.11	45.94	54.00	-8.06	AVG	

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HEW20) Mode 5825 MHz

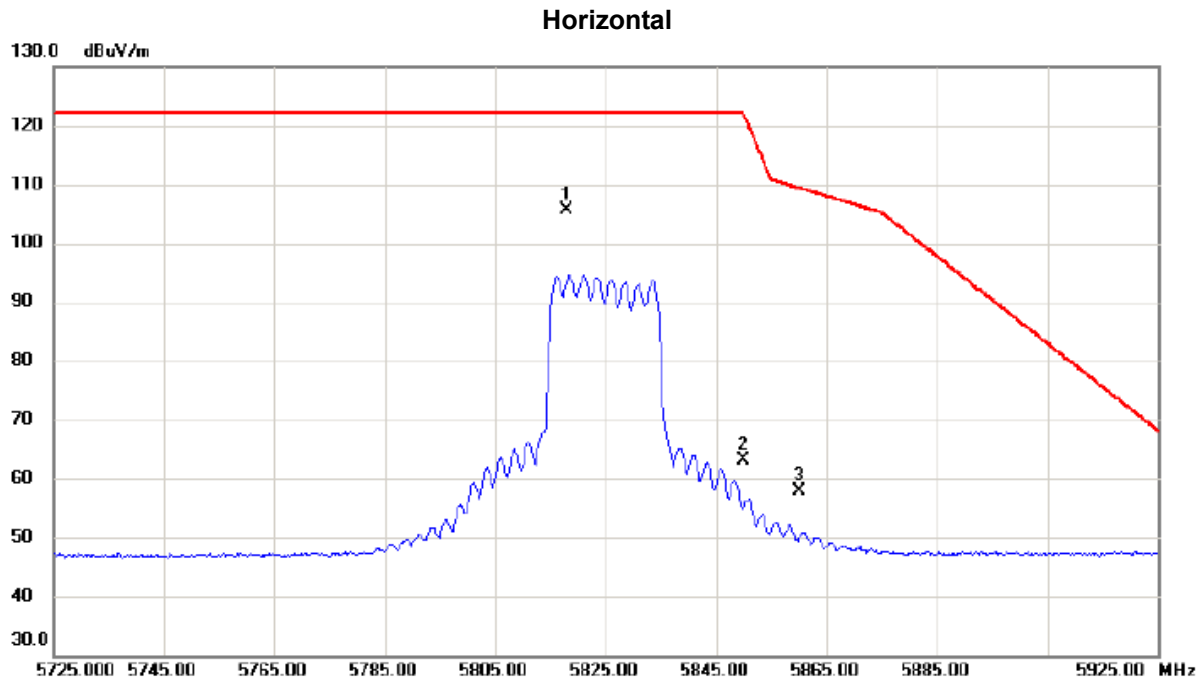


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5817.900	85.88	19.65	105.53	122.20	-16.67	peak	No Limit
2		5850.000	43.33	19.74	63.07	122.20	-59.13	peak	
3		5860.000	38.03	19.76	57.79	109.40	-51.61	peak	

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HEW20) Mode 5825 MHz

## Horizontal

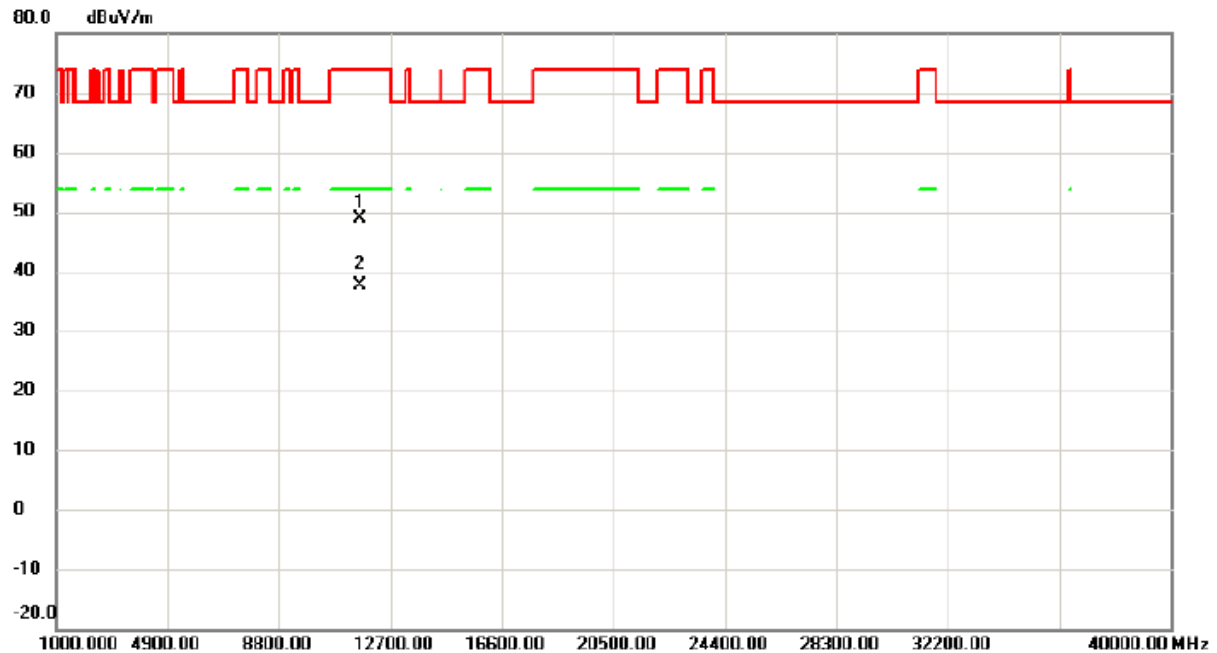


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11642.150	31.76	17.11	48.87	74.00	-25.13	peak	
2	*	11647.150	20.40	17.11	37.51	54.00	-16.49	AVG	

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HEW40) Mode 5755 MHz

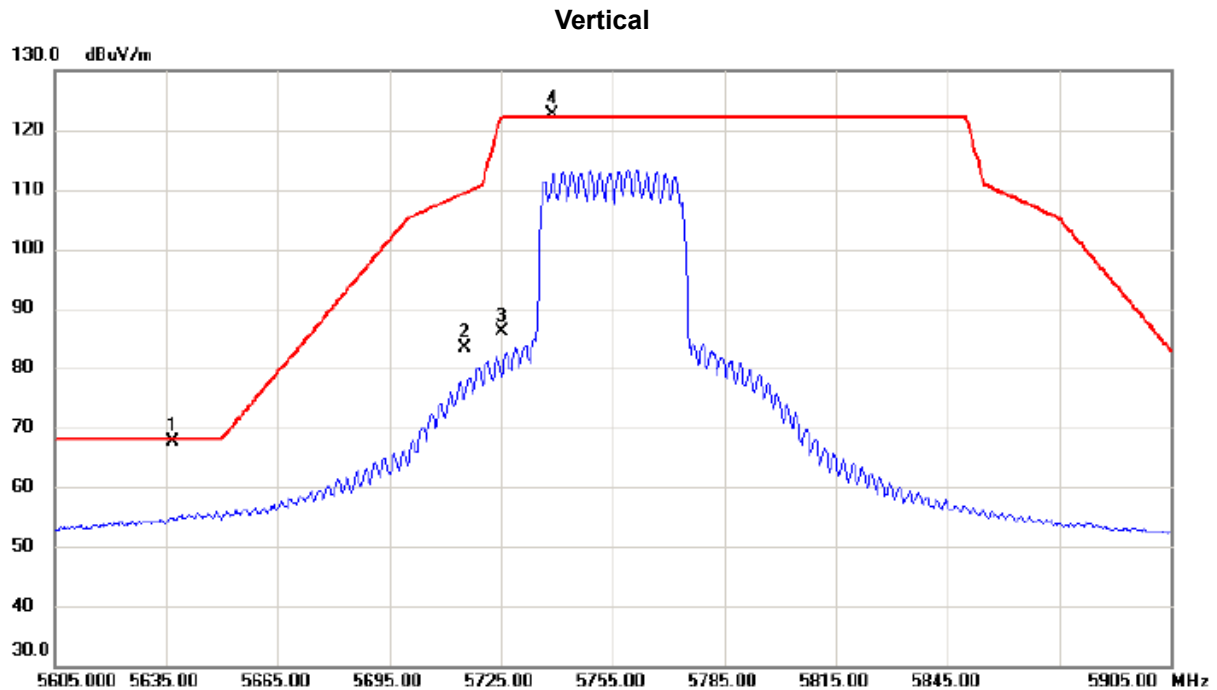

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment				
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5636.650	48.32	19.25	67.57	68.20	-0.63	peak	
2		5715.000	64.04	19.43	83.47	109.40	-25.93	peak	
3		5725.000	66.72	19.45	86.17	122.20	-36.03	peak	
4 *		5738.950	103.22	19.47	122.69	122.20	0.49	peak	No Limit


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HEW40) Mode 5755 MHz

## Vertical

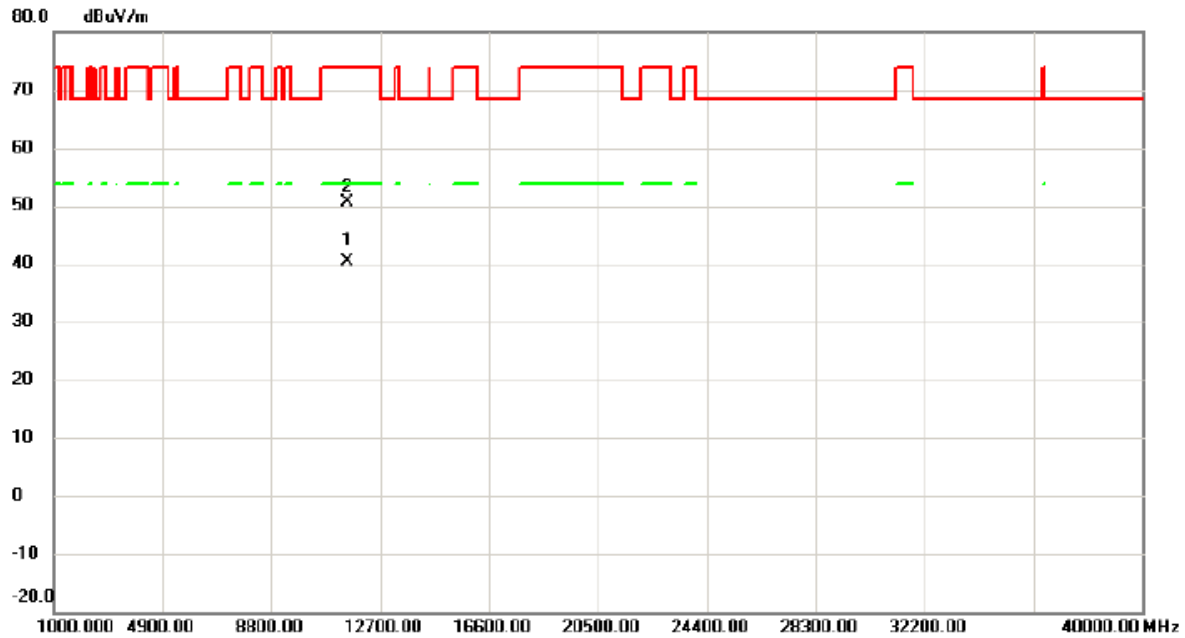


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11504.025	23.40	16.98	40.38	54.00	-13.62	AVG	
2		11514.250	33.58	16.99	50.57	74.00	-23.43	peak	

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HEW40) Mode 5755 MHz

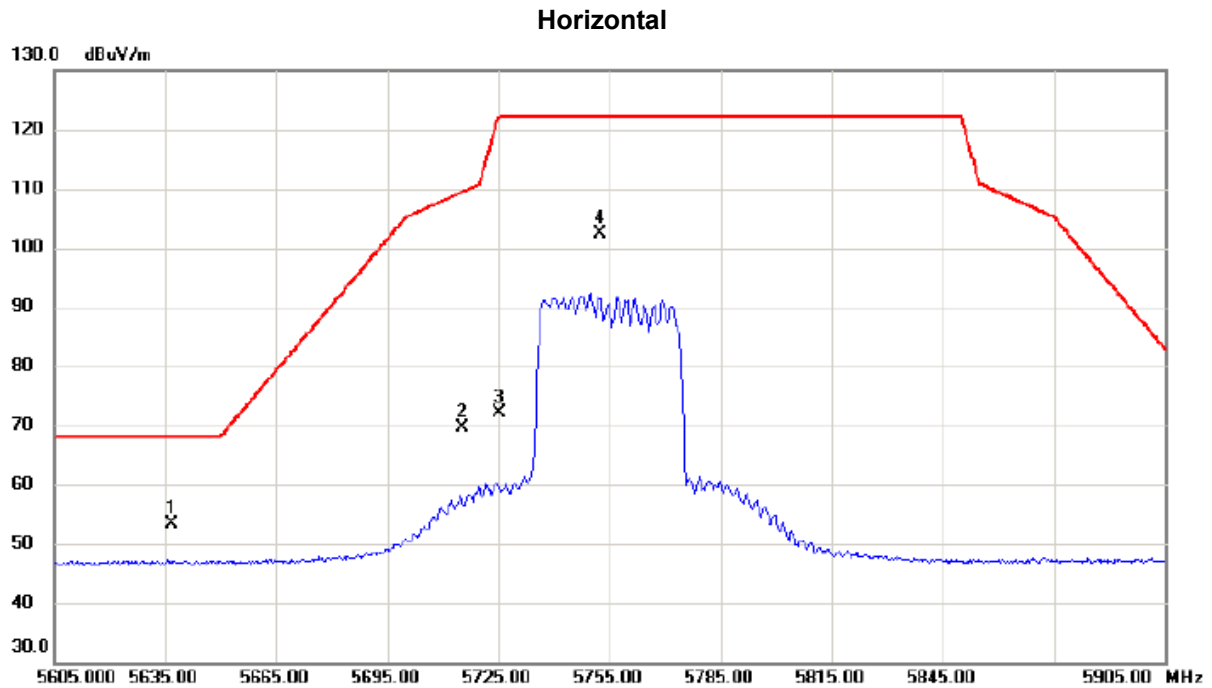

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5636.650	34.23	19.25	53.48	68.20	-14.72	peak	
2		5715.000	50.08	19.43	69.51	109.40	-39.89	peak	
3		5725.000	52.64	19.45	72.09	122.20	-50.11	peak	
4		5752.450	82.78	19.51	102.29	122.20	-19.91	peak	No Limit


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HEW40) Mode 5755 MHz

## Horizontal

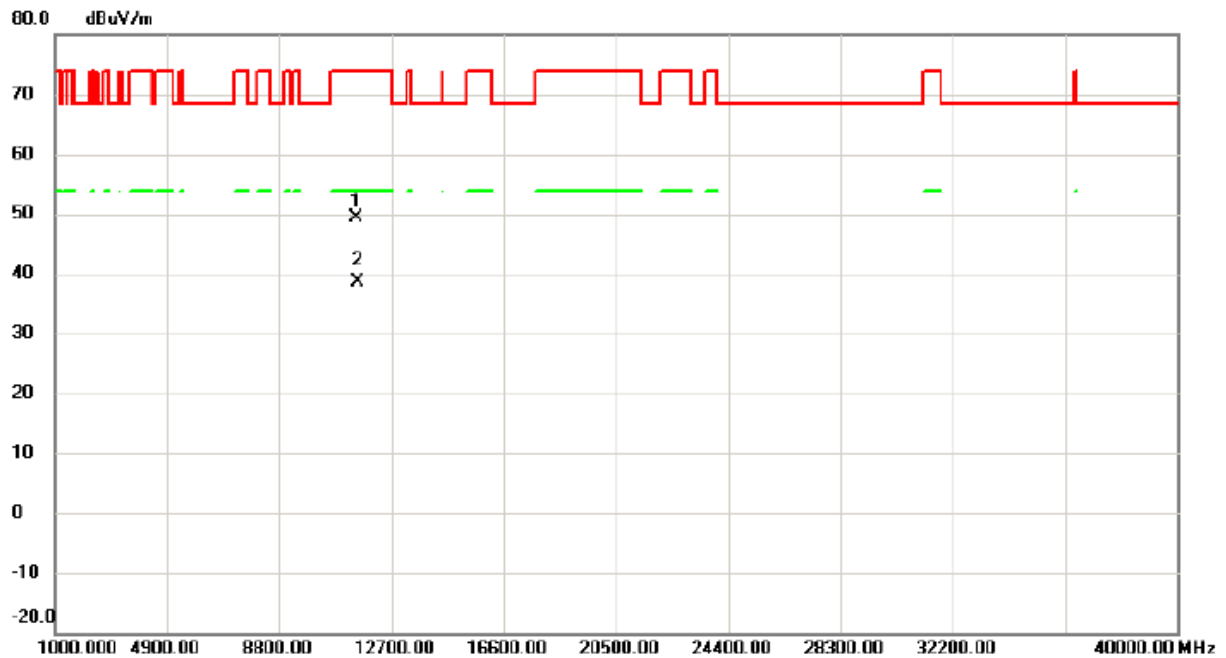


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11502.590	32.30	16.98	49.28	74.00	-24.72	peak	
2	*	11504.400	21.54	16.98	38.52	54.00	-15.48	AVG	

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HEW40) Mode 5795 MHz

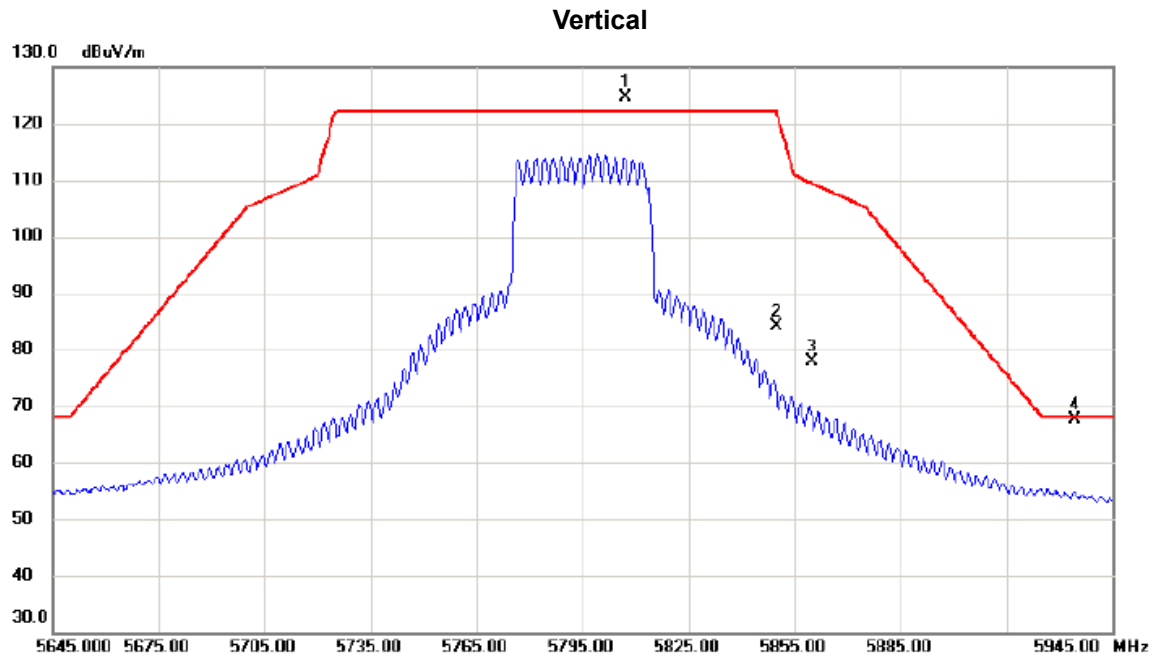

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5807.000	104.90	19.64	124.54	122.20	2.34	peak	No Limit
2		5850.000	64.29	19.74	84.03	122.20	-38.17	peak	
3		5860.000	58.19	19.76	77.95	109.40	-31.45	peak	
4		5934.350	47.69	19.93	67.62	68.20	-0.58	peak	


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HEW40) Mode 5795 MHz

## Vertical

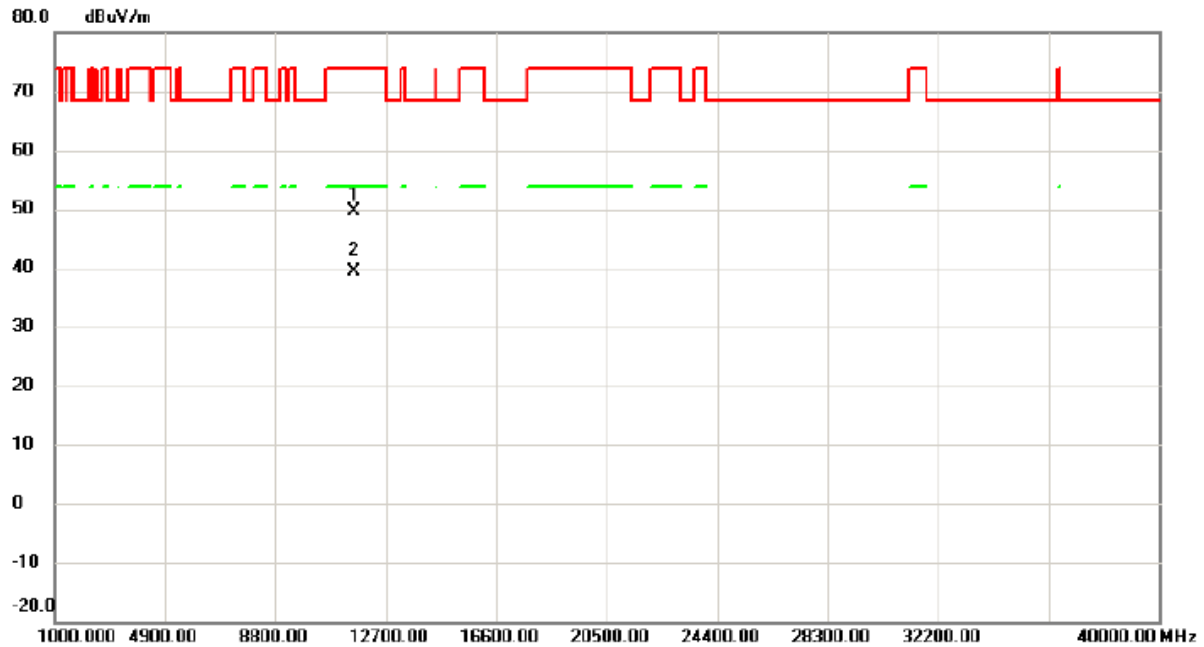


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11567.000	32.64	17.04	49.68	74.00	-24.32	peak	
2	*	11590.700	22.33	17.06	39.39	54.00	-14.61	AVG	

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HEW40) Mode 5795 MHz

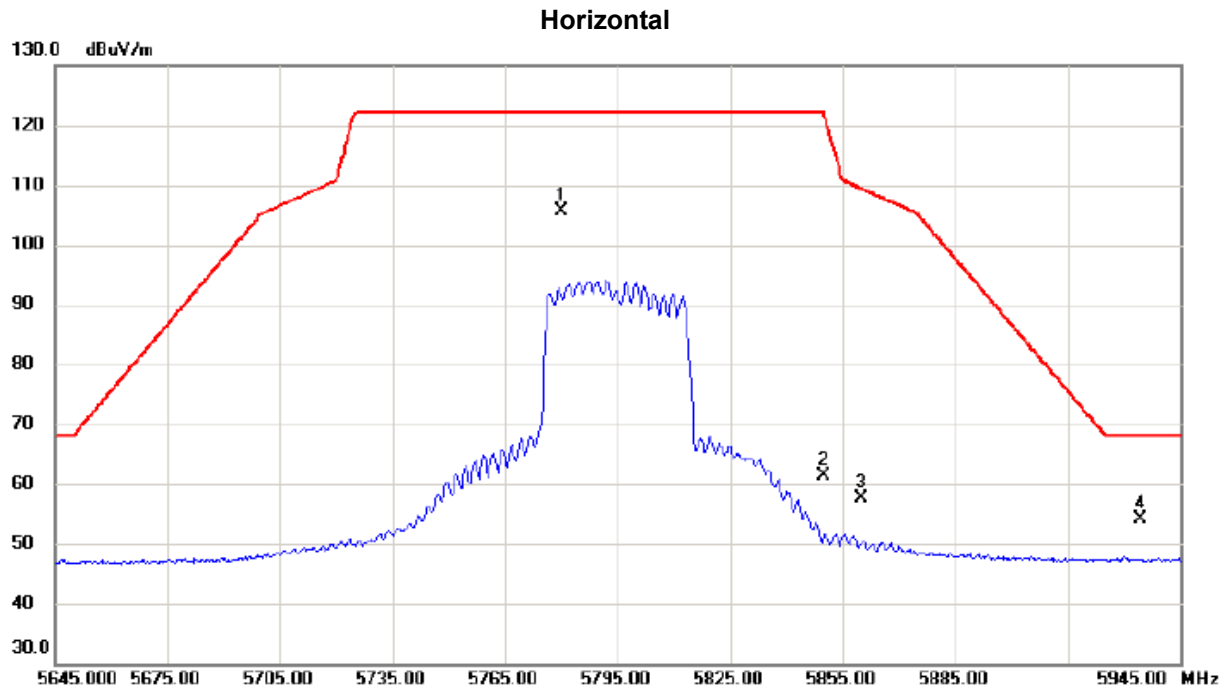


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5779.850	86.17	19.57	105.74	122.20	-16.46	peak	No Limit
2		5850.000	41.68	19.74	61.42	122.20	-60.78	peak	
3		5860.000	37.77	19.76	57.53	109.40	-51.87	peak	
4	*	5934.350	34.15	19.93	54.08	68.20	-14.12	peak	

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HEW40) Mode 5795 MHz

## Horizontal

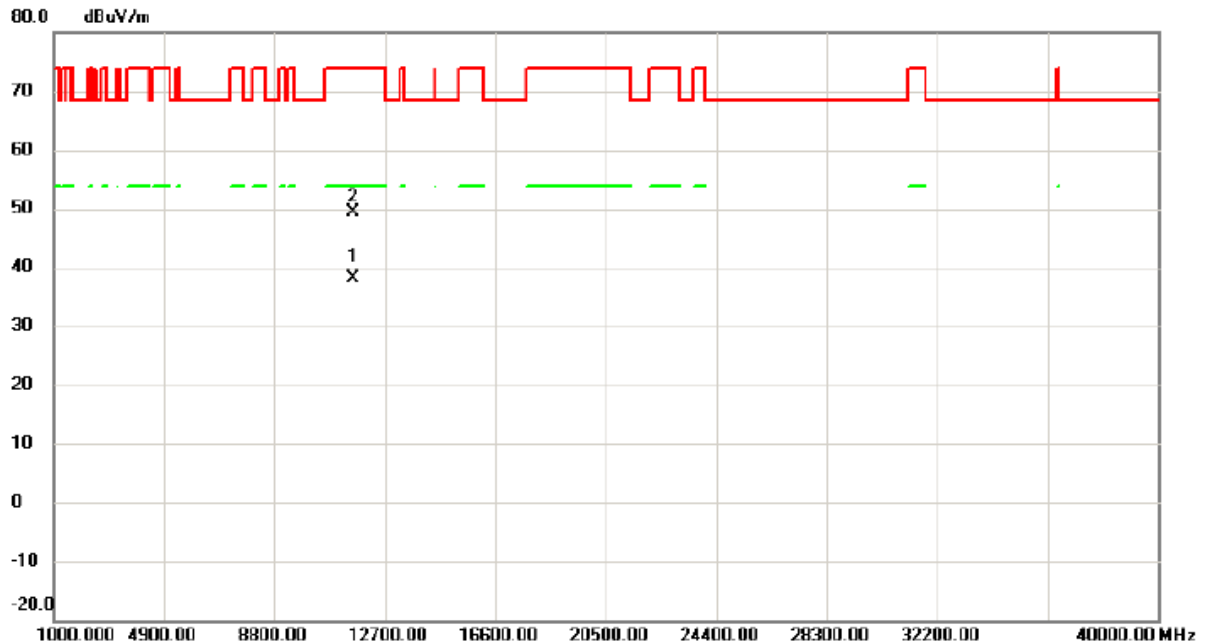


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11589.050	21.00	17.06	38.06	54.00	-15.94	AVG	
2		11596.450	32.38	17.07	49.45	74.00	-24.55	peak	

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HEW80) Mode 5775 MHz

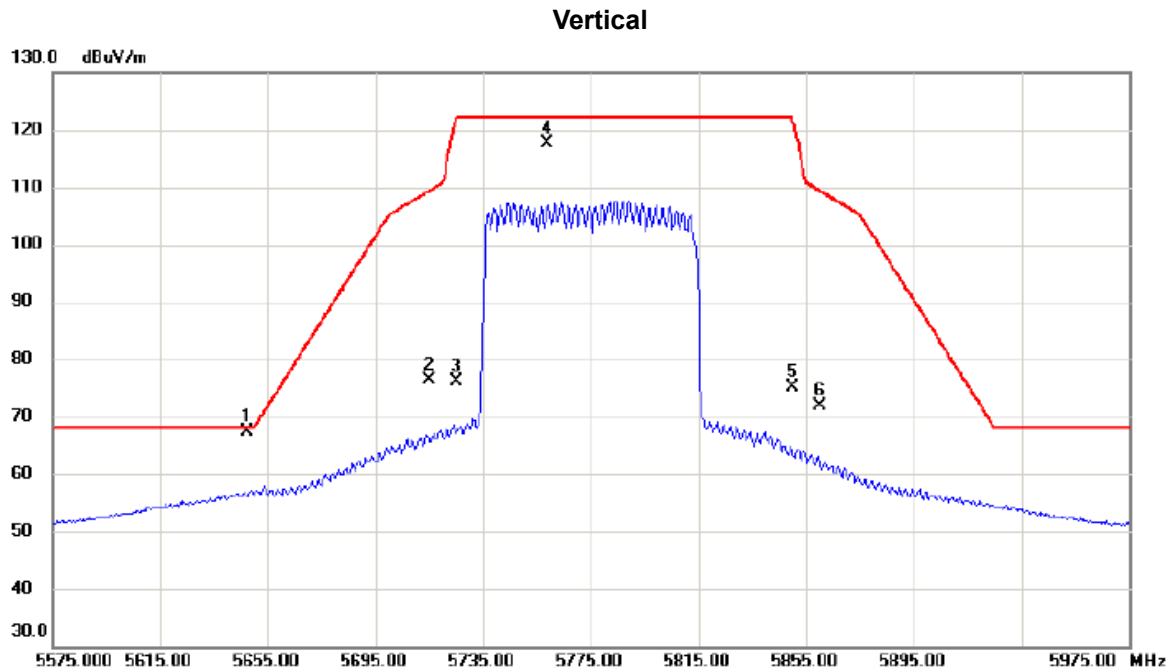


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5647.400	48.16	19.27	67.43	68.20	-0.77	peak	
2		5715.000	56.89	19.43	76.32	109.40	-33.08	peak	
3		5725.000	56.61	19.45	76.06	122.20	-46.14	peak	
4		5758.600	98.10	19.53	117.63	122.20	-4.57	peak	No Limit
5		5850.000	55.32	19.74	75.06	122.20	-47.14	peak	
6		5860.000	52.11	19.76	71.87	109.40	-37.53	peak	

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HEW80) Mode 5775 MHz

## Vertical

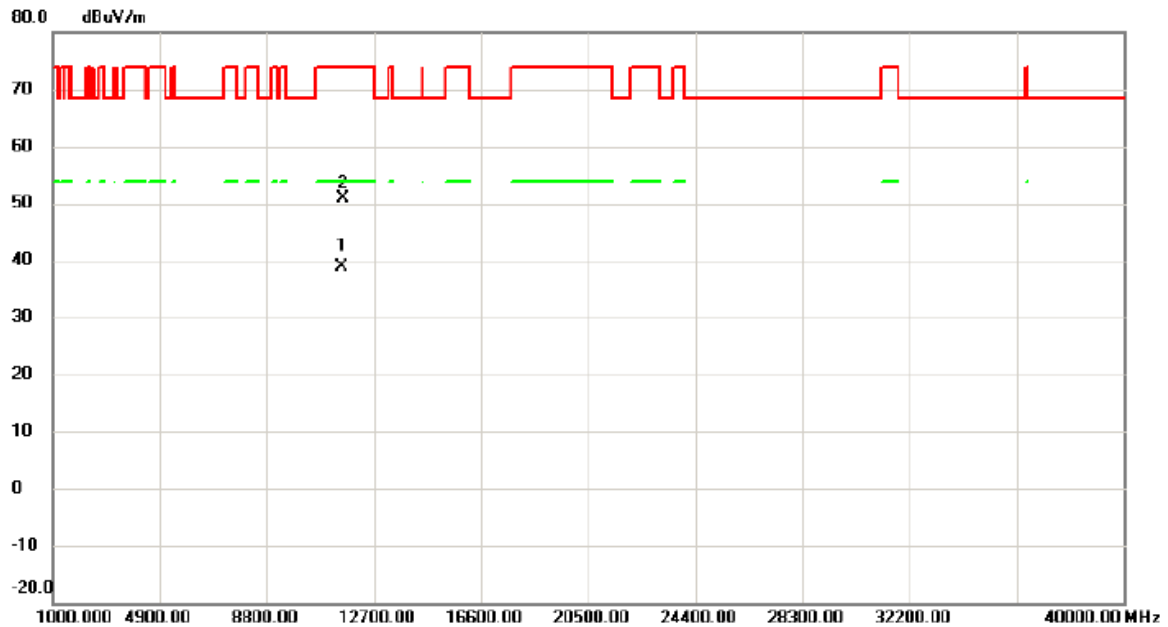


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11551.600	21.87	17.03	38.90	54.00	-15.10	AVG	
2		11562.700	33.78	17.04	50.82	74.00	-23.18	peak	

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HEW80) Mode 5775 MHz

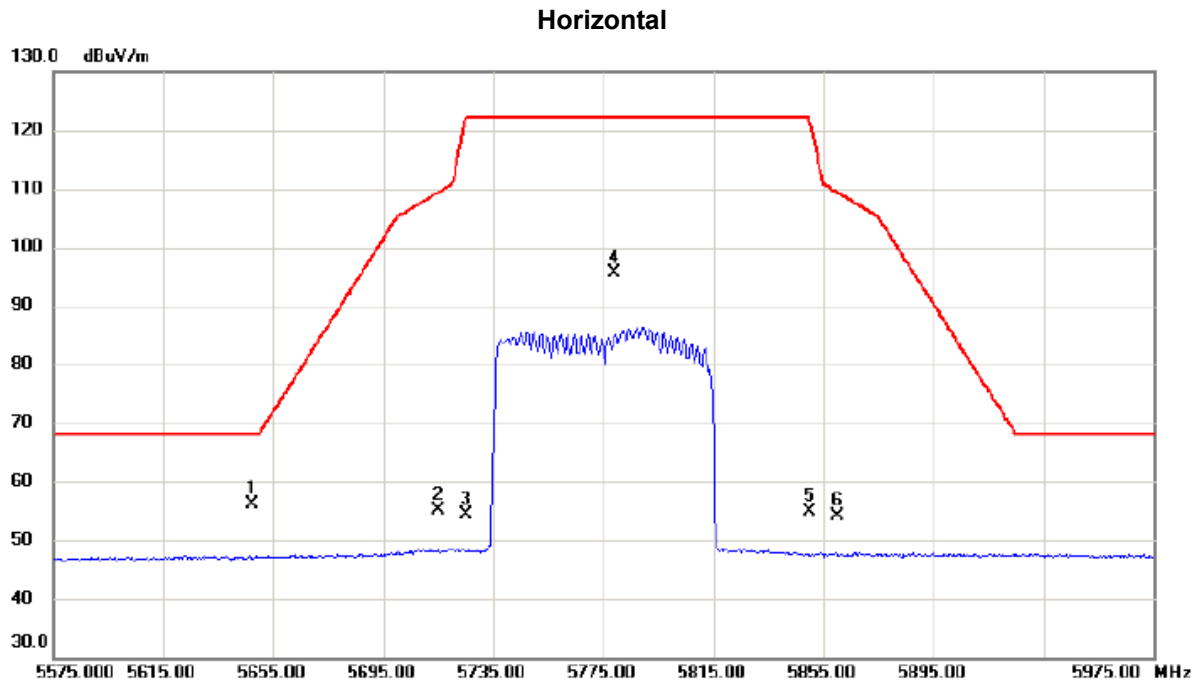

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5647.400	36.94	19.27	56.21	68.20	-11.99	peak	
2		5715.000	35.70	19.43	55.13	109.40	-54.27	peak	
3		5725.000	34.97	19.45	54.42	122.20	-67.78	peak	
4		5779.200	76.16	19.57	95.73	122.20	-26.47	peak	No Limit
5		5850.000	35.19	19.74	54.93	122.20	-67.27	peak	
6		5860.000	34.31	19.76	54.07	109.40	-55.33	peak	


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HEW80) Mode 5775 MHz

## Horizontal

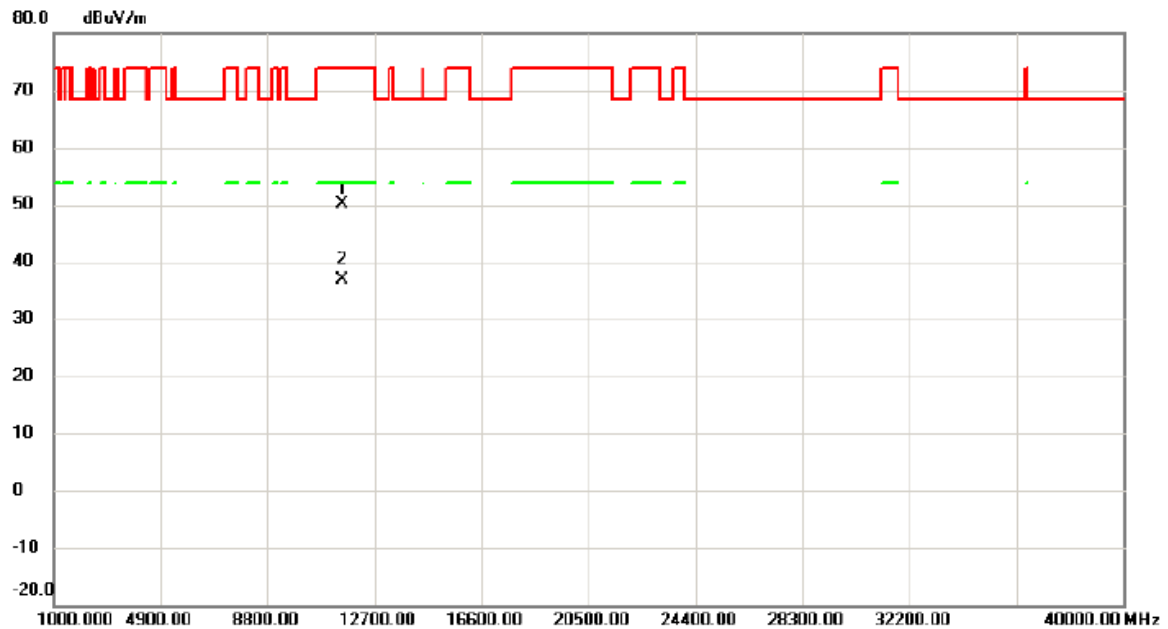


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11549.630	33.06	17.02	50.08	74.00	-23.92	peak	
2	*	11553.630	19.84	17.03	36.87	54.00	-17.13	AVG	

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

## Beamforming

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5180 MHz

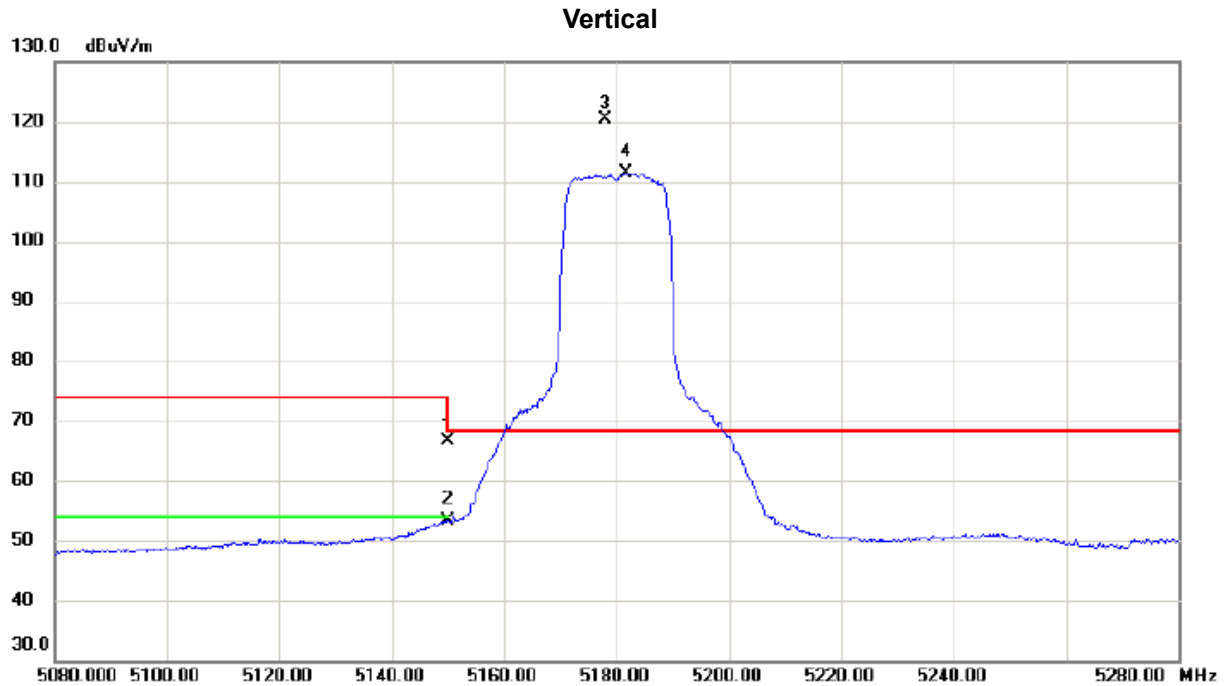


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	48.09	18.57	66.66	74.00	-7.34	peak	
2		5150.000	34.69	18.57	53.26	54.00	-0.74	AVG	
3	*	5178.000	101.70	18.60	120.30	68.30	52.00	peak	No Limit
4	X	5181.600	92.88	18.60	111.48	68.30	43.18	AVG	No Limit

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5180 MHz

## Vertical

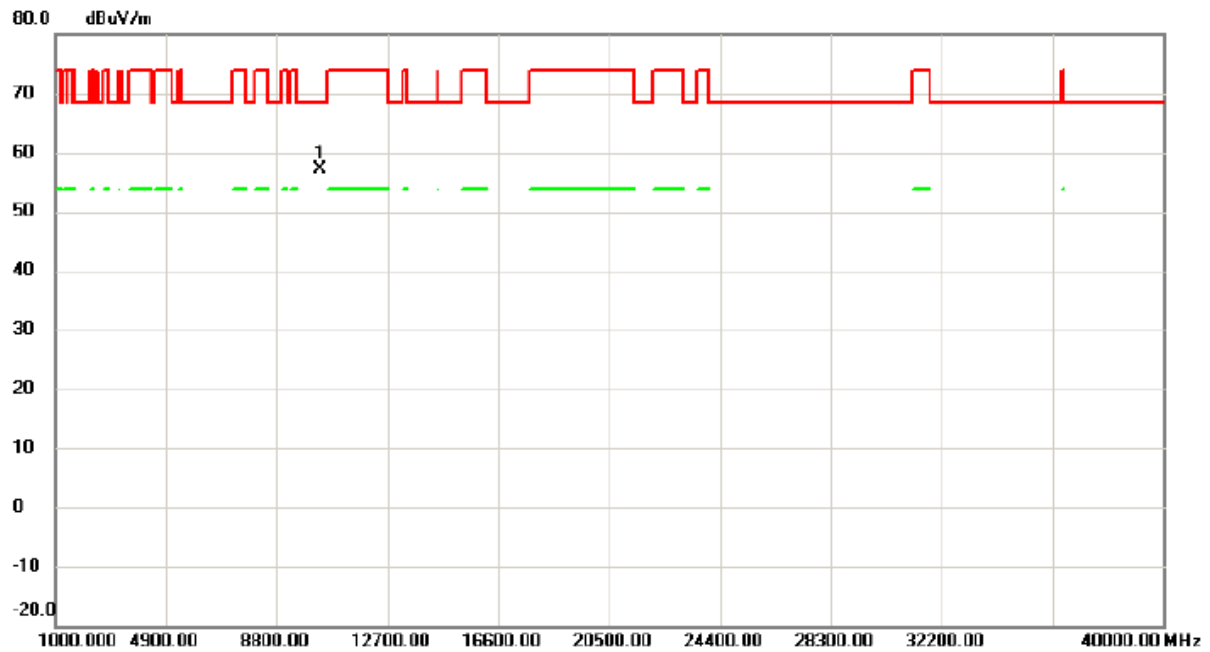

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10356.625	43.35	13.80	57.15	68.30	-11.15	peak	


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5180 MHz

## Horizontal

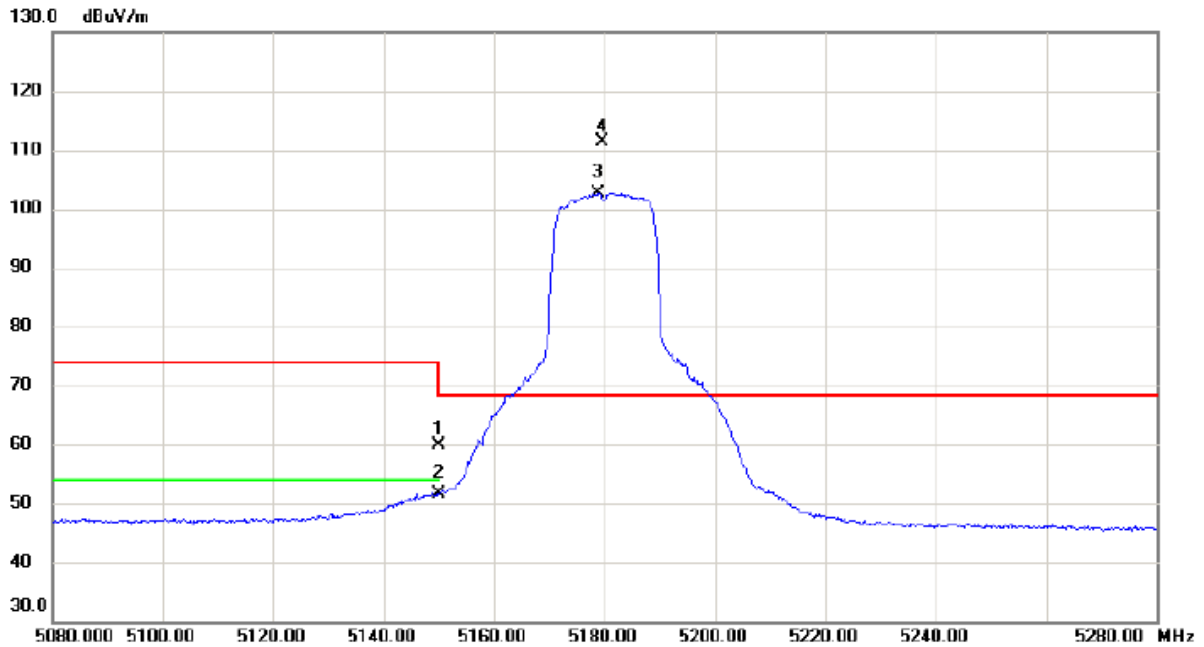


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	41.21	18.57	59.78	74.00	-14.22	peak	
2		5150.000	32.97	18.57	51.54	54.00	-2.46	AVG	
3	X	5178.900	84.09	18.60	102.69	68.30	34.39	AVG	No Limit
4	*	5179.500	92.71	18.60	111.31	68.30	43.01	peak	No Limit

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5180 MHz

## Horizontal

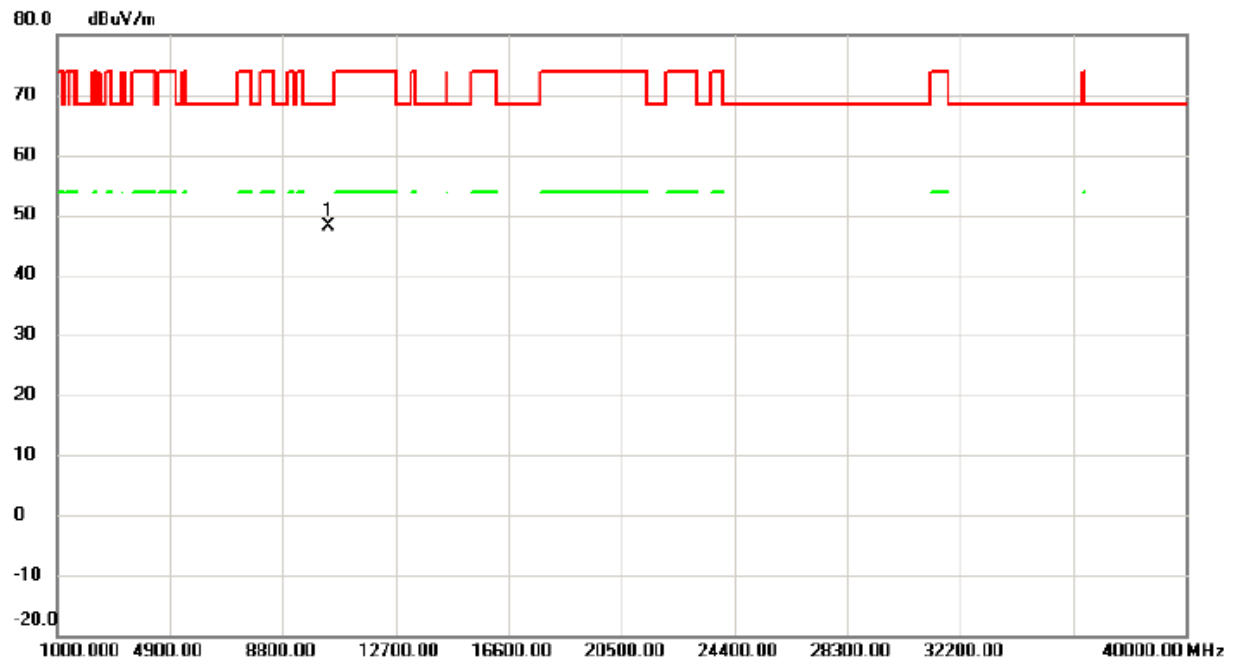


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10361.290	34.20	13.81	48.01	68.30	-20.29	peak	

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5200 MHz

## Vertical

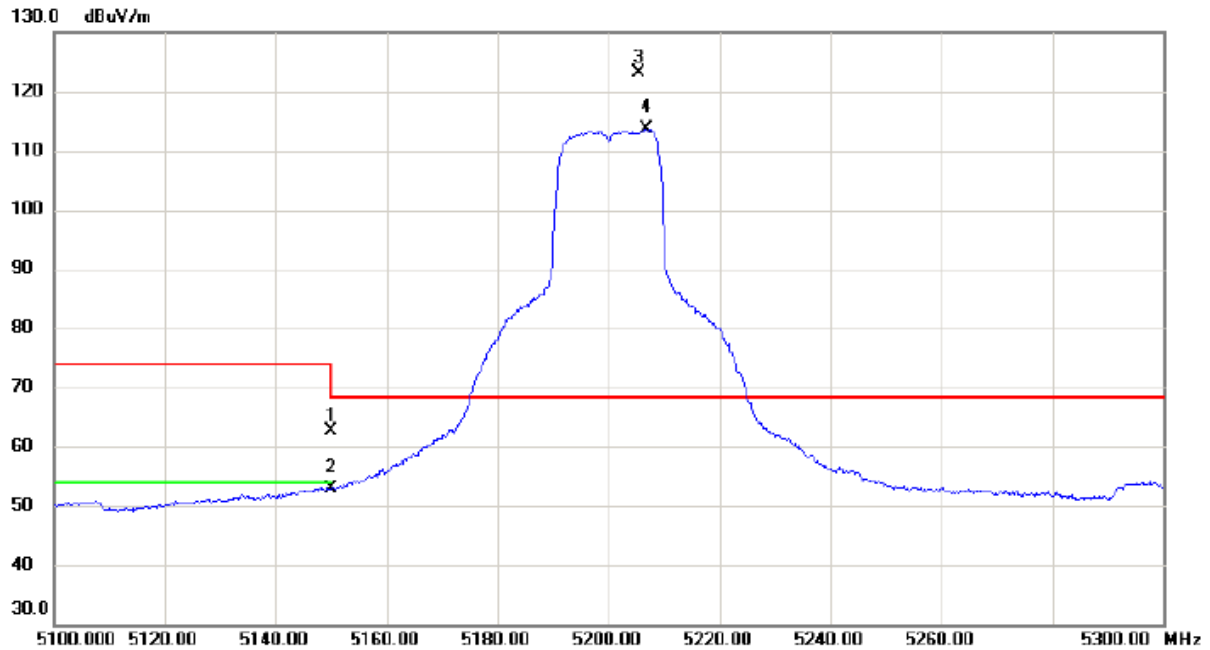


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	44.04	18.57	62.61	74.00	-11.39	peak	
2		5150.000	34.27	18.57	52.84	54.00	-1.16	AVG	
3	*	5205.400	104.45	18.63	123.08	68.30	54.78	peak	No Limit
4	X	5206.800	95.00	18.62	113.62	68.30	45.32	AVG	No Limit

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5200 MHz

## Vertical

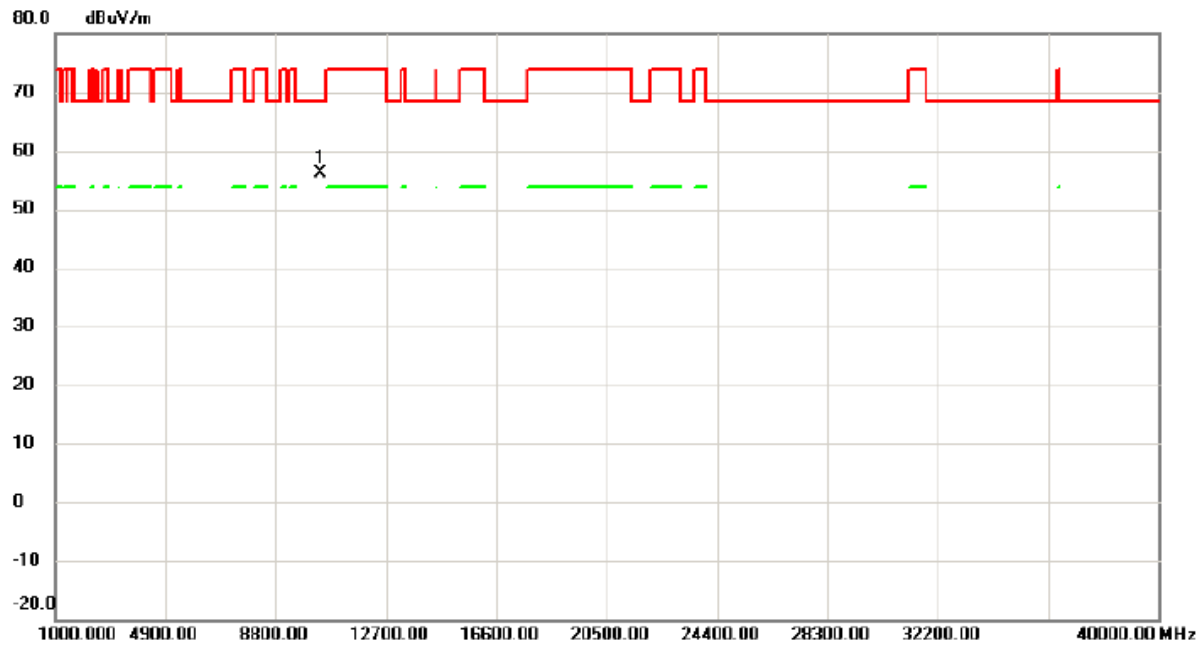


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10404.375	42.16	13.89	56.05	68.30	-12.25	peak	

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5200 MHz

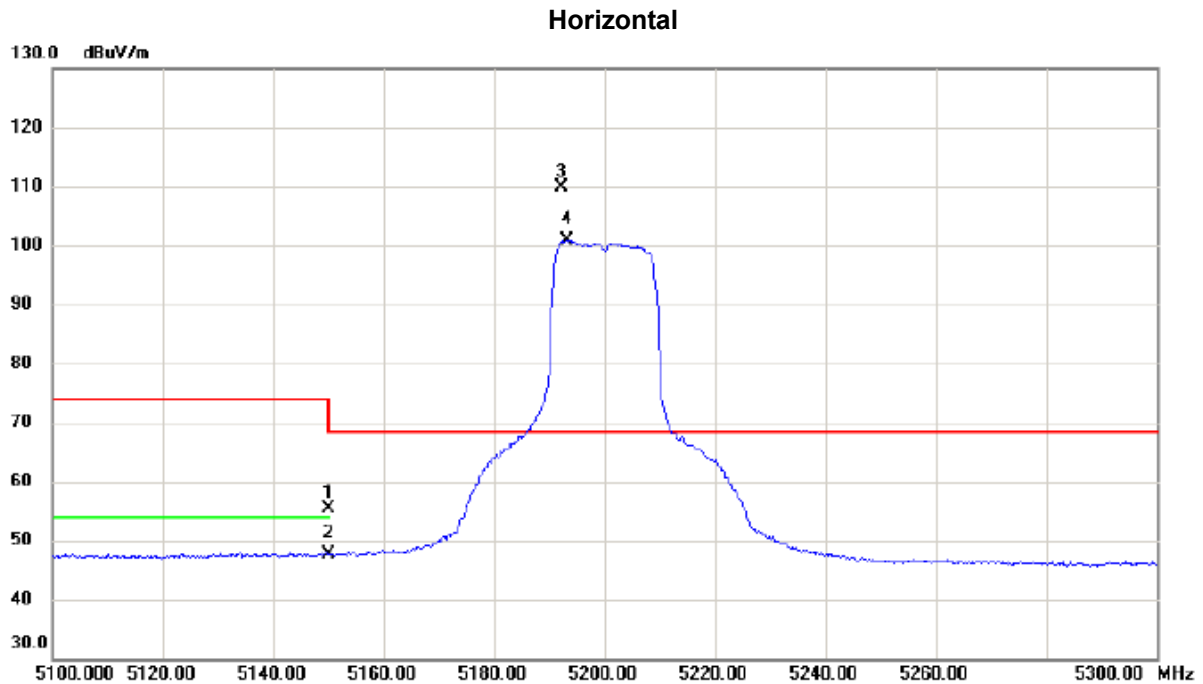


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5150.000	36.76	18.57	55.33	74.00	-18.67	peak	
2		5150.000	28.98	18.57	47.55	54.00	-6.45	AVG	
3	*	5192.200	91.39	18.61	110.00	68.30	41.70	peak	No Limit
4	X	5193.300	82.28	18.61	100.89	68.30	32.59	AVG	No Limit

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5200 MHz

## Horizontal

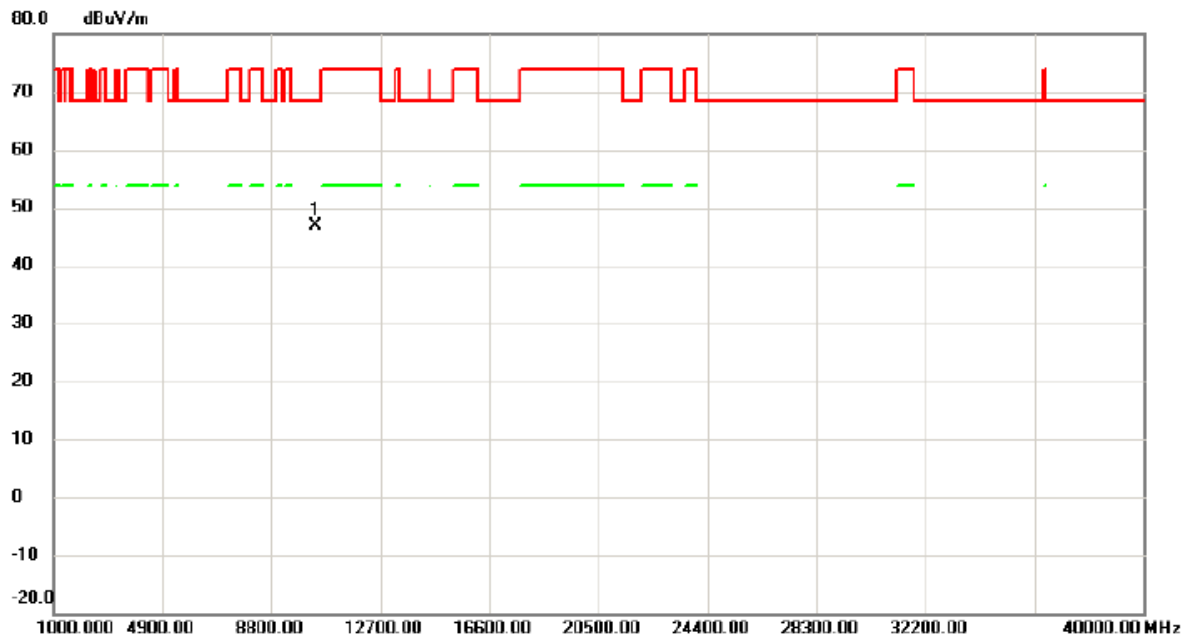


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10399.360	33.06	13.89	46.95	68.30	-21.35	peak	

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5240 MHz

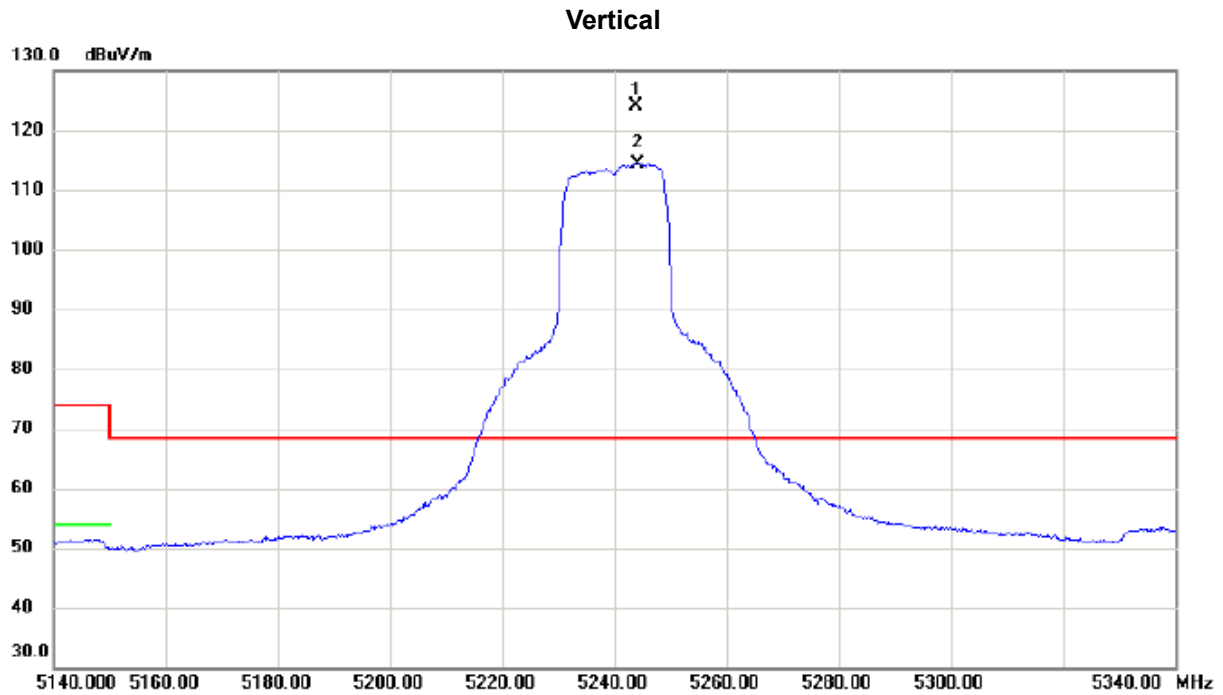


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5243.800	105.43	18.66	124.09	68.30	55.79	peak	No Limit
2	X	5244.200	95.79	18.66	114.45	68.30	46.15	AVG	No Limit

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5240 MHz

## Vertical

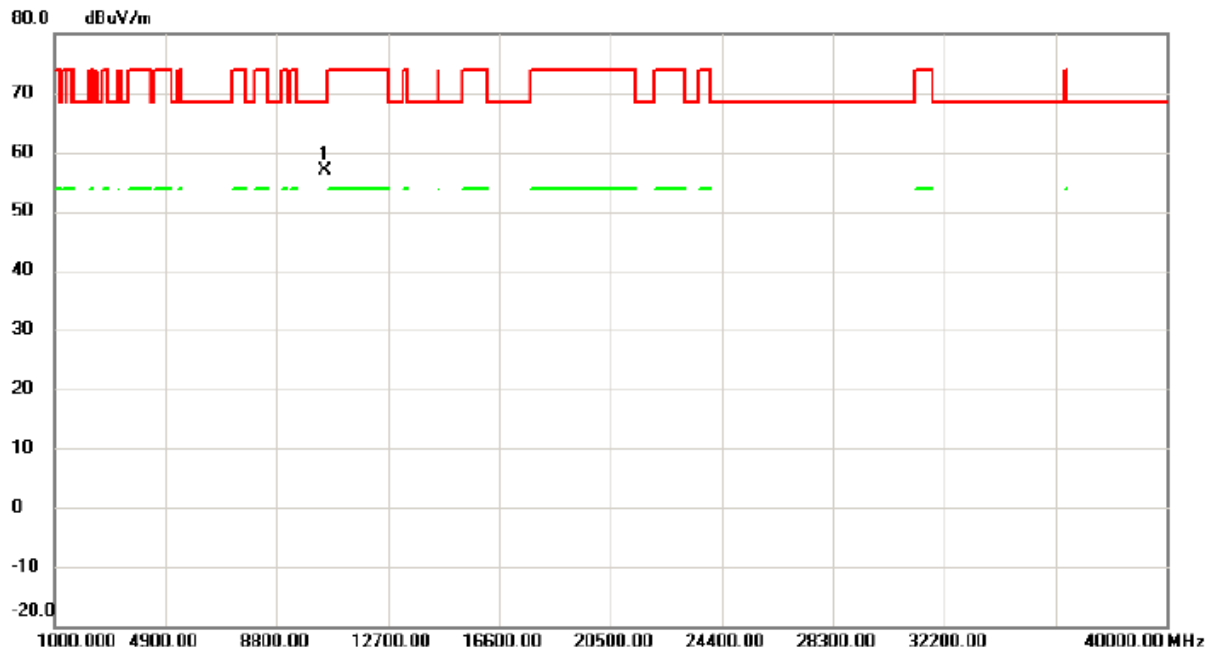

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10480.175	42.75	14.06	56.81	68.30	-11.49	peak	


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5240 MHz

## Horizontal

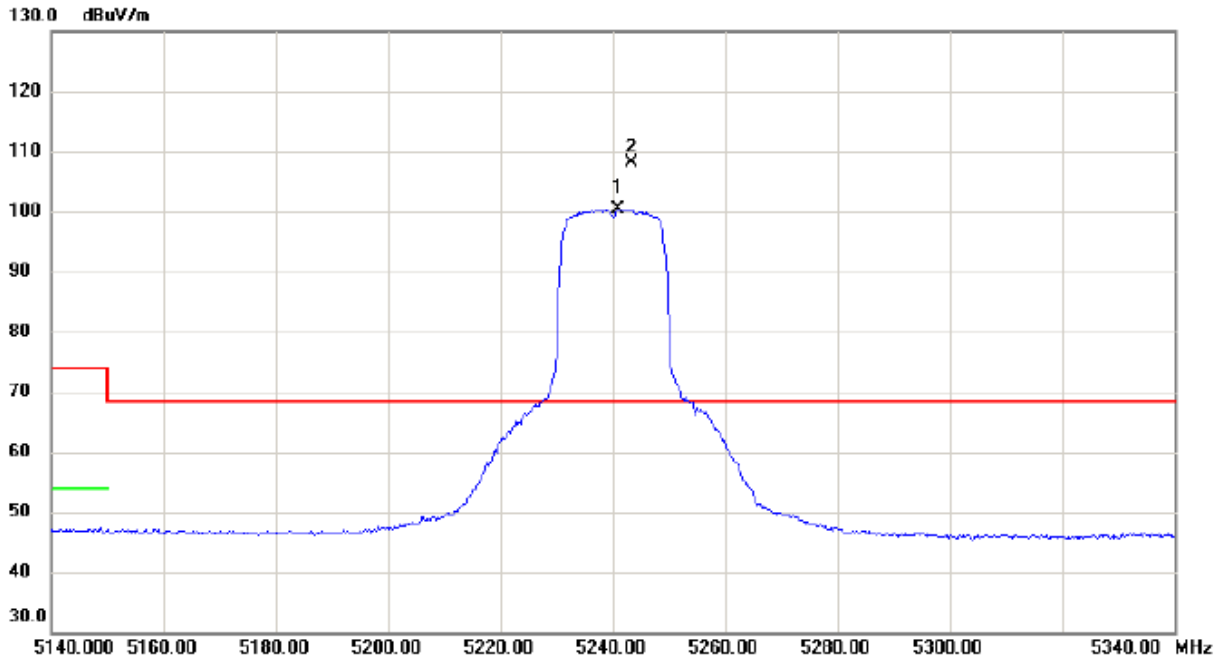

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5241.000	81.78	18.66	100.44	68.30	32.14	AVG	No Limit
2	*	5243.300	89.44	18.66	108.10	68.30	39.80	peak	No Limit


### REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5240 MHz

## Horizontal

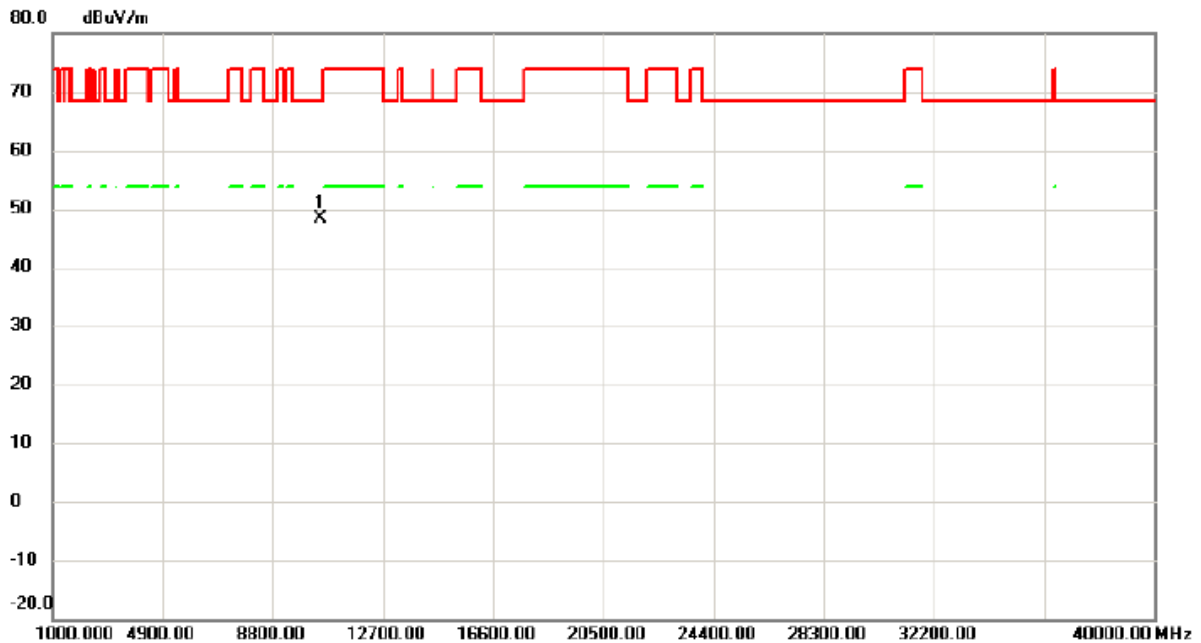


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10476.855	34.25	14.06	48.31	68.30	-19.99	peak	

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5190 MHz

## Vertical

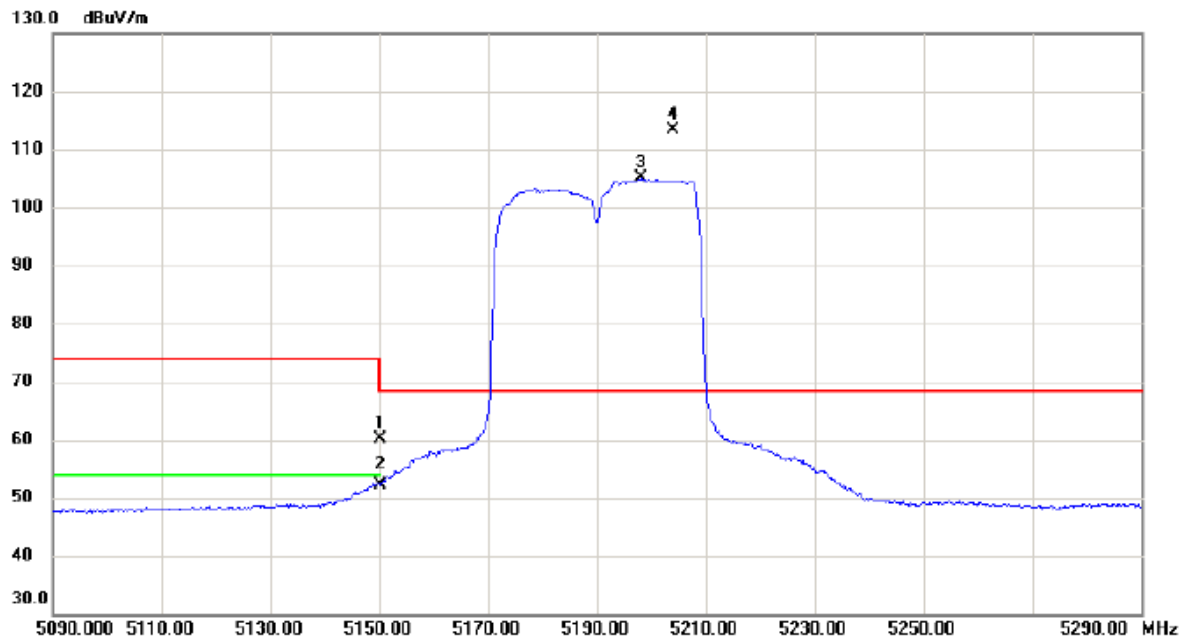

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	41.53	18.57	60.10	74.00	-13.90	peak	
2		5150.000	33.61	18.57	52.18	54.00	-1.82	AVG	
3	X	5198.100	86.42	18.62	105.04	68.30	36.74	peak	No Limit
4	*	5203.900	94.80	18.62	113.42	68.30	45.12	peak	No Limit


### REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5190 MHz

## Vertical

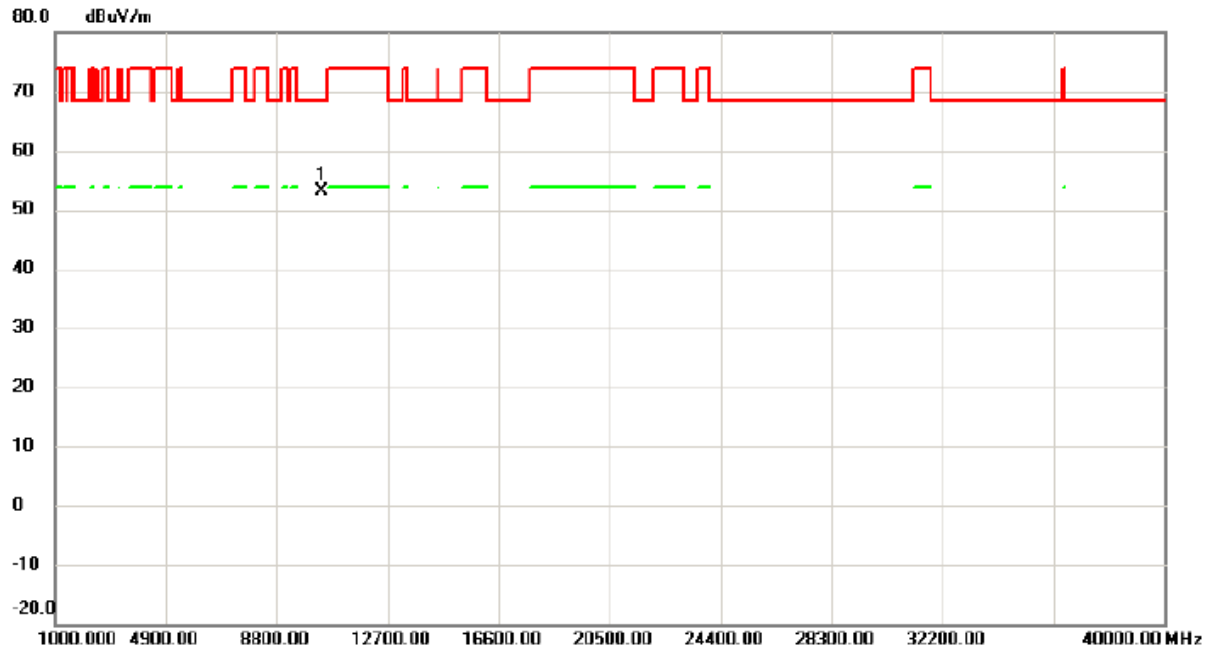

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10381.550	39.26	13.86	53.12	68.30	-15.18	peak	

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.