

ERP机型: PLA3543Q-GL-SMT00030A-V1 ERP P/N:
描述: 安装操作说明: PLA3543Q/PGA381, STM000,REV.B,300x100mm, 80G 书纸, 双面单黑印刷,风琴折2折页, ROHS2.0,REACH,POPs,PAHS,PROP65,

K

Die Line

Designed : Walter

Date : 2022-05-07

正面

正面

风琴折2折页

成型尺寸 : 100x100mm


LOCKLY GUARD™

WWW.LOCKLYPRO.COM

WIRELESS CHIME (PGA381)

Installation & User Manual


Lockly Guard Wireless Chime is based on bidirectional RF433.92MHz and Lockly 2.0 proprietary encryption, providing communication reliability, stability, and better security. It is powered by 3 x AA batteries and supports 5V DC for sustained power supply.

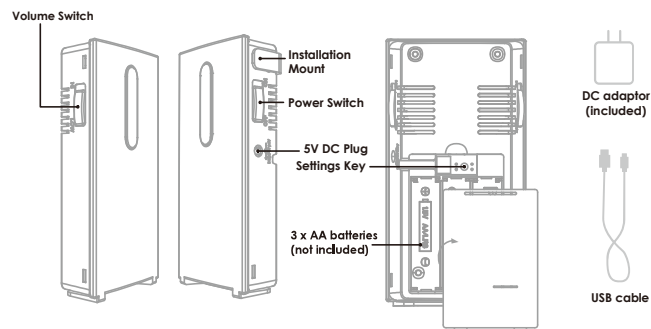

Power Up to Pair the Chime

Open the battery compartment and insert 3 x AA batteries ensuring that they are correctly oriented. You may also use the included 5V 1A DC adaptor to connect to power supply. Turn the power switch button on the rear side and the chime will be activated.

NOTE: Wireless Chime will first use the batteries if you have installed 3 x AA and DC power supply as backup. For a longer product life, it is recommended to use DC power supply.

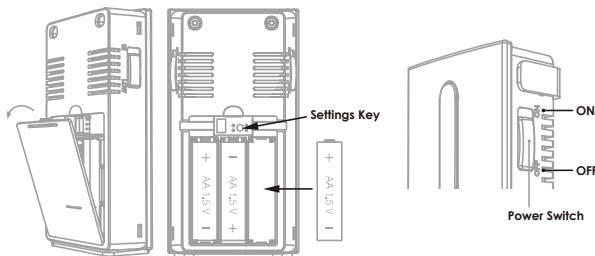


Enter the smart door lock into pairing mode. (*Refer to the manual of the smart door lock on how to enter pairing mode.*) Briefly press the settings key at the back of the chime twice (2x). The chime enters the pairing mode. The red and white LED indicators flashes alternately and slowly. If pairing is successful, the white LED will be ON for 2S. The red LED will be ON for 2S if the pairing fails or timeout in 30s.

Set Ringtone


Short press the settings key	Play the currently set ringtone
Short press the settings key	Switch to the next song
Double tap the settings key	Switch to previous song
Press and hold the settings key	Save and exit settings

You will automatically exit the settings mode after 30s if no action received.

! When the alarm is triggered, the chime will ring and the alarm will last for 3 minutes. Briefly press the settings key at the back of the chime to turn off the alarm.




Press the doorbell button on the door lock. The wireless chime will ring and the white LED indicator will flash. Use volume switch (on the left side) to adjust volume to either High or Low.

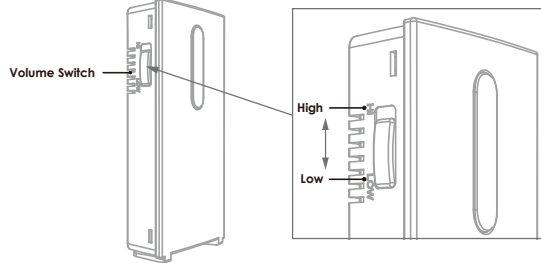


Install the Wireless Chime

You can place the chime on a flat table, or choose an appropriate location. Fix the installation mount with accessories included in the package as shown:

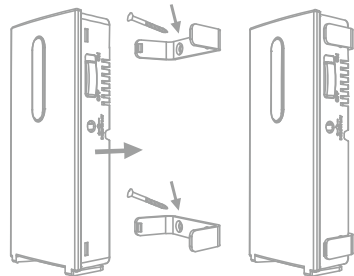

To dismount the chime, push it inward to the installation mount and slide it downward as shown below.

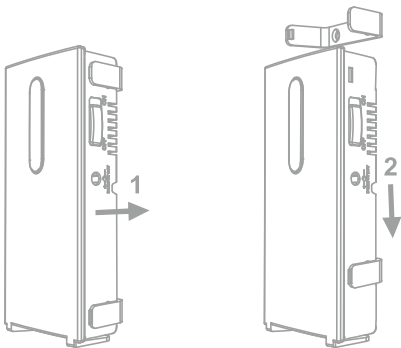

Low Battery Reminder

When the battery power is too low, the red LED indicator will flash. Please replace the batteries in time.

Restore to Factory settings

Long press the settings key for **5S**, the white LED indicator will be on for 2S, and the chime will return to factory settings.

! After restoring to factory settings, the ringtone will return to the default "Ding Dong" sound. The pairing information with the smart door lock will be cleared.

FCC Warning:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE 1: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

NOTE 2: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. It should be installed and operated with minimum distance 20cm between the radiator & your body.

IC WARNING

This device contains licence-exempt transmitter(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions: (1) This device may not cause interference. (2) This device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

1. L'appareil ne doit pas produire de brouillage;
2. L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

IC Radiation Exposure Statement

This equipment meets the exemption from the routine evaluation limits in section 2.5 of RSS-102. It should be installed and operated with a minimum distance of 20cm between the radiator and any part of your body.

Cet équipement est conforme à l'exemption des limites d'évaluation habituelle de la section 2.5 de la norme RSS-102. Il doit être installé et utilisé à une distance minimale de 20 cm entre le radiateur et toute partie de votre corps.

! **WARNING:** This product can expose you to chemicals including Lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.