

AUT Report

Product Model: Archer BE800

Manufacturer: TP-LINK CORPORATION PTE. LTD.

Test Date: 2023.06.05

Tested By: Yu Sunli *Yu Sunli*




TP-LINK CORPORATION PTE. LTD.
7 Temasek Boulevard #29-03 Suntec Tower One, Singapore 038987

Index

1. Antenna Distribution.....	3
2. Electrical Characteristics	4
3. Gain and Radiation Pattern	6
3.1 Measurement Procedure	6
3.2 Test Setup	7
3.3 S Parameter Test Data	8
3.4 Antenna Peak Gain	11
3.5 Antenna Radiation Pattern.....	12

1. Antenna Distribution

Archer BE800

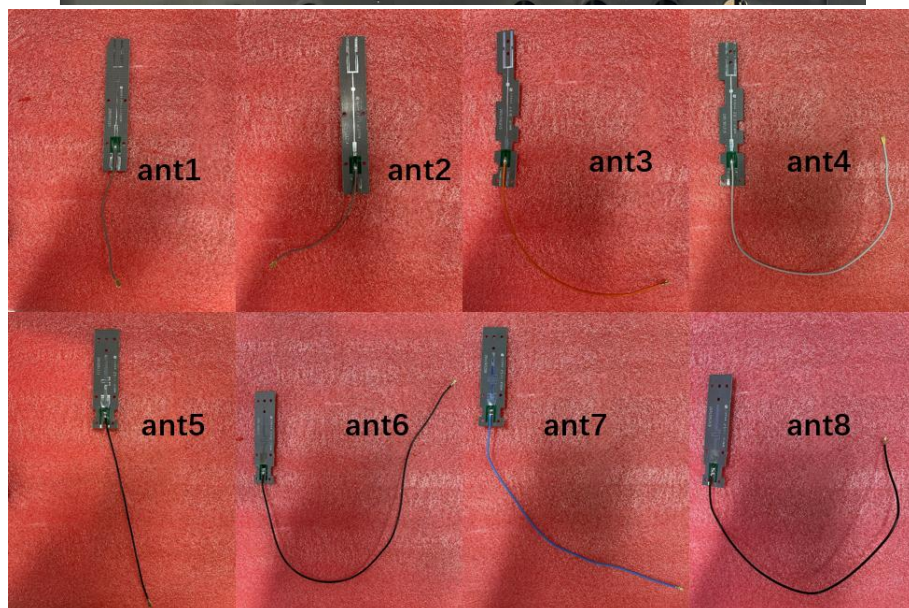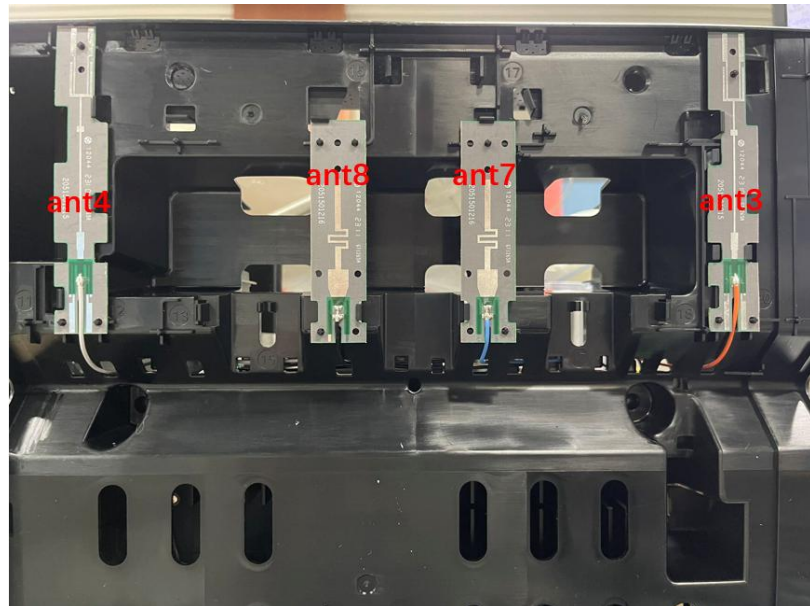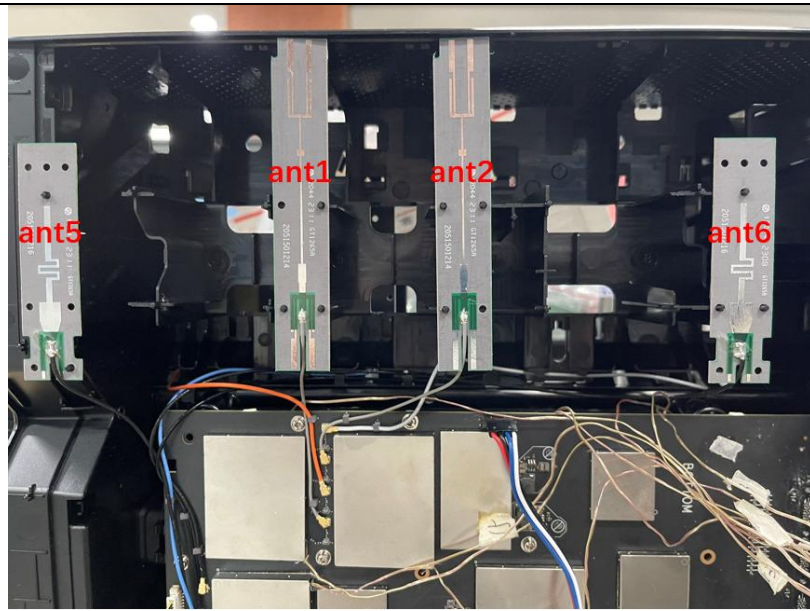

2. Electrical Characteristics

Ant1	
Frequency	2400~2500 & 5150~5895MHz
Impedance	50Ohm
Antenna Type	Dipole
Antenna Gain	1.79dBi@2400~2500MHz 1.50dBi@5150~5250MHz 1.54dBi@5250~5350MHz 3.00dBi@5470~5725MHz 2.21dBi@5725~5895MHz
Radiation pattern	Omni-Directional
P/N	3101505998

Ant2	
Frequency	2400~2500 & 5150~5895MHz
Impedance	50Ohm
Antenna Type	Dipole
Antenna Gain	2.00dBi@2400~2500MHz 1.67dBi@5150~5250MHz 0.91dBi@5250~5350MHz 2.34dBi@5470~5725MHz 1.87dBi@5725~5895MHz
Radiation pattern	Omni-Directional
P/N	3101505998

Ant3	
Frequency	2400~2500 & 5150~5895MHz
Impedance	50Ohm
Antenna Type	Dipole
Antenna Gain	1.75dBi@2400~2500MHz 2.37dBi@5150~5250MHz 2.58dBi@5250~5350MHz 2.60dBi@5470~5725MHz 1.37dBi@5725~5895MHz
Radiation pattern	Omni-Directional
P/N	3101505999

Ant4	
Frequency	2400~2500 & 5150~5895MHz
Impedance	50Ohm
Antenna Type	Dipole
Antenna Gain	1.51dBi@2400~2500MHz 1.26dBi@5150~5250MHz 1.41dBi@5250~5350MHz 0.84dBi@5470~5725MHz 0.24dBi@5725~5895MHz
Radiation pattern	Omni-Directional
P/N	3101506000

Ant5	
Frequency	5925~7125MHz
Impedance	50Ohm
Antenna Type	Dipole
Antenna Gain	3.00dBi@5925~6425MHz 2.18dBi@6425~6525MHz 2.49dBi@6525~6875MHz 0.84dBi@6875~7125MHz
Radiation pattern	Omni-Directional
P/N	3101506001

Ant6	
Frequency	5925~7125MHz
Impedance	50Ohm
Antenna Type	Dipole
Antenna Gain	2.07dBi@5925~6425MHz 1.04dBi@6425~6525MHz 2.87dBi@6525~6875MHz 2.59dBi@6875~7125MHz
Radiation pattern	Omni-Directional
P/N	3101506002

Ant7	
Frequency	5925~7125MHz
Impedance	50Ohm
Antenna Type	Dipole
Antenna Gain	2.83dBi@5925~6425MHz 1.80dBi@6425~6525MHz 2.08dBi@6525~6875MHz 1.83dBi@6875~7125MHz
Radiation pattern	Omni-Directional
P/N	3101506003

Ant8	
Frequency	5925~7125MHz
Impedance	50Ohm
Antenna Type	Dipole
Antenna Gain	2.71dBi@5925~6425MHz 2.32dBi@6425~6525MHz 1.68dBi@6525~6875MHz 2.74dBi@6875~7125MHz
Radiation pattern	Omni-Directional
P/N	3101506004

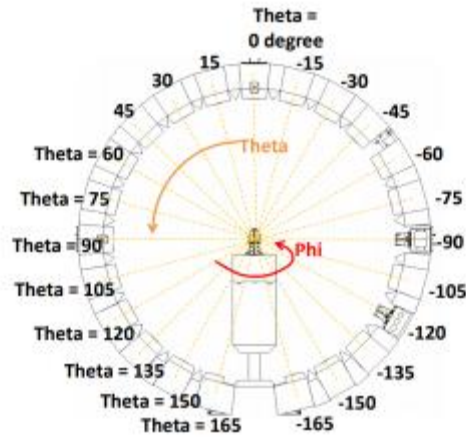


Figure 3-2

Before the measurement, calibrated the vector network analyzer, and then connected the input end of each antenna to the output end of the vector network analyzer, and evenly the antennas to be measured.

Test Equipment listed below:

Equipments	Model	Manufacturer	S/N	Cali. Interval	Cali. Due Date
Chamber	Rayzone2800	GTS(General Test System)	MY5347043 5	12months	2024/01/15
Vector Network Analyzer	E5071C	Keysight	MY46315238	24months	2024/03/13
GTS MaxSign100 Software	V2.1	GTS(General Test System)	/	/	/

3.2 Test Setup

The test setup was shown in Figure 3-3, 3-4:



Figure 3-3


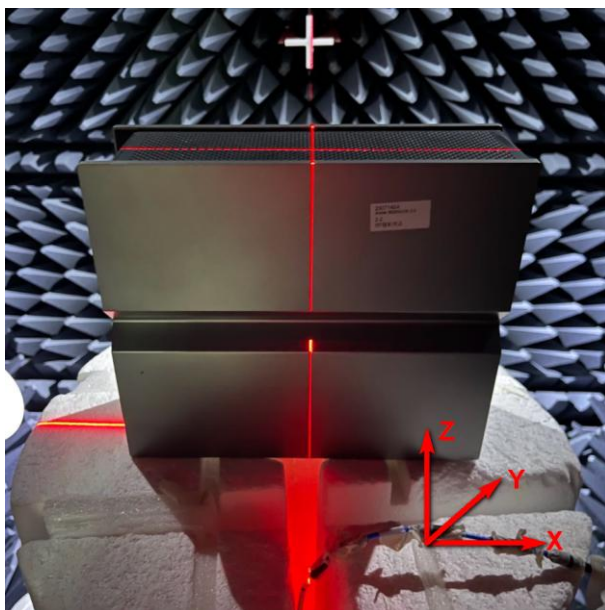



Figure 3-4

3.3 S Parameter Test Data


Ant1

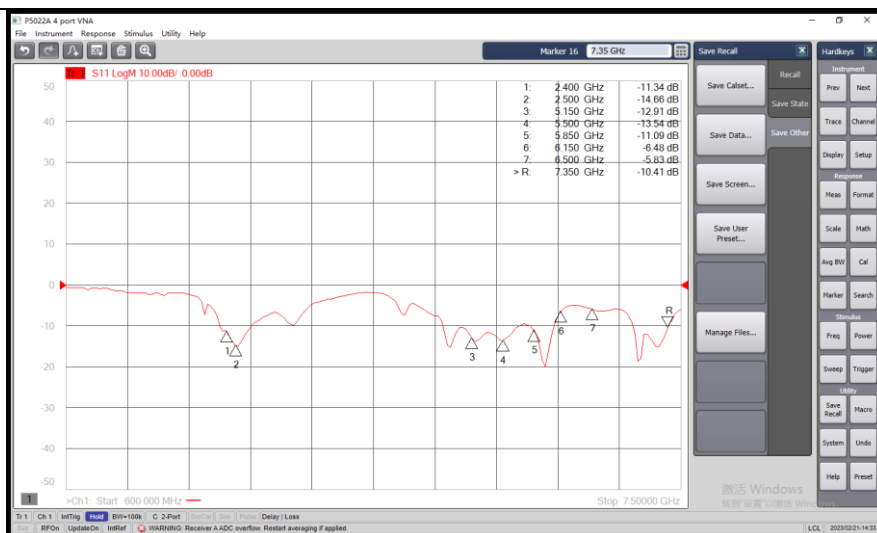


Ant2

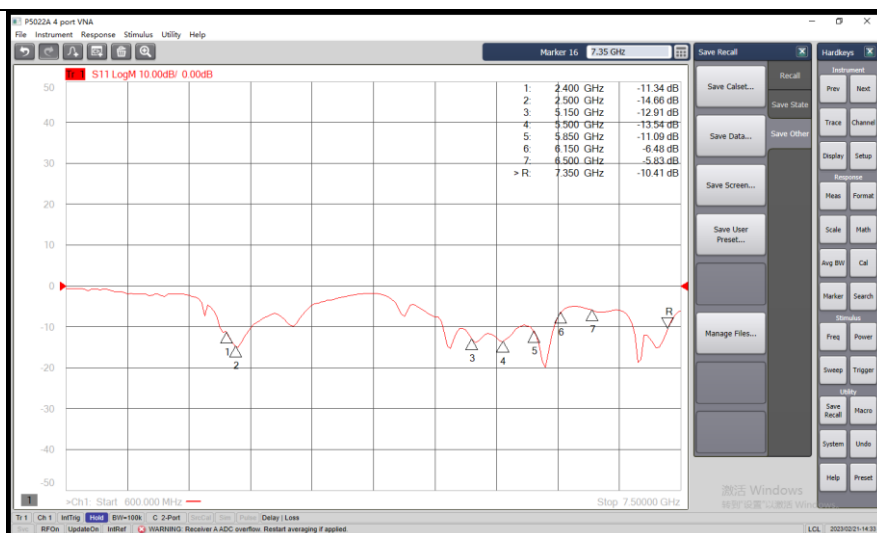


Ant3

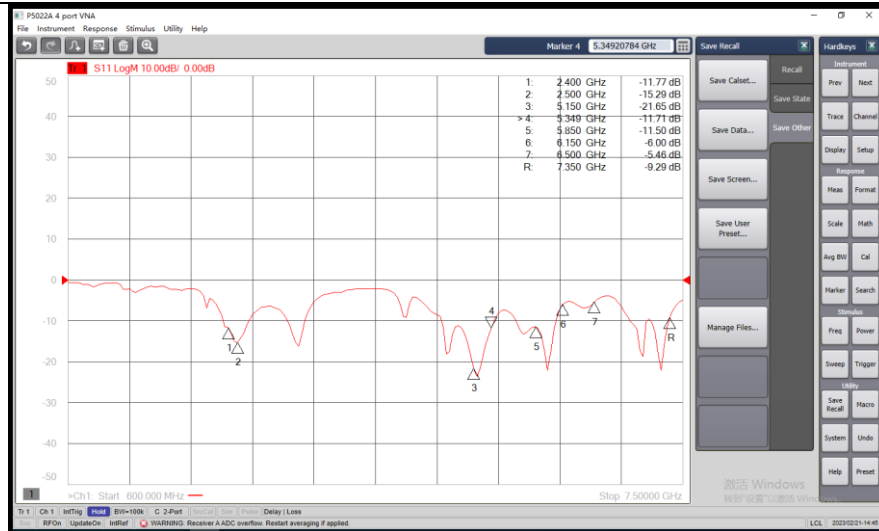


Ant4

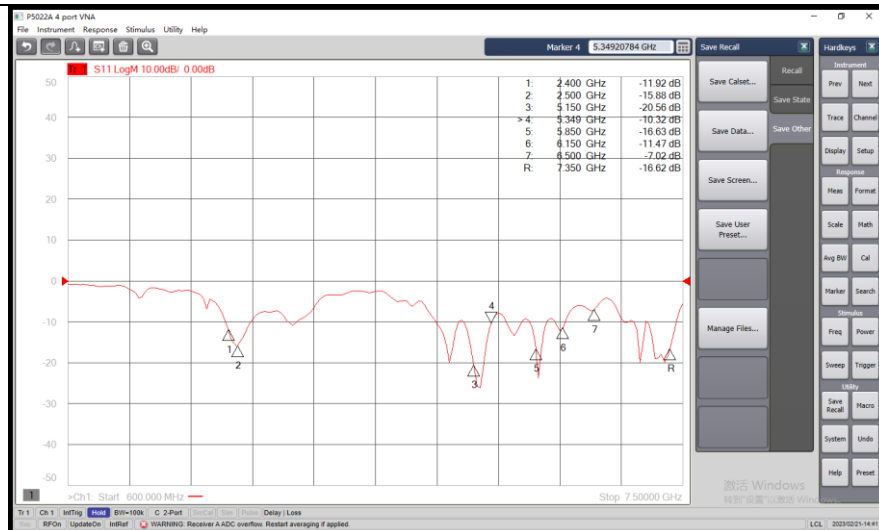


Ant5

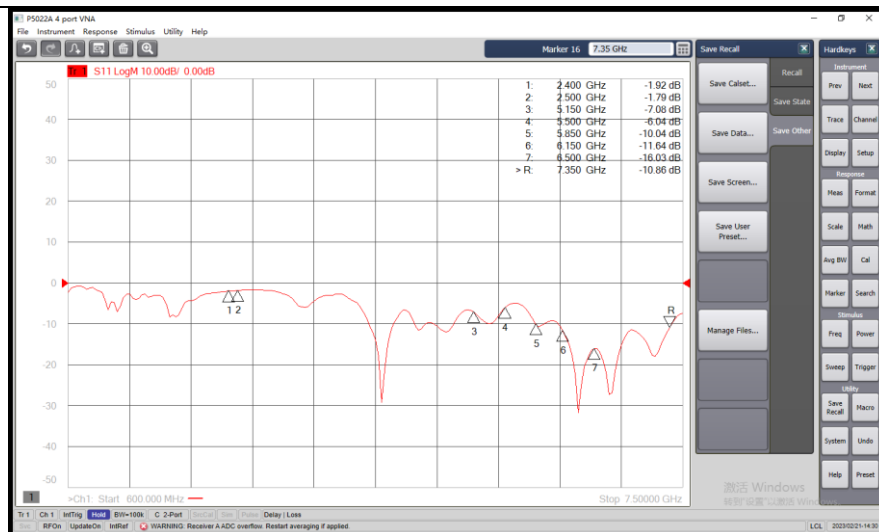


Ant6

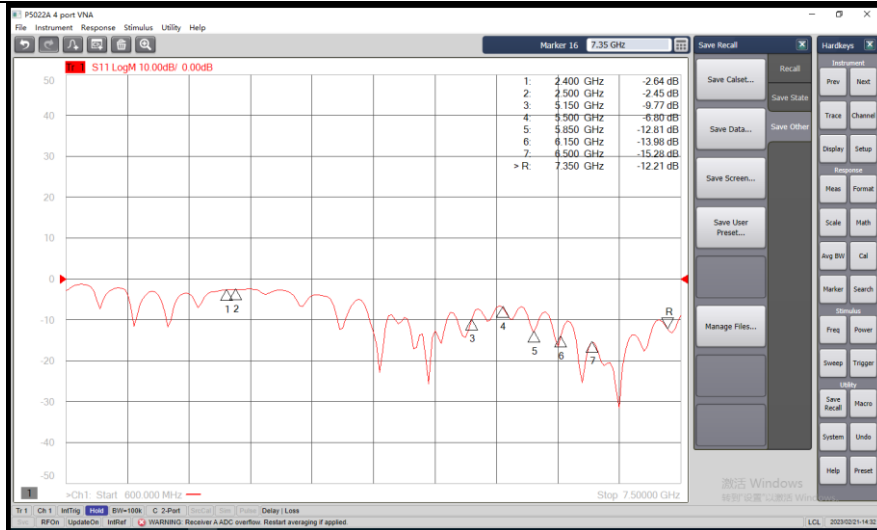

Ant7

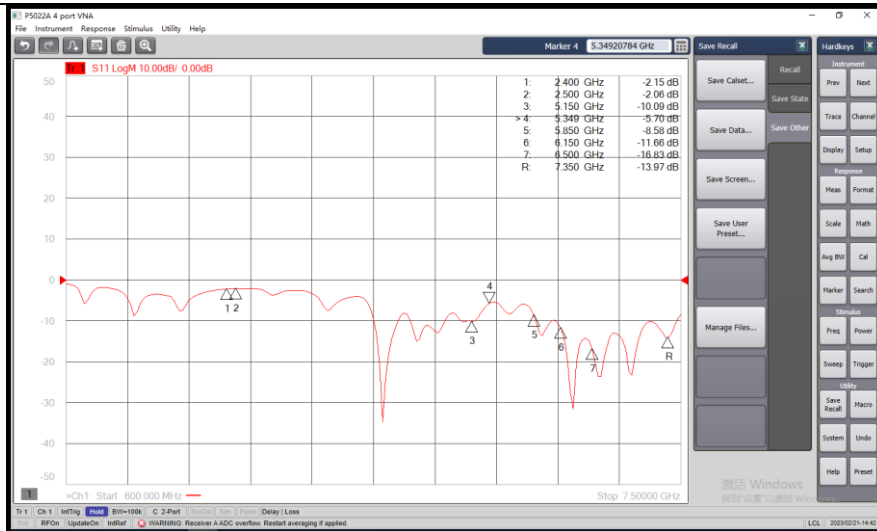

Ant8

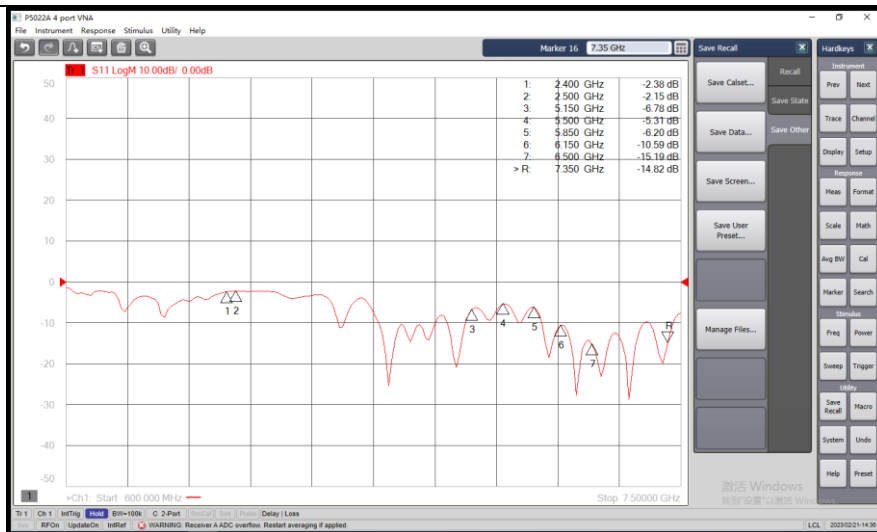

3.4 Antenna Peak Gain

Frequency(GHz)	2.45	5.2	5.3	5.6	5.8	5.9
Ant1 MaxGain(dBi)	1.79	1.50	1.54	3.00	2.21	2.21
Ant2 MaxGain(dBi)	2.00	1.67	0.91	2.34	1.87	1.87
Ant3 MaxGain(dBi)	1.75	2.37	2.58	2.60	1.37	1.37
Ant4 MaxGain(dBi)	1.51	1.26	1.41	0.84	0.24	0.24
Ant1 Polarization/ Φ (°) / θ (°)	Theta/210/75	Theta/180/90	Theta/300/90	Theta/0/90	Theta/300/90	Theta/300/90
Ant2 Polarization/ Φ (°) / θ (°)	Theta/285/90	Theta/15/90	Theta/180/90	Theta/315/90	Theta/315/90	Theta/315/90
Ant3 Polarization/ Φ (°) / θ (°)	Theta/15/90	Theta/0/90	Theta/0/90	Theta/0/90	Theta/0/90	Theta/0/90
Ant4 Polarization/ Φ (°) / θ (°)	Theta/330/75	Theta/180/90	Theta/180/90	Theta/180/90	Theta/180/90	Theta/180/90
Max Gain(dBi)	2.00	2.37	2.58	3.00	2.21	2.21

Frequency(GHz)	6.175	6.475	6.725	7.025
Ant5 MaxGain(dBi)	3.00	2.18	2.49	0.84
Ant6 MaxGain(dBi)	2.07	1.04	2.87	2.59
Ant7 MaxGain(dBi)	2.83	1.80	2.08	1.83
Ant8 MaxGain(dBi)	2.71	2.32	1.68	2.74
Ant5 Polarization/ Φ (°) / θ (°)	Theta/210/90	Theta/195/75	Theta/210/90	Theta/225/75
Ant6 Polarization/ Φ (°) / θ (°)	Theta/255/90	Theta/345/90	Theta/0/90	Theta/15/90
Ant7 Polarization/ Φ (°) / θ (°)	Theta/75/90	Theta/180/90	Theta/120/90	Theta/60/90
Ant8 Polarization/ Φ (°) / θ (°)	Theta/75/90	Theta/345/90	Theta/120/90	Theta/135/90
Max Gain(dBi)	3.00	2.32	2.87	2.74

3.5 Antenna Radiation Pattern

