

SM-62682

4-IN-1 BT SPEAKER LIGHT WITH
WHITE NOISE MACHINE CLOCK






USER MANUAL ►

Basic Features

Item size: 90x46X110MM	Battery: 1200MAH
Input: 5V/800MA	Charging time: 2H
Working time: 3-6H	Bluetooth: V5.1
Speaker: 40MM,3W	LED: 11PCS WARM

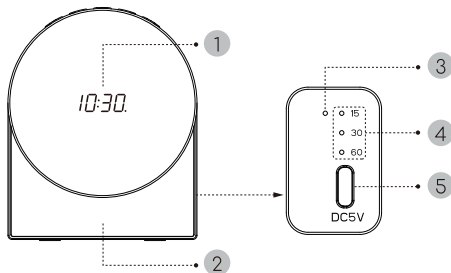


Functional diagram






- 1 Time display panel
- 2 Led Night Light Area
- 3 Charging Led indicator
- 4 Timer LED Indicator including 15/30/60 Minutes
- 5 Type C Power input Slot
- 6 Speaker area
- 7 Light control button
- 8 Previous track or volume down button
- 9 Power on/off, Pause/Mode Button
- 10 Next track or volume up button
- 11 Timer/time/Alarm setting button


Sleeping Soother

Long Press 2 seconds button “” to turn on the device, then start playing the default therapy song-stream, the Led light will display “*SLP*” at the same time, then go back the time display in 5 seconds; Press “” or “” to choose the best sound you like, there are 6 optional Sleeping therapy sounds including Stream, Brahms Lullaby, Sea Wave, Silent Night, Fetal, White Noise;

Short press this button to pause the song;



Bluetooth Speaker


Short press twice the button “” to switch to Bluetooth mode from Sleeping soother mode, the Led light will display “*BLUE*” at the same time, then go back the time display in 5 seconds; Start pairing automatically once Bluetooth On, Follow the operating instruction of your Bluetooth device(phone, pad etc) and allow it to search Bluetooth state, after a few seconds your mobile will discover the Bluetooth speaker under “SM-62682”, Select this and your device will confirm this pairing. You can start play music through the speaker.


Short press this button to pause the Bluetooth Playing;




Timer Function:

Short Press once the Button"  "for 15MIN countdown;





Short Press twice the Button"  "for 30MIN countdown;

Short Press three times the Button"  "for 60MIN countdown;

Led Night Light

Long press 2 seconds the light button"  " to turn on/off the light, Short Press to change the brightness, there are three optional brightness : Strong--Middle--Weak in circle;

Clock Setting

Long press 2 Seconds the Button"  "to enter the clock setting mode . At this point the number of hours () will flicker ,adjust the hour by pressing " " or " ";

Short press the Button “⌚” again to switch to the minute setting area , the minutes (**88**00) will flicker , adjust the minute by pressing “-” or “+”;

Short press the Button “⌚” again to enter the Alarm clock setting mode . At this point the number of hours (00**88**) will flicker ,adjust the hour by pressing “-” or “+”;

Short press the Button “⌚” again to switch to the Alarm minute setting area , the minutes (88**00**) will flicker , adjust the minute by pressing “-” or “+”;


Short press the Button “⌚” again to switch to choose the Alarm sound setting, then choose the alarm song by pressing “-” or “+”; there are total six optional Alarm songs, you will see the Clock LED light display optional numbers: 01/02/03/04/05/06,

Short press the Button “” again to switch to the Alarm ONE/ALL setting, choose ONE/ALL by pressing “” or “”;

ONE: The Clock will have alarm sound just one day at the time set;


ALL: The clock will have alarm sound everyday at the time set;

Short press the Button “” again to switch to Alarm on/Off setting, choose ON/OFF by pressing “” or “”;

After above steps are done in sequence, Short press the Button “” again or do not press any button for 5 seconds, device setting will be completed and the display will return to main screen.

Fast Press 2 times this button “” to Turn off/on the clock light display;

Fast Press 3 times this button “” to turn Alarm Clock ON / OFF.

Fast Press 5 times this button “” to RESET the clock, then the clock will restart, you will see the default clock display is 12:00 PM, and default Alarm clock display is 08:00 and Alarm on;

Remark:

- 1) The display will return to main screen if you don't press any button for 10 seconds against all above any setting step;
- 2) The Alarm Clock will last 60 seconds each time and alarm again in each 5 Minutes, total four times as a alarm ring cycle each day. And alarm again in each 5 Minutes, total five times as a snooze cycle each day. Press any button to end the snooze and alarm setting during this cycle;

BUILT-IN BATTERY

Battery capacity is 1200MAH, Please charge this device by the Type-C charging cable provided. It will last 1-2H for full charge;

LOW battery: If the battery is low power, the device will alarm each 2 minutes- "**Low battery, please charge**" total three times and then power off automatically to protect the battery, Please Charge the unit using the Type-C charging cable provided. the charging indicator will be constant while charging, and then turns off Once it is fully charged;

Notice

- Do not let children play the product.
- Do not hit or beat the product.
- Do not use in very humid and high temperature environments
- Do not throw the product into fire.
- Do not block speaker's net above the body
- Please send to repair when the product is broken.
- Do not disassemble it by yourself.
- It's not covered under warranty when the product has metal of rust, surface spelling and other natural oxidation.

Battery Removal/Disposal

Your product contains batteries which cannot be disposed with normal household waste. Doing so may harm the environment. Please inform yourself about the local rules on separate collection of batteries because correct disposal helps to prevent negative consequences for the environmental and human health. Should your product develop a fault and your battery needs replacing PLEASE DO NOT REMOVE THE BATTERY!

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

"CAUTION: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment."

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.