



TEST REPORT

APPLICANT	:	Anker	Innovation	s Limited	

PRODUCT NAME : eufy Smart Lock E30

MODEL NAME : T85F1

BRAND NAME : eufy

- FCC ID : 2AOKB-T85F1
- STANDARD(S) : 47 CFR Part 15 Subpart C

RECEIPT DATE : 2024-06-27

TEST DATE : 2024-07-04 to 2024-07-29

ISSUE DATE : 2024-08-01



ong /Vhi

Peng Mi (Rapporteur)

Approved by:

Edited by:

PM Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

 Tel:
 86-755-36698555
 Fax:
 86-755-36698525

 Http://www.morlab.cn
 E-mail:
 service@morlab.cn





DIRECTORY

1. S	Summary of Test Result ······4
1.1.	Testing Applied Standards5
1.2.	Test Equipment List ······6
1.3.	Measurement Uncertainty ······8
1.4.	Testing Laboratory
2. 0	Seneral Description ······9
2.1.	Information of Applicant and Manufacturer9
2.2.	Information of EUT······9
2.3.	Channel List of EUT ······10
2.4.	Test Configuration of EUT ······ 11
2.5.	Test Conditions 11
2.6.	Test Setup Layout Diagram ······12
3. T	est Results ·······15
3.1.	Antenna Requirement ······15
3.2.	Duty Cycle of Test Signal16
3.3.	Maximum Peak and Average Conducted Output Power
3.4.	6 dB Bandwidth ······18
3.5.	Conducted Spurious Emissions and Band Edge19
3.6.	Power Spectral Density ······20
3.7.	Conducted Emission21
3.8.	Restricted Frequency Bands22
3.9.	Radiated Emission23
Ann	ex A Test Data and Result ······25





Change History				
Version Date		Reason for change		
1.0	2024-08-01	First edition		



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



1. Summary of Test Result

No.	Section	Description	Test Date	Test Engineer	Result	Method Determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	N/A	Duty Cycle of Test Signal	Jul. 04, 2024	Su Xiaoxian	PASS	No deviation
3	15.247(b)	Maximum Peak Conducted Output Power	Jul. 04, 2024	Su Xiaoxian	PASS	No deviation
4	15.247(b)	Maximum Average Conducted Output Power	Jul. 04, 2024	Su Xiaoxian	PASS	No deviation
5	15.247(a)	Bandwidth	Jul. 04, 2024	Su Xiaoxian	PASS	No deviation
6	15.247(d)	Conducted Spurious Emission and Band Edge	Jul. 04, 2024	Su Xiaoxian	PASS	No deviation
7	15.247(e)	Power Spectral Density	Jul. 04, 2024	Su Xiaoxian	PASS	No deviation
8	15.207	Conducted Emission	Jul. 11, 2024	Wang Deyong	PASS	No deviation
9	15.247(d)	Restricted Frequency Bands	Jul. 30, 2024	Yang Lian	PASS	No deviation
10	15.209, 15.247(d)	Radiated Emission	Jul. 30, 2024	Yang Lian	PASS	No deviation

Note 1: The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013 and KDB 558074 D01 v05r02.

Note 2: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

Note 3: When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.





1.1. Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

• 47 CFR Part 15 Subpart C Radio Frequency Devices



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



1.2. Test Equipment List

1.2.1 Conducted Test Equipment

Equipment	Serial No.	Туре	Manufacturer	Cal. Date	Due Date
EXA Signal	MY53470836	N9010A	Agilopt	2024.02.19	2025.02.18
Analyzer	1011 3347 0630	INSUIUA	Agilent	2024.02.19	2023.02.10
Power Sensor	MY54180008	U2021XA	Agilent	2023.10.17	2024.10.16
Attenuator	MTJ6004-20	VAT-10+	MTJ Cooperation	N/A	N/A
RF Cable		RF01	Morlab	N/A	N/A
(30MHz-26GHz)	CB01	REUI	IVIONAD	IN/A	N/A
Coaxial Cable	CB02	RF02	Morlab	N/A	N/A
SMA Connector	CN01	RF03	HUBER-	N/A	N/A
SMA Connector	CINUT	KFU3	SUHNER	IN/A	N/A

1.2.2 Conducted Emission Test Equipment

Equipment	Serial No.	Туре	Manufacturer	Cal. Date	Due Date
Receiver	MY56400093	N9038A	KEYSIGHT	2024.01.25	2025.01.24
LISN	8127449	NSLK 8127	Schwarzbeck	2024.02.02	2025.02.01
Pulse Limiter (10dB)	VTSD 9561 F- B #206	VTSD 9561-F	Schwarzbeck	2024.05.30	2025.05.29
RF Coaxial Cable (DC-100MHz)	BNC	MRE04	Qualwave	N/A	N/A

1.2.3 List of Software Used

Description	Manufacturer	Software Version
Test System	MaiWei	2.0.0.0
TS+ -[JS36-RSE]	Tonscend	V3.0.0.0
TS+ -[JS32-CE]	Tonscend	V2.5.0.0



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China



1.2.4 Radiated Test Equipment

Equipment	Serial No.	Туре	Manufacturer	Cal. Date	Due Date
Signal Analyzer	MY56060145	N9020A	Agilent	2024.05.30	2025.05.29
Test Antenna - Bi- Log	9163-519	VULB 9163	Schwarzbeck	2024.06.22	2025.06.21
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2024.06.03	2025.06.02
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2024.06.22	2025.06.21
Test Antenna – Horn	BBHA9170 #773	BBHA9170	Schwarzbeck	2024.06.22	2025.06.21
Preamplifier (10MHz-6GHz)	46732	S10M100L38 02	LUCIX CORP.	2024.05.30	2025.05.29
Preamplifier (2GHz-18GHz)	61171/61172	S020180L32 03	LUCIX CORP.	2024.05.30	2025.05.29
Preamplifier (18GHz-40GHz)	DS77209	DCLNA0118- 40C-S	Decentest	2024.05.30	2025.05.29
RF Coaxial Cable (DC-18GHz)	MRE001	PE330	Pasternack	2024.05.30	2025.05.29
RF Coaxial Cable (DC-18GHz)	MRE002	CLU18	Pasternack	2024.05.30	2025.05.29
RF Coaxial Cable (DC-18GHz)	MRE003	CLU18	Pasternack	2024.05.30	2025.05.29
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40- KK-0.5	Qualwave	N/A	N/A
RF Coaxial Cable (DC-40GHz)	22290046	QA360-40- KKF-2	Qualwave	N/A	N/A
RF Coaxial Cable (DC-18GHz)	22120181	QA500-18- NN-5	Qualwave	N/A	N/A
Anechoic Chamber	N/A	9m*6m*6m	CRT	2022.05.10	2025.05.09




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn





1.3. Measurement Uncertainty

Test Items	Uncertainty	Remark
Peak Output Power	±2.22dB	Confidence levels of 95%
Power Spectral Density	±2.22dB	Confidence levels of 95%
Bandwidth	±5%	Confidence levels of 95%
Conducted Spurious Emission	±2.77dB	Confidence levels of 95%
Restricted Frequency Bands	±5%	Confidence levels of 95%
Radiated Emission	±2.95dB	Confidence levels of 95%
Conducted Emission	±2.44dB	Confidence levels of 95%

1.4. Testing Laboratory

Laboratory Name	Shenzhen Morlab Communications Technology Co., Ltd.	
Laboratory Address	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong	
	Province, P. R. China	
Telephone	+86 755 36698555	
Facsimile	+86 755 36698525	
FCC Designation Number	CN1192	
FCC Test Firm	226174	
Registration Number	220174	



Fax: 86-755-36698525



2. General Description

2.1. Information of Applicant and Manufacturer

Applicant	Anker Innovations Limited		
Applicant Address	Unit 56, 8th Floor, Tower 2, Admiralty Centre, 18 Harcourt Road,		
Applicant Address	Hong Kong		
Manufacturer Anker Innovations Limited			
	Unit 56, 8th Floor, Tower 2, Admiralty Centre, 18 Harcourt Road,		
Manufacturer Address	Hong Kong		

2.2. Information of EUT

Product Name:	eufy Smart Lock E30
Sample No.:	1#
Hardware Version:	V1
Software Version:	V1.0.1.0
Modulation Technology:	DSSS, OFDM
Modulation Type:	Refer to section 1.3
Operating Frequency Range:	802.11b/g/n (HT20): 2412MHz–2462MHz
Antenna Type:	PIFA Antenna
Antenna Gain:	3.5dBi

Note 1: We use the dedicated software to control the EUT continuous transmission.

Note 2: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.





2.3. Channel List of EUT

Nominal Channel Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)		
	1	2412	8	2447		
	2	2417	9	2452		
	3	2422	10	2457		
20MHz	4	2427	11	2462		
	5	2432				
	6	2437				
	7	2442				

Note 1: The black bold channels were selected for test.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



2.4. Test Configuration of EUT

2.4.1.Modulation Type and Data Rate of EUT

Modulation technology	Modulation Type	Data Rate (Mbps) Note1
	DBPSK	1
DSSS (802.11b)	DQPSK	2
	ССК	5.5/ 11
	BPSK	6 / 9
	QPSK	12 / 18
OFDM (802.11g)	16QAM	24 / 36
	64QAM	48 / 54
	BPSK	6.5
OFDM	QPSK	13/19.5
(802.11n (HT20))	16QAM	26/39
	64QAM	52/58.5/65

Note1: The worst-case mode (bold face) in all data rates has been determined during the pre-scan, only the test data of the worst-case were recorded in this report.

Note2: The RF signal transmission of EUT is controlled by the build-in engineering mode which is provided by the manufacturer. The recorded power setting value is the maximum that the engineering mode has configuration during testing.

2.5. Test Conditions

Temperature (°C)	15-35
Relative Humidity (%)	30-60
Atmospheric Pressure (kPa)	86-106







2.6. Test Setup Layout Diagram

2.6.1.Conducted Measurement

Power item

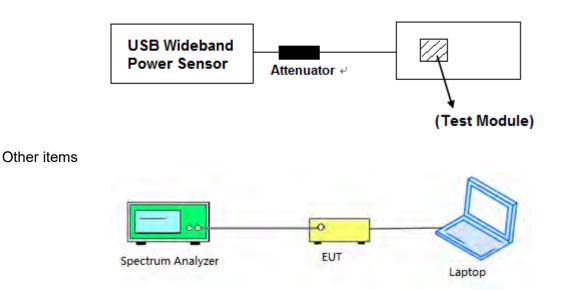

2.6.2.Conducted Emission Measurement

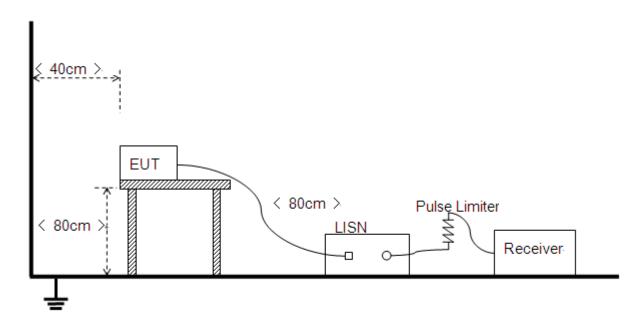



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86


Http://www.morlab.cn

Fax: 86-755-36698525 E-mail: service@morlab.cn




2.6.3.Radiation Measurement

1) For radiated emissions from 9kHz to 30MHz

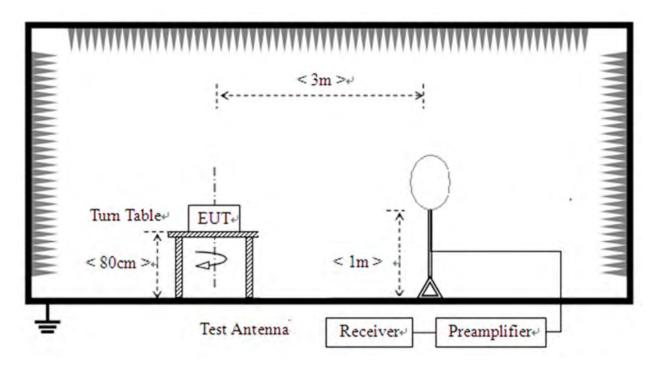

2) For radiated emissions from 30MHz to1GHz

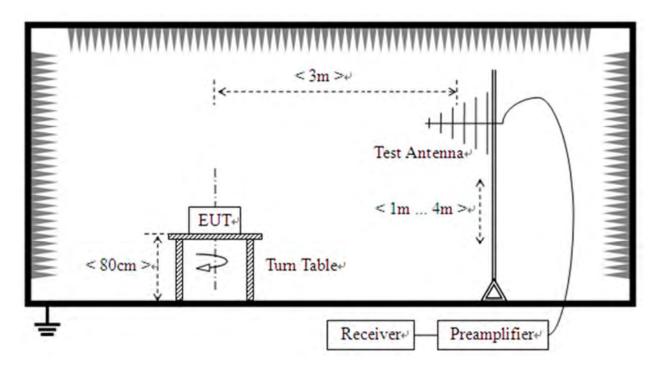




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China



3) For radiated emissions above 1GHz

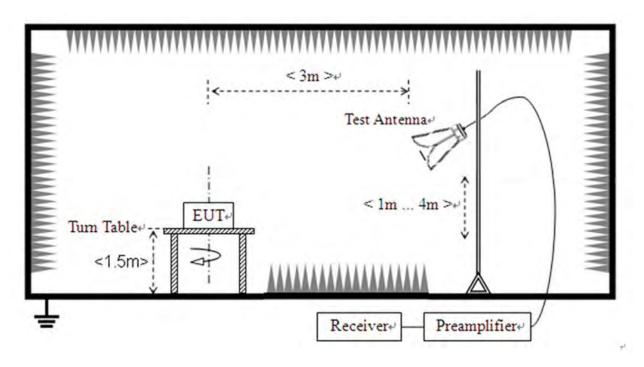




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn





3.1. Antenna Requirement

3.1.1.Requirement

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.1.2.Test Result

Antenna location	Antenna Type	Coupling Method
⊠Internal	□FPC Antenna	⊠I-PEX Connector
□External	□Spring Antenna	□SMA Connector
	□Ceramic Antenna	□RP-SMA Connector
	□Integrated Antenna	□Metal Shrapnel
	□Dipole Antenna	
	□PCB Antenna	
	⊠PIFA Antenna	



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525 E-mail: service@morlab.cn

Http://www.morlab.cn

-



3.2. Duty Cycle of Test Signal

3.2.1.Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%).When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration(T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be non constant.

3.2.2.Test Result

Refer to Annex A.1 in this report.





3.3. Maximum Peak and Average Conducted Output Power

3.3.1.Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum conducted output power of the intentional radiator shall not exceed 1 Watt.

3.3.2.Test Procedures

The EUT (Equipment under the test) which is coupled to the USB Wideband Power Sensor; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.

3.3.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.3.4.Test Result

Refer to Annex A.2 and A.3 in this report.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



3.4.1.Requirement

According to FCC section 15.247(a) (2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

3.4.1.Test Procedures

KDB 558074 Section 8.2 was used in order to prove compliance.

3.4.2.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.4.3.Test Result

Refer to Annex A.4 in this report.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China Tel: 86-755-36698555 Fa

Fax: 86-755-36698525

Http://www.morlab.cn



3.5. Conducted Spurious Emissions and Band Edge

3.5.1.Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

3.5.2.Test Procedures

KDB 558074 Section 8.5 and 8.7 was used in order to prove compliance.

3.5.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.5.4.Test Result

Refer to Annex A.5 and A.6 in this report.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China Tel: 86-755-36698555 F

Fax: 86-755-36698525

Http://www.morlab.cn



3.6. Power Spectral Density

3.6.1.Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

3.6.2.Test Procedures

The measured power spectral density was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for PSD test:

- a) Set analyzer center frequency to channel center frequency
- b) Set span to1.5 times DTS
- c) Set RBW to 30kHz
- d) Set VBW to 100kHz
- e) Detector = peak
- f) Sweep time = auto couple
- g) Trace mode = max hold
- h) Allow trace to fully stabilize

i) Use the peak marker function to determine the maximum amplitude level and recorded as PD

j) Use below formula to calculate the Conducted PSD value that at specified RBW:

Conducted PSD=PD-10lg(30k/3k)

3.6.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.6.4.Test Result

Refer to Annex A.7 in this report.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525



3.7. Conducted Emission

3.7.1.Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50μ H/ 50Ω line impedance stabilization network (LISN).

Fraguanay Panga (MHz)	Conducted Limit (dBµV)				
Frequency Range (MHz)	Quai-peak	Average			
0.15 - 0.50	66 to 56	56 to 46			
0.50 - 5	56	46			
5 - 30	60	50			

Note:

(a) The lower limit shall apply at the band edges.

(b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.7.2.Test Procedures

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

3.7.3.Test Setup Layout

Refer to chapter 2.6.2 in this report.

3.7.4.Test Result

Refer to Annex A.8 in this report.





3.8. Restricted Frequency Bands

3.8.1.Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

3.8.2.Test Procedures

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \ge 1$ GHz, 100 kHz for f < 1GHz

VBW = 3 MHz Sweep = auto Detector function = peak/average Trace = max hold

Allow the trace to stabilize

3.8.3.Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.8.4.Test Result

Refer to Annex A.9 in this report.





3.9. Radiated Emission

3.9.1.Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (µV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note1: For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit. Note2: For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK). In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).





3.9.2.Test Procedures

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz.The antenna to EUT distance is 3meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

3.9.3.Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.9.4.Test Result

Refer to Annex A.10 in this report.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn



Annex A Test Data and Result

A.1. Duty Cycle of Test Signal

Condition	Mode	Frequency	Antenna	Duty Cycle	Correction Factor	1/T
		(MHz)		(%)	(dB)	(kHz)
NVNT	b	2412	Ant1	88.1	0.55	0.12
NVNT	b	2437	Ant1	88.13	0.55	0.12
NVNT	b	2462	Ant1	88.06	0.55	0.12
NVNT	g	2412	Ant1	54.97	2.6	0.74
NVNT	g	2437	Ant1	54.93	2.6	0.74
NVNT	g	2462	Ant1	54.92	2.6	0.73
NVNT	n20	2412	Ant1	53.06	2.75	0.79
NVNT	n20	2437	Ant1	53.28	2.73	0.79
NVNT	n20	2462	Ant1	53.24	2.74	0.79




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



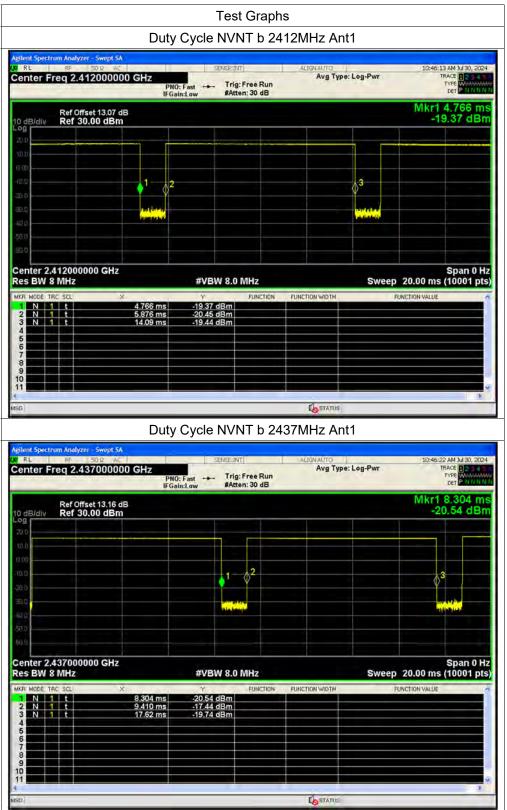


MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Fax: 86-755-36698525 Tel: 86-755-36698555 Http://www.morlab.cn




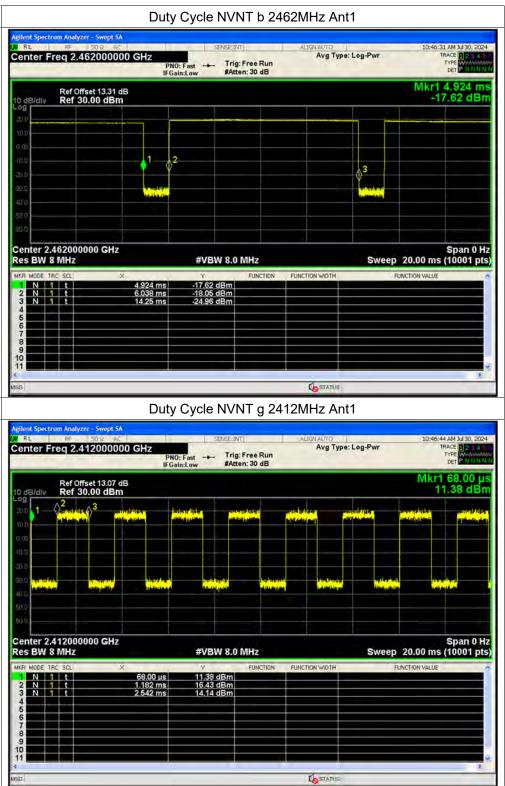

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China Fax: 86-755-36698525




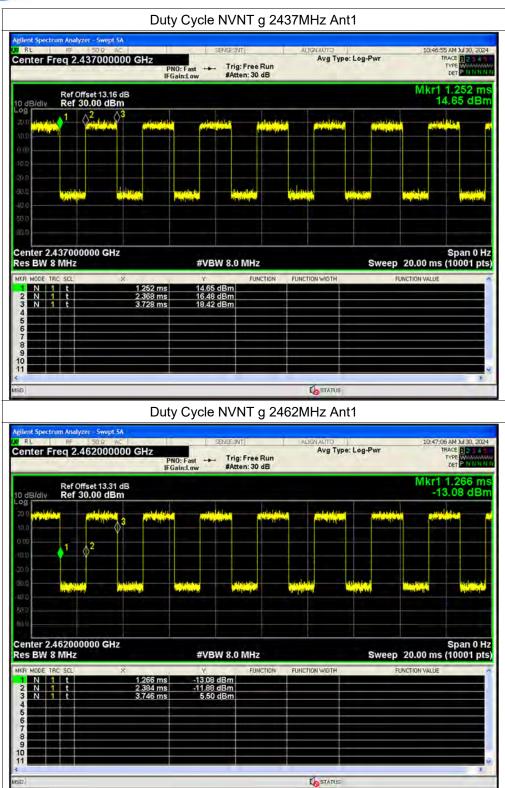



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China



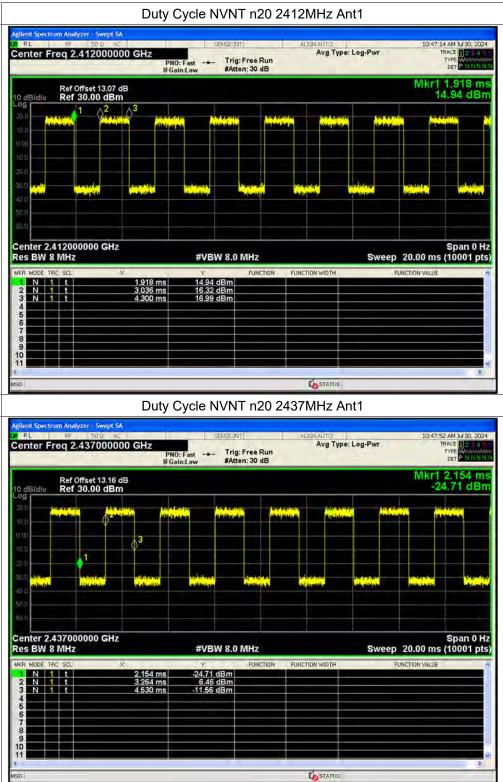



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China



R Cer		Fre		50 Q 46200	AC 0000 G		PNO: Fast Gain:Lov		Trig: Fre #Atten: 3		A	Avg	Type: L	og-Pwr			IS AM JU 30, 2 RACE 2 3 TYPE WANN DET P N N T
	B/div			ffset 13. 30.00 d	Bm											Mkr1 -2	2.392 r 3.93 dE
.og	-		Hein	-	0 ² 111111						Nipelinitis		hind	6	Alige de Mar		-
						3											
	-			1)- 1111 (li ma		a co lolo o				durdiamente		Liter in L		وي المراد و	ولف
40 U 50 U		4.4		of comme		latente din set		ALCONTRACTOR OF		an land		G. Million		hot likes to be		manification	- Art
			62000 MHz	0000 G	Hz			#VBW	8.0 MH	z				Swe	ep 20	.00 ms	Span 0 (10001 p
(KA)	MODE		SCL t		×	392 ms	_	Y 23.93 di		UNETION	FUNC	TION WID	TH		FUNCTI	ON VALUE	
234	N	1	t		3.	504 ms 770 ms		17.88 di 18.78 di	Bm								
56																	
7 8											_						



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



A.2. Maximum Peak Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	b	2412	Ant1	21.37	0	21.37	0.13709	30	Pass
NVNT	b	2437	Ant1	21.44	0	21.44	0.13932	30	Pass
NVNT	b	2462	Ant1	22.57	0	22.57	0.18072	30	Pass
NVNT	g	2412	Ant1	22.37	0	22.37	0.17258	30	Pass
NVNT	g	2437	Ant1	22.74	0	22.74	0.18793	30	Pass
NVNT	g	2462	Ant1	23.42	0	23.42	0.21979	30	Pass
NVNT	n20	2412	Ant1	21.93	0	21.93	0.15596	30	Pass
NVNT	n20	2437	Ant1	22.04	0	22.04	0.15996	30	Pass
NVNT	n20	2462	Ant1	23.46	0	23.46	0.22182	30	Pass




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



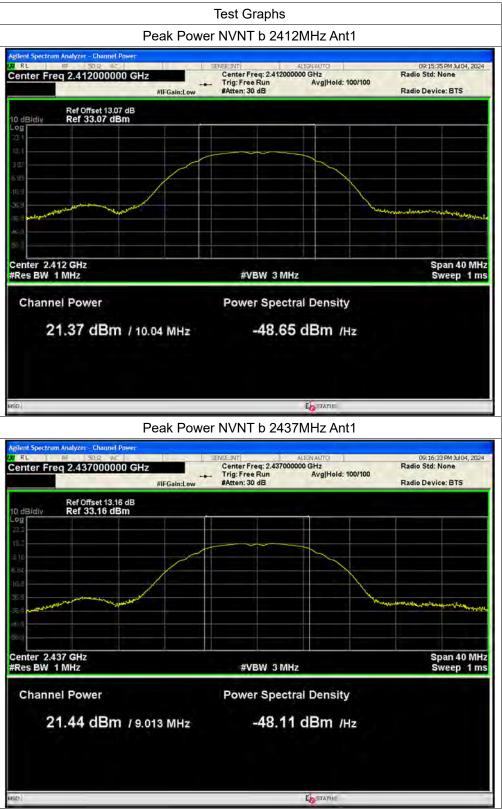



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn






MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn




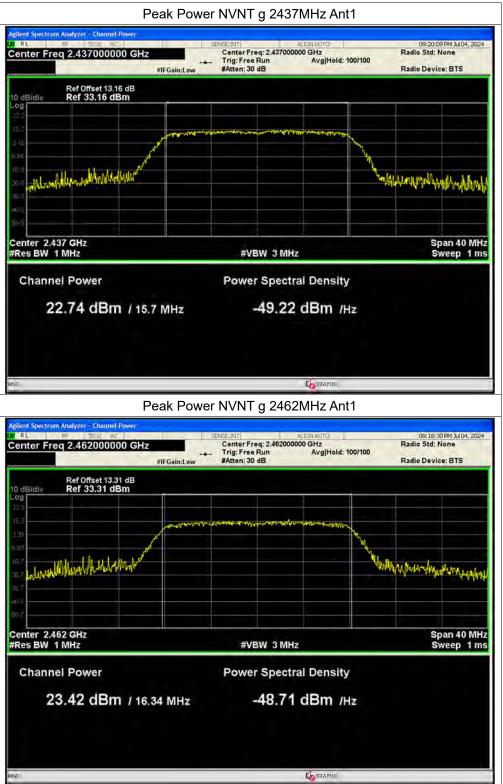



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China



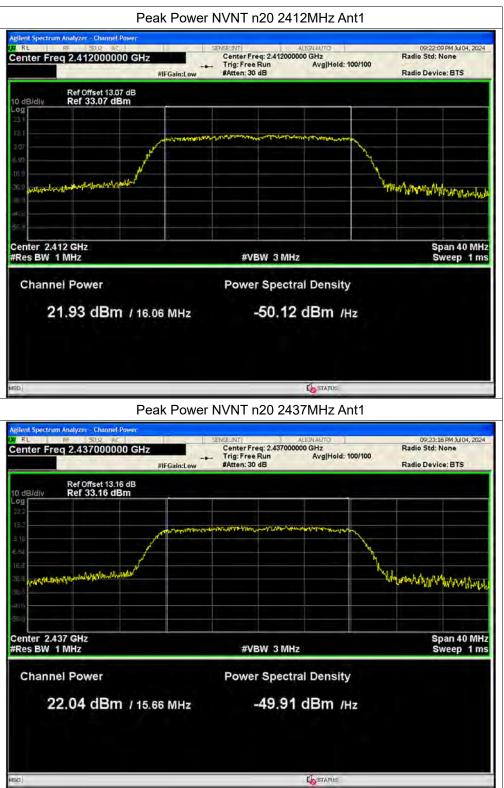




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn



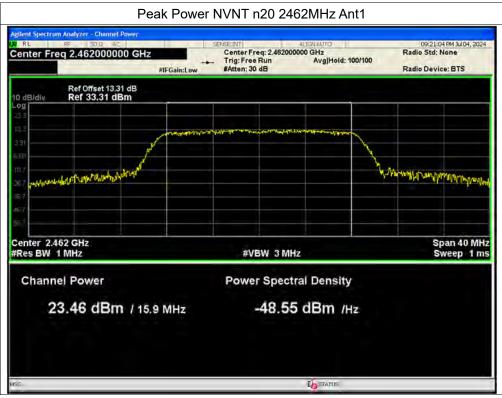



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



A.3. Maximum Average Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	b	2412	Ant1	18.1	0.55	18.65	0.07328	30	Pass
NVNT	b	2437	Ant1	18.37	0.55	18.92	0.07798	30	Pass
NVNT	b	2462	Ant1	19.56	0.55	20.11	0.10257	30	Pass
NVNT	g	2412	Ant1	12.8	2.6	15.4	0.03467	30	Pass
NVNT	g	2437	Ant1	13.15	2.6	15.75	0.03758	30	Pass
NVNT	g	2462	Ant1	13.77	2.6	16.37	0.04335	30	Pass
NVNT	n20	2412	Ant1	12.74	2.75	15.49	0.03540	30	Pass
NVNT	n20	2437	Ant1	12.9	2.73	15.63	0.03656	30	Pass
NVNT	n20	2462	Ant1	14	2.74	16.74	0.04721	30	Pass




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



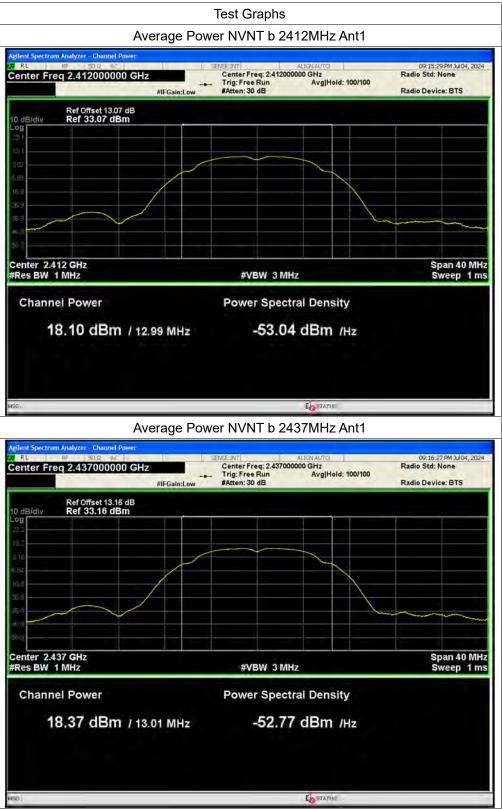




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn



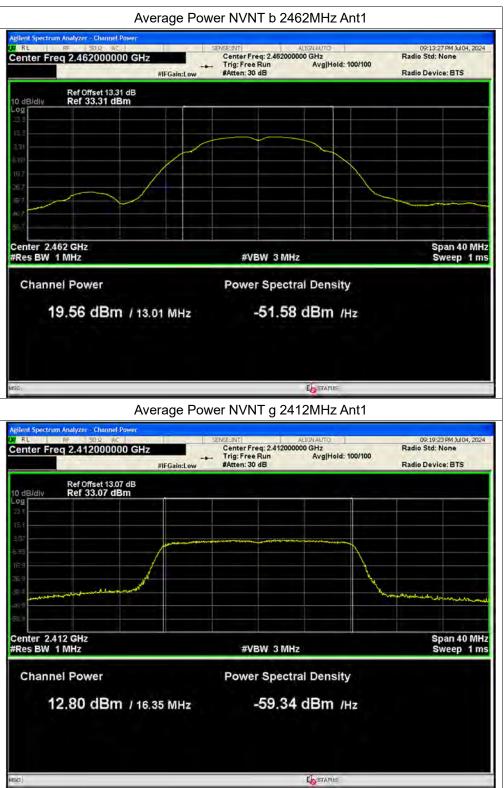




 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn




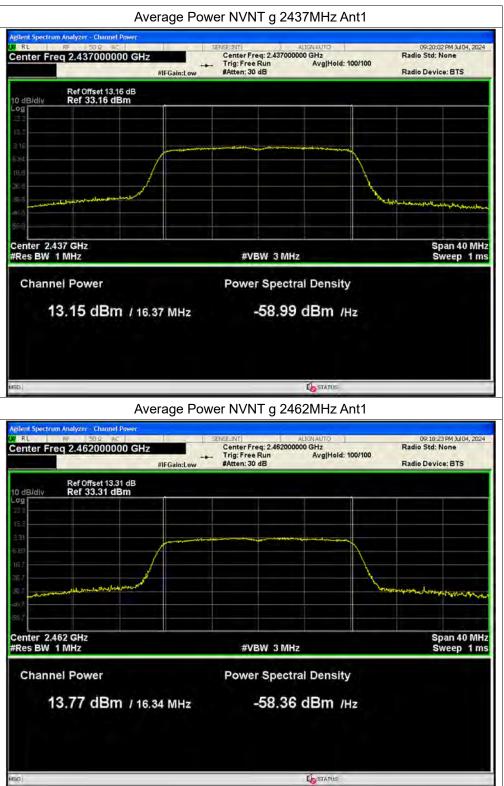



Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn




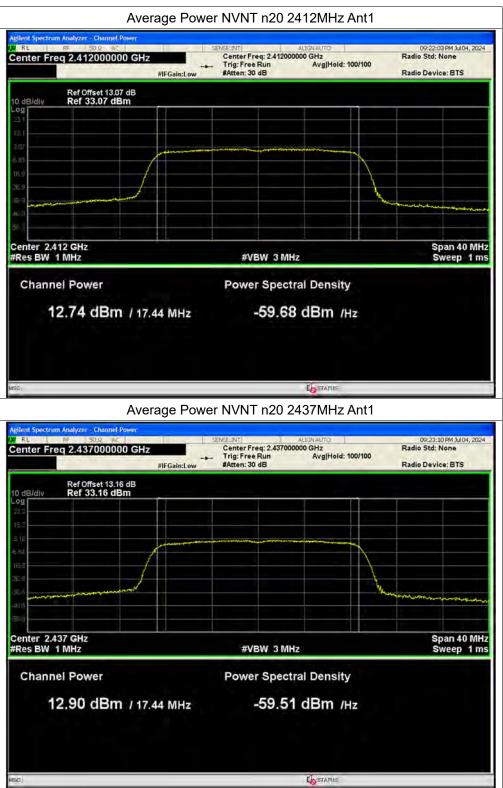



Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn



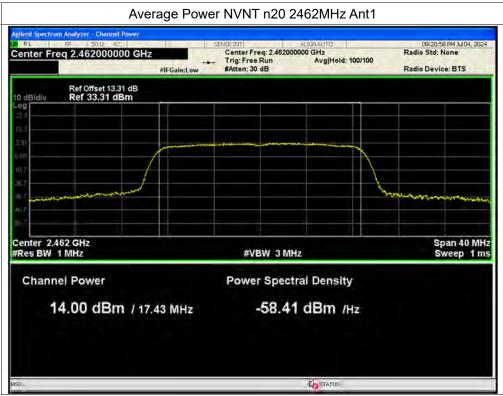



Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



A.4. 6 dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	b	2412	Ant1	10.037	0.5	Pass
NVNT	b	2437	Ant1	9.013	0.5	Pass
NVNT	b	2462	Ant1	9.05	0.5	Pass
NVNT	g	2412	Ant1	16.314	0.5	Pass
NVNT	g	2437	Ant1	15.696	0.5	Pass
NVNT	g	2462	Ant1	16.339	0.5	Pass
NVNT	n20	2412	Ant1	16.059	0.5	Pass
NVNT	n20	2437	Ant1	15.66	0.5	Pass
NVNT	n20	2462	Ant1	15.904	0.5	Pass




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



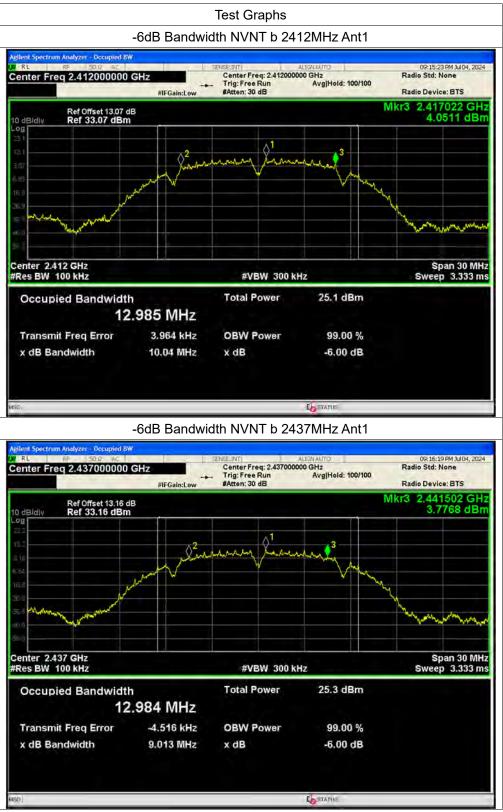




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 8 Http://www.morlab.cn E-mai

Fax: 86-755-36698525 E-mail: service@morlab.cn




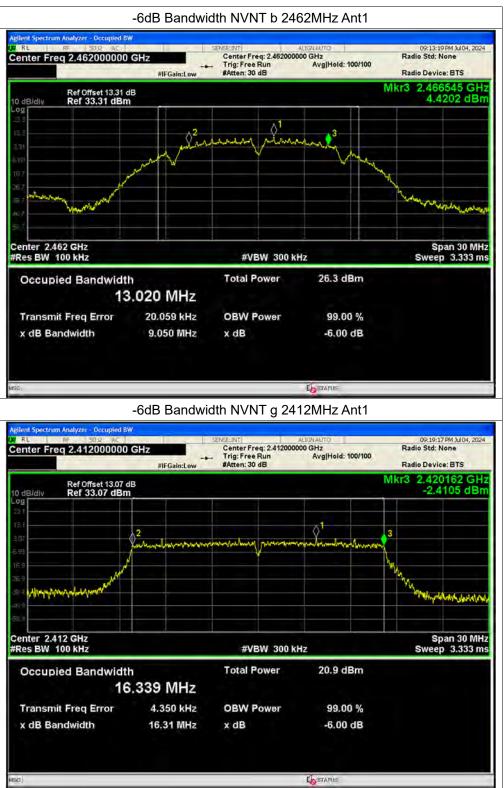




Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn



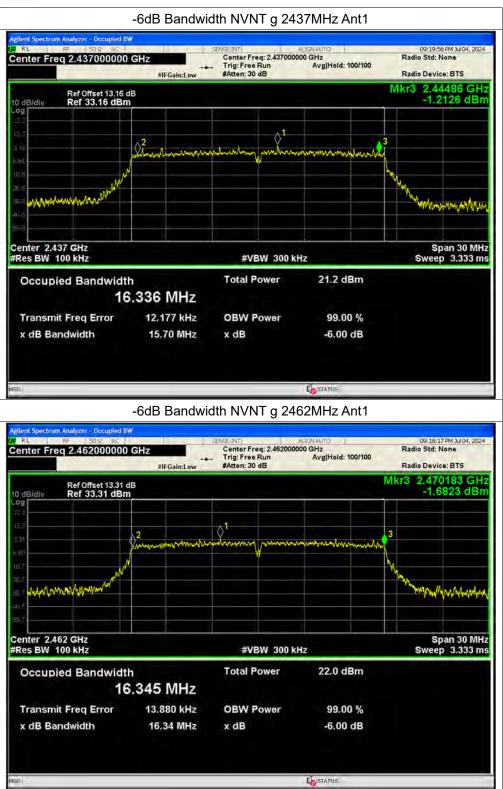






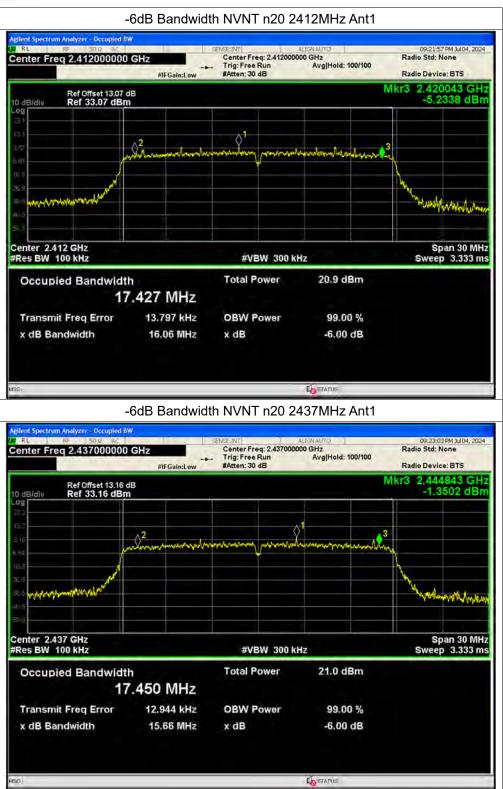



Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn



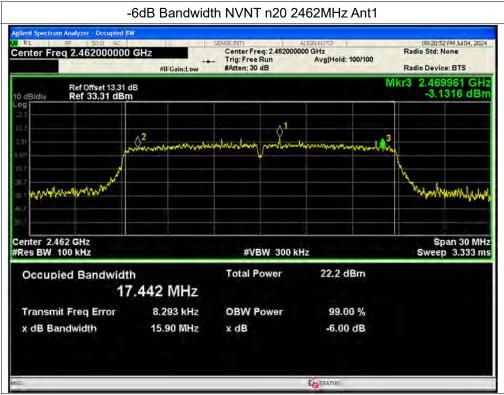



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



A.5. Conducted Spurious Emissions

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-39.12	-20	Pass
NVNT	b	2437	Ant1	-37.57	-20	Pass
NVNT	b	2462	Ant1	-38.68	-20	Pass
NVNT	g	2412	Ant1	-33.49	-20	Pass
NVNT	g	2437	Ant1	-33.59	-20	Pass
NVNT	g	2462	Ant1	-34.59	-20	Pass
NVNT	n20	2412	Ant1	-32.9	-20	Pass
NVNT	n20	2437	Ant1	-32.27	-20	Pass
NVNT	n20	2462	Ant1	-34.5	-20	Pass




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



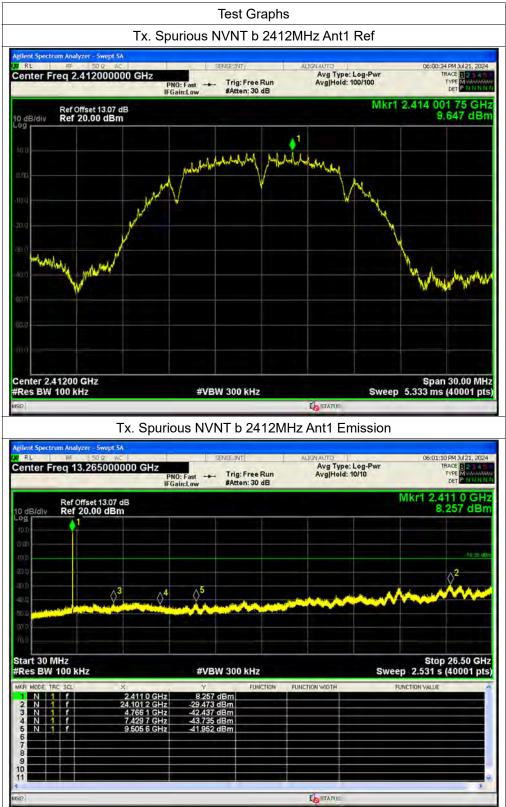


MORLAB


Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn




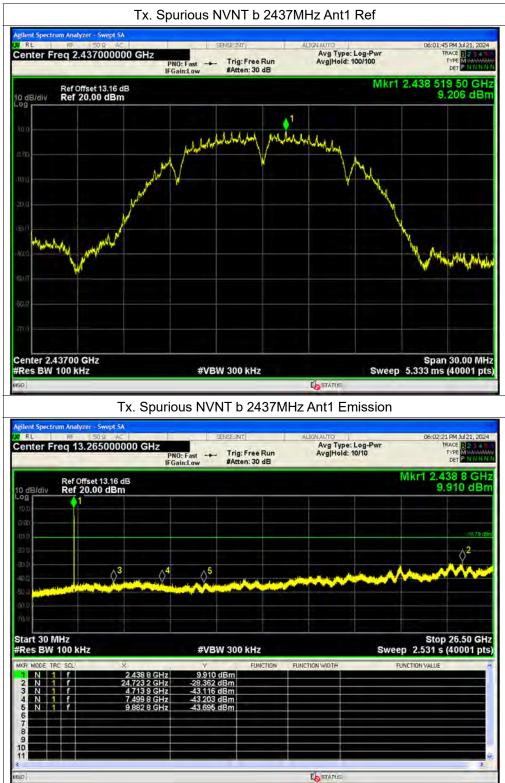



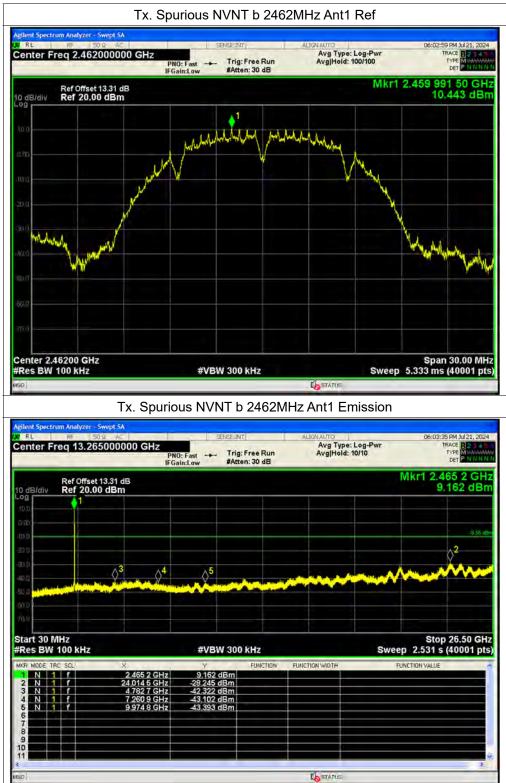



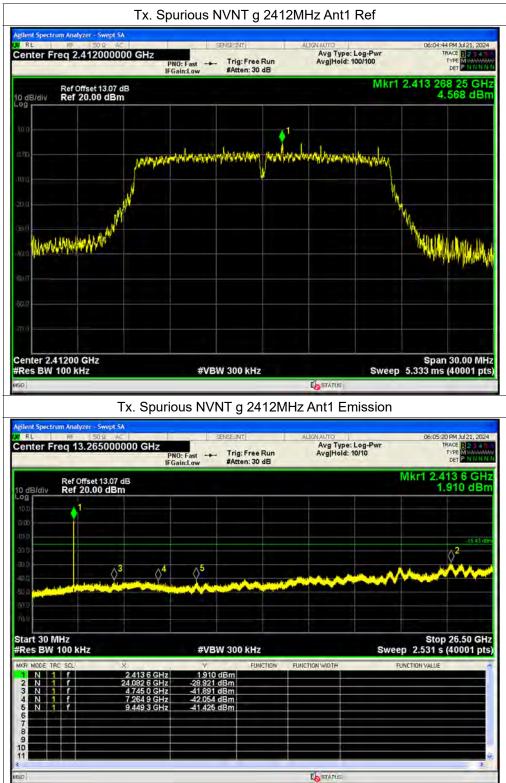


Page 53 of 102

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

MORLAB


Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn



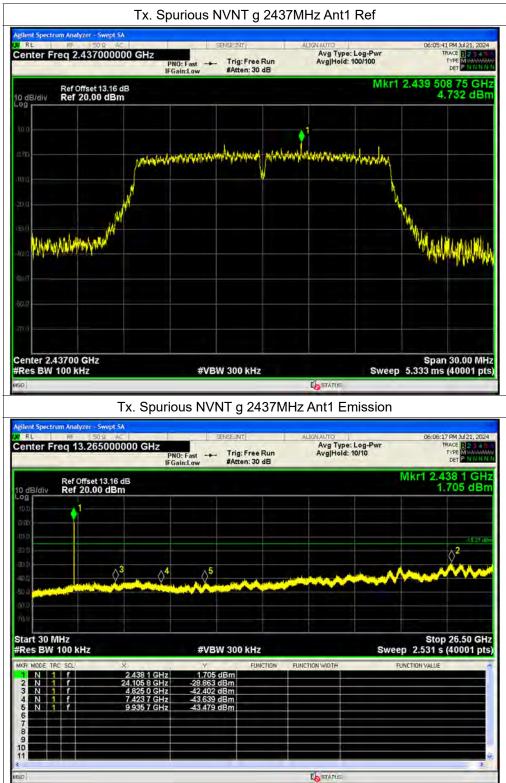


MORLAB



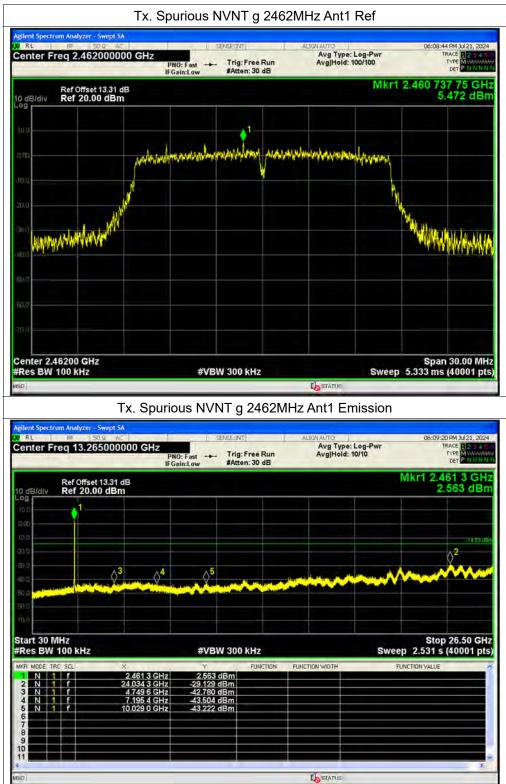


MORLAB




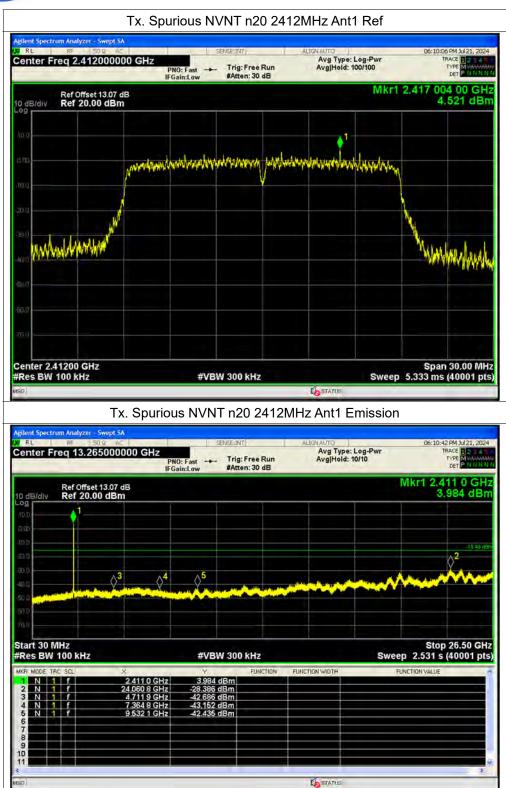



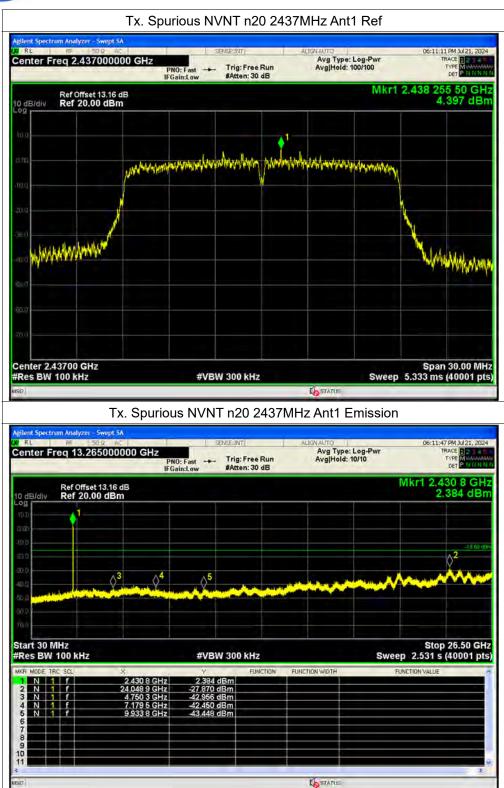



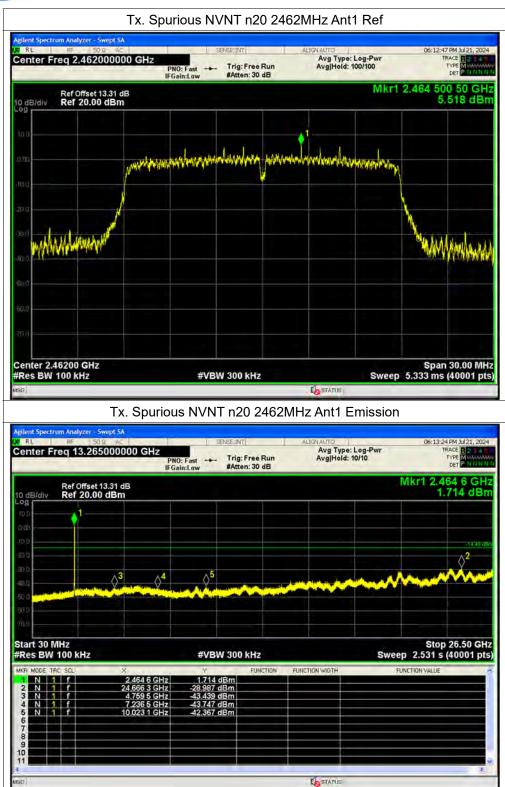

MORLAB



A.6. Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-40.38	-20	Pass
NVNT	b	2462	Ant1	-49.81	-20	Pass
NVNT	g	2412	Ant1	-37.07	-20	Pass
NVNT	g	2462	Ant1	-43.48	-20	Pass
NVNT	n20	2412	Ant1	-33.92	-20	Pass
NVNT	n20	2462	Ant1	-44.12	-20	Pass




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



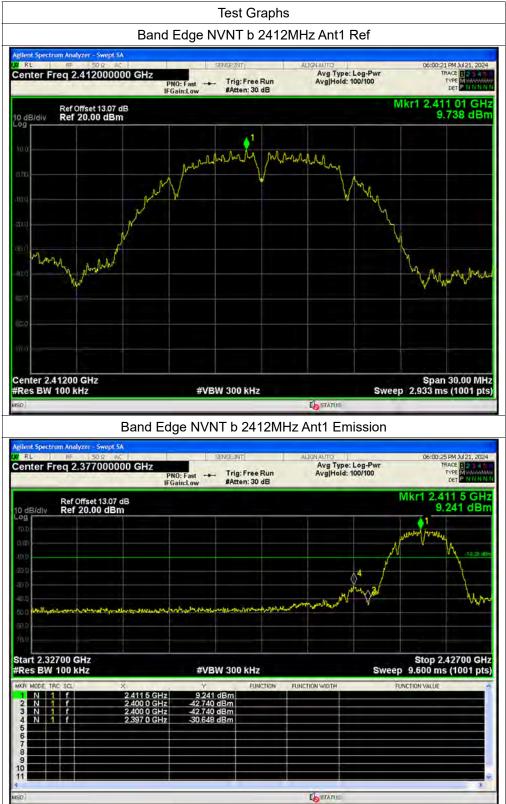




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755 Http://www.morlab.cn E-mail: serv

Fax: 86-755-36698525 E-mail: service@morlab.cn



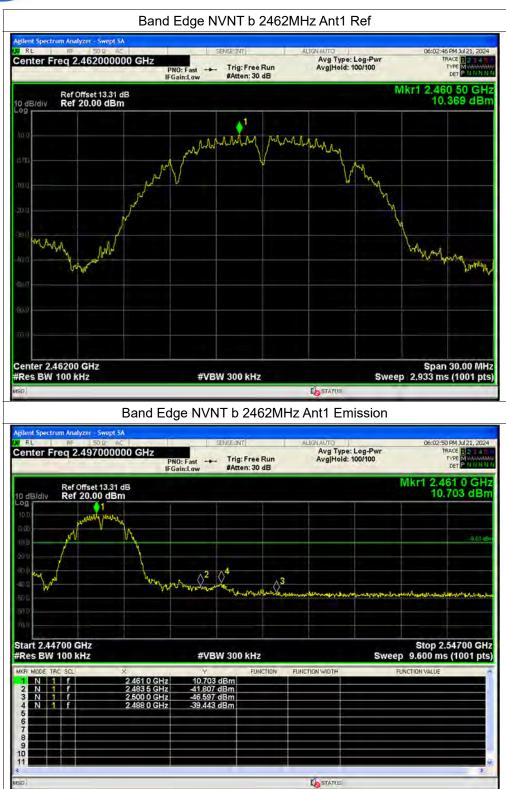


MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China


Fax: 86-755-36698525 Tel: 86-755-36698555 Http://www.morlab.cn E-mail: service@morlab.cn



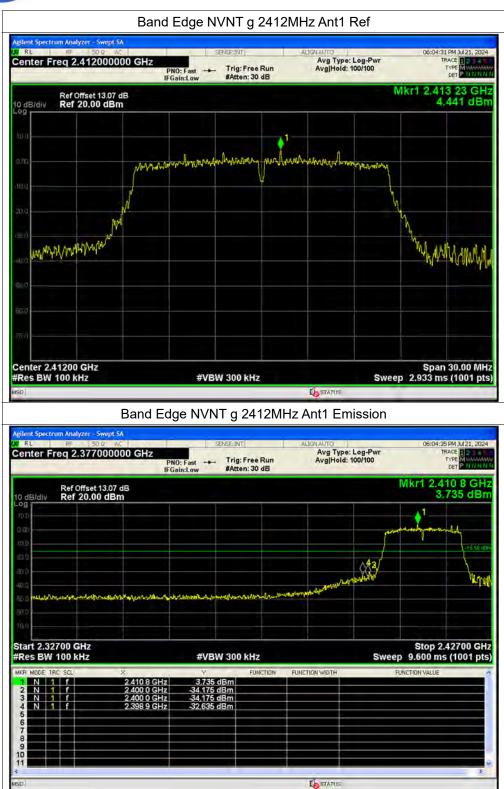





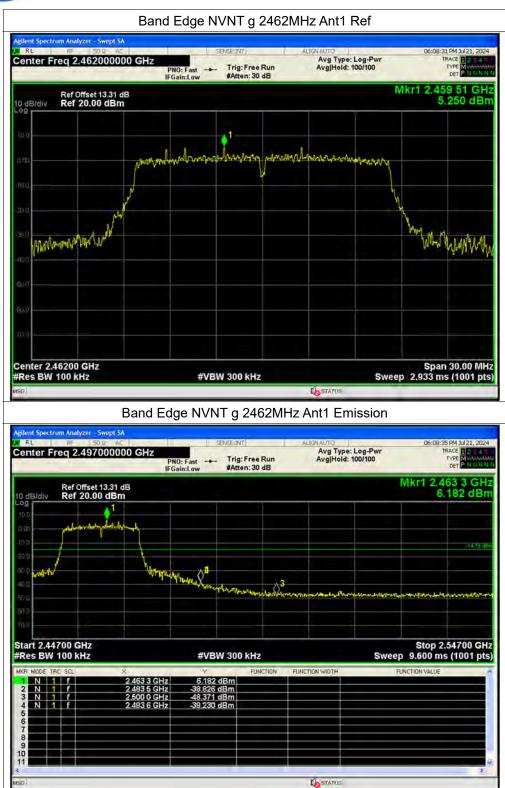

Page 63 of 102

Fax: 86-755-36698525

E-mail: service@morlab.cn


Tel: 86-755-36698555

Http://www.morlab.cn

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

MORLAB



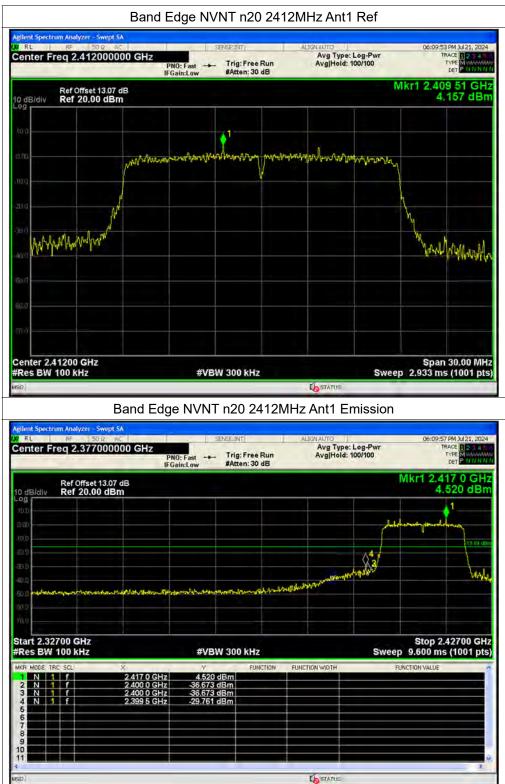

MORLAB





Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

MORLAB

Fax: 86-755-36698525 Tel: 86-755-36698555 Http://www.morlab.cn E-mail: service@morlab.cn



A.7. Power Spectral Density

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Duty Factor (dB)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	b	2412	Ant1	-4.09	0	-4.09	8	Pass
NVNT	b	2437	Ant1	-3.77	0	-3.77	8	Pass
NVNT	b	2462	Ant1	-3.43	0	-3.43	8	Pass
NVNT	g	2412	Ant1	-10.66	0	-10.66	8	Pass
NVNT	g	2437	Ant1	-10.12	0	-10.12	8	Pass
NVNT	g	2462	Ant1	-9.18	0	-9.18	8	Pass
NVNT	n20	2412	Ant1	-10.16	0	-10.16	8	Pass
NVNT	n20	2437	Ant1	-10.49	0	-10.49	8	Pass
NVNT	n20	2462	Ant1	-9.17	0	-9.17	8	Pass



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn








Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Fax: 86-755-36698525 Tel: 86-755-36698555 Http://www.morlab.cn



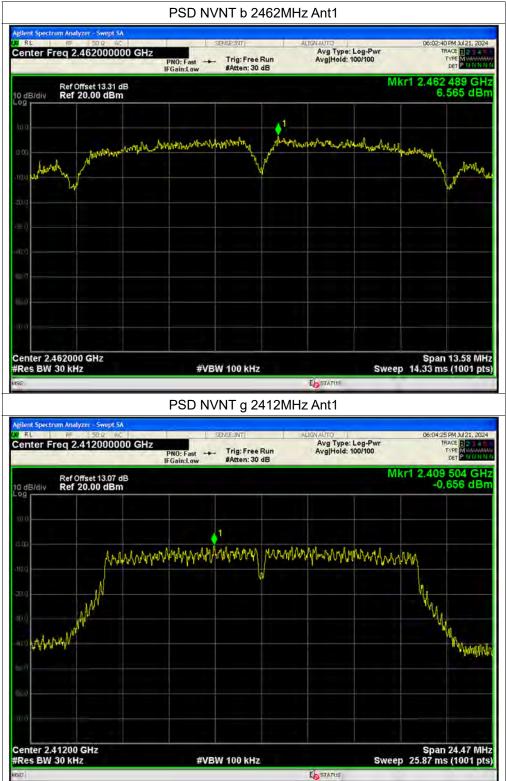


MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Fax: 86-755-36698525 Tel: 86-755-36698555 Http://www.morlab.cn E-mail: service@morlab.cn



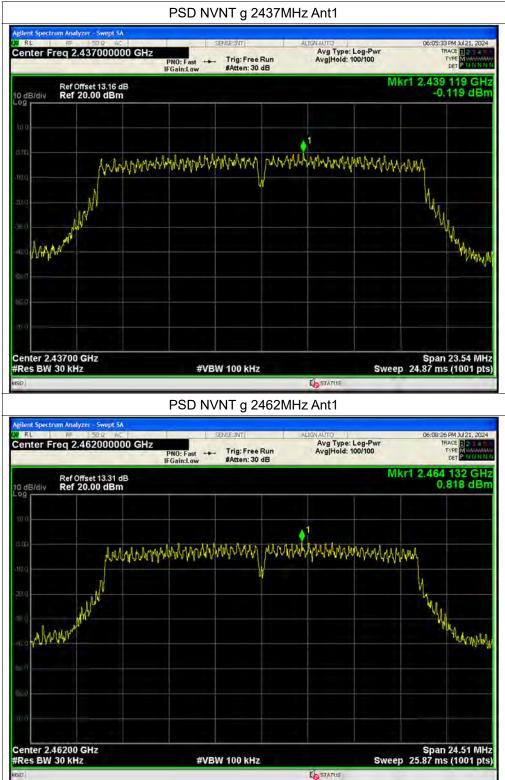


MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China


Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn



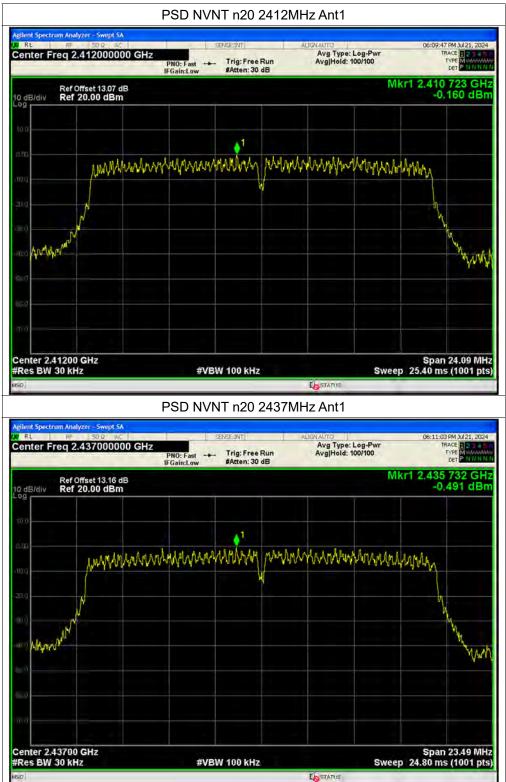

MORLAB



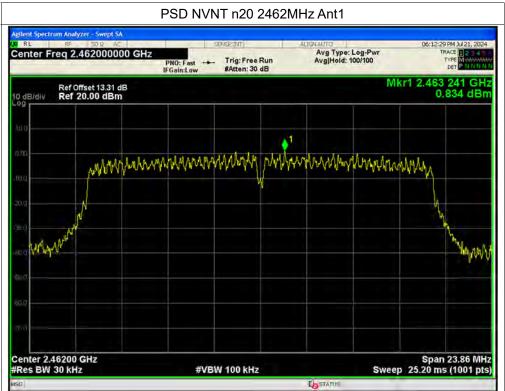



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



A.8. Conducted Emission

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be remeasured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Set RBW=9kHz, VBW=30kHz. Refer to recorded points and plots below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test Setup:

Test Mode: <u>EUT + PC + PC Adapter + WIFI TX</u> Test voltage: <u>AC 120V/60Hz</u> The measurement results are obtained as below: E [dB μ V] =U_R + L_{Cable loss} [dB] + A_{Factor} U_R: Receiver Reading A_{Factor}: Voltage division factor of LISN




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



B. Test Plot:

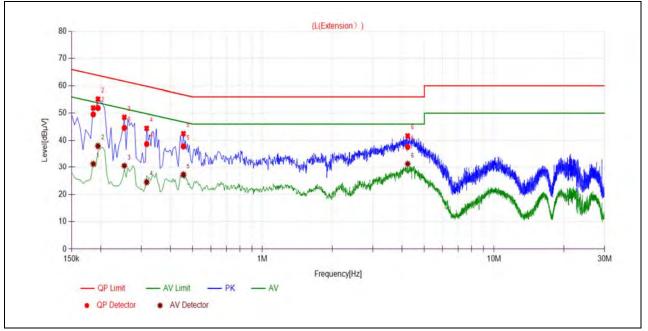

(L Phase)

No.	Fre.	Emission L	.evel (dBµV)	Limit (dBµV)	Power-line	Verdict
(MHz)	Quai-peak	Average	Quai-peak	Average			
1	0.1860	49.57	31.28	64.21	54.21		PASS
2	0.1950	51.90	37.91	63.82	53.82		PASS
3	0.2535	44.59	30.54	61.64	51.64	Line	PASS
4	0.3165	38.64	24.48	59.80	49.80	Line	PASS
5	0.4560	37.74	27.20	56.77	46.77		PASS
6	4.2360	37.58	31.26	56.00	46.00		PASS




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



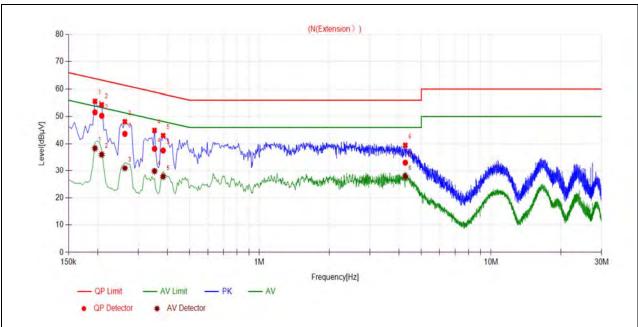

(N	Phase)
----	--------

No. Fre. (MHz)	Emission L	.evel (dBµV)	Limit (dBµV)	Power-line	Verdict	
	Quai-peak	Average	Quai-peak	Average			
1	0.1950	51.55	38.37	63.82	53.82		PASS
2	0.2085	50.29	36.06	63.26	53.26		PASS
3	0.2625	43.66	30.97	61.35	51.35	Noutral	PASS
4	0.3525	38.19	29.81	58.90	48.90	Neutral	PASS
5	0.3840	37.55	27.79	58.19	48.19		PASS
6	4.2626	33.08	27.90	56.00	46.00		PASS



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



A.9. Restricted Frequency Bands

The lowest and highest channels are tested to verify the Restricted Frequency Bands.

The measurement results are obtained as below:

 $E [dB\mu V/m] = U_R + A_T + A_{Factor} [dB]; A_T = L_{Cable loss} [dB] - G_{preamp} [dB]$

A_T: Total correction Factor except Antenna

U_R: Receiver Reading

G_{preamp}: Preamplifier Gain

A_{Factor}: Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

802.11b Mode

Channel	Frequency	Detector	Receiver Reading	AT	A _{Factor}	Max. Emission	Limit	Verdict
Ghanner	(MHz)		U _R (dBµV)	(dB)	(dB@3m)	E (dBµV/m)	(dBµV/m)	Verdiet
1	2388.93	PK	27.56	5.78	27.50	60.84	74	PASS
1	2390.00	AV	19.15	5.78	27.50	52.43	54	PASS
11	2486.89	PK	27.09	5.78	27.50	60.37	74	PASS
11	2486.78	AV	18.80	5.78	27.50	52.08	54	PASS



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



Marker	04:59:52 AM Jul 19, 2024 TRACE 1 2 3 4 5 0 TYPE M 4440000	Type: Voltage Hold:>100/100	Avg	SENSE:IN	GHz PNO: Fast	8000000 NFE	2.38892	
Select Marker	2 2.388 93 GHz 27.561 dBµV	Mkr2		#Atten: 6 dB	IFGain:Low		PREAMP	B/div
Norm								
Del		monter		and the second second				
Fixed						انتعان نئين الالالالالا الالالالالا		
c	Stop 2.41200 GHz 000 ms (1001 pts)	Sweep 1.0	FUNCTION	3.0 MHz	#VBW	MHz	000 GHz CISPR) 1	
Properties			FORCHON	25.559 dBµV 27.561 dBµV	0 00 GHz 8 93 GHz	2.39	f f	N 1 N 1
Mo 1 of								


(PEAK, Channel 1, 802.11b)



(AVERAGE, Channel 1, 802.11b)



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China Fax: 86-755-36698525





Marker	05:13:24 AM Jul 19, 2024 TRACE 1234 5 0	Type: Voltage	Avg	SENSE:IN	GHz	50 Q AC			aL rkei
Select Marker	DET P P N N N N	Hold:>100/100	Avg	Trig: Free Run #Atten: 6 dB	PNO: Fast G	NFE	PREAMP	- 1	
2	2.486 890 GHz 27.094 dBµV	Mkr2				99 dBµV	Ref 82.	liv -	B/di
Norm							1		
Del		2	2 ¹	Mallonangelyna	Mangle and a stand and a stand	1			
Fixed									
o	Stop 2.50000 GHz 000 ms (1001 pts)	Sweep 1.		3.0 MHz	#VBV	MHz	00 GHz SPR) 1	W (CI	BV
Properties	FUNCTION VALUE	FUNCTION WIDTH	FUNCTION	Υ 26.642 dBµV 27.094 dBµV	500 GHz 890 GHz	× 2.483 2.486	SCL f		NOD
Mo									

(PEAK, Channel 11, 802.11b)



(AVERAGE, Channel 11, 802.11b)



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China Fax: 86-755-36698525



802.11g Mode

Channel	Frequency	Detector	Receiver Reading	A _T	A _{Factor}	Max. Emission	Limit	Verdict
(MHz)		PK/ AV	U _R (dBµV)	(dB)	(dB@3m)	E (dBµV/m)	(dBµV/m)	Vertilet
1	2389.71	PK	35.76	5.78	27.50	69.04	74	PASS
1	2390.00	AV	19.58	5.78	27.50	52.86	54	PASS
11	2483.70	PK	38.78	5.78	27.50	72.06	74	PASS
11	2483.50	AV	19.37	5.78	27.50	52.65	54	PASS



(PEAK, Channel 1, 802.11g)



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China Tel: 86-755-36698555 Fa

Fax: 86-755-36698525

Http://www.morlab.cn



Marker	05:38:16 AM Jul 19, 2024 TRACE 12 3 4 5 0 TYPE M	Type: Voltage Hold: >100/100	Ave	SENSE:IN	GHz PNO: Fast	4000000 NFE		
Select Marker 2	2 2.389 82 GHz 19.267 dBµV	Mkr		#Atten: 6 dB	IFGain:Low	99 dBµV	PREAMP	B/div
Norm								
Del	2							
Fixed								
o	Stop 2.41200 GHz 12.84 s (1001 pts)	Sweep		10 Hz	#VBW		000 GHz ISPR) 1	BW (0
Properties	FUNCTION VALUE	FUNCTION WIDTH	FUNCTION	Υ 19,581 dBµV 19.267 dBµV	0 00 GHz 9 82 GHz	× 2.39 2.38	f f	MODE TR
Mo 1 of								


(AVERAGE, Channel 1, 802.11g)



(PEAK, Channel 11, 802.11g)

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China Fax: 86-755-36698525





Marker	H Jul 19, 2024	07:18:51 AM	Type: Voltage		SENSE:IN	011		RF PRESEL 50
and an and a second second	E MWWWWW	TYPE	Hold: >100/100	Â	Trig: Free Run #Atten: 6 dB	PNO: Fast	NFE	2.483622
Select Marker	22 645	2.483 62	Mkr2	_	#Atten: 6 dB	IFGain:Low		PREAMP
	7 dBµV	19.237	inito 2				dBµV	Ref 82.99
Norm							_	_
_								
							+	
Del				<u>^2</u>				
				1				
Elui								
Fixed								
c	0000 GHz	Stop 2.50 4.357 s (1	Sween		10 Hz	#VBW	AH7	6200 GHz CISPR) 1 N
		FUNCTION	FUNCTION WIDTH	FUNCTION	Y		X	RC SCL
					19.372 dBµV 19.237 dBµV		2.483	11
					19.207 UDUV	022 GH2	2,403	
Properties								
Properties								
Мо								
Properties Mor 1 of								

(AVERAGE, Channel 11, 802.11g)



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555 F



802.11n (HT20) Mode

Channel	Frequency	Detector	Receiver Reading	A _T	A _{Factor}	Max. Emission E	Limit	Verdict
	(MHz)	PK/ AV	U _R (dBµV)	(dB)	(dB@3m)	⊏ (dBµV/m)	(dBµV/m)	
1	2389.49	PK	38.17	5.78	27.50	71.45	74	PASS
1	2390.00	AV	18.48	5.78	27.50	51.76	54	PASS
11	2484.00	PK	39.28	5.78	27.50	72.56	74	PASS
11	2483.50	AV	17.45	5.78	27.50	50.73	54	PASS



(PEAK, Channel 1, 802.11n (HT20))



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



(er 2 2 389824)	000000 GHz		Avg Type: Voltage	07:54:00 AM Jul 19, 2024 TRACE 1 2 3 4 5 0	Marker
PREAMP	NFE PNO: Fast	Trig: Free Run #Atten: 6 dB	Avg Hold: >100/100	DET P P NNNN	Select Marker
3/div Ref 82.99) dBµV		Mkr	2 2.389 82 GHz 18.295 dBµV	2
					Norma
				2	Delt
			- Land		Fixed
t 2.30000 GHz BW (CISPR) 1 N	1Hz #VBW	10 Hz		Stop 2.41200 GHz 12.84 s (1001 pts)	c
NODE TRC SCL N 1 f N 1 f	× 2.390 00 GHz 2.389 82 GHz	18.482 dBuV	TION FUNCTION WIDTH	FUNCTION VALUE	******
المراقع من عن الم المراقع من عن الم المراقع من عن الم					Properties
x Y 2,390 00 GHz 18,482 dBµV	18.482 dBuV	FUNC			Properties) More 1 of 2


(AVERAGE, Channel 1, 802.11n (HT20))



(PEAK, Channel 11, 802.11n (HT20))



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China Fax: 86-755-36698525





Marker		07:46:29 AM Jul 19, 2024					F PRESEL 50		
Select Marker	TRACE 1 2 3 4 5 6 TYPE M WANNER	Type: Voltage lold: >100/100	AV	Trig: Free Run	GHZ PNO: Fast	000000 NFE	2.4836220	rker 2	
	001			#Atten: 6 dB	IFGain:Low	100	PREAMP	_	
	Mkr2 2.483 622 GHz dB/div Ref 82.99 dBµV 17.332 dBµV								
Norm								0	
						γ		0	
Del						+		0	
								0	
Fixe								0 9	
								1 2.46	
0	Stop 2.50000 GHz 10 Hz Sweep 4.357 s (1001 pts)					art 2.46200 GHz s BW (CISPR) 1 MHz #VBW			
	FUNCTION VALUE	FUNCTION WIDTH	FUNCTION	γ 17.453 dBμV	500 GHz	X 2 483	SCL	MODE TR	
Properties				17.332 dBµV			Î	N 1	
Ma									
10									
				in.					

(AVERAGE, Channel 11, 802.11n (HT20))



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax

Fax: 86-755-36698525

Http://www.morlab.cn



A.10. Radiated Emission

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

 $E [dB\mu V/m] = U_R + A_T + A_{Factor} [dB]; A_T = L_{Cable loss} [dB] - G_{preamp} [dB]$

A_T: Total correction Factor except Antenna

U_R: Receiver Reading

G_{preamp}: Preamplifier Gain

A_{Factor}: Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note3: For the frequency, which started from 18GHz to 10th harmonic of the highest frequency, was pre-scanned and the result which was 20dB lower than the limit was not recorded.




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China




802.11b Mode



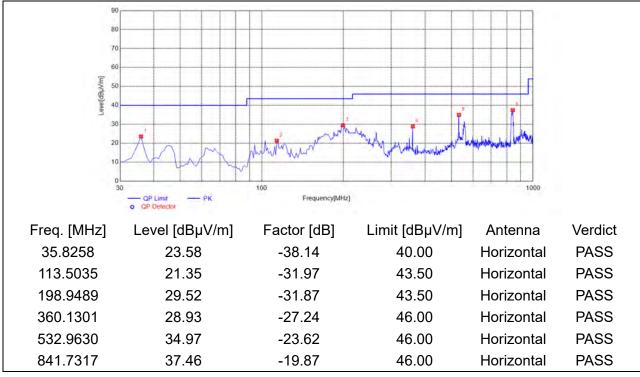

(Antenna Horizontal, 30MHz to 1GHz)

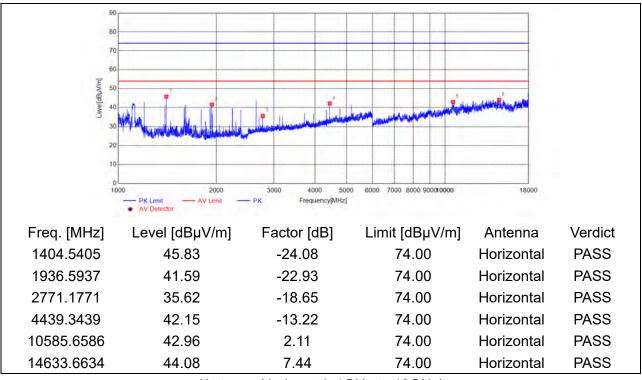

(Antenna Horizontal, 1GHz to 18GHz)





Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China Tel: 86-755-36698555 Fa

Fax: 86-755-36698525

Http://www.morlab.cn



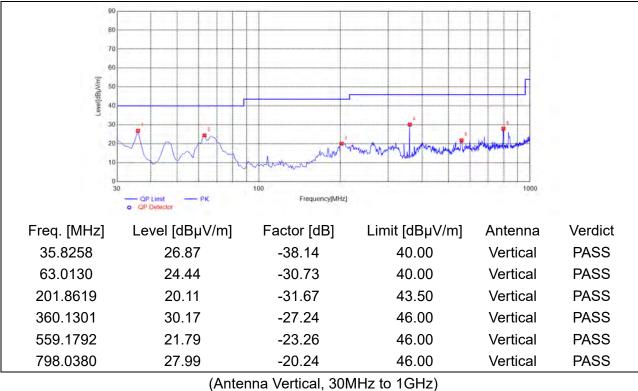

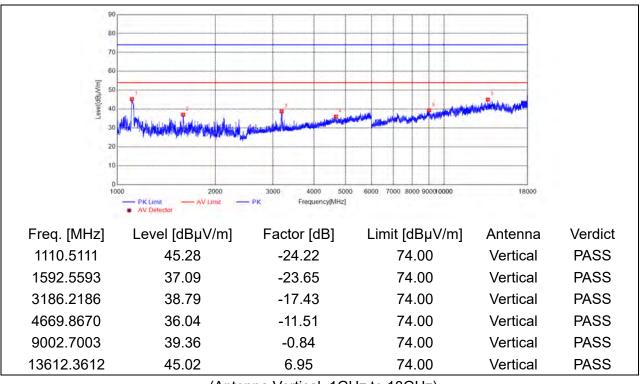


(Antenna Vertical, 1GHz to 18GHz)






Plot for Channel 6

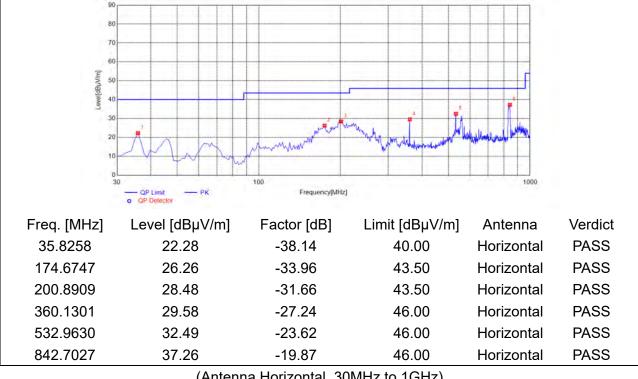

(Antenna Horizontal, 30MHz to 1GHz)

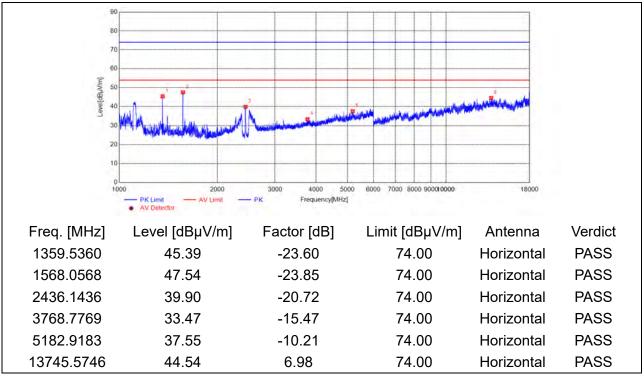


(Antenna Horizontal, 1GHz to 18GHz)




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China



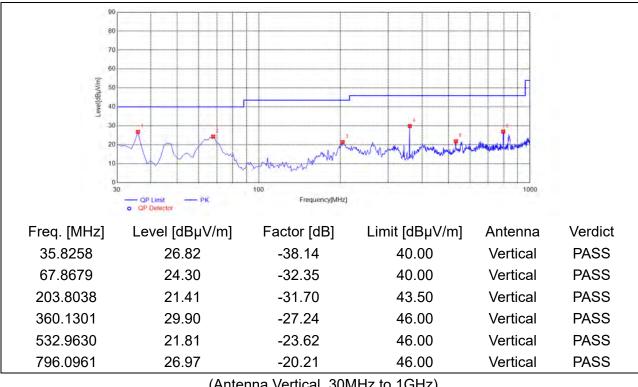

(Antenna Vertical, 30MHz to 1GHz)

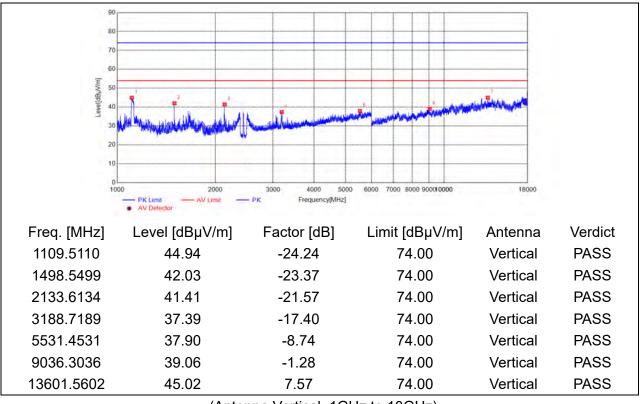


(Antenna Vertical, 1GHz to 18GHz)




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China



Plot for Channel 11

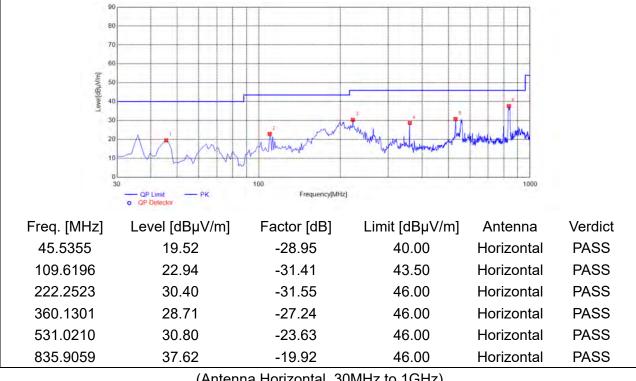

(Antenna Horizontal, 30MHz to 1GHz)

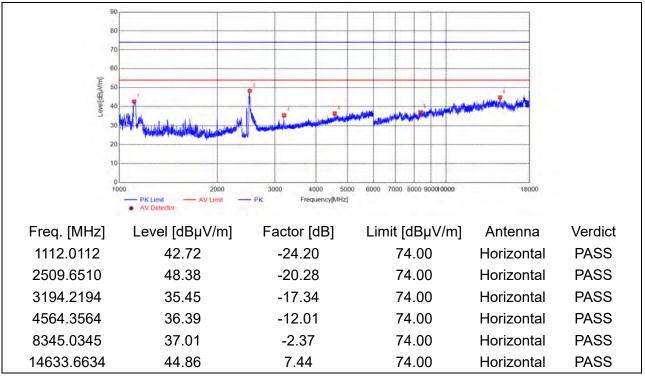



(Antenna Horizontal, 1GHz to 18GHz)



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China



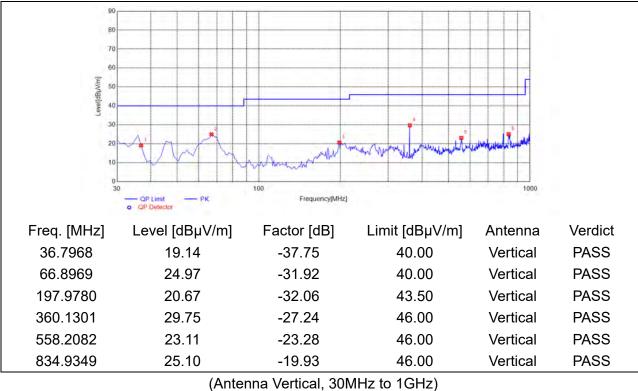

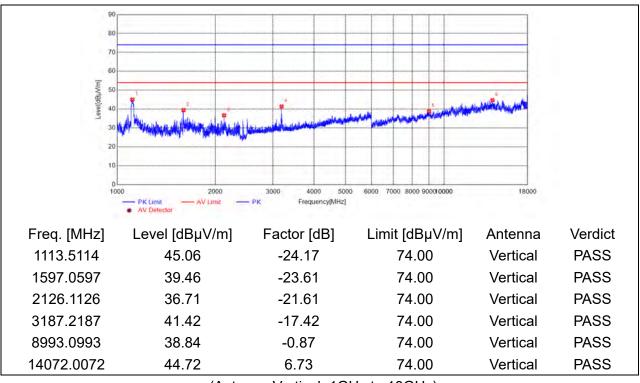


(Antenna Vertical, 1GHz to 18GHz)






802.11g Mode

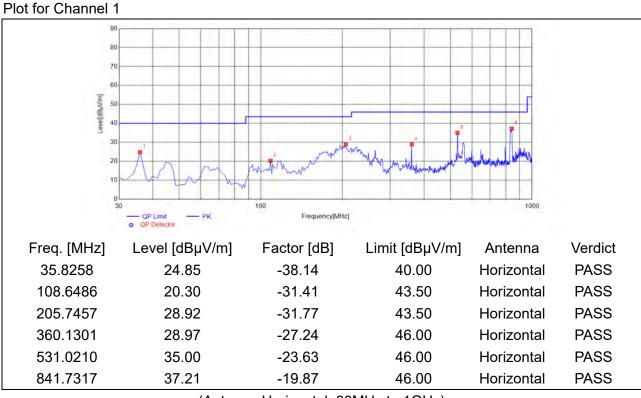

(Antenna Horizontal, 30MHz to 1GHz)

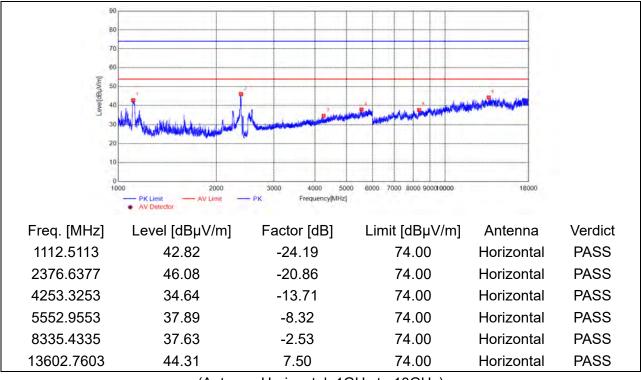

(Antenna Horizontal, 1GHz to 18GHz)




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China Tel: 86-755-36698555


Http://www.morlab.cn

Fax: 86-755-36698525



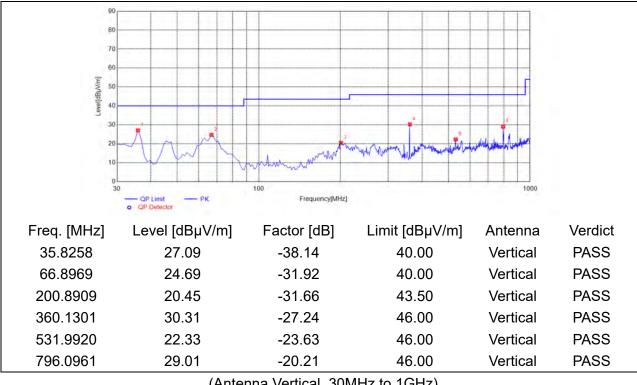

(Antenna Vertical, 30MHz to 1GHz)

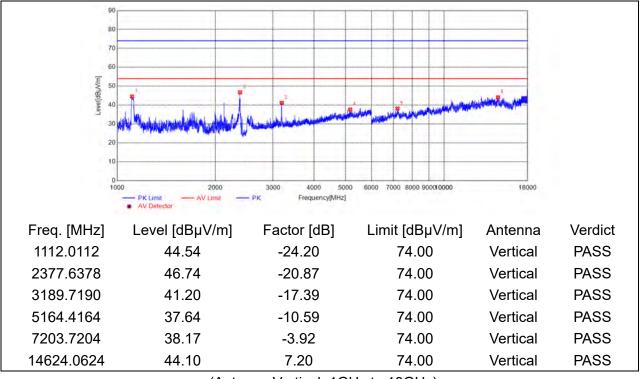



(Antenna Vertical, 1GHz to 18GHz)





Plot for Channel 6

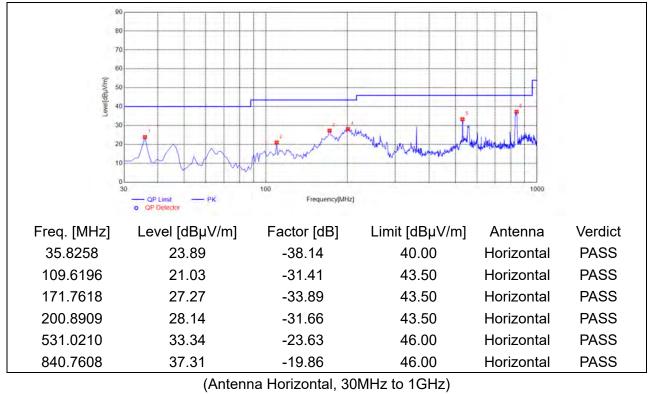

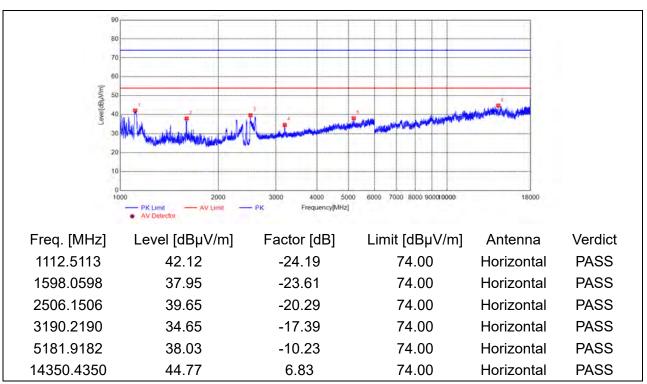



(Antenna Horizontal, 1GHz to 18GHz)




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China



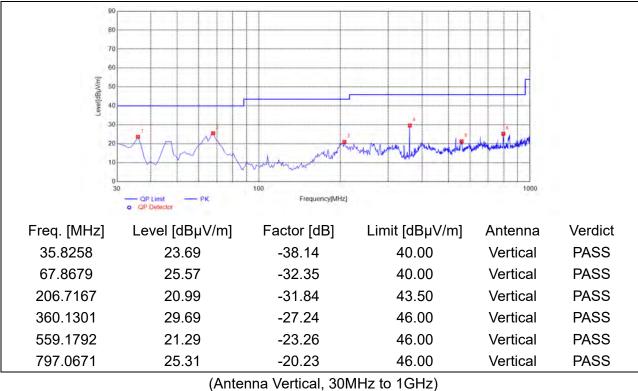



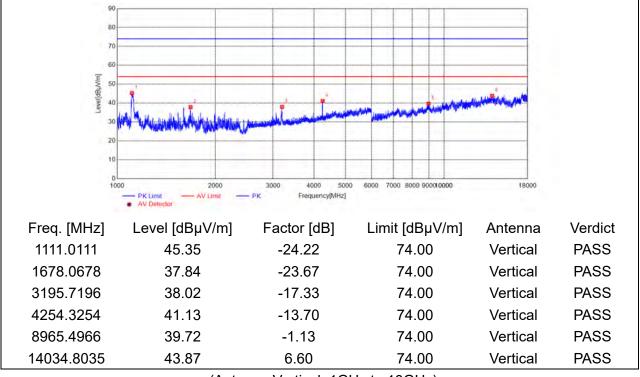


(Antenna Vertical, 1GHz to 18GHz)






Plot for Channel 11

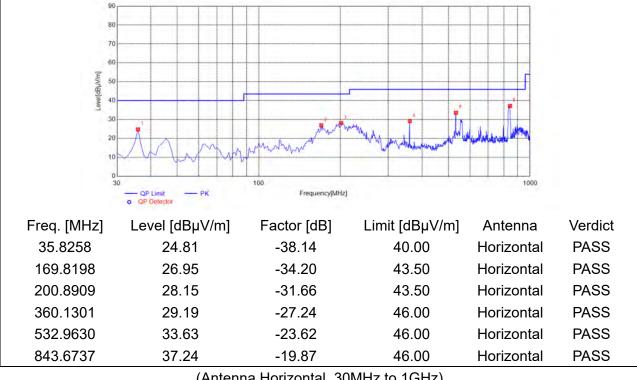

(Antenna Horizontal, 30MHz to 1GHz)

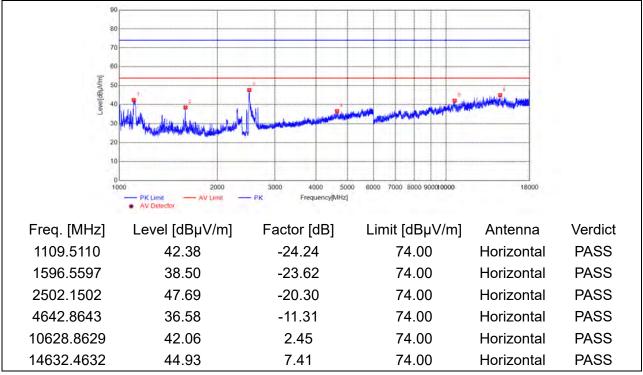


(Antenna Horizontal, 1GHz to 18GHz)



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China



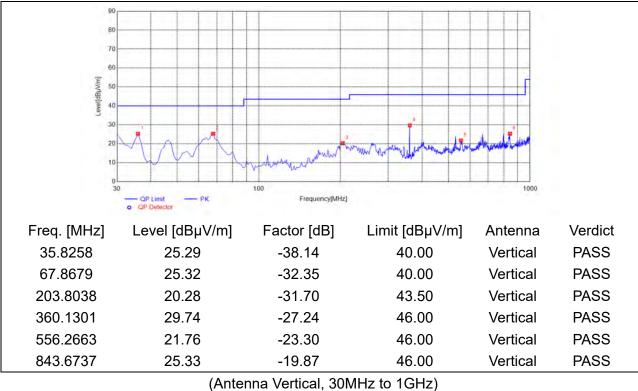


90 80 70 60 wel[dBuV/m] 50 40 1000 7000 8000 900010000 18000 2000 4000 5000 6000 3000 PK Limit
 AV Detecto AV Limit Frequency[MHz] Freq. [MHz] Level [dBµV/m] Factor [dB] Limit [dBµV/m] Antenna Verdict 1111.0111 45.25 -24.22 74.00 Vertical PASS PASS 2505.1505 46.33 -20.30 74.00 Vertical 35.58 -17.39 74.00 Vertical PASS 3190.2190 5138.9139 36.54 -10.93 74.00 Vertical PASS 11293.7294 42.44 3.05 74.00 Vertical PASS 14032.4032 45.10 6.52 74.00 Vertical PASS

(Antenna Vertical, 1GHz to 18GHz)






802.11n (HT20) Mode

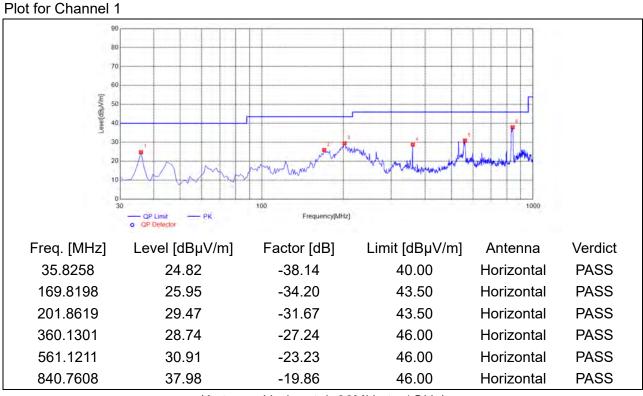

(Antenna Horizontal, 30MHz to 1GHz)

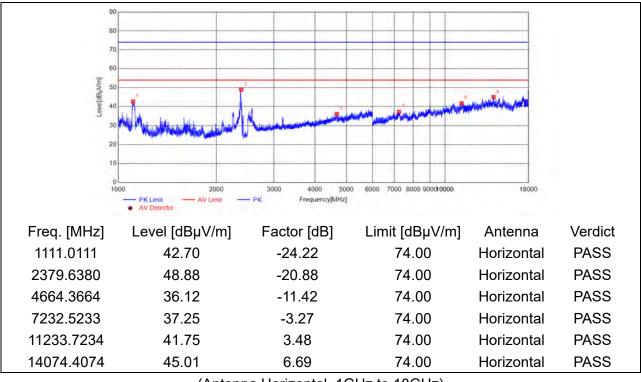

(Antenna Horizontal, 1GHz to 18GHz)




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China Tel: 86-755-36698555 E-mail: service@morlab.cn


Fax: 86-755-36698525

Http://www.morlab.cn



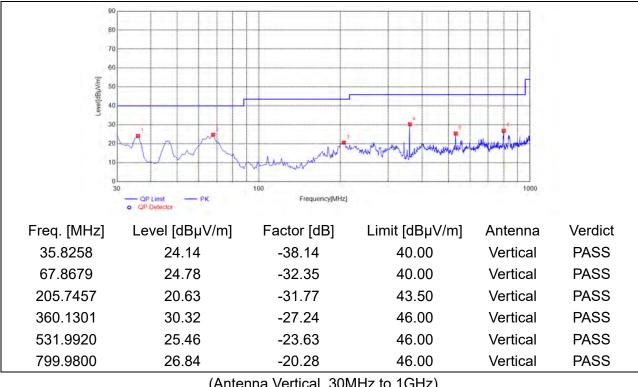

(Antenna Vertical, 30MHz to 1GHz)

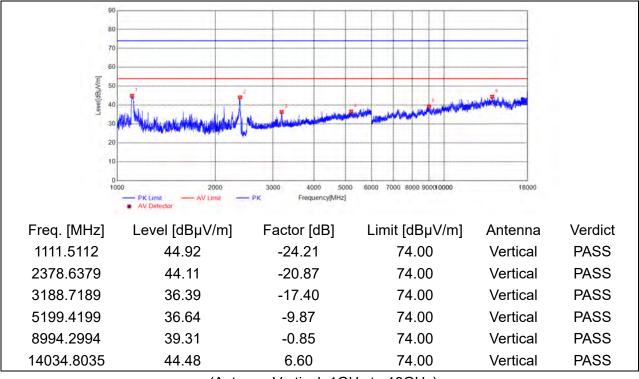



(Antenna Vertical, 1GHz to 18GHz)





Plot for Channel 6

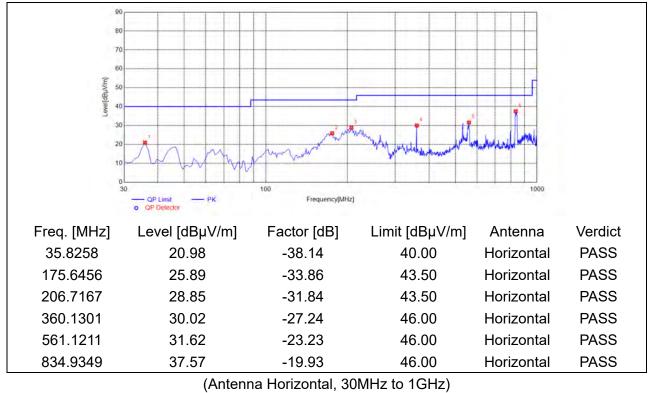

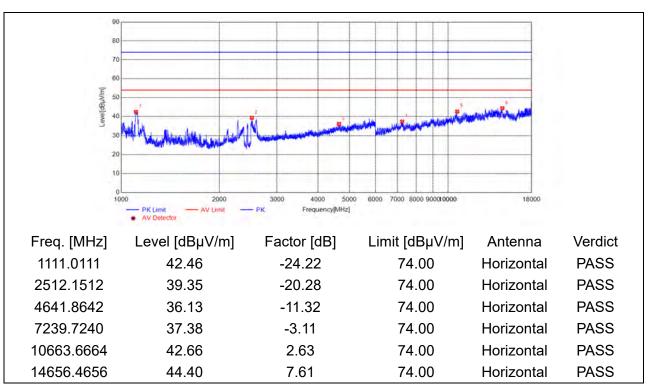


(Antenna Horizontal, 1GHz to 18GHz)




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China



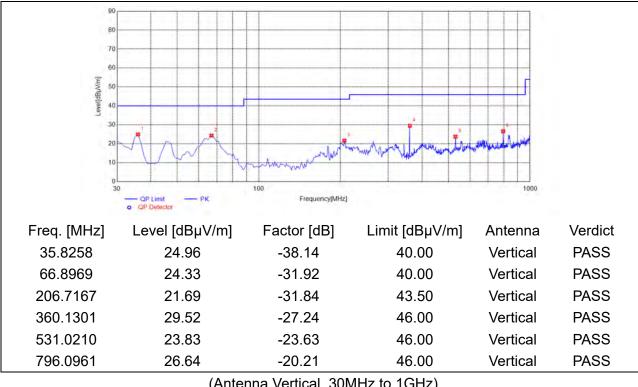

(Antenna Vertical, 30MHz to 1GHz)

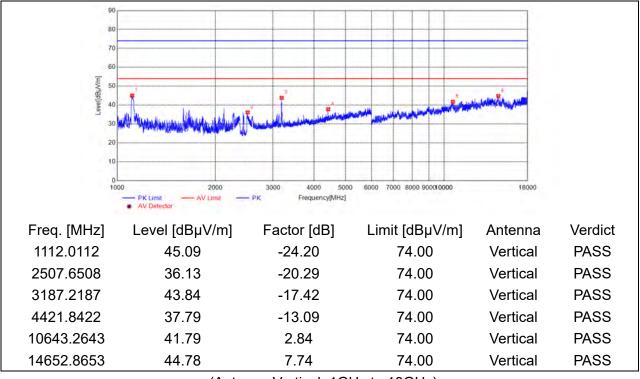


(Antenna Vertical, 1GHz to 18GHz)






Plot for Channel 11

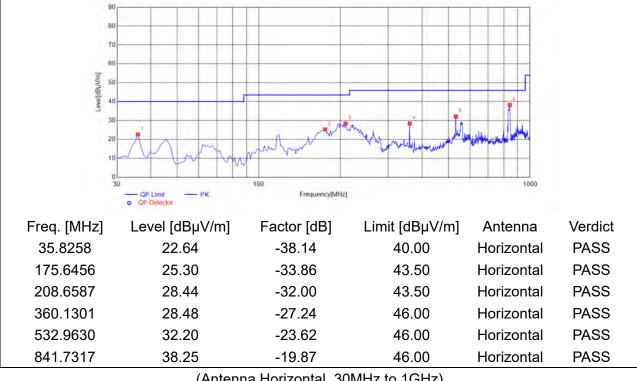

(Antenna Horizontal, 30MHz to 1GHz)

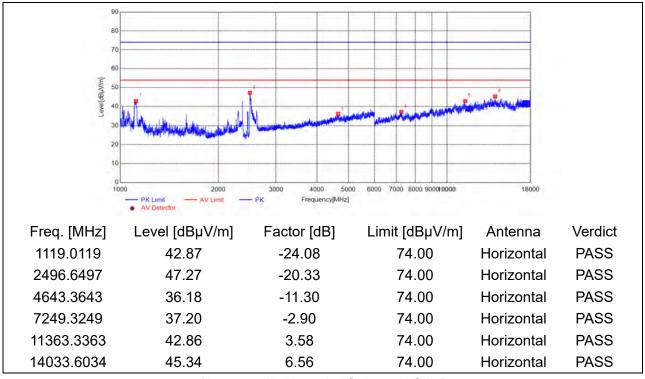


(Antenna Horizontal, 1GHz to 18GHz)




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China



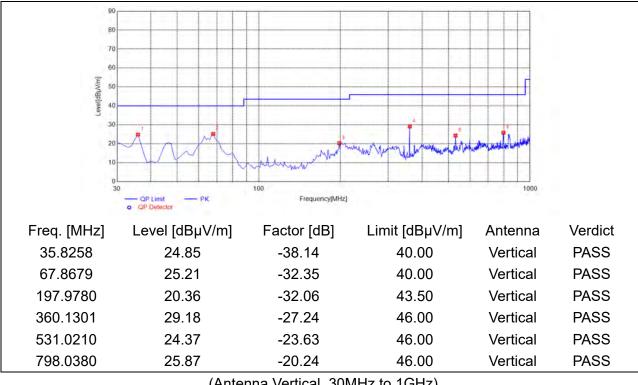

(Antenna Vertical, 30MHz to 1GHz)

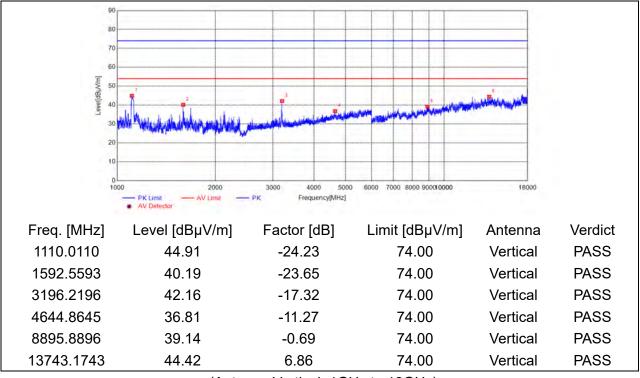

(Antenna Vertical, 1GHz to 18GHz)

END OF REPORT



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn E-mail: service@morlab.cn

Fax: 86-755-36698525